



Zacta

TEST REPORT

Report number : Z101C-15142

Issue date : December 29, 2015

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KA73
FCC ID	: JOYKA73

Date of test : November 12, 13, 17, 19, December 16, 2015
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome
 Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888
 Test results : Complied

The results in this report are applicable only to the equipment tested.
 This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
 This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe
 Taiki Watanabe

Tested by : Hikaru Shibata
 Hikaru Shibata

Authorized by : Hiroaki Suzuki
 Hiroaki Suzuki
 Manager of EMC Technical Department



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	6
2.6 Operating flow	7
3. Configuration of equipment	8
3.1 Equipment(s) used	8
3.2 Cable(s) used	8
3.3 System configuration	8
4. 6dB Bandwidth	9
4.1 Measurement procedure	9
4.2 Limit	9
4.3 Measurement result	9
4.4 Trace data	10
5. Maximum Peak Output Power	11
5.1 Measurement procedure	11
5.2 Limit	11
5.3 Measurement result	11
6. Band Edge Compliance of RF Conducted Emissions	12
6.1 Measurement procedure	12
6.2 Limit	12
6.3 Measurement result	12
6.4 Trace data	13
7. Spurious emissions - Conducted -	14
7.1 Measurement procedure	14
7.2 Limit	14
7.3 Measurement result	14
7.4 Trace data	15
8. Spurious Emissions - Radiated -	18
8.1 Measurement procedure	18
8.2 Calculation method	19
8.3 Limit	19
8.4 Test data	20
9. Restricted Band of Operation	21
9.1 Measurement procedure	21
9.2 Limit	21



Zacta

9.3 Measurement Result..... 22

9.4 Test data..... 22

10. Transmitter Power Spectral Density..... 25

10.1 Measurement procedure..... 25

10.2 Limit..... 25

10.3 Measurement result..... 25

10.4 Trace data 26

11. AC Power Line Conducted Emissions..... 27

11.1 Measurement procedure 27

11.2 Calculation method..... 27

11.3 Limit..... 27

11.4 Test data..... 28

12. Antenna requirement 29

13. Uncertainty of measurement..... 30

14. Laboratory description 31

Appendix A. Test equipment 32

Appendix B. Duty Cycle..... 33

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.10-2009, KDB558074 D01 DTS Meas Guidance v03r03

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	6dB Bandwidth	Conducted	PASS
15.247(b)(3)	Maximum Peak Output Power	Conducted	PASS
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Zacta

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KA73
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 51.3 × (D) 113.8 × (H) 18.2 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Protocol	:	Bluetooth 4.1 + EDR
Frequency range	:	2402MHz-2480MHz
Number of RF Channels	:	40 Channels
Modulation method/ Data rate	:	GFSK (1Mbps)
Channel separation	:	2MHz
Output power	:	1.585mW
Antenna type	:	Internal antenna
Antenna gain	:	2.8dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1Mbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.
The worst emission was found in X axis and the worst case recorded.

2.6 Operating flow

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz
- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KA73	N/A	JOYKA73	EUT
2	AC Adapter	au	N/A	N/A	N/A	*

*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable(for AC Adapter)	1.0	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration



: Un-detachable cable

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. 6dB Bandwidth

4.1 Measurement procedure


[FCC 15.247(a)(2), KDB558074 D01 v0303, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW $\geq 3 \times$ RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration

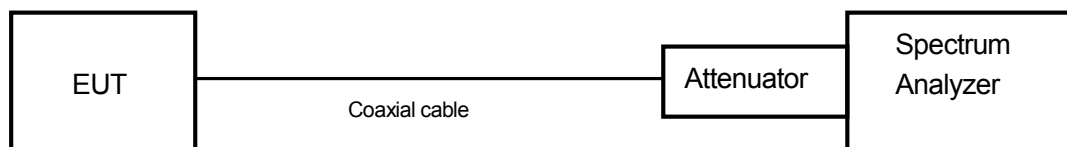

4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

4.3 Measurement result

Date : November 12, 2015
 Temperature : 23.6 [°C]
 Humidity : 46.2 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata


Channel	Frequency [MHz]	6dB bandwidth [MHz]
Low	2402	0.679
Middle	2440	0.680
High	2480	0.681




Zacta

4.4 Trace data


Channel Low

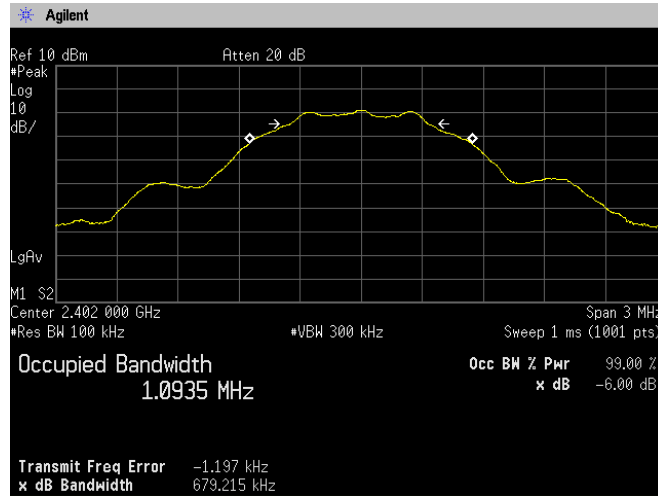

Channel Middle

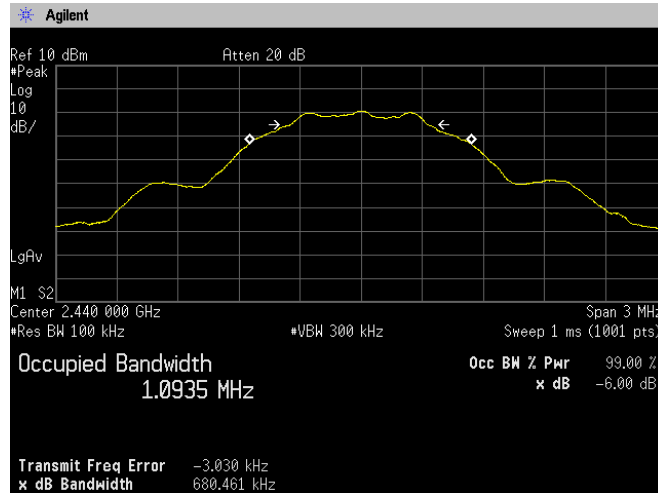

Channel High

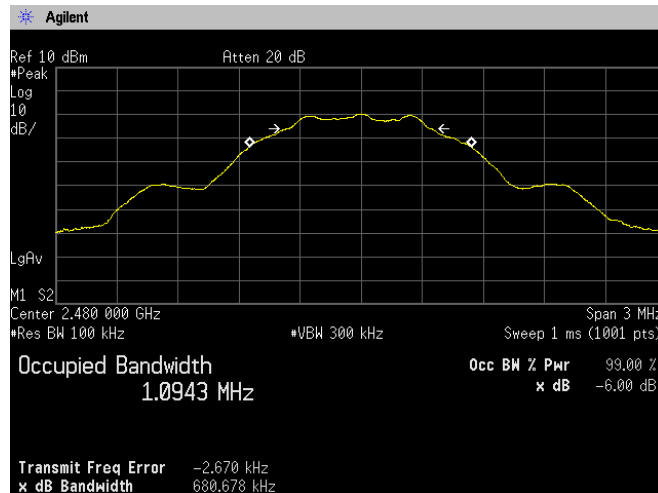


5. Maximum Peak Output Power

5.1 Measurement procedure

[FCC 15.247(b)(3), KDB558074 D01 v03r03, Section 9.1.2]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

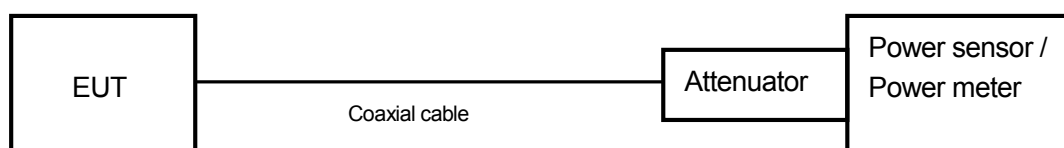

5.2 Limit

1W (1000mW) or less

5.3 Measurement result

Date : November 13, 2015
 Temperature : 23.6 [°C]
 Humidity : 47.4 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402.00	-8.51	10.51	2.00	1.585	≤1000	PASS
Middle	2441.00	-8.91	10.51	1.60	1.445	≤1000	PASS
High	2480.00	-9.34	10.51	1.17	1.309	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10 \log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

6. Band Edge Compliance of RF Conducted Emissions

6.1 Measurement procedure


[FCC 15.247(d), KDB558074 D01 v03r03, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- Span = Arbitrary setting. (Setting suitable for measurement.)
- RBW \geq 1% of the span
- VBW \geq RBW
- Sweep time = auto-couple.
- Detector = peak.
- Trace mode = max hold.

- Test configuration

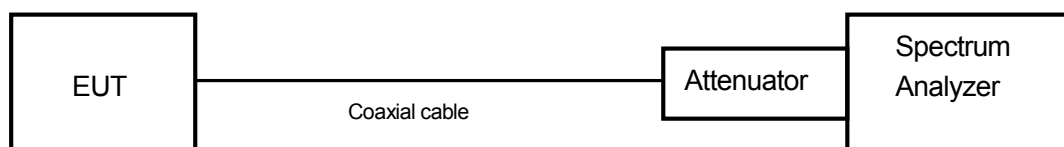

6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.3 Measurement result

Date : November 12, 2015
 Temperature : 23.6 [°C]
 Humidity : 46.2 [%]
 Test place : Shielded room No.4


Test engineer :

Hikaru Shibata


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402.00	-8.73	2400.00	-65.53	56.80	At least 20dB below from peak of RF	PASS
High	2480.00	-9.68	2484.50	-75.70	66.02	At least 20dB below from peak of RF	PASS

6.4 Trace data

Channel Low

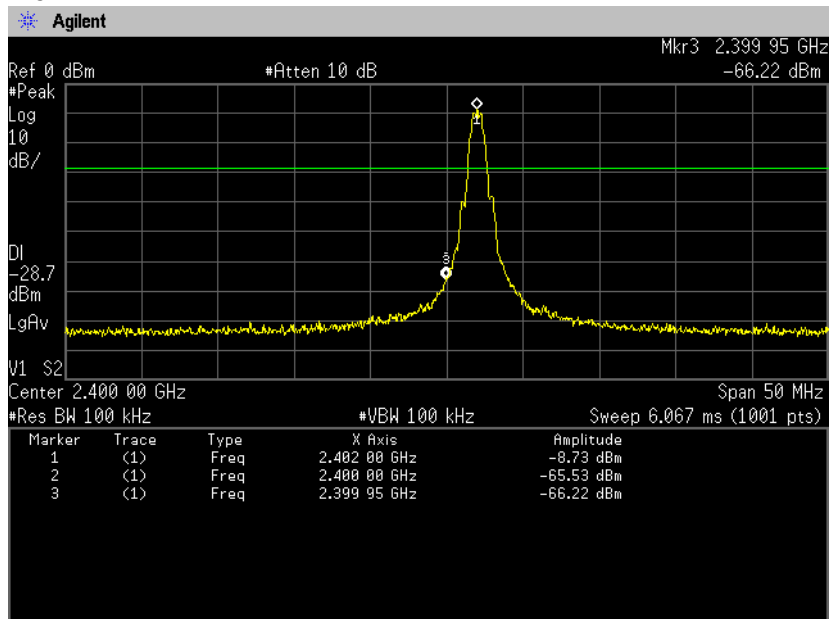

Channel High

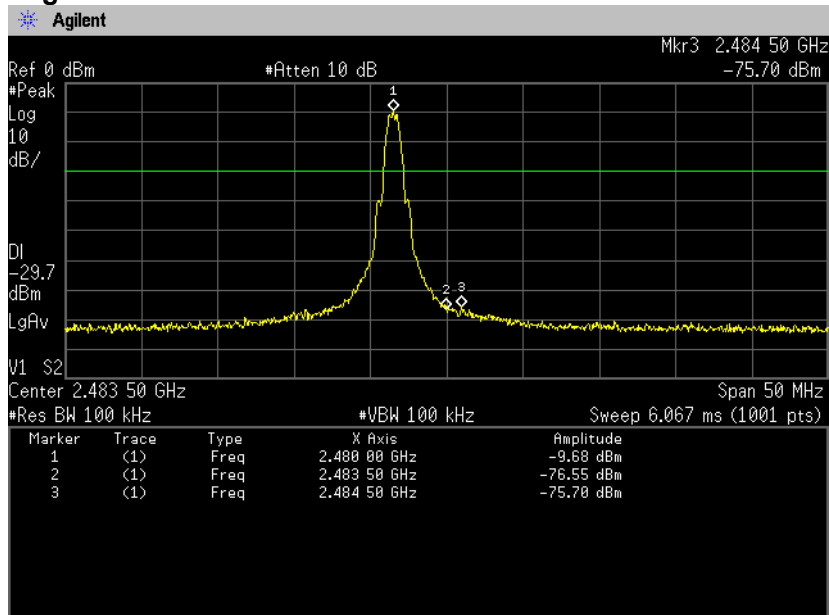

7. Spurious emissions - Conducted -

7.1 Measurement procedure


[FCC 15.247(d), KDB558074 D01 v03r03, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW \geq RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

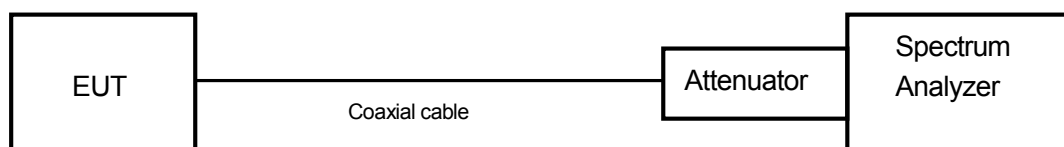

7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3 Measurement result

Date : November 12, 2015
 Temperature : 23.6 [°C]
 Humidity : 46.2 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2402	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2440	At least 20dB below from peak of RF	See the trace Data	PASS
High	2480	At least 20dB below from peak of RF	See the trace Data	PASS




Zacta

7.4 Trace data


Channel Low 30MHz-1GHz

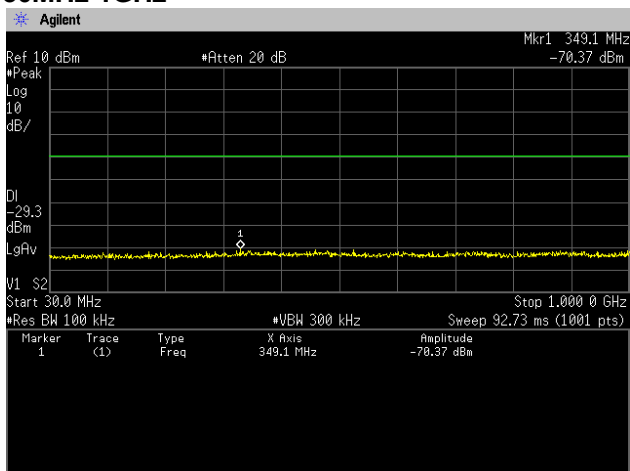


1GHz-5GHz

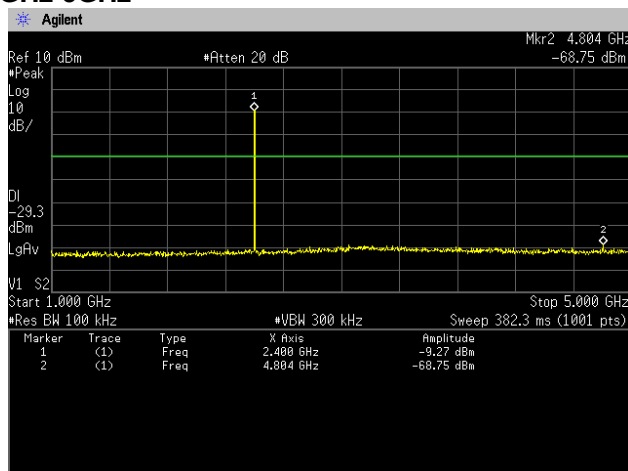


5GHz-10GHz

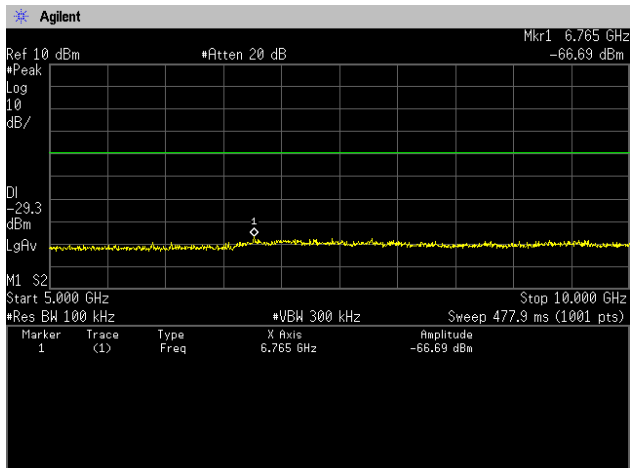


10GHz-15GHz

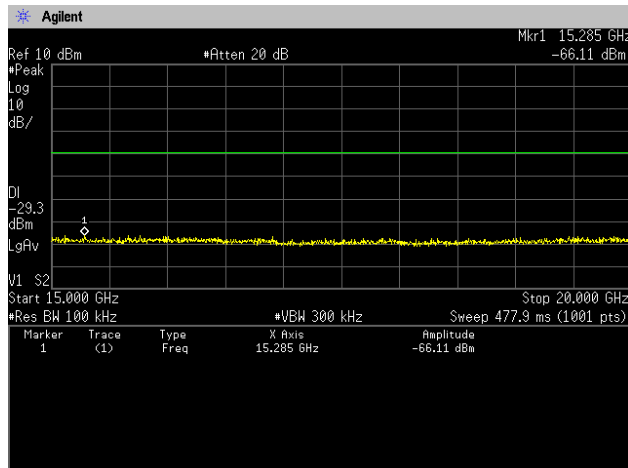

15GHz-20GHz

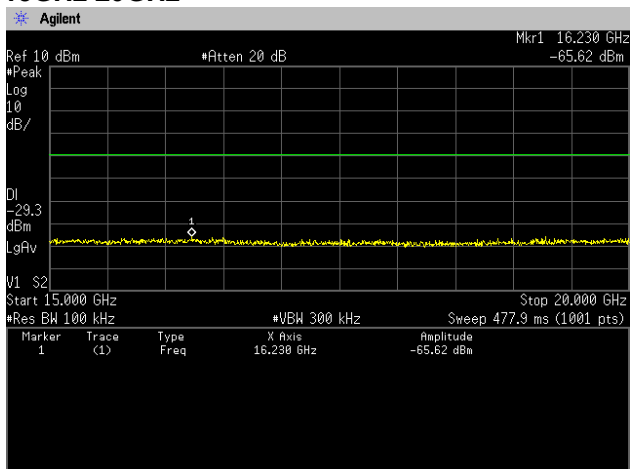


20GHz-25GHz

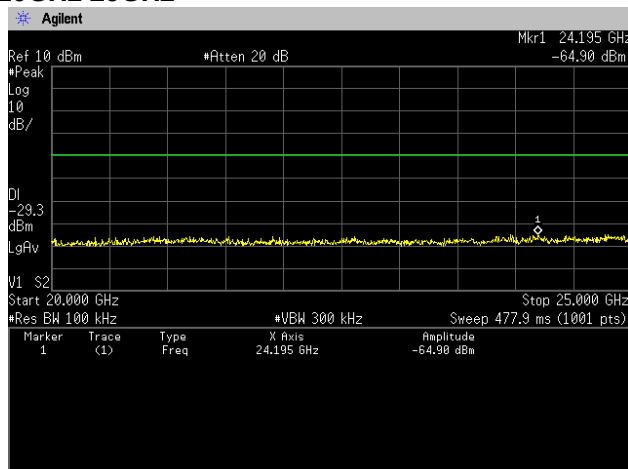




Zacta


Channel Middle 30MHz-1GHz

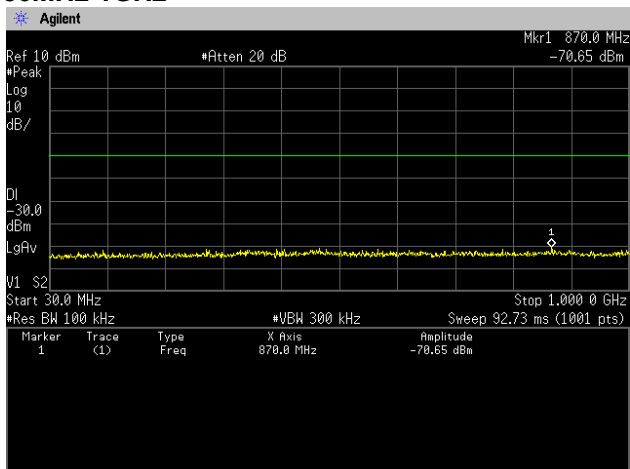


1GHz-5GHz

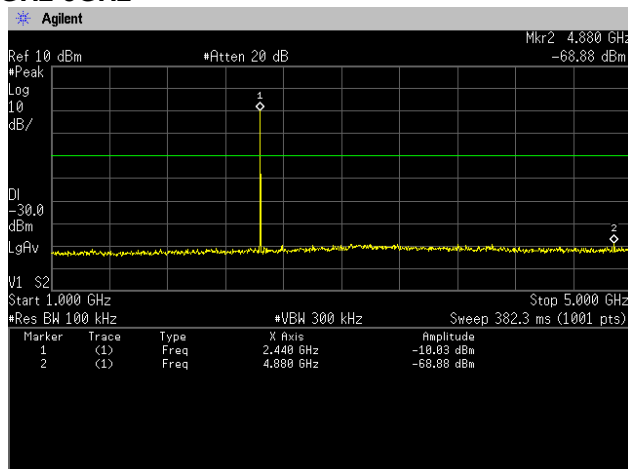


5GHz-10GHz

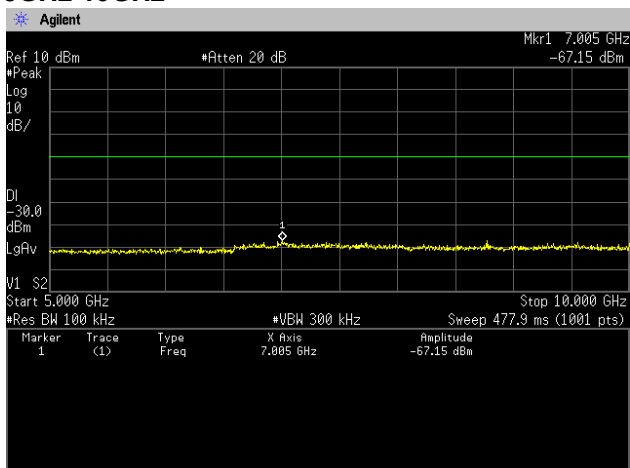


10GHz-15GHz

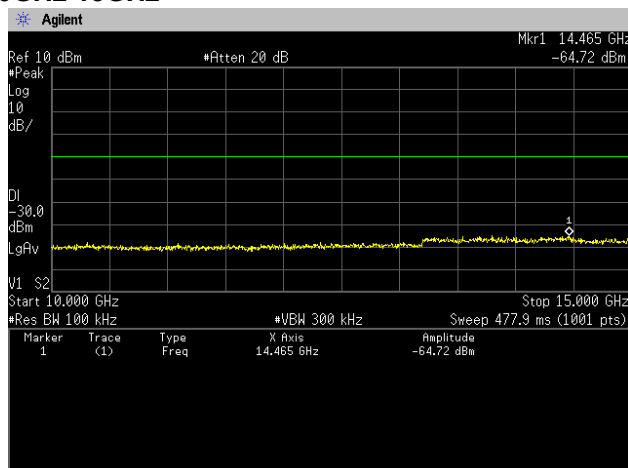

15GHz-20GHz

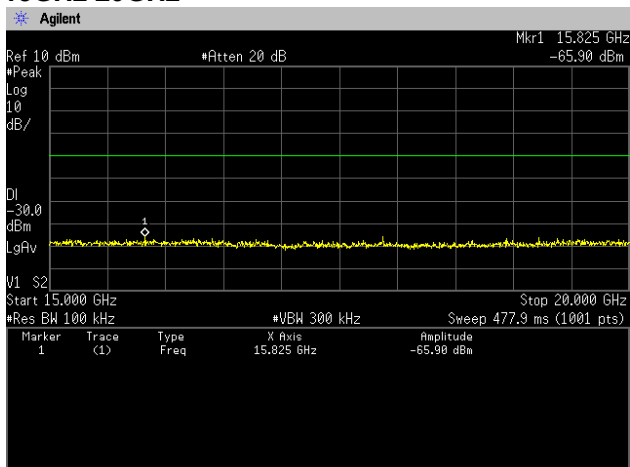


20GHz-25GHz

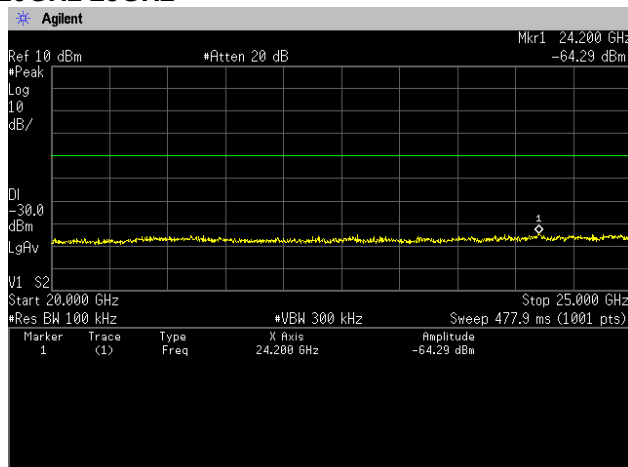




Zacta


Channel High 30MHz-1GHz

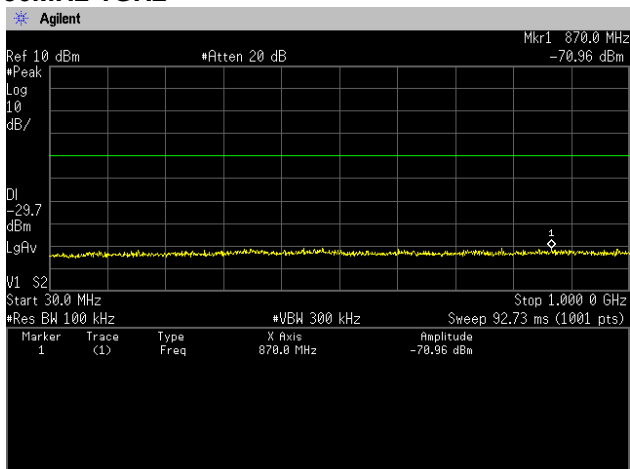


1GHz-5GHz

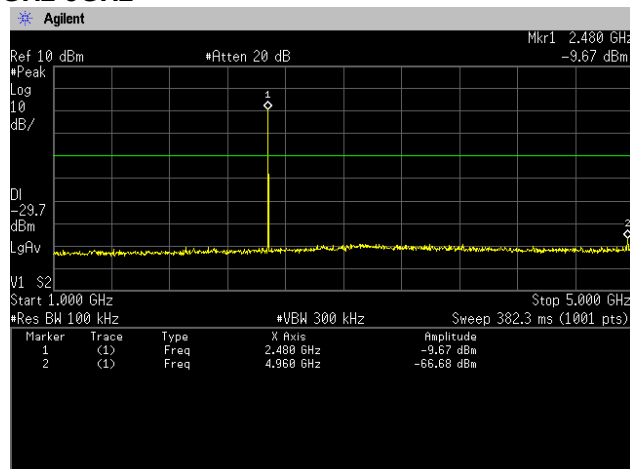


5GHz-10GHz

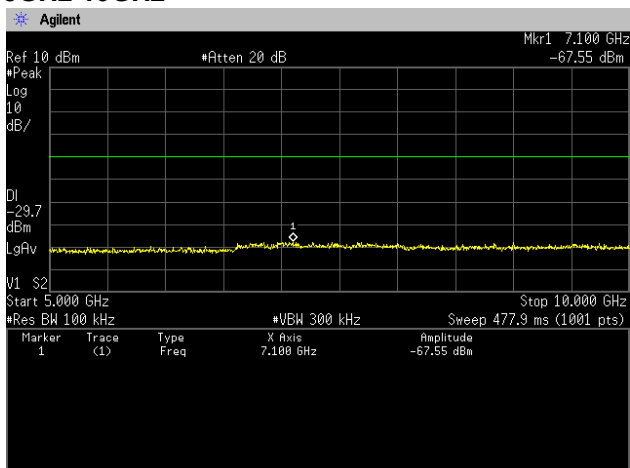


10GHz-15GHz

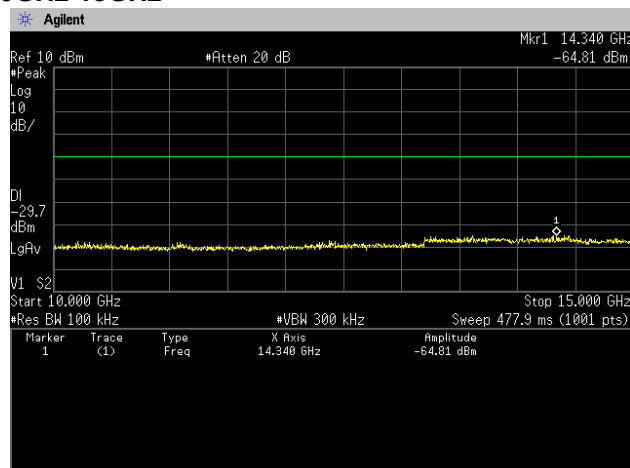

15GHz-20GHz

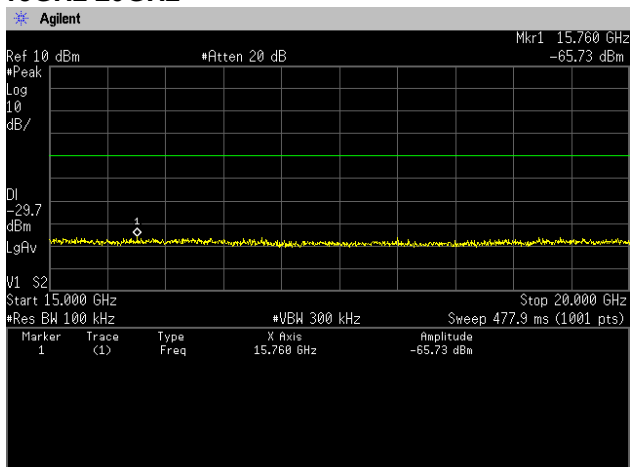

20GHz-25GHz

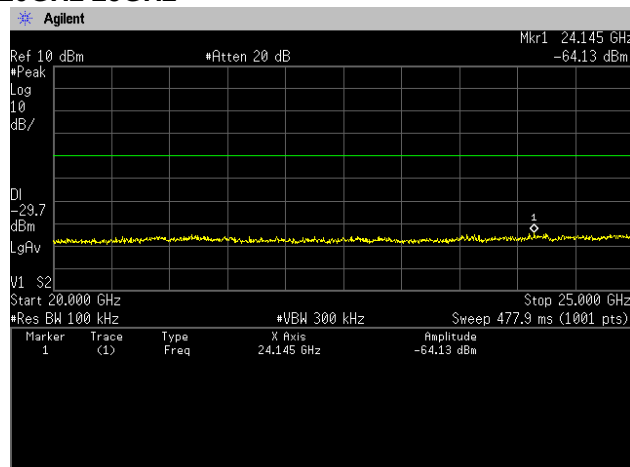

8. Spurious Emissions - Radiated -

8.1 Measurement procedure

[FCC 247(d), 15,205, 15.209, KDB 558074 D01 v03r03, Section 12.0]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=3kHz, Span=0Hz, Sweep=auto
		Display mode=Linear


Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
Bluetooth 4.1 LE	62.4	390	235	2.6	3kHz

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

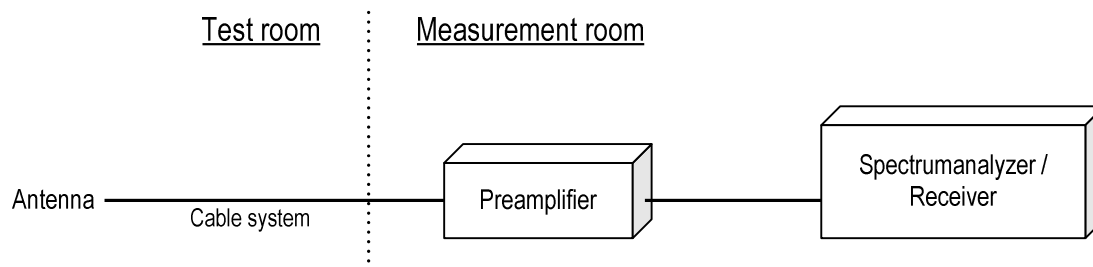

8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



Zacta

8.4 Test data

Date : December 16, 2015
 Temperature : 23.3 [°C]
 Humidity : 21.5 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Hikaru Shibata

Channel Low

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	4804.000	H	48.8	36.2	8.3	57.1	44.5	74.0	54.0	16.9	9.5	100.0	0.0
2	4804.000	V	48.5	36.4	8.3	56.8	44.7	74.0	54.0	17.2	9.3	100.0	0.0

Channel Middle

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	4880.000	H	48.9	36.3	8.7	57.6	45.0	74.0	54.0	16.4	9.0	100.0	0.0
2	4880.000	V	48.5	36.5	8.7	57.2	45.2	74.0	54.0	16.8	8.8	100.0	0.0

Channel High

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	4960.000	H	47.9	35.9	8.8	56.7	44.7	74.0	54.0	17.3	9.3	100.0	0.0
2	4960.000	V	47.3	36.1	8.8	56.1	44.9	74.0	54.0	17.9	9.1	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

9. Restricted Band of Operation

9.1 Measurement procedure

[FCC 247(d), 15,205, 15.209, KDB 558074 D01 v03r03, Section 12.0]

Test was applied by following conditions.

Test method : ANSI C63.10
 Test place : 3m Semi-anechoic chamber
 EUT was placed on : FRP table / (W)2.0m × (D)1.0m × (H)0.8m
 Antenna distance : 3m

Spectrum analyzer setting
 - Peak : RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
 - Average : RBW=1MHz, VBW=3kHz, Span=Arbitrary setting, Sweep=auto
 Display mode=Linear


Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
Bluetooth 4.1 LE	62.4	390	235	2.6	3kHz

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

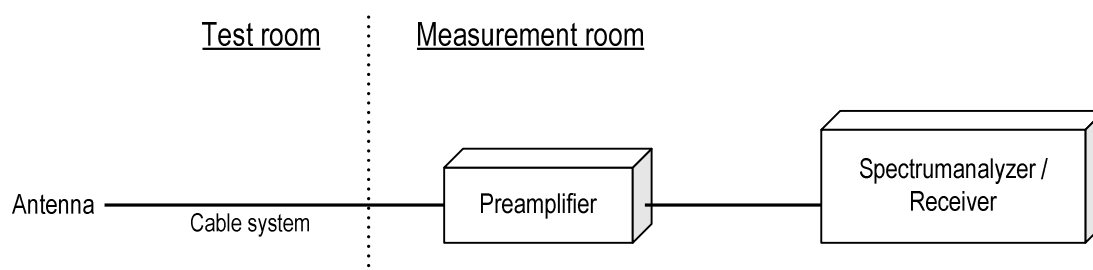

9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

9.3 Measurement Result

Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

9.4 Test data


Date : November 17, 2015
Temperature : 23.4 [°C]
Humidity : 42.4 [%]
Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe




Zacta

Channel Low Horizontal Peak

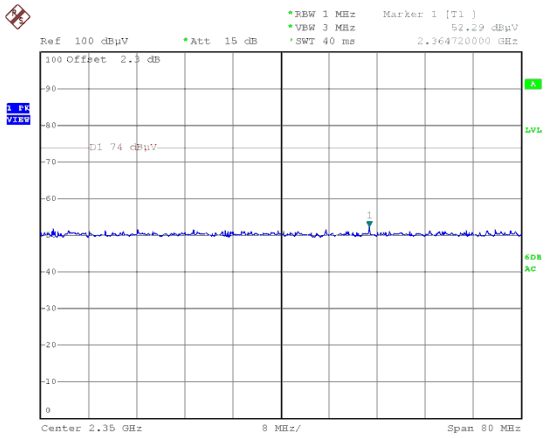


Date: 17.DEC.2015 21:01:32

Average

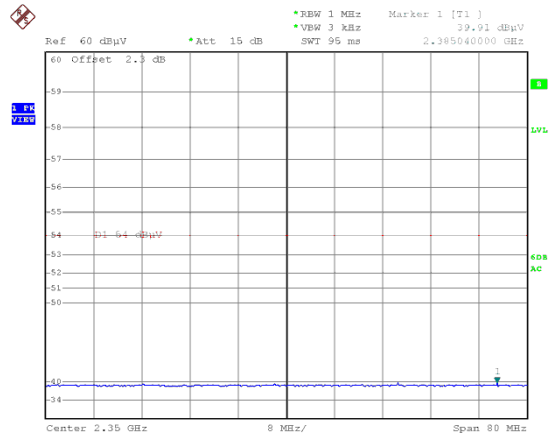


Date: 17.DEC.2015 21:00:32

Vertical Peak

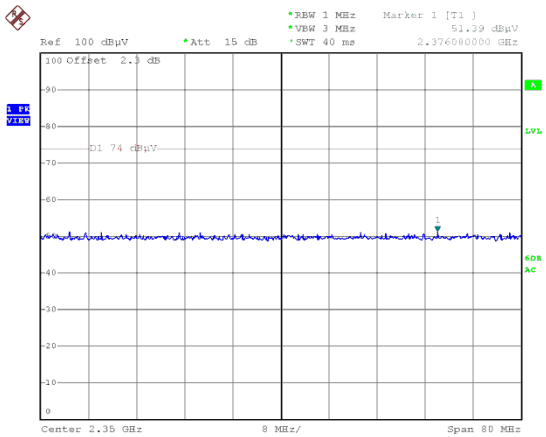

Date: 17.DEC.2015 21:07:10

Average

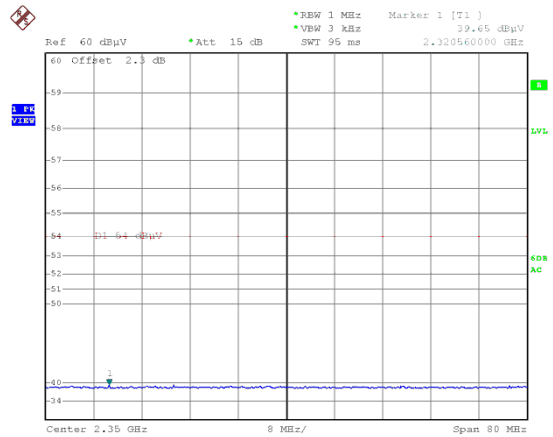


Date: 17.DEC.2015 21:06:34




Zacta

Channel High Horizontal Peak

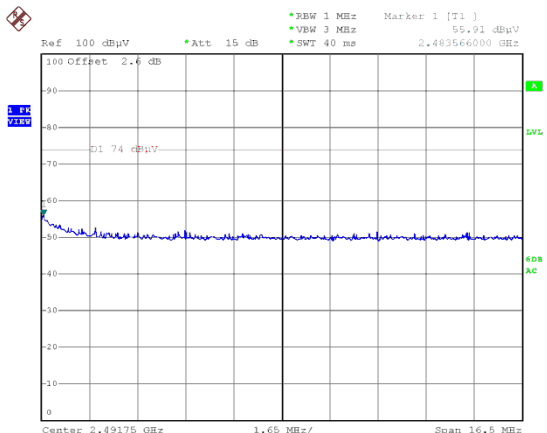


Date: 17.DEC.2015 21:26:36

Average

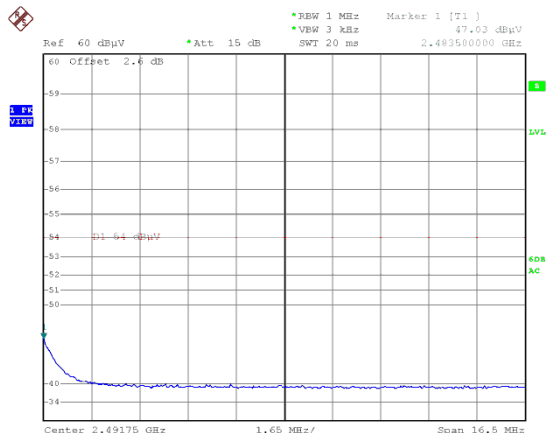


Date: 17.DEC.2015 21:27:17

Vertical Peak

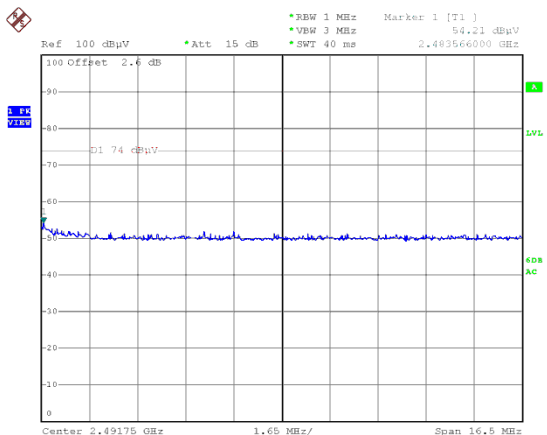

Date: 17.DEC.2015 21:23:47

Average

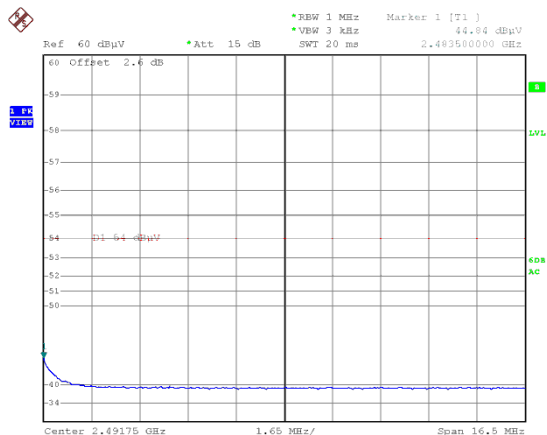

Date: 17.DEC.2015 21:24:56

10. Transmitter Power Spectral Density

10.1 Measurement procedure


[FCC 15.247(e), KDB558074 D01 v03r03, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- Span = 1.5 times the 6 dB bandwidth.
- RBW = 3kHz - 100kHz.
- VBW \geq 3 x RBW.
- Sweep time = auto-couple.
- Detector = peak.
- Trace mode = max hold.

- Test configuration

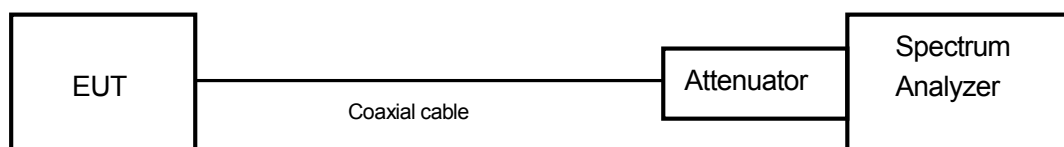

10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

10.3 Measurement result

Date : November 13, 2015

Temperature : 23.6 [°C]

Humidity : 47.4 [%]

Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-23.86	10.53	-13.33	8.00	21.33	PASS
Middle	2440.00	-24.28	10.53	-13.75	8.00	21.75	PASS
High	2480.00	-24.70	10.53	-14.17	8.00	22.17	PASS

Calculation;


Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)




Zacta

10.4 Trace data


Channel Low

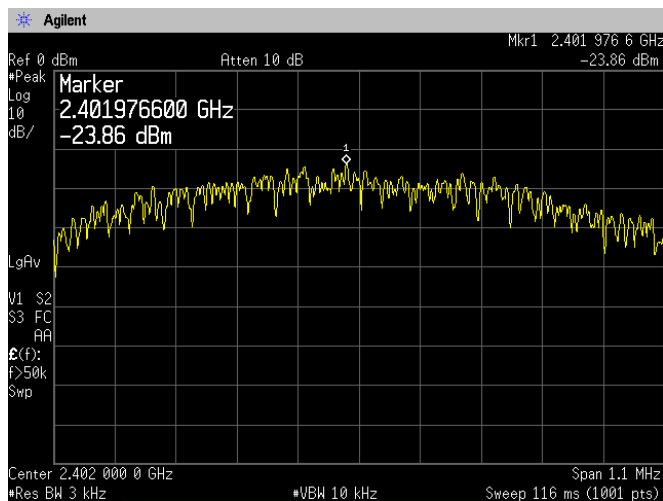

Channel Middle

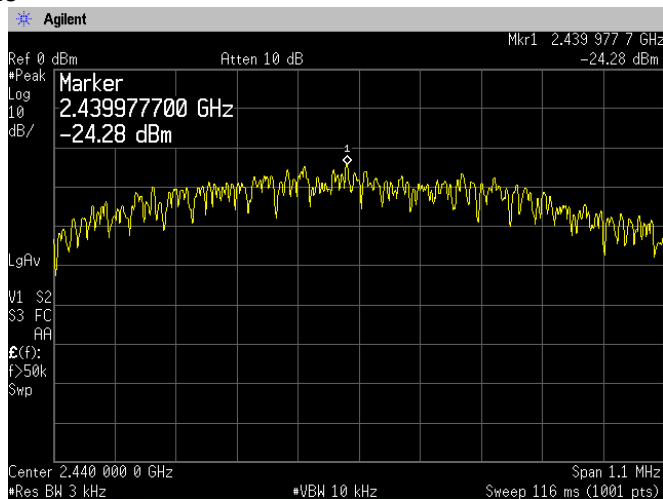

Channel High

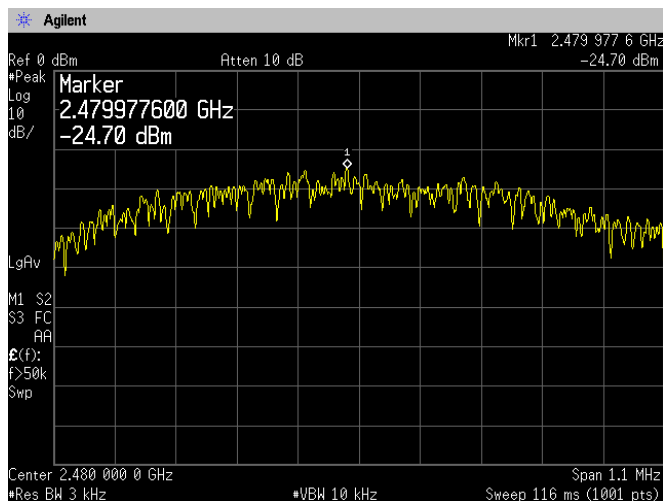

11. AC Power Line Conducted Emissions

11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15MHz to 30MHz
Test place	: 10m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	: (W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

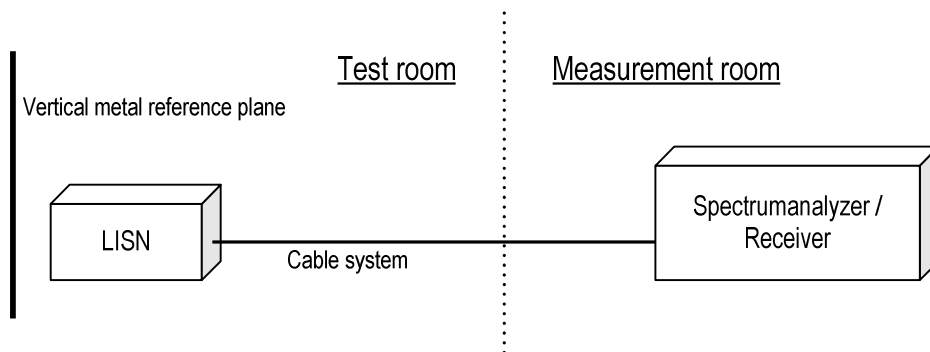

11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50


*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.



Zacta

11.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
 [10m semi-anechoic chamber #1]

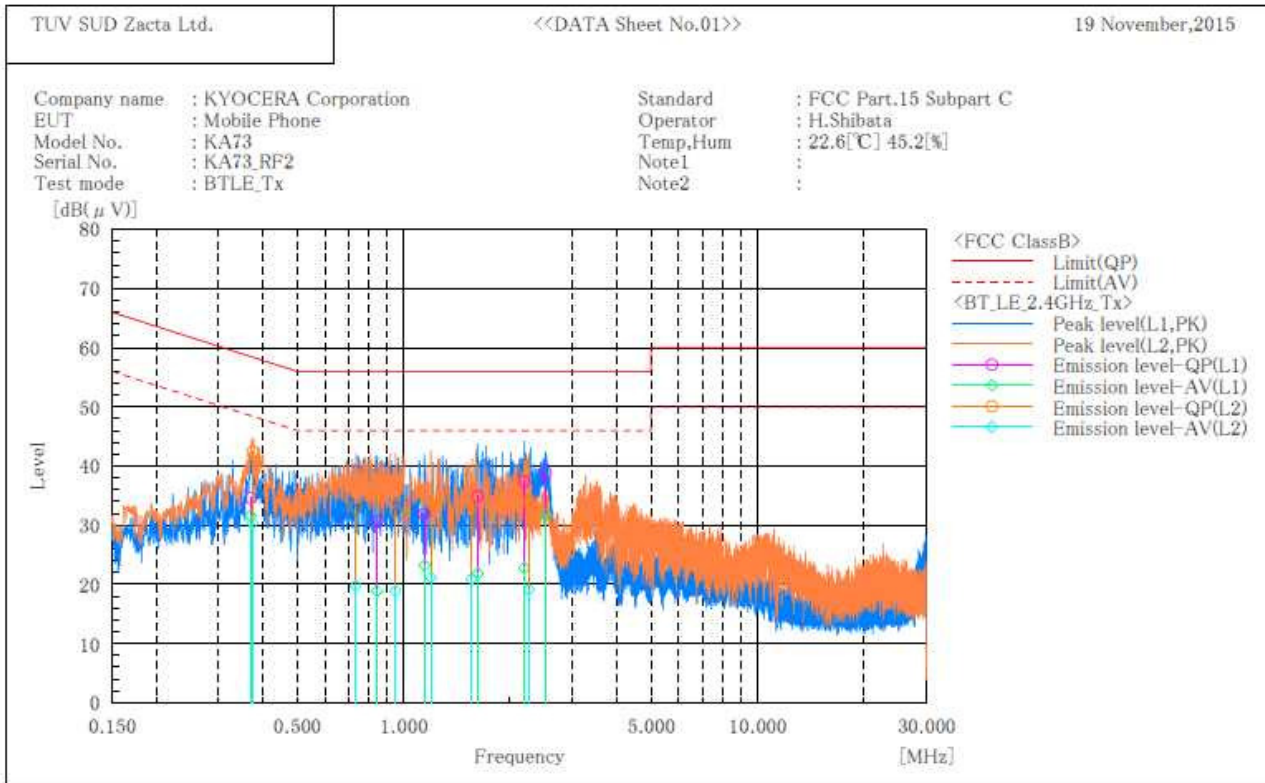

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading		c. f [dB]	Result		Limit		Margin	
		QP [dB(μV)]	AV [dB(μV)]		QP [dB(μV)]	AV [dB(μV)]	QP [dB(μV)]	AV [dB(μV)]	QP [dB]	AV [dB]
1	0.370	24.0	21.0	10.6	34.6	31.6	58.5	48.5	23.9	16.9
2	0.843	20.1	8.3	10.6	30.7	18.9	56.0	46.0	25.3	27.1
3	1.146	21.3	12.6	10.6	31.9	23.2	56.0	46.0	24.1	22.8
4	1.622	24.2	11.1	10.7	34.9	21.8	56.0	46.0	21.1	24.2
5	2.191	26.7	12.1	10.7	37.4	22.8	56.0	46.0	18.6	23.2
6	2.521	28.1	21.0	10.8	38.9	31.8	56.0	46.0	17.1	14.2

--- L2 Phase ---

No.	Frequency [MHz]	Reading		c. f [dB]	Result		Limit		Margin	
		QP [dB(μV)]	AV [dB(μV)]		QP [dB(μV)]	AV [dB(μV)]	QP [dB]	AV [dB]		
1	0.375	31.7	19.6	10.7	42.4	30.3	58.4	48.4	16.0	18.1
2	0.733	22.4	9.1	10.7	33.1	19.8	56.0	46.0	22.9	26.2
3	0.951	21.6	8.2	10.7	32.3	18.9	56.0	46.0	23.7	27.1
4	1.196	23.1	10.5	10.7	33.8	21.2	56.0	46.0	22.2	24.8
5	1.559	22.7	10.1	10.8	33.5	20.9	56.0	46.0	22.5	25.1
6	2.263	23.1	8.2	10.9	34.0	19.1	56.0	46.0	22.0	26.9



Zacta

12. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.



Zacta

13. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$



Zacta

14. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2017
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Dec. 3, 2017
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2017
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2017
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166	A-0166	

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2016	Jun. 11, 2015
Microwave cable	RS	YH_13S5	N/A (S403)	May 31, 2016	May 10, 2015
Attenuator	Weinschel	56-10	J4180	Oct. 31, 2016	Oct. 30, 2015
Power meter	ROHDE&SCHWARZ	NRP2	103269	Jun. 30, 2016	Jun. 25, 2015
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102467	Jun. 30, 2016	Jun. 25, 2015

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2016	Aug. 21, 2015
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2016	Jun. 30, 2015
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Apr. 30, 2016	Apr. 2, 2015
Attenuator	TDC	TAT-43B-06	N/A (S209)	Apr. 30, 2016	Apr. 16, 2015
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jun. 30, 2016	Jun. 4, 2015
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2016	Jun. 4, 2015
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2016	Jun. 23, 2015
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2016	Jun. 23, 2015
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2016	Jul. 23, 2015
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2015	Dec. 5, 2014
Double ridged guide antenna	EMCO	3115	5205	Feb. 29, 2016	Feb. 16, 2015
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 29, 2016	Feb. 1, 2015
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2016	Jun. 16, 2015
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	May 31, 2016	May 1, 2015
Notch filter	Micro-Tronics	BRM50702	045	Nov. 30, 2016	Nov. 12, 2015
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2016	Oct. 23, 2015
		SUCOFLEX104/1m	322084/4	Oct. 31, 2016	Oct. 23, 2015
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2016	Oct. 23, 2015
		SUCOFLEX104/7m	41625/6	Oct. 31, 2016	Oct. 23, 2015
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	Apr. 30, 2016	Apr. 27, 2015
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	Apr. 30, 2016	Apr. 27, 2015


Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2016	Aug. 21, 2015
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Feb. 29, 2016	Feb. 5, 2015
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407	8-663-4	Mar. 31, 2016	Mar. 5, 2015
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S330)	Feb. 29, 2016	Feb. 5, 2015
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 29, 2016	Feb. 5, 2015
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 29, 2016	Feb. 5, 2015
PC	DELL	DIMENSION	75465BX	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle

[Plot & Calculation]

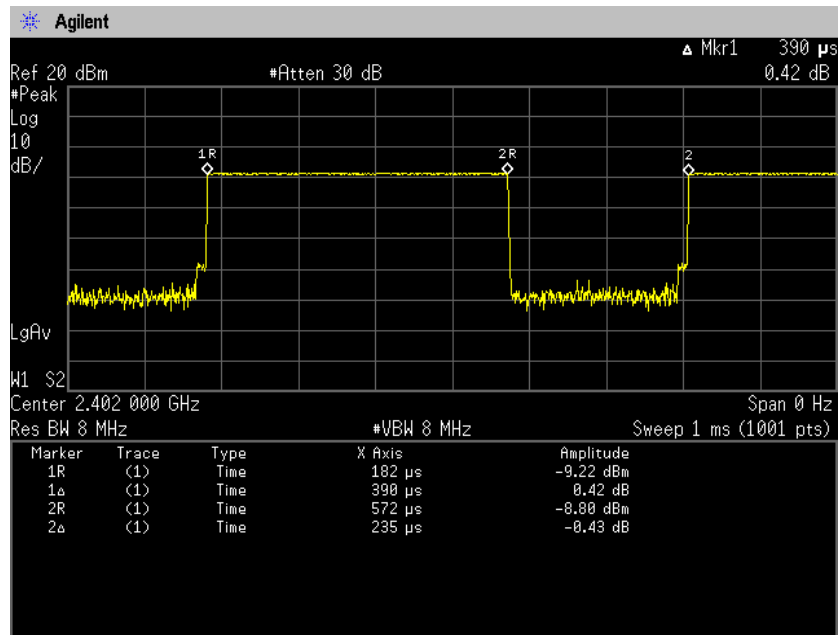

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) = 390[\mu\text{s}] / (390[\mu\text{s}] + 235[\mu\text{s}]) = 62.4[\%]$$