

# RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS Cellular WCDMA/HSDPA  
Cellular CDMA Phone with Bluetooth, WLAN and NFC  
Model No. : KYL21  
Order No. : DEMC1208-01410  
Date of receipt : 2012-08-08  
Test duration : 2012-09-12 ~ 2012-09-21  
Date of issue : 2012-09-24  
Use of report : Original Grant

Applicant : KYOCERA Corporation  
2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea


Test specification : §22(H), §24(E)  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:


Witnessed by:

Reviewed by:



Engineer  
H.S. Son

N/A



Technical Director  
Harvey Sung

## Test Report Version

Test Report No.	Date	Description
DRTFCC1209-0514	Sep. 24, 2012	Final version for approval

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. INTRODUCTION .....</b>	<b>5</b>
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
<b>3. DESCRIPTION OF TESTS.....</b>	<b>6</b>
3.1 ERP & EIRP .....	6
3.2 PEAK TO AVERAGE RATIO .....	7
3.3 OCCUPIED BANDWIDTH. ....	8
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	9
3.5 RADIATED SPURIOUS EMISSIONS .....	10
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	11
<b>4. LIST OF TEST EQUIPMENT.....</b>	<b>12</b>
<b>5. SUMMARY OF TEST RESULTS .....</b>	<b>13</b>
<b>6. SAMPLE CALCULATION .....</b>	<b>14</b>
<b>7. TEST DATA .....</b>	<b>15</b>
7.1 CONDUCTED OUTPUT POWER.....	15
7.2 PEAK TO AVERAGE RATIO .....	17
7.3 OCCUPIED BANDWIDTH .....	17
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	17
7.5 BAND EDGE.....	17
7.6 EFFECTIVE RADIATED POWER(GSM850) .....	18
7.7 EQUIVALENT ISOTROPIC RADIATED POWER(GSM1900) .....	19
7.8 RADIATED SPURIOUS EMISSIONS .....	20
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850) .....	20
7.8.2 RADIATED SPURIOUS EMISSIONS (GSM1900) .....	23
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	24
7.9.1 FREQUENCY STABILITY (GSM850) .....	24
7.9.2 FREQUENCY STABILITY (GSM1900) .....	27
<b>8. TEST PLOTS.....</b>	<b>28</b>
8.1 Peak to Average Ratio .....	28
8.2 Occupied Bandwidth 99 % Bandwidth .....	29
8.3 Spurious Emissions at Antenna Terminal .....	37
8.4 Band Edge .....	52

## 1. GENERAL INFORMATION

**Applicant Name:** KYOCERA Corporation

**Address:** 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

**FCC ID** : JOYKYL21

**FCC Classification** : Licensed Portable Transmitter Held to Ear (PCE)

**EUT Type** : Cellular/PCS GSM/GPRS Cellular WCDMA/HSDPA Cellular CDMA Phone with Bluetooth, WLAN and NFC

**Model Name** : KYL21

**Add Model Name** : N/A

**Supplying power** : Standard Battery  
- Type: Li-Ion Battery  
- M/N: KYL21UAA  
- Rating: DC 3.8V & 2520mAh 9.6Wh

**Antenna Information** : Internal Antenna  
- Type: Built-In type

**Tx Frequency** : GSM850: 824.20 ~ 848.80 MHz  
GSM1900: 1850.2 ~ 1909.80 MHz  
Cellular CDMA: 824.70 ~ 848.31 MHz  
WCDMA850: 826.40 ~ 846.60 MHz

**Rx Frequency** : GSM850: 869.20 ~ 893.80 MHz  
GSM1900: 1930.20 ~ 1989.80 MHz  
Cellular CDMA: 869.70 ~ 893.31 MHz  
WCDMA850: 871.40 ~ 891.60 MHz

**Max. RF Output Power** : GSM850: 1.365W ERP(31.35dBm)  
GSM1900: 1.303W EIRP(31.15dBm)  
Cellular CDMA: 0.238W ERP(23.76dBm)  
WCDMA850: 0.220W ERP(23.43dBm)

**Emission Designator(s)** : GSM850: 250KGXW  
GSM1900: 243KGXW  
Cellular CDMA: 1M26F9W  
WCDMA850: 4M18F9W

## 2. INTRODUCTION

### 2.1. EUT DESCRIPTION

The Equipment Under Test(EUT) supports a Cellular/PCS GSM/GPRS, Cellular WCDMA/HSDPA, Cellular CDMA Phone with Bluetooth, WLAN and NFC.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The 3&10M test site and conducted measurement facility used to collect the radiated data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.


- 3&10M test site registration Number: 678747

### 3. DESCRIPTION OF TESTS

#### 3.1 ERP & EIRP

(Effective Radiated Power & Equivalent Isotropic Radiated Power)

##### *Test Set-up*

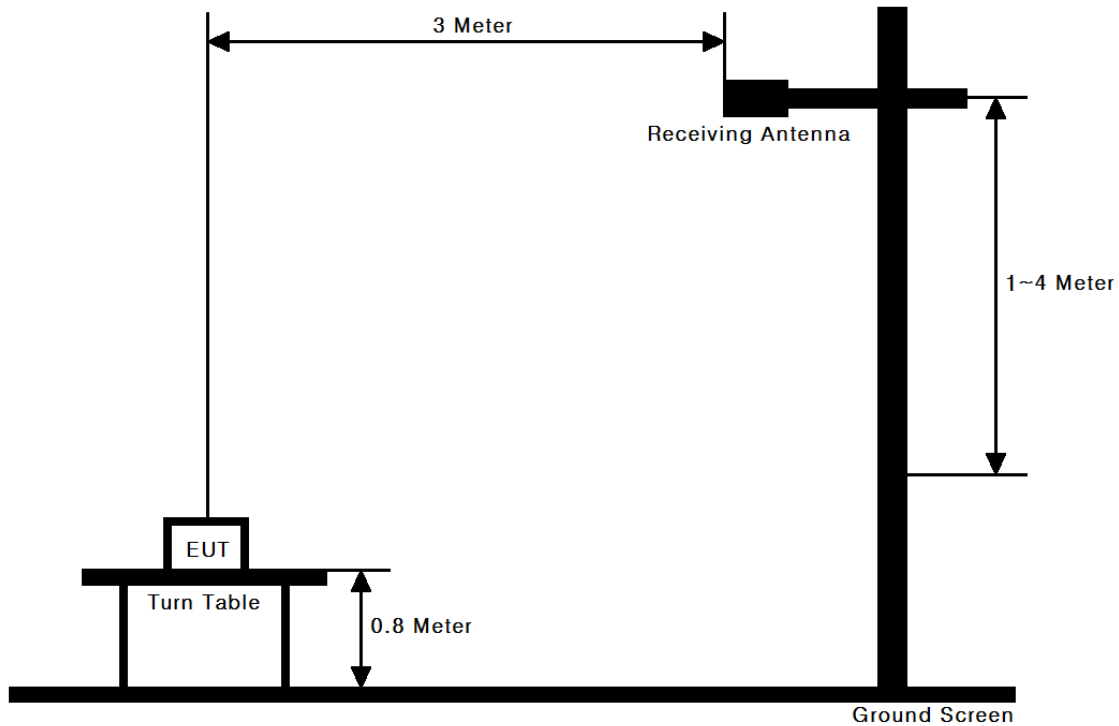

##### *Test Procedure*

These measurements were performed at 3&10m test site. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.


### 3.2 PEAK TO AVERAGE RATIO

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function ( CCDF ) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

### 3.3 OCCUPIED BANDWIDTH.

#### Test set-up

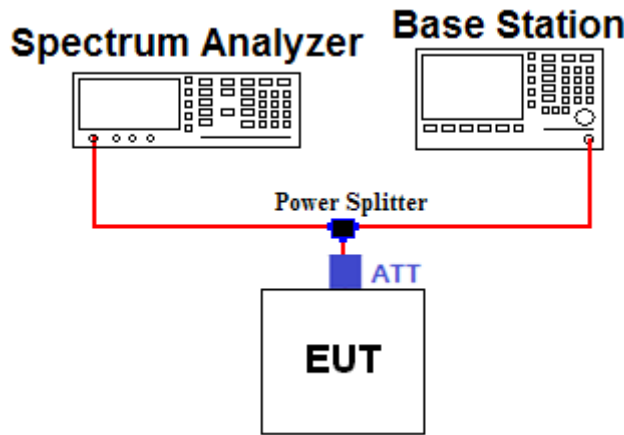

#### Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
824.20	16.27	848.31	16.32
824.70	16.29	848.80	16.33
826.40	16.29	1850.20	16.56
836.52	16.30	1880.00	16.58
836.60	16.30	1909.80	16.63
846.60	16.32	-	-

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.  
 Offset value = Cable A + ATT + Splitter + Cable B


#### Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.



### 3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

**Test set-up**

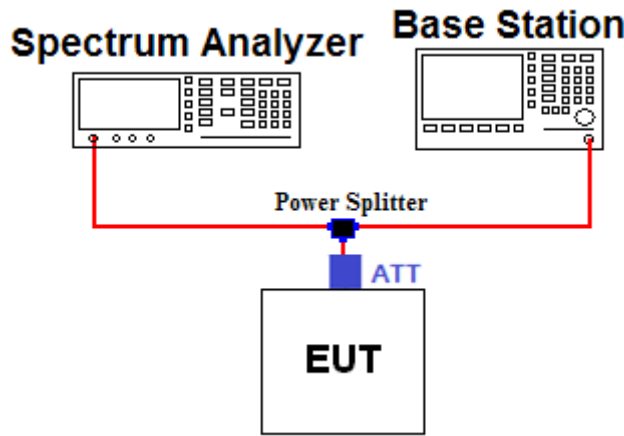

**Offset value information**

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
823	16.26	1850	16.56	5000	16.88
824	16.27	1910	16.67	10000	17.04
849	16.34	-	-	15000	17.96
850	16.37	-	-	20000	18.24

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.  
 Offset value = Cable A + ATT + Splitter + Cable B

**Test Procedure**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with -13dBm limit  $[ 43+10\log(P) ]$ , in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block.


A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

**Band Edge Requirement**

In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

### 3.5 RADIATED SPURIOUS EMISSIONS

#### Test Set-up

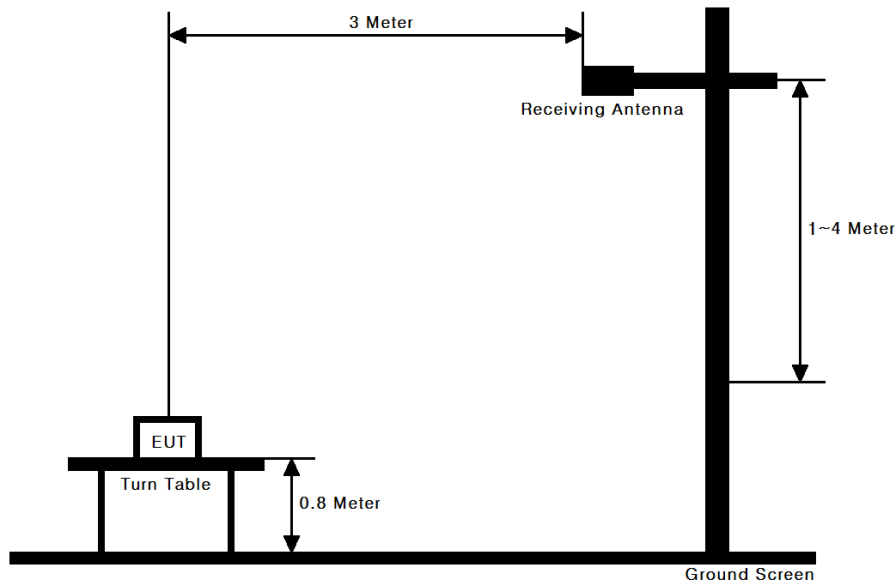

#### Test Procedure

This measurement was performed at 3meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

### 3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

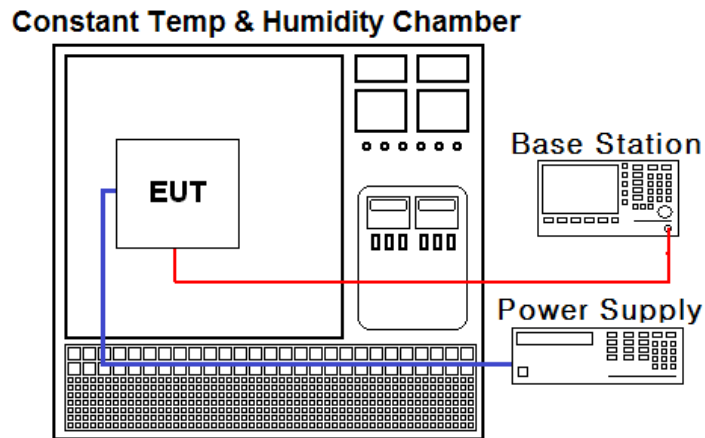

#### Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification - the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature. (25°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

**4. LIST OF TEST EQUIPMENT**

Type	Manufacturer	Model	Cal. Date (yy/mm/dd)	Next. Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	12/09/18	13/09/18	MY45304199
Spectrum Analyzer	Agilent	N9020A	12/01/09	13/01/09	MY49100833
8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	12/03/05	13/03/05	GB43461134
Thermo hygrometer	BODYCOM	BJ5478	12/01/13	13/01/13	090205-2
TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	12/09/17	13/09/17	30604493/021031
Signal Generator	Rohde Schwarz	SMR20	12/03/05	13/03/05	101251
Vector Signal Generator	Rohde Schwarz	SMJ100A	12/01/09	13/01/09	100148
Amplifier	EMPOWER	BBS3Q7ELU	12/09/17	13/09/17	1020
DC Power Supply	HP	6622A	12/03/05	13/03/05	3448A03760
Digital Multi-meter	H.P	34401A	12/03/05	13/03/05	3146A13475, US36122178
Attenuator (3dB)	WEINSCHEL	56-3	12/09/17	13/09/17	Y2342
Attenuator (10dB)	WEINSCHEL	23-10-34	12/09/17	13/09/17	BP4386
Power Splitter	Anritsu	K241B	12/09/17	13/09/17	020611
High-Pass Filter	Wainwright	WHKX1.0	12/09/17	13/09/17	9
High-Pass Filter	Wainwright	WHNX2.1	12/09/17	13/09/17	1
Amplifier (25dB)	Agilent	8447D	12/03/05	13/03/05	2944A10144
Amplifier (30dB)	Agilent	8449B	12/03/05	13/03/05	3008A01590
Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2116
Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2117
Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2261
Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2262
BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/11/29	12/11/29	1098
HORN ANT	ETS	3115	11/09/06	13/09/06	21097
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155

### 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Parameter	Status Note 1
2.1046	Conducted Output Power	<b>C</b>
22.913(a) 24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	<b>C</b>
22.917(a) 24.238(a) 2.1049	Occupied Bandwidth	<b>C</b>
22.917(a) 24.238(a) 2.1051	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	<b>C</b>
24.232(d)	Peak to Average Ratio	<b>C</b>
22.917(a) 24.238(a) 2.1053	Radiated Spurious and Harmonic Emissions	<b>C</b>
22.355 24.235 2.1055	Frequency Stability	<b>C</b>
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable		

The sample was tested according to the following specification:  
 ANSI/TIA/EIA-603-C-2004

## 6. SAMPLE CALCULATION

### A. Emission Designator

#### GSM850 Emission Designator

Emission Designator = **250KGXW**

GSM OBW = 250.1517 kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### GSM1900 Emission Designator

Emission Designator = **243KGXW**

GSM OBW = 243.2387 kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### Cellular CDMA Emission Designator

Emission Designator = **1M26F9W**

CDMA OBW = 1.2642 MHz

(Measured at the 99.75% power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

#### WCDMA850 Emission Designator

Emission Designator = **4M18F9W**

WCDMA OBW = 4.1754MHz

(Measured at the 99.75% power bandwidth)

F = Frequency Modulation


9 = Composite Digital Information

W = Combination (Audio/Data)

## 7. TEST DATA

### 7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

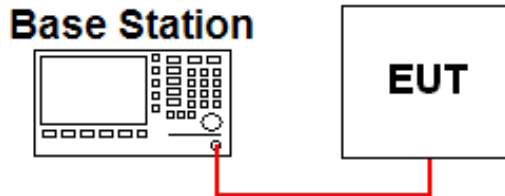

▪ GSM / GPRS

Band	Channel	Test Result(dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	31.44	31.44	28.15	26.50	25.02	N/A	N/A	N/A	N/A
	190	31.14	31.12	28.20	26.44	25.00	N/A	N/A	N/A	N/A
	251	31.38	31.37	28.26	26.45	25.13	N/A	N/A	N/A	N/A
PCS	512	29.08	29.07	26.49	24.73	23.10	N/A	N/A	N/A	N/A
	661	28.99	28.97	26.44	24.61	23.34	N/A	N/A	N/A	N/A
	810	28.98	28.97	26.36	24.42	23.30	N/A	N/A	N/A	N/A

The output power was measured using the Agilent E5515C

▪ CDMA

Band	Channel	1X RRT				EvDo (Rev.0)		EvDo (Rev.A)	
		RC1	RC3	FCH+ SCH	FCH	FTAP	RTAP	FETAP	RETAP
		SO55	SO55	TDSO SO32	TDSO SO32				
Cellular	1013	22.44	22.50	22.51	22.53	N/A	N/A	N/A	N/A
	0384	22.83	22.88	22.88	22.89	N/A	N/A	N/A	N/A
	0777	22.65	22.67	22.67	22.68	N/A	N/A	N/A	N/A

The output power was measured using the Agilent E5515C

▪ WCDMA

3GPP Release Version	Mode		Power (dBm)			MPR	B <sub>c</sub>	β <sub>d</sub>	B <sub>c</sub> /β <sub>d</sub>	Sub-Test
	Channel		4132	4183	4233					
99	WCDMA	RMC	22.06	22.14	21.85	-	-	-	-	-
		ARM	22.03	22.13	21.85					
5	HSDPA (Cellular)		22.00	22.09	21.91	0	2/15	15/15	2/15	1
5			21.97	22.07	21.79	0	12/15	15/15	12/15	2
5			21.37	21.48	21.22	0.5	15/15	8/15	15/8	3
5			21.35	21.47	21.19	0.5	15/15	4/15	15/4	4

The output power was measured using the Agilent E5515C



**7.2 PEAK TO AVERAGE RATIO**

- Plots of the EUT’s Peak- to- Average Ratio are shown in Clause 8.1

**7.3 OCCUPIED BANDWIDTH**

Band	Channel	Test Result(KHz)
GSM850	128	237.9622
	190	250.1517
	251	246.3425
Cellular CDMA	1013	1262.10
	384	1263.30
	777	1264.20
WCDMA850	4132	4143.3
	4183	4159.4
	4233	4175.4
GSM1900	512	243.2387
	661	242.9802
	810	239.0230

- Plots of the EUT’s Occupied Bandwidth are shown in Clause 8.2

**7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL**

- Plots of the EUT’s Conducted Spurious Emissions are shown in Clause 8.3

**7.5 BAND EDGE**

- Plots of the EUT’s Band Edge are shown in Clause 8.4

**7.6 EFFECTIVE RADIATED POWER**

**- GSM850 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 5							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
128	X	-3.51	H	29.20	1.20	30.40	1.096	DC 3.8V	-
<b>190</b>	<b>X</b>	<b>-3.80</b>	<b>H</b>	<b>30.20</b>	<b>1.15</b>	<b>31.35</b>	<b>1.365</b>	<b>DC 3.8V</b>	-
251	X	-4.89	H	28.71	1.05	29.76	0.946	DC 3.8V	-

**- Cellular CDMA data**

CH.	EUT Position (Axis)	TEST CONDITIONS							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
1013	X	-11.39	H	21.34	1.20	22.54	0.179	DC 3.8V	-
384	X	-12.01	H	21.99	1.15	23.14	0.206	DC 3.8V	-
<b>777</b>	<b>Y</b>	<b>-13.46</b>	<b>V</b>	<b>22.71</b>	<b>1.05</b>	<b>23.76</b>	<b>0.238</b>	<b>DC 3.8V</b>	-

**- WCDMA850 data**

CH.	EUT Position (Axis)	TEST CONDITIONS							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
<b>4132</b>	<b>Y</b>	<b>-14.06</b>	<b>V</b>	<b>22.24</b>	<b>1.19</b>	<b>23.43</b>	<b>0.220</b>	<b>DC 3.8V</b>	-
4183	Y	-12.89	V	21.79	1.15	22.94	0.197	DC 3.8V	-
4233	Y	-12.25	V	21.99	1.10	23.09	0.204	DC 3.8V	-

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna. The worst case data is reported.

**7.7 EQUIVALENT ISOTROPIC RADIATED POWER**

**- GSM1900 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 0							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note.
512	Z	-7.64	V	22.07	8.59	30.66	1.164	DC 3.8V	GSM
661	Z	-8.98	V	21.12	8.68	29.80	0.955	DC 3.8V	GSM
<b>810</b>	<b>Z</b>	<b>-7.27</b>	<b>V</b>	<b>22.38</b>	<b>8.77</b>	<b>31.15</b>	<b>1.303</b>	<b>DC 3.8V</b>	<b>GSM</b>

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna. The worst case data is reported.

## 7.8 RADIATED SPURIOUS EMISSIONS

### 7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
128 (1.096W)	1648.41	X	H	-60.94	5.48	-55.46	85.86	43.40
	2472.82	X	H	-54.32	6.89	-47.43	77.83	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
190 (1.365W)	1672.96	X	H	-57.90	5.53	-52.37	83.72	44.35
	2509.86	X	V	-59.94	6.94	-53.00	84.35	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
251 (0.946W)	1697.50	X	H	-56.32	5.59	-50.73	80.49	42.76
	2546.31	X	H	-57.55	7.00	-50.55	80.31	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation =  $43 + 10 \log_{10} ( \text{ERP [W]} )$  [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

**7.8.2 RADIATED SPURIOUS EMISSIONS (CDMA850)**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
1013 (0.179W)	1649.54	Z	V	-54.33	5.48	-48.85	71.39	35.54
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
384 (0.206W)	1674.01	Z	V	-54.37	5.54	-48.83	71.97	36.14
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
777 (0.238W)	1692.28	Z	V	-52.86	5.58	-47.28	71.04	36.76
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation =  $43 + 10 \log_{10} ( ERP [W] )$  [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

**7.8.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
4132 (0.220W)	1653.80	Z	V	-46.24	5.49	-40.75	64.18	36.43
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.197W)	1673.62	Z	V	-45.15	5.53	-39.62	62.56	35.94
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.204W)	1693.90	Z	V	-45.14	5.58	-39.56	62.65	36.09
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation =  $43 + 10 \log_{10} ( \text{ERP [W]} )$  [dBc]
- No other spurious and harmonic emissions were reported greater than listed emissions above table.

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

**7.8.4 RADIATED SPURIOUS EMISSIONS (GSM1900)**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
512 (1.164W)	5550.72	Z	H	-55.34	11.11	-44.23	74.89	43.66
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.955W)	5640.48	Z	H	-54.81	11.16	-43.65	73.45	42.80
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (1.303W)	5729.56	Z	H	-53.68	11.21	-42.47	73.62	44.15
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = 43 + 10 log<sub>10</sub> ( EIRP [W] ) [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS Band and “5” in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

### 7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### 7.9.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,600,003 Hz  
 CHANNEL : 190(Mid)  
 REFERENCE VOLTAGE : 3.80 V DC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.80	+25(Ref)	836,600,003	0.000	0.00000000
100%		-30	836,599,994	-0.011	-0.00000108
100%		-20	836,600,010	0.008	0.00000084
100%		-10	836,600,013	0.012	0.00000120
100%		0	836,599,996	-0.008	-0.00000084
100%		+10	836,599,992	-0.013	-0.00000131
100%		+20	836,600,009	0.007	0.00000072
100%		+30	836,599,988	-0.018	-0.00000179
100%		+40	836,600,007	0.005	0.00000048
100%		+50	836,600,005	0.002	0.00000024
85%	3.23	+25	836,600,012	0.011	0.00000108
115%	4.37	+25	836,599,994	-0.011	-0.00000108
BATT.ENDPOINT	3.20	+25	836,600,011	0.010	0.00000096

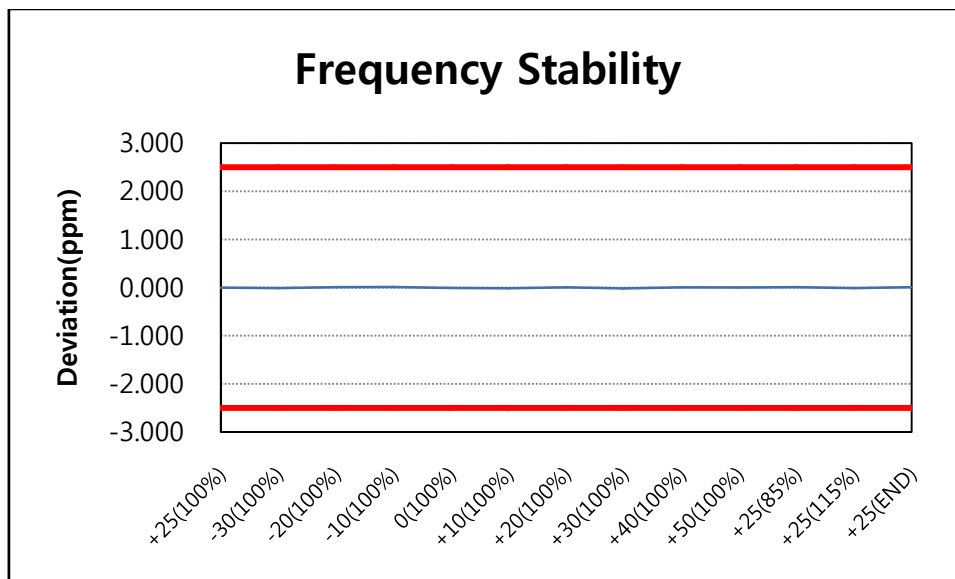




**7.9.2 FREQUENCY STABILITY (CDMA850)**

OPERATING FREQUENCY : 836,520,001 Hz  
 CHANNEL : 384(Mid)  
 REFERENCE VOLTAGE : 3.80 V DC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.80	+25(Ref)	836,520,001	0.000	0.00000000
100%		-30	836,519,993	-0.010	-0.00000096
100%		-20	836,519,998	-0.004	-0.00000036
100%		-10	836,520,009	0.010	0.00000096
100%		0	836,520,007	0.007	0.00000072
100%		+10	836,520,003	0.002	0.00000024
100%		+20	836,519,994	-0.008	-0.00000084
100%		+30	836,519,992	-0.011	-0.00000108
100%		+40	836,520,005	0.005	0.00000048
100%		+50	836,520,010	0.011	0.00000108
85%	3.23	+25	836,519,995	-0.007	-0.00000072
115%	4.37	+25	836,519,998	-0.004	-0.00000036
BATT.ENDPOINT	3.20	+25	836,520,004	0.004	0.00000036

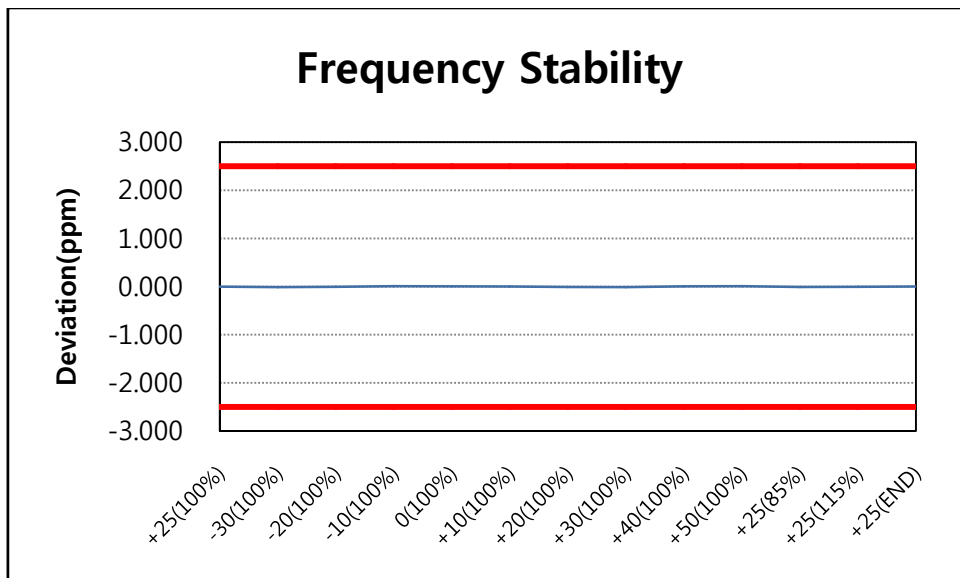

**7.9.3 FREQUENCY STABILITY (WCDMA850)**

OPERATING FREQUENCY : 836,599,998 Hz  
 CHANNEL : 4183(Mid)  
 REFERENCE VOLTAGE : 3.80 V DC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.80	+25(Ref)	836,599,998	0.000	0.00000000
100%		-30	836,600,003	0.006	0.00000060
100%		-20	836,600,012	0.017	0.00000167
100%		-10	836,600,009	0.013	0.00000131
100%		0	836,599,993	-0.006	-0.00000060
100%		+10	836,599,997	-0.001	-0.00000012
100%		+20	836,600,004	0.007	0.00000072
100%		+30	836,600,005	0.008	0.00000084
100%		+40	836,599,990	-0.010	-0.00000096
100%		+50	836,600,006	0.010	0.00000096
85%		3.23	+25	836,600,011	0.016
115%	4.37	+25	836,600,008	0.012	0.00000120
BATT.ENDPOINT	3.20	+25	836,600,006	0.010	0.00000096

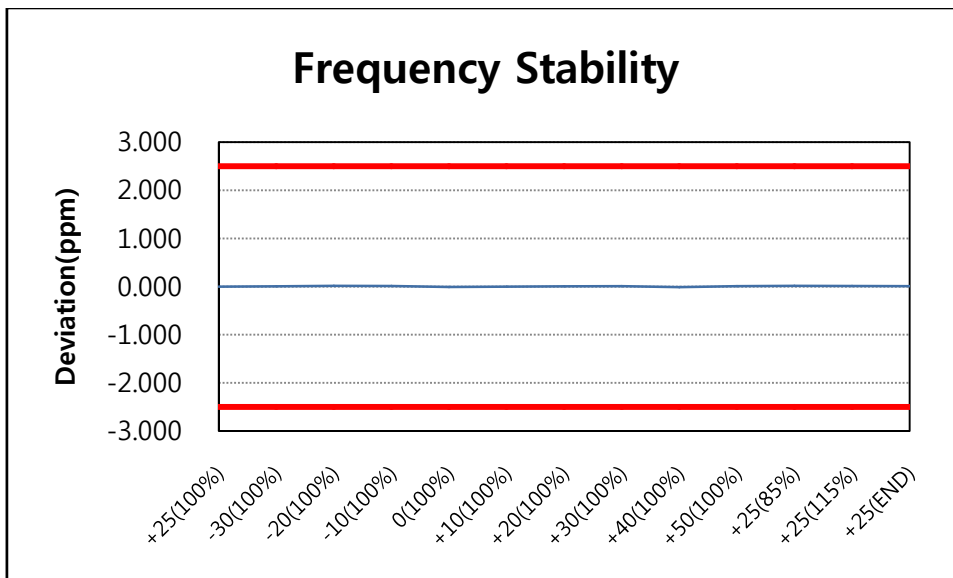

**7.9.4 FREQUENCY STABILITY (GSM1900)**

OPERATING FREQUENCY : 1,879,999,990 Hz  
 CHANNEL : 661(Mid)  
 REFERENCE VOLTAGE : 3.80 V DC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.80	+25(Ref)	1,879,999,990	0.000	0.00000000
100%		-30	1,880,000,016	0.014	0.00000138
100%		-20	1,879,999,986	-0.002	-0.00000021
100%		-10	1,880,000,017	0.014	0.00000144
100%		0	1,879,999,978	-0.006	-0.00000064
100%		+10	1,880,000,011	0.011	0.00000112
100%		+20	1,880,000,015	0.013	0.00000133
100%		+30	1,879,999,988	-0.001	-0.00000011
100%		+40	1,880,000,019	0.015	0.00000154
100%		+50	1,879,999,989	-0.001	-0.00000005
85%	3.23	+25	1,880,000,017	0.014	0.00000144
115%	4.37	+25	1,880,000,010	0.011	0.00000106
BATT.ENDPOINT	3.20	+25	1,879,999,984	-0.003	-0.00000032

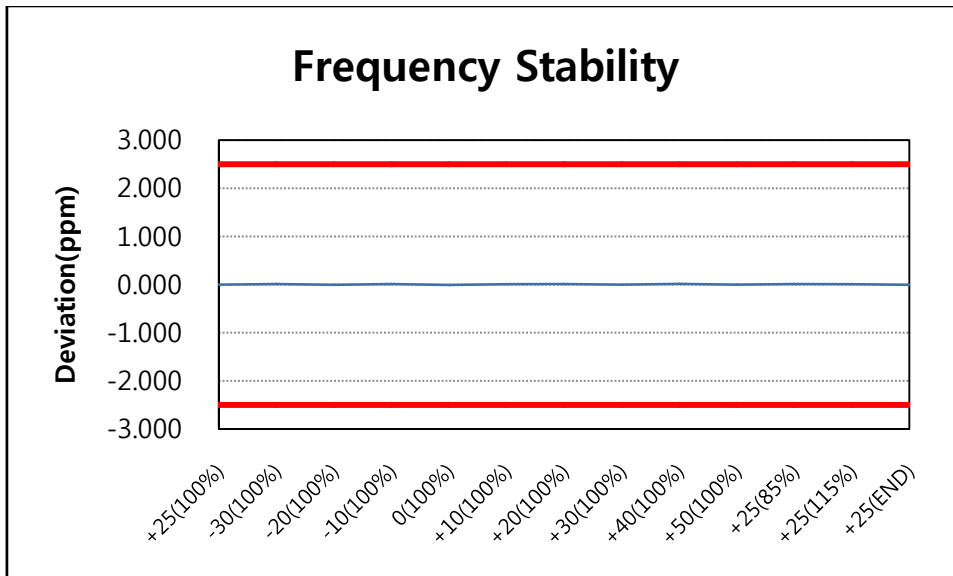

## 8. TEST PLOTS


### 8.1 Peak to Average Ratio

GSM1900 & Channel: 661

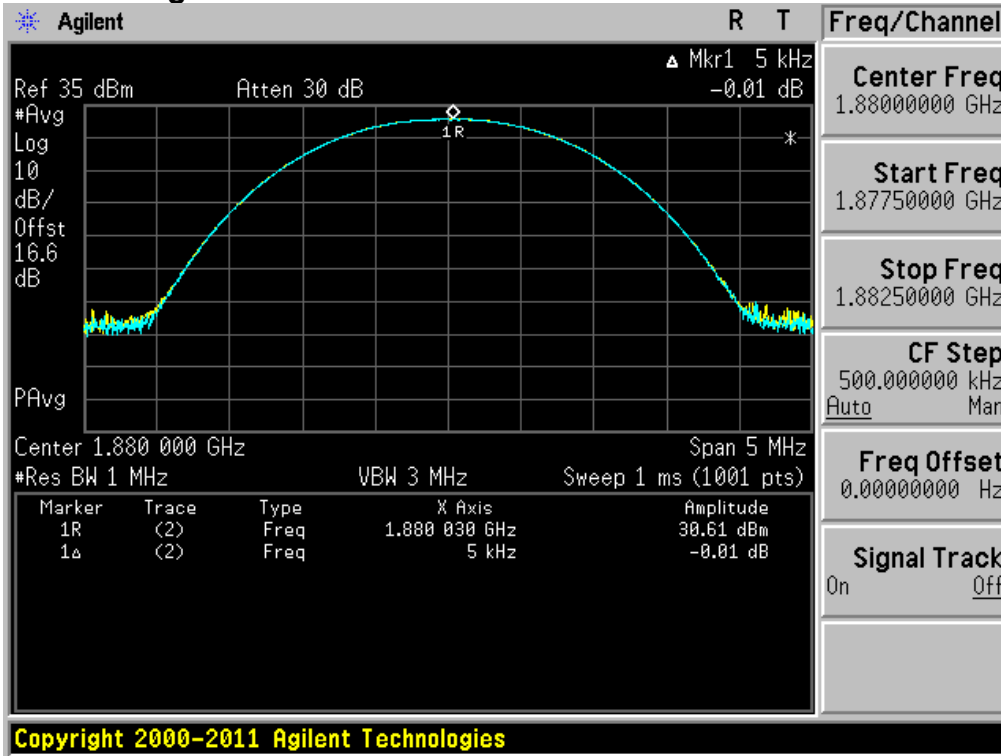


8.2 Occupied Bandwidth 99 % Bandwidth

GSM850 & Channel: 128

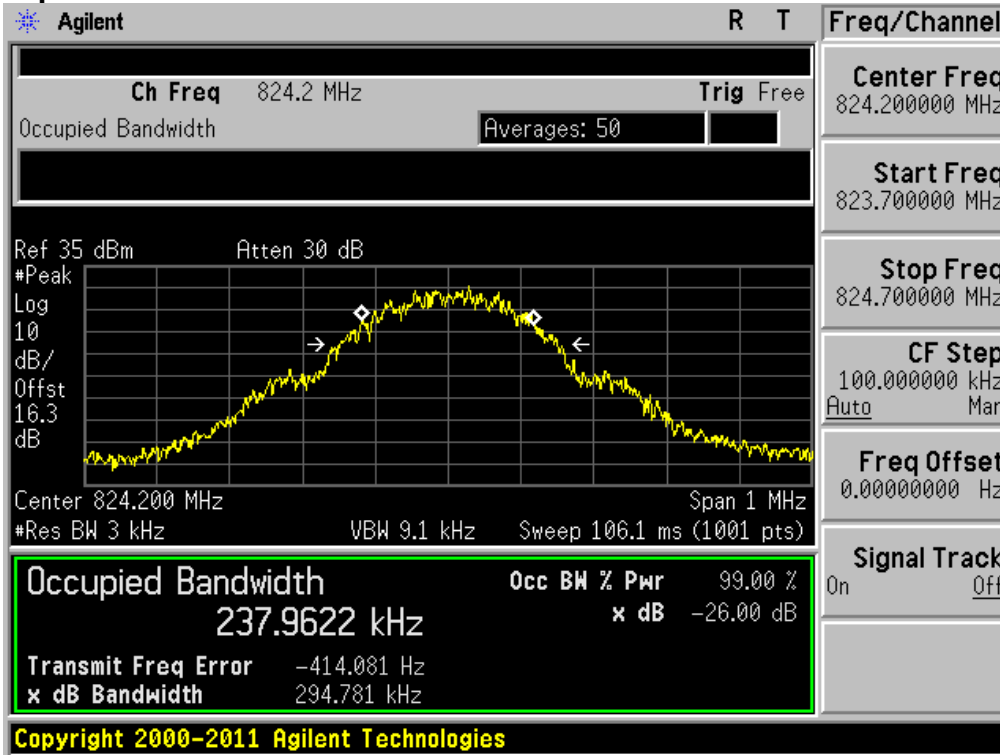


GSM850 & Channel: 190

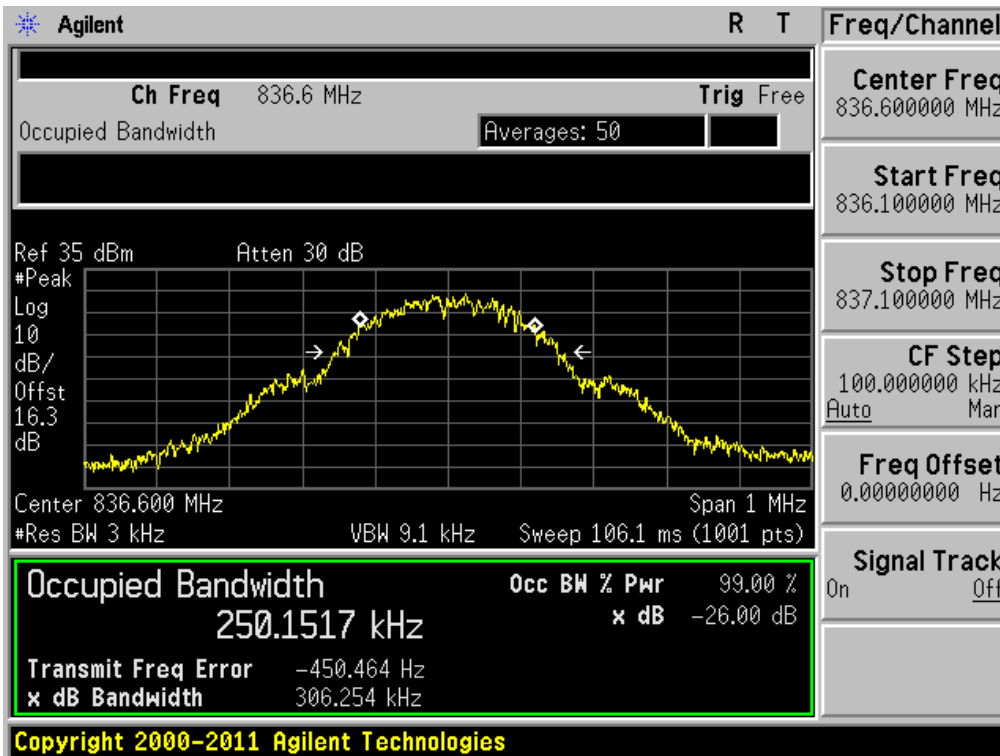


GSM850 & Channel: 251




Cellular CDMA & Channel: 1013

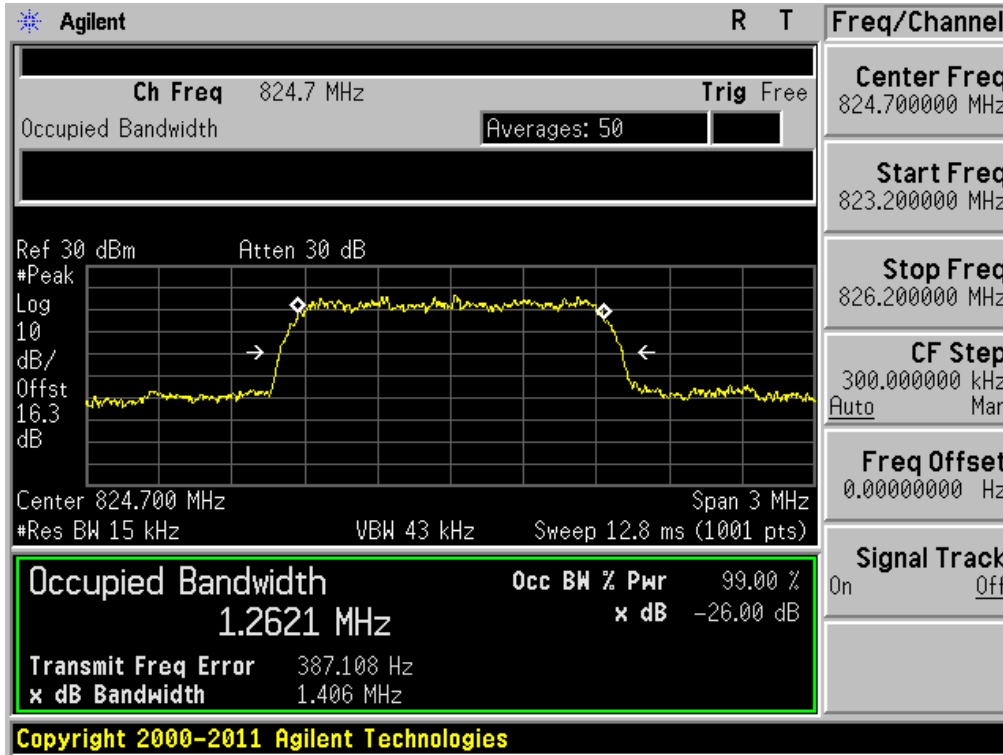

Cellular CDMA & Channel: 384

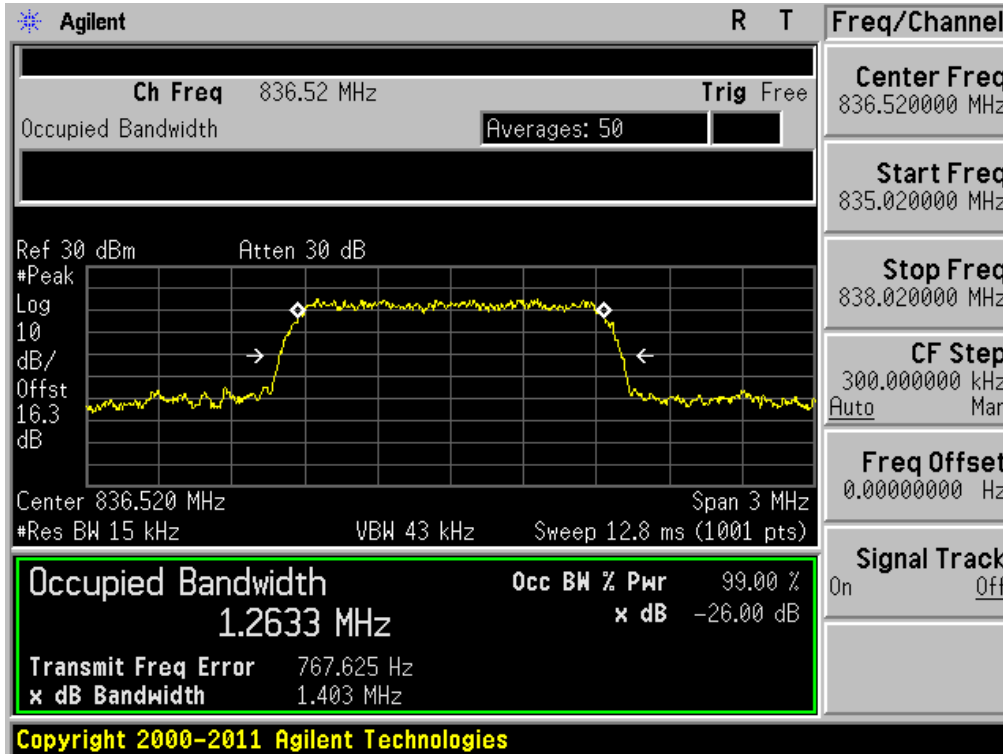


Cellular CDMA & Channel: 777

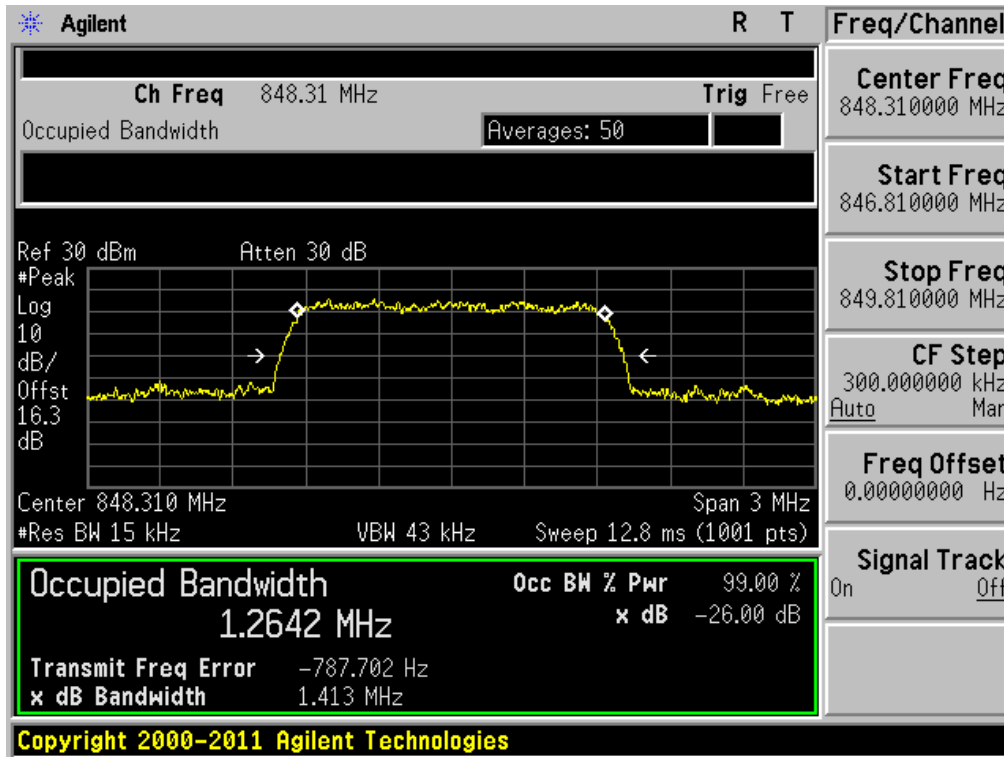





WCDMA850 & Channel: 4132

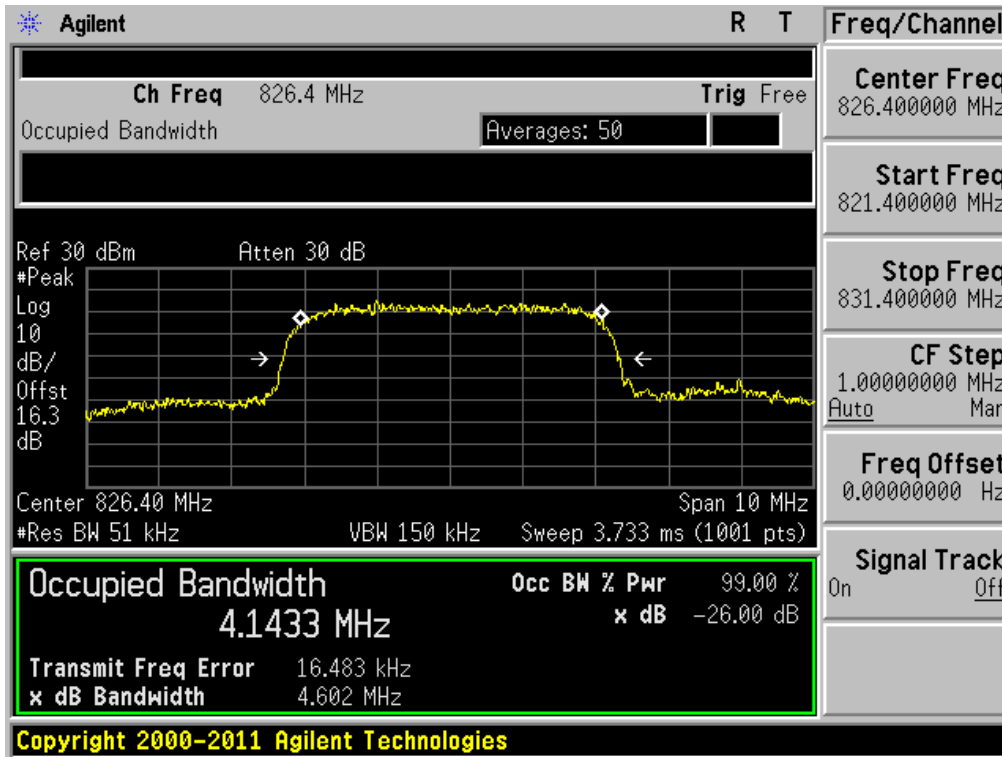


WCDMA850 & Channel: 4183

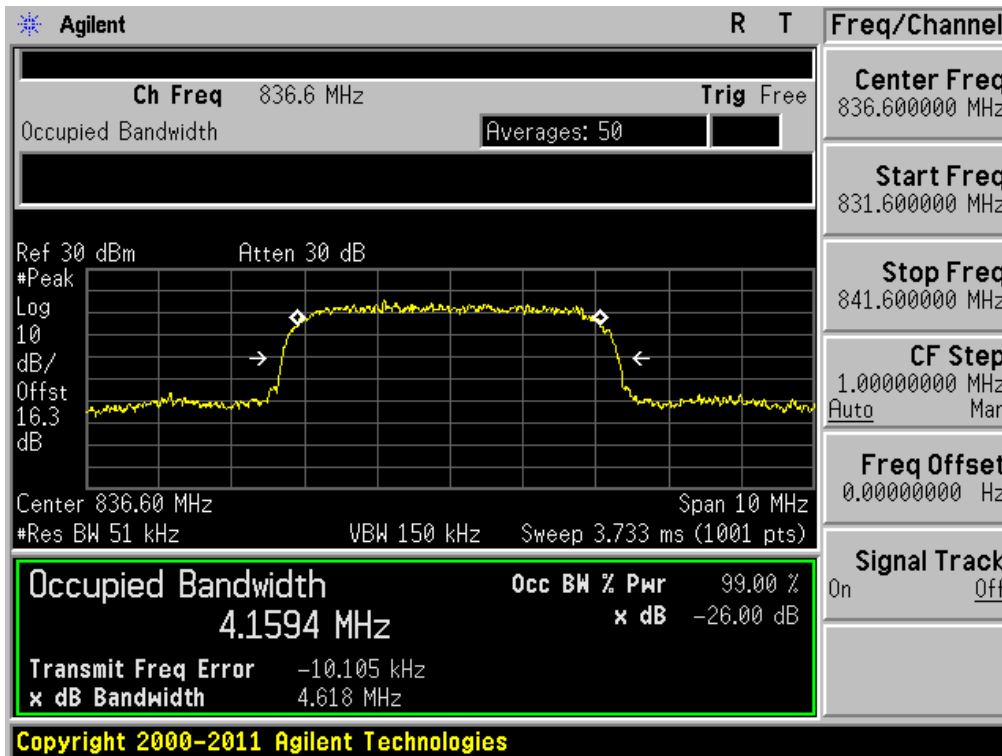


WCDMA850 & Channel: 4233

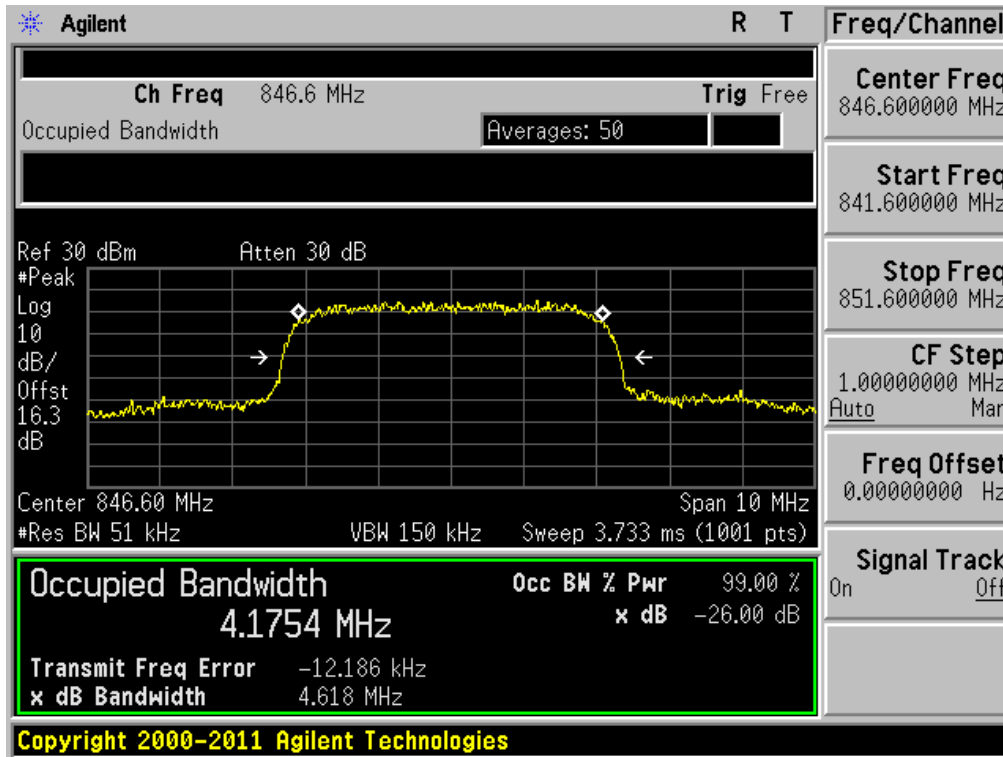


GSM 1900 & Channel: 512

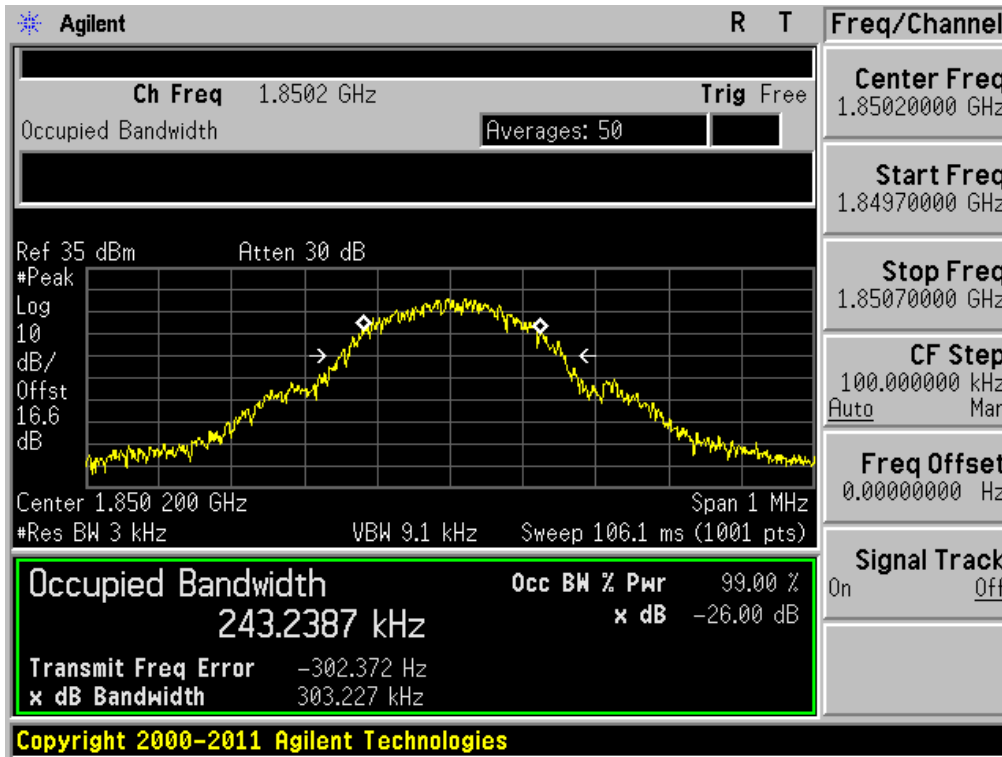

GSM 1900 & Channel: 661

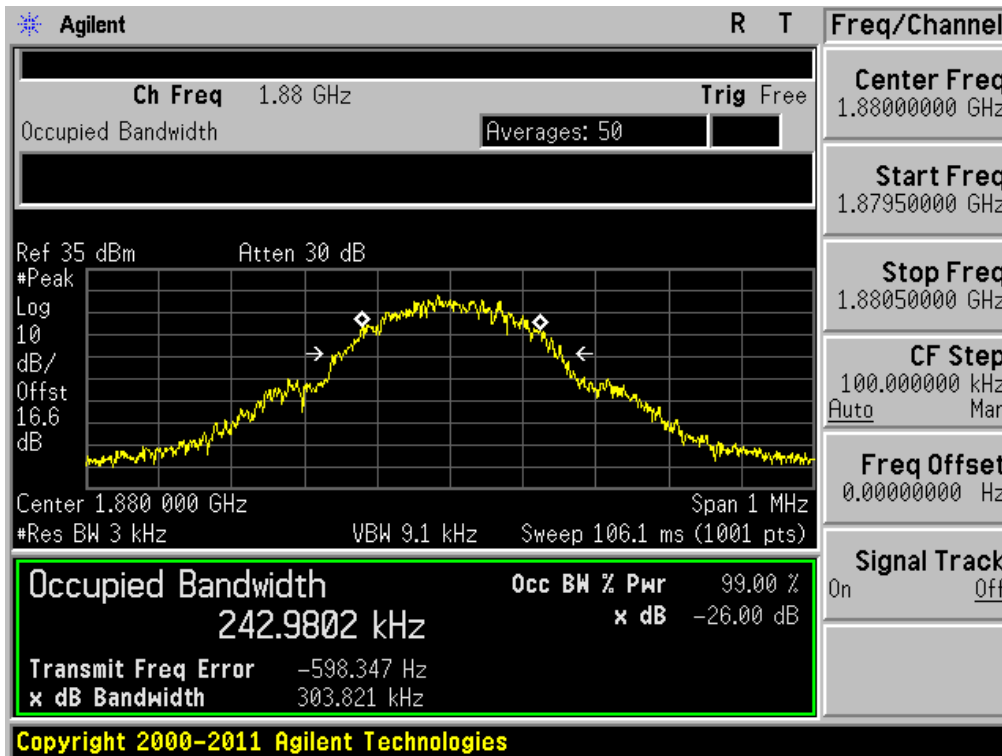


GSM 1900 & Channel: 810

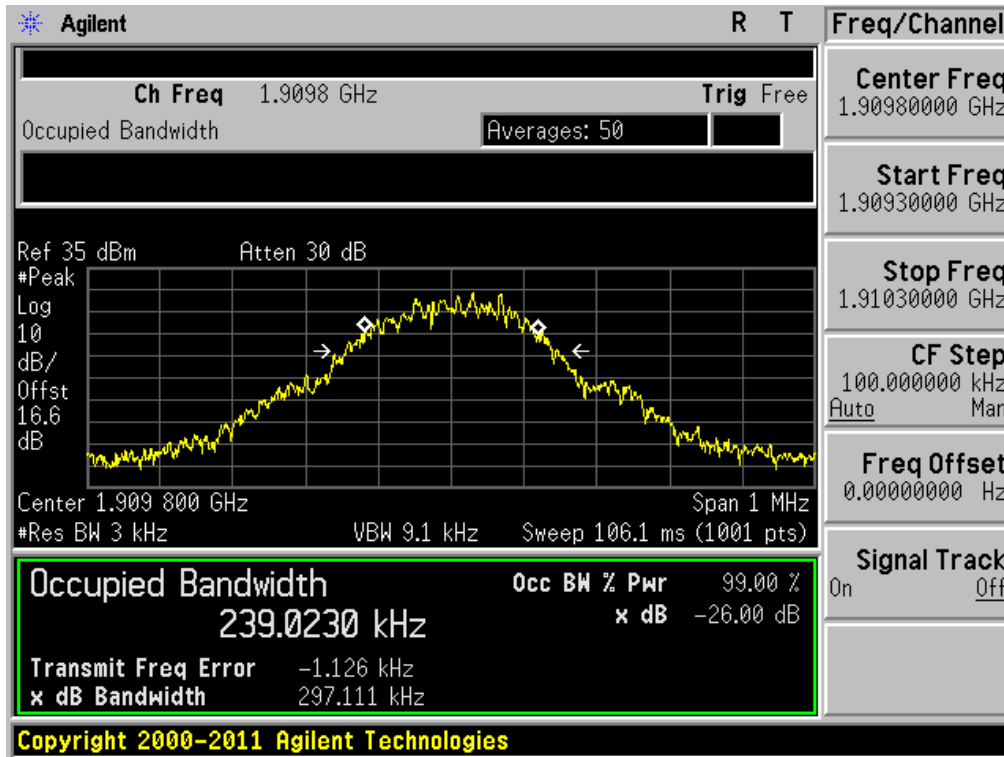


### 8.3 Spurious Emissions at Antenna Terminal


GSM850 & Channel: 128

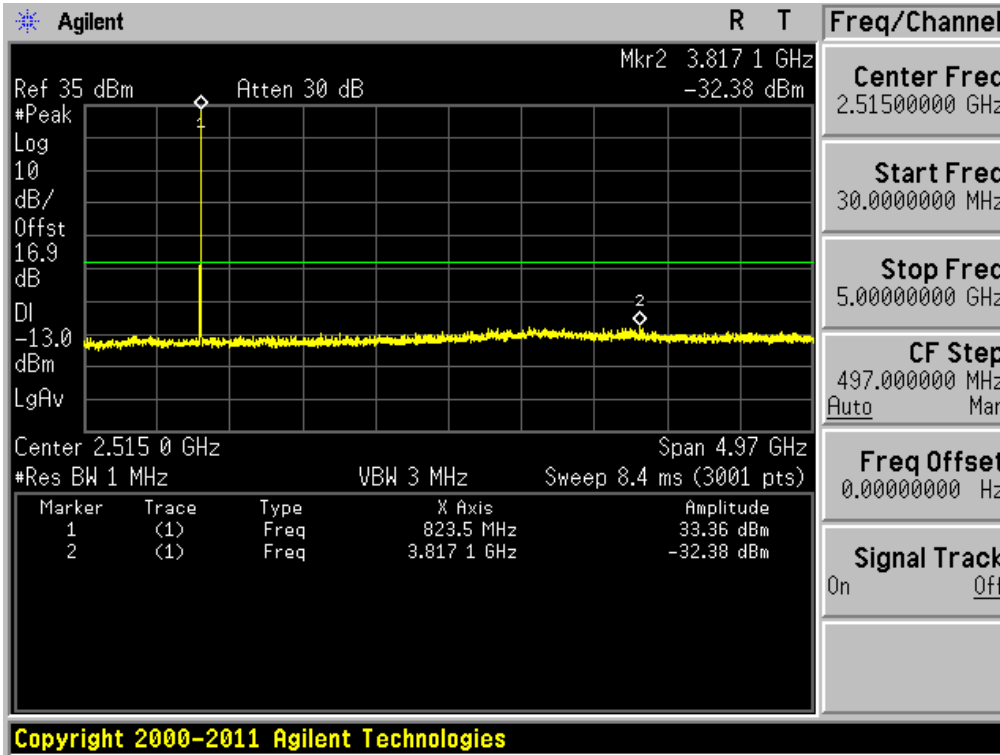


GSM850 & Channel: 128

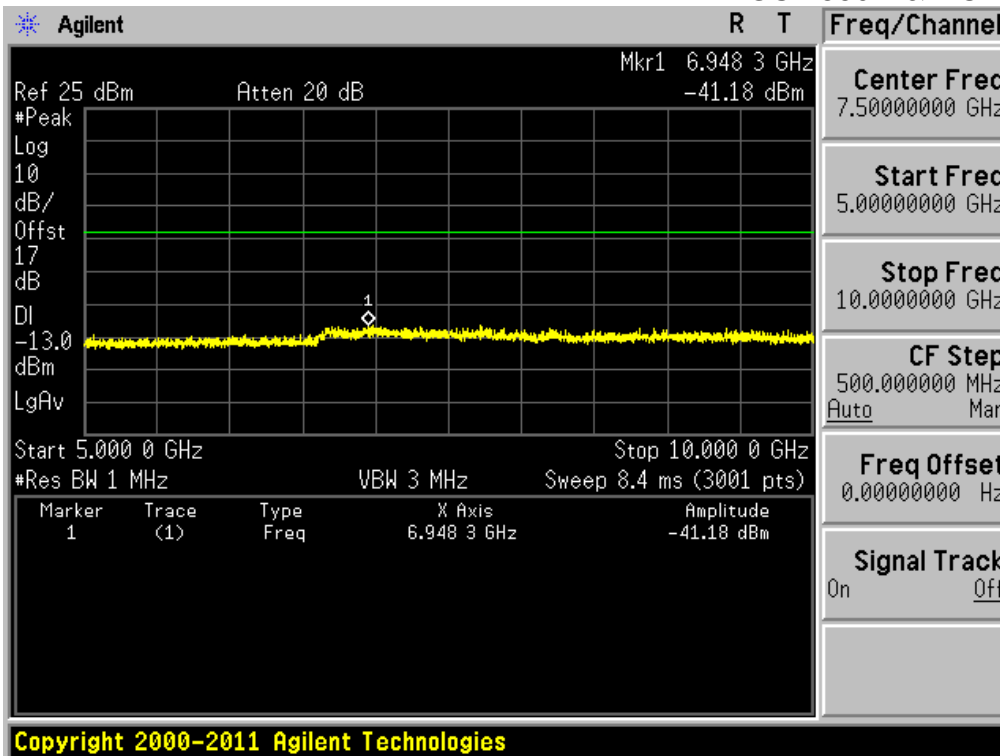


GSM850 & Channel: 190

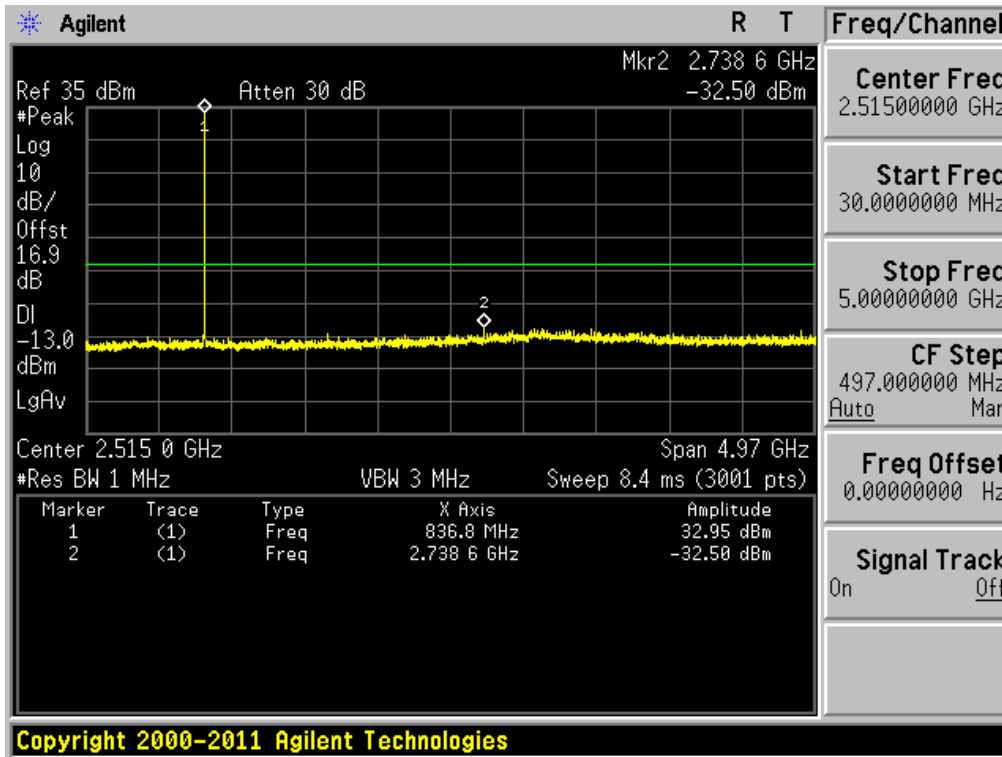


GSM850 & Channel: 190

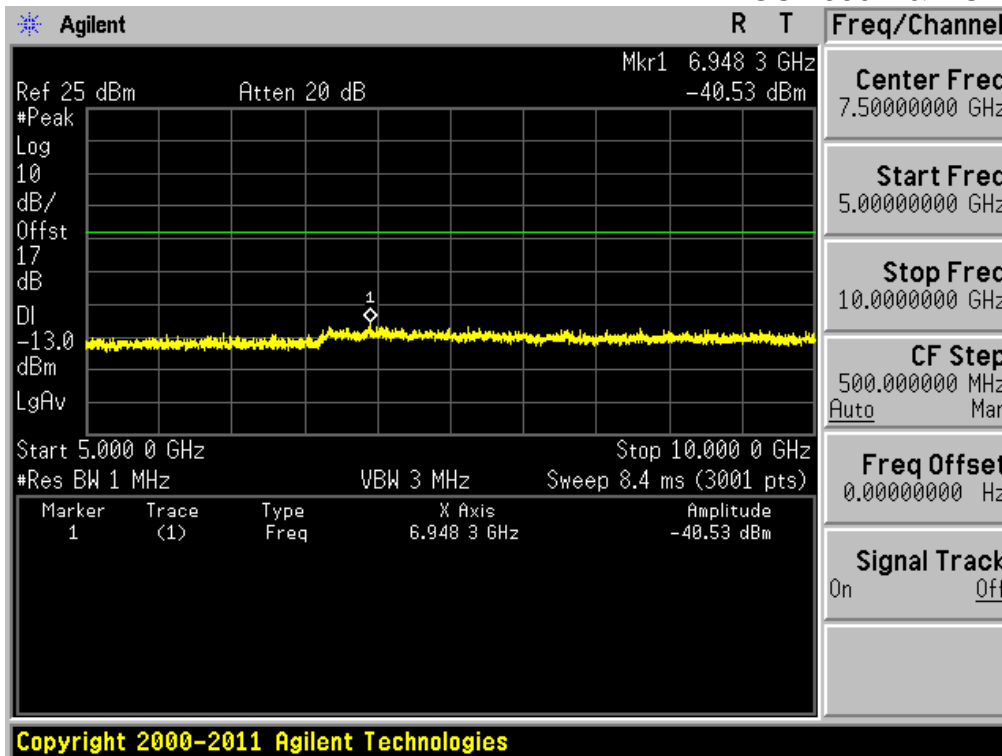


GSM850 & Channel: 251

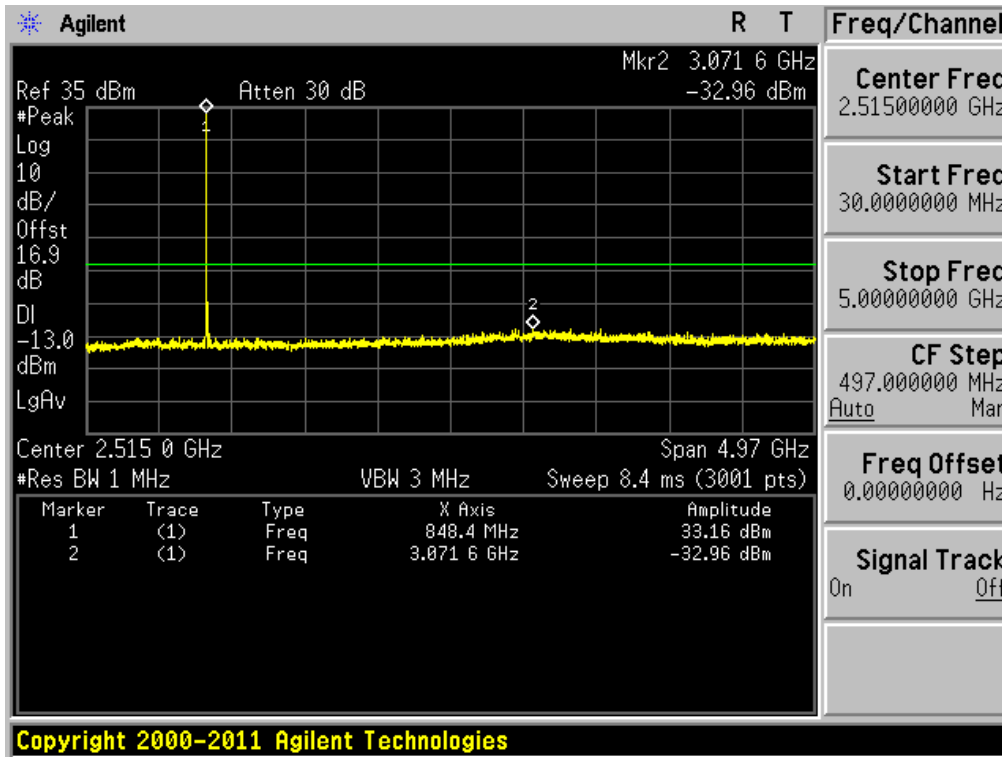


GSM850 & Channel: 251

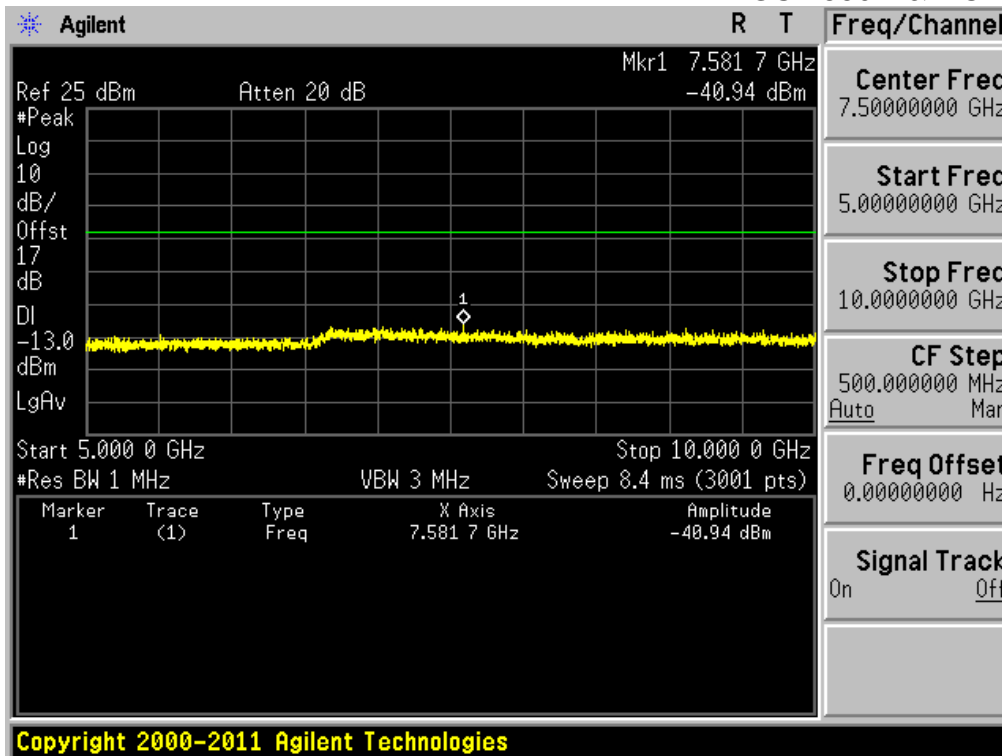

Cellular CDMA & Channel: 1013

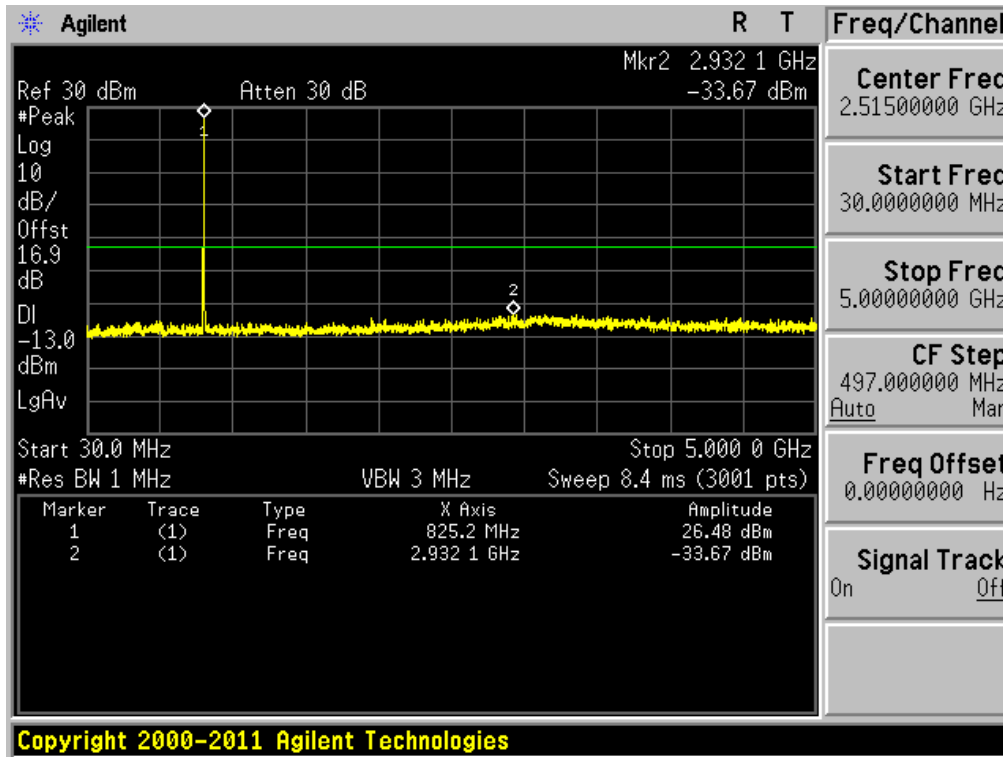


Cellular CDMA & Channel: 1013

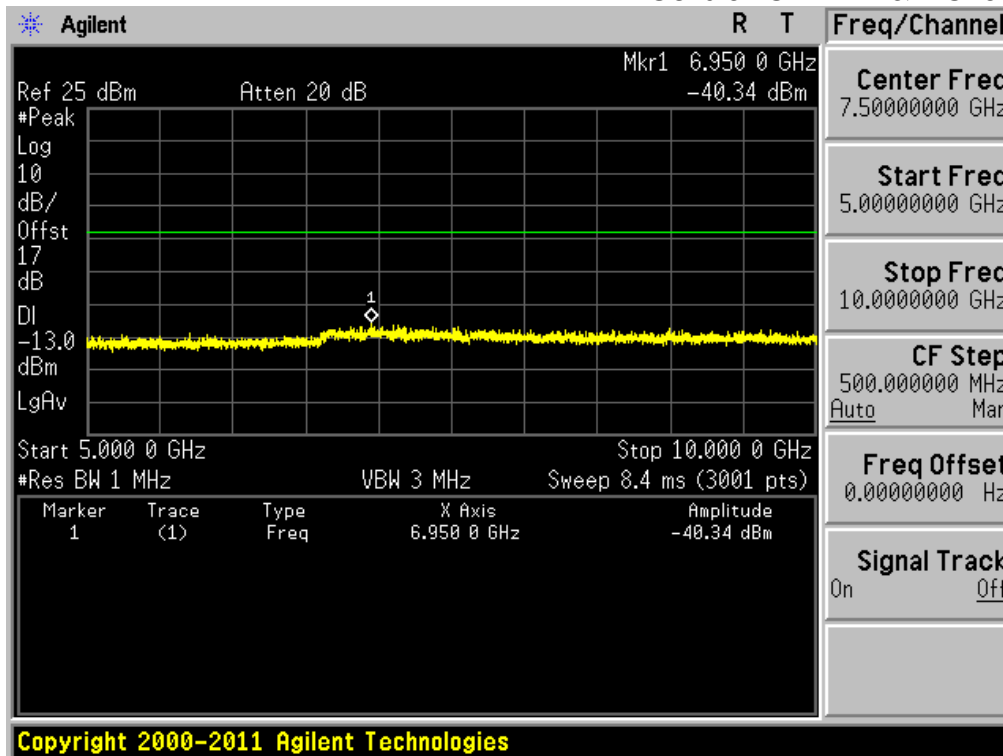





Cellular CDMA & Channel: 384

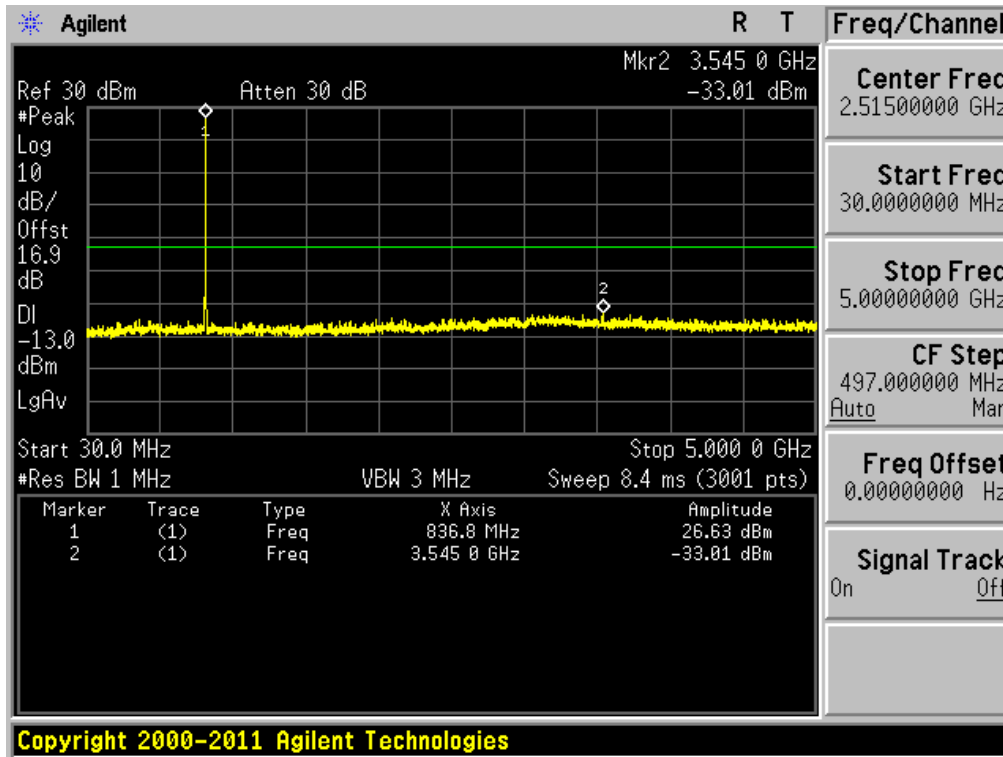


Cellular CDMA & Channel: 384

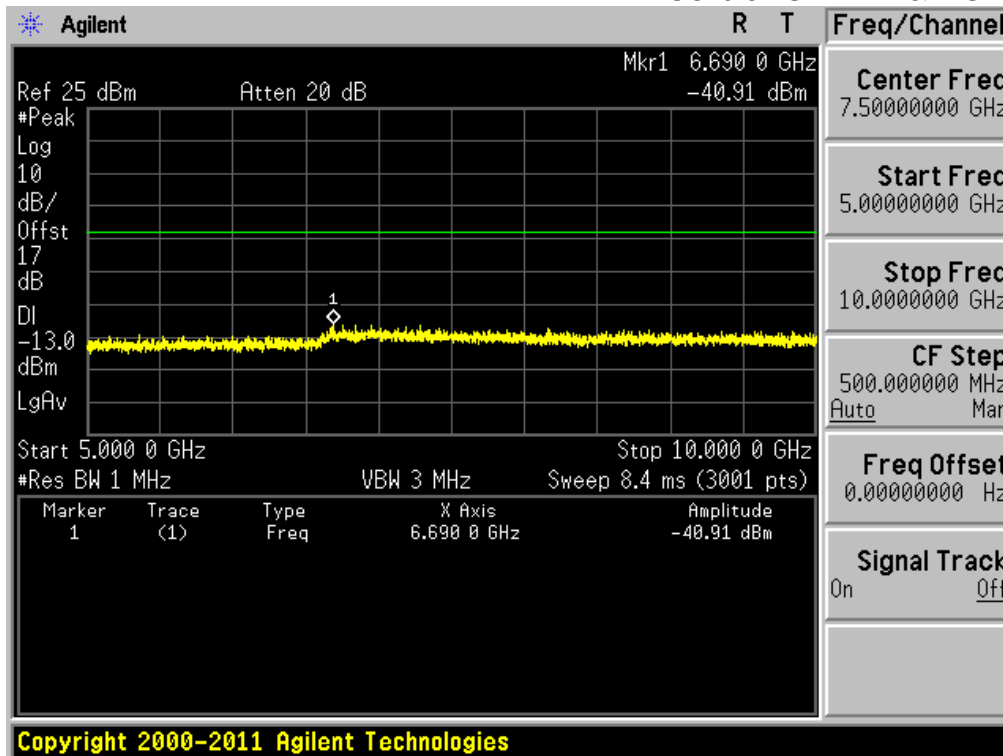


Cellular CDMA & Channel: 777

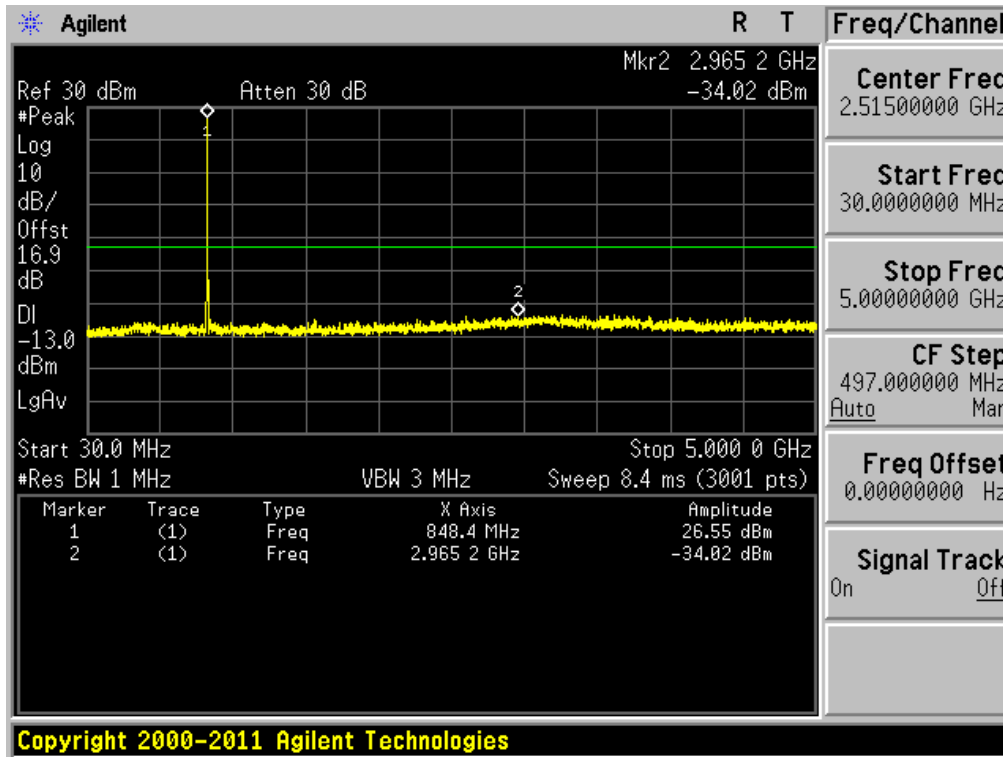


Cellular CDMA & Channel: 777

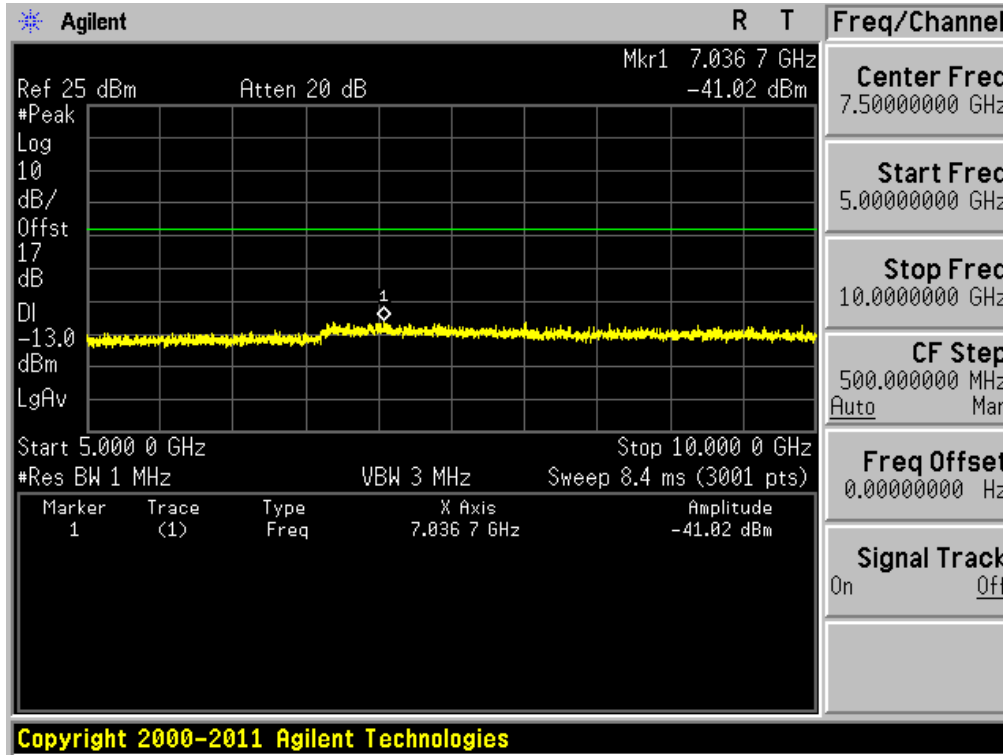


WCDMA850 & Channel: 4132

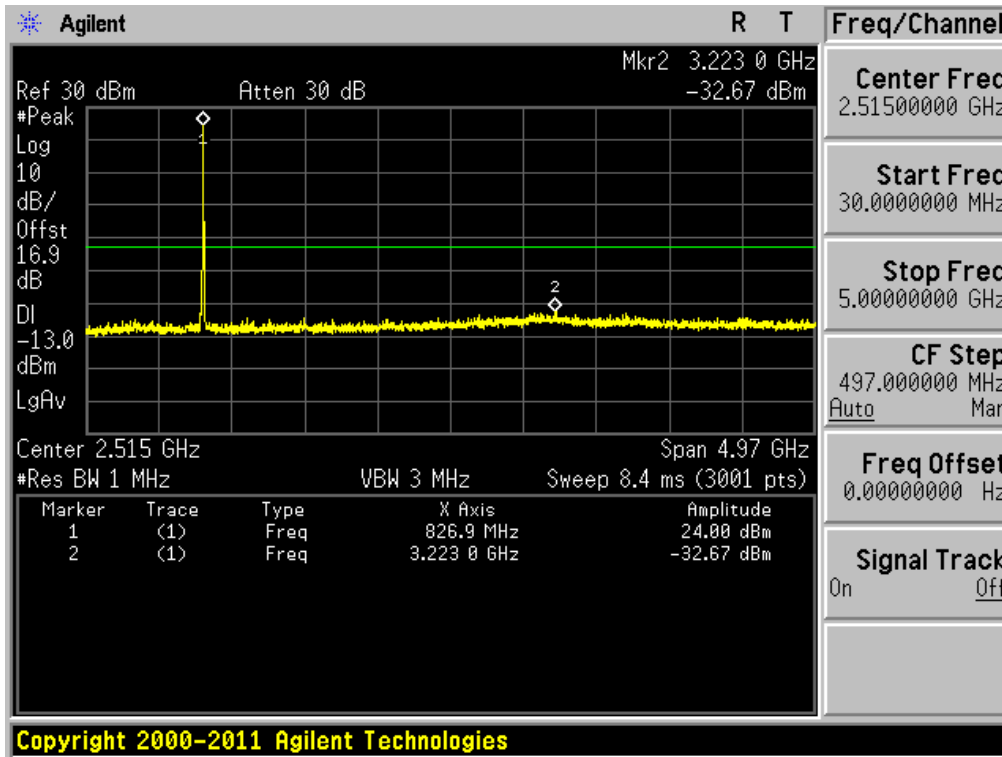


WCDMA850 & Channel: 4132

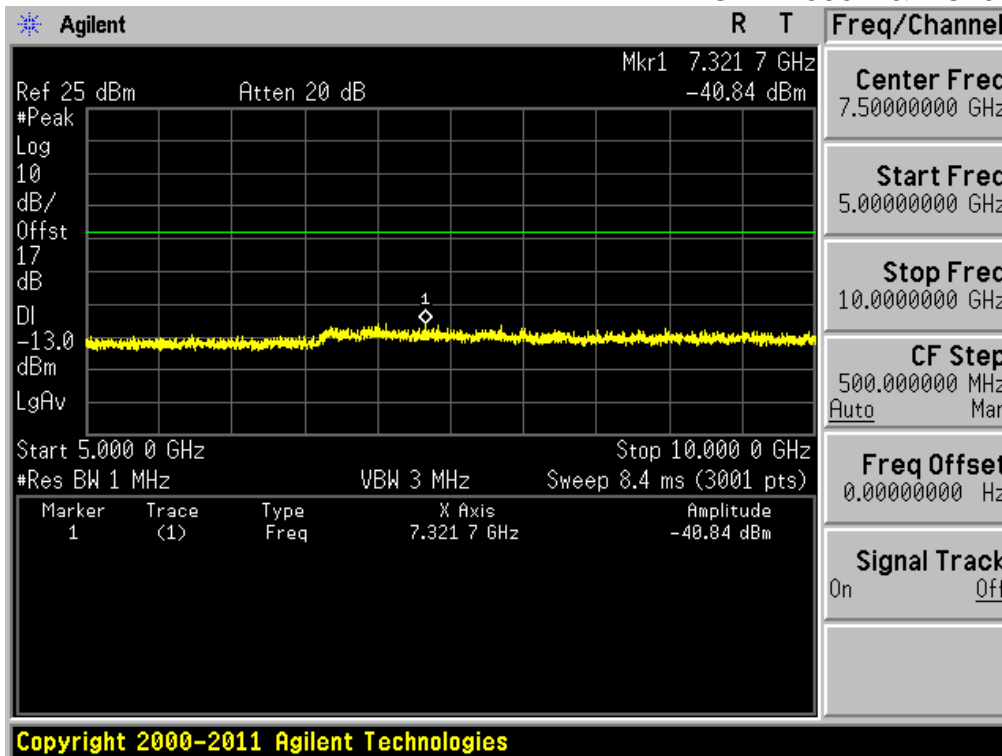


WCDMA850 & Channel: 4183

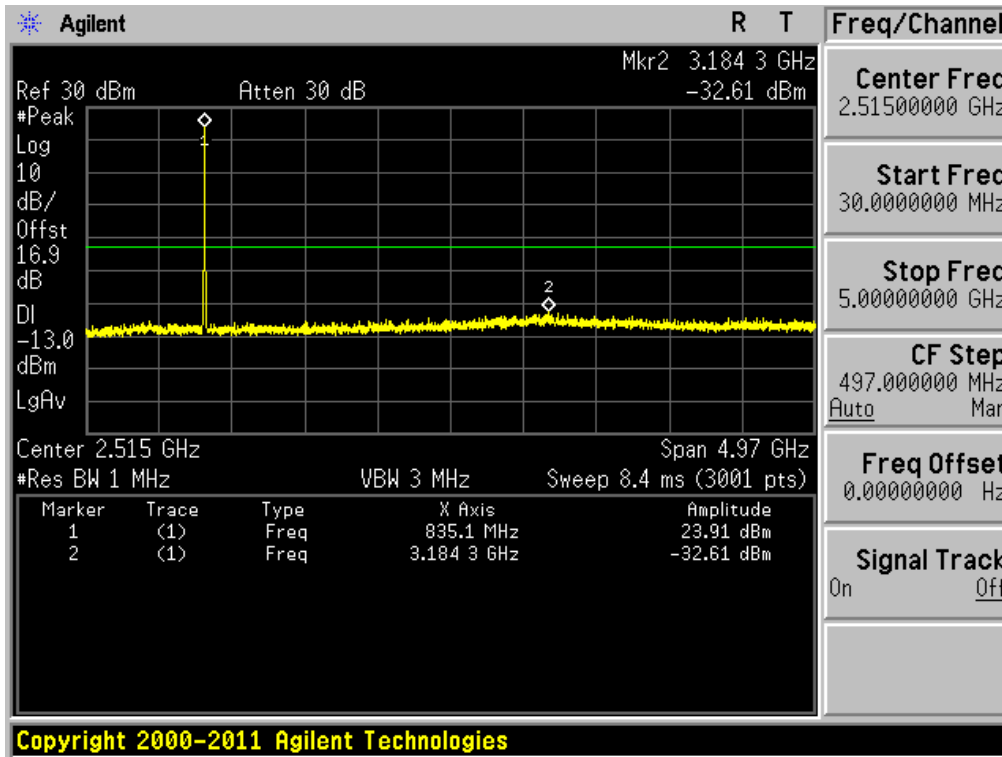


WCDMA850 & Channel: 4183

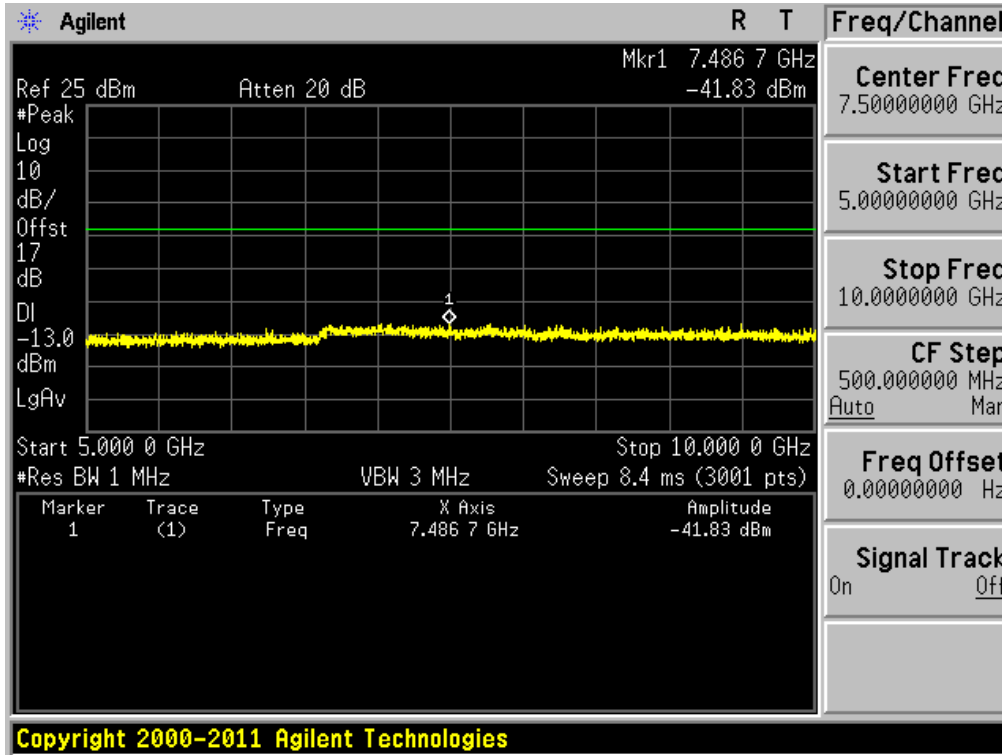


WCDMA850 & Channel: 4233

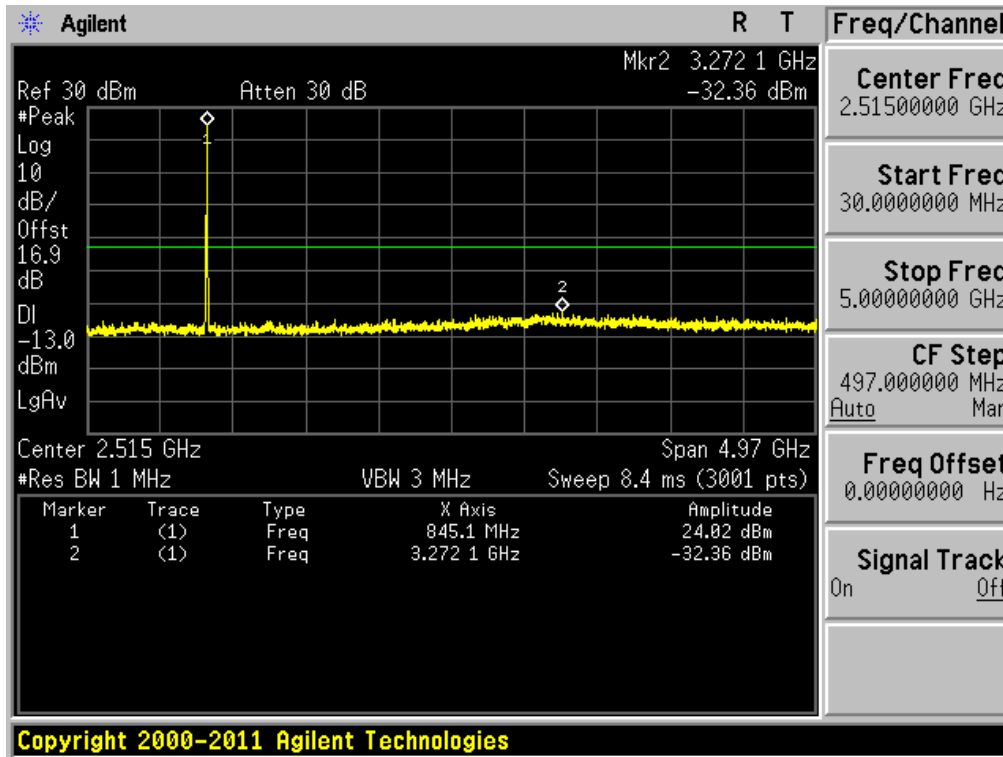


WCDMA850 & Channel: 4233

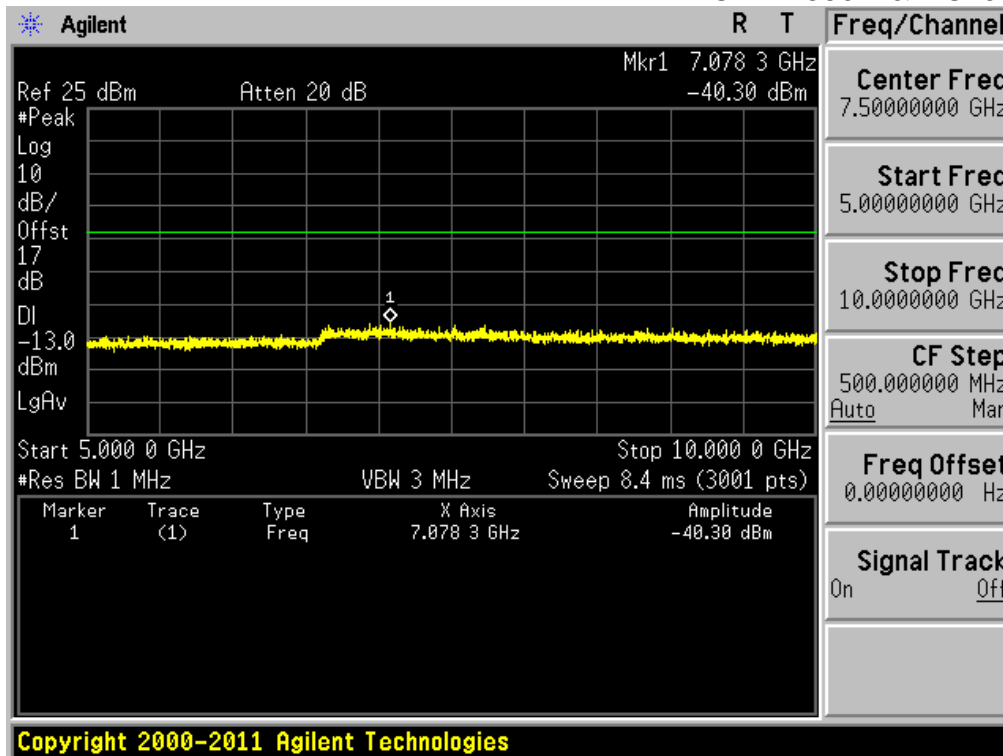


PCS1900 & Channel: 512

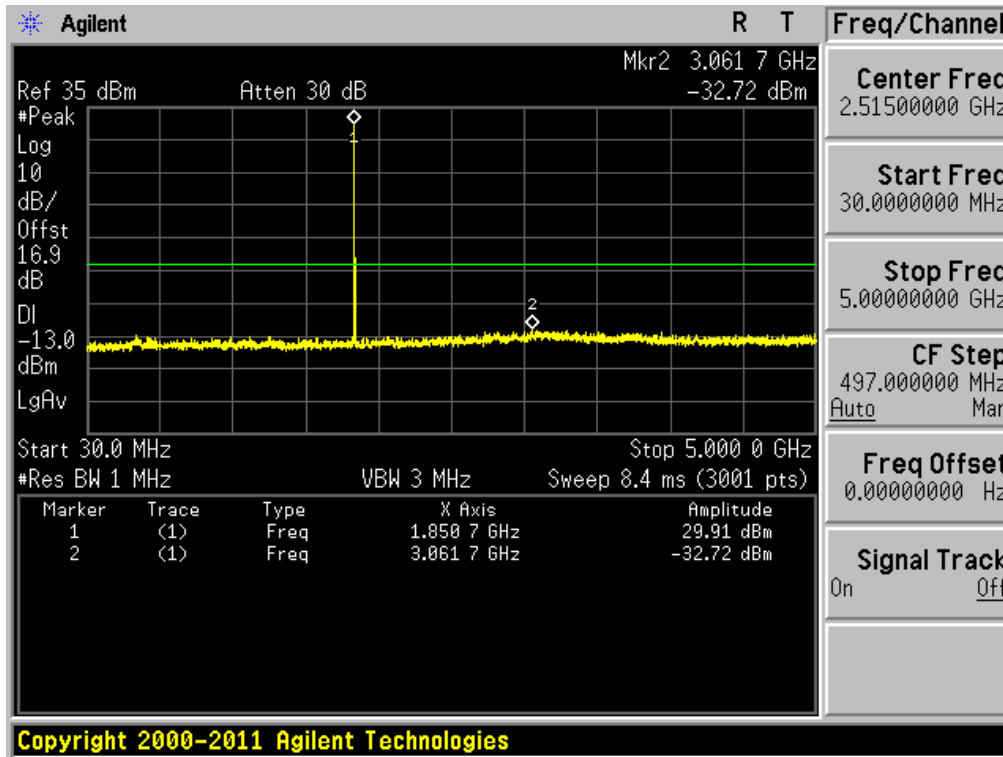


PCS1900 & Channel: 512

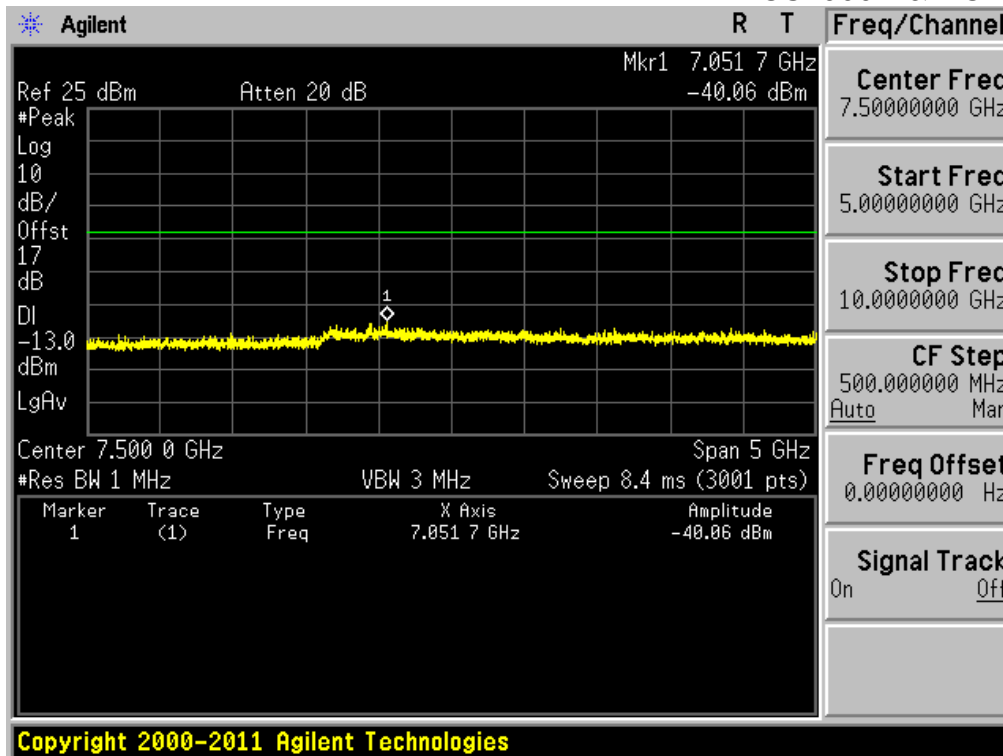


PCS1900 & Channel: 512

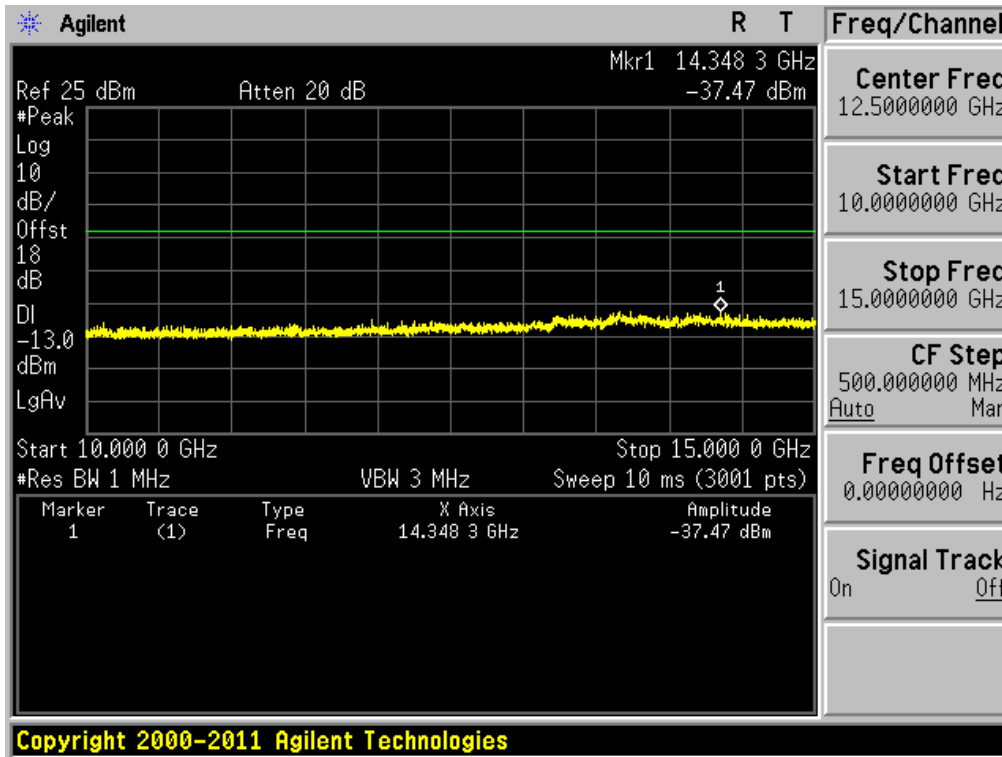


PCS1900 & Channel: 512

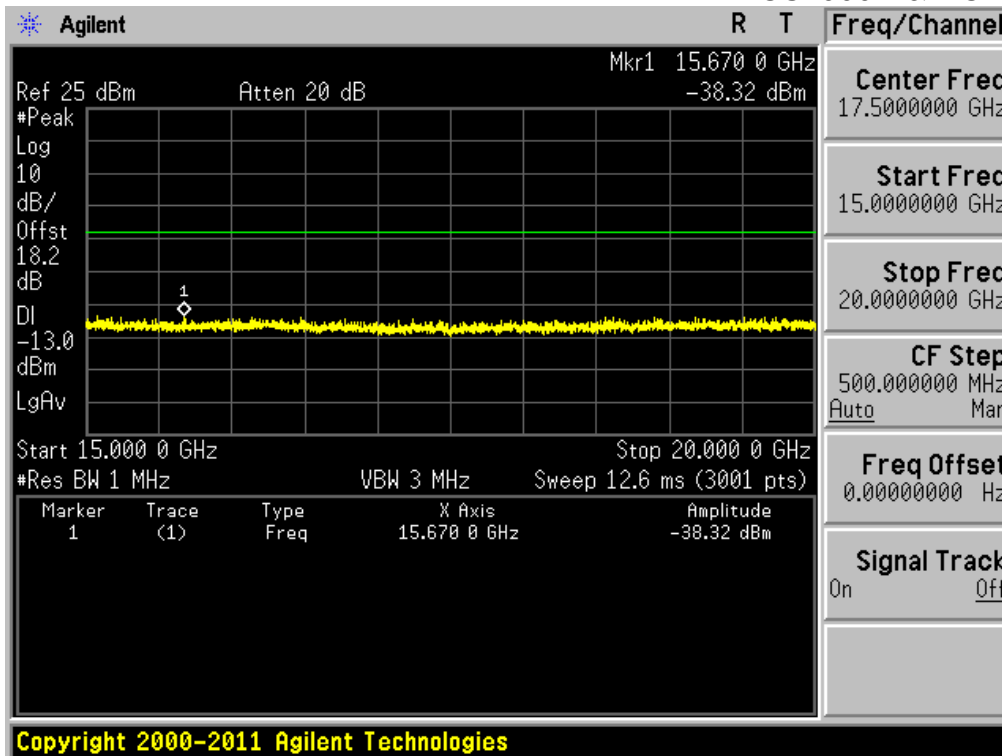

PCS1900 & Channel: 661

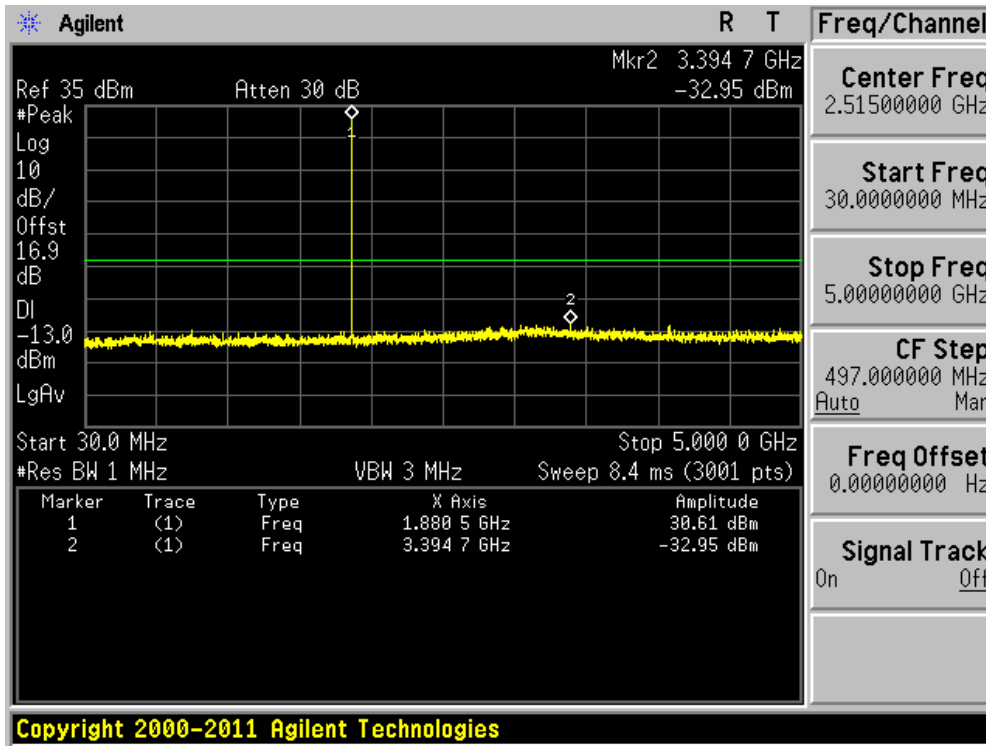


PCS1900 & Channel: 661

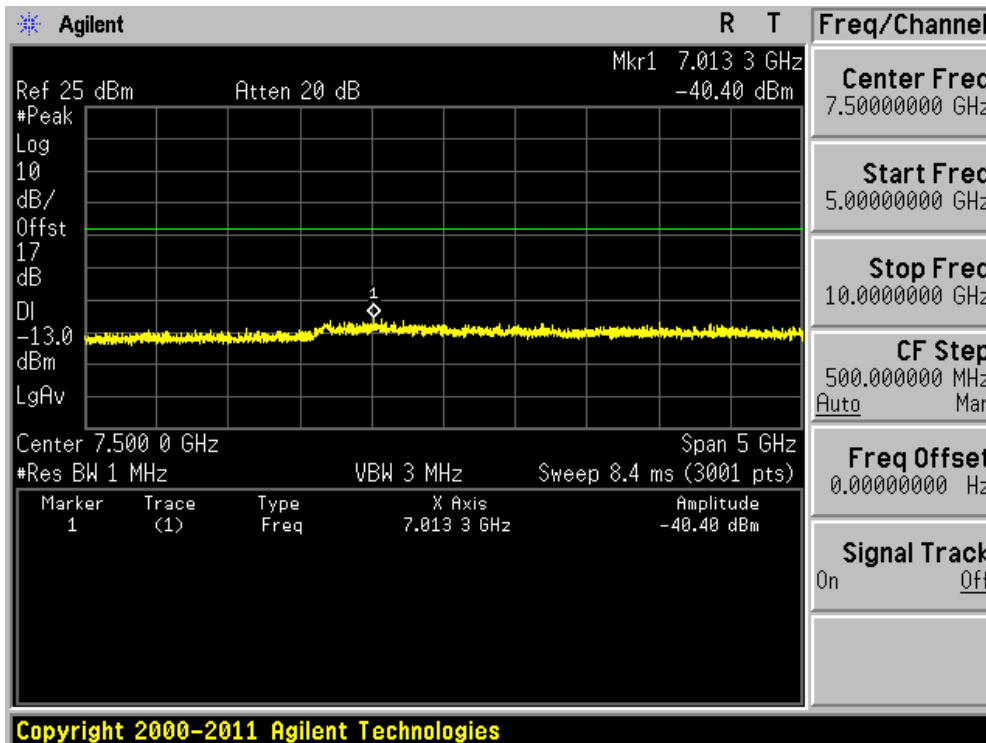





PCS1900 & Channel: 661

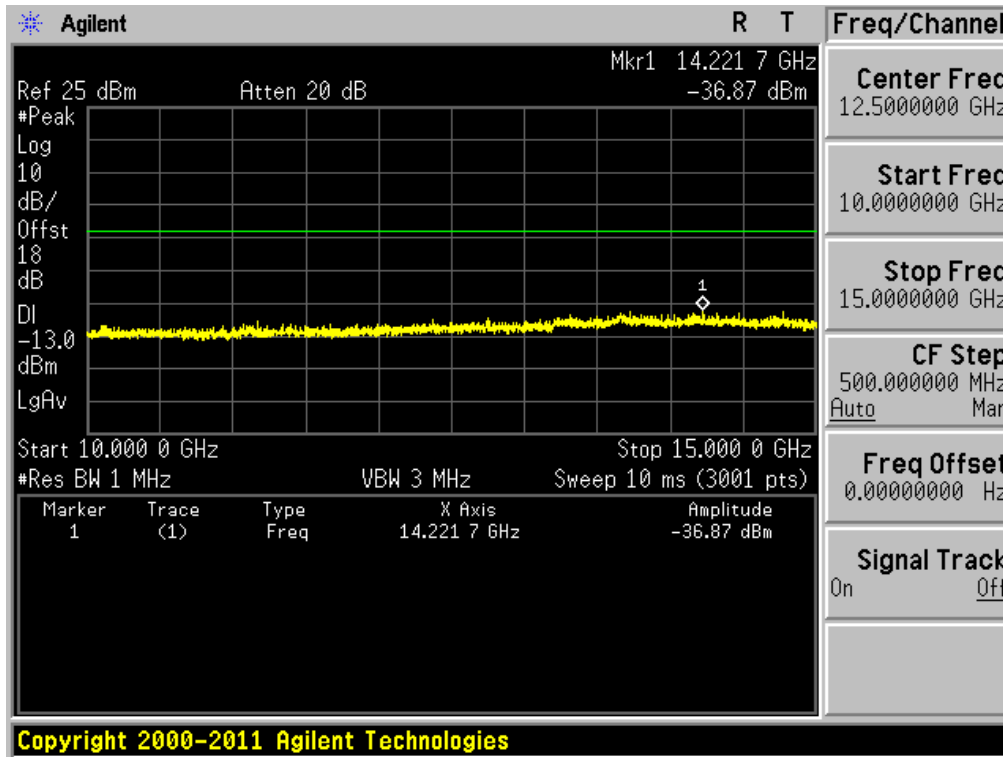


PCS1900 & Channel: 661

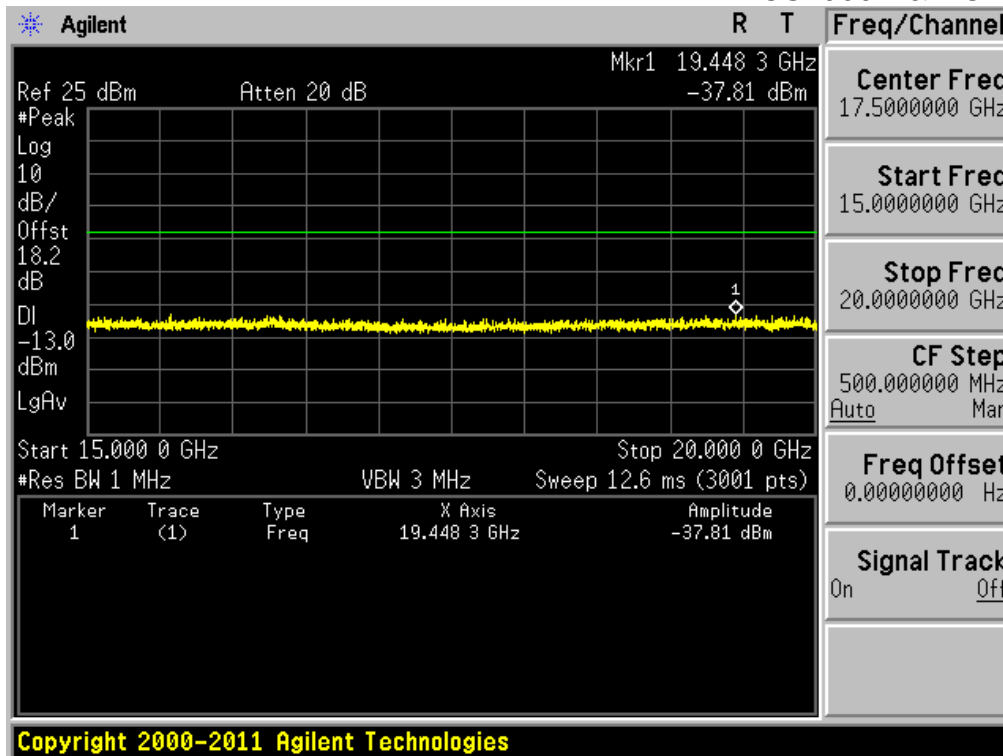


PCS1900 & Channel: 810

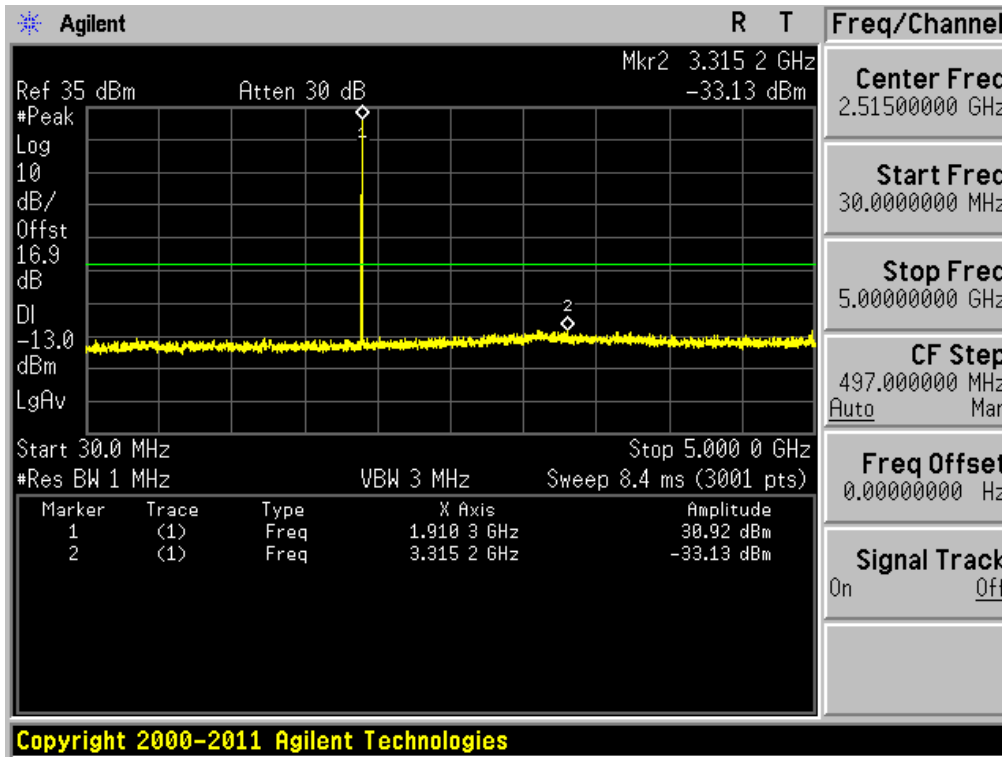


PCS1900 & Channel: 810

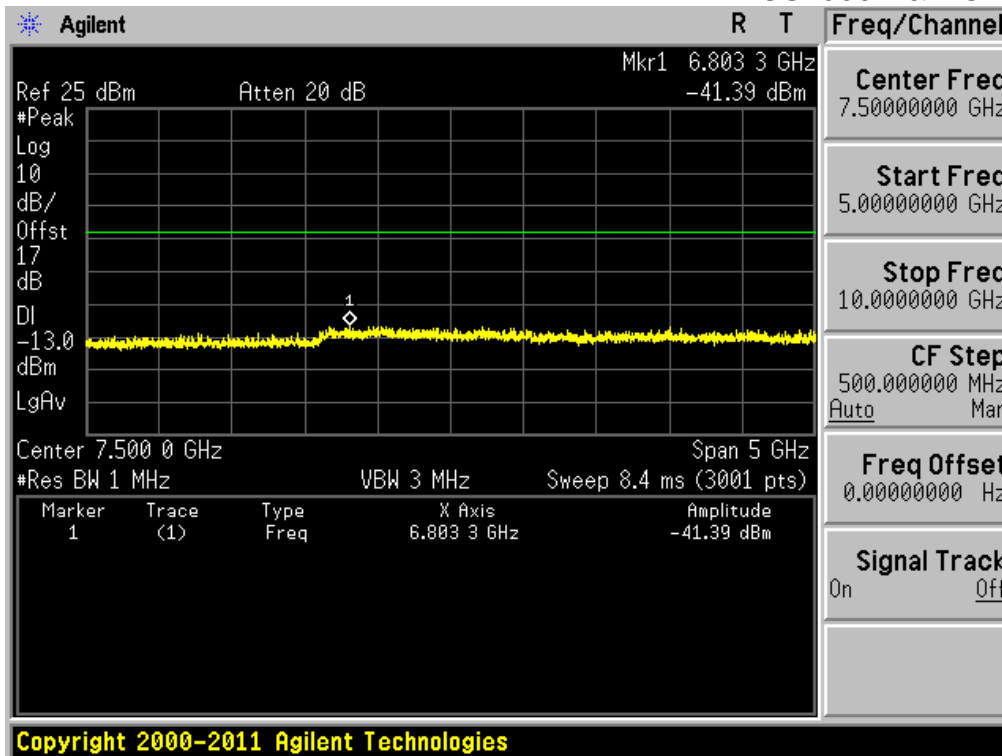

PCS1900 & Channel: 810

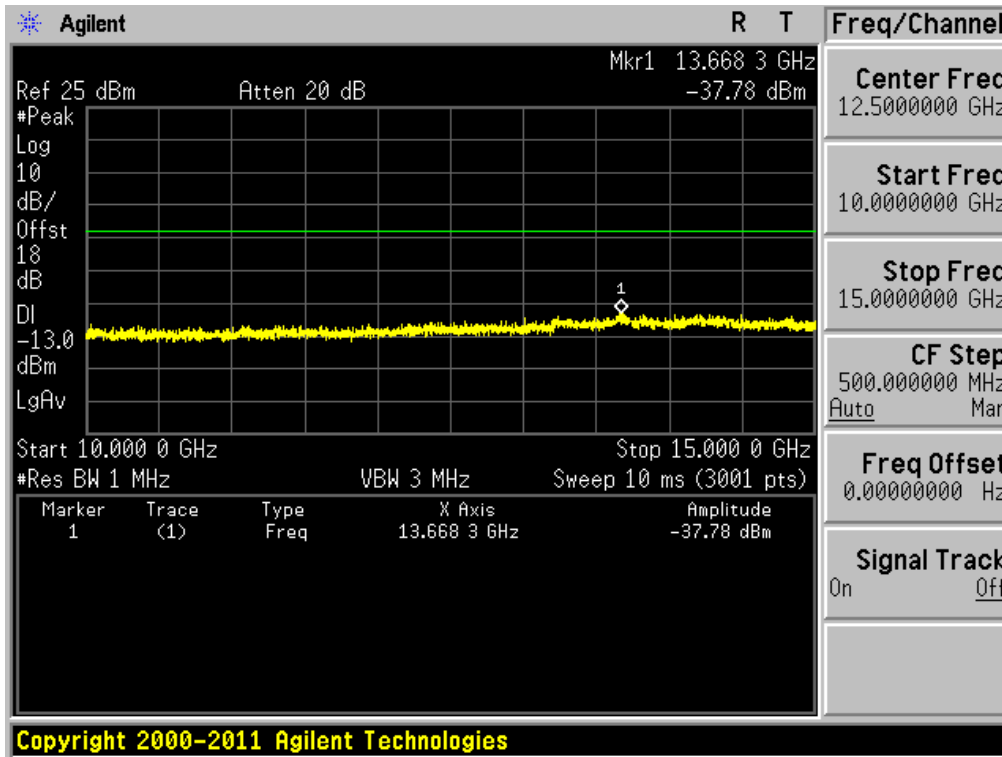


PCS1900 & Channel: 810

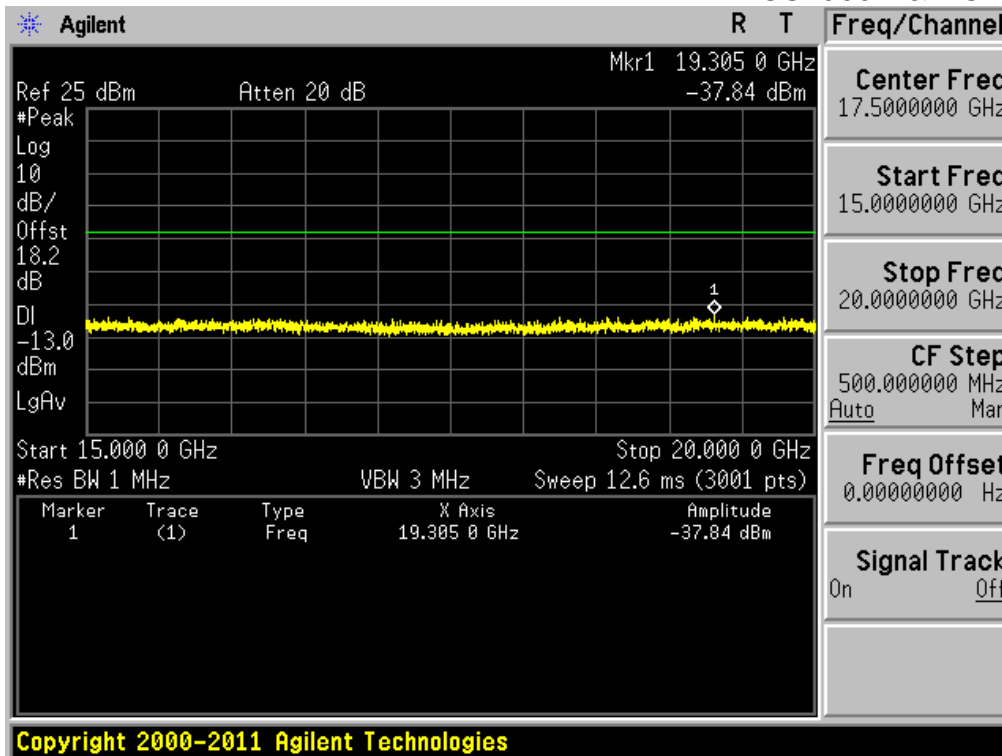


8.4 Band Edge


GSM850 & Channel: 128

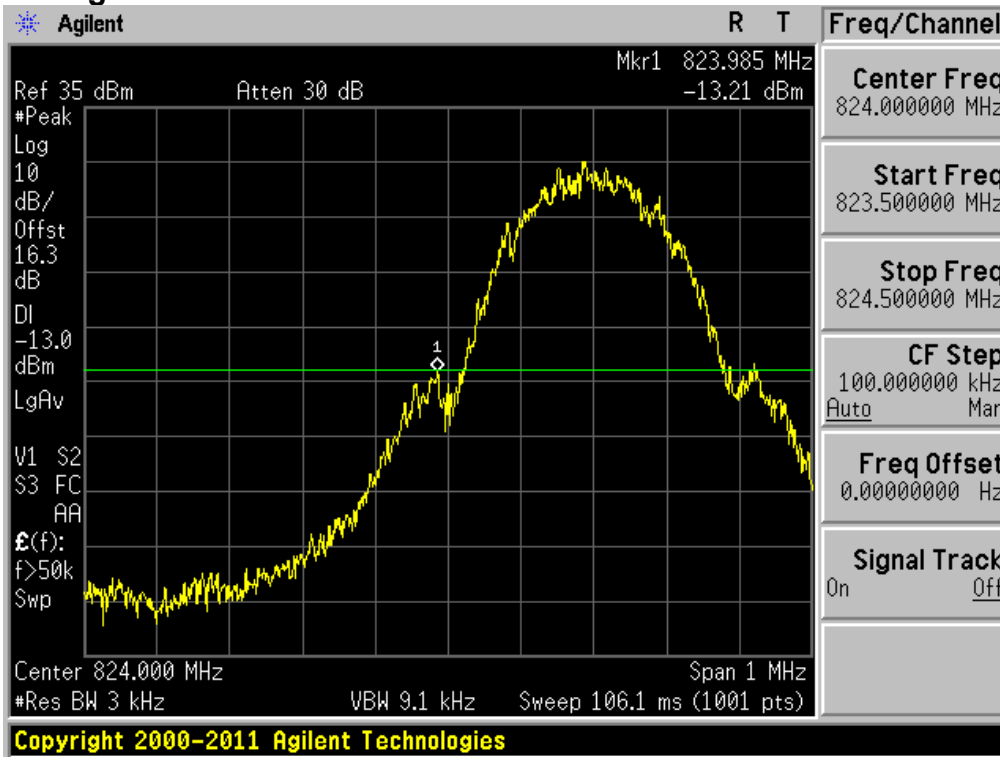


GSM850 & Channel: 251

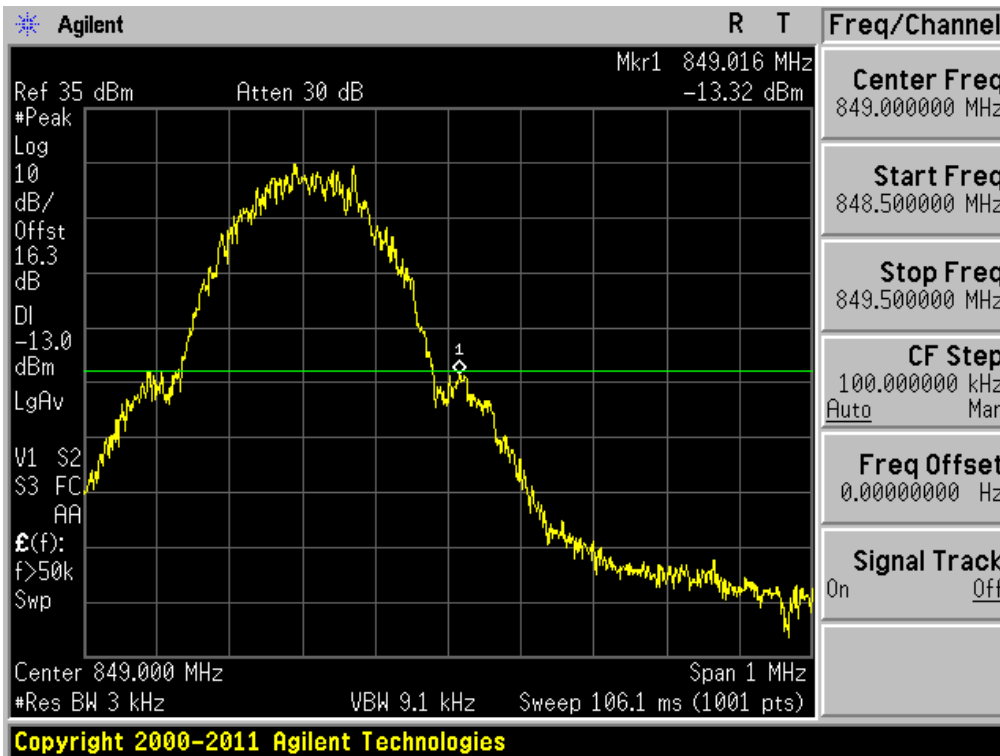


Cellular CDMA & Channel: 1013

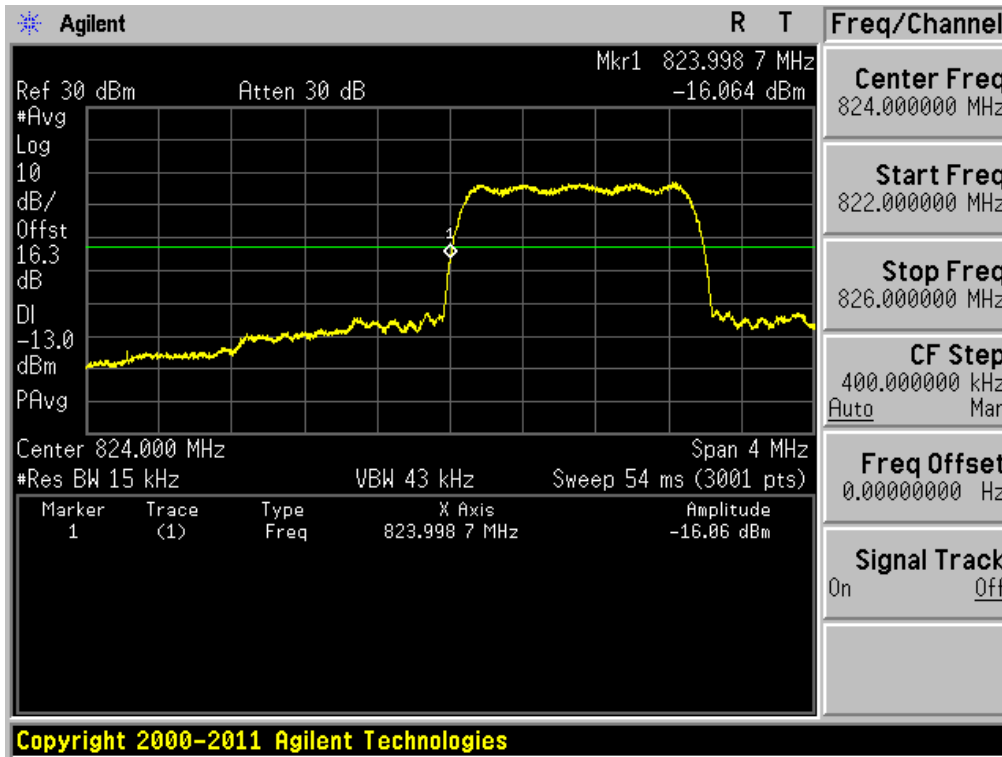


Cellular CDMA & Channel: 777

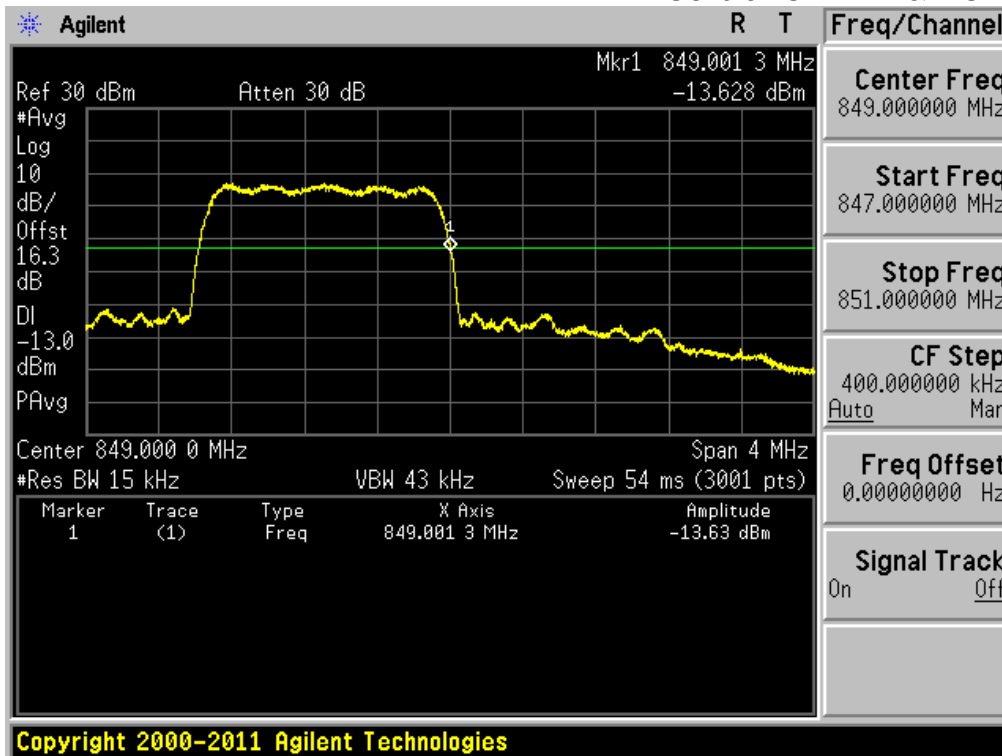


WCDMA850 & Channel: 4132

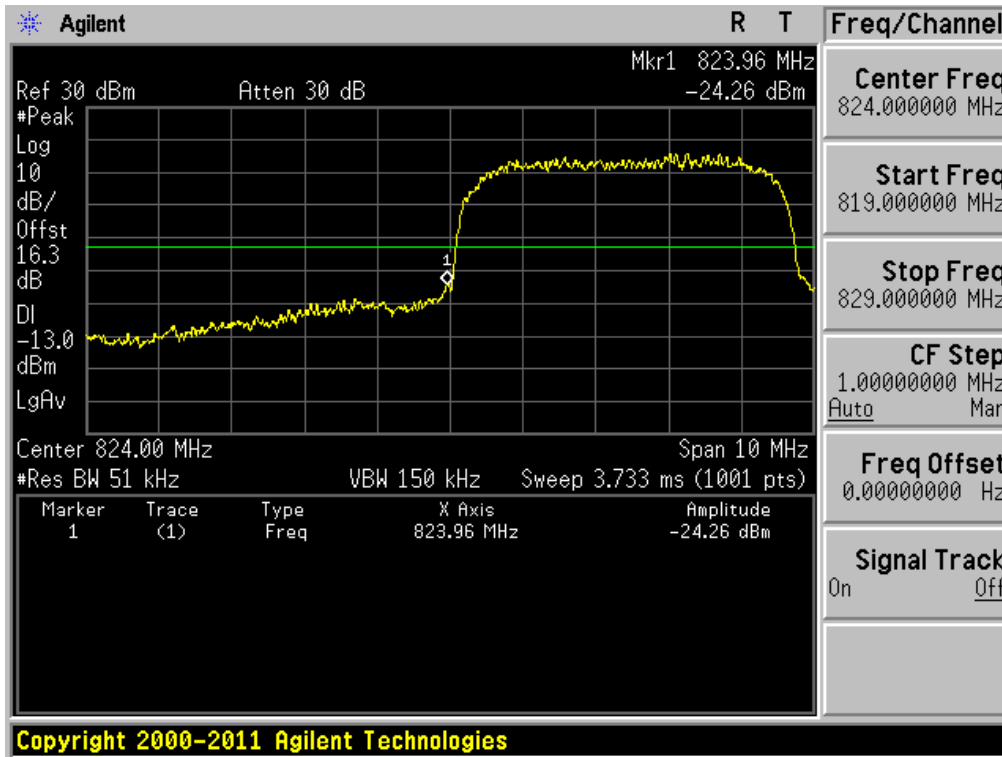


WCDMA850 & Channel: 4132

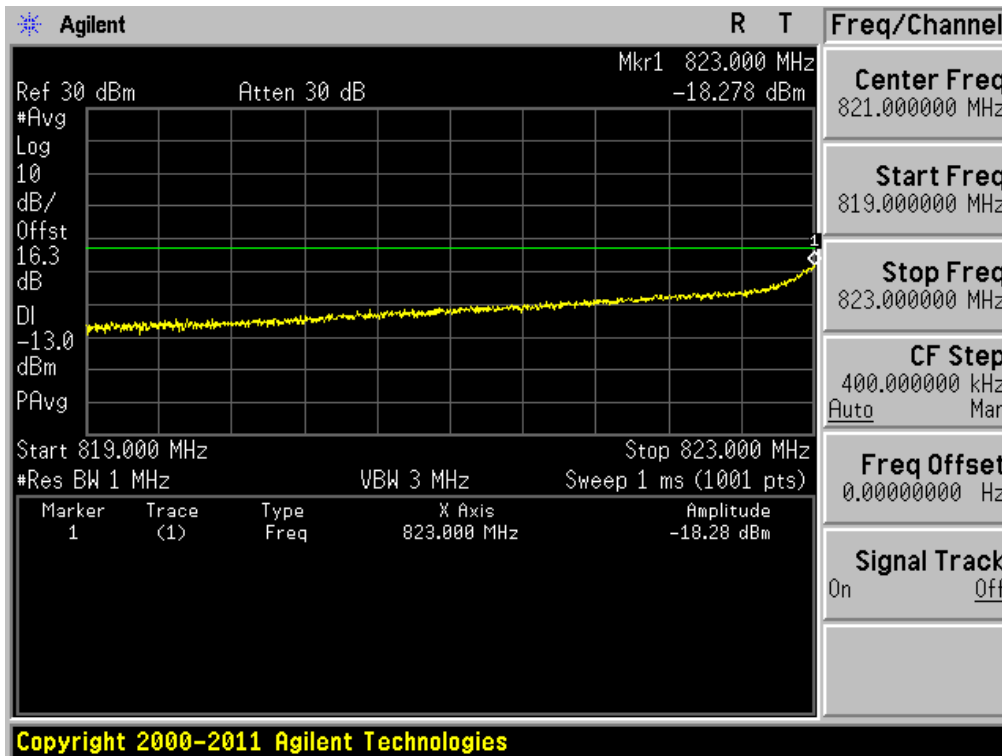


WCDMA850 & Channel: 4233

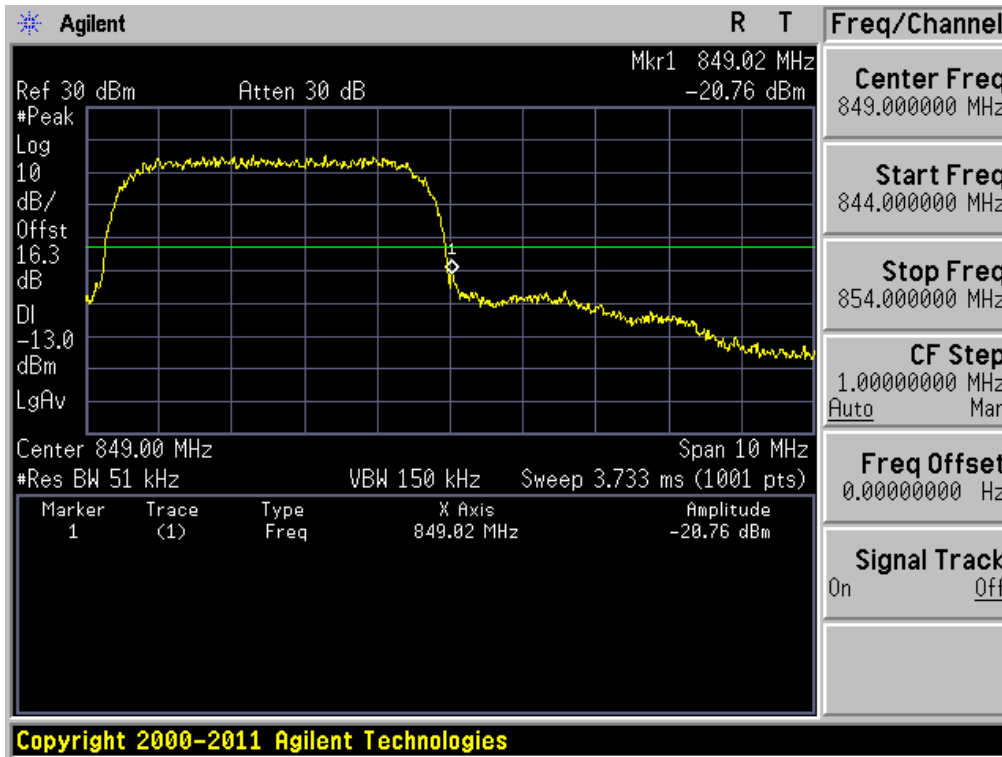

WCDMA850 & Channel: 4233

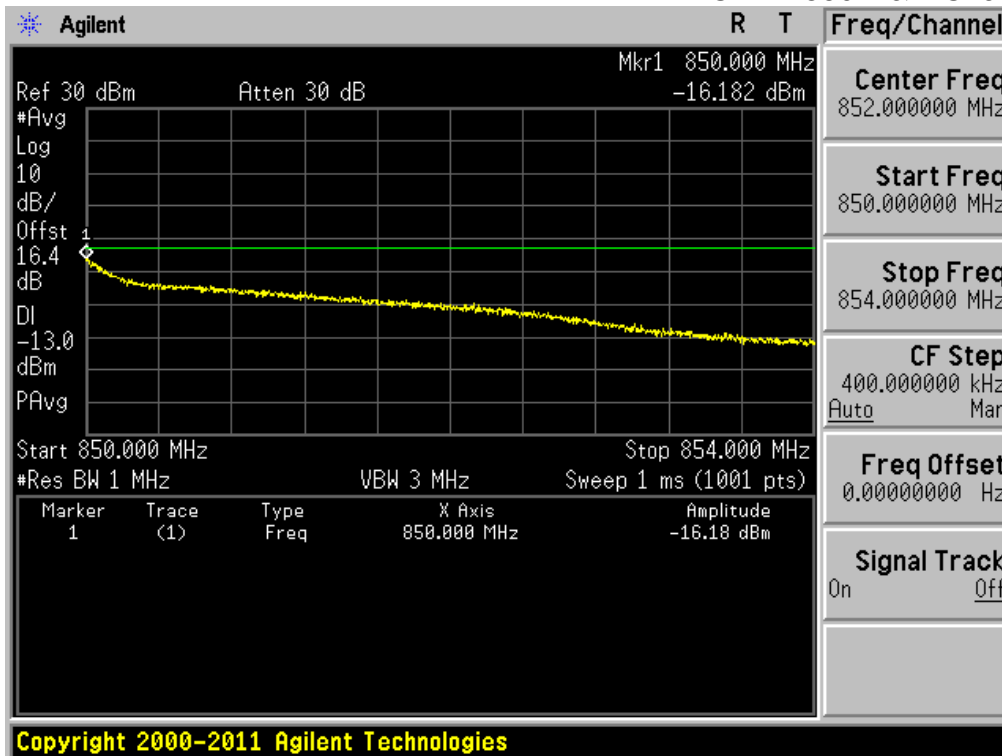

PCS1900 & Channel: 512

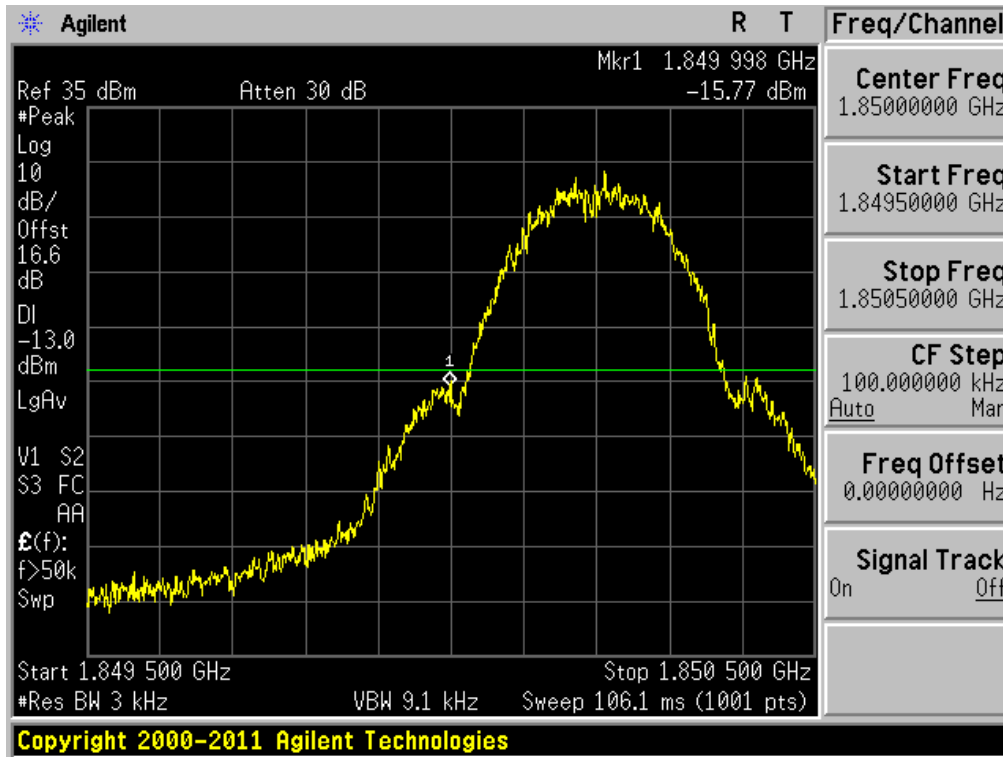

PCS1900 & Channel: 810

