

RF TEST REPORT

Test item : Mobile Phone
Model No. : KYL22
Order No. : DEMC1309-02848
Date of receipt : 2013-09-10
Test duration : 2013-09-20 ~ 2013-10-04
Date of issue : 2013-10-18
Use of report : FCC Original Grant

Applicant : KYOCERA Corporation
2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247
KDB558074 v03r01

Test environment : See appended test report

Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
JaeJin Lee

Witnessed by:

N/A

Reviewed by:



Deputy General Manager
WonJung Lee

Test Report Version

Test Report No.	Date	Description
DRTFCC1310-0998	Oct. 18, 2013	Initial issue

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. SUMMARY OF TESTS	5
4. TEST METHODOLOGY	6
4.1 EUT CONFIGURATION	6
4.2 EUT EXERCISE	6
4.3 GENERAL TEST PROCEDURES	6
4.4 DESCRIPTION OF TEST MODES	6
5. INSTRUMENT CALIBRATION	7
6. FACILITIES AND ACCREDITATIONS	7
6.1 FACILITIES	7
6.2 EQUIPMENT	7
7. ANTENNA REQUIREMENTS	7
8. TEST RESULT	8
8.1 6dB Bandwidth	8
8.2 Maximum Peak Conducted Output Power	15
8.3 Maximum Power Spectral Density	17
8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions	24
8.5 Radiated Spurious Emissions	40
8.6 Power-line Conducted Emissions	45
8.7 Occupied Bandwidth	48
9. LIST OF TEST EQUIPMENT	49
APPENDIX I	50

1. GENERAL INFORMATION

Applicant : KYOCERA Corporation
Address : 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan
FCC ID : JOYKYL22
EUT : Mobile Phone
Model : KYL22
Additional Model(s) : N/A
Data of Test : 2013-09-20 ~ 2013-10-04
Contact person : Yoshikazu Yamamoto

2. EUT DESCRIPTION

Product	Mobile Phone
Model Name	KYL22
Power Supply	DC 3.8 V
Frequency Range	2.4GHz Band ▪ 802.11b/g/n(20MHz): 2412 MHz ~ 2462 MHz
Max. RF Output Power	2.4GHz Band ▪ 802.11b: 19.81 dBm ▪ 802.11g: 22.51 dBm ▪ 802.11n (HT20): 22.49 dBm
Modulation Type	802.11b: DSSS/CCK 802.11g/n: OFDM
Antenna Specification	Internal Antenna (1TX ,1RX) ▪ 2.4GHz Band Max. peak gain : 0 dBi

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.247(a)	RSS-210 [A8.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-210 [A8.4]	Transmitter Output Power	< 1Watt		C
15.247(d)	RSS-210 [A8.5]	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
-	RSS Gen [4.6.1]	Occupied Bandwidth (99%)	RSS-Gen(4.6.1)		NA
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits	Radiated	C ^{Note2}
15.207	RSS-Gen [7.2.4]	AC Conducted Emissions	< FCC 15.207 limits	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC 15.203	-	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: This test item was performed in each axis and the worst case data was reported.</p>					

4. TEST METHODOLOGY

Generally the tests were performed according to the KDB558074 v03r1. And ANSI C63.10-2009 was used for EUT setup of radiated spurious emission and AC line conducted emission testing

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10, the EUT is placed on the turntable, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10.

4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number : 678747

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203& RSS-Gen [7.1.2]:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

The internal antenna is attached on the main PCB using the special spring tension.

Therefore this E.U.T Complies with the requirement of §15.203

8. TEST RESULT

8.1 6dB Bandwidth

Test Requirements and limit, §15.247(a) & RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074 v03r1**.

1. Set resolution bandwidth (RBW) = 100 KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
(RBW:100KHz/VBW:300KHz)
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outer most amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


■ TEST RESULTS: **Comply**

Test Mode	Data Rate	Frequency [MHz]	Test Results[MHz]
802.11b	1Mbps	2412	8.451
		2437	8.454
		2462	8.518
802.11g	6Mbps	2412	16.382
		2437	16.397
		2462	16.423
802.11n (20MHz)	MCS0	2412	17.500
		2437	17.354
		2462	17.538

RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2412MHz

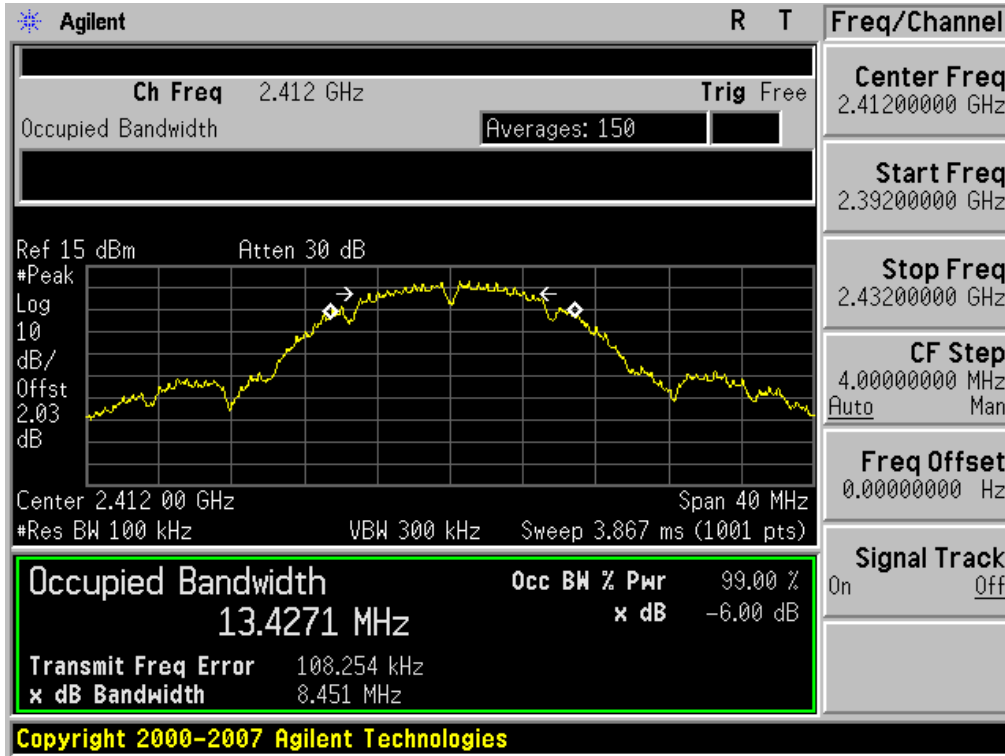


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2437MHz

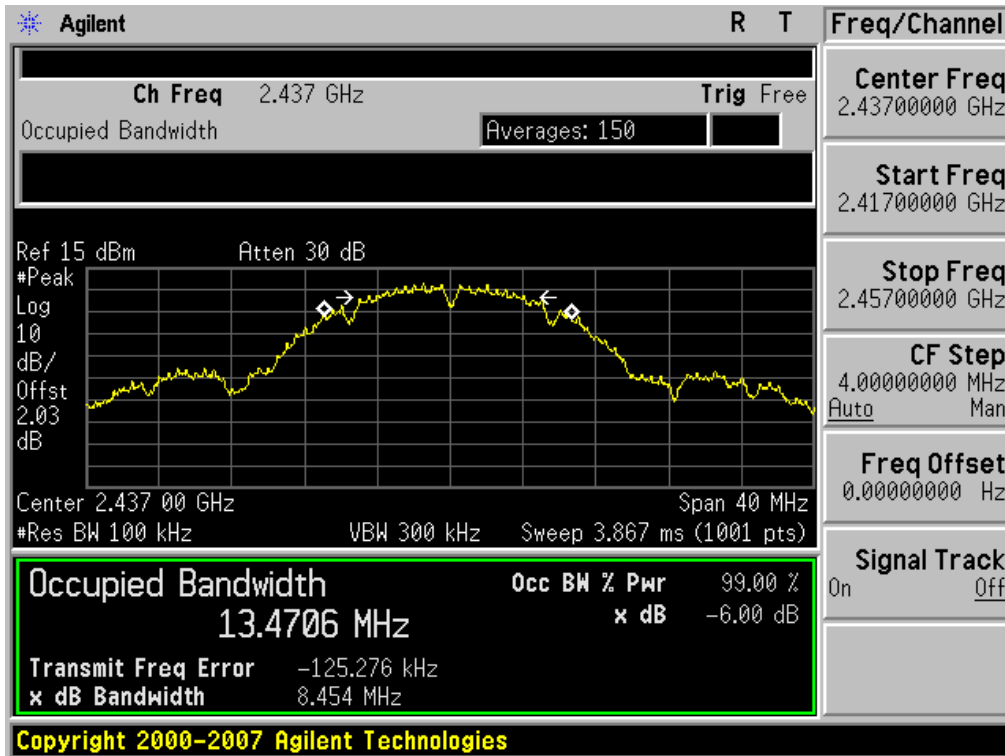


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2462MHz

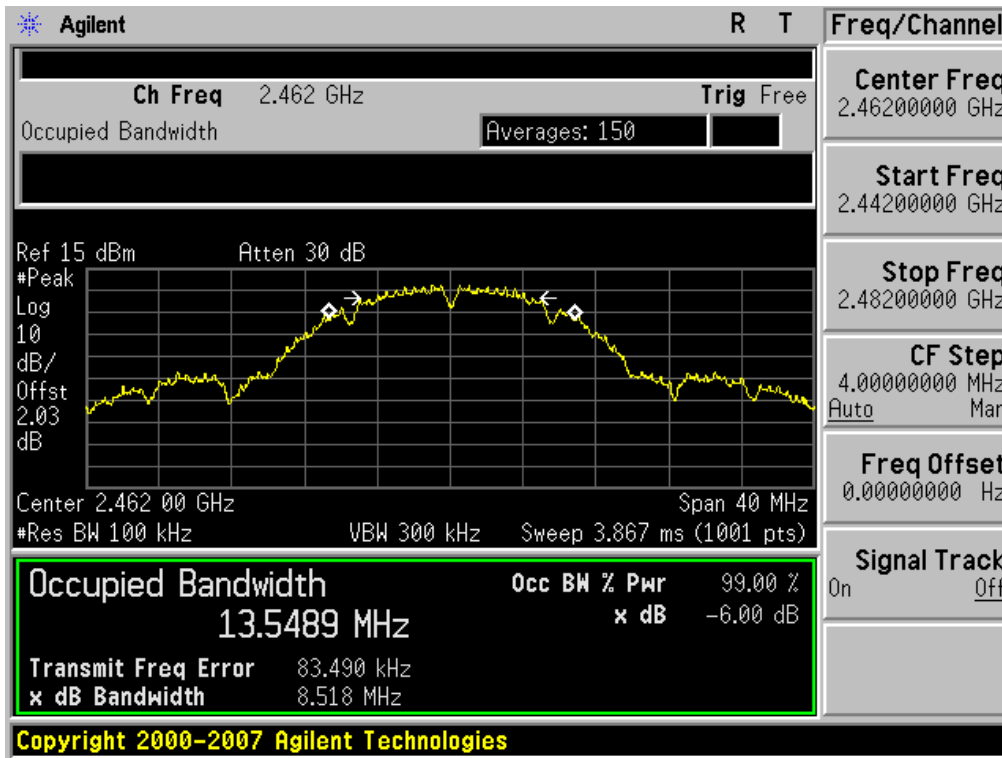


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2412MHz

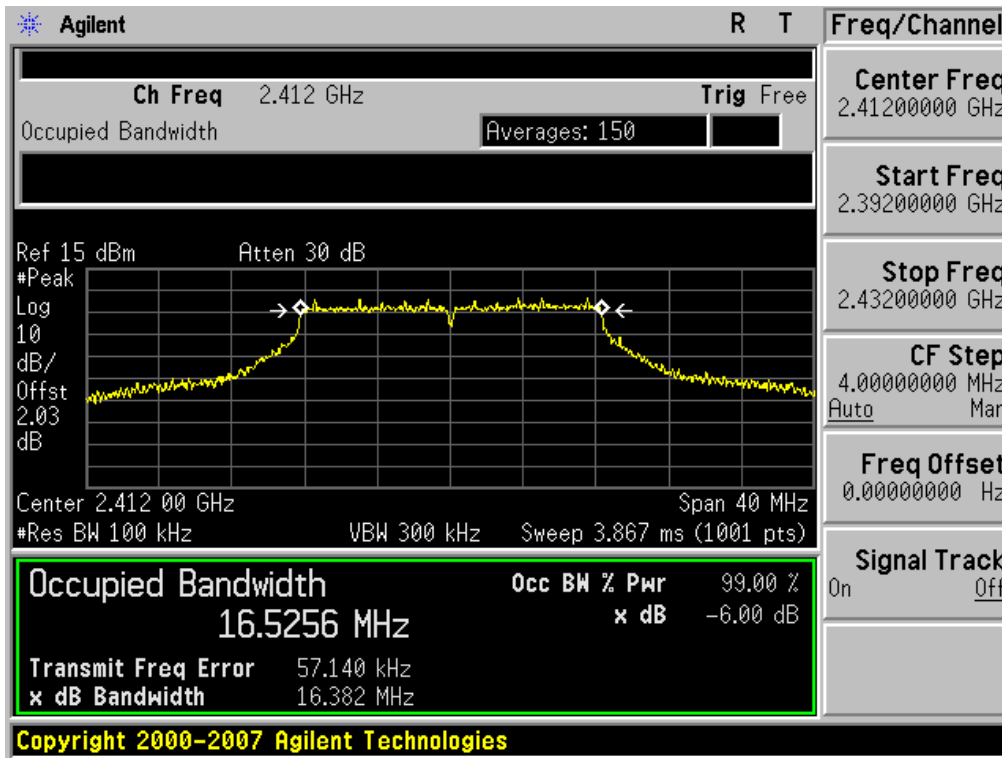


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2437MHz

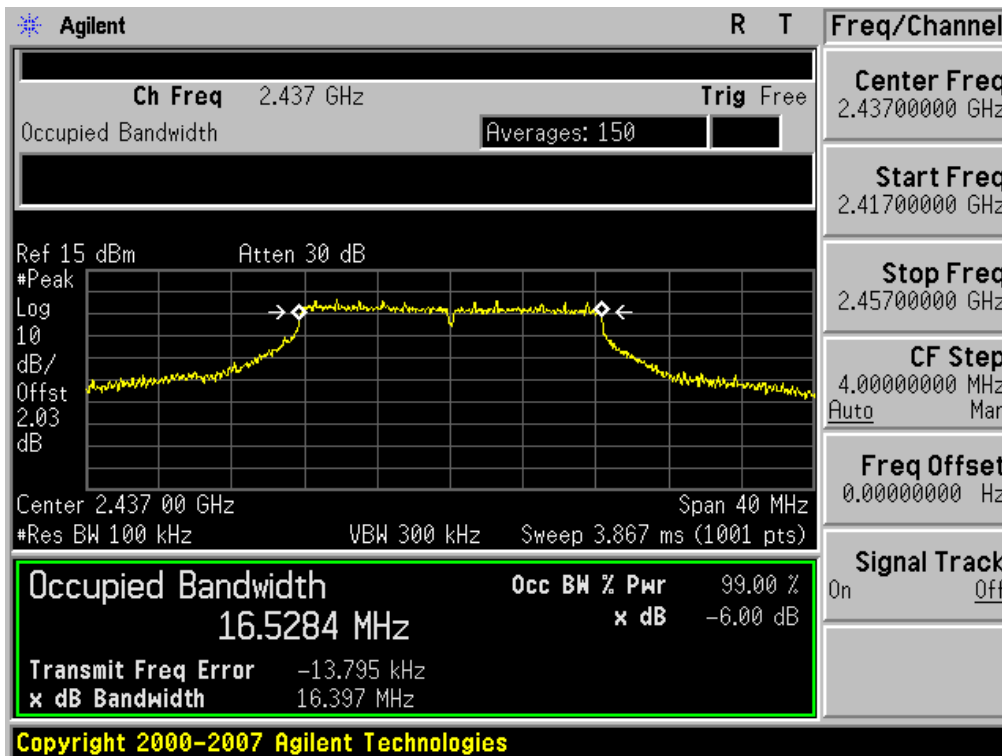


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2462MHz

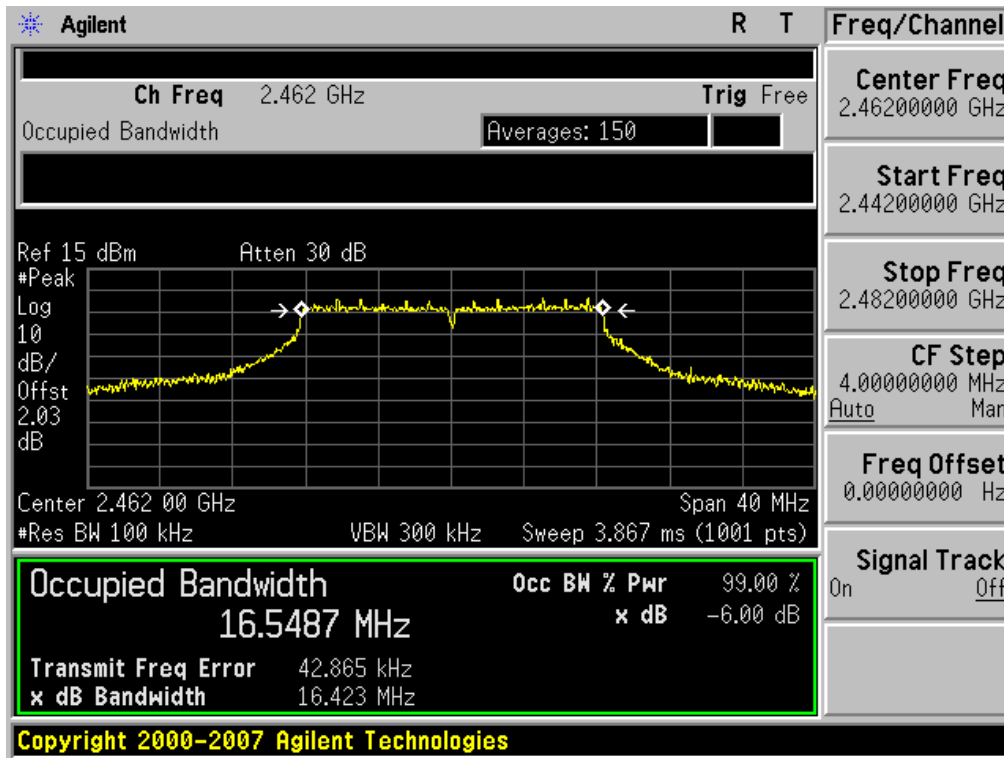


6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2412MHz

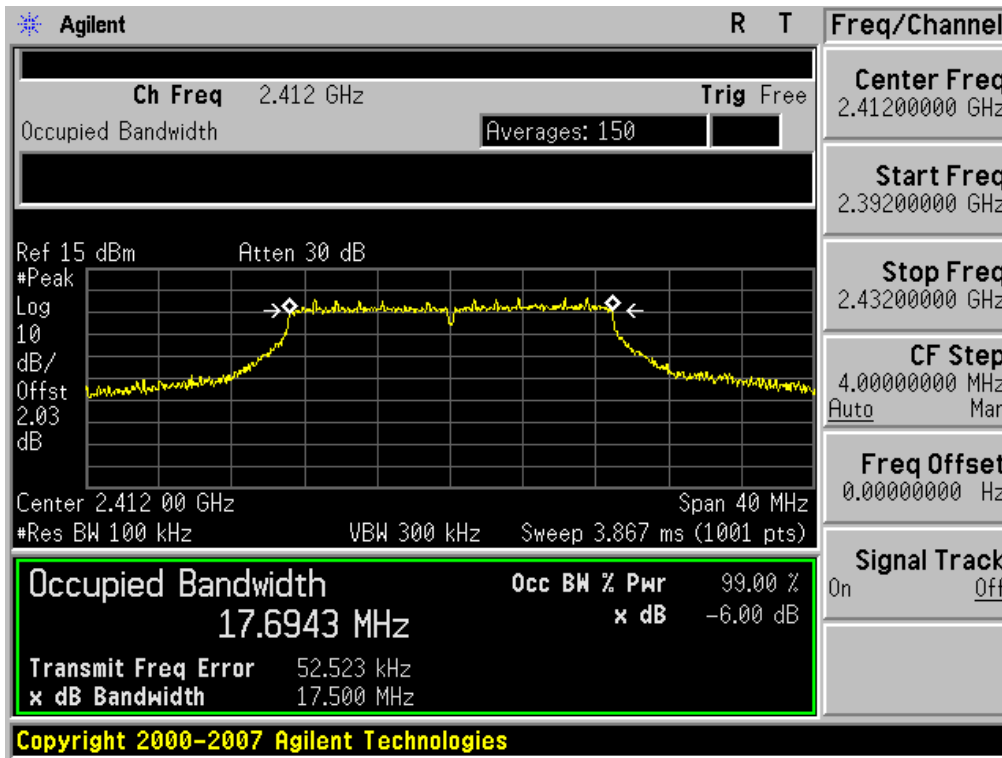


6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2437MHz

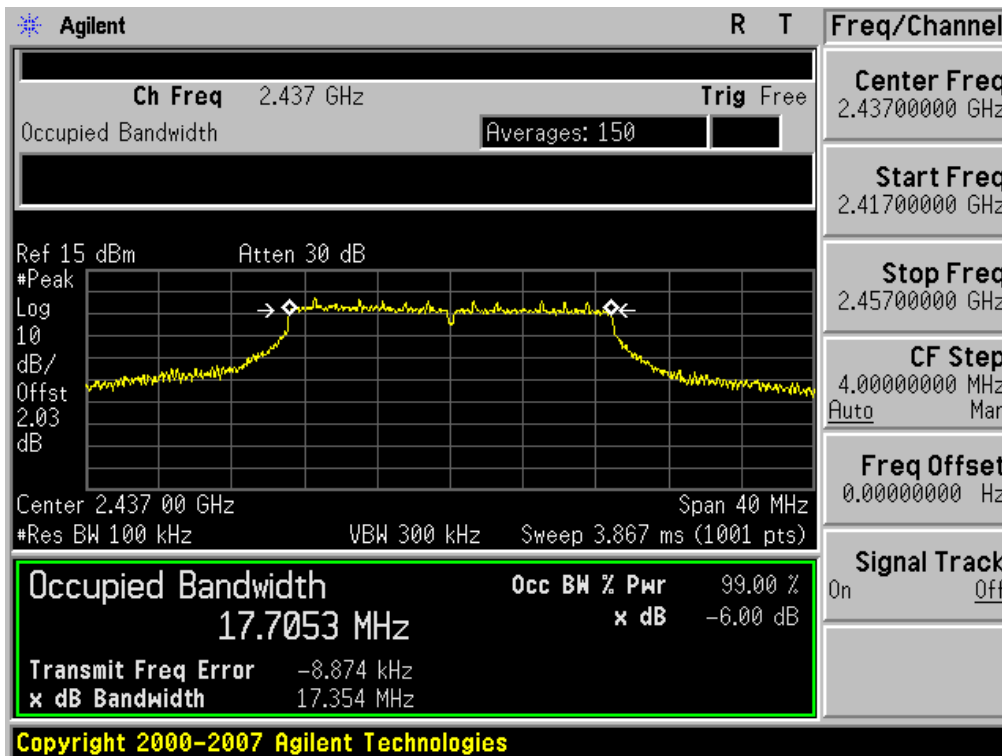

6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2462MHz

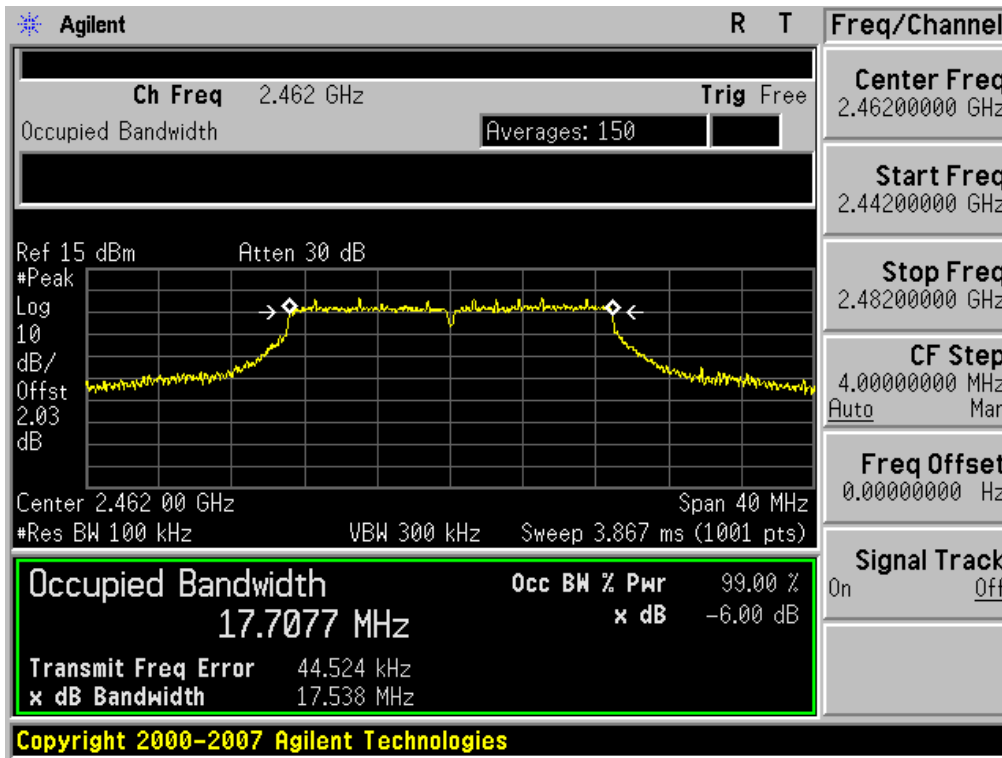


8.2 Maximum Peak Conducted Output Power

Test Requirements and limit, §15.247(b) & RSS-210 [A8.4]

The maximum permissible conducted output power is **1 Watt**.

■ TEST CONFIGURATION

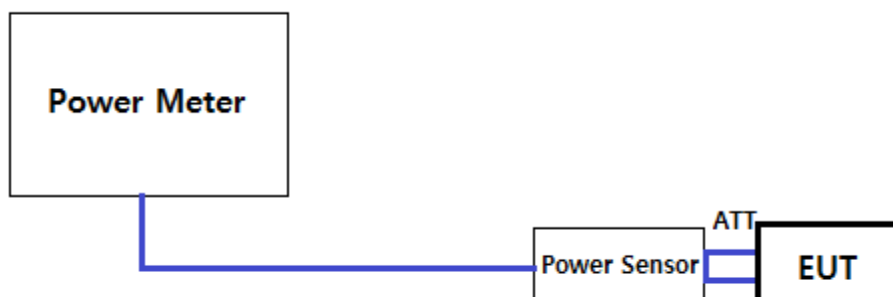

■ TEST PROCEDURE:

1. PKPM1 Peak power meter method of KDB558074 v03r1

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB558074 v03r1

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

■ TEST RESULTS: **Comply**

- Measurement Data: **Comply**

- Test Results

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				1	2	5.5	11	N/A	N/A	N/A	N/A
802.11b	1	2412	PK	19.66	19.54	19.60	19.64	-	-	-	-
			AV	16.77	16.76	16.72	16.71	-	-	-	-
	6	2437	PK	19.81	19.74	19.70	19.77	-	-	-	-
			AV	16.93	16.87	16.85	16.80	-	-	-	-
	11	2462	PK	19.59	19.43	19.45	19.53	-	-	-	-
			AV	16.65	16.57	16.56	16.59	-	-	-	-

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	1	2412	PK	22.39	22.21	22.18	22.10	22.26	22.23	22.30	22.28
			AV	13.12	12.97	12.97	12.95	12.92	12.89	12.83	12.80
	6	2437	PK	22.51	22.47	22.46	22.39	22.44	22.38	22.36	22.38
			AV	13.35	13.23	13.22	13.16	13.11	13.07	12.96	13.01
	11	2462	PK	21.56	21.49	21.47	21.40	21.46	21.38	21.44	21.50
			AV	13.07	13.00	12.96	12.96	12.94	12.89	12.90	12.80

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [MCS]							
				0	1	2	3	4	5	6	7
802.11n (HT20)	1	2412	PK	22.37	22.29	22.17	22.21	22.31	22.21	22.25	22.05
			AV	12.98	12.96	12.89	12.91	12.86	12.89	12.83	12.87
	6	2437	PK	22.49	22.43	22.46	22.41	22.46	22.39	22.35	22.37
			AV	13.26	13.25	13.22	13.15	13.13	13.17	12.99	12.96
	11	2462	PK	22.01	21.98	21.93	21.89	21.88	21.92	21.78	21.83
			AV	12.71	12.66	12.67	12.54	12.51	12.50	12.41	12.40

8.3 Maximum Power Spectral Density

Test requirements and limit, §15.247(e) & RSS-210 [A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE:

Method PKPSD of KDB558074 v03r1 is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to: **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


■ TEST RESULTS: **Comply**

Test Mode	Data Rate	Frequency [MHz]	RBW	PKPSD [dBm]
802.11b	1Mbps	2412	3 kHz	- 6.11
		2437	3 kHz	- 5.74
		2462	3 kHz	- 6.69
802.11g	6Mbps	2412	3 kHz	- 12.65
		2437	3 kHz	- 12.05
		2462	3 kHz	- 11.55
802.11n HT20	MCS0	2412	3 kHz	- 12.17
		2437	3 kHz	- 12.04
		2462	3 kHz	- 11.65

RESULT PLOTS


Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2412MHz

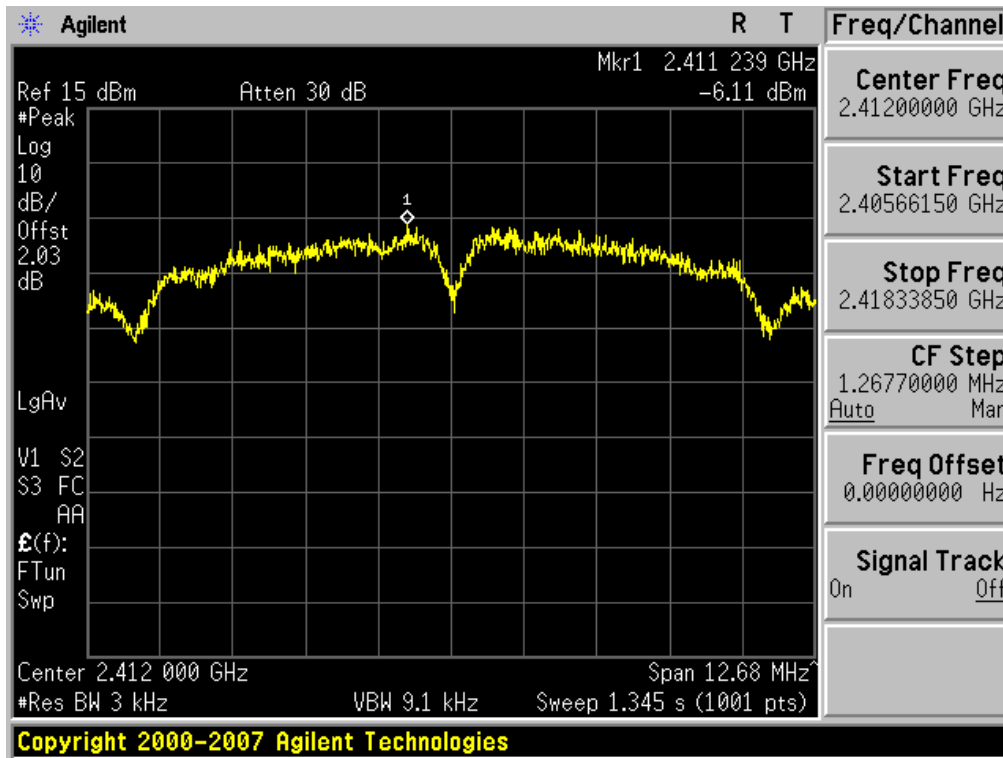


Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2437MHz

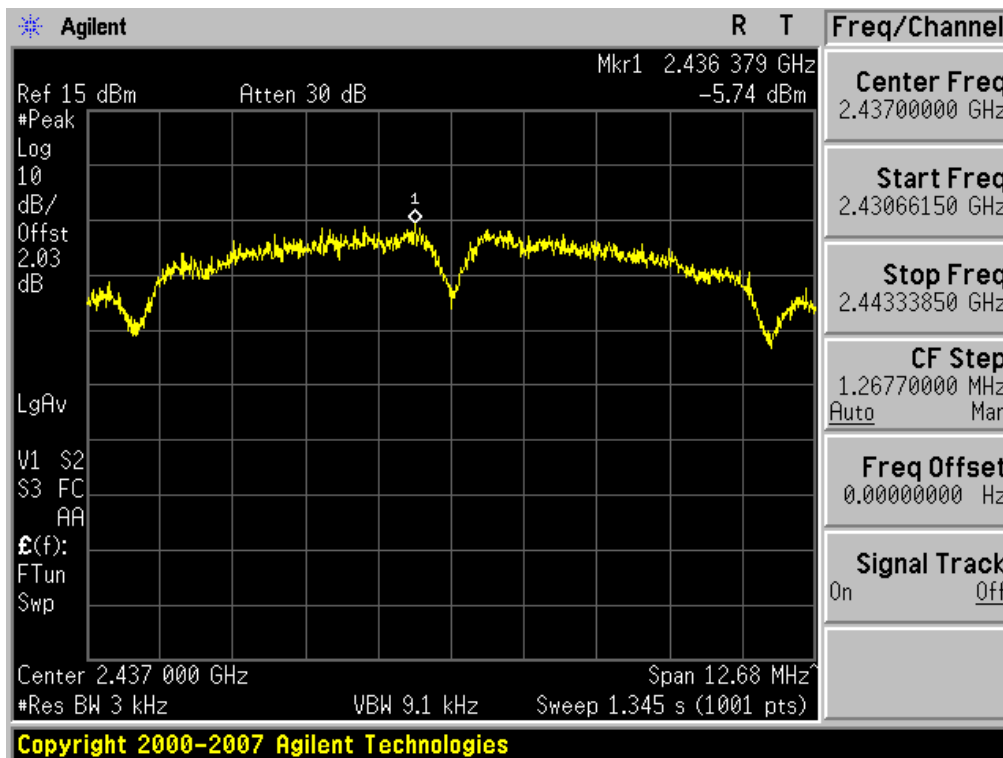


Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2462MHz

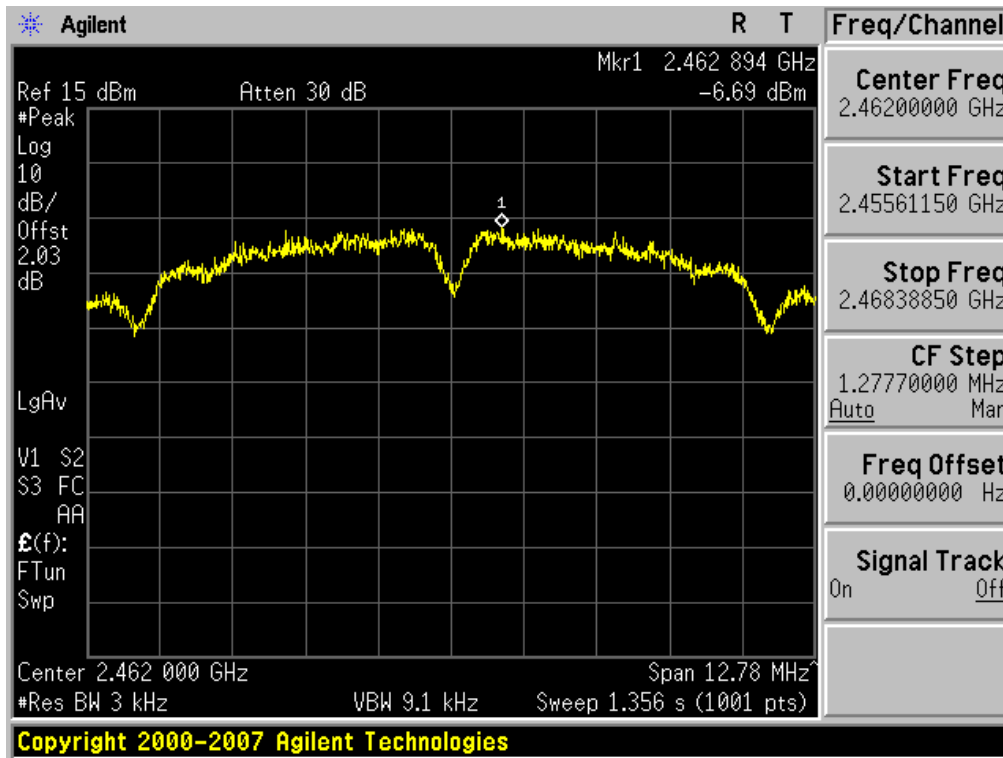


Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2412MHz

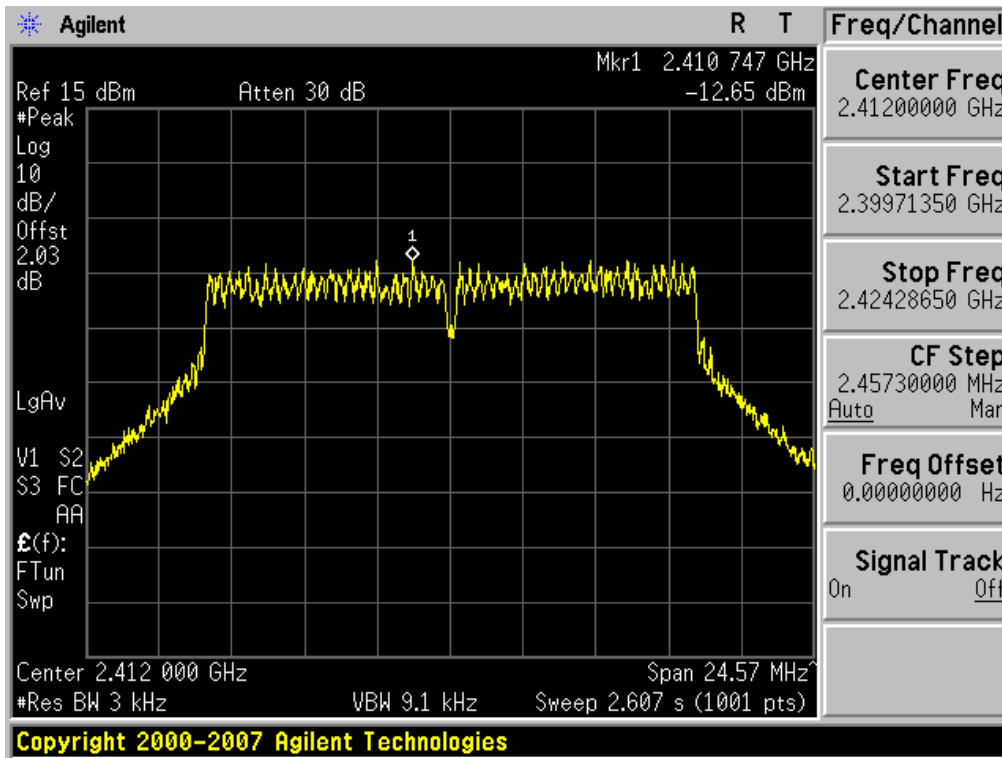


Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2437MHz

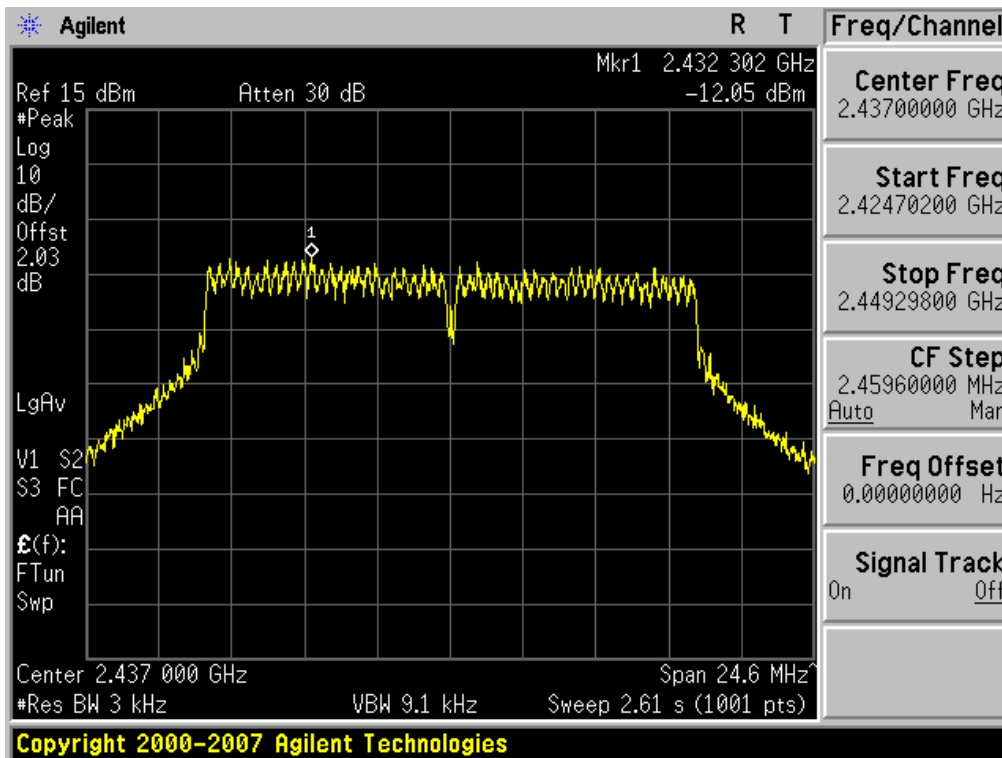


Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2462MHz

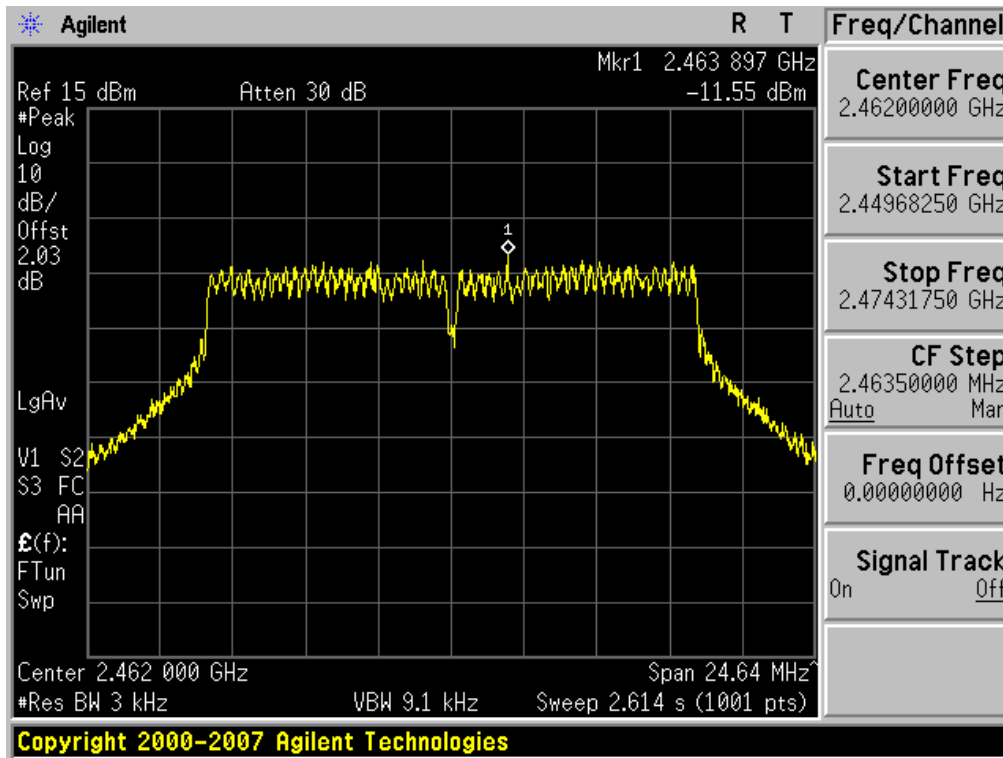


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2412MHz

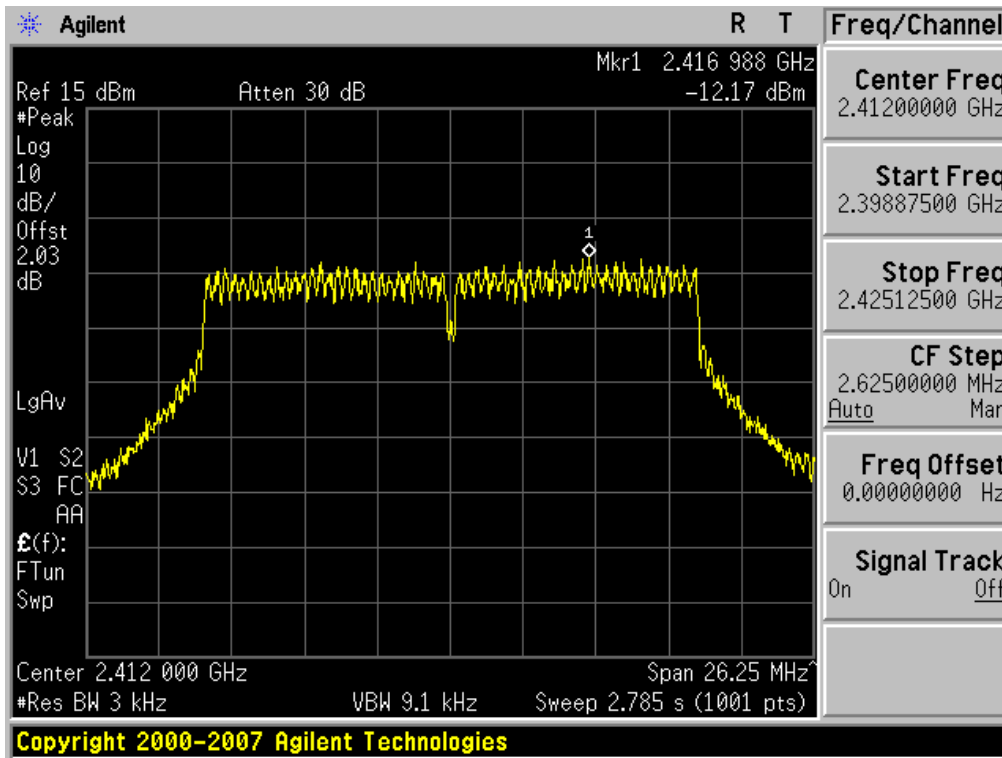


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2437MHz

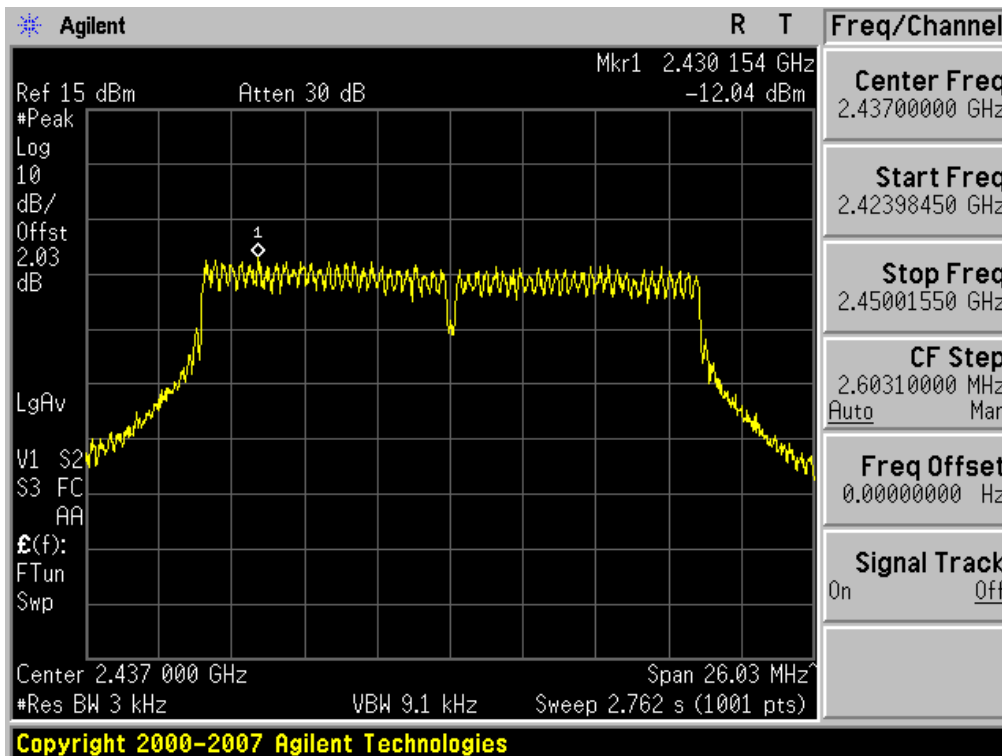

Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2462MHz

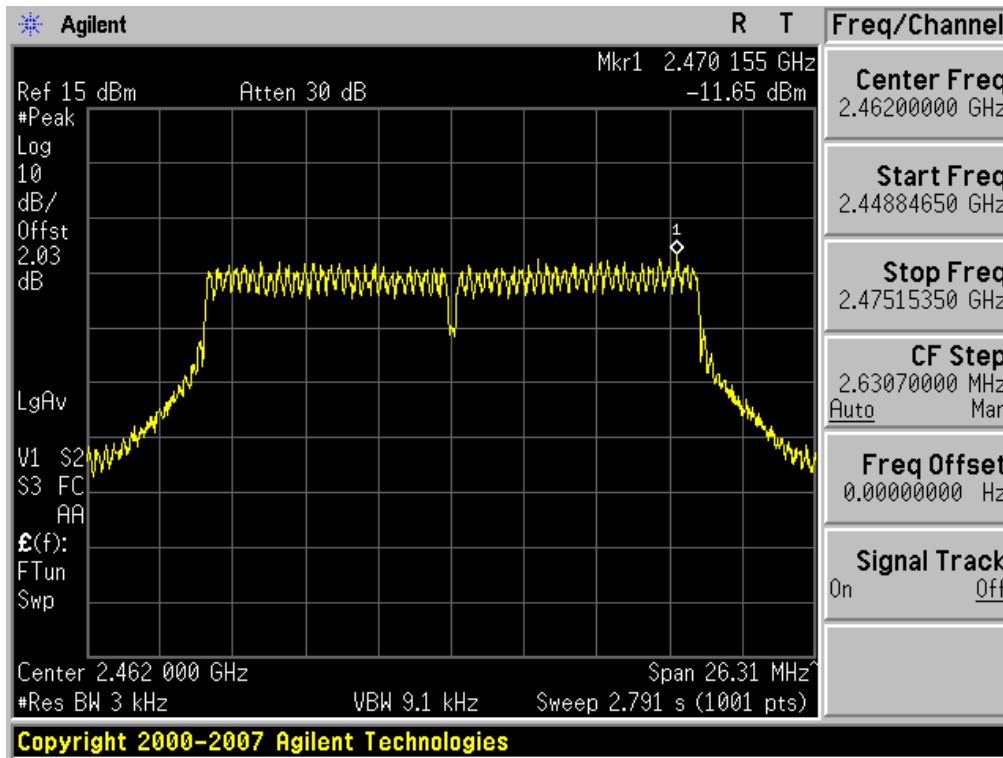

8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions

Test requirements and limit, §15.247(d)

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in band average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

- Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz. (Actual 1 MHz, See below note)**
3. Set the VBW $\geq 3 \times$ RBW. **(Actual 3 MHz, See below note)**
4. Detector = **peak**.
5. Ensure that the number of measurement points \geq span/RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note : The conducted unwanted emission was tested using S/A's spurious measurement function with total 11 measurement sub ranges.

The each of the 11 measurement sub ranges of the S/A's spurious measurement function were set as below.

**RBW= 1 MHz, VBW= 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD,
SPAN = Max 3 GHz for each sub range below 15 GHz and Max 5 GHz for each sub range above 15 GHz ,
BINS = At least 9001 for each sub range below 15 GHz and At least 10001 for each sub range above 15 GHz,
Therefore BINS for each measurement sub range must be greater than 2 x SPAN/RBW.**


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300KHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.


RESULT PLOTS

802.11b & 1Mbps & 2412MHz


Reference

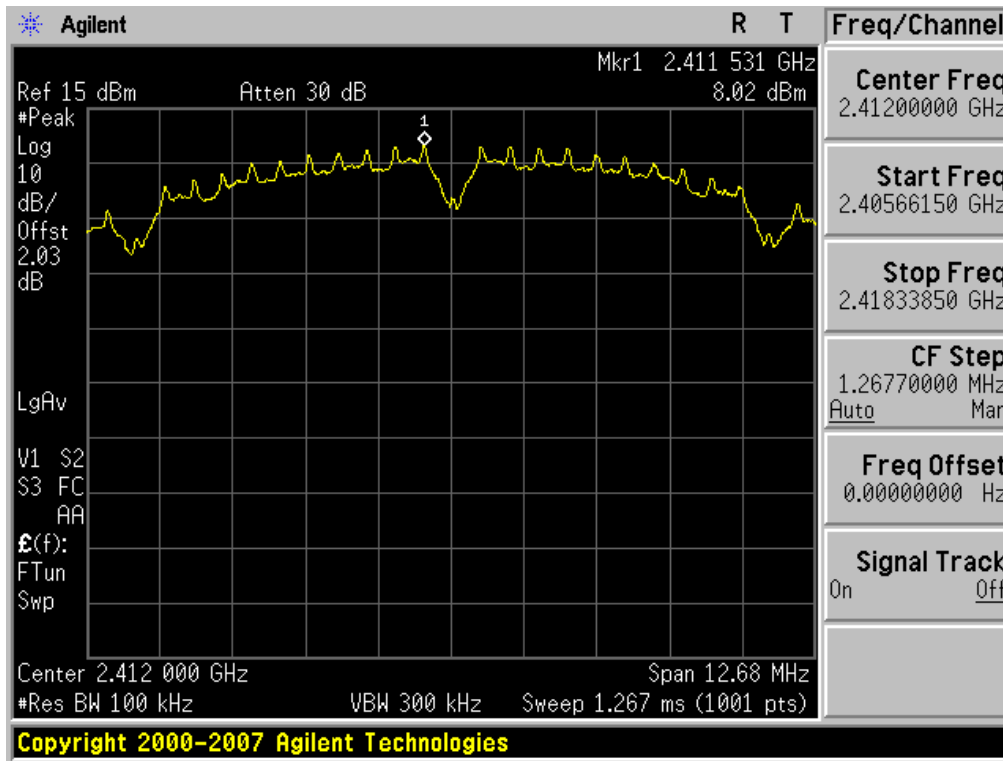

Low Band-edge

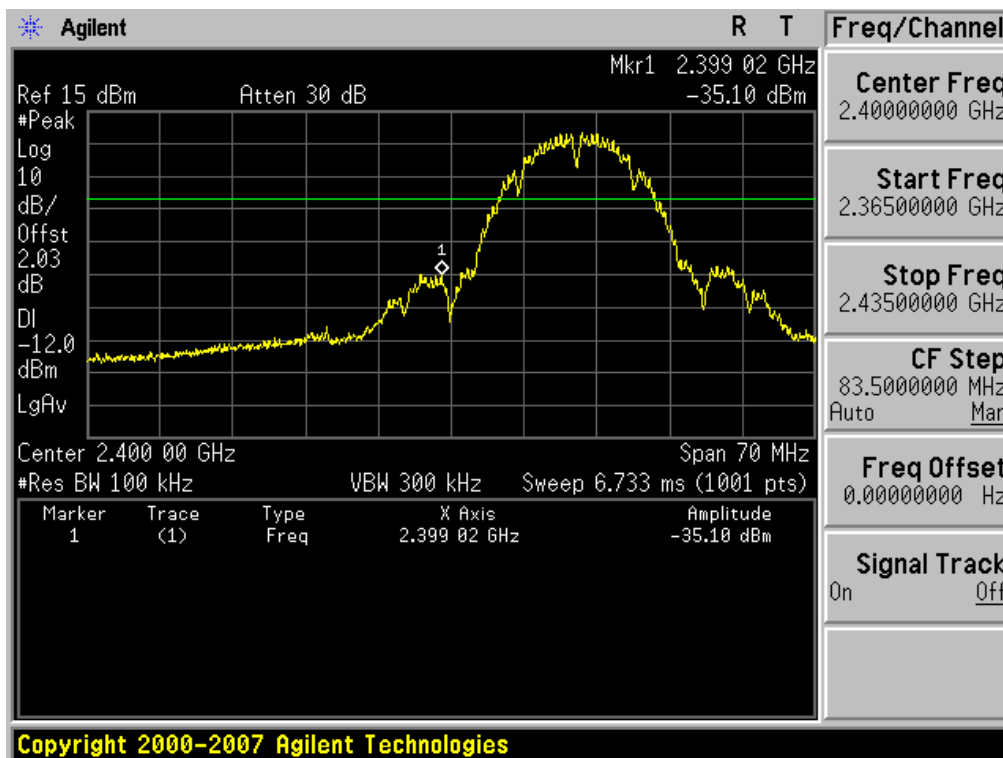


Conducted Spurious Emissions

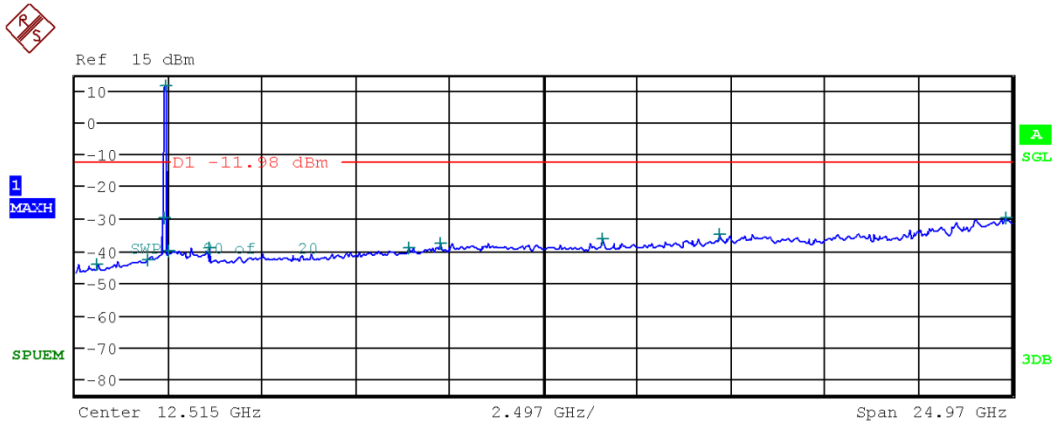


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	610.060000 M	-44.35
1.000 G	2.000 G	1.00 M	1.961333 G	-42.92
2.000 G	2.400 G	1.00 M	2.397360 G	-29.95
2.400 G	2.483 G	1.00 M	2.413226 G	11.27
2.483 G	3.000 G	1.00 M	2.502610 G	-40.15
3.000 G	6.000 G	1.00 M	3.597000 G	-39.17
6.000 G	9.000 G	1.00 M	8.917000 G	-39.13
9.000 G	12.000 G	1.00 M	9.771667 G	-37.69
12.000 G	15.000 G	1.00 M	14.086333 G	-36.43
15.000 G	20.000 G	1.00 M	17.215000 G	-34.84
20.000 G	25.000 G	1.00 M	24.822500 G	-29.87

802.11b & 1Mbps & 2437MHz

Reference

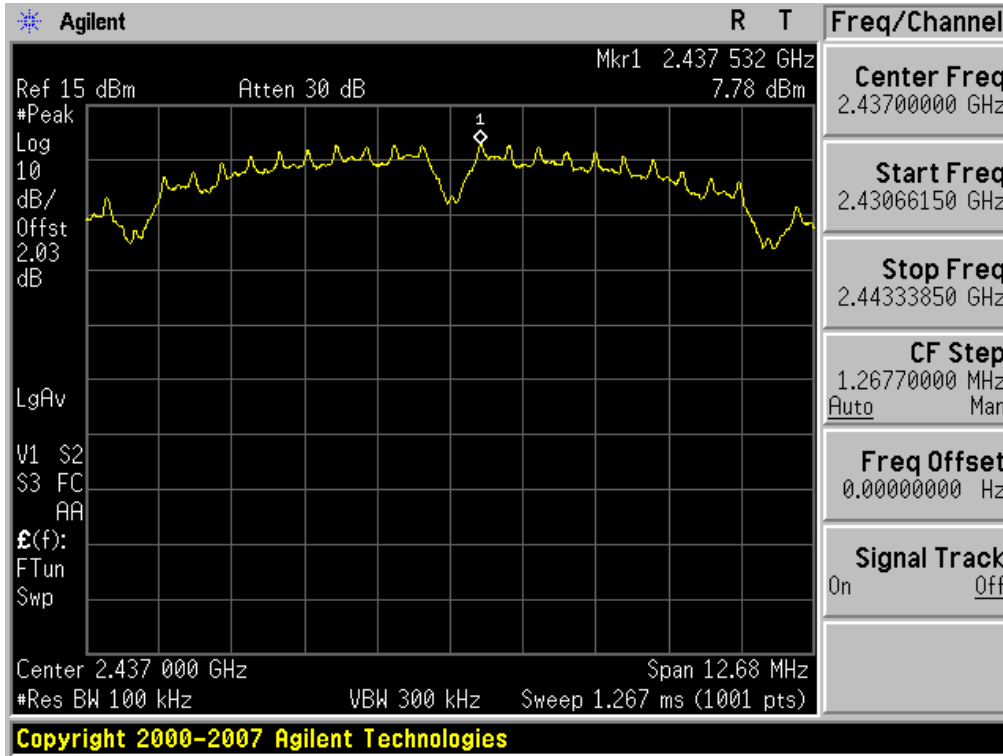


Conducted Spurious Emissions

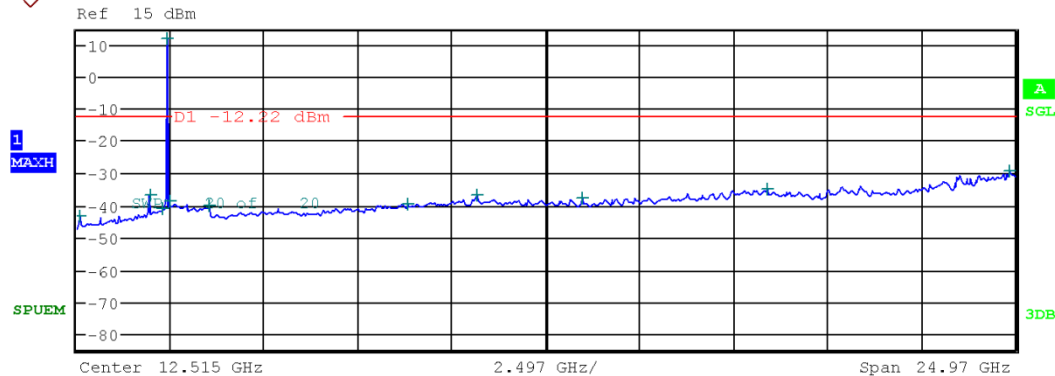


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	122.796667 M	-43.34
1.000 G	2.000 G	1.00 M	1.973333 G	-37.09
2.000 G	2.400 G	1.00 M	2.301800 G	-41.33
2.400 G	2.483 G	1.00 M	2.435604 G	11.80
2.483 G	3.000 G	1.00 M	2.512837 G	-38.79
3.000 G	6.000 G	1.00 M	3.532667 G	-40.24
6.000 G	9.000 G	1.00 M	8.829333 G	-39.65
9.000 G	12.000 G	1.00 M	10.664667 G	-36.98
12.000 G	15.000 G	1.00 M	13.477000 G	-37.86
15.000 G	20.000 G	1.00 M	18.391000 G	-35.15
20.000 G	25.000 G	1.00 M	24.836500 G	-29.58

802.11b & 1Mbps & 2462MHz


Reference

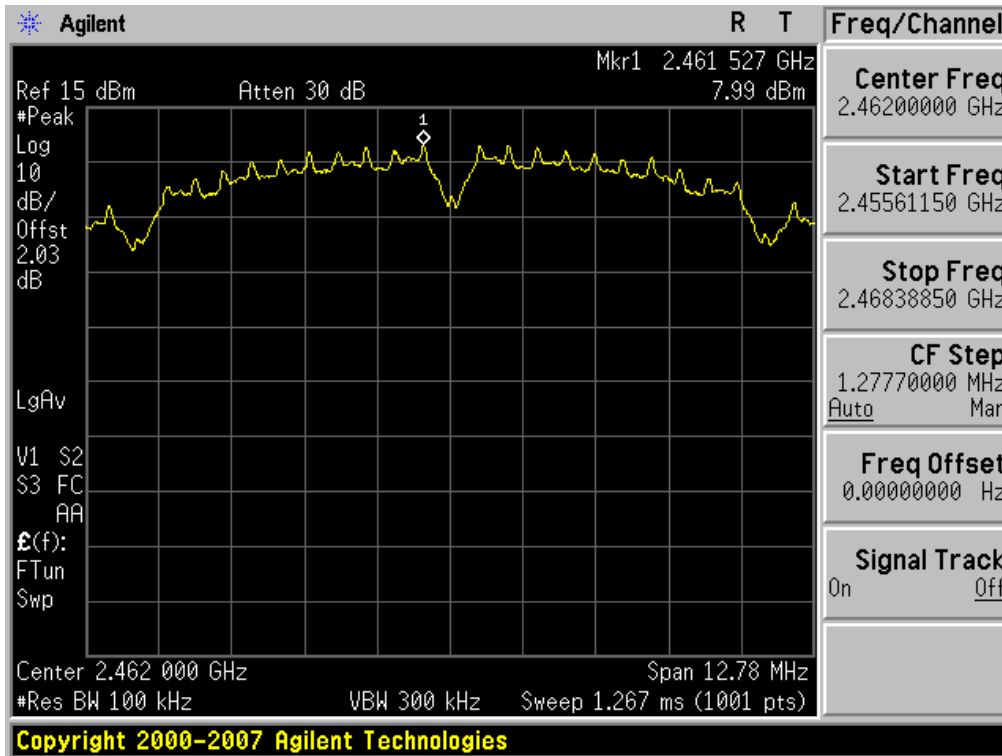

High Band-edge

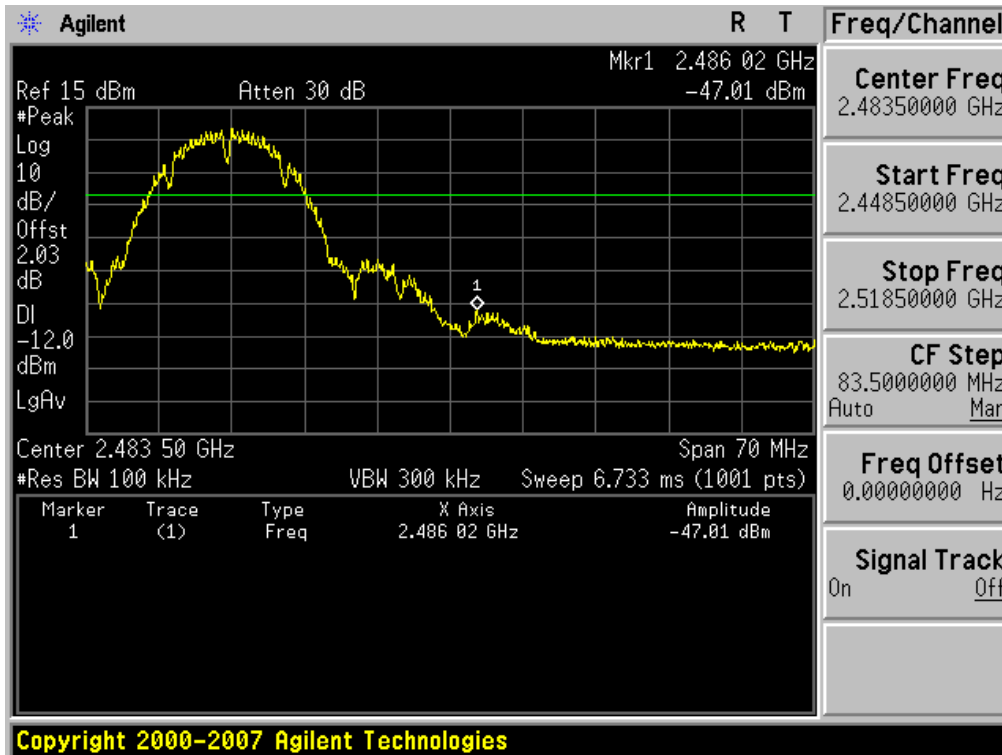

Conducted Spurious Emissions

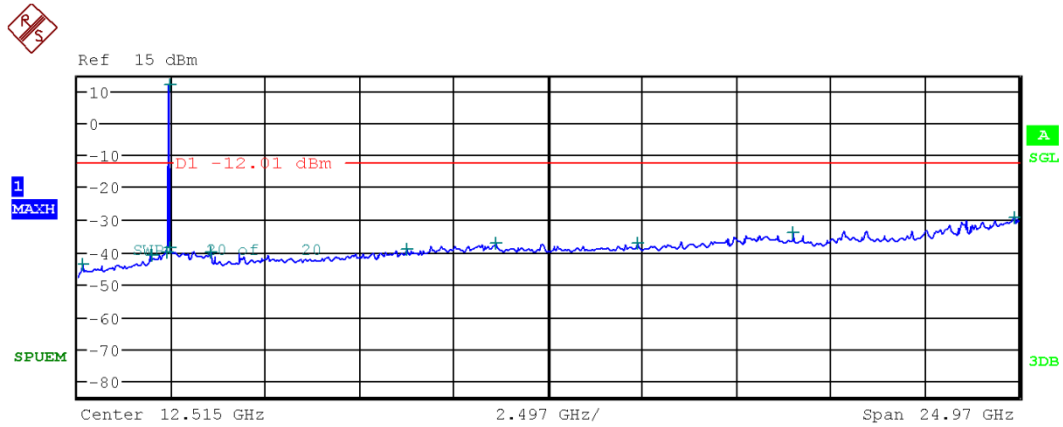


Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	147.693333 M	-43.81
1.000 G	2.000 G	1.00 M	1.973000 G	-40.87
2.000 G	2.400 G	1.00 M	2.398480 G	-40.08
2.400 G	2.483 G	1.00 M	2.463101 G	11.81
2.483 G	3.000 G	1.00 M	2.483913 G	-38.53
3.000 G	6.000 G	1.00 M	3.555333 G	-40.26
6.000 G	9.000 G	1.00 M	8.742667 G	-39.43
9.000 G	12.000 G	1.00 M	11.133667 G	-37.30
12.000 G	15.000 G	1.00 M	14.879000 G	-37.36
15.000 G	20.000 G	1.00 M	18.985000 G	-34.24
20.000 G	25.000 G	1.00 M	24.868000 G	-29.40

802.11g & 6Mbps & 2412MHz


Reference

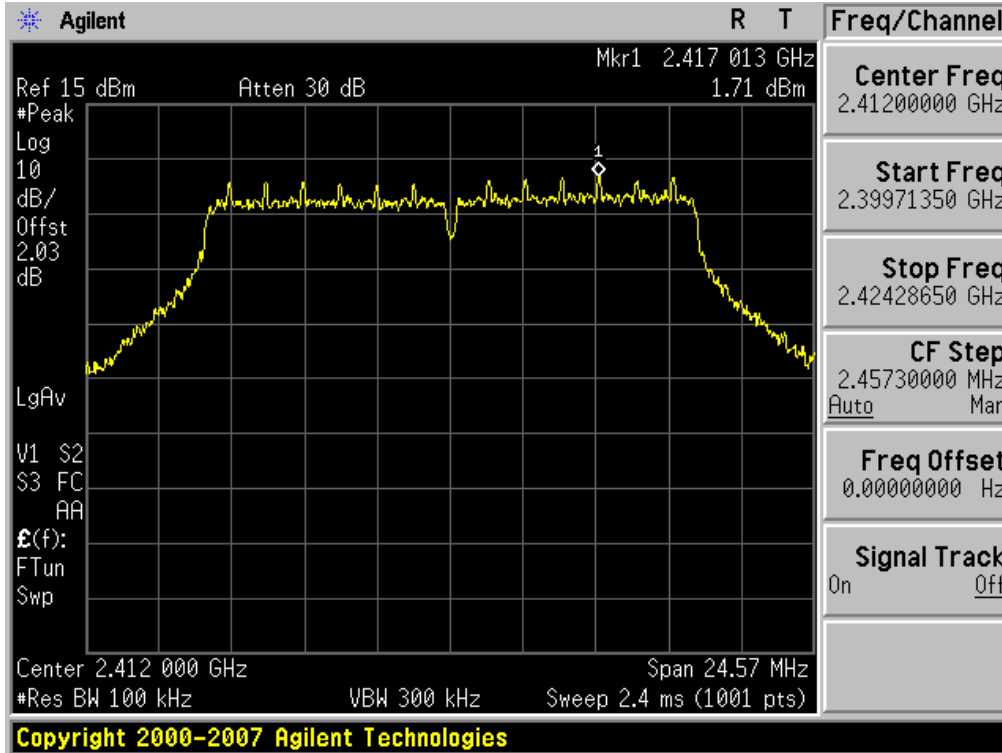

Low Band-edge

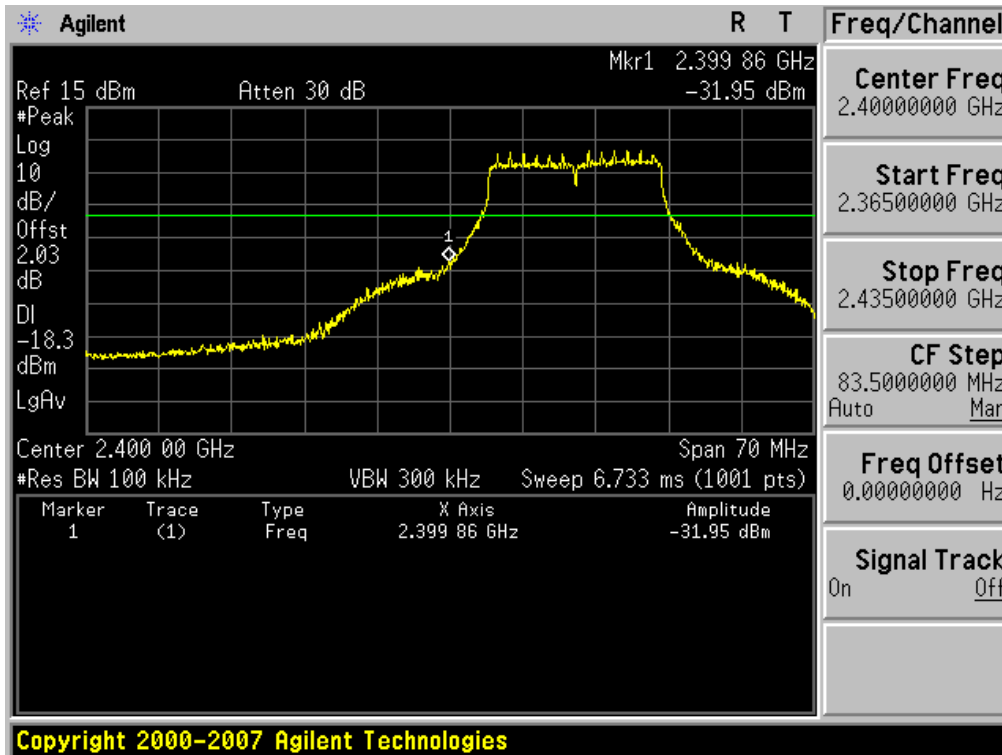

Conducted Spurious Emissions

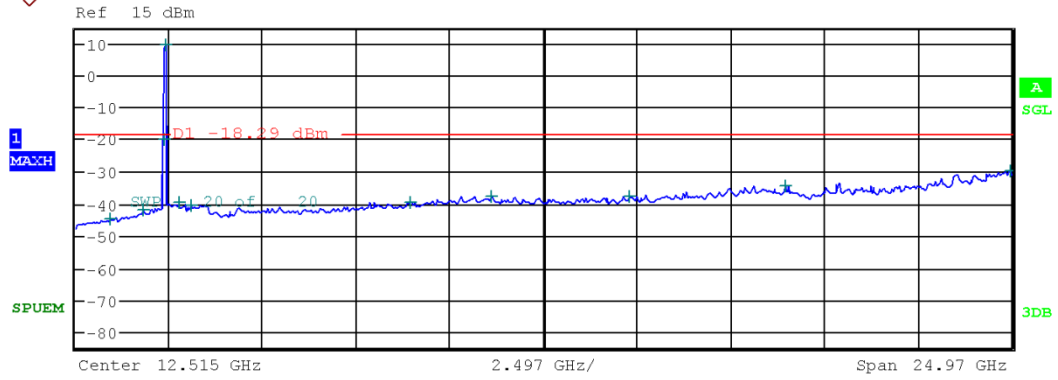


Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	942.446667 M	-44.79
1.000 G	2.000 G	1.00 M	1.839333 G	-42.24
2.000 G	2.400 G	1.00 M	2.399200 G	-19.99
2.400 G	2.483 G	1.00 M	2.416558 G	9.74
2.483 G	3.000 G	1.00 M	2.804866 G	-39.50
3.000 G	6.000 G	1.00 M	3.122000 G	-40.48
6.000 G	9.000 G	1.00 M	8.963000 G	-39.80
9.000 G	12.000 G	1.00 M	11.127667 G	-37.59
12.000 G	15.000 G	1.00 M	14.787000 G	-38.00
15.000 G	20.000 G	1.00 M	18.962000 G	-34.34
20.000 G	25.000 G	1.00 M	24.949000 G	-29.79

802.11g & 6Mbps & 2437MHz

Reference

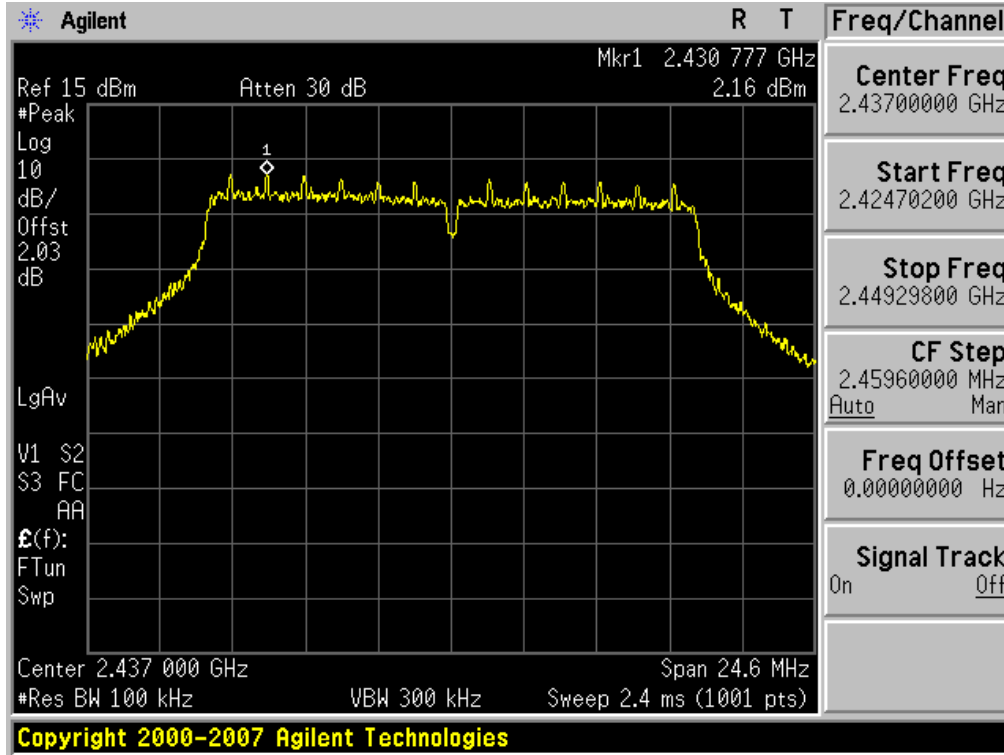


Conducted Spurious Emissions

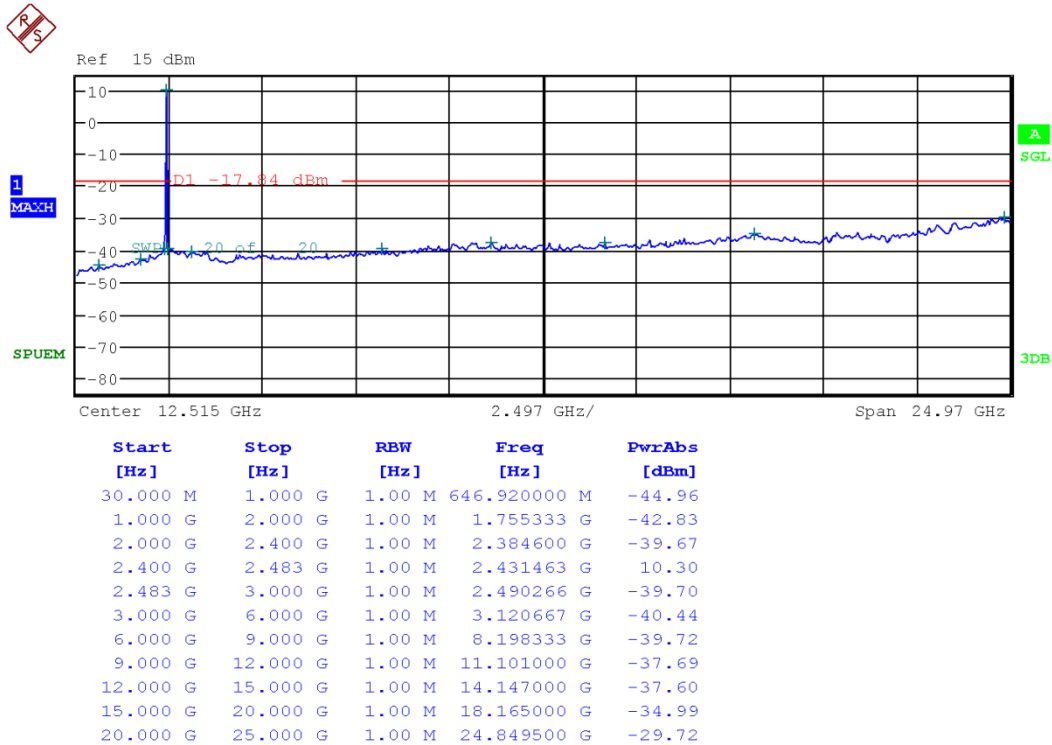


802.11g & 6Mbps & 2462MHz


Reference

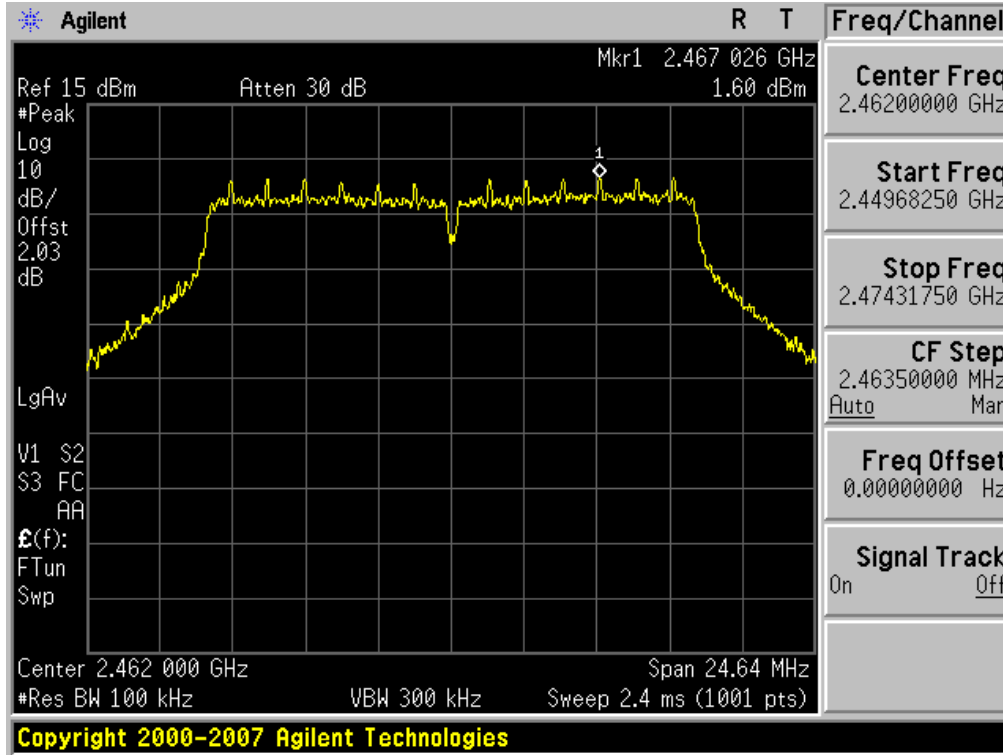

High Band-edge

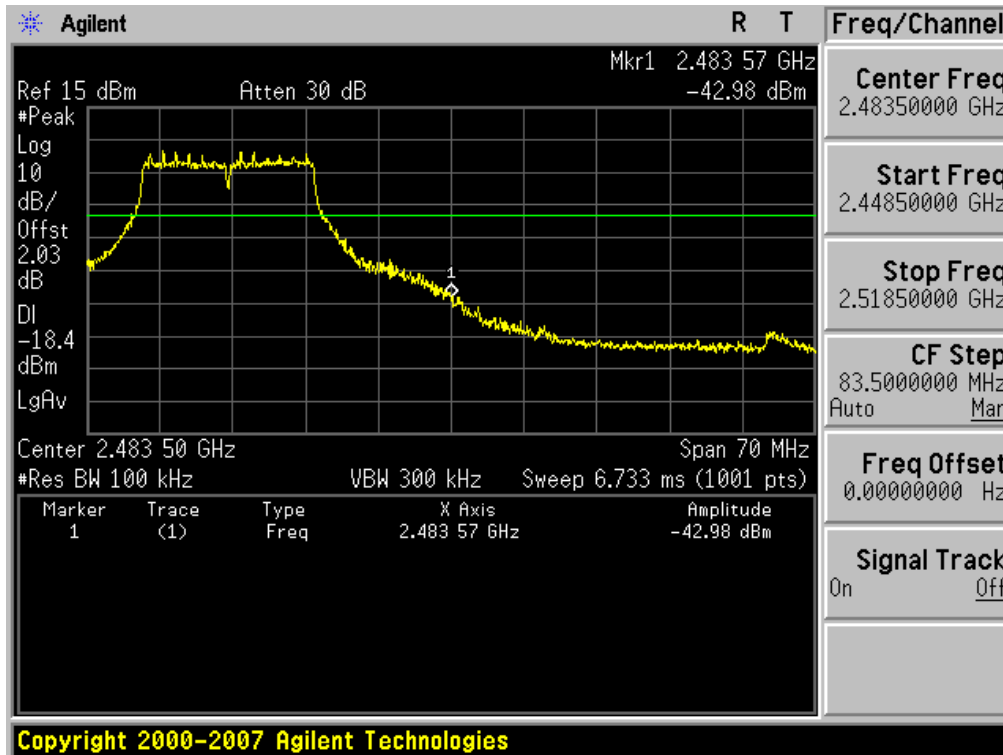


Conducted Spurious Emissions

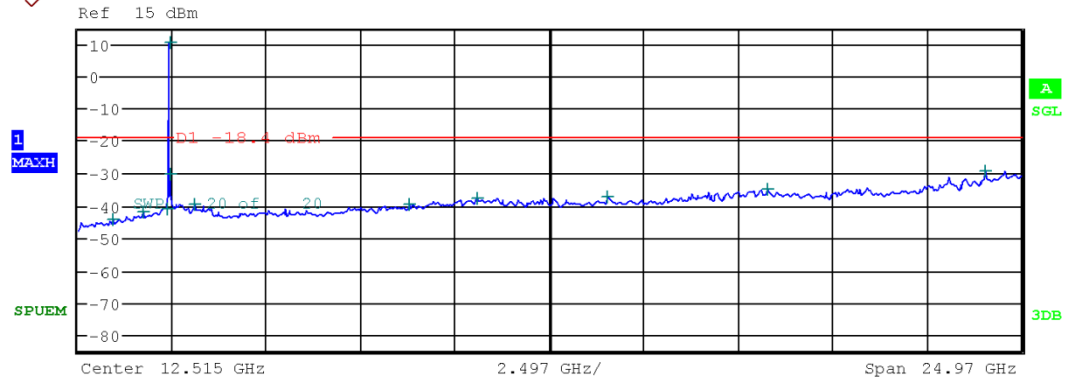


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	940.830000 M	-44.47
1.000 G	2.000 G	1.00 M	1.769667 G	-42.09
2.000 G	2.400 G	1.00 M	2.393600 G	-41.18
2.400 G	2.483 G	1.00 M	2.468027 G	10.56
2.483 G	3.000 G	1.00 M	2.483965 G	-30.40
3.000 G	6.000 G	1.00 M	3.118000 G	-39.92
6.000 G	9.000 G	1.00 M	8.799000 G	-39.59
9.000 G	12.000 G	1.00 M	10.588333 G	-37.61
12.000 G	15.000 G	1.00 M	14.032333 G	-37.33
15.000 G	20.000 G	1.00 M	18.288500 G	-35.11
20.000 G	25.000 G	1.00 M	24.043000 G	-29.13

802.11n(HT20) & MCS0 & 2412MHz


Reference

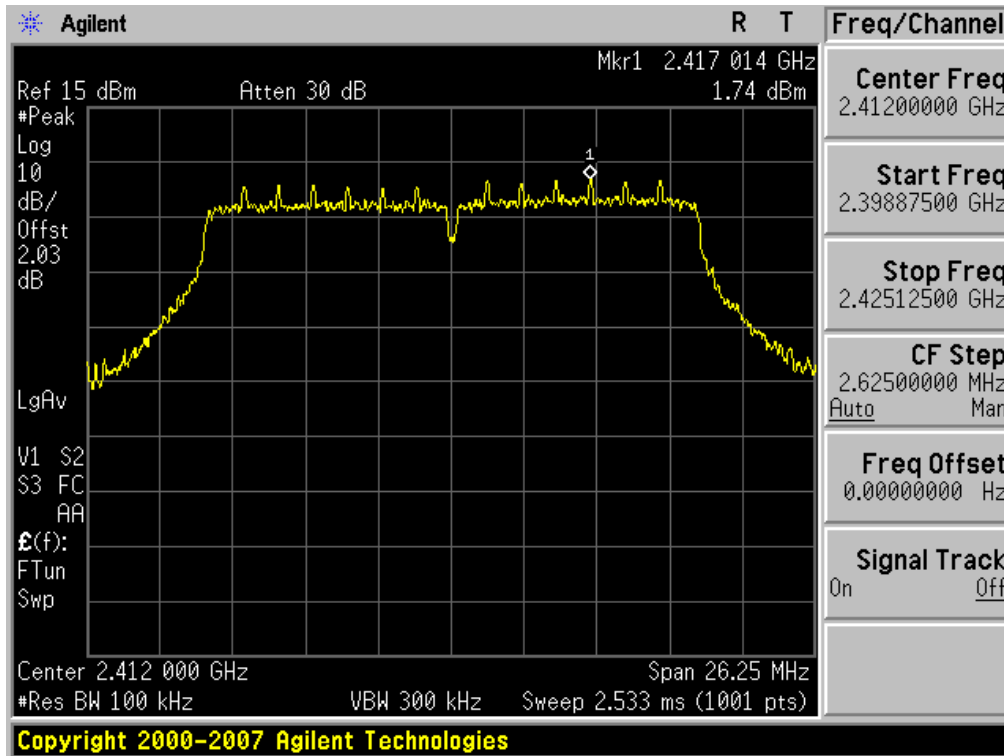

Low Band-edge

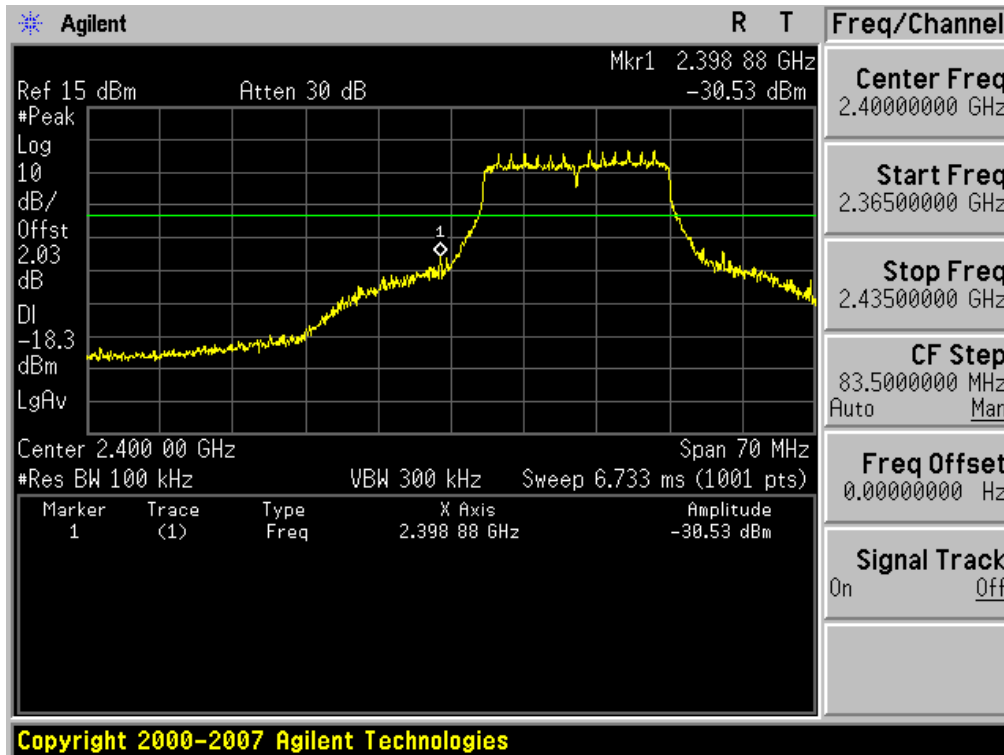


Conducted Spurious Emissions

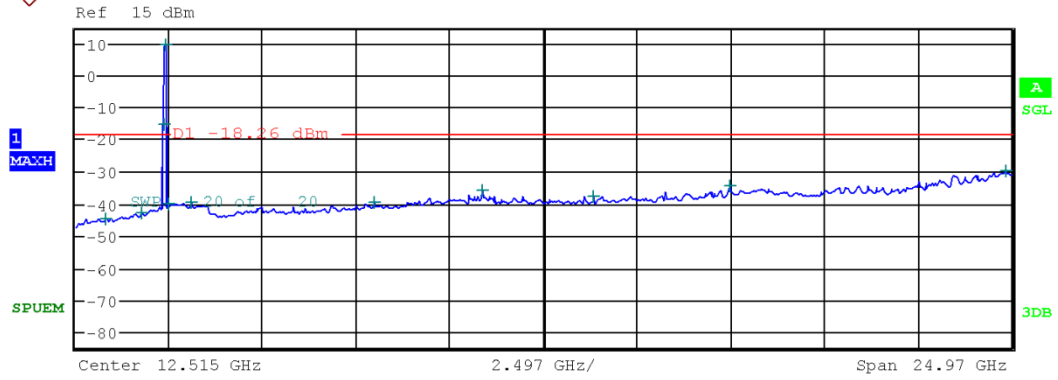


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	836.070000 M	-44.75
1.000 G	2.000 G	1.00 M	1.778000 G	-42.87
2.000 G	2.400 G	1.00 M	2.400000 G	-15.25
2.400 G	2.483 G	1.00 M	2.417151 G	9.76
2.483 G	3.000 G	1.00 M	2.501577 G	-39.93
3.000 G	6.000 G	1.00 M	3.118000 G	-39.86
6.000 G	9.000 G	1.00 M	7.976000 G	-39.48
9.000 G	12.000 G	1.00 M	10.883000 G	-36.12
12.000 G	15.000 G	1.00 M	13.827333 G	-37.66
15.000 G	20.000 G	1.00 M	17.461000 G	-34.48
20.000 G	25.000 G	1.00 M	24.850500 G	-29.89

802.11n(HT20) & MCS0 & 2437MHz

Reference

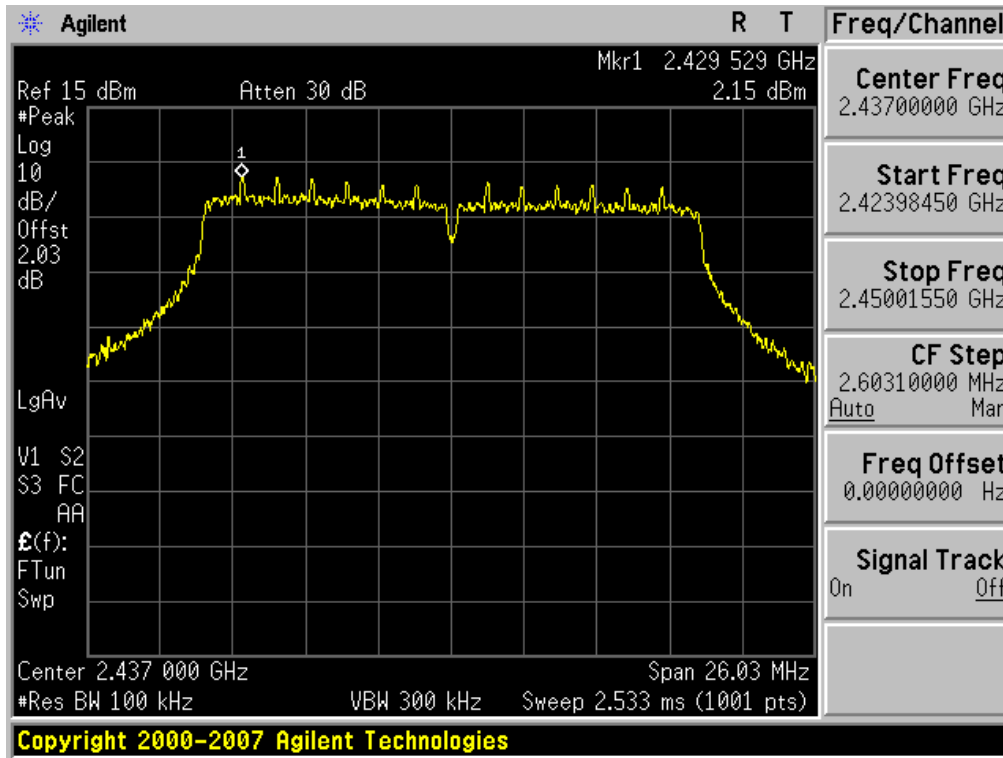


Conducted Spurious Emissions

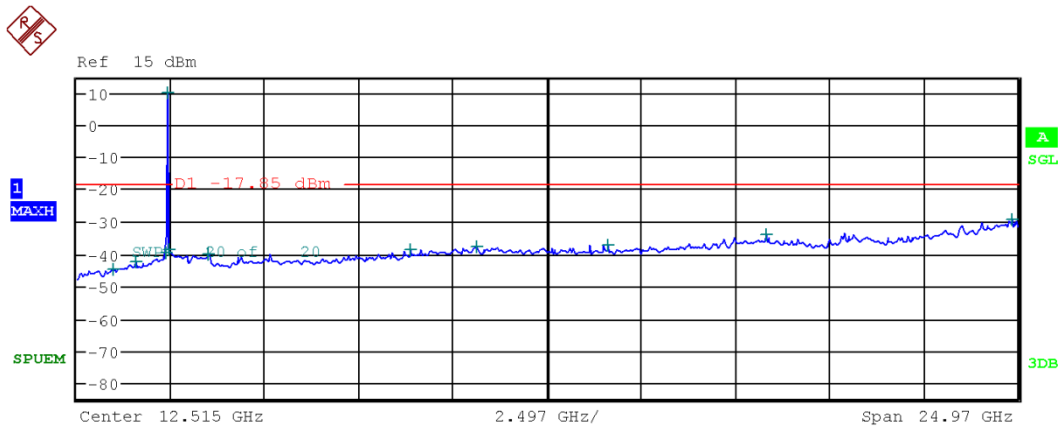


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	984.803333 M	-44.65
1.000 G	2.000 G	1.00 M	1.606000 G	-42.66
2.000 G	2.400 G	1.00 M	2.400000 G	-39.83
2.400 G	2.483 G	1.00 M	2.430210 G	9.86
2.483 G	3.000 G	1.00 M	2.488923 G	-38.81
3.000 G	6.000 G	1.00 M	3.492667 G	-40.05
6.000 G	9.000 G	1.00 M	8.888667 G	-38.82
9.000 G	12.000 G	1.00 M	10.624000 G	-37.82
12.000 G	15.000 G	1.00 M	14.105333 G	-37.23
15.000 G	20.000 G	1.00 M	18.328500 G	-34.13
20.000 G	25.000 G	1.00 M	24.842000 G	-29.39

802.11n(HT20) & MCS0 & 2462MHz

Reference

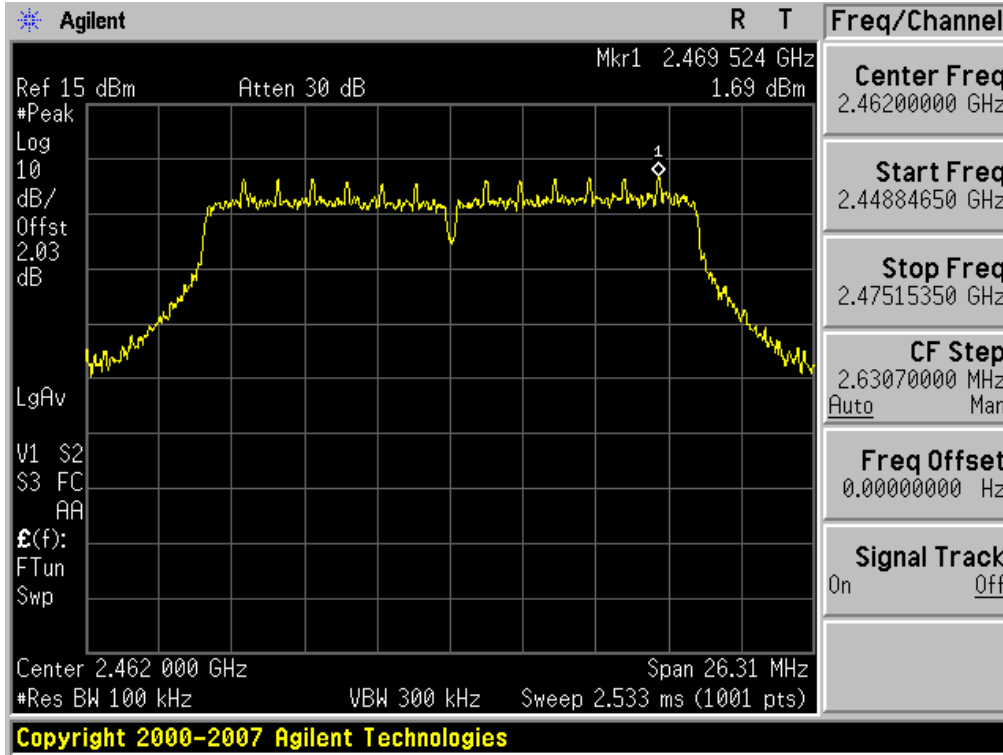

High Band-edge

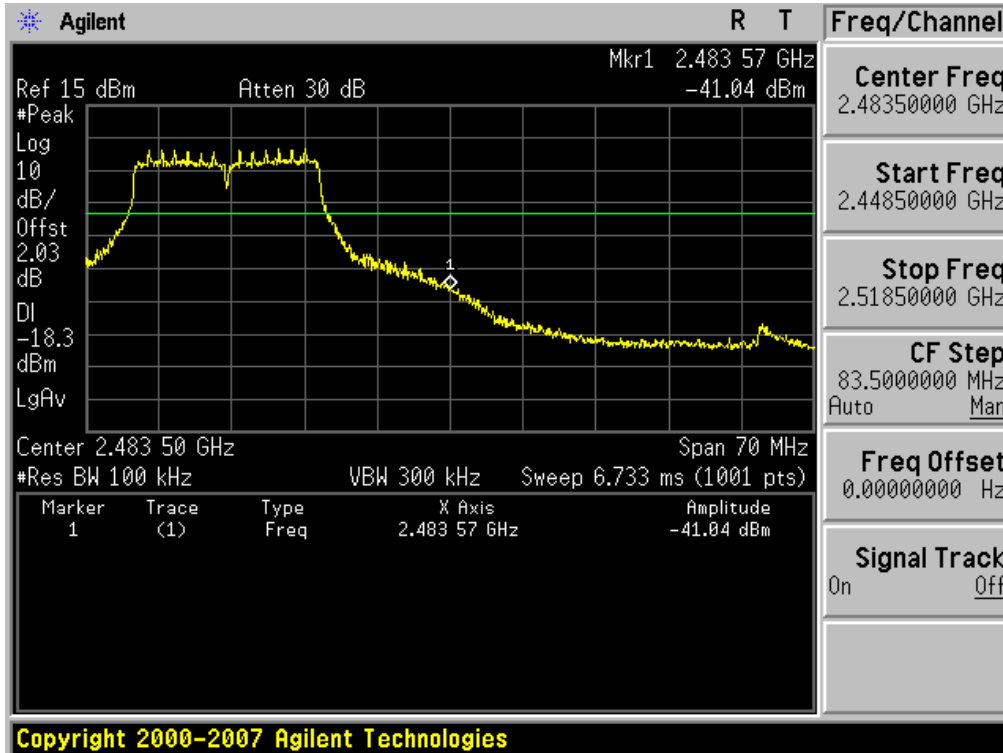

8.5 Radiated Spurious Emissions

Test Requirements and limit, §15.247(d), §15.205, §15.209 & RSS-210 [A8.5], RSS-Gen [7.2.2]

In any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

▪ **FCC Part 15.209(a) and (b)**

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ **FCC Part 15.205 (a):** Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

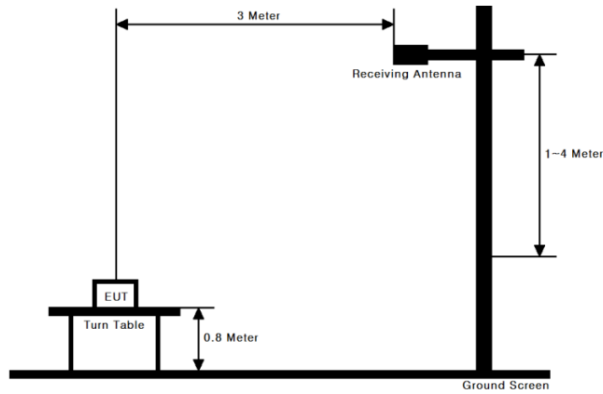

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Measurement Instrument Setting for Radiated Emission Measurements.

Peak Measurement : 12.2.4 of KDB 558074 v03r1

RBW = As specified in below table , VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Average Measurement : 12.2.5 of KDB 558074 v03r1

1. RBW = 1 MHz (unless otherwise specified).
2. VBW ≥ 3 x RBW.
3. Detector = RMS (Number of points ≥ 2 x Span / RBW)
4. Averaging type = power (i.e., RMS).
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Band	Duty Cycle (%)	T _{on} (ms)	T _{on} + T _{off} (ms)	DCF = 10log(1/Duty) (dB)
802.11b	99.13	1.023	1.032	-
802.11g	99.34	1.362	1.371	-
2.4GHz 802.11n(HT20)	99.30	1.275	1.284	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Note. Not required duty cycle correction factor. (Duty cycle of greater than or equal to 98%.)

9KHz ~ 25GHz Data(802.11b & 1Mbps)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2387.92	V	Z	PK	53.95	- 3.38	-	-	50.57	74.00	23.43
2387.88	V	Z	AV	45.35	- 3.38	-	-	41.97	54.00	12.03
4823.90	H	Z	PK	43.87	5.43	-	-	49.30	74.00	24.70
4824.10	H	Z	AV	36.66	5.43	-	-	42.09	54.00	11.91
-	-	-	-	-	-	-	-	-	-	-

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.04	H	Z	PK	43.41	5.64	-	-	49.05	74.00	24.95
4874.10	H	Z	AV	35.29	5.64	-	-	40.93	54.00	13.07
-	-	-	-	-	-	-	-	-	-	-

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2485.74	V	Z	PK	52.93	- 2.79	-	-	50.14	74.00	23.86
2485.82	V	Z	AV	43.97	- 2.79	-	-	41.18	54.00	12.82
4923.90	H	Z	PK	44.68	5.99	-	-	50.67	74.00	23.33
4924.11	H	Z	AV	38.09	5.99	-	-	44.08	54.00	9.92
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F} + \text{DCF} + \text{Distance Factor}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11g & 6Mbps)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.76	V	Z	PK	71.13	- 3.38	-	-	67.75	74.00	6.25
2390.00	V	Z	AV	53.97	- 3.38	-	-	50.59	54.00	3.41
4820.65	H	X	PK	40.60	5.43	-	-	46.03	74.00	27.97
4822.60	H	X	AV	30.18	5.43	-	-	35.61	54.00	18.39
-	-	-	-	-	-	-	-	-	-	-

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.05	H	X	PK	40.08	5.64	-	-	45.72	74.00	28.28
4873.30	H	X	AV	29.84	5.64	-	-	35.48	54.00	18.52
-	-	-	-	-	-	-	-	-	-	-

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.54	V	Z	PK	73.44	- 2.79	-	-	70.65	74.00	3.35
2483.50	V	Z	AV	54.92	- 2.79	-	-	52.13	54.00	1.87
4924.00	H	X	PK	40.39	5.99	-	-	46.38	74.00	27.62
4923.20	H	X	AV	30.12	5.99	-	-	36.11	54.00	17.89
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCF + Distance Factor / T.F = AF + CL – AG
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11n HT20 & MCS0)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.90	V	Z	PK	71.76	- 3.38	-	-	68.38	74.00	5.62
2389.96	V	Z	AV	53.69	- 3.38	-	-	50.31	54.00	3.69
4827.75	H	X	PK	40.26	5.43	-	-	45.69	74.00	28.31
4825.25	H	X	AV	29.94	5.43	-	-	35.37	54.00	18.63
-	-	-	-	-	-	-	-	-	-	-

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4872.95	H	X	PK	39.54	5.64	-	-	45.18	74.00	28.82
4872.20	H	X	AV	29.75	5.64	-	-	35.39	54.00	18.61
-	-	-	-	-	-	-	-	-	-	-

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.56	V	Z	PK	74.49	- 2.79	-	-	71.70	74.00	2.30
2483.52	V	Z	AV	55.65	- 2.79	-	-	52.86	54.00	1.14
4925.20	H	X	PK	39.78	5.99	-	-	45.77	74.00	28.23
4925.57	H	X	AV	30.01	5.99	-	-	36.00	54.00	18.00
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCF + Distance Factor / T.F = AF + CL – AG
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCF = Duty Cycle Correction Factor.

8.6 Power-line Conducted Emissions

Test Requirements and limit, §15.207& RSS-Gen [7.2.2]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs for the actual connections between EUT and support equipment.

Test Mode

The all modes of EUT operation were investigated and the worst case mode was reported.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ **RESULT PLOTS**

AC Line Conducted Emissions (Graph)

Test Mode: 802.11b (2.4GHz Band)



Results of Conducted Emission



Digital EMC
 Date : 2013-09-21

Model No. : KYL22
 Type :
 Serial No. : Identical prototype
 Test Condition : WLAN

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi. : 24 °C 52 % R.H.
 Operator : J.J.LEE

Memo : 2.4GHz / 802.11b

LIMIT : FCC P15.207 QP
 FCC P15.207 AV

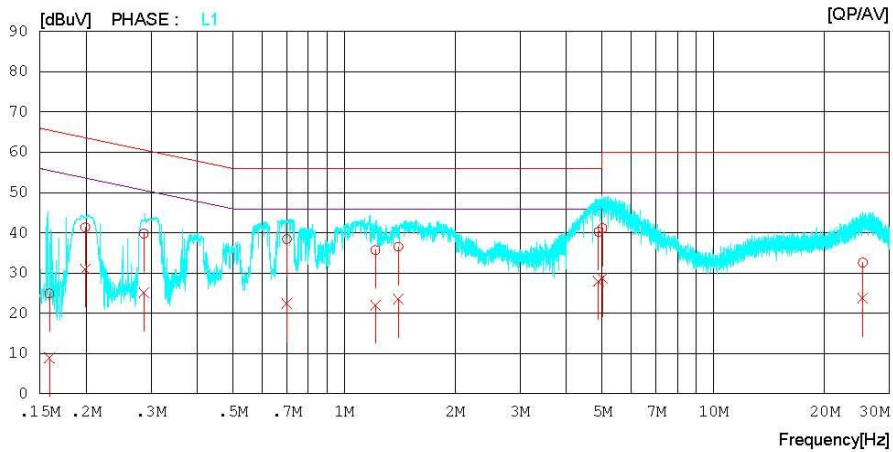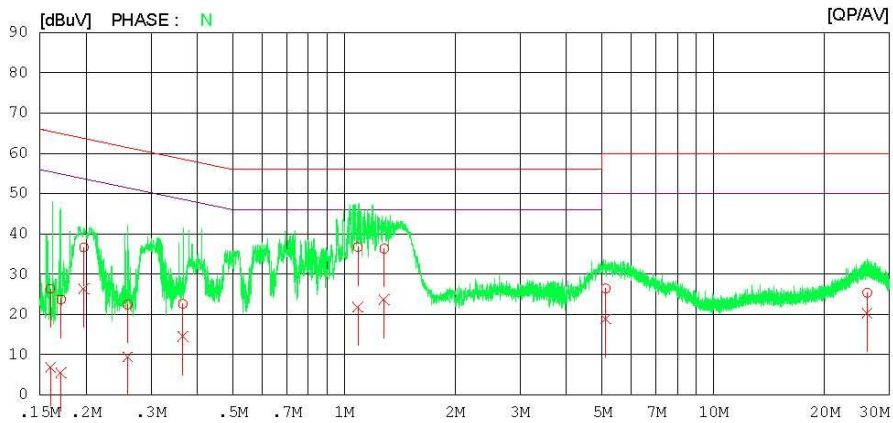

AC Line Conducted Emissions (List)
Test Mode: 802.11b (2.4GHz Band)

Results of Conducted Emission

Digital EMC
Date : 2013-09-21

Model No. :	KYL22	Reference No. :	
Type :		Power Supply :	120 V 60 Hz
Serial No. :	Identical prototype	Temp/Humi. :	24 °C 52 % R.H.
Test Condition :	WLAN	Operator :	J.J.LEE

Memo : 2.4GHz / 802.11b

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]			
1	0.16032	26.2	6.7	0.1	26.3	6.8	65.4	55.4	39.1	48.6	N
2	0.17116	23.6	5.4	0.1	23.7	5.5	64.9	54.9	41.2	49.4	N
3	0.19747	36.5	26.3	0.1	36.6	26.4	63.7	53.7	27.1	27.3	N
4	0.25941	22.4	9.3	0.1	22.5	9.4	61.5	51.5	39.0	42.1	N
5	0.36601	22.5	14.4	0.1	22.6	14.5	58.6	48.6	36.0	34.1	N
6	1.08960	36.5	21.6	0.2	36.7	21.8	56.0	46.0	19.3	24.2	N
7	1.28440	36.1	23.5	0.2	36.3	23.7	56.0	46.0	19.7	22.3	N
8	5.11500	25.9	18.3	0.5	26.4	18.8	60.0	50.0	33.6	31.2	N
9	26.11400	24.7	19.5	0.7	25.4	20.2	60.0	50.0	34.6	29.8	N
10	0.15921	24.9	8.9	0.1	25.0	9.0	65.5	55.5	40.5	46.5	L1
11	0.19919	41.2	30.9	0.1	41.3	31.0	63.6	53.6	22.3	22.6	L1
12	0.28714	39.7	25.0	0.1	39.8	25.1	60.6	50.6	20.8	25.5	L1
13	0.70036	38.3	22.2	0.2	38.5	22.4	56.0	46.0	17.5	23.6	L1
14	1.21620	35.5	21.8	0.2	35.7	22.0	56.0	46.0	20.3	24.0	L1
15	1.40360	36.3	23.3	0.2	36.5	23.5	56.0	46.0	19.5	22.5	L1
16	4.88800	39.8	27.5	0.5	40.3	28.0	56.0	46.0	15.7	18.0	L1
17	5.01040	40.6	28.3	0.5	41.1	28.8	60.0	50.0	18.9	21.2	L1
18	25.39220	31.9	23.1	0.7	32.6	23.8	60.0	50.0	27.4	26.2	L1

8.7 Occupied Bandwidth

Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.


■ TEST RESULTS: **N/A**

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	E4440A	12/10/22	13/10/22	US45303051
Spectrum Analyzer	Rohde Schwarz	FSQ26	13/02/14	14/02/14	200445
Spectrum Analyzer	Agilent	N9020A	13/09/16	14/09/16	MY50410163
Power Sensor	Rohde Schwarz	NRP-Z81	13/05/27	14/05/27	1137.9009.02-101001- EA
Virtual Power Meter(S/W)	Rohde Schwarz	R&S Power Viewer Plus	-	-	V 4.1.0
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A / MA2490A	13/03/06	14/03/06	1306007 / 1249001
DC Power Supply	HP	6622A	13/02/27	14/02/27	3448A03760
Multimeter	HP	34401A	13/02/27	14/02/27	3146A13475
Vector Signal Generator	Rohde Schwarz	SMJ100A	13/01/08	14/01/08	100148
Signal Generator	Rohde Schwarz	SMF100A	13/07/22	14/07/22	102341
Thermohygrometer	BODYCOM	BJ5478	13/06/01	14/06/01	120612-2
High-pass filter	Wainwright	WHKX3.0	13/01/08	14/01/08	12
Loop Antenna	Schwarzbeck	FMZB1513	12/09/24	14/09/24	1513-128
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Horn Antenna	ETS	3115	13/02/28	15/02/28	00021097
Horn Antenna	A.H.Systems Inc.	SAS-574	13/03/20	15/03/20	154
Attenuator (3dB)	WEINSCHL	56-3	13/09/12	14/09/12	Y2342
Amplifier (22dB)	HP	8447E	13/01/08	14/01/08	2945A02865
Amplifier (30dB)	Agilent	8449B	13/02/27	14/02/27	3008A00370
EMI TEST RECEIVER	R&S	ESU	13/01/08	14/01/08	100014
EMI TEST RECEIVER	R&S	ESCI	13/02/27	14/02/27	100364
CVCF	NF	4420	13/09/12	14/09/12	3049354420023
LISN	R&S	ESH2-Z5	13/09/12	14/09/12	828739/006

APPENDIX I Conducted Test set up Diagram & Path loss Information

Conducted Measurement(30MHz ~ 25GHz)

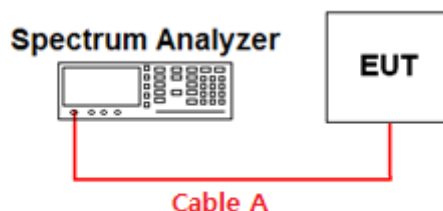

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.42	15	5.58
1	1.36	20	6.63
2412 & 2437 & 2462	2.03	25	7.40
5	2.87	-	-
10	4.20	-	-

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (=S/A's offset value) = Cable A

Note. 2: For conducted spurious emissions, the path loss values were saved as the transducer factor on the spurious measurement function of the spectrum analyzer and the transducer factor of tested frequency is calculated and corrected automatically by the spectrum analyzer's measurement function.