



Zacta

TEST REPORT

Report number : Z101C-14032

Issue date : April 23, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part27 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KYY23
FCC ID	: JOYKYY23

Date of test : March 13, April 2, 10, 14, 18, 21, 2014
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome
 Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888
 Test results : Complied

The results in this report are applicable only to the equipment tested.
 This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
 This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Chiaki Kanno N. Toda
 Chiaki Kanno Nobuyuki Toda

Tested by : Taiki Watanabe
 Taiki Watanabe

Authorized by : Eiji Akiba
 Eiji Akiba
 Deputy General Manager of EMC Technical Department

Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Description of Test mode	6
3. Configuration of equipment	7
3.1 Equipment(s) used	7
3.2 System configuration	7
4. Conducted Output Power	8
4.1 Measurement procedure	8
4.2 Measurement result	8
5. Effective Radiated Power	10
5.1 Measurement procedure	10
5.2 Calculation method	10
5.3 Limit	10
5.4 Test data	11
6. Peak to Average Ratio	13
6.1 Measurement procedure	13
6.2 Limit	13
6.3 Measurement result	13
6.4 Trace data	14
7. Occupied Bandwidth	16
7.1 Measurement procedure	16
7.2 Limit	16
7.3 Measurement result	17
7.4 Trace data	18
8. Band Edge Spurious and Harmonic at Antenna Terminals	22
8.1 Measurement procedure	22
8.2 Limit	22
8.3 Measurement result	22
8.4 Trace data	23
9. Radiated Emissions and Harmonic Emissions	37
9.1 Measurement procedure	37
9.2 Calculation method	37
9.3 Limit	37
9.4 Test data	38
10. Frequency Stability	42
10.1 Measurement procedure	42



Zacta

10.2 Limit.....	42
10.3 Measurement result.....	43
11. Uncertainty of measurement	44
12. Laboratory description	45
Appendix A. Test equipment	46



Zacta

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 27 Subpart C.

1.2 Standards

CFR47 FCC Part 27 Subpart C

1.2.1 Test Methods

ANSI/TIA/EIA-603-C-2004

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046	Conducted Output Power	Conducted	PASS
27.50	Effective Radiated Power	Radiated	PASS
27.50	Peak to Average Ratio	Conducted	PASS
2.1049	Occupied Bandwidth	Conducted	PASS
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS
27.54 2.1055	Frequency Stability	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Zacta

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KYY23
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	Qi mounted type: (W) 70.3 × (D) 10.3 × (H) 140.3 mm Qi non-mounted type: (W) 70.3 × (D) 9.9 × (H) 140.3 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Frequency of Operation	:	Up Link LTE Band X VII: 704-716MHz Down Link LTE Band X VII: 734-746MHz
Modulation type	:	QPSK, 16QAM
Emission designator	:	4M53G7D, 4M53W7D 9M03G7D, 9M02W7D
Output power	:	0.219W ERP (23.4dBm)
Antenna type	:	Internal antenna
Antenna gain	:	0dBi

2.3 Variation of the family model(s)

KYY23 has Qi mounted type and Qi non-mounted type.

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth	Channel	Frequency [MHz]
LTE Band X VII	QPSK	5MHz	23775	706.5
			23790	710.0
			23825	713.5
		10MHz	23780	709.0
			23790	710.0
			23800	711.0
	16QAM	5MHz	23775	706.5
			23790	710.0
			23825	713.5
		10MHz	23780	709.0
			23790	710.0
			23800	711.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

Qi non-mounted type is tested only the worst mode at radiated test.



Zacta

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYY23	N/A	JOYKYY23	EUT

3.2 System configuration

1. Mobile Phone
(EUT)


Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Conducted Output Power

4.1 Measurement procedure [FCC 2.1046]

The conducted output power was measured with a wireless communication tester connected to the antenna terminal. The wireless communication tester parameters were set to produce the maximum power from the EUT.

- Test configuration

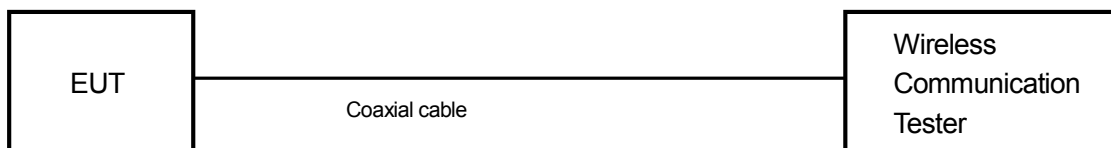

4.2 Measurement result

Date : Mar. 13, 2014
 Temperature : 22.0 [°C]
 Humidity : 23.0 [%]
 Test place : Shielded room No.4

Test personnel :

Tested by :

Chiaki Kanno

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						23775	23790	23825
						706.5 MHz	710.0 MHz	713.5 MHz
LTE Band 17	5	QPSK	1	0	0	22.37	22.41	22.35
			1	12	0	22.44	22.33	22.32
			1	24	0	22.38	22.38	22.31
			12	0	1	21.27	21.35	21.30
			12	7	1	21.38	21.35	21.35
			12	13	1	21.35	21.31	21.30
			25	0	1	21.41	21.33	21.31
		16QAM	1	0	1	21.26	21.34	21.35
			1	12	1	21.28	21.28	21.34
			1	24	1	21.28	21.27	21.33
			12	0	2	20.28	20.39	20.37
			12	7	2	20.38	20.35	20.39
			12	13	2	20.39	20.34	20.39
			25	0	2	20.38	20.41	20.43

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						23780	23790	23800
						709.0 MHz	710.0 MHz	711.0 MHz
LTE Band 17	10	QPSK	1	0	0	22.31	22.32	22.46
			1	25	0	22.33	22.35	22.42
			1	49	0	22.42	22.38	22.44
			25	0	1	21.34	21.35	21.33
			25	12	1	21.33	21.30	21.30
			25	25	1	21.28	21.32	21.31
			50	0	1	21.33	21.33	21.34
		16QAM	1	0	1	21.38	21.38	21.59
			1	25	1	21.37	21.40	21.51
			1	49	1	21.52	21.41	21.54
			25	0	2	20.42	20.43	20.38
			25	12	2	20.36	20.38	20.36
			25	25	2	20.33	20.41	20.32
			50	0	2	20.36	20.36	20.36

5. Effective Radiated Power

5.1 Measurement procedure [FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: RMS Average (RBW: 430kHz, VBW: 1.5MHz)

- Test configuration

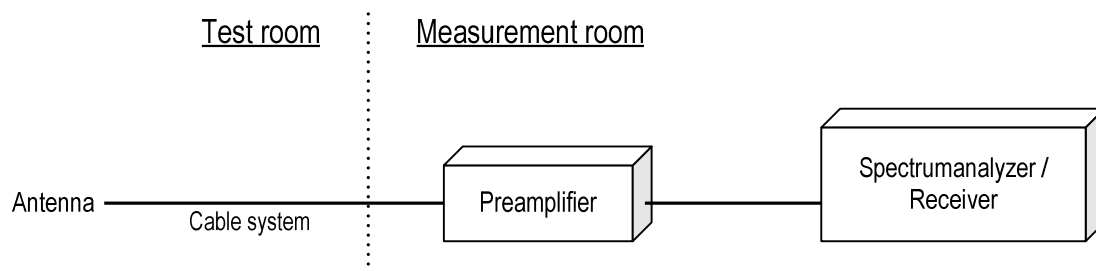

5.2 Calculation method

Result (ERP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

5.3 Limit

3 W (34.7dBm)



Zacta

5.4 Test data

Date : Apr. 2, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 22.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Nobuyuki Toda

Date : Apr. 14, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 23.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Taiki Watanabe

<Qi mounted type> [WCDMA Band X VII] QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.3	12.1	29.7	0.6	-9.9	19.1	34.7	15.6
H	710.0	12.4	34.0	0.6	-10.0	23.4	34.7	11.3
H	711.3	10.7	32.2	0.6	-10.0	21.6	34.7	13.1

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.3	10.8	28.4	0.6	-9.9	17.8	34.7	16.9
H	707.8	11.2	32.8	0.6	-9.9	22.2	34.7	12.5
H	711.3	10.8	32.2	0.6	-10.0	21.6	34.7	13.1

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.6	10.5	28.1	0.6	-9.9	17.5	34.7	17.2
H	705.6	10.5	28.0	0.6	-9.9	17.4	34.7	17.3
H	706.6	10.6	28.2	0.6	-9.9	17.6	34.7	17.1

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.6	11.0	28.6	0.6	-9.9	18.0	34.7	16.7
H	705.6	11.0	28.5	0.6	-9.9	17.9	34.7	16.8
H	706.6	11.2	28.8	0.6	-9.9	18.2	34.7	16.5

Date : Apr. 18, 2014
 Temperature : 22.0 [°C]
 Humidity : 23.2 [%]
 Test place : 3m Semi-anechoic chamber

Test personnel :

Tested by :

Taiki Watanabe

<Qi non-mounted type>

[WCDMA Band X VII]

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.3	12.0	29.6	0.6	-9.9	19.0	34.7	15.7
H	710.0	12.0	33.6	0.6	-10.0	23.0	34.7	11.7
H	711.3	10.0	31.5	0.6	-10.0	20.9	34.7	13.8

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.3	11.0	28.6	0.6	-9.9	18.0	34.7	16.7
H	707.8	11.0	33.0	0.6	-9.9	22.4	34.7	12.3
H	711.3	11.0	32.4	0.6	-10.0	21.8	34.7	12.9

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.6	9.8	27.4	0.6	-9.9	16.8	34.7	17.9
H	705.6	11.0	27.5	0.6	-9.9	16.9	34.7	17.8
H	706.6	10.0	27.6	0.6	-9.9	17.0	34.7	17.7

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.6	10.2	27.9	0.6	-9.9	17.3	34.7	17.4
H	705.6	10.2	27.7	0.6	-9.9	17.1	34.7	17.6
H	706.6	11.0	28.6	0.6	-9.9	18.0	34.7	16.7


6. Peak to Average Ratio

6.1 Measurement procedure [FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;
- Power Stat CCDF mode

- Test configuration

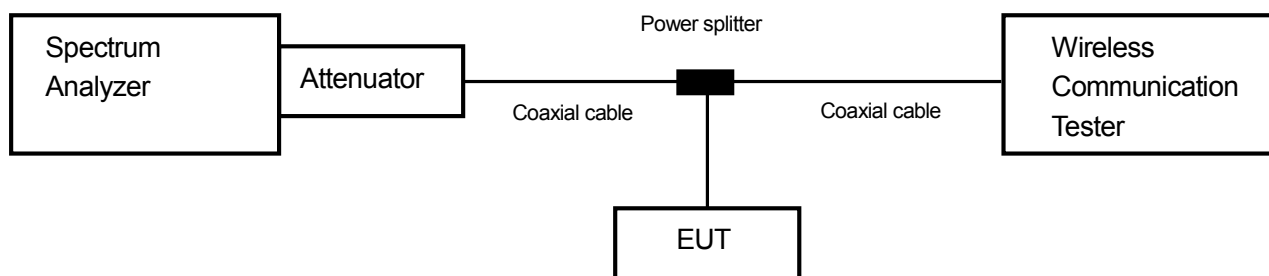

6.2 Limit

13dB or less

6.3 Measurement result

Date : Apr. 21, 2014
 Temperature : 24.0 [°C]
 Humidity : 46.0 [%]
 Test place : Shielded room No.4

Test personnel :

Tested by :


Nobuyuki Toda

Band	Channel	Frequency [MHz]	Modulation	BW [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band X VII	2379	710.0	QPSK	5	25-0	5.63	13
				10	50-0	4.57	13
			16QAM	5	25-0	6.51	13
				10	50-0	6.21	13




Zacta

6.4 Trace data
[LTE Band X VII]
Channel: 2390
QPSK, BW 5MHz, RB25-0

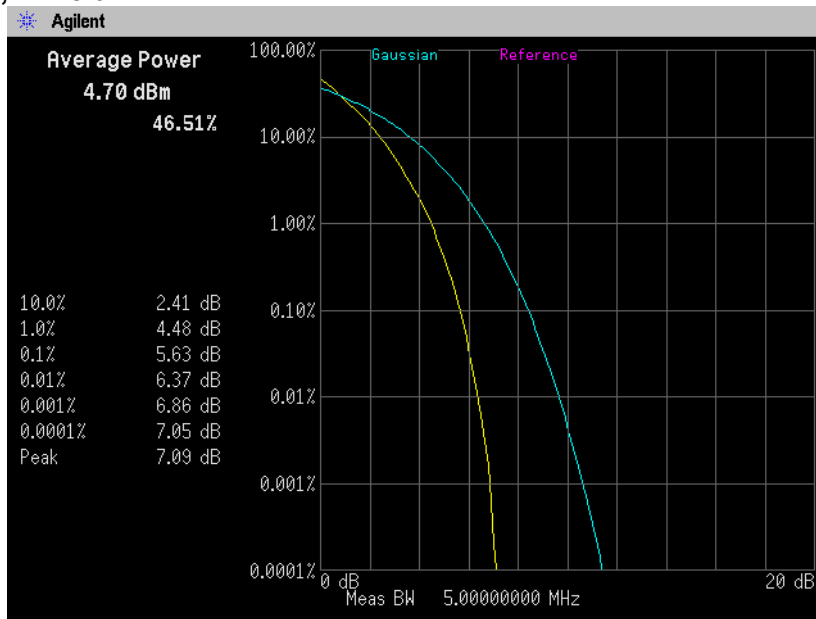


QPSK, BW 10MHz, RB50-0

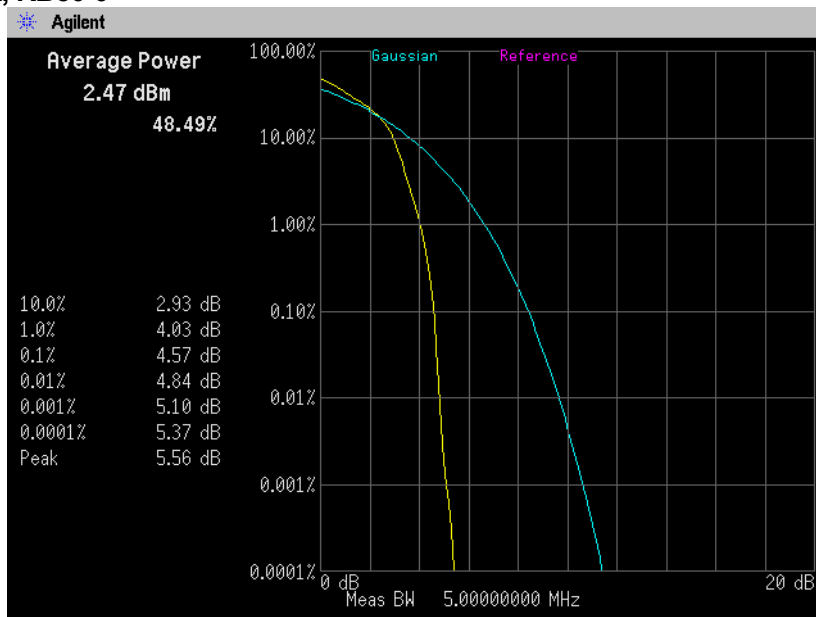




Zacta

16QAM, BW 5MHz, RB25-0

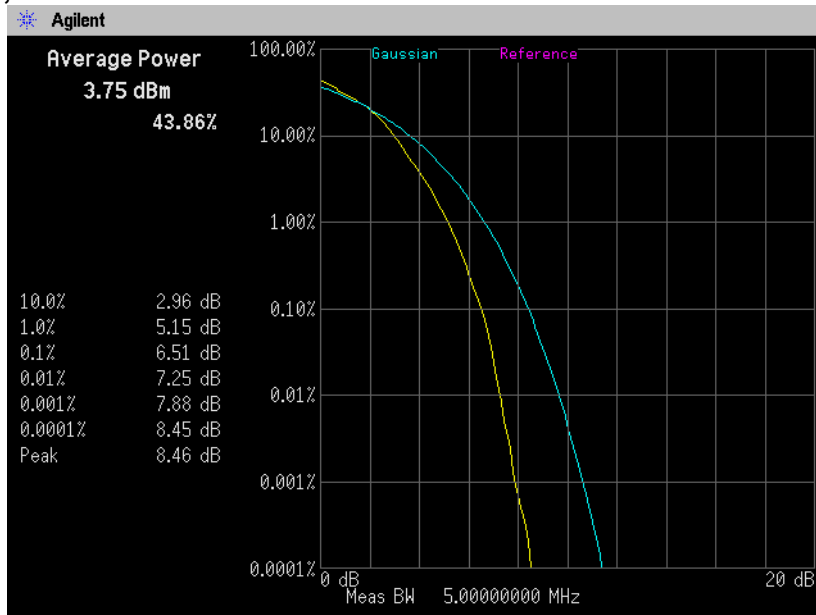

16QAM, BW 10MHz, RB50-0

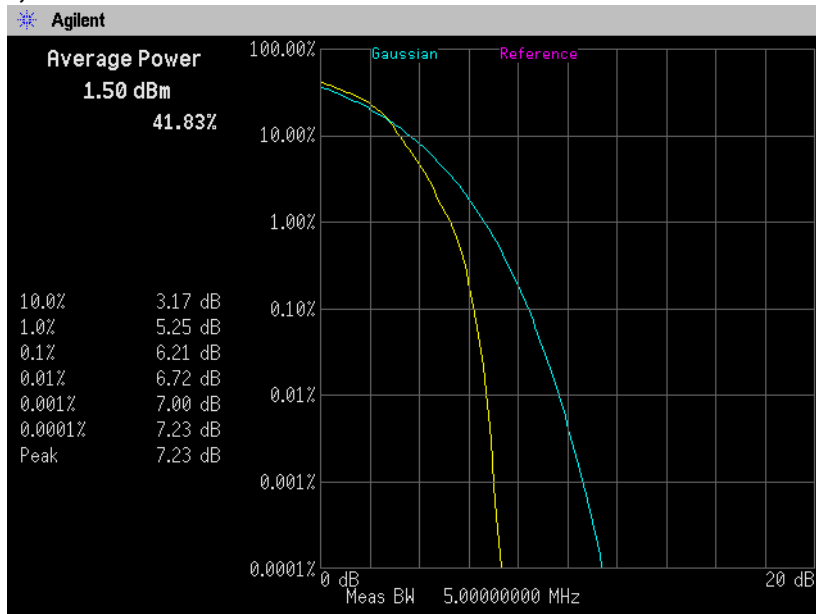

7. Occupied Bandwidth


7.1 Measurement procedure [FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW=100kHz, VBW=300kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=200kHz, VBW=620kHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

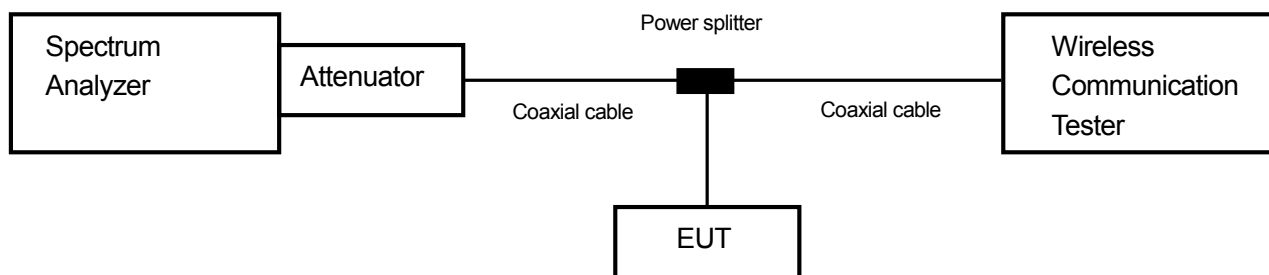

7.2 Limit

None

7.3 Measurement result


Date : Apr. 21, 2014 Test personnel :
 Temperature : 24.0 [°C]
 Humidity : 46.0 [%] Tested by :
 Test place : Shielded room No.4 Nobuyuki Toda

BW	Mode	UL RB Allocation	UL RB Start	Frequency [MHz]	26dB Bandwidth [MHz]	99% OBW [MHz]
5MHz	QPSK	1	0	710.0	0.722	0.4871
		1	24		0.692	0.4889
		12	7		3.322	2.3113
		25	0		5.001	4.5290
5MHz	16QAM	1	0	710.0	0.659	0.4821
		1	24		0.707	0.4783
		12	7		3.374	2.3535
		25	0		5.041	4.5320
10MHz	QPSK	1	0	710.0	0.988	0.7106
		1	49		0.971	0.7063
		25	12		6.068	4.6768
		50	0		9.926	9.0275
10MHz	16QAM	1	0	710.0	0.894	0.6786
		1	49		0.954	0.6911
		25	12		5.907	4.6582
		50	0		9.904	9.0215




Zacta


7.4 Trace data
[WCDMA Band X VII]
Channel: 23790
QPSK, BW 5MHz, RB1-0

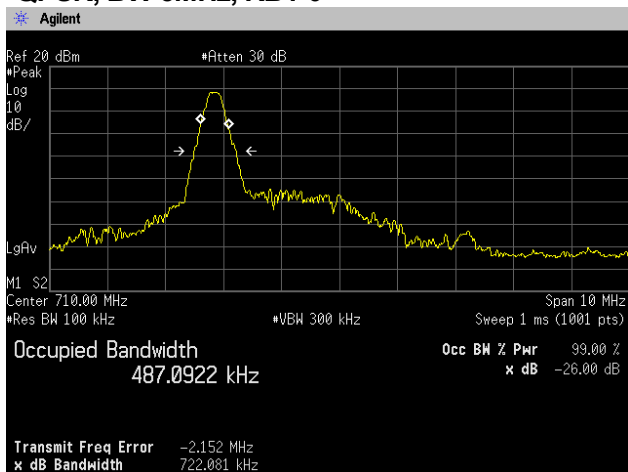


RB1-24

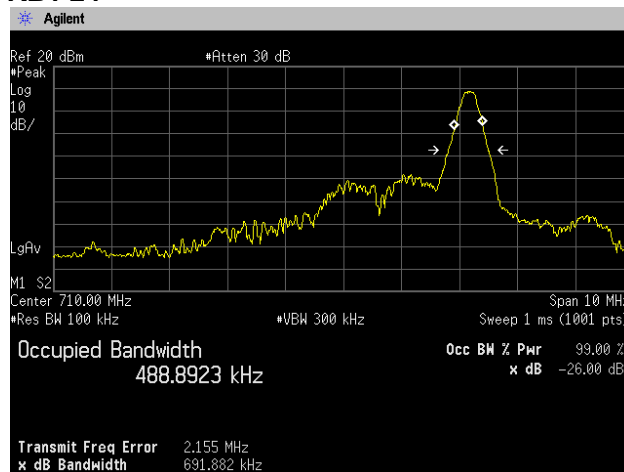

RB12-7

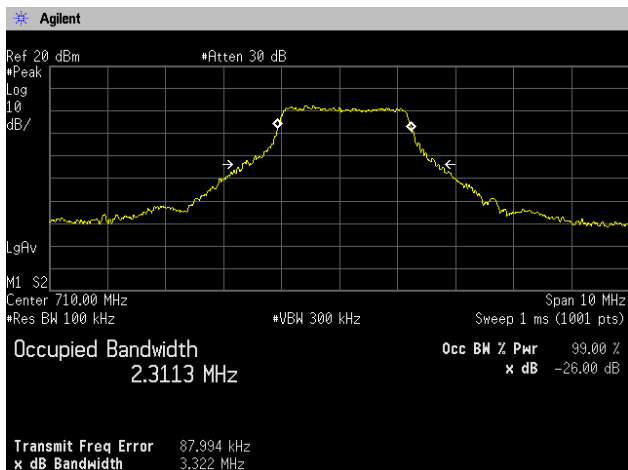


RB25-0

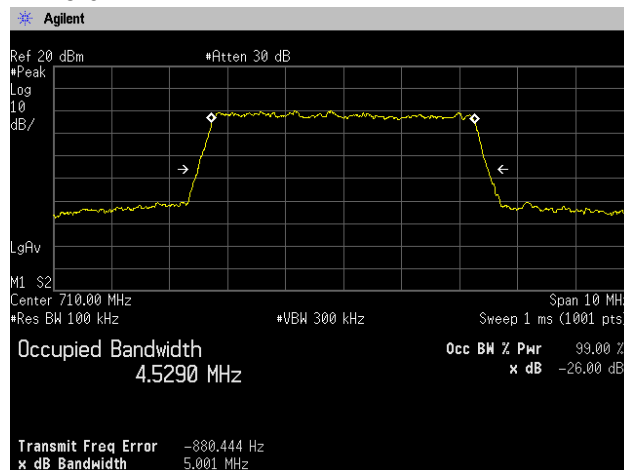




Zacta


16QAM, BW 5MHz, RB1-0

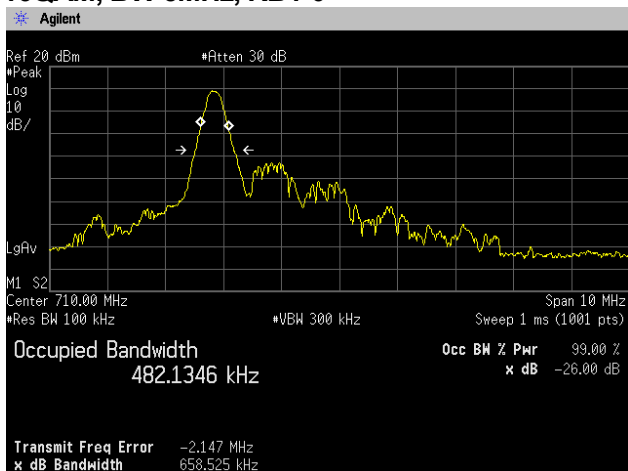


RB1-24

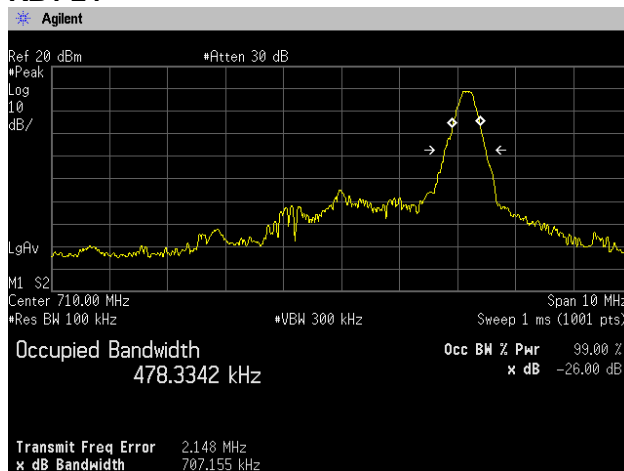

RB12-7

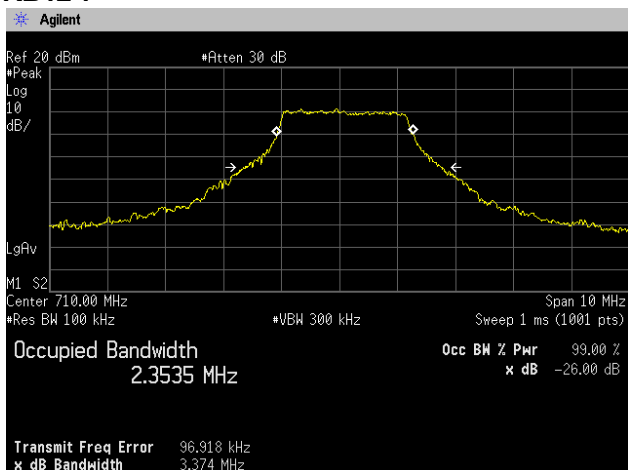


RB25-0

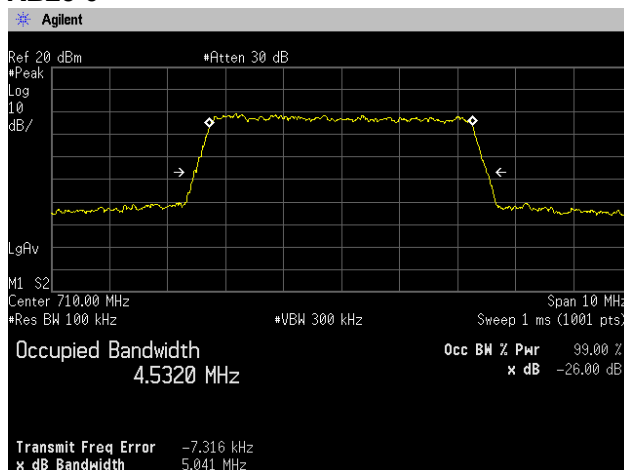




Zacta


QPSK, BW 10MHz, RB1-0

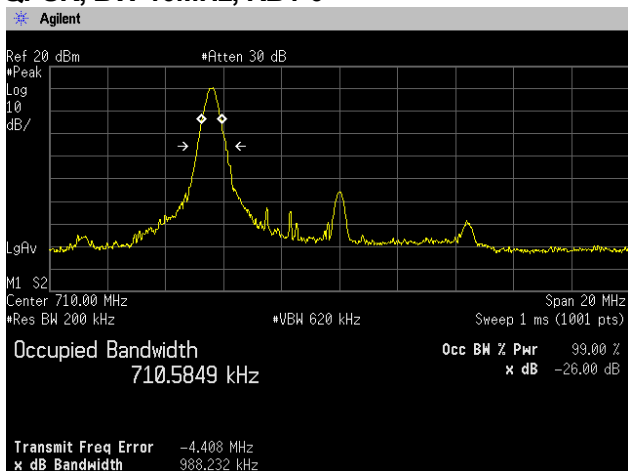


RB1-49

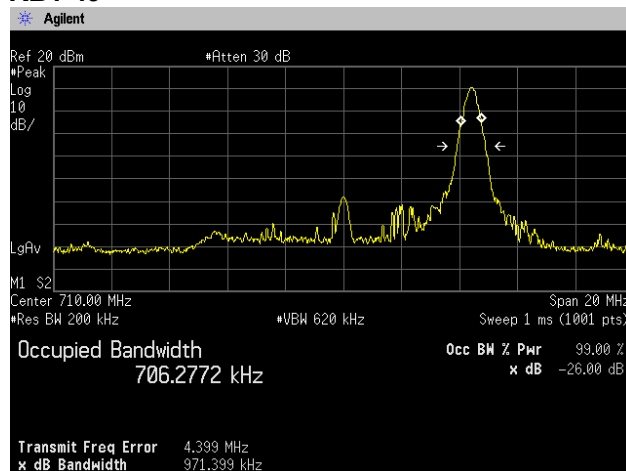

RB25-12

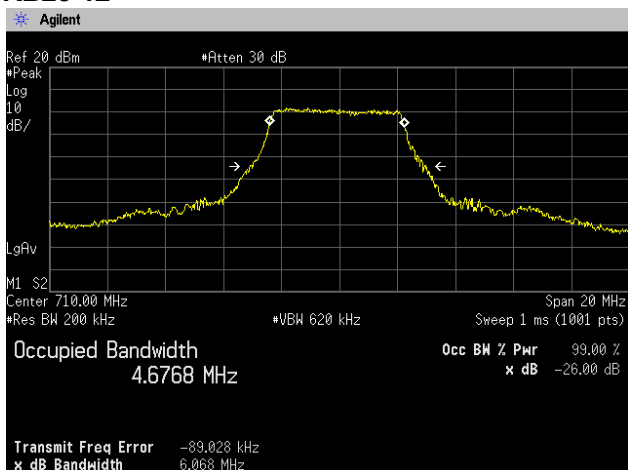


RB50-0

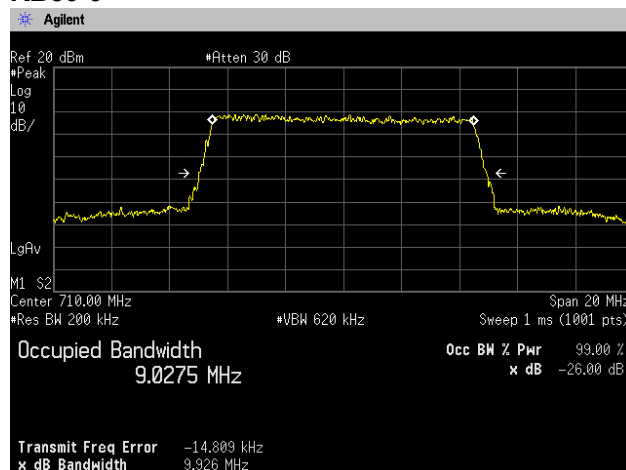




Zacta


16QAM, BW 10MHz, RB1-0

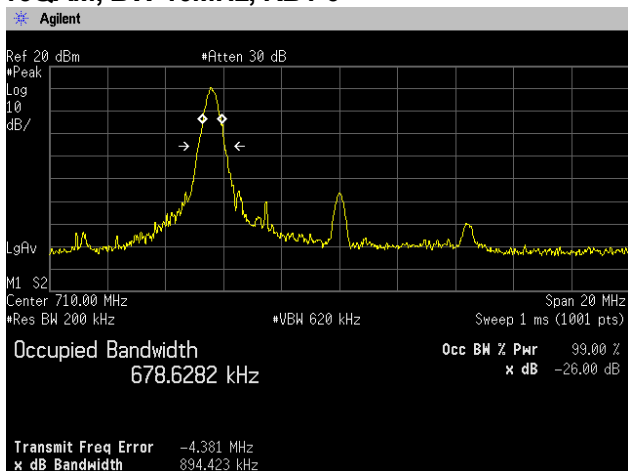


RB1-49

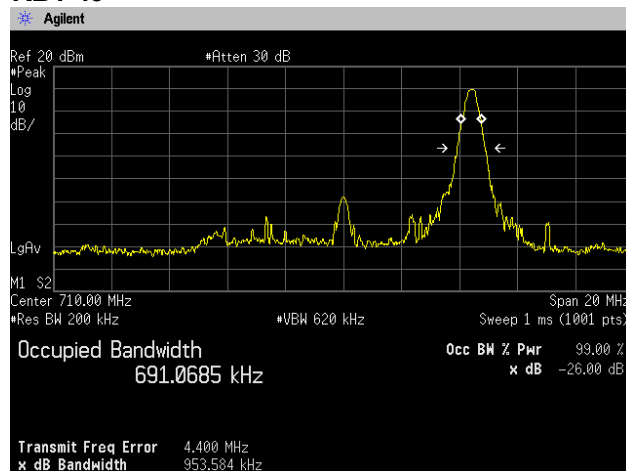

RB25-12

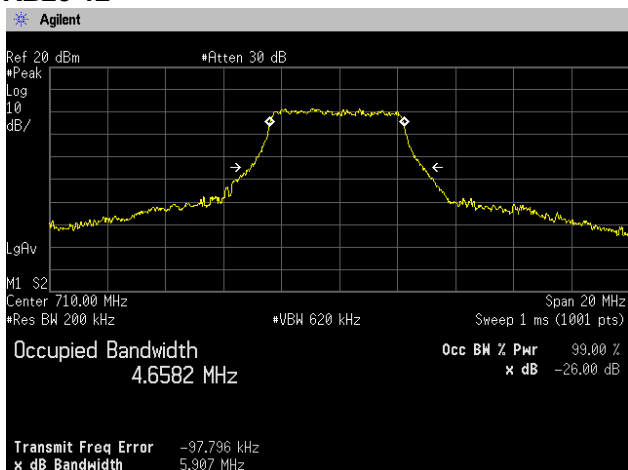

RB50-0

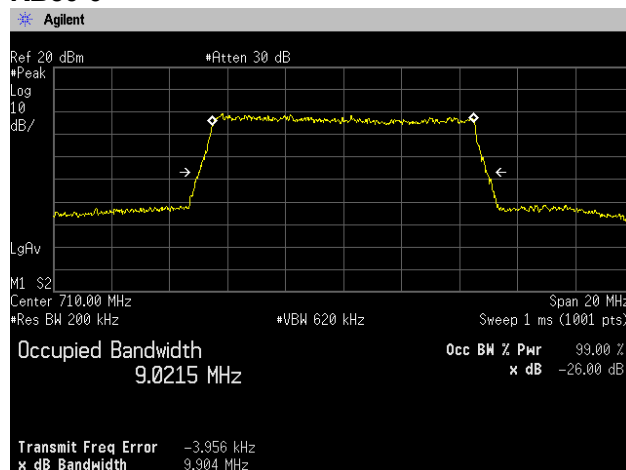

8. Band Edge Spurious and Harmonic at Antenna Terminals

8.1 Measurement procedure

[FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- RBW=100kHz, VBW=300kHz, Span=2MHz, Sweep=auto, Detector=RMS, Trace mode=Max hold

<Spurious Emissions>

- RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

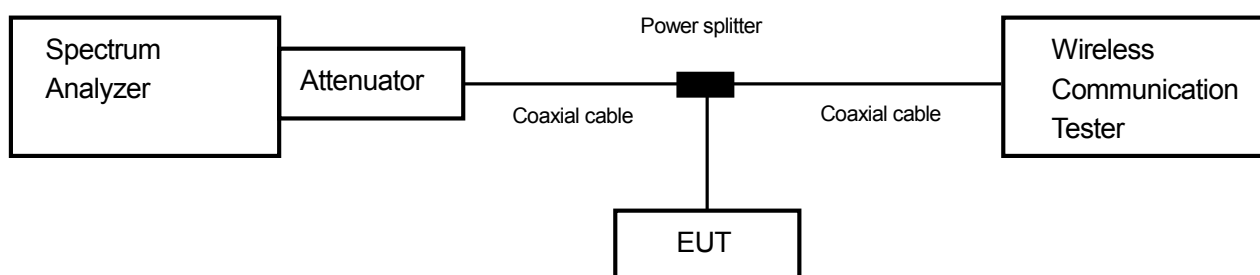

8.2 Limit

-13dBm or less

8.3 Measurement result

Date : Apr. 21, 2014

Test personnel :

Temperature : 24.0 [°C]

Humidity : 46.0 [%]


Tested by :

Test place : Shielded room No.4


Nobuyuki Toda

Band	Modulation	Bandwidth	Results	
LTE Band X VII	QPSK	5MHz	See the trace data	PASS
		10MHz	See the trace data	PASS
	16QAM	5MHz	See the trace data	PASS
		10MHz	See the trace data	PASS

8.4 Trace data
[WCDMA Band X VII]
(Band Edge)
QPSK, BW 5MHz, RB1-0
Channel: Low

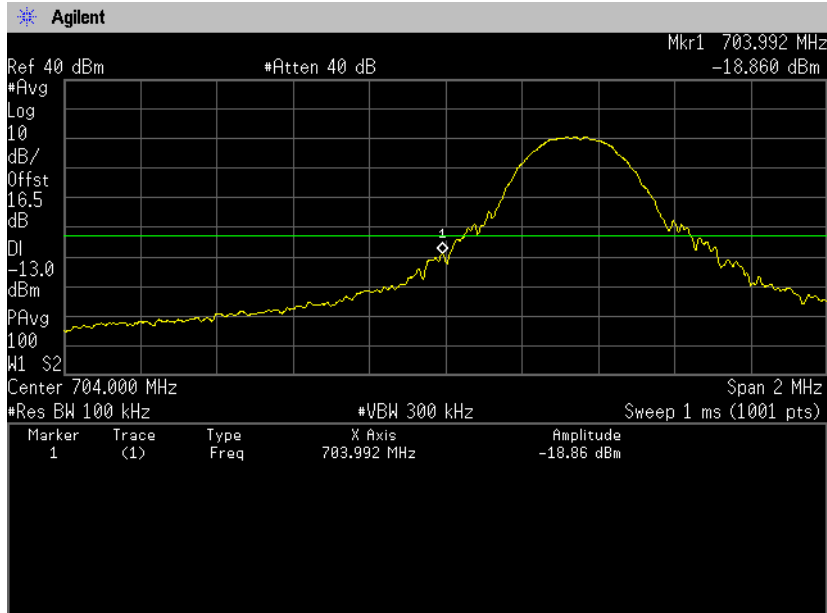


QPSK, BW 5MHz, RB1-24
Channel: High

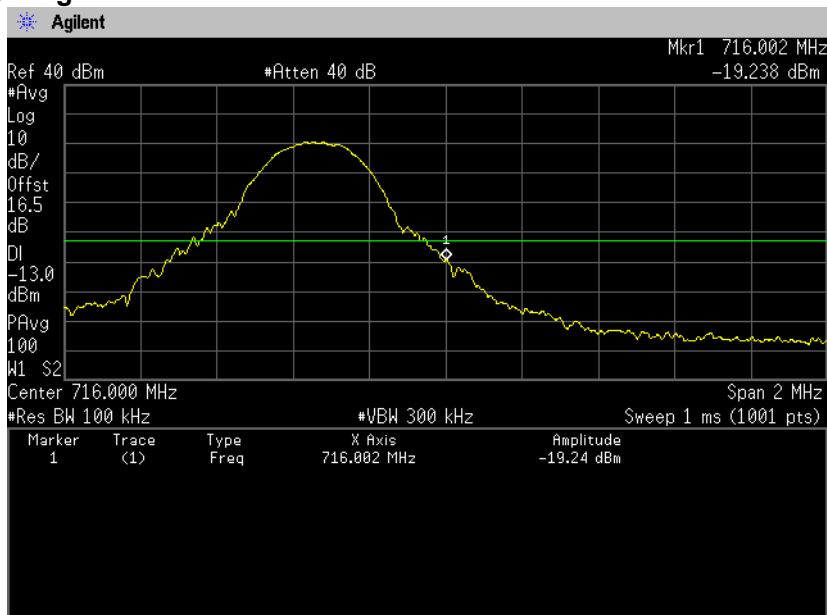




Zacta

QPSK, BW 5MHz, RB25-0
Channel: Low

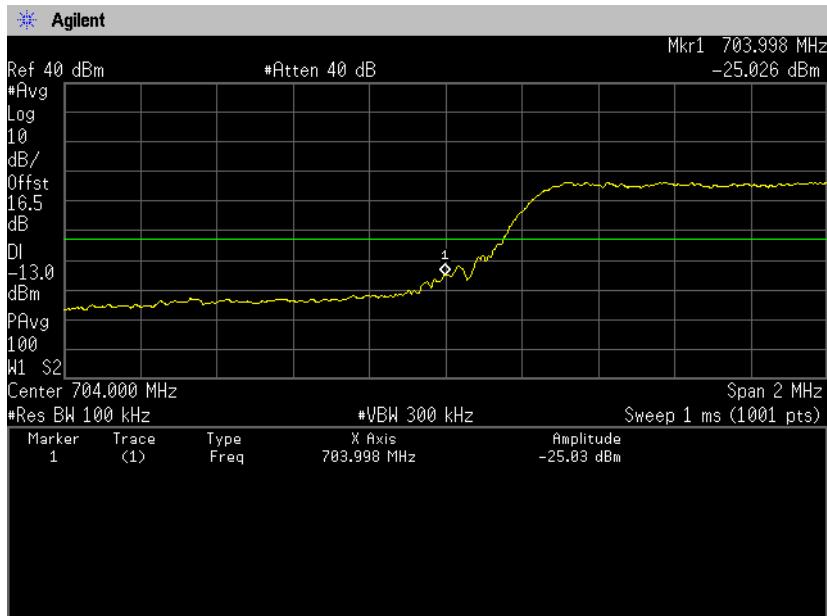


QPSK, BW 5MHz, RB25-0
Channel: High

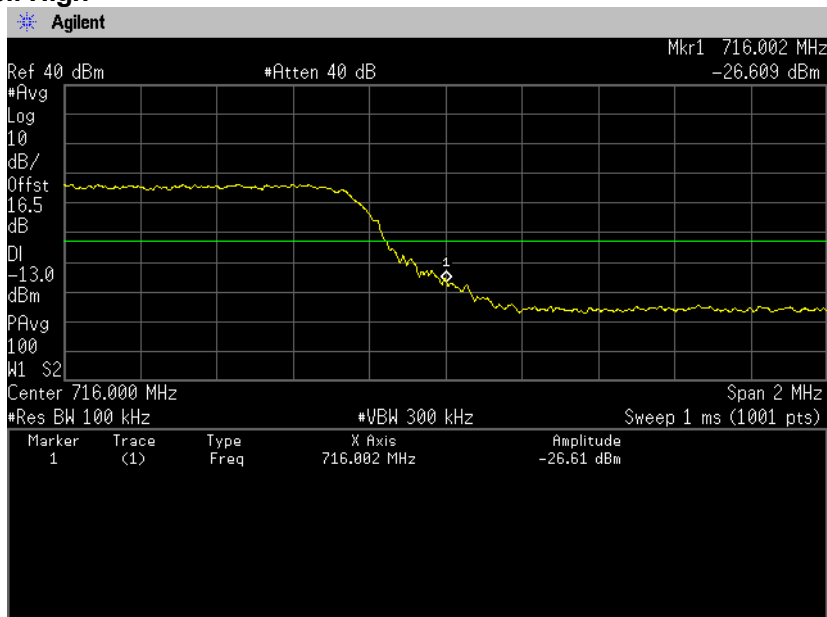




Zacta

16QAM, BW 5MHz, RB1-0
Channel: Low

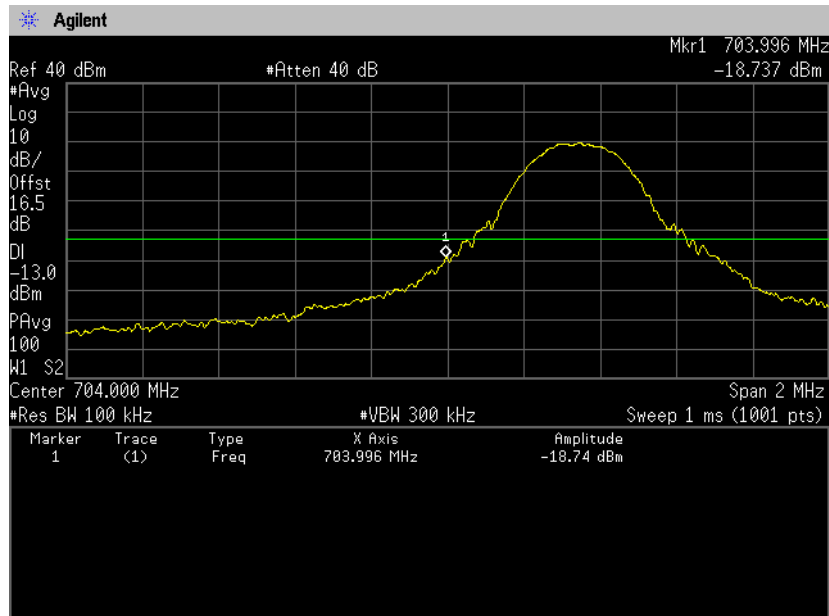


16QAM, BW 5MHz, RB1-24
Channel: High

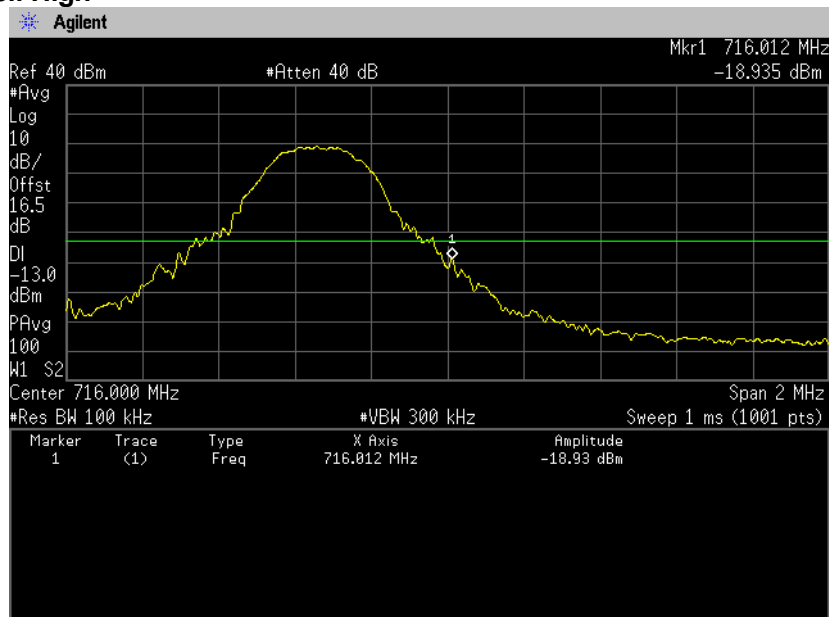




Zacta

16QAM, BW 5MHz, RB25-0
Channel: Low

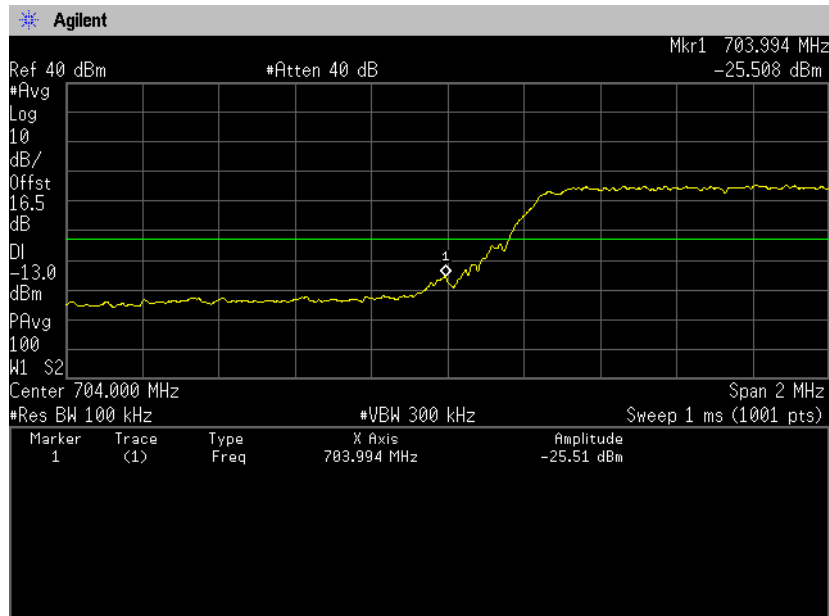


16QAM, BW 5MHz, RB25-0
Channel: High

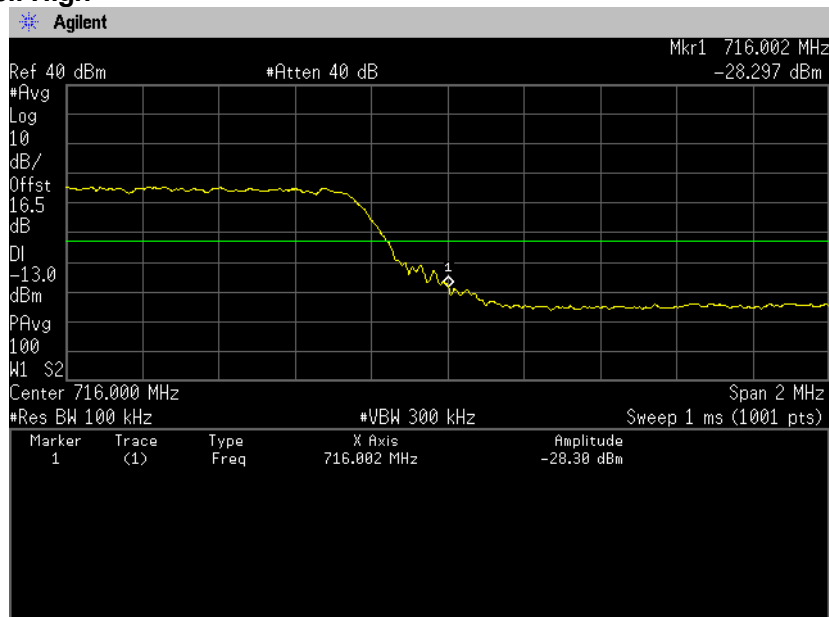




Zacta

QPSK, BW 10MHz, RB1-0
Channel: Low

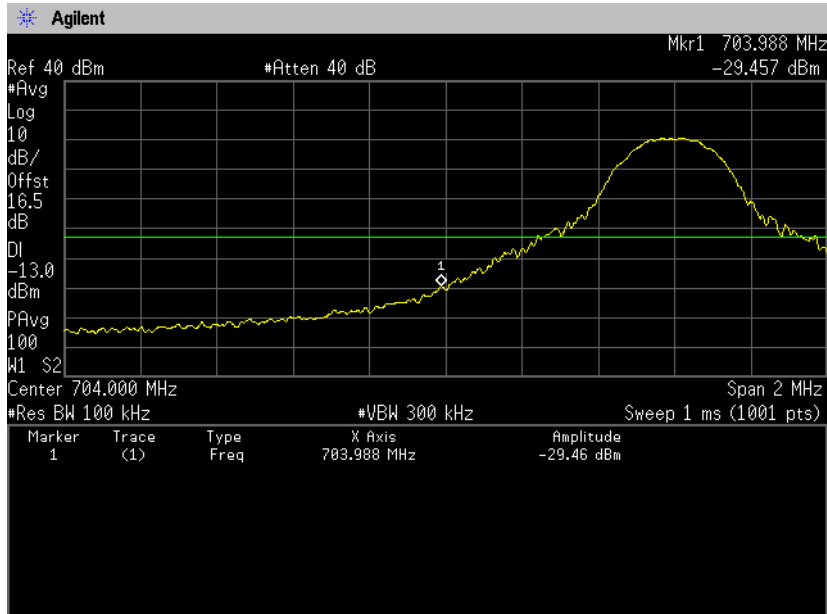


QPSK, BW 10MHz, RB1-49
Channel: High

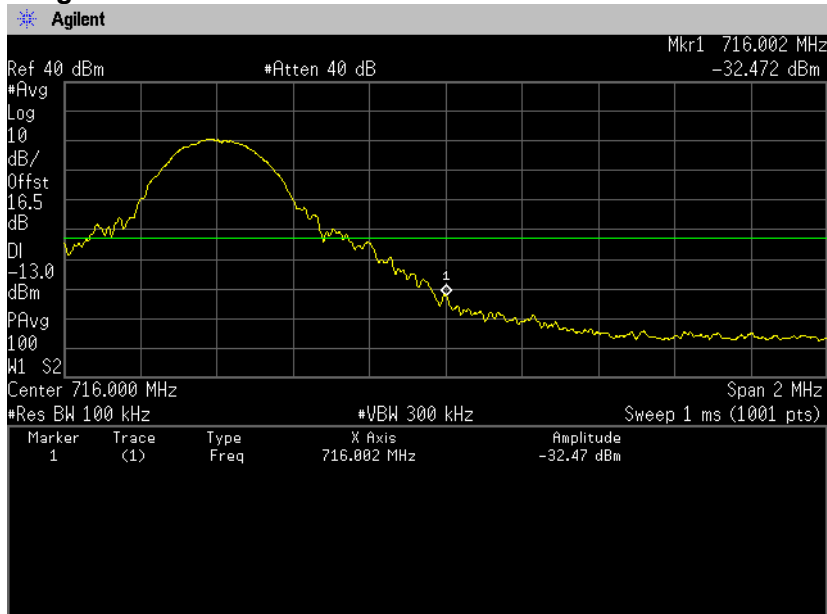




Zacta

QPSK, BW 10MHz, RB50-0
Channel: Low

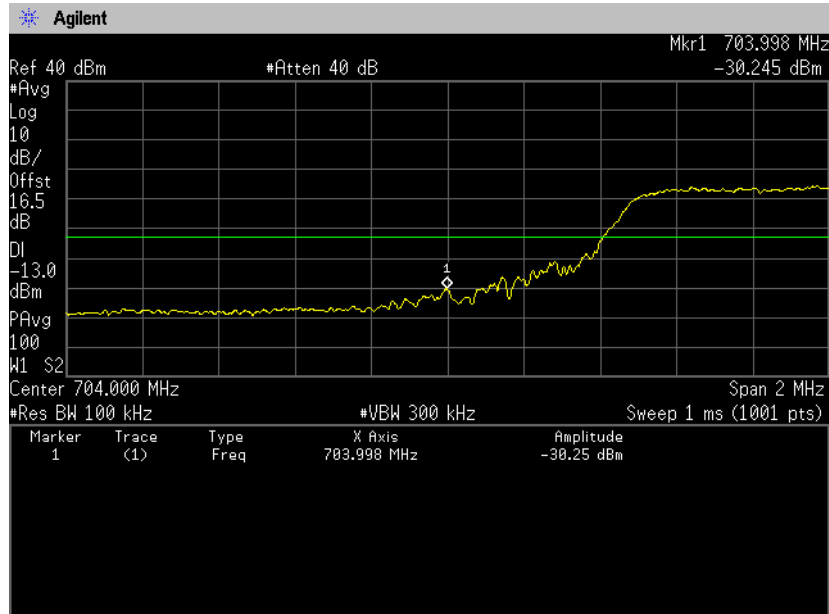


QPSK, BW 10MHz, RB50-0
Channel: High

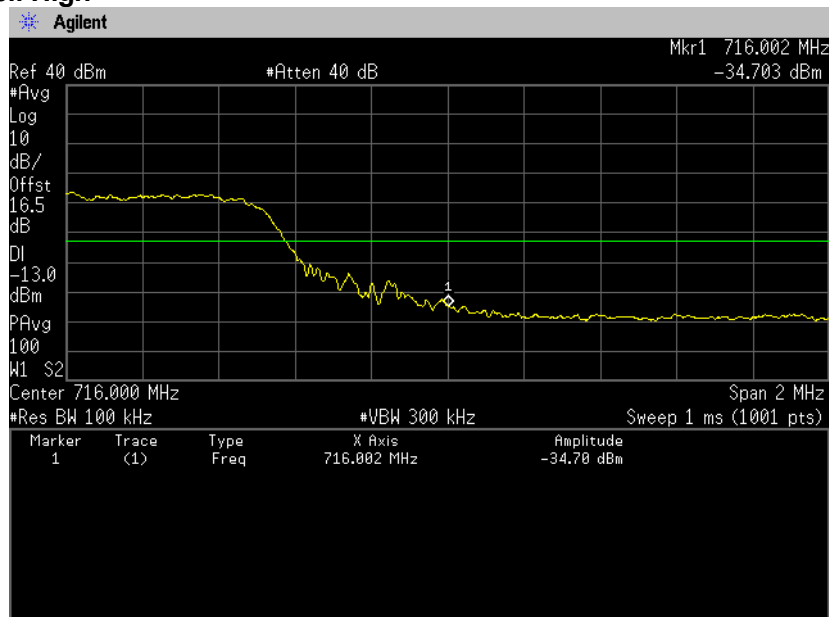




Zacta

16QAM, BW 10MHz, RB1-0
Channel: Low

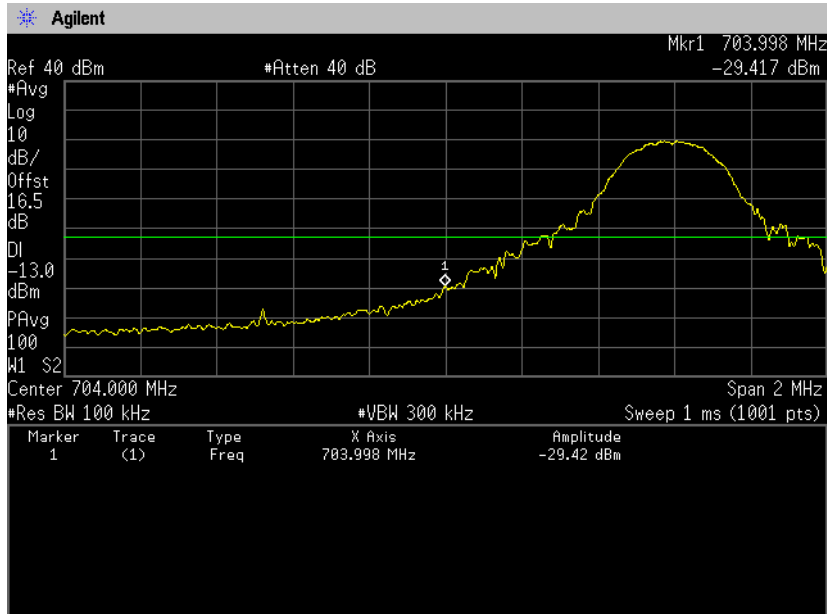


16QAM, BW 10MHz, RB1-49
Channel: High

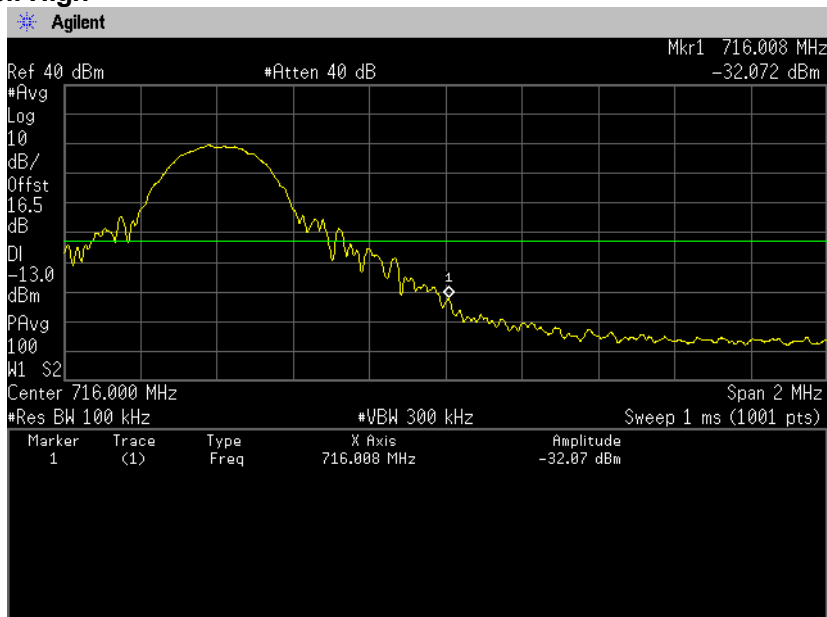




Zacta

16QAM, BW 10MHz, RB50-0
Channel: Low

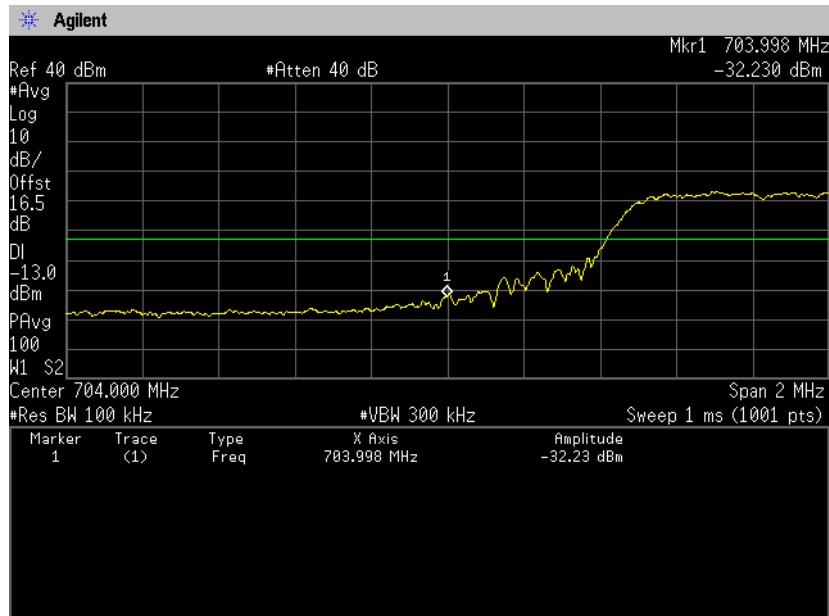


16QAM, BW 10MHz, RB50-0
Channel: High

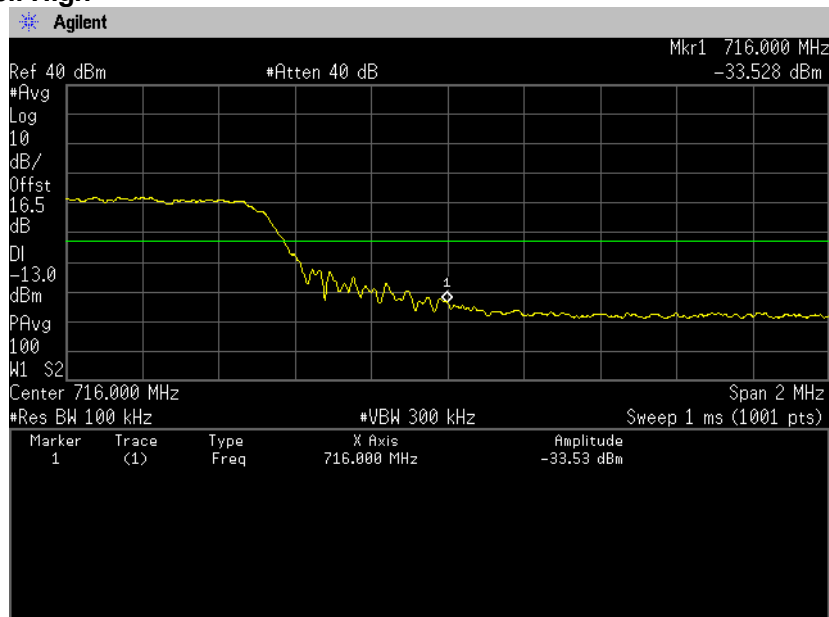




Zacta

(Spurious Emissions)
QPSK, BW 10MHz, RB1-0
Channel: 23780
30MHz-5GHz

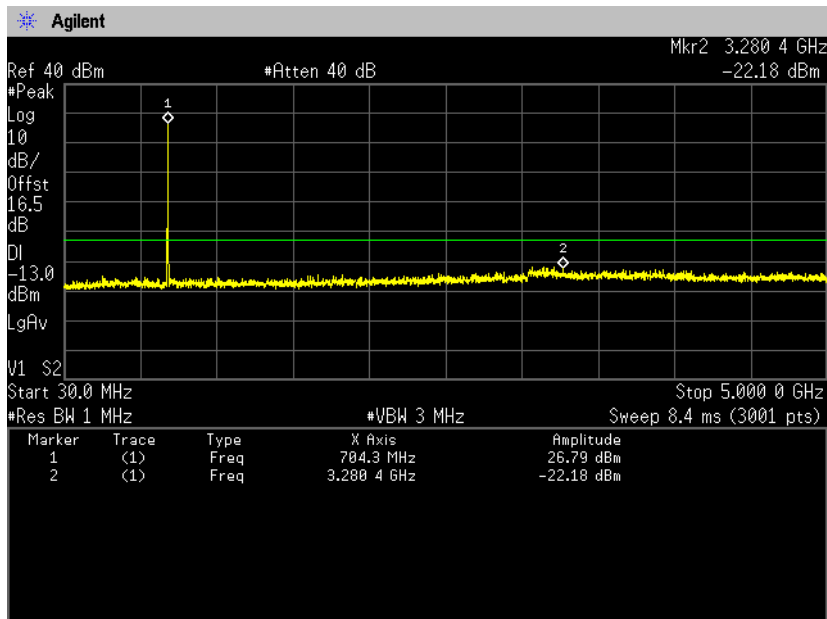


5GHz-10GHz

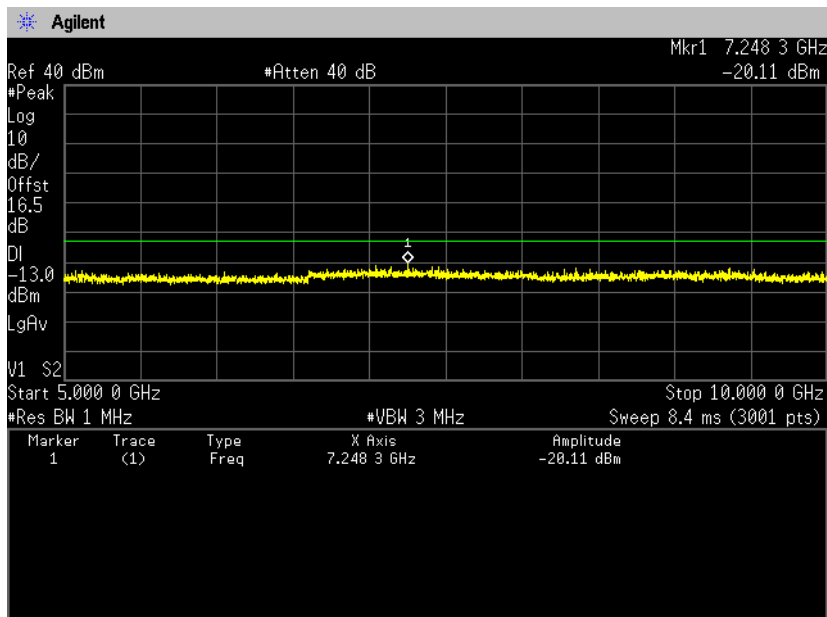




Zacta

**Channel: 23790
30MHz-5GHz**

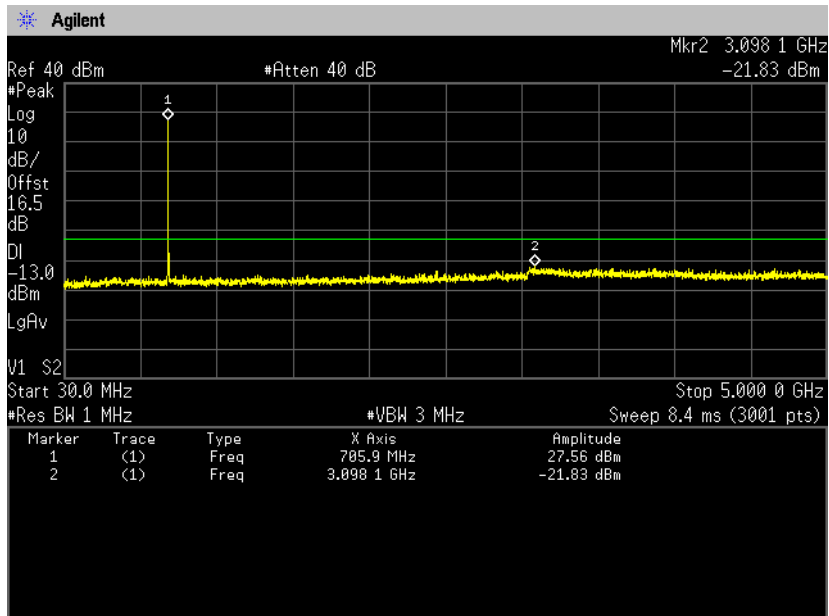


5GHz-10GHz

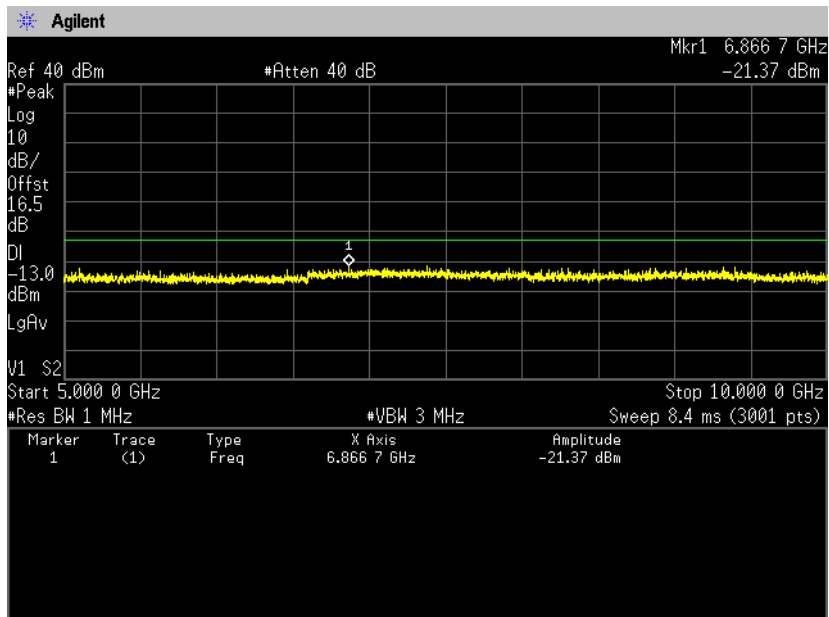




Zacta

**Channel: 23800
30MHz-5GHz**

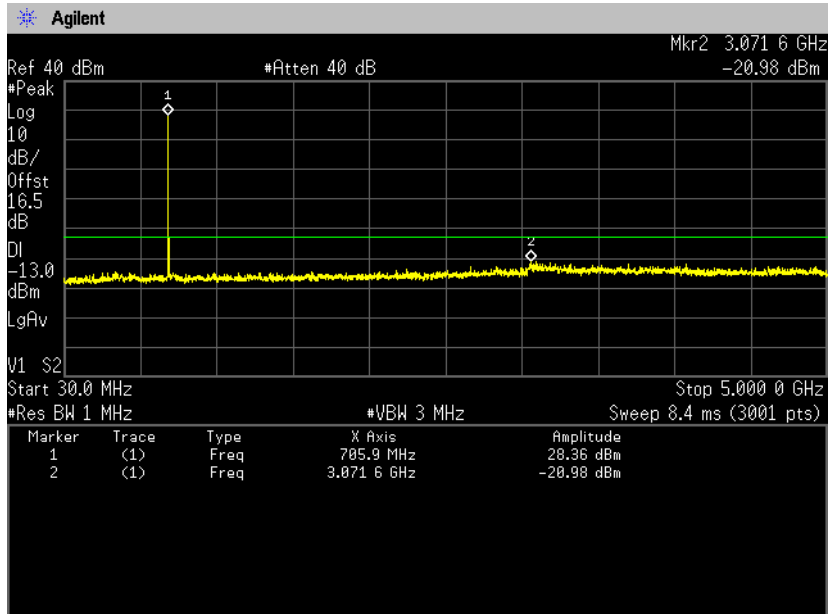


5GHz-10GHz

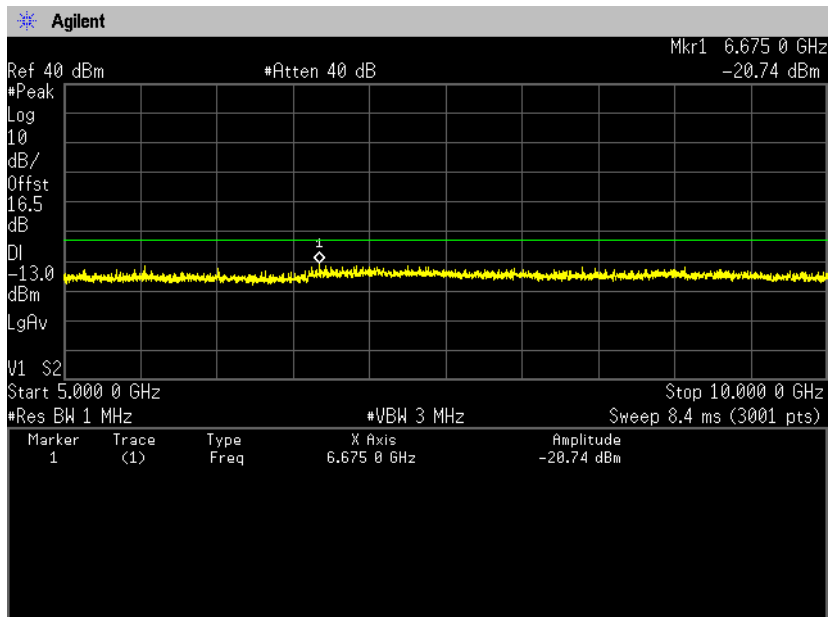




Zacta

16QAM, BW 10MHz, RB1-0
Channel: 23780
30MHz-5GHz

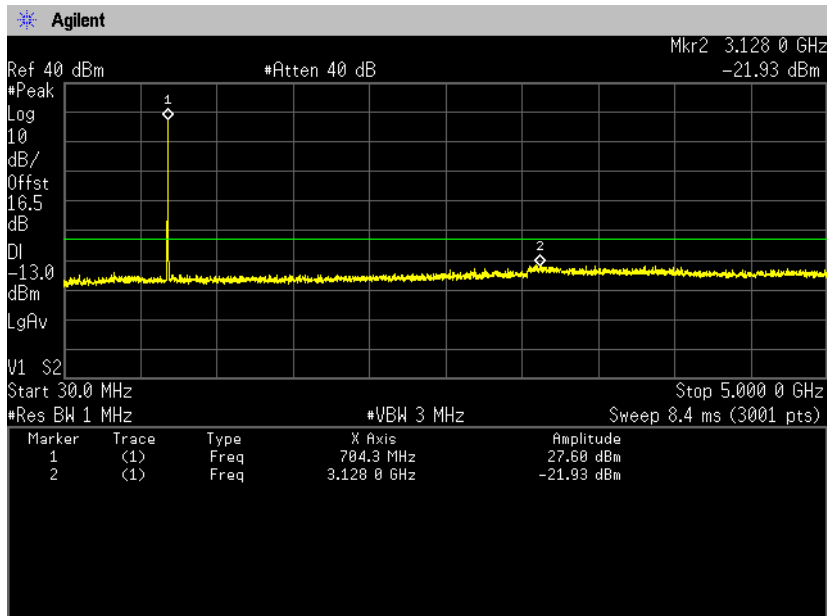


5GHz-10GHz

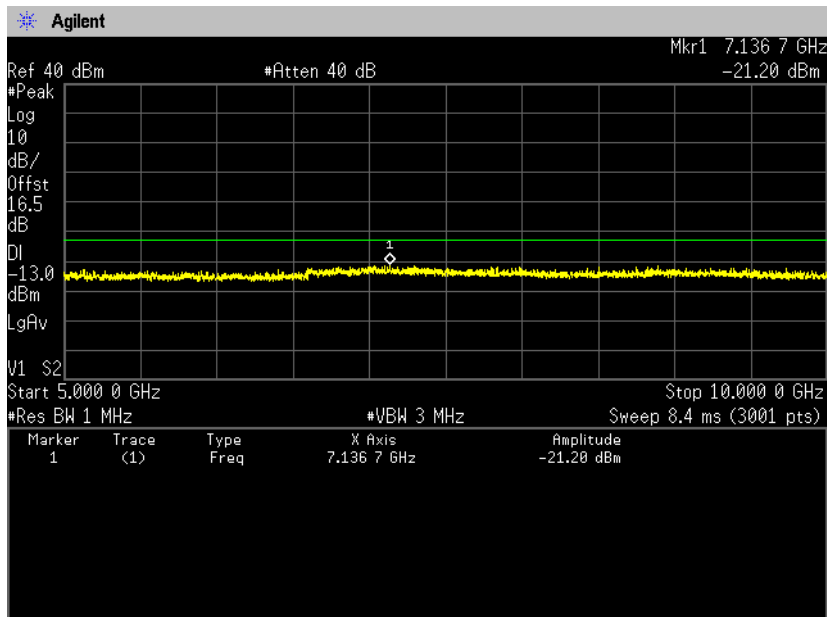




Zacta

**Channel: 23790
30MHz-5GHz**

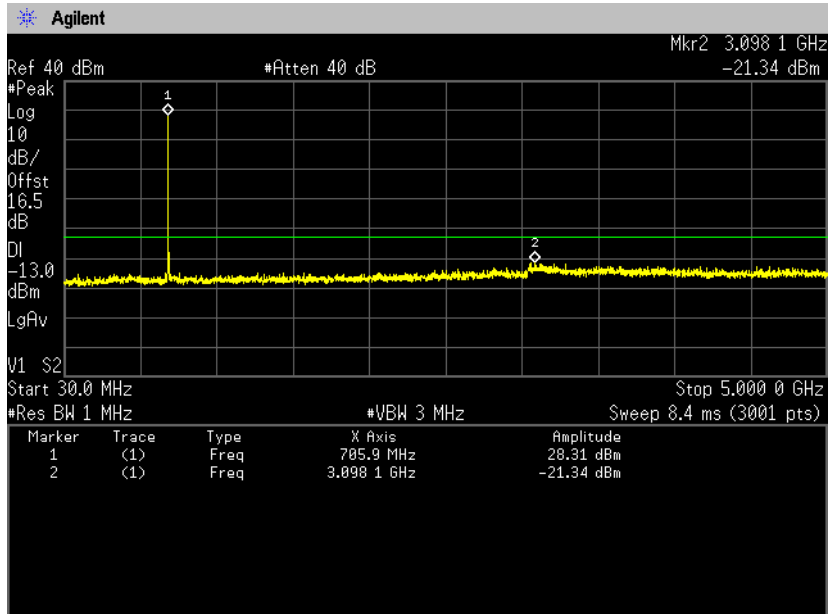


5GHz-10GHz

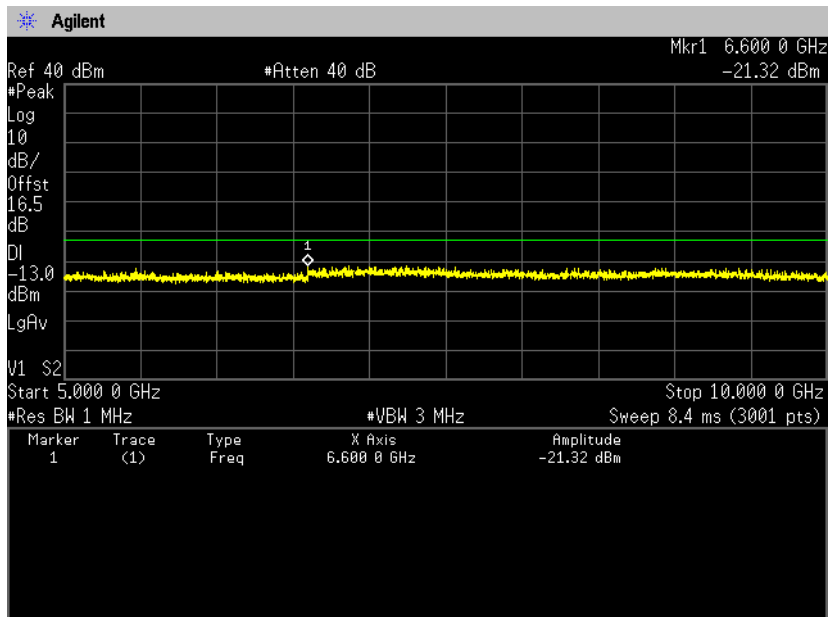




Zacta

**Channel: 23800
30MHz-5GHz**

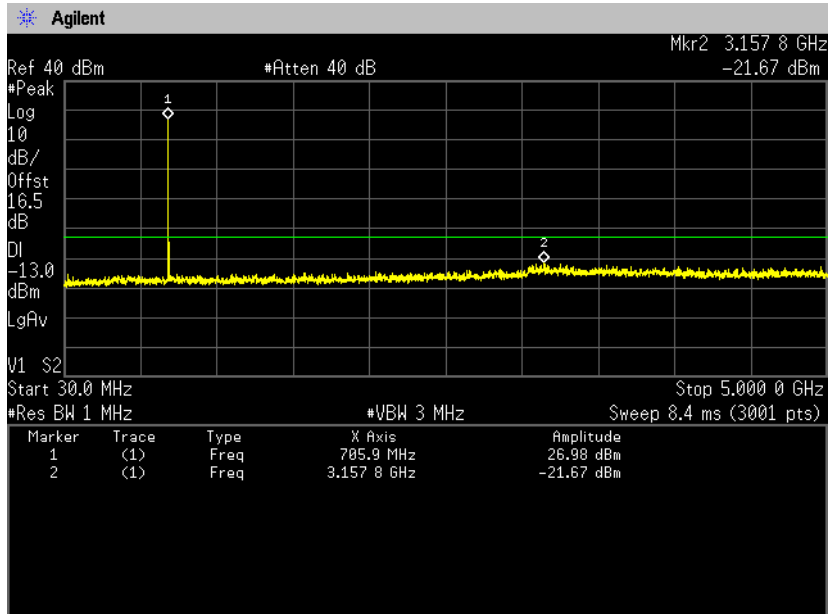

5GHz-10GHz

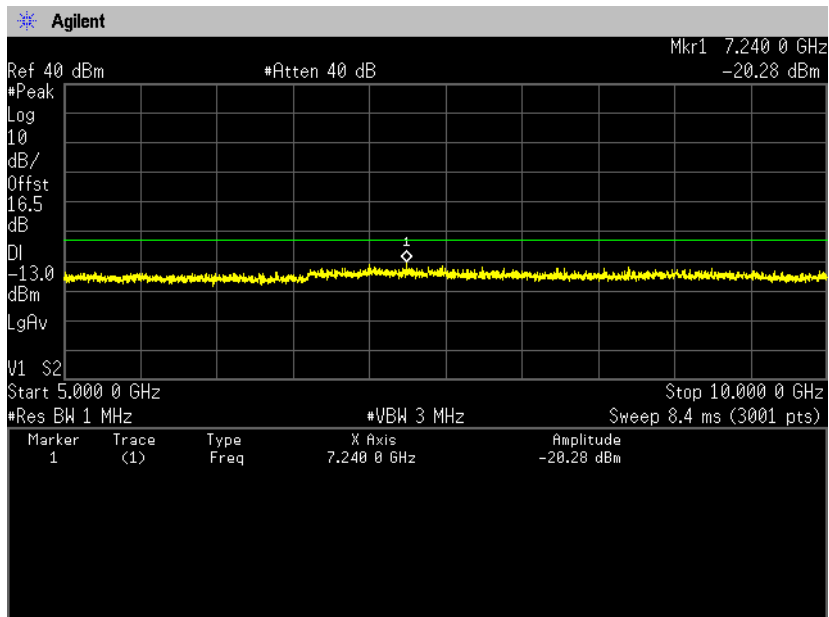

9. Radiated Emissions and Harmonic Emissions

9.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration

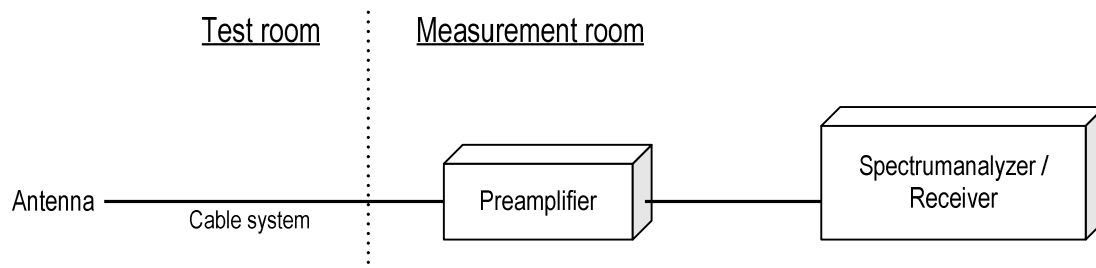

9.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

9.3 Limit

-13dBm or less



Zacta

9.4 Test data

Date : Apr. 2, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 22.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Nobuyuki Toda

Date : Apr. 10, 2014 Test personnel :
 Temperature : 24.0 [°C]
 Humidity : 21.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Taiki Watanabe

Date : Ari. 14, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 23.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Taiki Watanabe

<Qi mounted type>
 [WCDMA Band X VII]
 QPSK, BW 5MHz
 Channel: 23775

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.7	-55.7	-59.9	1.0	5.9	-55.0	-13.0	42.0
V	1408.7	-54.8	-58.2	1.0	5.9	-53.3	-13.0	40.3
H	2113.8	-52.7	-53.6	1.2	6.7	-48.0	-13.0	35.0
V	2113.8	-49.4	-46.5	1.2	6.7	-40.9	-13.0	27.9

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.7	-55.5	-60.0	1.0	5.9	-55.0	-13.0	42.0
V	1415.7	-57.6	-61.6	1.0	5.9	-56.6	-13.0	43.6
H	2123.5	-53.4	-53.2	1.2	6.8	-47.6	-13.0	34.6
V	2123.5	-48.8	-46.0	1.2	6.8	-40.4	-13.0	27.4

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.8	-56.6	-62.8	1.0	6.0	-57.8	-13.0	44.8
V	1422.7	-50.8	-53.0	1.0	6.0	-48.0	-13.0	35.0
H	2134.1	-54.4	-54.2	1.2	6.9	-48.5	-13.0	35.5
V	2134.0	-48.2	-44.4	1.2	6.9	-38.7	-13.0	25.7

16QAM, BW 5MHz
Channel: 23775

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.7	-55.3	-59.5	1.0	5.9	-54.6	-13.0	41.6
V	1408.6	-57.0	-60.4	1.0	5.9	-55.5	-13.0	42.5
H	2113.2	-53.8	-52.6	1.2	6.7	-47.1	-13.0	34.1
V	2113.1	-50.8	-47.9	1.2	6.7	-42.4	-13.0	29.4

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.7	-55.8	-60.3	1.0	5.9	-55.3	-13.0	42.3
V	1415.7	-55.0	-59.0	1.0	5.9	-54.0	-13.0	41.0
H	2123.5	-55.0	-54.8	1.2	6.8	-49.2	-13.0	36.2
V	2123.6	-50.7	-47.9	1.2	6.8	-42.3	-13.0	29.3

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.8	-57.4	-63.6	1.0	6.0	-58.6	-13.0	45.6
V	1422.7	-50.9	-53.1	1.0	6.0	-48.1	-13.0	35.1
H	2134.1	-54.5	-54.3	1.2	6.9	-48.6	-13.0	35.6
V	2134.1	-47.8	-44.0	1.2	6.9	-38.3	-13.0	25.3

QPSK, BW 10MHz
Channel: 23780

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1057.0	-57.6	-63.0	0.8	4.2	-59.7	-13.0	46.7
H	1409.2	-55.9	-60.1	1.0	5.9	-55.2	-13.0	42.2
V	1409.1	-57.6	-61.0	1.0	5.9	-56.1	-13.0	43.1
H	2113.8	-52.7	-51.5	1.2	6.7	-45.9	-13.0	32.9
V	2113.8	-48.9	-46.0	1.2	6.7	-40.4	-13.0	27.4

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1411.2	-56.4	-60.2	1.0	5.9	-55.3	-13.0	42.3
V	1411.2	-57.4	-62.0	1.0	5.9	-57.1	-13.0	44.1
H	2116.7	-55.9	-55.0	1.2	6.7	-49.4	-13.0	36.4
V	2116.9	-52.9	-51.0	1.2	6.7	-45.4	-13.0	32.4

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.2	-55.5	-60.1	1.0	5.9	-55.2	-13.0	42.2
V	1413.3	-57.1	-62.0	1.0	5.9	-57.1	-13.0	44.1
H	2119.7	-57.8	-57.8	1.2	6.8	-52.2	-13.0	39.2
V	2119.8	-51.9	-50.0	1.2	6.8	-44.4	-13.0	31.4

16QAM, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1409.2	-54.3	-58.5	1.0	5.9	-53.6	-13.0	40.6
V	1409.3	-54.1	-57.5	1.0	5.9	-52.6	-13.0	39.6
H	2113.9	-52.9	-51.7	1.2	6.7	-46.1	-13.0	33.1
V	2113.8	-50.5	-47.6	1.2	6.7	-42.0	-13.0	29.0

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1411.1	-54.7	-58.5	1.0	5.9	-53.6	-13.0	40.6
V	1411.2	-58.1	-62.7	1.0	5.9	-57.8	-13.0	44.8
H	2116.8	-57.6	-56.7	1.2	6.7	-51.1	-13.0	38.1
V	2116.6	-54.5	-52.6	1.2	6.7	-47.0	-13.0	34.0

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.2	-55.4	-60.0	1.0	5.9	-55.1	-13.0	42.1
V	1413.3	-60.6	-65.5	1.0	5.9	-60.6	-13.0	47.6
H	2119.7	-56.0	-56.0	1.2	6.8	-50.4	-13.0	37.4
V	2119.8	-52.1	-50.2	1.2	6.8	-44.6	-13.0	31.6

Date : Apr. 18, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 23.2 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Taiki Watanabe

<Qi non-mounted type>
[WCDMA Band X VII]
16QAM, BW 5MHz
Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.8	-57.0	-63.2	1.0	6.0	-58.2	-13.0	45.2
V	1422.7	-51.5	-53.7	1.0	6.0	-48.7	-13.0	35.7
H	2134.1	-53.9	-53.7	1.2	6.9	-48.0	-13.0	35.0
V	2134.1	-48.0	-44.2	1.2	6.9	-38.5	-13.0	25.5

Note: Qi non-mounted type is tested in the worst mode.

QPSK, BW 10MHz
Channel: 23780

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1057.0	-57.0	-62.4	0.8	4.2	-59.1	-13.0	46.1
H	1409.2	-57.0	-61.2	1.0	5.9	-56.3	-13.0	43.3
V	1409.1	-57.2	-60.6	1.0	5.9	-55.7	-13.0	42.7
H	2113.8	-53.0	-51.8	1.2	6.7	-46.2	-13.0	33.2
V	2113.8	-49.0	-46.1	1.2	6.7	-40.5	-13.0	27.5


Note: Qi non-mounted type is tested in the worst mode.

10. Frequency Stability

10.1 Measurement procedure [FCC 27.54, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and $+50^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

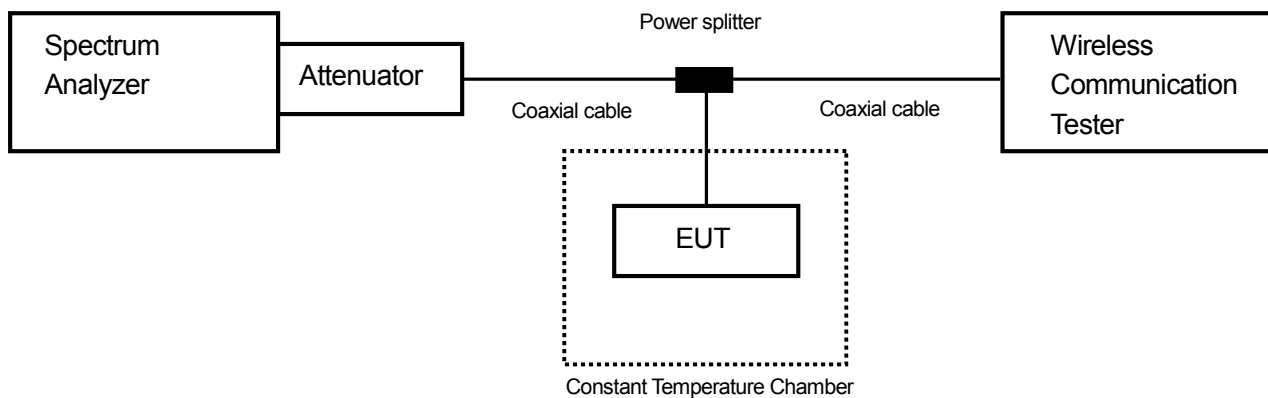

10.2 Limit

$\pm 2.5\text{ppm}$



Zacta

10.3 Measurement result

Date : Apr. 21, 2014 Test personnel
 Temperature : 24.0 [°C]
 Humidity : 46.0 [%] Tested by :
 Test place : Shielded room No.4 Nobuyuki Toda

[WCDMA Band X VII]

(Channel: 23790)

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	709,999,996	0.00000	± 2.5	PASS
	50	709,999,994	-0.00276	± 2.5	PASS
	40	709,999,994	-0.00186	± 2.5	PASS
	30	709,999,995	-0.00144	± 2.5	PASS
	20	709,999,995	-0.00101	± 2.5	PASS
	10	709,999,996	0.00118	± 2.5	PASS
	0	710,000,005	0.01359	± 2.5	PASS
	-10	710,000,005	0.01365	± 2.5	PASS
	-20	710,000,005	0.01393	± 2.5	PASS
	-30	710,000,006	0.01508	± 2.5	PASS
3.230	25	710,000,004	0.01251	± 2.5	PASS
4.370	25	710,000,005	0.01308	± 2.5	PASS

Calculation;

$$\text{Frequency Tolerance (ppm)} = \frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$$

11. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$



Zacta

12. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct.31, 2014
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-			

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory



Appendix A. Test equipment

[Antenna port conducted test]

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 2014	May 14, 2013
Microwave cable	RS	YH_13S5	N/A (S403)	May 2014	May 10, 2013
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322086/4	Jul. 2014	Jul. 30, 2013
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322087/4	Jul. 2014	Jul. 30, 2013
Attenuator	Weinschel	56-10	J4180	Nov. 2014	Nov. 12, 2013
Power splitter	ANRITSU	K240B	020205	Jul. 2014	Jul. 12, 2013
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Aug. 2014	Aug. 7, 2013
Operation type temperature controlled bath	Espec	PL1KP	14007261	Dec. 2014	Dec. 27, 2013

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 2014	Jun. 12, 2013
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 2014	May 1, 2013
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 2014	May 1, 2013
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 2014	Jun. 6, 2013
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 2014	Jun. 6, 2013
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 2014	May 14, 2013
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 2014	Dec. 9, 2013
Dipole antenna	Schwarzbeck	VHAP	1021	Sep. 2014	Sep. 19, 2013
Dipole antenna	Schwarzbeck	UHAP	993	Sep. 2014	Sep. 19, 2013
Double ridged guide antenna	EMCO	3115	5205	Dec. 2014	Dec. 10, 2013
Attenuator	AEROFLEX	40A-03	081217-20	Feb. 2015	Feb. 23, 2014
Double ridged guide antenna	EMCO	3115	00058532	Sep. 2014	Sep. 6, 2013
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Feb. 2015	Feb. 18, 2014
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 2014	Oct. 7, 2013
High pass filter	Micro-Tronics	HPM50115	004	Jul. 2014	Jul. 12, 2013
High pass filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 2014	Jul. 17, 2013
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Aug. 2014	Aug. 7, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	May 2014	May 14, 2013
		SUCOFLEX104/1m	322084/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/1.5m	317226/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/7m	41625/6	Oct. 2014	Oct. 6, 2013
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 2014	May 6, 2013
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 2014	May 6, 2013

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.