

Installation Instructions Please Read Before Installing


Designer-style RF seeTouch™ **Keypads**

STRD-1B, -2B, -3B, -3BRL, -4B, -4FS, -4S, -4SIR, -5B, -5FS, -5BRL, -6B, -6BRL, -7B 120 V ~. 50/60 Hz. 0.2 A

Overview

The STRD-1B, -2B, -3B, -3BRL, -4B, -4FS, -4S, -4SIR, -5B, -5FS, -5BRL, -6B, -6BRL, and -7B keypads are for use with HomeWorks systems. The keypad buttons are programmed with a personal computer using the HomeWorks Utility.

Up to 32 keypads, each with a unique address, can be assigned to each HomeWorks RF Processor.







Wallplate/Adapter purchased separately

Important Notes

Codes: Install in accordance with all local and national electrical codes.

Environment: Ambient operating temperature: 0-40°C, 32-104°F, 0-90% humidity, non-condensing. Indoor use only.

Wallplates: Lutron Claro® and Satin Colors™ wallplates are recommended for best color match and clean aesthetic appearance. Do not paint controls or wallplates.

Cleaning: To clean, wipe with a clean damp cloth. **DO NOT** use any chemical cleaning solutions.

Wallboxes: Lutron recommends using 3-1/2 in. (89 mm) deep wallboxes for easier installation.

RF Device Placement: RF Keypads must be located within 30 ft. (9 m) of an RF Signal Repeater or an RF Processor.

RF Keypads will not function until they are addressed and programmed using the HomeWorks Utility.

Installation

1. Turn power OFF at fusebox or circuit breaker.




Danger - Locate and remove fuse or lock circuit breaker in the OFF position before proceeding. Wiring with power ON may result in personal injury.

2. Prepare wires. When making wire connections, follow the recommended strip lengths and combinations for the supplied wire connectors. Note: Wire connectors provided are suitable for copper wire only.

Small:

Strip insulation 3/8 in. (10 mm) for 14 AWG (2.5 mm²). Strip insulation 1/2 in. (13 mm) for 16 AWG (1.5 mm²).



3. Wiring: See Wiring Diagram.


- **4.** Push all wires back into the wallbox and loosely fasten the control to the wallbox using the keypad mounting screws provided. Do not pinch the wires.
- 5. Attach Lutron Claro or Satin Colors wallplate adapter and
 - a. Loosely install keypad mounting screws.
 - b. Tighten wallplate adapter mounting screws snug.
 - c. Tighten keypad mounting screws until wallplate adapter is flush to wall (do not over-tighten).
 - d. Snap wallplate onto wallplate adapter, and verify that buttons are not submerged.
 - e. If buttons are submerged, loosen keypad mounting screws appropriately.
- 6. Restore power.

Troubleshooting Guide


RF Keypads will not function until they are addressed and programmed using the HomeWorks Utility.

| Symptom | Cause and Action |
|--|---|
| LEDs don't light up when buttons are pressed. | Power not present at keypad |
| | Circuit breaker OFF. Turn ON breaker. |
| | Wiring error. Check wiring to be sure it agrees with installation instructions. |
| Button presses on keypad cause the keypad to <i>quickly</i> flash all its LEDs simultaneously. | Keypad has not been addressed. |
| | Address the keypads using the HomeWorks Utility. |
| Button presses on keypad cause the keypad to <i>slowly</i> flash all its LEDs simultaneously. | Keypad has an address, but has not had programming uploaded. |
| | Upload to the system using the HomeWorks Utility. |
| Keypad cannot be addressed. | Keypad is out of RF communications range. |
| | Move RF Signal Repeater or RF Processor to within 30 feet (9 m) of keypad. |
| LEDs light when button is pressed, but the system response is not correct. | Improper programming |
| | Check programming in <i>HomeWorks</i> Utility. |
| | • |

Mounting Diagram

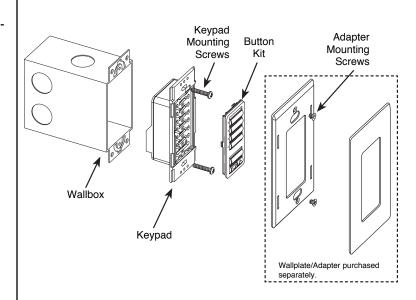

Wiring Diagram



Technical and Sales Assistance

If you need assistance, call the toll-free *Lutron Technical Support Center*. Please provide exact (800) 523-9466 (U.S.A., Canada and the Caribbean Other countries call:

(610) 282-3090 Visit our Web site at www.lutron.com

FCC Information

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Parl 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed in accordance with the instructions, may cause harmful interference to radio communications. However, there is no quarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

• Reorient or relocate the receiving antenna.

- Increase the seperation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected Consult the dealer or an experienced radio/TV technician for help

Caution: Changes or modifications not expressly approved by Lutron Electronics Co. could void the user's authority to

LIMITED WARRANTY

utron will, at its option, repair or replace any unit that is defective in materials or manufacture within two years after purchase. For warranty sen ice, return unit to place of purchase or mail to Lutron at 7200 Suter Rd., Coopersburg, PA 18036-1299, postage pre-paid. Telephone the Lutro Technical Support Center toll free at 800-523-9466. After the two year period, a pro-rated warranty applies to this product until eight years after the purchase. For more information regarding this warranty contact your Lutron representative.

THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES, AND THE IMPLIED WARRANTY OF MERCHANTABILITY IS LIM-

ITED TO TWO YEARS FROM PURCHASE. THIS WARRANTY DOES NOT COVER THE COST OF INSTALLATION, REMOVAL OR REIN STALLATION, OR DAMAGE RESULTING FROM MISUSE, ABUSE, OR IMPROPER OR INCORRECT REPAIR, OR DAMAGE FROM IMPROPER OR INCORRECT REPAIR, OR DAMAGE FROM IMPROPER OR WINCORRECT REPAIR, OR DAMAGE FROM IMPROPER OR WINCORRECT REPAIR, OR DAMAGES AUTRON'S LIABILITY ON ANY CLAIM FOR DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE MANUFACTURE, SALE, INSTALLATION, DELIVERY, OR USE OF THE UNIT SHALL NEVER EXCEED THE PURCHASE PRICE OF THE UNIT.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

These products may be covered under one or more of the following U.S., patents: 4,835,343; 4,889,999; 5,170,068; 5,237,207; 5,736,965; 5,838,226; 5,848,054; 5,905,442; 5,982,103; D436,930; D453,742; D456,783; D461,782; D465,460; D465,770; D466,090; D466,091; D466,484 and corresponding foreign patents. U.S. and foreign patents personal patents and corresponding foreign patents between the corresponding foreign patents bet

