



Test Report: 6W74284

Applicant: Mark IV Industries Corp.
6020 Ambler Drive
Mississauga, ON
L4W 2P1

Apparatus: G4 Transponder 801630-TAB

FCC ID: JQU 801630

In Accordance With: FCC Part 90
Private Land Mobile Radio Services
Class II Permissive Change

Tested By: Nemko Canada Inc.
303 River Road
Ottawa, Ontario
K1V 1H2

A handwritten signature in blue ink, appearing to read 'Jason Nixon'.

Authorized By: Jason Nixon, Telecom Specialist

Date: October 19, 2006

Total Number of Pages: 19

Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90. Conducted measurements were performed in accordance with ANSI TIA-603-B-2002. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed:	G4 Transponder 801630-TAB
Specification:	FCC Part 90 Private Land Mobile Radio Services
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None
Report Release History:	Original Release

Author: Xu Jin, Wireless Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Report Summary	2
Section 1 : Equipment Under Test	4
1.1 Product Identification	4
1.2 Samples Submitted for Assessment.....	4
1.3 Technical Specifications of the EUT	5
Section 2 : Test Conditions	6
2.1 Specifications	6
2.2 Deviations From Laboratory Test Procedures	6
2.3 Test Environment	6
2.4 Test Equipment.....	6
Section 3: Observations	7
3.1 Modifications Performed During Assessment	7
3.2 Record Of Technical Judgements	7
3.3 EUT Parameters Affecting Compliance	7
3.4 Test Deleted.....	7
3.5 Additional Observations	7
Section 4: Results Summary	8
4.1 FCC Part 90: Test Results	9
Appendix A: Test Results	10
Clause 90.205 Output Power	10
Clause 90.210 Spurious emissions.....	12
Clause 90.213 Frequency Stability	15
Appendix B: Set-up Photographs	17
Appendix C : Block Diagram of Test Setups	18

Section 1 : Equipment Under Test

1.1 Product Identification

The Equipment Under Test was identified as follows: G4 Transponder 801630-TAB

1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
1	G4 transponder MN # 801630-TAB	5UME-41718
2	G4 transponder MN # 801630-TAB	5UME-48714

The first samples were received on: Oct.10, 2006

1.3 Technical Specifications of the EUT

Manufacturer:	Mark IV Industries Corp.
Operating Frequency:	915 MHz
Measured Power:	Conducted: -2.96dBm ERP: -13.2dBm
Modulation:	On-Off Keying
Antenna Data:	Internal integrated antenna etched on the PCB
Power Source:	3.6 VDC Battery

Section 2 : Test Conditions

2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 2 Subpart J, Equipment Authorization Procedures
FCC Part 90 Private Land Mobile Radio Services

2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range : 15 – 30 °C
Humidity range : 20 - 75 %
Pressure range : 86 - 106 kPa
Power supply range : +/- 5% of rated voltages

2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSU	FA001877	May 10/07
Spectrum Analyzer	Hewlett-Packard	8566B	FA001309	May 16/07
Spectrum Analyzer Display	Hewlett-Packard	85662A	FA001309	May 16/07
Horn Antenna #2	EMCO	3115	FA000825	Dec. 16/06
Log Periodic Antenna #2	EMCO	3148	FA001355	May 16/07
Biconical (1) Antenna	EMCO	3109	FA000805	May 03/07
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	Aug 02/07
2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	Aug 02/07
4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	Aug 02/07
5.0 - 18GHz Amplifier	Narda	DWT-186N23U40	FA001409	COU
Climate Chamber	Thermotron	SM-16C	15649-S	COU

COU – Cal. On Use

Section 3: Observations

3.1 Modifications Performed During Assessment

No modifications were performed during assessment.

3.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

3.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

3.4 Test Deleted

No Tests were deleted from this assessment.

3.5 Additional Observations

There were no additional observations made during this assessment.

Section 4: Results Summary

This section contains the following:

FCC Part 90: Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

- N No: not applicable / not relevant.
- Y Yes: Mandatory i.e. the apparatus shall conform to these tests.
- N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

4.1 FCC Part 90: Test Results

Clause	Test Method	Test Description	Required	Result
90.205	2.1046	Output power	Y	Complies
90.210	2.1053	Spurious Emission	Y	Complies
90.213	2.1055	Frequency stability	Y	Complies

Appendix A: Test Results

Clause 90.205 Output Power

LMS systems operating pursuant to Subpart M of this part in the 902-927.25 MHz band will be authorized a maximum of 30 watts ERP

Test Conditions:

Sample Number:	1, 2	Temperature:	24 °
Date:	Oct. 12, 2006	Humidity:	51 %
Modification State:	0	Tester:	Xu Jin
		Laboratory:	Ottawa

Test Results: Complies.

Test Data: See plots and table.

Additional Observations:


Both conducted measurement and radiated measurement have been performed for output power test.

The EUT was tested with a fresh battery.

For radiated measurement, the EUT was searched in 3 orthogonal axes to determine worst-case emissions.

The radiated test was performed using a Peak Detector with 10MHz/10MHz RBW/VBW, at a distance of 3 meters.

Conducted Output Power Measurement:

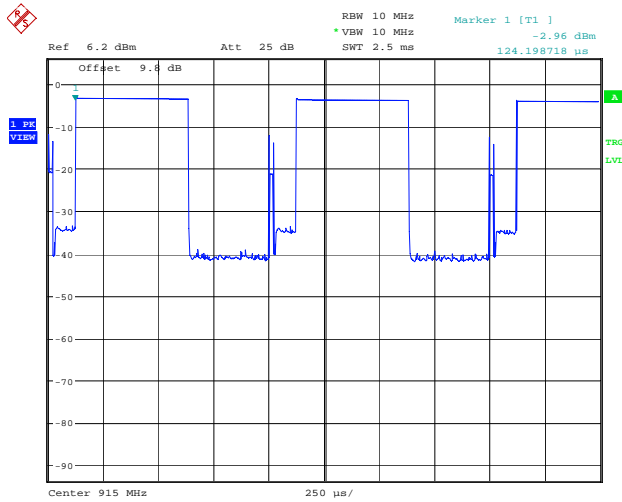

Date: 10.OCT.2006 11:17:30

The maximum measured conducted output power = -2.96dBm

Radiated Output power Measurement

Frequency (MHz)	Antenna	Polarity	RCVD Signal (dBμV)	Sig. Sub. Factor (dB)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Detector
915.0000	Horn2	H	50.2	-72.8	-22.7	44.77	67.47	Peak
915.0000	Horn2	V	59.5	-72.7	-13.2	44.77	57.97	Peak

Clause 90.210 Spurious emissions

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere, the Table below specifies the emission masks for equipment operating in the frequency bands governed under this part.

Test Conditions:

Sample Number:	1	Temperature:	24 °
Date:	Oct. 10, 2006	Humidity:	51 %
Modification State:	0	Tester:	Xu Jin
		Laboratory:	Ottawa

Test Results: Complies

Test Data: See Attached Plots and tables.

Note: Both conducted measurement and radiated measurement have been performed for output power test.

The EUT was tested with a fresh battery.


The EUT was searched in 3 orthogonal axes to determine worst-case emissions.

The spectrum was searched for emissions from 30MHz to 10GHz.


All measurements were performed using a Peak Detector with 100kHz/300KHz RBW/VBW below 1GHz and a 1MHz/3MHz RBW/VBW above 1GHz, at a distance of 3 meters.

Only the worst case has been presented.

Conducted Emissions_ Tx was operated at 915MHz

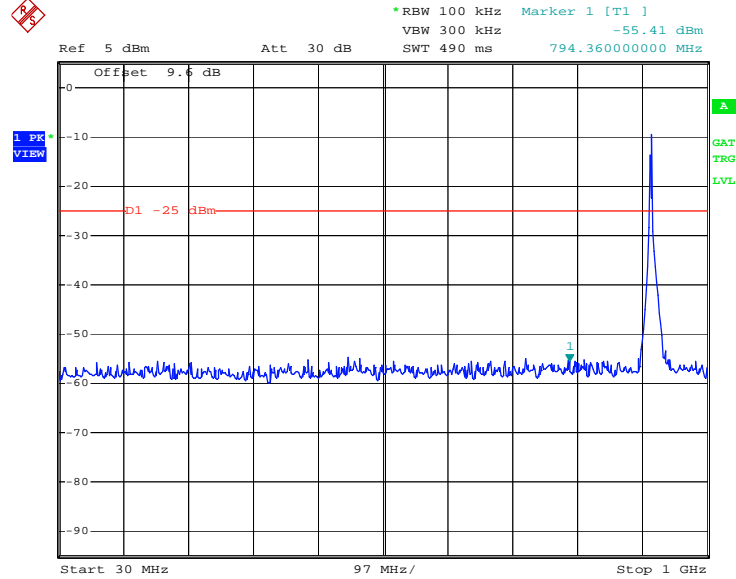

Date: 13.OCT.2006 16:26:30

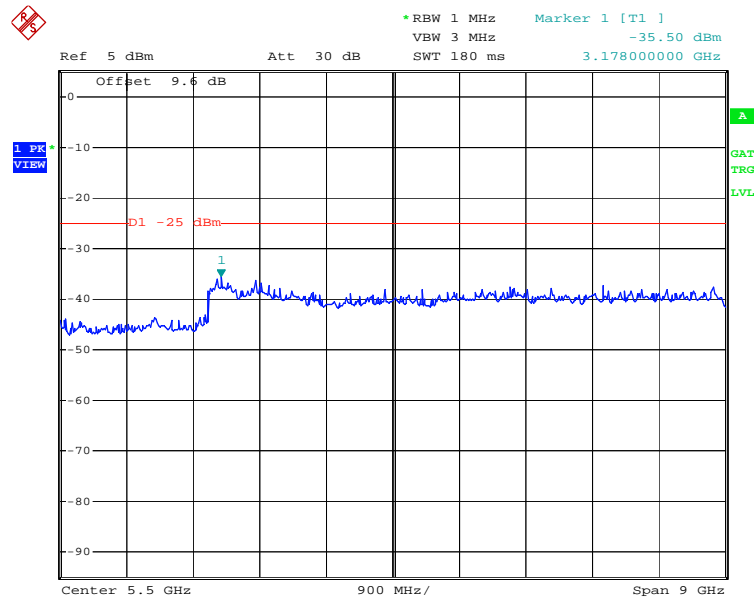

Date: 13.OCT.2006 16:28:09

Radiated Spurious Emissions

Frequency (MHz)	Antenna	Polarity	RCVD Signal (dBµV)	Sig. Sub. Factor	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Detector
1830.0000	Horn2	V	76.4	-115.8	-39.4	-25	14.4	Peak
1830.0000	Horn2	H	70.6	-114.8	-44.2	-25	19.2	Peak
3660.0000	Horn2	H	80.1	-117.5	-37.5	-25	12.5	Peak
3660.0000	Horn2	V	80.2	-116.1	-35.8	-25	10.8	Peak

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole
 Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW
 Below 1GHz, Peak detector with 100 kHz RBW, 100KHz VBW
 Above 1GHz, Peak detector with 1.0MHz RBW, 1.0MHz VBW

Clause 90.213 Frequency Stability

a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following Table.

Minimum Frequency Stability
parts per million (ppm)

Frequency range (MHz)	Fixed and base stations 2 watts output power	Mobile stations Over power	2 watts or less output
Below 25	100	100	200
25-50	20	20	50
72-76	5	---	50
150-174	50	5	50
216-220	1.0	---	1.0
220-222	0.1	1.5	1.5
421-512	2.5	5	5
806-809	1.0	1.5	1.5
809-824	1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	0.1	1.5	1.5
902-928	2.5	2.5	2.5

Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency stability restrictions.

929-930	1.5	---	---
935-940	0.1	1.5	1.5
1427-1435	300	300	300
Above 2450	---	---	---

Test Conditions:

Sample Number:	1	Temperature:	23°
Date:	Oct. 11, 2006	Humidity:	51%
Modification State:	0	Tester:	Xu Jin
		Laboratory:	Ottawa

Test Results: See Attached Table.

Test Conditions Ambient Temperature: 23°C
Extreme Temperature: -30°C to +50°C
The EUT was tested with a fresh battery.

Test Data: See Attached tables

Note: Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency stability restrictions.

Temperature (°C)	Measured Frequency (MHz)	Frequency Draft (PPM)
Ambient	915.1395701	---
-30	915.1587489	20.96
-20	915.1537481	15.49
-10	915.1567473	18.77
0	915.1617475	24.23
10	915.1616987	24.18
20	915.1498077	11.19
30	915.1307442	-9.64
40	915.1057070	-37.00
50	915.0825736	-62.28

Appendix B: Set-up Photographs

Radiated Emissions Setup:




Conducted Measurement Setup:




Appendix C : Block Diagram of Test Setups

Effective Radiated Power of Spurious Emissions by Substitution Method (TIA/EIA 603)

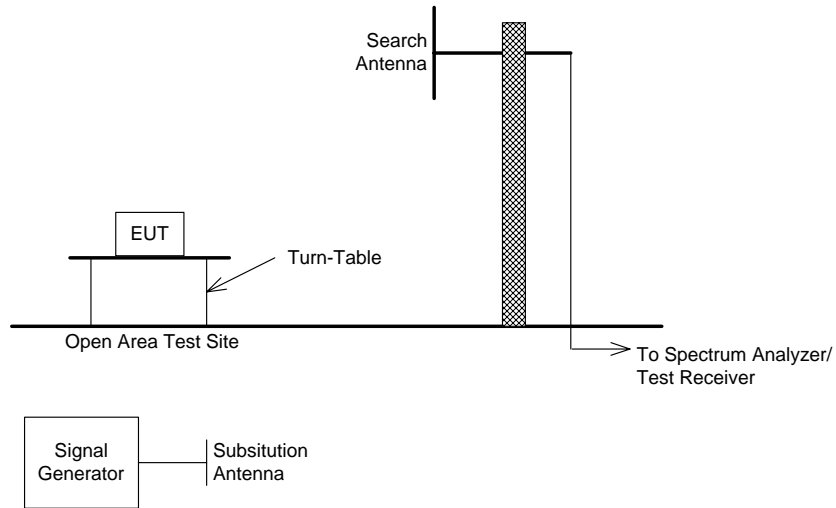

RF Conducted Emissions

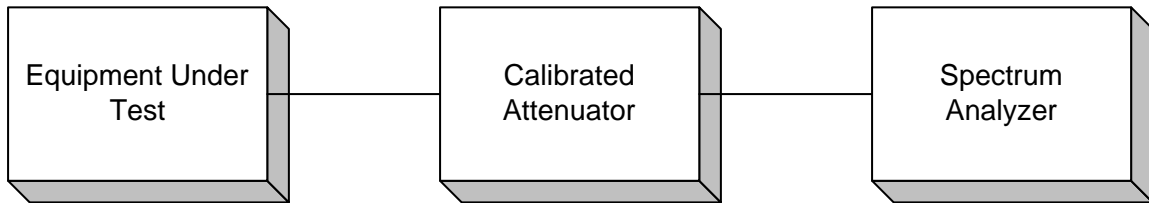

Frequency Stability (Para. No. 2.1055)

