



Test Report

Product Name : Bluetooth Stereo Headphone
Model No. : HHB-180, HHB-181, HHB-182, HHB-183,
HHB-185, HHB-186, HHB-187, HHB-188
FCC ID. : JVPHHB-180
Reference Number : KT-6493

Applicant : BenQ Corporation

Address : 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Date of Receipt : March 07, 2006

Issued Date : March 27, 2006

Report No. : 063L034-RF-US-P06V01

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: March 27, 2006

Report No.: 063L034-RF-US-P06V01



Product Name : Bluetooth Stereo Headphone
Applicant : BenQ Corporation
Address : 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan, R.O.C.
Manufacturer : BenQ Corporation
Model No. : HHB-180, HHB-181, HHB-182, HHB-183, HHB-185,
HHB-186, HHB-187, HHB-188
FCC ID. : JVPHHB-180
Rated Voltage : AC 120V/60Hz
Working Voltage : DC 3.7V
Trade Name : BenQ-Siemens
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2005
ANSI C63.4: 2003
CISPR 22: 2005
Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Rita Huang

(Rita Huang)



Tested By : Tom Hsieh

(Tom Hsieh)

Approved By : Gene Chang

(Gene Chang)



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Operational Description	7
1.3. Tested System Details	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
2. CONDUCTED EMISSION	11
2.1. Test Equipment	11
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission	13
3. PEAK POWER OUTPUT	15
3.1. Test Equipment	15
3.2. Test Setup	15
3.3. Limit	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output	16
4. RADIATED EMISSION	17
4.1. Test Equipment	17
4.2. Test Setup	18
4.3. Limits	18
4.4. Test Procedure	19
4.5. Uncertainty	19
4.6. Test Result of Radiated Emission	20
5. BAND EDGE	26
5.1. Test Equipment	26
5.2. Test Setup	26
5.3. Limit	27
5.4. Test Procedure	27
5.5. Uncertainty	27
5.6. Test Result of Band Edge	28
6. CHANNEL NUMBER.....	32
6.1. Test Equipment	32

6.2.	Test Setup	32
6.3.	Limit	32
6.4.	Uncertainty	32
6.5.	Test Result of Channel Number.....	33
7.	CHANNEL SEPARATION.....	34
7.1.	Test Equipment	34
7.2.	Test Setup	34
7.3.	Limit	34
7.4.	Uncertainty	34
7.5.	Test Result of Channel Separation.....	35
8.	DWELL TIME.....	36
8.1.	Test Equipment	36
8.2.	Test Setup	36
8.3.	Limit	36
8.4.	Uncertainty	36
8.5.	Test Result of Dwell Time.....	37
9.	OCCUPIED BANDWIDTH	39
9.1.	Test Equipment	39
9.2.	Test Setup	39
9.3.	Limits.....	39
9.4.	Uncertainty	39
9.5.	Test Result of Occupied Bandwidth	40
10.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	43

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Note:

1. This device is Bluetooth Stereo Headphone including a 2.4GHz transceiver.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regards to the frequency band operation; the lowest 、 middle and highest frequency of channel were selected to perform the test, then shown on this report.
4. This device is a composite device in accordance with Part 15 Subpart B regulations. The function for the receiver was measured and made a test report that the report number is 063L034-RF-US-P01V02, certified under Declaration of Conformity.
5. QuieTek verified among construction and function in typical operation, then shown in this test report.

1.2. Operational Description

The EUT is a Bluetooth Stereo Headphone with 79 channels.

This device provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, Bluetooth-enabled peripherals, and portable handheld devices.

Test Mode:	Mode 1: Transmitter
------------	---------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
(2)	DC Power Supply	Agilent	E3610A	MY40009845	Non-Shielded, 1.8m
(3)	Contrd Board	N/A	N/A	N/A	N/A
(4)	Earphone	BenQ	N/A	N/A	N/A
(5)	Adapter	BenQ	JSP054070UU	N/A	N/A

Signal Cable Type	Signal cable Description
A. RS-232 Cable	Non-Shielded, 1.5m with one ferrite core bonded
B. Power Cable	Non-Shielded, 1.8m
C. Earphone Cable	Non-Shielded, 0.8m
D. Signal Cable	Non-Shielded, 0.1m
E. Power Cable	Non-Shielded, 1.8m

1.4. Configuration of Tested System

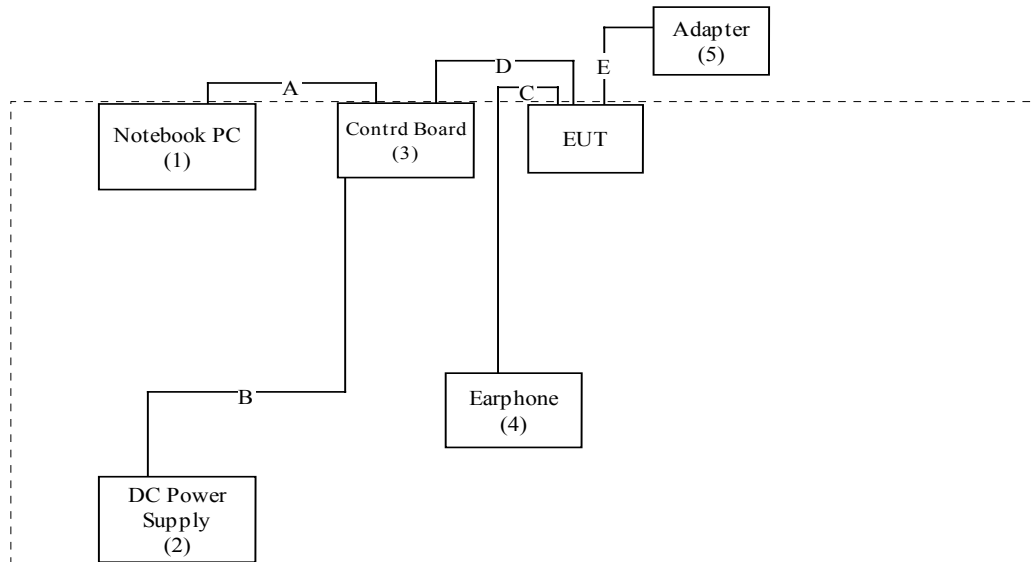

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Connect the EUT to the notebook via a control board and a RS232 cable.
- (3) Execute the BlueTest program on the notebook.
- (4) Setup the test channel and the data mode.
- (5) Press OK to start the continuous transmission.
- (6) Verify the EUT operation properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



July 03, 2001 Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2005	
2	L.I.S.N.	R & S	ENV4200 / 848411/10	Feb., 2006	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2005	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2006	
5	No.1 Shielded Room				

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

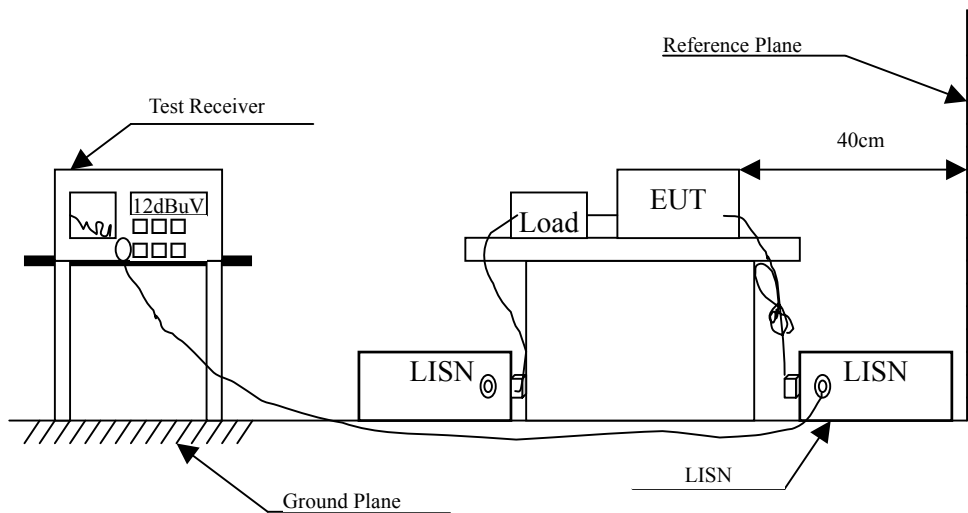

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

2.6. Test Result of Conducted Emission

Product : Bluetooth Stereo Headphone
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Quasi-Peak					
0.173	0.678	45.980	46.658	-18.685	65.343
0.228	0.451	43.770	44.221	-19.550	63.771
0.403	0.300	54.190	54.490	-4.281	58.771
0.461	0.300	50.580	50.880	-6.234	57.114
1.154	0.320	44.730	45.050	-10.950	56.000
5.654	0.450	42.670	43.120	-16.880	60.000
Average					
0.173	0.678	36.240	36.918	-18.425	55.343
0.228	0.451	34.290	34.741	-19.030	53.771
0.403	0.300	45.070	45.370	-3.401	48.771
0.461	0.300	41.180	41.480	-5.634	47.114
1.154	0.320	36.140	36.460	-9.540	46.000
5.654	0.450	37.740	38.190	-11.810	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Stereo Headphone
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Quasi-Peak					
0.346	0.306	46.670	46.976	-13.424	60.400
0.459	0.310	44.120	44.430	-12.741	57.171
0.761	0.320	36.230	36.550	-19.450	56.000
1.150	0.330	39.550	39.880	-16.120	56.000
4.787	0.410	35.770	36.180	-19.820	56.000
4.959	0.420	38.040	38.460	-17.540	56.000
Average					
0.346	0.306	35.160	35.466	-14.934	50.400
0.459	0.310	32.310	32.620	-14.551	47.171
0.761	0.320	25.610	25.930	-20.070	46.000
1.150	0.330	27.780	28.110	-17.890	46.000
4.787	0.410	23.890	24.300	-21.700	46.000
4.959	0.420	26.720	27.140	-18.860	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output


3.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	EMI Test Receiver	R&S	ESI 26 / 838786/004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

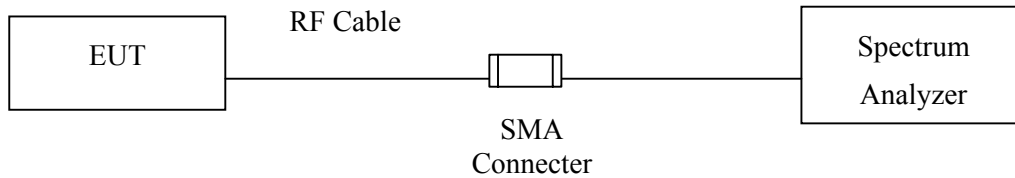

3.3. Limit

The maximum peak power shall be less 1Watt.




3.4. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

3.5. Test Result of Peak Power Output

Product : Bluetooth Stereo Headphone
 Test Item : Peak Power Output
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
Channel 00	2402.00	2.74dBm	1 Watt= 30 dBm	Pass
Channel 39	2441.00	2.58dBm	1 Watt= 30 dBm	Pass
Channel 78	2480.00	2.48dBm	1 Watt= 30 dBm	Pass

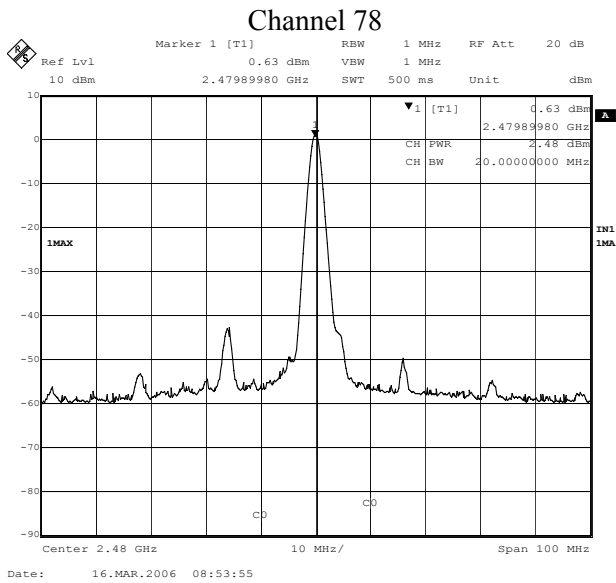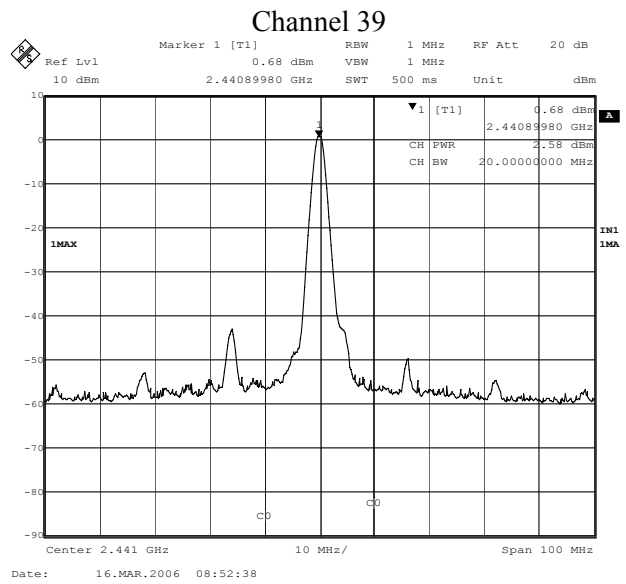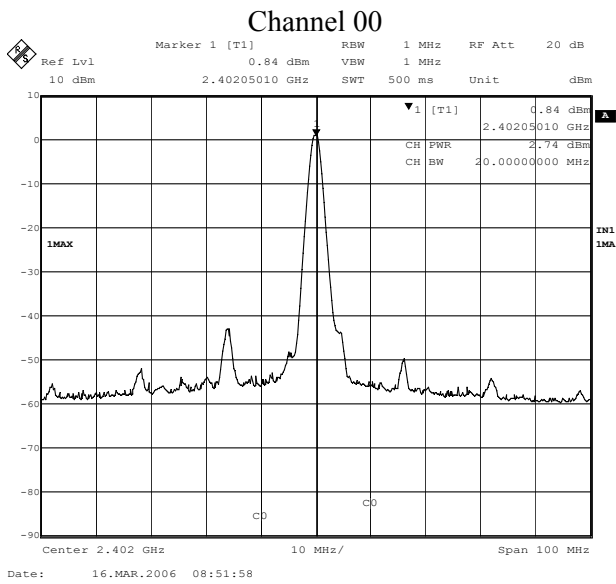

4. Radiated Emission


4.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	May, 2005
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2005
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2005
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2005
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2005
	Horn Antenna	ETS	3115 / 0005-6160	Sep., 2005
	Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2005
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2005
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2005
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2005
	Horn Antenna	Schwarzbeck	9120D / 305, 306	July, 2005
	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2005
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2005
	Pre-Amplifier	HP	8449B / 3008A01123	July, 2005
Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P	May, 2005	

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

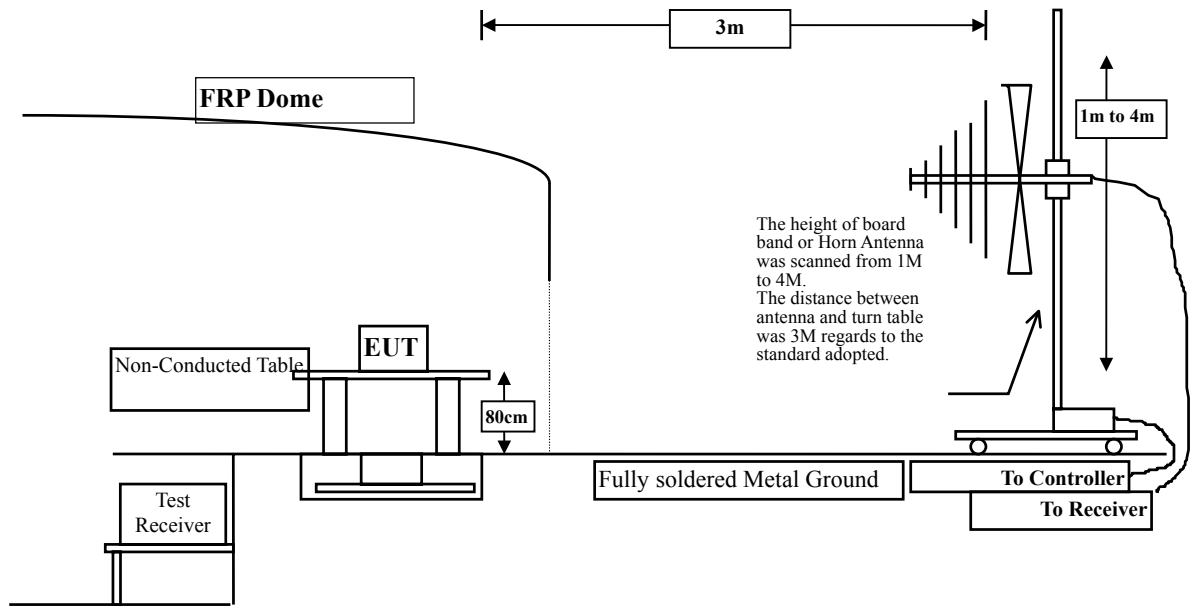

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB

under 1G is defined as ± 3.8 dB

4.6. Test Result of Radiated Emission

Product : Bluetooth Stereo Headphone
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

Peak Detector:

4804.000	3.663	36.787	40.449	-33.521	74.000
7206.000	9.357	36.122	45.478	-28.492	74.000
9608.000	11.842	36.453	48.295	-25.675	74.000

Average Detector:

--

Vertical

Peak Detector:

4804.500	3.665	40.258	43.922	-30.048	74.000
7206.000	9.357	35.989	45.345	-28.625	74.000
9608.000	11.842	36.905	48.747	-25.223	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Stereo Headphone
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4882.500	3.924	37.857	41.780	-32.190	74.000
7323.500	9.658	38.547	48.205	-25.765	74.000
9764.500	11.798	38.036	49.834	-24.136	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4882.000	3.921	39.009	42.930	-31.040	74.000
7323.500	9.658	38.300	47.958	-26.012	74.000
9764.500	11.798	38.631	50.429	-23.541	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Stereo Headphone
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4960.000	4.197	38.044	42.240	-31.730	74.000
7440.000	9.951	37.933	47.884	-26.086	74.000
9920.000	11.856	37.438	49.294	-24.676	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4960.000	4.197	37.448	41.644	-32.326	74.000
7440.000	9.951	37.872	47.823	-26.147	74.000
9920.000	11.856	38.657	50.513	-23.457	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Stereo Headphone
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
107.600	13.064	19.980	33.044	-10.456	43.500
204.600	9.806	19.400	29.206	-14.294	43.500
243.400	12.282	19.300	31.582	-14.418	46.000
352.100	14.871	10.360	25.231	-20.769	46.000
370.100	15.865	12.480	28.346	-17.654	46.000
415.500	17.637	17.700	35.337	-10.663	46.000
Vertical					
110.000	11.923	23.100	35.024	-8.476	43.500
199.900	9.703	19.100	28.803	-14.697	43.500
531.900	19.230	7.900	27.130	-18.870	46.000
781.730	22.269	14.120	36.388	-9.612	46.000
799.100	21.735	7.910	29.645	-16.355	46.000
815.100	21.721	12.100	33.821	-12.179	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. "█" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Stereo Headphone
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
151.200	11.589	14.120	25.709	-17.791	43.500
156.100	11.251	12.600	23.851	-19.649	43.500
180.300	9.544	18.900	28.444	-15.056	43.500
228.850	10.940	24.300	35.240	-10.760	46.000
376.700	15.837	16.830	32.667	-13.333	46.000
418.100	17.684	12.330	30.014	-15.986	46.000
Vertical					
112.400	11.958	19.600	31.558	-11.942	43.500
165.800	9.641	13.300	22.941	-20.559	43.500
216.600	10.677	18.100	28.777	-17.223	46.000
333.100	14.321	17.600	31.921	-14.079	46.000
391.300	17.337	18.100	35.437	-10.563	46.000
534.400	19.448	18.700	38.148	-7.852	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. "█" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Stereo Headphone
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
119.700	12.953	20.300	33.253	-10.247	43.500
204.600	9.806	19.600	29.406	-14.094	43.500
335.500	14.404	18.500	32.904	-13.096	46.000
352.200	14.895	13.600	28.495	-17.505	46.000
403.400	16.818	15.680	32.498	-13.502	46.000
745.300	20.861	11.490	32.351	-13.649	46.000
Vertical					
110.030	11.936	13.180	25.115	-18.385	43.500
166.100	9.658	23.510	33.167	-10.333	43.500
228.800	11.150	17.170	28.319	-17.681	46.000
415.500	19.614	15.580	35.194	-10.806	46.000
531.900	19.230	17.890	37.120	-8.880	46.000
619.900	21.564	7.700	29.264	-16.736	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. "█" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

5. Band Edge

5.1. Test Equipment


The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2005
X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2005
X	Spectrum Analyzer	HP	E4407B / US39440758	May, 2005
X	Pre-Amplifier	HP	8447D/3307A01812	May, 2005
X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2005
X	Horn Antenna	EM	EM6917 / 103325	May, 2005

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

RF Radiated Measurement:

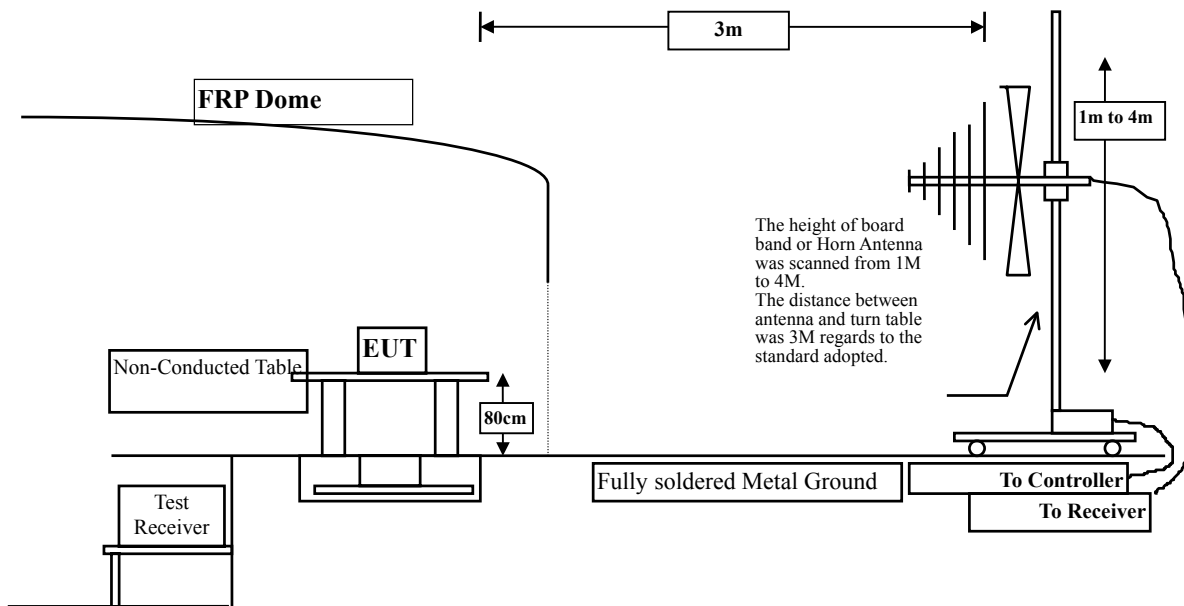

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

5.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
under 1G is defined as ± 3.8 dB

5.6. Test Result of Band Edge

Product : Bluetooth Stereo Headphone
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2384.750	47.733	45.330	74.00	54.00	Pass
00 (Average)	--	--	--	74.00	54.00	Pass

Figure Channel 00: (Horizontal)

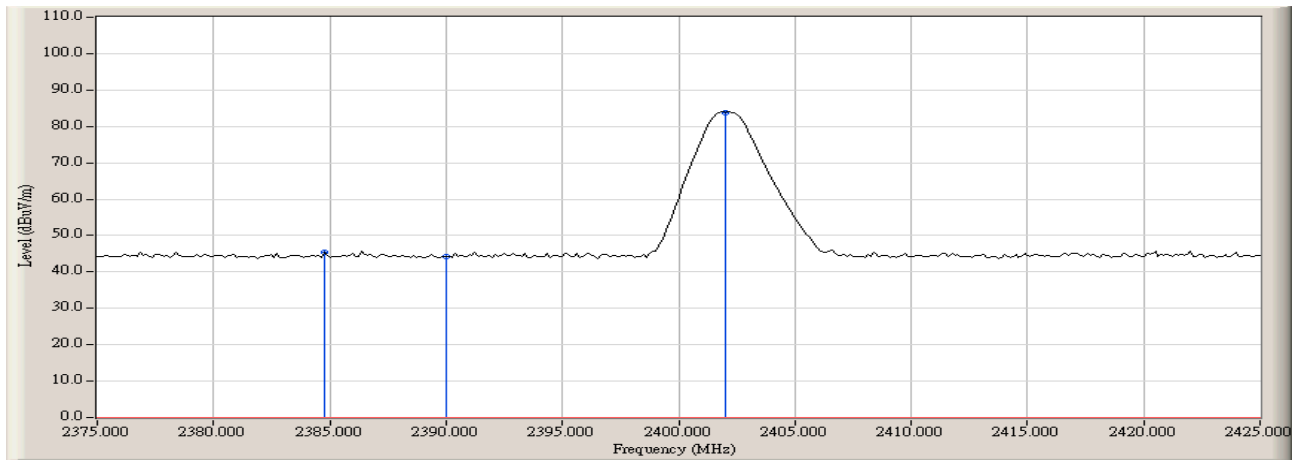

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth Stereo Headphone
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2386.380	50.055	47.660	74.00	54.00	Pass
00(Average)	--	--	--	74.00	54.00	Pass

Figure Channel 00: (Vertical)

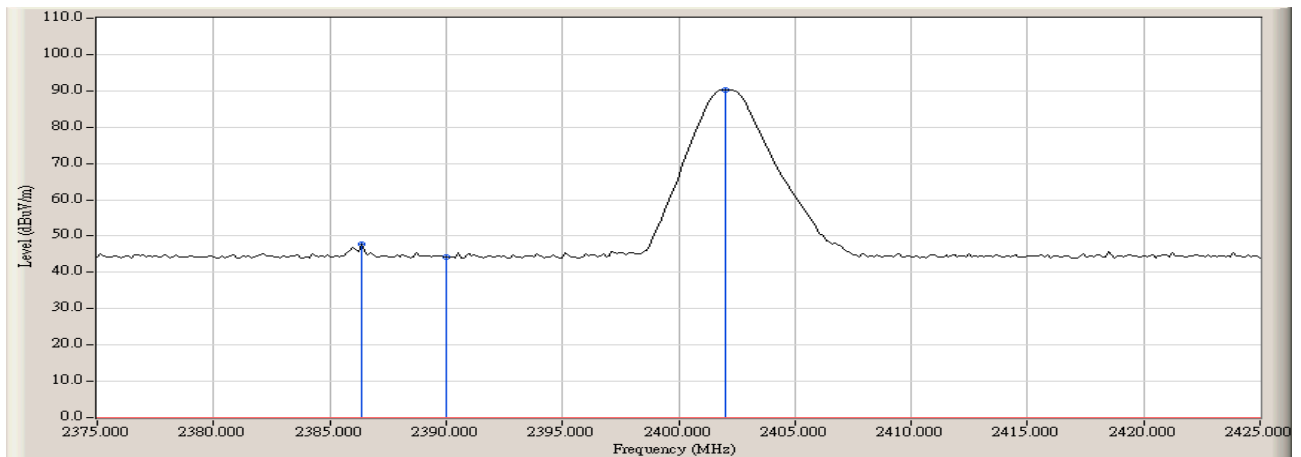

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth Stereo Headphone
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78(Peak)	2483.500	51.177	49.240	74.00	54.00	Pass
78(Average)	--	--	--	74.00	54.00	Pass

Figure Channel 78: (Horizontal)

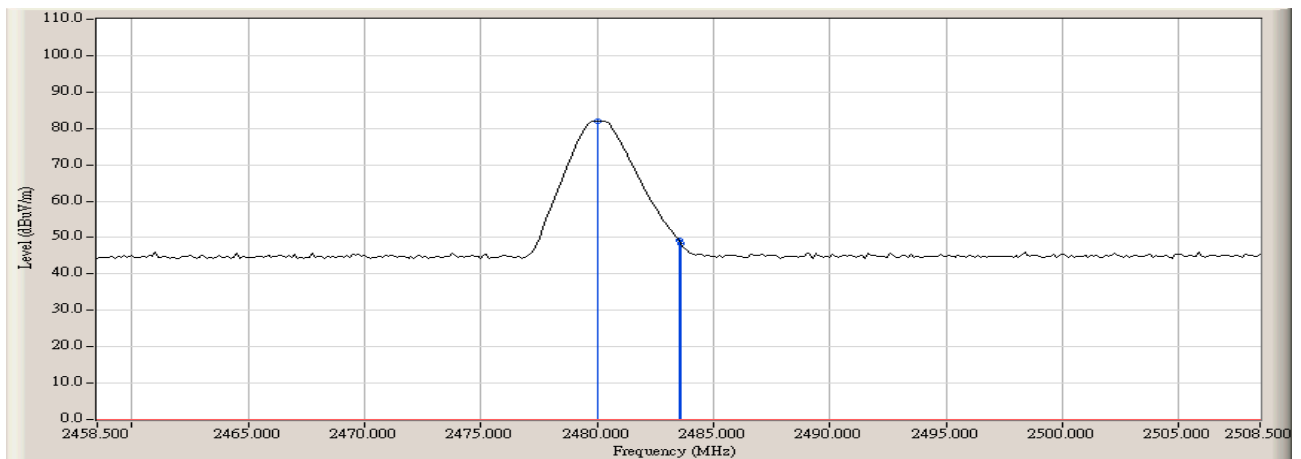

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth Stereo Headphone
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Reading Level (dBUV)	Emission Level (dBUV/m)	Peak Limit (dBUV/m)	Average Limit (dBUV/m)	Result
78(Peak)	2483.500	56.897	54.960	74.00	54.00	Pass
78(Average)	--	--	--	74.00	54.00	Pass

Figure Channel 78: (Vertical)

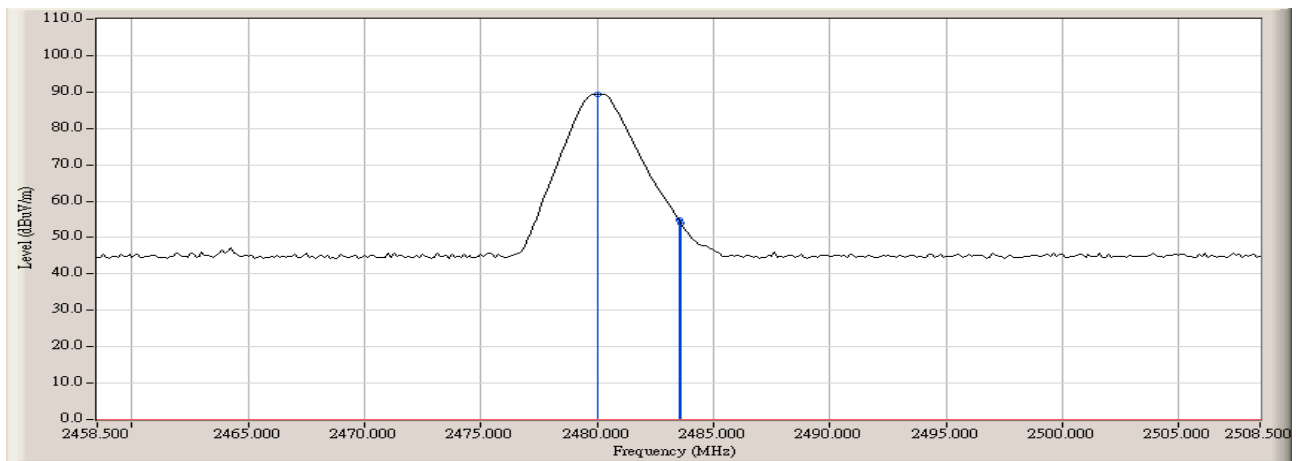

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

6. Channel Number


6.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	EMI Test Receiver	R&S	ESI 26 / 838786/004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark “X” test instruments are used to measure the final test results.

6.2. Test Setup

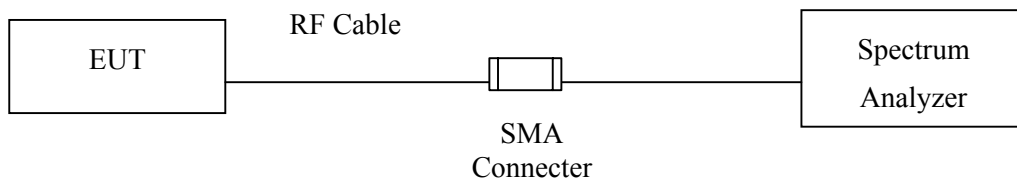

6.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

6.4. Uncertainty


The measurement uncertainty is defined as $\pm 200\text{kHz}$

6.5. Test Result of Channel Number


Product : Bluetooth Stereo Headphone
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

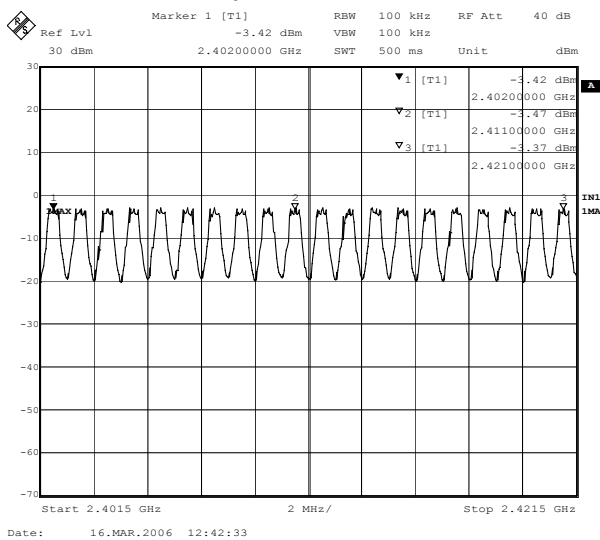


2422-2441MHz

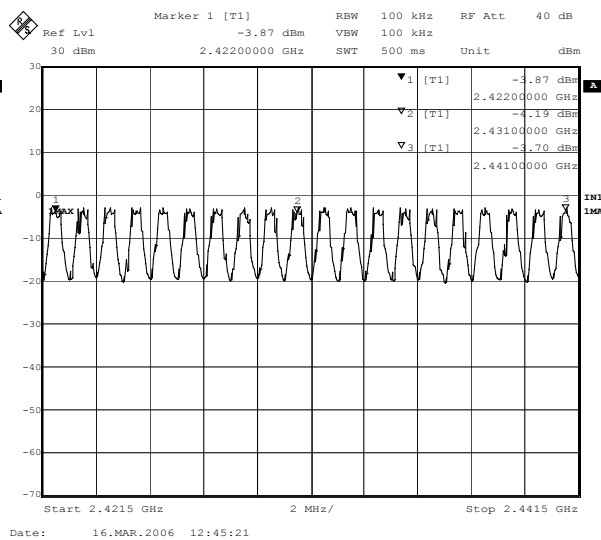

2442-2471MHz

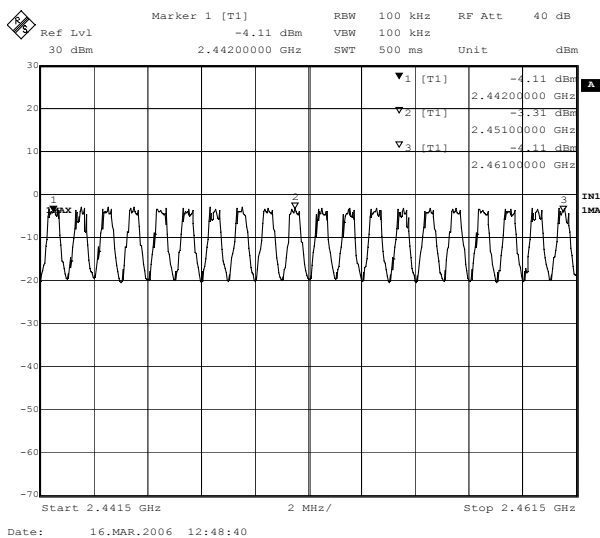

2472-2481MHz

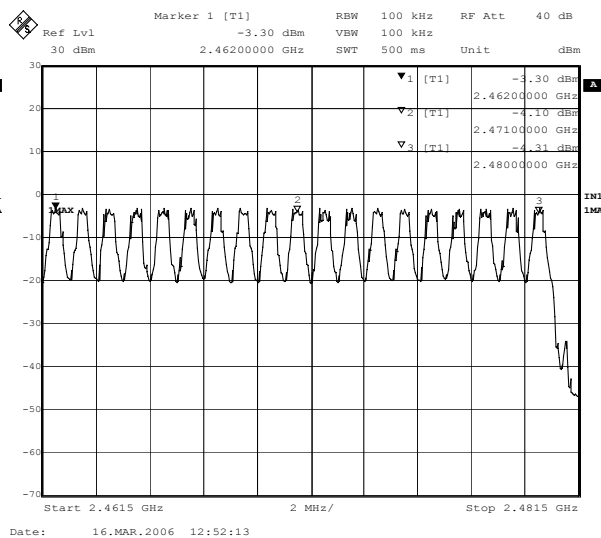

7. Channel Separation


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	EMI Test Receiver	R&S	ESI 26 / 838786/004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark “X” test instruments are used to measure the final test results.

7.2. Test Setup

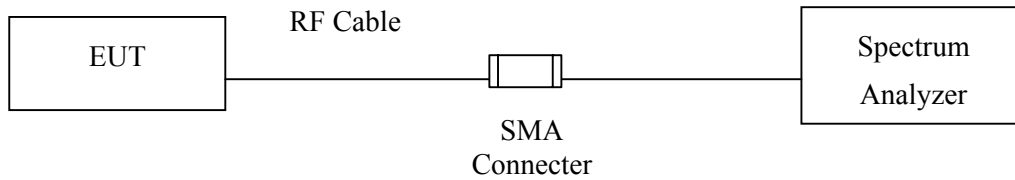

7.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.4. Uncertainty


The measurement uncertainty is defined as $\pm 150\text{Hz}$

7.5. Test Result of Channel Separation


Product : Bluetooth Stereo Headphone
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency (MHz)	Measurement Level (MHz)	Required Limit	Result
2402	1.00	>25 kHz or 2/3 * 20 dB BW	Pass
2441	1.00	>25 kHz or 2/3 * 20 dB BW	Pass
2480	1.00	>25 kHz or 2/3 * 20 dB BW	Pass


Channel 00 2402MHz

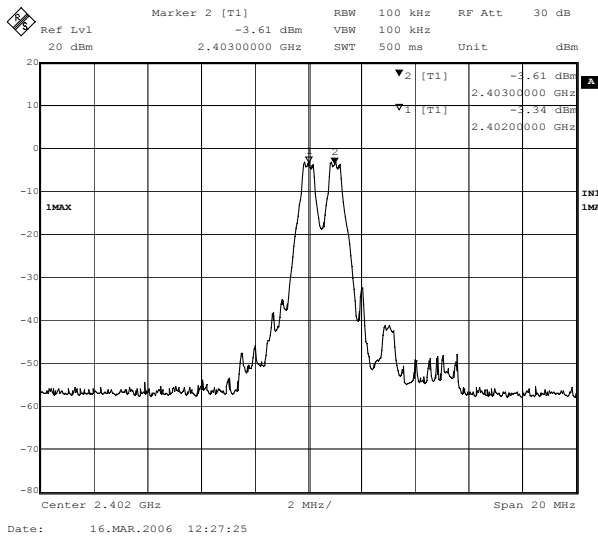

Channel 39 2441MHz

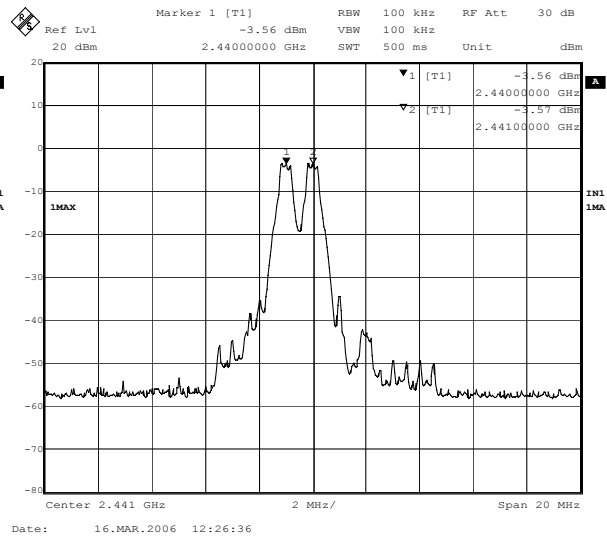

Channel 78 2480 MHz

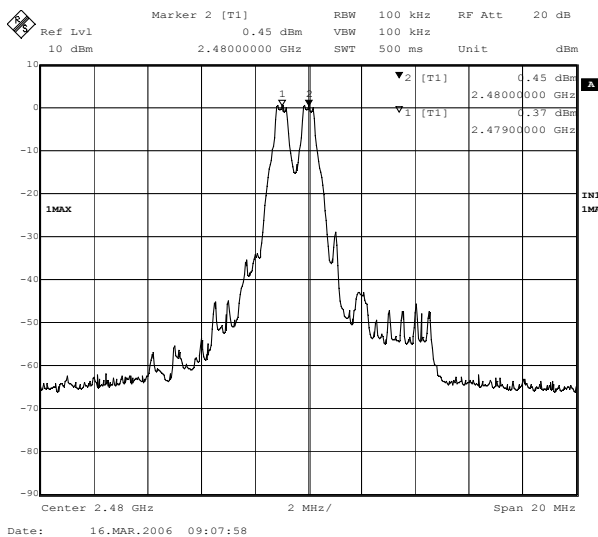

8. Dwell Time


8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	EMI Test Receiver	R&S	ESI 26 / 838786/004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

8.2. Test Setup

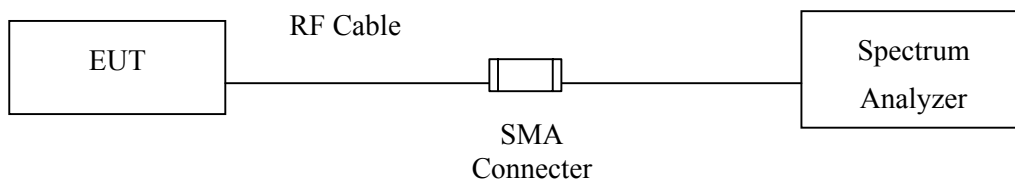

8.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.





8.4. Uncertainty

The measurement uncertainty is defined as $\pm 25\text{msec}$

8.5. Test Result of Dwell Time

Product : Bluetooth Stereo Headphone
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78 –DH5)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec.)	Result
CH 00 2402	318.627	< 0.4	Pass
CH 39 2441	318.627	< 0.4	Pass
CH 78 2480	318.627	< 0.4	Pass

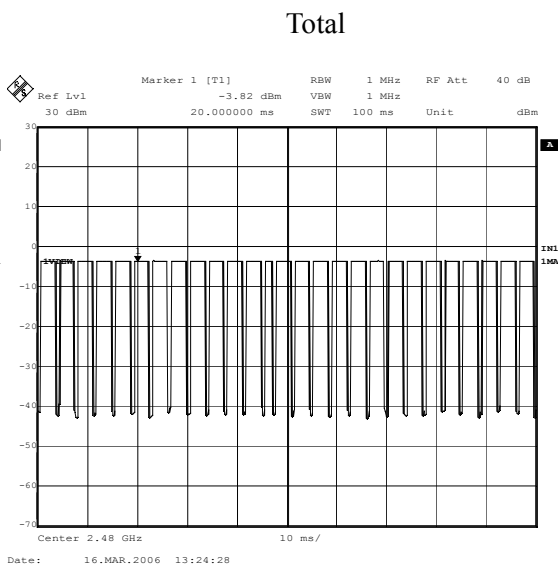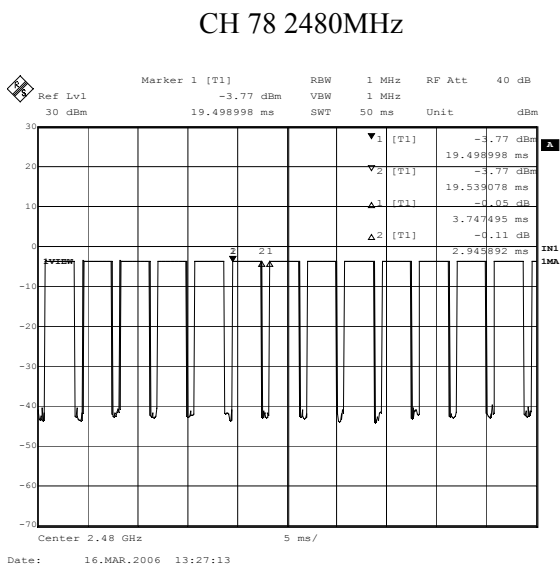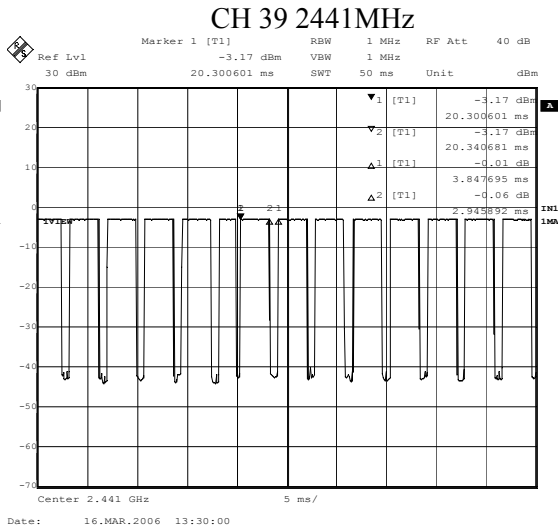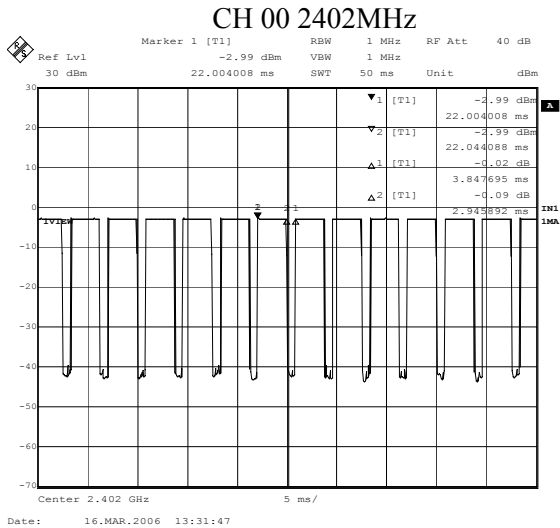

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $27/100\text{msec} = 0.27 \text{ hops/msec}$.

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $(2946 \mu\text{s} \times 270) / (79 \times 31.6) = 318.627\text{msec}$ ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $(2496 \mu\text{s} \times 270) / (79 \times 31.6) = 318.627\text{msec}$ ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $(2496 \mu\text{s} \times 270) / (79 \times 31.6) = 318.627\text{msec}$ ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

PS: (1) From Bluetooth Specification , It Hops 1640 Times in 1sec ◦ The Average Occupancy Time of Each 79 Channels is $1600/79$ Times , Therefore , We Calculate The Maximum Occupancy Time (worse cars) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640 / 79 \times 31.6 = 289.056\text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640 / 79 \times 31.6 = 289.056\text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640 / 79 \times 31.6 = 289.056\text{msec}$

Test Result: The Maximum Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

9. Occupied Bandwidth


9.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	EMI Test Receiver	R&S	ESI 26 / 838786/004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark “X” test instruments are used to measure the final test results.

9.2. Test Setup

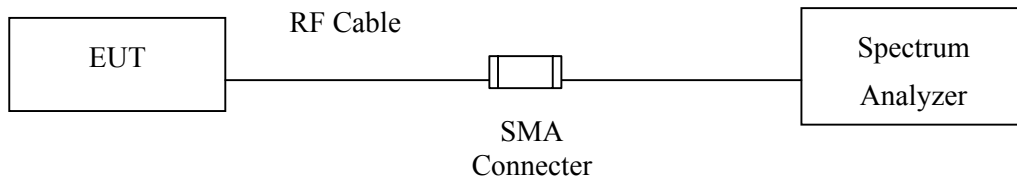

9.3. Limits

The minimum bandwidth shall be at least 500kHz.

9.4. Uncertainty


The measurement uncertainty is defined as ± 1.27 dB

9.5. Test Result of Occupied Bandwidth

Product : Bluetooth Stereo Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1170	>500	Pass


Figure Channel 00:

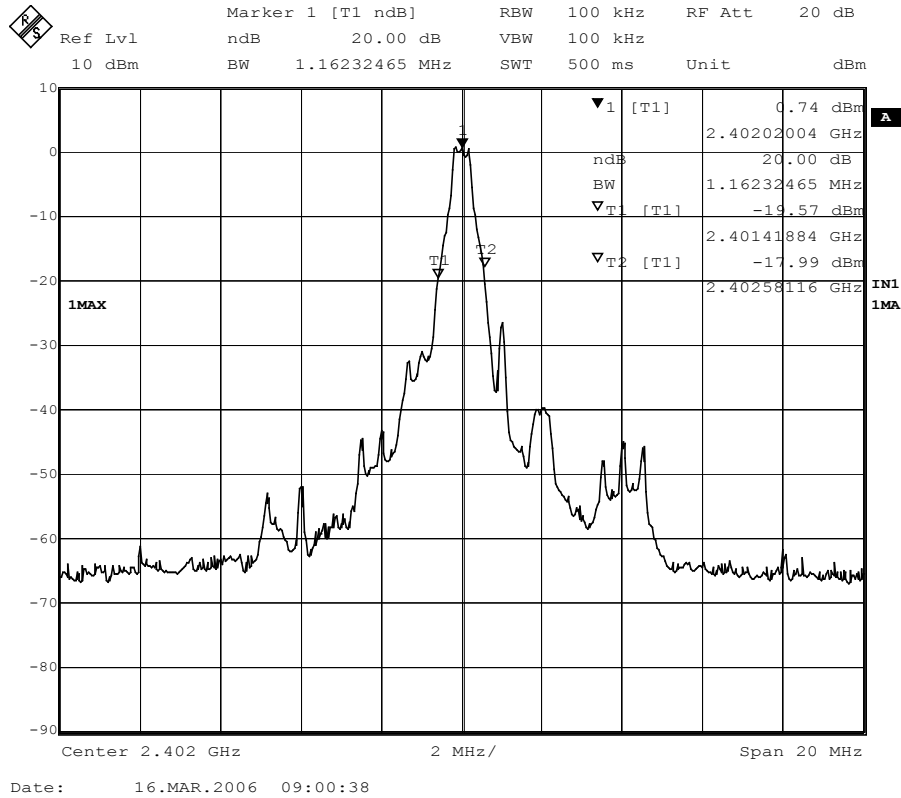

Product : Bluetooth Stereo Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1170	>500	Pass


Figure Channel 39:

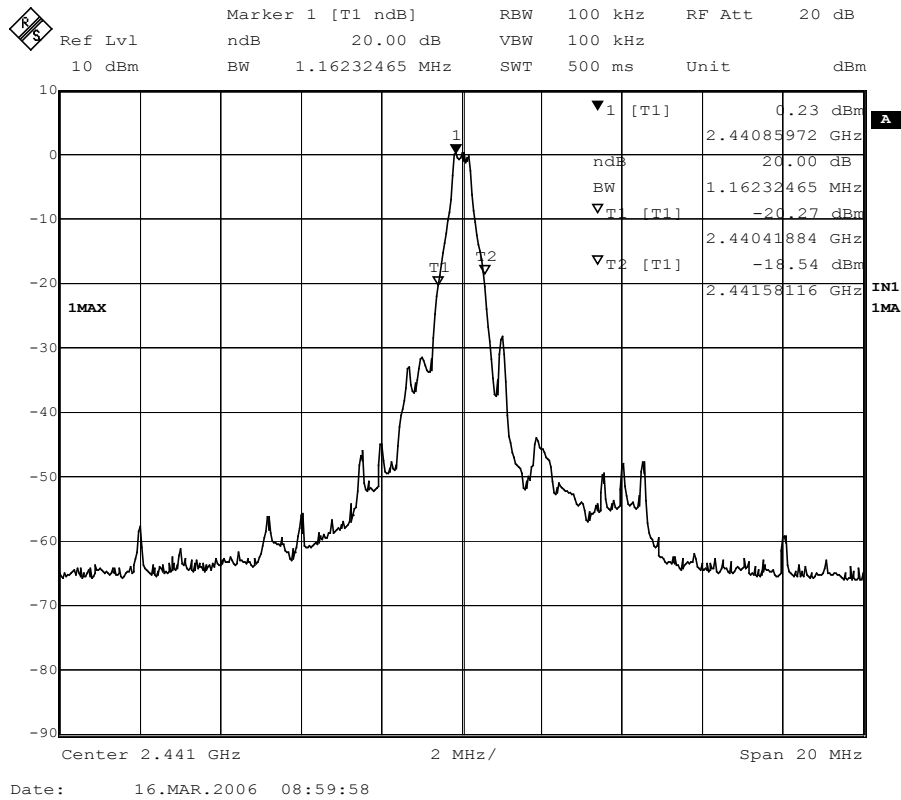

Product : Bluetooth Stereo Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1170	>500	Pass

Figure Channel 78:

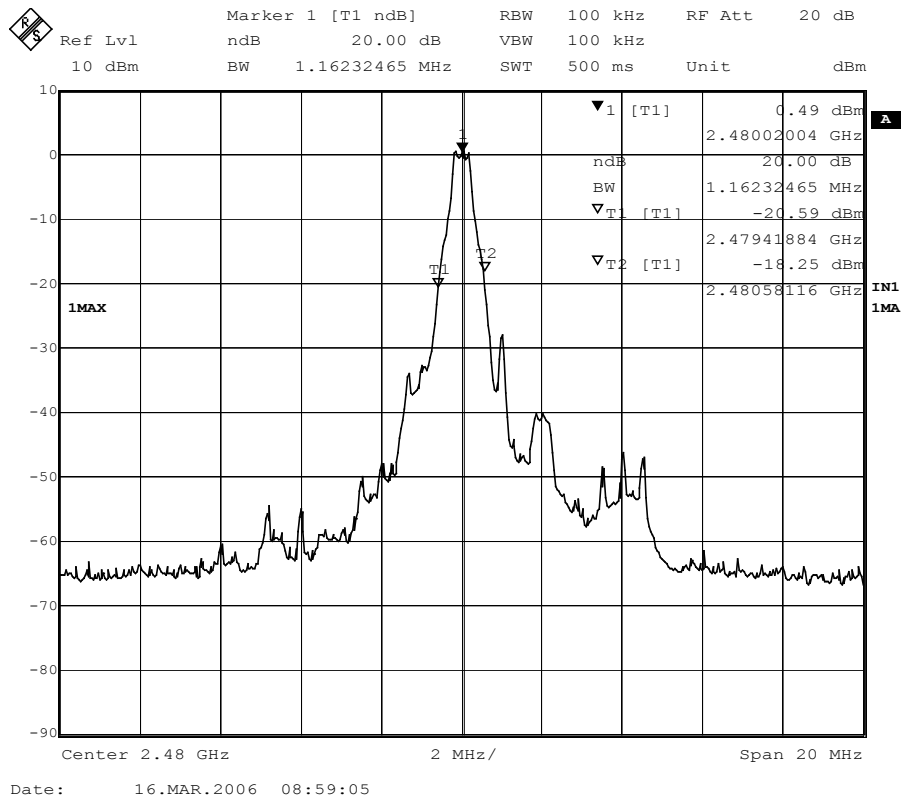

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.