



BUREAU  
VERITAS

Test Report No.: RF160314W002-2



# FCC TEST REPORT

## (WIFI + BT LE)

**Product:** Digital projector  
**Model Name:** i500  
**FCC ID:** JVPI500  
**Applicant:** BENQ corporation  
**Address:** 16 Jihu Road, Neihu, Taipei 114, Taiwan  
**Manufacturer:** BENQ corporation  
**Address:** 16 Jihu Road, Neihu, Taipei 114, Taiwan  
**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch  
**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China  
**TEL:** +86 769 8593 5656  
**FAX:** +86 769 8593 1080  
**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)  
**Report No.:** RF160314W002-2  
**Received Date:** Mar. 14, 2016  
**Test Date:** Mar. 15, 2016 ~ May 02, 2016  
**Issued Date:** May 03, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 CERTIFICATION ..... 5**

**2 SUMMARY OF TEST RESULTS..... 6**

2.1 MEASUREMENT UNCERTAINTY ..... 6

**3 GENERAL INFORMATION ..... 7**

3.1 GENERAL DESCRIPTION OF EUT ..... 7

3.2 DESCRIPTION OF TEST MODES ..... 9

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 10

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 13

3.4 DESCRIPTION OF SUPPORT UNITS ..... 13

**4 TEST TYPES AND RESULTS..... 14**

4.1 CONDUCTED EMISSION MEASUREMENT ..... 14

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 14

4.1.2 TEST INSTRUMENTS..... 14

4.1.3 TEST PROCEDURES ..... 15

4.1.4 DEVIATION FROM TEST STANDARD ..... 15

4.1.5 TEST SETUP ..... 16

4.1.6 EUT OPERATING CONDITIONS ..... 16

4.1.7 TEST RESULTS ..... 17

4.2 RADIATED EMISSION MEASUREMENT ..... 19

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 19

4.2.2 TEST INSTRUMENTS..... 20

4.2.3 TEST PROCEDURES ..... 21

4.2.4 DEVIATION FROM TEST STANDARD ..... 21

4.2.5 TEST SETUP ..... 22

4.2.6 EUT OPERATING CONDITIONS ..... 23

4.2.7 TEST RESULTS ..... 24

4.3 6 DB BANDWIDTH MEASUREMENT ..... 43

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT ..... 43

4.3.2 TEST INSTRUMENTS..... 43

4.3.3 TEST PROCEDURE..... 43

4.3.4 DEVIATION FROM TEST STANDARD ..... 44

4.3.5 TEST SETUP ..... 44

4.3.6 EUT OPERATING CONDITIONS ..... 44



4.3.7	TEST RESULTS .....	45
4.4	CONDUCTED OUTPUT POWER.....	50
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	50
4.4.2	TEST SETUP .....	50
4.4.3	TEST INSTRUMENTS.....	50
4.4.4	TEST PROCEDURES .....	50
4.4.5	DEVIATION FROM TEST STANDARD .....	50
4.4.6	EUT OPERATING CONDITIONS .....	50
4.4.7	TEST RESULTS .....	51
4.4.7.1	MAXIMUM PEAK OUTPUT POWER .....	51
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	53
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.5.2	TEST SETUP .....	55
4.5.3	TEST INSTRUMENTS.....	55
4.5.4	TEST PROCEDURE.....	55
4.5.5	DEVIATION FROM TEST STANDARD .....	55
4.5.6	EUT OPERATING CONDITION .....	55
4.5.7	TEST RESULTS .....	56
4.6	OUT OF BAND EMISSION MEASUREMENT .....	61
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	61
4.6.2	TEST SETUP .....	61
4.6.3	TEST INSTRUMENTS.....	61
4.6.4	TEST PROCEDURE.....	61
4.6.5	DEVIATION FROM TEST STANDARD .....	62
4.6.6	EUT OPERATING CONDITION .....	62
4.6.7	TEST RESULTS .....	62
4.6.8	TEST RESULTS .....	63
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>70</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>71</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF160314W002-2

## RELEASE CONTROL RECORD


ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160314W002-2	Original release	May 03, 2016



# 1 CERTIFICATION

**PRODUCT:** Digital projector  
**BRAND NAME:** BENQ  
**MODEL NAME:** i500  
**APPLICANT:** BENQ corporation  
**TESTED:** Mar. 15, 2016 ~ May 02, 2016  
**TEST SAMPLE:** Identical Prototype  
**STANDARDS:** **FCC Part 15, Subpart C. Section 15.247**  
 ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE:** May 03, 2016  
 ( Amyee Qian / Engineer)

**APPROVED BY :**  , **DATE:** May 03, 2016  
 ( William Chung / Manager)



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -19.02dB at 21.104000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.0dB at 4824.00MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Digital projector
<b>MODEL NAME</b>	i500
<b>ADDITIONAL MODELS</b>	i500v, i0319, i0519, i490H, RW0519, i501JD, i500ST, i500P, i500E, i500H, i500F, i500N, i500J
<b>NOMINAL VOLTAGE</b>	19Vdc (adapter or host equipment)
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM, DTS
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
<b>TRANSMISSION RATE</b>	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11b/g/n(HT40) 2402-2480MHz for BT-LE(GFSK)
<b>MAX. OUTPUT POWER</b>	WLAN: 113.501mW (Maximum) BT-LE: 2.193mW (Maximum)
<b>ANTENNA 0 TYPE</b>	PCB Antenna with 2.3dBi gain
<b>ANTENNA 1 TYPE</b>	PCB Antenna with 2.3dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	Ktec
<b>MODEL:</b>	KSAS1201900631M3
<b>INPUT:</b>	AC 100-240V, 1600mA
<b>OUTPUT:</b>	DC 19V, 6310mA

- The above additional models are identical with the test model i500, and the only difference is the model name for marketing purpose.
- The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.



MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	2TX /2RX
802.11n (40MHz)	2TX /2RX

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.





### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	-	-	-

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.

#### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	CCK	DBPSK	1.0
BT-LE	0 to 39	39	DTS	GFSK	1

For the test results, only the worst case was shown in test report.



**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0,19, 39	DTS	GFSK	1

**POWER LINE CONDUCTED EMISSION TEST:**

The EUT was tested with the following mode

EUT CONFIGURE MODE	TESTED CONDITION
-	BT Link+ WIFI (2.4G) Link + Adapter

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 19V from adaptor	Alex Chen
RE≥1G	22deg. C, 54%RH	DC 19V from adaptor	Alex Chen
PLC	25deg. C, 60%RH	DC 19V from adaptor	Yuqiang Yin
APCM	25deg. C, 60%RH	DC 19V from adaptor	Yuqiang Yin



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB 558074 D01 DTS Meas Guidance v03r05**

**ANSI C63.10-2013**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (doc). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	100340	May 11,15	May 10,16
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

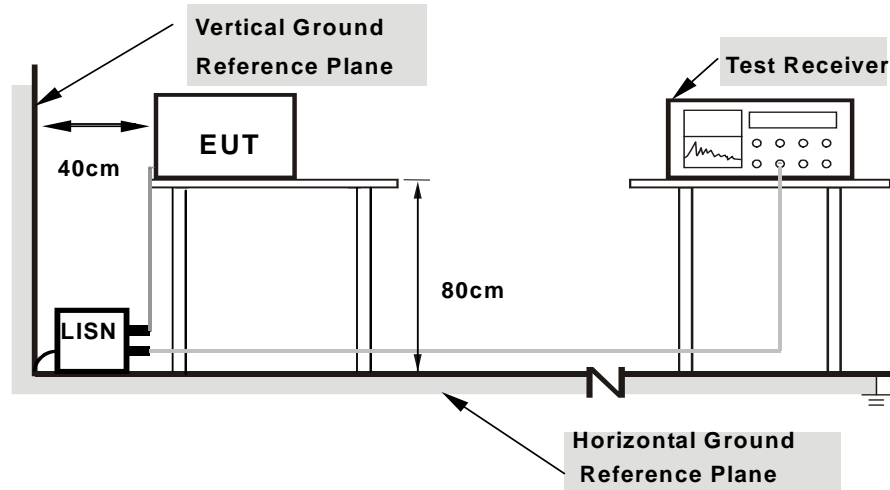

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.





**4.1.7 TEST RESULTS**


**CONDUCTED WORST-CASE DATA:**

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
1.904000	---	14.78	46.00	-31.22	L	ON	9.7
1.904000	17.89	---	56.00	-38.11	L	ON	9.7
2.124000	---	14.89	46.00	-31.11	L	ON	9.7
2.124000	16.50	---	56.00	-39.50	L	ON	9.7
6.096000	---	17.41	50.00	-32.59	L	ON	9.8
6.096000	20.43	---	60.00	-39.57	L	ON	9.8
6.172000	---	18.61	50.00	-31.39	L	ON	9.8
6.172000	21.30	---	60.00	-38.70	L	ON	9.8
17.604000	---	23.57	50.00	-26.43	L	ON	9.9
17.604000	26.90	---	60.00	-33.10	L	ON	9.9
21.108000	---	30.60	50.00	-19.40	L	ON	9.9
21.108000	34.84	---	60.00	-25.16	L	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

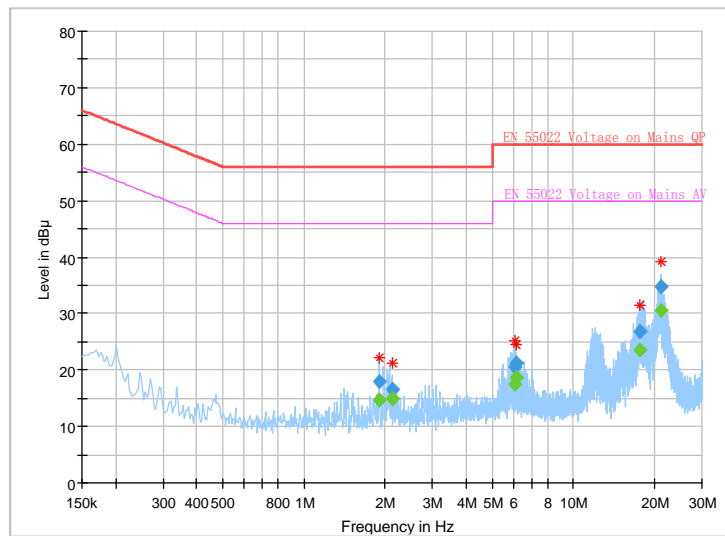




<b>Phase</b>	Neutral (N)	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
1.904000	---	15.11	46.00	-30.89	N	ON	9.8
1.904000	18.36	---	56.00	-37.64	N	ON	9.8
2.080000	---	16.03	46.00	-29.97	N	ON	9.8
2.080000	17.49	---	56.00	-38.51	N	ON	9.8
6.092000	---	16.77	50.00	-33.23	N	ON	9.8
6.092000	20.22	---	60.00	-39.78	N	ON	9.8
6.172000	---	18.95	50.00	-31.05	N	ON	9.8
6.172000	21.73	---	60.00	-38.27	N	ON	9.8
17.676000	---	25.62	50.00	-24.38	N	ON	10.0
17.676000	29.03	---	60.00	-30.97	N	ON	10.0
<b>21.104000</b>	---	<b>30.98</b>	<b>50.00</b>	<b>-19.02</b>	<b>N</b>	<b>ON</b>	<b>10.0</b>
21.104000	35.36	---	60.00	-24.64	N	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

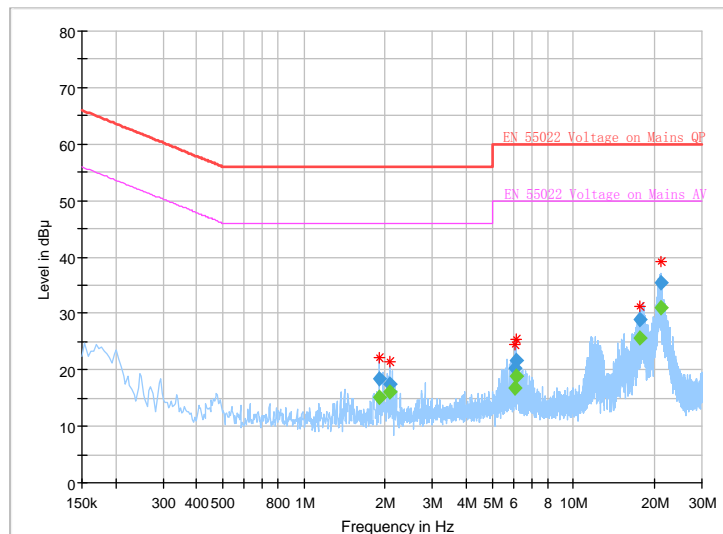



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Loop Antenna	Daze	ZN30900A	0708	Dec. 30, 15	Dec. 29, 16
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30, 15	May 29, 17
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,17
Pre-Amplifier	HP	8449B	3008A00409	Apr. 25,15	Apr. 24,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 966 Chamber.
3. The FCC Site Registration No. is 502831.



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation




### 4.2.5 TEST SETUP

<Frequency Range below 1GHz>

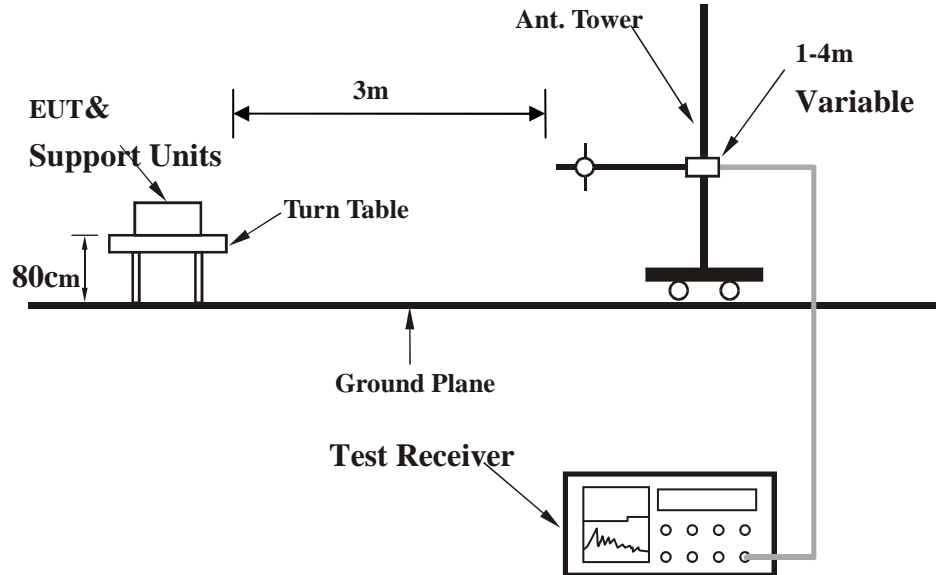

<Frequency Range above 1GHz>

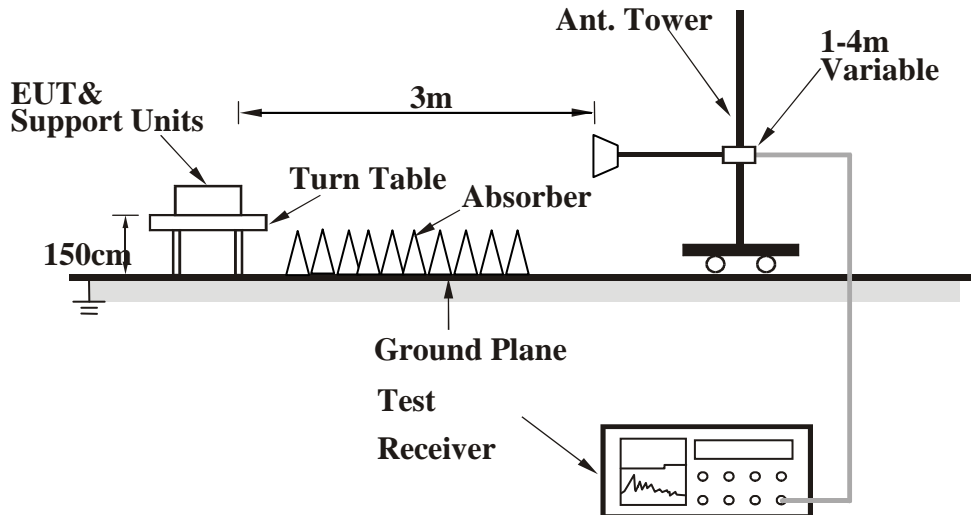

For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**4.2.7 TEST RESULTS**

**BELOW 1GHz WORST-CASE DATA:**

**9 KHz – 30 KHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	72.68	26.2 QP	40.0	-13.8	1.00 H	0	54.12	-27.94
2	119.24	30.0 QP	43.5	-13.5	1.00 H	0	57.09	-27.05
3	239.52	34.0 QP	46.0	-12.0	1.00 H	0	55.79	-21.79
4	471.35	38.3 QP	46.0	-7.7	1.00 H	0	53.45	-15.16
5	671.17	31.9 QP	46.0	-14.1	1.00 H	0	42.42	-10.56
6	756.53	41.2 QP	46.0	-4.8	1.00 H	0	50.93	-9.74

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

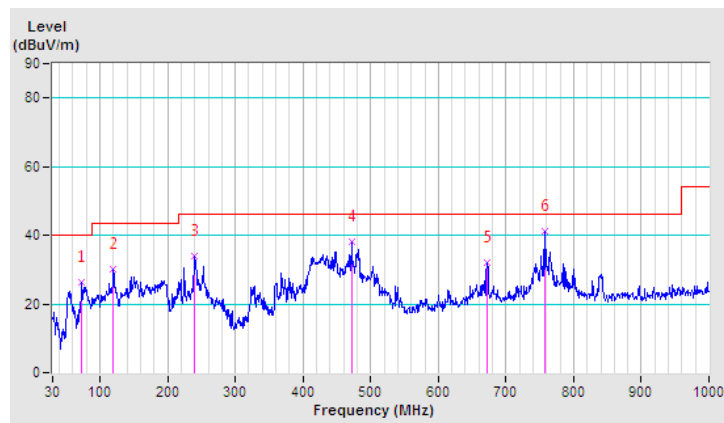






<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.99	29.0 QP	43.5	-14.5	1.00 V	0	56.15	-27.15
2	253.10	28.2 QP	46.0	-17.8	1.00 V	0	49.44	-21.21
3	357.86	32.0 QP	46.0	-14.0	1.00 V	0	49.90	-17.91
4	447.10	39.6 QP	46.0	-6.5	1.00 V	0	55.01	-15.46
5	610.06	40.1 QP	46.0	-5.9	1.00 V	0	52.52	-12.41
6	797.27	41.3 QP	46.0	-4.7	1.00 V	0	51.11	-9.77

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

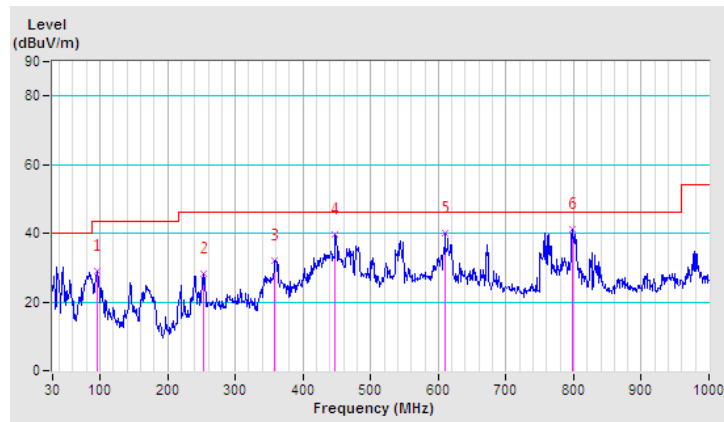



**ABOVE 1GHz DATA**

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	1.00 H	185	62.06	-7.87
2	2390.00	43.0 AV	54.0	-11.0	1.00 H	185	50.86	-7.87
3	#2400.00	71.3 PK	85.0	-13.7	1.00 H	185	79.10	-7.84
4	#2400.00	65.2 AV	81.2	-16.0	1.00 H	185	73.05	-7.84
5	*2412.00	105.0 PK			1.00 H	185	112.80	-7.81
6	*2412.00	101.2 AV			1.00 H	185	109.02	-7.81
7	4824.00	57.1 PK	74.0	-16.9	1.40 H	0	59.06	-1.97
8	<b>4824.00</b>	<b>52.0 AV</b>	<b>54.0</b>	<b>-2.0</b>	<b>1.40 H</b>	<b>0</b>	<b>53.94</b>	<b>-1.97</b>

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.3 PK	74.0	-22.7	1.35 V	105	59.16	-7.87
2	2390.00	37.7 AV	54.0	-16.3	1.35 V	105	45.55	-7.87
3	#2400.00	63.7 PK	82.6	-18.9	1.35 V	105	71.51	-7.84
4	#2400.00	56.6 AV	79.1	-22.5	1.35 V	105	64.46	-7.84
5	*2412.00	102.6 PK			1.35 V	105	110.44	-7.81
6	*2412.00	99.1 AV			1.35 V	105	106.95	-7.81
7	4824.00	54.5 PK	74.0	-19.5	1.00 V	235	56.44	-1.97
8	4824.00	47.2 AV	54.0	-6.8	1.00 V	235	49.19	-1.97

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.1 PK			1.00 H	0	109.84	-7.73
2	*2437.00	100.8 AV			1.00 H	0	108.49	-7.73
3	4874.00	57.5 PK	74.0	-16.5	1.40 H	0	59.34	-1.81
4	4874.00	51.9 AV	54.0	-2.1	1.40 H	0	53.67	-1.81
5	7311.00	58.0 PK	74.0	-16.0	1.00 H	126	55.21	2.75
6	7311.00	45.1 AV	54.0	-8.9	1.00 H	126	42.37	2.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.8 PK			1.60 V	108	109.48	-7.73
2	*2437.00	97.7 AV			1.60 V	108	105.45	-7.73
3	4874.00	57.5 PK	74.0	-16.5	1.60 V	256	59.33	-1.81
4	4874.00	50.5 AV	54.0	-3.5	1.60 V	256	52.33	-1.81
5	7311.00	57.9 PK	74.0	-16.1	1.00 V	263	55.14	2.75
6	7311.00	45.1 AV	54.0	-8.9	1.00 V	263	42.39	2.75

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.9 PK			2.00 H	15	111.53	-7.66
2	*2462.00	100.3 AV			2.00 H	15	107.95	-7.66
3	2483.50	51.4 PK	74.0	-22.7	2.00 H	15	58.95	-7.60
4	2483.50	42.4 AV	54.0	-11.6	2.00 H	15	49.97	-7.60
5	4924.00	55.6 PK	74.0	-18.4	1.00 H	5	57.26	-1.64
6	4924.00	47.2 AV	54.0	-6.8	1.00 H	5	48.85	-1.64
7	7386.00	57.9 PK	74.0	-16.1	1.00 H	178	55.07	2.87
8	7386.00	45.0 AV	54.0	-9.0	1.00 H	178	42.09	2.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.0 PK			1.60 V	110	108.63	-7.66
2	*2462.00	97.5 AV			1.60 V	110	105.18	-7.66
3	2483.50	46.8 PK	74.0	-27.2	1.60 V	110	54.39	-7.60
4	2483.50	35.1 AV	54.0	-18.9	1.60 V	110	42.67	-7.60
5	4924.00	56.8 PK	74.0	-17.2	1.00 V	250	58.46	-1.64
6	4924.00	51.3 AV	54.0	-2.7	1.00 V	250	52.93	-1.64
7	7386.00	58.4 PK	74.0	-15.6	1.00 V	218	55.55	2.87
8	7386.00	44.9 AV	54.0	-9.1	1.00 V	218	42.02	2.87

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.7 PK	74.0	-12.3	1.00 H	218	69.54	-7.87
2	2390.00	42.9 AV	54.0	-11.2	1.00 H	218	50.72	-7.87
3	#2400.00	77.0 PK	83.0	-6.0	1.00 H	218	84.88	-7.84
4	#2400.00	62.6 AV	73.4	-10.8	1.00 H	218	70.42	-7.84
5	*2412.00	103.0 PK			1.00 H	218	110.84	-7.81
6	*2412.00	93.4 AV			1.00 H	218	101.17	-7.81
7	4824.00	58.3 PK	74.0	-15.7	1.00 H	269	60.23	-1.97
8	4824.00	50.9 AV	54.0	-3.1	1.00 H	269	52.89	-1.97

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.00 V	58	68.34	-7.87
2	2390.00	41.8 AV	54.0	-12.2	1.00 V	58	49.71	-7.87
3	#2400.00	76.2 PK	83.3	-7.1	1.00 V	58	83.99	-7.84
4	#2400.00	61.8 AV	72.9	-11.1	1.00 V	58	69.60	-7.84
5	*2412.00	103.3 PK			1.00 V	58	111.14	-7.81
6	*2412.00	92.9 AV			1.00 V	58	100.68	-7.81
7	4824.00	54.1 PK	74.0	-19.9	1.00 V	118	56.05	-1.97
8	4824.00	50.6 AV	54.0	-3.4	1.00 V	118	52.59	-1.97

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.2 PK			1.48 H	5	110.94	-7.73
2	*2437.00	92.7 AV			1.48 H	5	100.45	-7.73
3	4874.00	53.8 PK	74.0	-20.2	1.00 H	158	55.57	-1.81
4	4874.00	41.5 AV	54.0	-12.5	1.00 H	158	43.32	-1.81
5	7311.00	57.2 PK	74.0	-16.8	1.00 H	312	54.46	2.75
6	7311.00	49.9 AV	54.0	-4.1	1.00 H	312	47.14	2.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.5 PK			1.00 V	25	112.25	-7.73
2	*2437.00	94.8 AV			1.00 V	25	102.54	-7.73
3	4874.00	59.2 PK	74.0	-14.8	1.00 V	223	61.03	-1.81
4	4874.00	49.2 AV	54.0	-4.8	1.00 V	223	51.04	-1.81
5	7311.00	59.1 PK	74.0	-14.9	1.00 V	161	56.31	2.75
6	7311.00	45.0 AV	54.0	-9.1	1.00 V	161	42.20	2.75

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.8 PK			1.50 H	6	110.49	-7.66
2	*2462.00	93.3 AV			1.50 H	6	100.93	-7.66
3	2483.50	60.2 PK	74.0	-13.8	1.50 H	6	67.78	-7.60
4	2483.50	43.6 AV	54.0	-10.4	1.50 H	6	51.18	-7.60
5	4924.00	58.3 PK	74.0	-15.7	1.50 H	267	59.94	-1.64
6	4924.00	49.3 AV	54.0	-4.7	1.50 H	267	50.92	-1.64
7	7386.00	57.4 PK	74.0	-16.6	1.50 H	164	54.56	2.87
8	7386.00	44.8 AV	54.0	-9.2	1.50 H	164	41.92	2.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.3 PK			1.00 V	48	113.94	-7.66
2	*2462.00	96.8 AV			1.00 V	48	104.49	-7.66
3	2483.50	62.5 PK	74.0	-11.5	1.00 V	48	70.06	-7.60
4	2483.50	45.7 AV	54.0	-8.3	1.00 V	48	53.31	-7.60
5	4924.00	57.1 PK	74.0	-16.9	1.00 V	112	58.70	-1.64
6	4924.00	49.5 AV	54.0	-4.5	1.00 V	112	51.15	-1.64
7	7386.00	58.5 PK	74.0	-15.5	1.00 V	236	55.61	2.87
8	7386.00	44.8 AV	54.0	-9.2	1.00 V	236	41.96	2.87

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.5	1.00 H	120	68.42	-7.87
2	2390.00	42.2 AV	54.0	-11.8	1.00 H	120	50.03	-7.87
3	#2400.00	68.2 PK	84.2	-16.0	1.00 H	120	76.05	-7.84
4	#2400.00	53.0 AV	74.0	-21.0	1.00 H	120	60.87	-7.84
5	*2412.00	104.2 PK			1.00 H	120	112.00	-7.81
6	*2412.00	94.0 AV			1.00 H	120	101.77	-7.81
7	4824.00	56.3 PK	74.0	-17.7	1.00 H	302	58.29	-1.97
8	4824.00	42.4 AV	54.0	-11.6	1.00 H	302	44.34	-1.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.00 V	74	75.56	-7.87
2	2390.00	46.2 AV	54.0	-7.8	1.00 V	74	54.06	-7.87
3	#2400.00	74.8 PK	84.8	-10.0	1.00 V	74	82.67	-7.84
4	#2400.00	61.3 AV	75.1	-13.8	1.00 V	74	69.12	-7.84
5	*2412.00	104.8 PK			1.00 V	74	112.64	-7.81
6	*2412.00	95.1 AV			1.00 V	74	102.95	-7.81
7	4824.00	53.2 PK	74.0	-20.8	1.00 V	226	55.20	-1.97
8	4824.00	41.4 AV	54.0	-12.6	1.00 V	226	43.33	-1.97

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.1 PK			1.00 H	125	111.84	-7.73
2	*2437.00	94.4 AV			1.00 H	125	102.14	-7.73
3	4874.00	53.2 PK	74.0	-20.8	1.00 H	236	54.97	-1.81
4	4874.00	41.4 AV	54.0	-12.6	1.00 H	236	43.22	-1.81
5	7311.00	57.8 PK	74.0	-16.2	1.00 H	92	55.01	2.75
6	7311.00	44.9 AV	54.0	-9.1	1.00 H	92	42.16	2.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.3 PK			1.00 V	75	115.02	-7.73
2	*2437.00	97.3 AV			1.00 V	75	105.07	-7.73
3	4874.00	56.7 PK	74.0	-17.3	1.00 V	278	58.52	-1.81
4	4874.00	43.3 AV	54.0	-10.7	1.00 V	278	45.09	-1.81
5	7311.00	57.5 PK	74.0	-16.5	1.00 V	115	54.74	2.75
6	7311.00	46.0 AV	54.0	-8.0	1.00 V	115	43.24	2.75

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.3 PK			1.00 H	338	114.91	-7.66
2	*2462.00	97.4 AV			1.00 H	338	105.10	-7.66
3	2483.50	70.3 PK	74.0	-3.8	1.00 H	338	77.85	-7.60
4	2483.50	51.4 AV	54.0	-2.6	1.00 H	338	58.98	-7.60
5	4924.00	55.6 PK	74.0	-18.4	1.00 H	52	57.23	-1.64
6	4924.00	42.1 AV	54.0	-11.9	1.00 H	52	43.75	-1.64
7	7386.00	57.6 PK	74.0	-16.4	1.00 H	306	54.71	2.87
8	7386.00	45.9 AV	54.0	-8.1	1.00 H	306	43.06	2.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.9 PK			1.00 V	78	114.59	-7.66
2	*2462.00	97.2 AV			1.00 V	78	104.85	-7.66
3	2483.50	69.4 PK	74.0	-4.6	1.00 V	78	76.97	-7.60
4	2483.50	47.9 AV	54.0	-6.1	1.00 V	78	55.53	-7.60
5	4924.00	56.4 PK	74.0	-17.6	1.00 V	158	58.07	-1.64
6	4924.00	43.1 AV	54.0	-10.9	1.00 V	158	44.78	-1.64
7	7386.00	57.6 PK	74.0	-16.4	1.00 V	246	54.77	2.87
8	7386.00	44.9 AV	54.0	-9.1	1.00 V	246	41.99	2.87

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (40MHz)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.80 H	338	71.98	-7.87
2	2390.00	51.1 AV	54.0	-2.9	1.80 H	338	58.96	-7.87
3	2400.00	72.2 PK	82.3	-10.1	1.80 H	338	80.07	-7.84
4	2400.00	57.6 AV	72.2	-14.6	1.80 H	338	65.47	-7.84
5	*2422.00	102.3 PK			1.80 H	338	110.05	-7.78
6	*2422.00	92.2 AV			1.80 H	338	99.99	-7.78
7	4844.00	53.2 PK	74.0	-20.8	1.80 H	263	55.12	-1.91
8	4844.00	40.4 AV	54.0	-13.6	1.80 H	263	42.28	-1.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.00 V	72	74.38	-7.87
2	2390.00	51.3 AV	54.0	-2.7	1.00 V	72	59.16	-7.87
3	2400.00	63.3 PK	80.1	-16.8	1.00 V	72	71.17	-7.84
4	2400.00	49.6 AV	70.4	-20.8	1.00 V	72	57.48	-7.84
5	*2422.00	100.1 PK			1.00 V	72	107.90	-7.78
6	*2422.00	90.4 AV			1.00 V	72	98.17	-7.78
7	4844.00	53.9 PK	74.0	-20.1	1.00 V	126	55.77	-1.91
8	4844.00	40.5 AV	54.0	-13.5	1.00 V	126	42.39	-1.91

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.6 PK			1.80 H	340	113.29	-7.73
2	*2437.00	95.7 AV			1.80 H	340	103.40	-7.73
3	4874.00	54.8 PK	74.0	-19.2	1.80 H	99	56.57	-1.81
4	4874.00	42.4 AV	54.0	-11.6	1.80 H	99	44.18	-1.81
5	7311.00	57.8 PK	74.0	-16.2	1.80 H	215	55.06	2.75
6	7311.00	46.2 AV	54.0	-7.8	1.80 H	215	43.44	2.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.6 PK			1.00 V	75	113.32	-7.73
2	*2437.00	95.5 AV			1.00 V	75	103.26	-7.73
3	4874.00	53.8 PK	74.0	-20.2	1.00 V	187	55.63	-1.81
4	4874.00	41.7 AV	54.0	-12.3	1.00 V	187	43.52	-1.81
5	7311.00	59.0 PK	74.0	-15.0	1.00 V	296	56.27	2.75
6	7311.00	45.2 AV	54.0	-8.8	1.00 V	296	42.43	2.75

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.7 PK			1.80 H	335	109.42	-7.69
2	*2452.00	91.7 AV			1.80 H	335	99.36	-7.69
3	2483.50	67.0 PK	74.0	-7.0	1.80 H	335	74.62	-7.60
4	2483.50	51.9 AV	54.0	-2.1	1.80 H	335	59.46	-7.60
5	4904.00	53.9 PK	74.0	-20.1	1.80 H	159	55.58	-1.71
6	4904.00	41.8 AV	54.0	-12.2	1.80 H	159	43.48	-1.71
7	7356.00	58.2 PK	74.0	-15.8	1.80 H	268	55.41	2.81
8	7356.00	45.0 AV	54.0	-9.0	1.80 H	268	42.21	2.81

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.2 PK			1.00 V	75	107.91	-7.69
2	*2452.00	89.1 AV			1.00 V	75	96.80	-7.69
3	2483.50	58.4 PK	74.0	-15.6	1.00 V	75	65.96	-7.60
4	2483.50	45.2 AV	54.0	-8.8	1.00 V	75	52.84	-7.60
5	4904.00	54.8 PK	74.0	-19.2	1.00 V	126	56.49	-1.71
6	4904.00	41.6 AV	54.0	-12.4	1.00 V	126	43.30	-1.71
7	7356.00	57.3 PK	74.0	-16.7	1.00 V	259	54.47	2.81
8	7356.00	45.2 AV	54.0	-8.8	1.00 V	259	42.42	2.81

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BELOW 1GHz WORST-CASE DATA:**

**9 KHz – 30 KHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	77.53	21.3 QP	40.0	-18.7	1.00 H	0	49.31	-28.05
2	120.21	26.3 QP	43.5	-17.2	1.00 H	0	53.34	-27.06
3	265.71	31.7 QP	46.0	-14.4	1.00 H	0	52.67	-21.02
4	547.01	36.2 QP	46.0	-9.8	1.00 H	0	50.04	-13.83
5	671.17	37.2 QP	46.0	-8.8	1.00 H	0	47.72	-10.56
6	801.15	39.5 QP	46.0	-6.5	1.00 H	0	49.25	-9.77

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

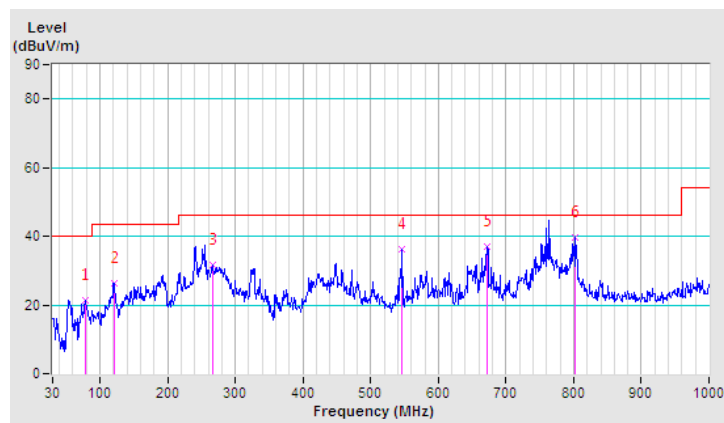




<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.55	30.0 QP	40.0	-10.0	1.00 V	0	56.62	-26.63
2	170.65	24.0 QP	43.5	-19.5	1.00 V	0	47.98	-23.95
3	359.80	30.6 QP	46.0	-15.4	1.00 V	0	48.43	-17.83
4	447.10	38.6 QP	46.0	-7.4	1.00 V	0	54.07	-15.46
5	671.17	34.7 QP	46.0	-11.3	1.00 V	0	45.28	-10.56
6	834.13	29.8 QP	46.0	-16.2	1.00 V	0	39.48	-9.68

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

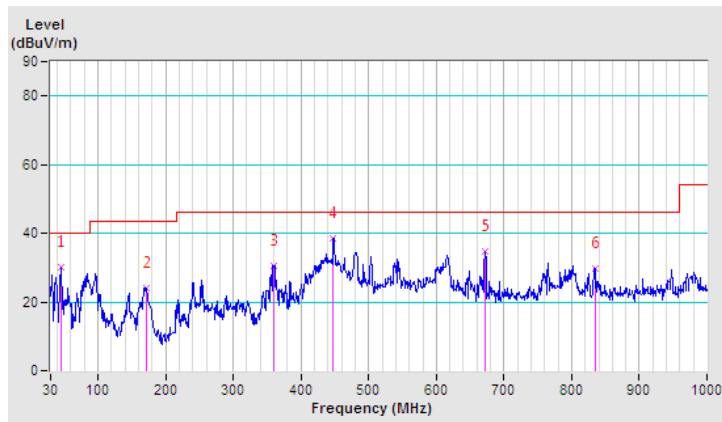



**ABOVE 1GHz TEST DATA:**

**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.5 PK	74.0	-28.5	1.85 H	158	53.39	-7.87
2	2390.00	33.6 AV	54.0	-20.4	1.85 H	158	41.49	-7.87
3	#2400.00	55.0 PK	68.8	-13.8	1.85 H	158	62.88	-7.84
4	#2400.00	39.8 AV	49.3	-9.5	1.85 H	158	47.68	-7.84
5	*2402.00	88.8 PK			1.85 H	158	96.68	-7.84
6	*2402.00	69.3 AV			1.85 H	158	77.13	-7.84
7	4804.00	53.9 PK	74.0	-20.1	1.20 H	236	55.95	-2.04
8	4804.00	44.5 AV	54.0	-9.5	1.20 H	236	46.50	-2.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.6 PK	74.0	-28.4	1.00 V	140	53.46	-7.87
2	2390.00	33.8 AV	54.0	-20.2	1.00 V	140	41.64	-7.87
3	#2400.00	54.3 PK	70.1	-15.8	1.00 V	140	62.11	-7.84
4	#2400.00	40.6 AV	50.3	-9.7	1.00 V	140	48.40	-7.84
5	*2402.00	90.1 PK			1.00 V	140	97.90	-7.84
6	*2402.00	70.3 AV			1.00 V	140	78.10	-7.84
7	4804.00	58.5 PK	74.0	-15.5	1.00 V	185	60.52	-2.04
8	4804.00	46.9 AV	54.0	-7.1	1.00 V	185	48.93	-2.04

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	91.3 PK			1.00 H	196	99.06	-7.73
2	*2440.00	70.8 AV			1.00 H	196	78.51	-7.73
3	4880.00	57.4 PK	74.0	-16.6	1.60 H	196	59.22	-1.78
4	4880.00	48.1 AV	54.0	-5.9	1.60 H	196	49.89	-1.78
5	7320.00	68.0 PK	74.0	-6.0	1.00 H	215	65.26	2.76
6	7320.00	51.0 AV	54.0	-3.0	1.00 H	215	48.22	2.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	88.0 PK			1.00 V	140	95.71	-7.73
2	*2440.00	69.1 AV			1.00 V	140	76.78	-7.73
3	4880.00	58.6 PK	74.0	-15.4	1.00 V	190	60.36	-1.78
4	4880.00	48.3 AV	54.0	-5.7	1.00 V	190	50.06	-1.78
5	7320.00	67.8 PK	74.0	-6.2	1.00 V	75	65.07	2.76
6	7320.00	50.9 AV	54.0	-3.1	1.00 V	75	48.15	2.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.1 PK			1.00 H	195	103.73	-7.61
2	*2480.00	74.6 AV			1.00 H	195	82.25	-7.61
3	2483.50	49.7 PK	74.0	-24.3	1.00 H	196	57.27	-7.60
4	2483.50	37.4 AV	54.0	-16.6	1.00 H	196	44.98	-7.60
5	4960.00	54.7 PK	74.0	-19.4	1.60 H	195	56.17	-1.52
6	4960.00	44.2 AV	54.0	-9.8	1.60 H	195	45.75	-1.52
7	7440.00	65.6 PK	74.0	-8.4	1.20 H	240	62.62	2.96
8	7440.00	50.9 AV	54.0	-3.1	1.20 H	240	47.91	2.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.3 PK			1.00 V	160	100.88	-7.61
2	*2480.00	72.6 AV			1.00 V	160	80.20	-7.61
3	2483.50	47.5 PK	74.0	-26.5	1.00 V	160	55.11	-7.60
4	2483.50	36.4 AV	54.0	-17.6	1.00 V	160	44.01	-7.60
5	4960.00	55.6 PK	74.0	-18.4	1.00 V	190	57.10	-1.52
6	4960.00	44.1 AV	54.0	-10.0	1.00 V	190	45.57	-1.52
7	7440.00	67.3 PK	74.0	-6.7	1.00 V	208	64.31	2.96
8	7440.00	50.7 AV	54.0	-3.3	1.00 V	208	47.76	2.96

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



### 4.3 6 dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (10Hz–40GHz)	Rohde&Schwarz	FSV40	101003	Apr. 05,16	Apr. 04,17
Power Meter	Anritsu	ML2495A	1139001	Feb.19,16	Feb. 18,17
Power Sensor	Anritsu	MA2411B	1126068	Feb.19,16	Feb. 18,17
Power Sensor	Keysight	U2021XA	MY55060016	May 27,15	May 26,16
Power Sensor	Keysight	U2021XA	MY55060018	May 27,15	May 26,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

#### 4.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

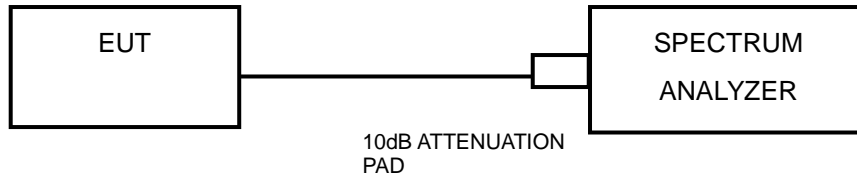

#### 4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.07	0.5	PASS
6	2437	12.07	0.5	PASS
11	2462	12.07	0.5	PASS

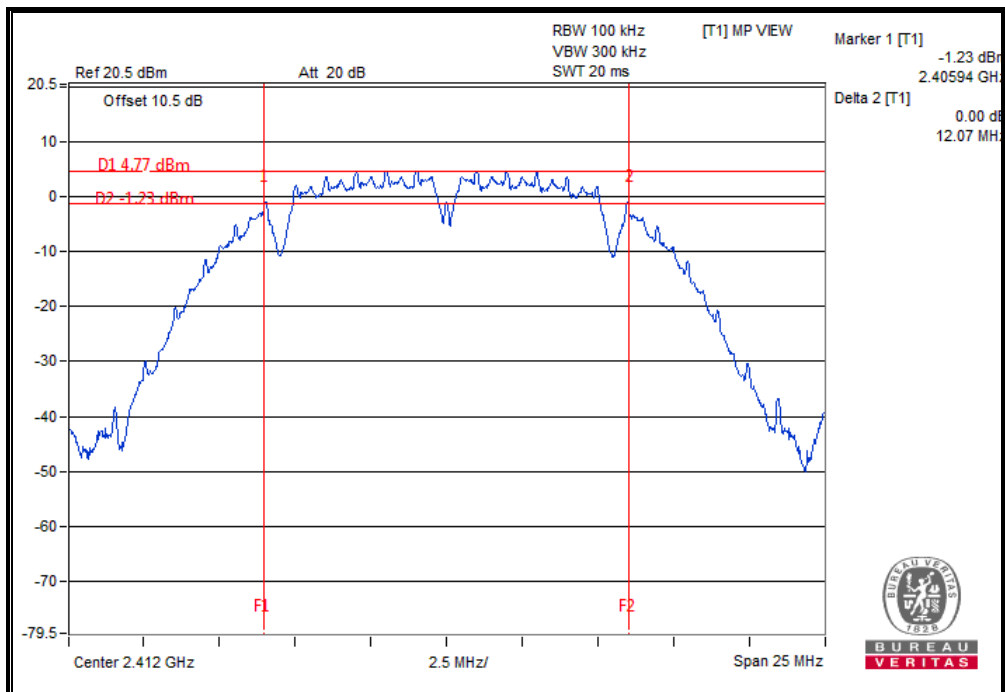




**BUREAU  
VERITAS**

Test Report No.: RF160314W002-2

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.48	0.5	PASS
6	2437	16.48	0.5	PASS
11	2462	16.41	0.5	PASS

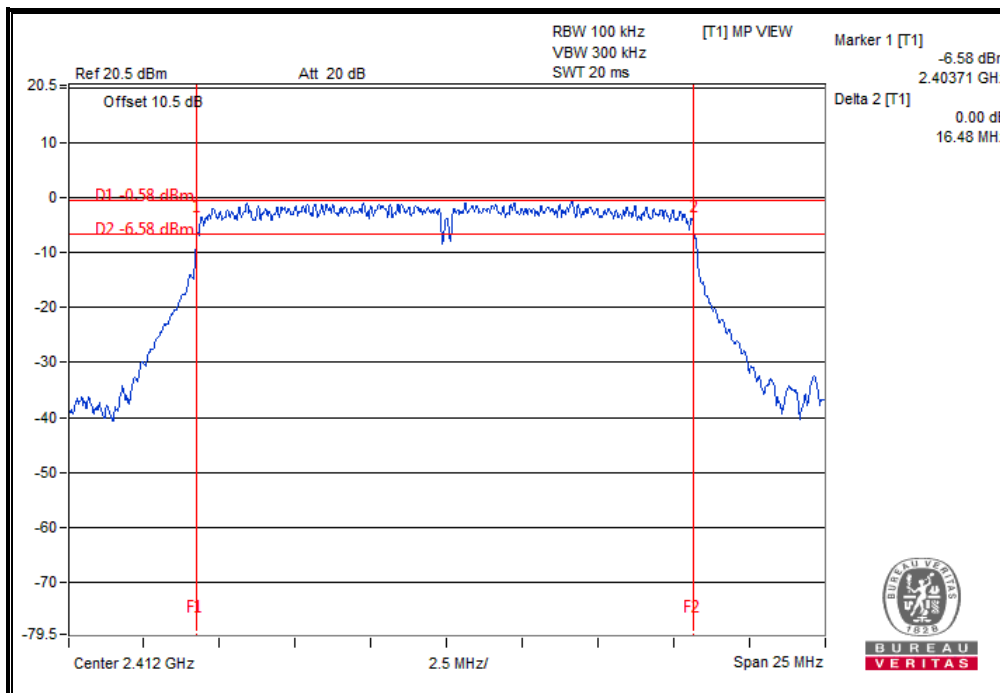



**BUREAU VERITAS**

Test Report No.: RF160314W002-2


802.11n (20MHz)

CHAIN 0

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.60	0.5	PASS
6	2437	17.60	0.5	PASS
11	2462	17.60	0.5	PASS

CHAIN 1

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.54	0.5	PASS
6	2437	17.33	0.5	PASS
11	2462	17.34	0.5	PASS

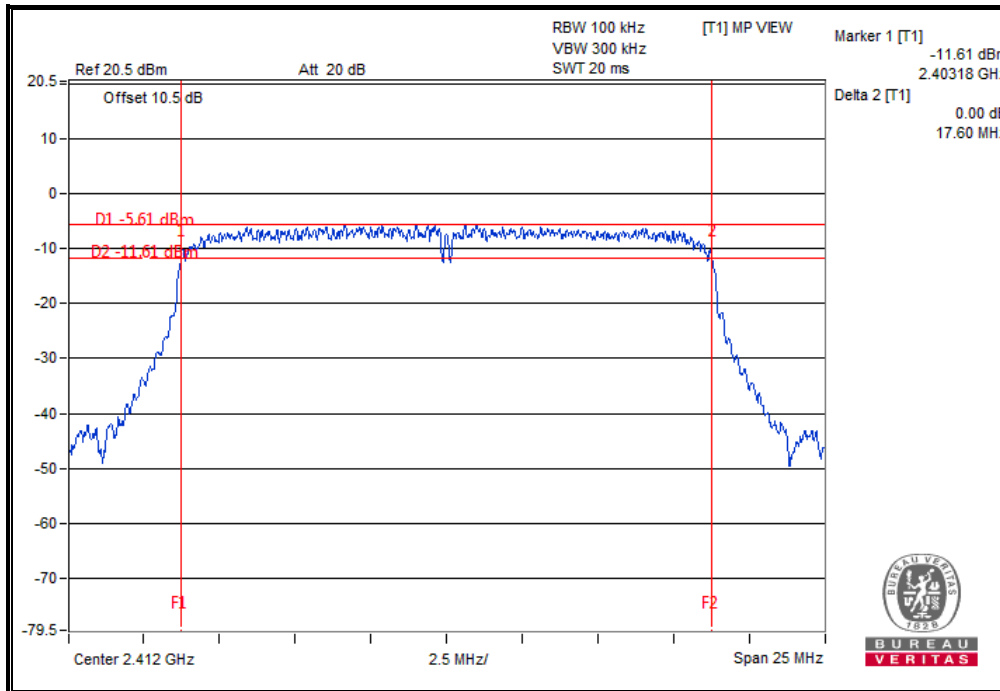

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




802.11n (40MHz)

CHAIN 0

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	36.17	0.5	PASS
6	2437	36.38	0.5	PASS
11	2462	36.40	0.5	PASS

CHAIN 1

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.36	0.5	PASS
6	2437	36.36	0.5	PASS
9	2452	36.34	0.5	PASS

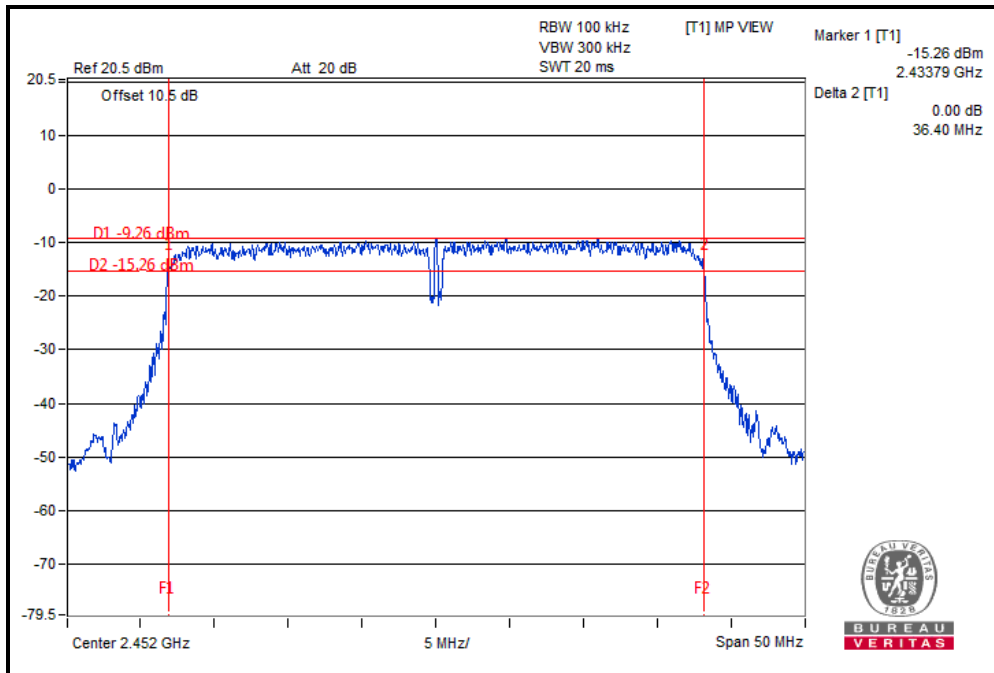






BUREAU VERITAS

Test Report No.: RF160314W002-2

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.71	0.5	PASS
19	2440	0.72	0.5	PASS
39	2480	0.72	0.5	PASS

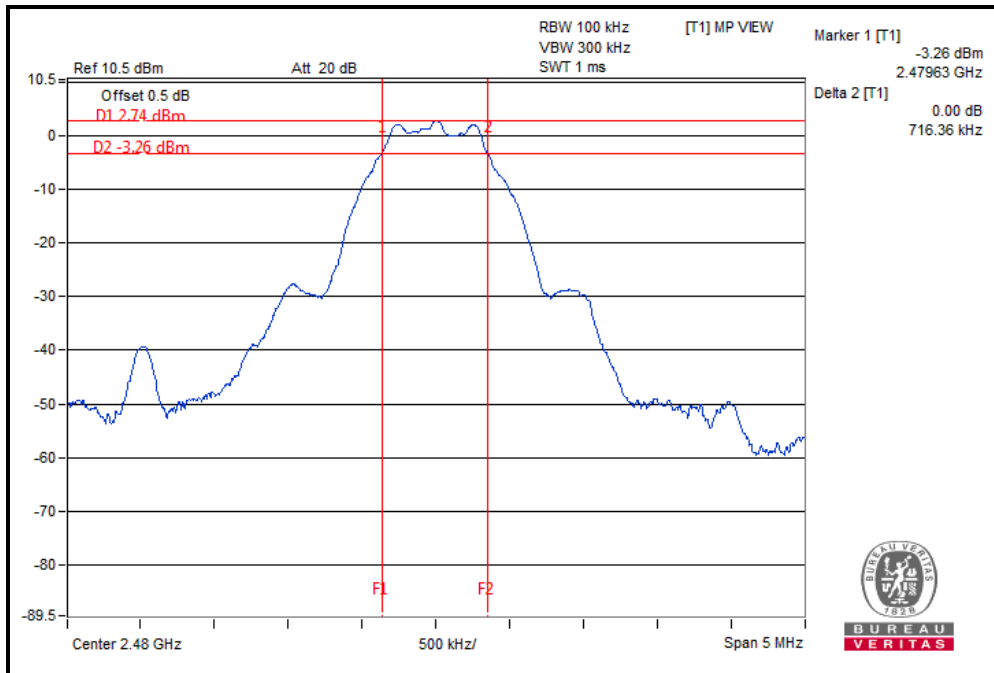




#### 4.4 CONDUCTED OUTPUT POWER

##### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

##### 4.4.2 TEST SETUP

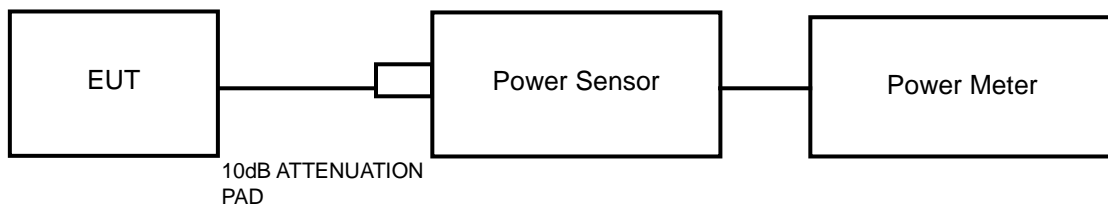

##### 4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

##### 4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

##### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

##### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**4.4.7 TEST RESULTS**

**4.4.7.1 MAXIMUM PEAK OUTPUT POWER**

**802.11b**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	17.48	55.976	1	PASS
6	2437	17.23	52.845	1	PASS
11	2462	17.09	51.168	1	PASS

**802.11g**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	20.55	<b>113.501</b>	1	PASS
6	2437	20.28	106.660	1	PASS
11	2462	20.19	104.472	1	PASS



**802.11n (20MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	POWER LIMIT (W)	PASS/FAIL
		CHAIN 0	CHAIN 1				
1	2412	17.78	15.42	19.77	94.813	1	PASS
6	2437	17.62	15.35	19.64	92.087	1	PASS
11	2462	17.24	15.73	19.56	90.377	1	PASS

**802.11n (40MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	POWER LIMIT (W)	PASS/FAIL
		CHAIN 0	CHAIN 1				
3	2422	17.08	15.18	19.24	84.011	1	PASS
6	2437	16.85	15.10	19.07	80.776	1	PASS
9	2452	16.66	15.02	18.93	78.114	1	PASS

**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	3.41	<b>2.193</b>	1	PASS
19	2440	3.37	2.173	1	PASS
39	2480	1.91	1.552	1	PASS



**4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**802.11b**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	15.51	N/A
6	2437	15.29	N/A
11	2462	15.03	N/A

**802.11g**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	13.04	N/A
6	2437	13.29	N/A
11	2462	13.18	N/A

**802.11n (20MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.80	8.70	12.89	N/A
6	2437	10.71	8.67	12.82	N/A
11	2462	10.54	8.52	12.66	N/A

**802.11n (40MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1		
3	2422	10.32	8.43	12.49	N/A
6	2437	10.12	8.32	12.32	N/A
9	2452	10.03	8.25	12.24	N/A



**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	3.20	N/A
19	2440	3.21	N/A
39	2480	1.76	N/A




## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW  $\geq$  3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.5.7 TEST RESULTS

#### 802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-8.91	8	PASS
6	2437	-9.35	8	PASS
11	2462	-9.61	8	PASS

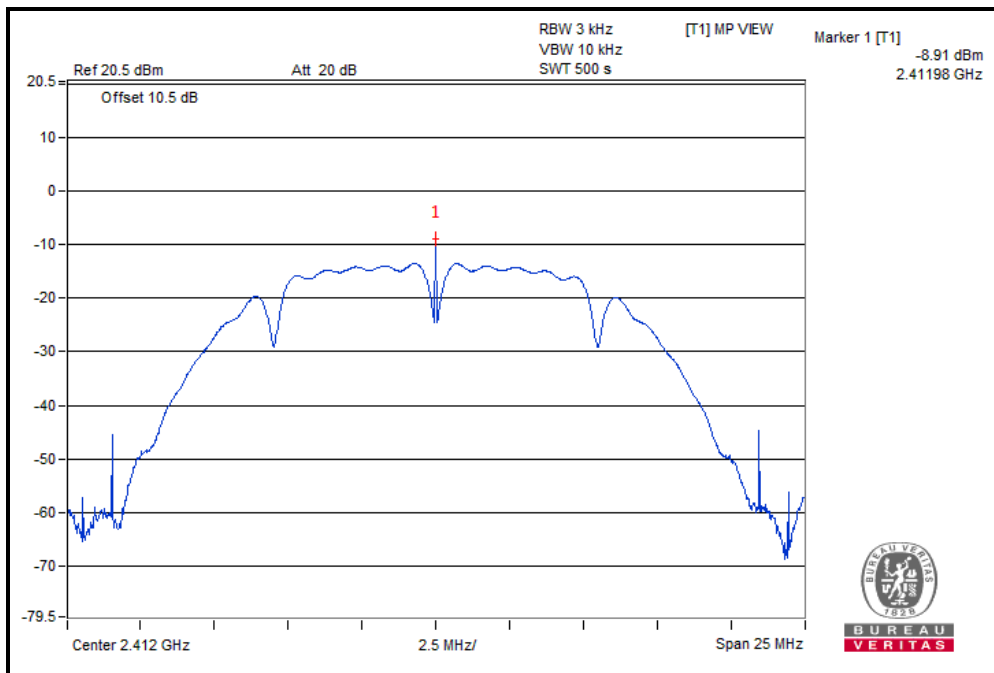






**BUREAU  
VERITAS**

**Test Report No.: RF160314W002-2**

**802.11g**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-8.06	8	PASS
6	2437	-6.67	8	PASS
11	2462	-6.61	8	PASS

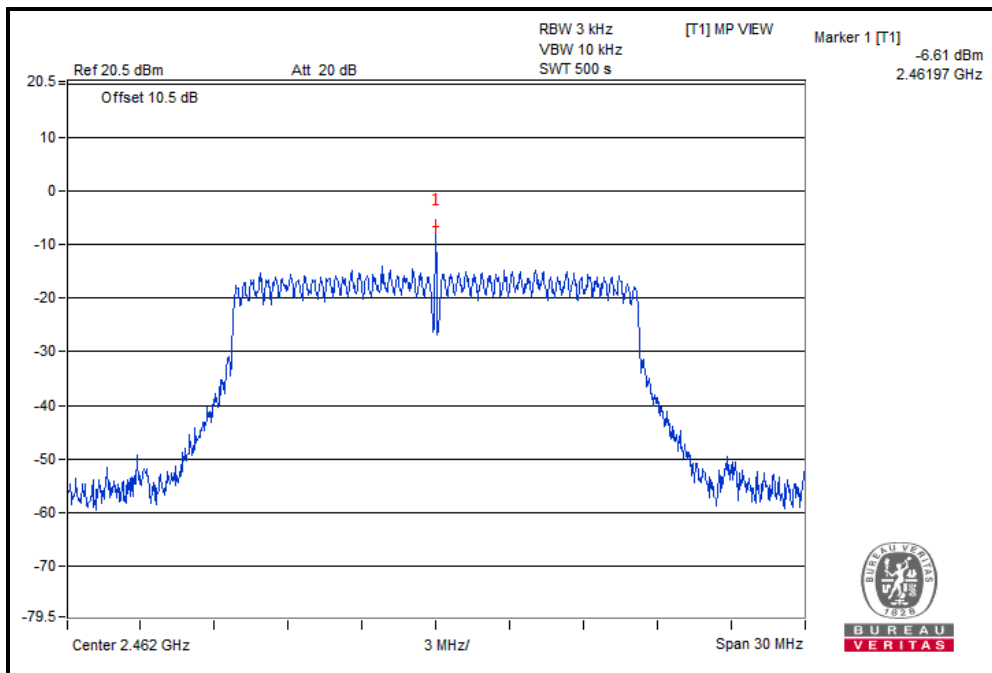




**BUREAU  
VERITAS**

Test Report No.: RF160314W002-2

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)		Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1		
1	2412	-10.56	-11.65	8	PASS
6	2437	-10.63	-11.89	8	PASS
11	2462	-10.23	-11.89	8	PASS

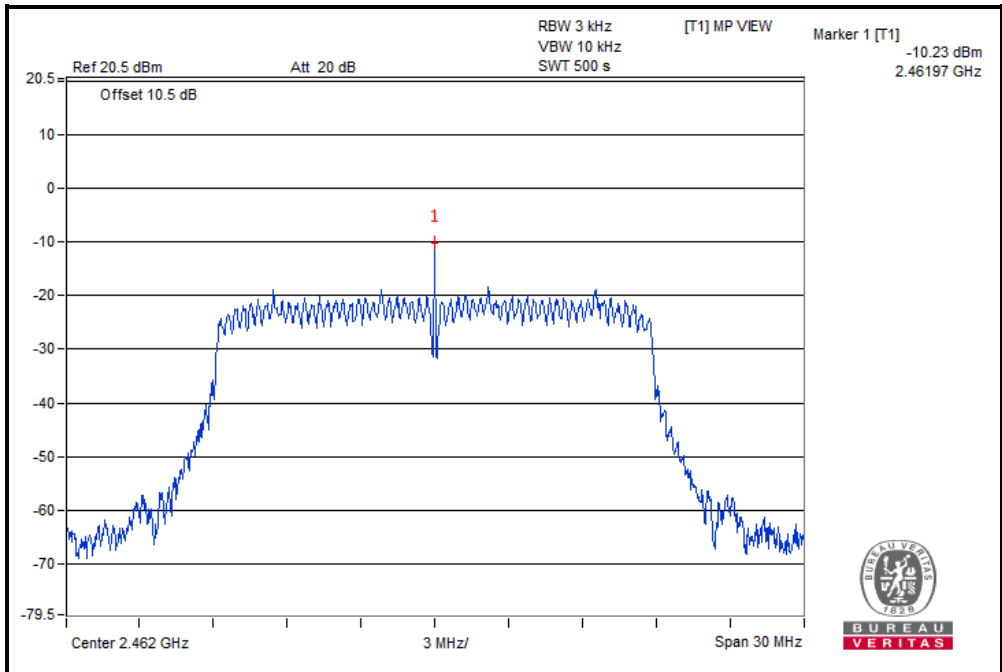

**BUREAU  
VERITAS**




**BUREAU  
VERITAS**

Test Report No.: RF160314W002-2

802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)		Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1		
3	2422	-8.88	-9.63	8	PASS
6	2437	-9.94	-11.30	8	PASS
9	2452	-10.05	-11.12	8	PASS

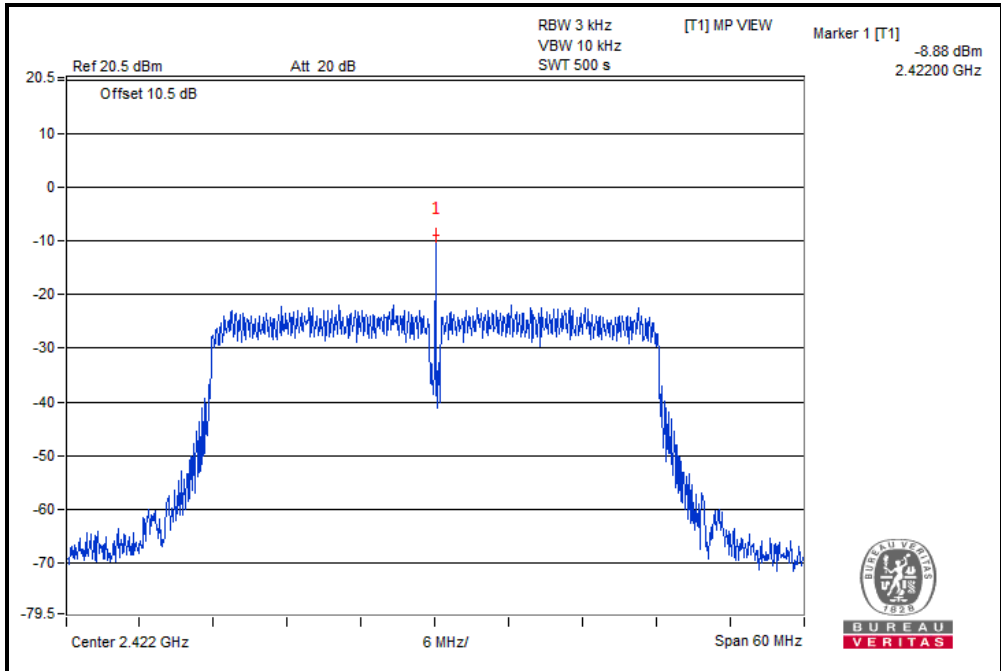




**BUREAU  
VERITAS**

Test Report No.: RF160314W002-2

**BT-LE (GFSK)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-10.03	8	PASS
19	2440	-10.25	8	PASS
39	2480	-11.54	8	PASS

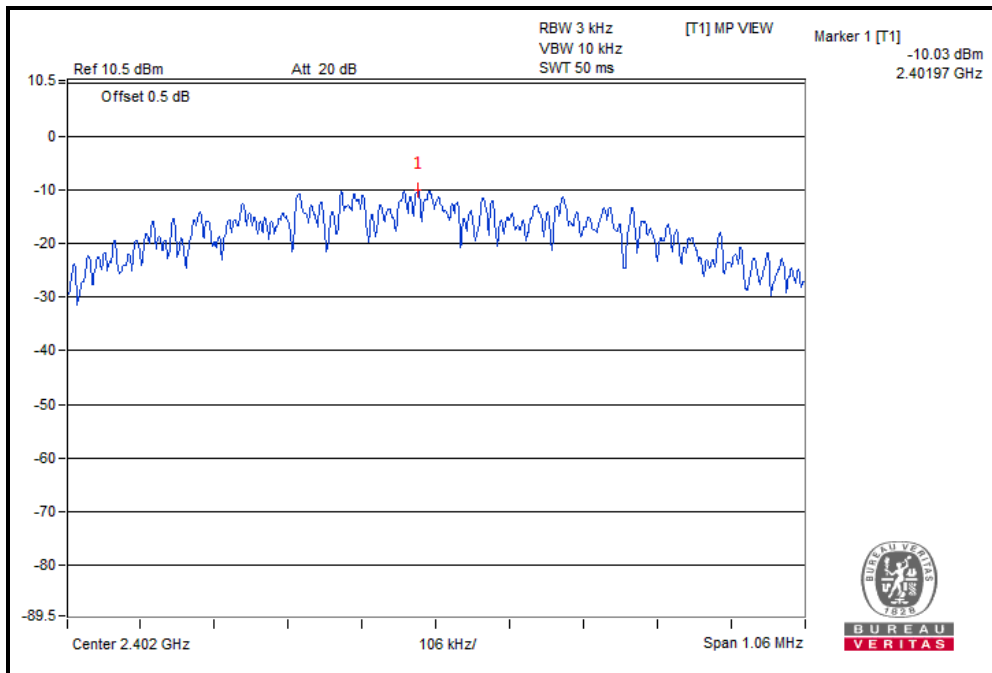




## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

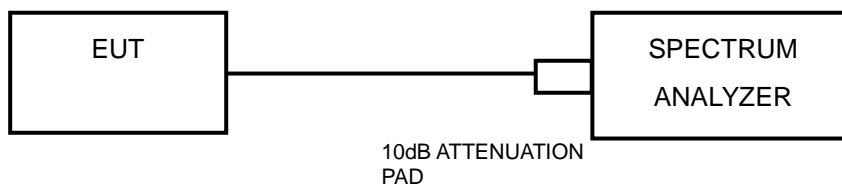

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


### 4.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



### 4.6.8 TEST RESULTS

#### 802.11b

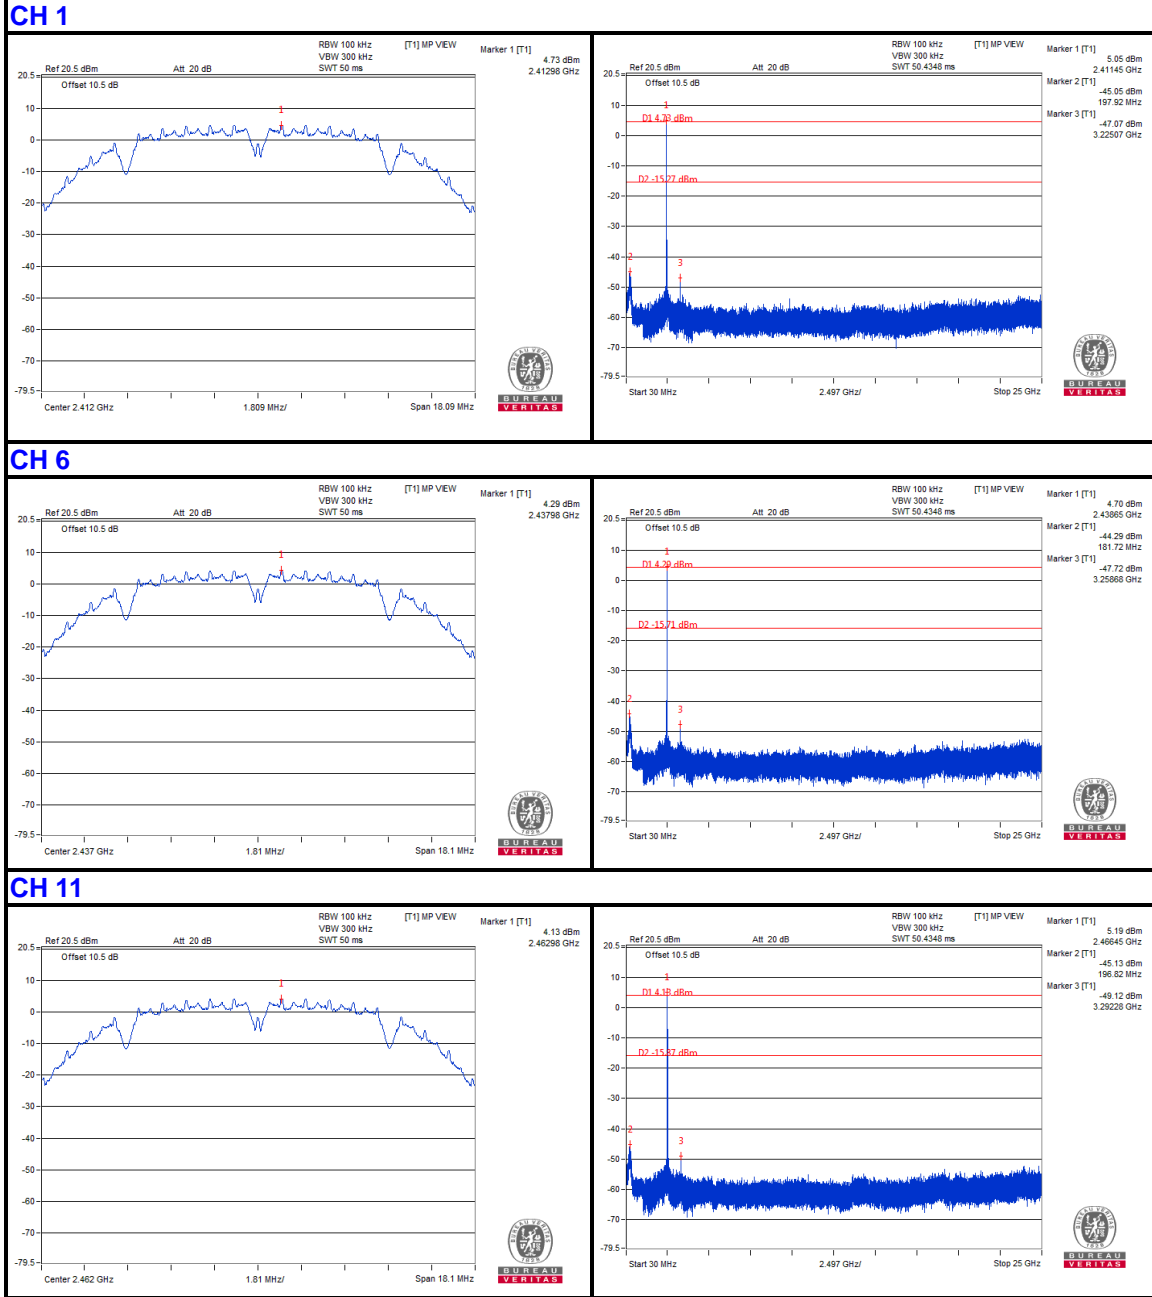




BUREAU VERITAS


Test Report No.: RF160314W002-2

802.11g


CH 1

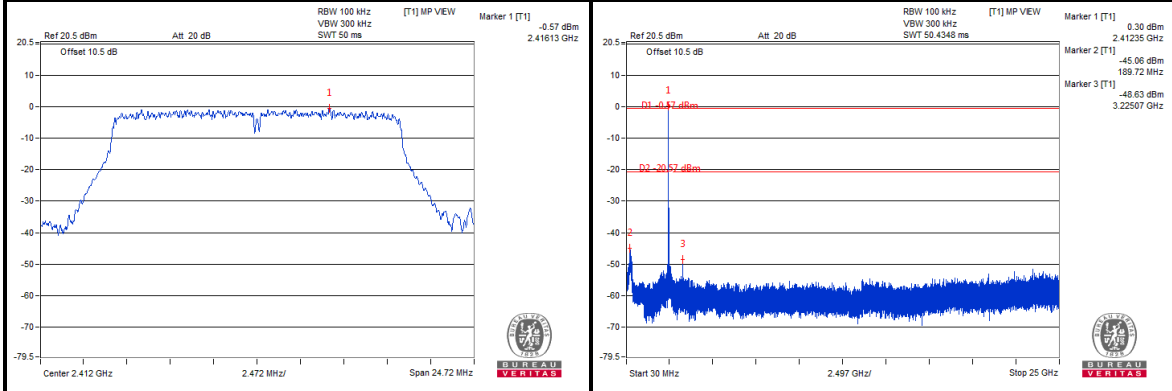

CH 6

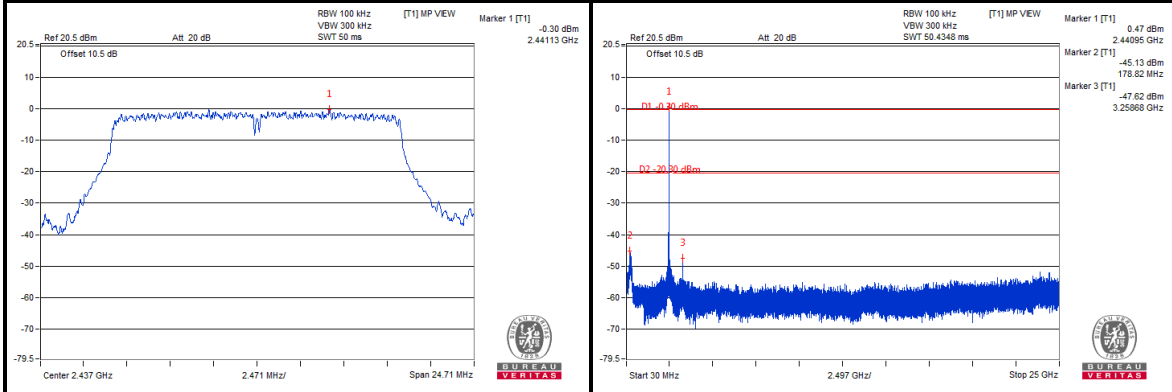

CH 11

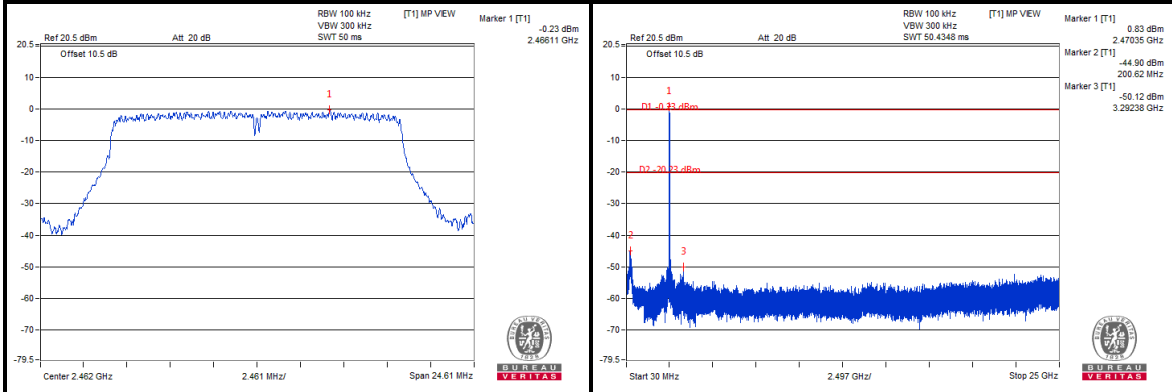

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)







BUREAU VERITAS

Test Report No.: RF160314W002-2



### 802.11n (20MHz)

### CHAIN0



#### CH 1

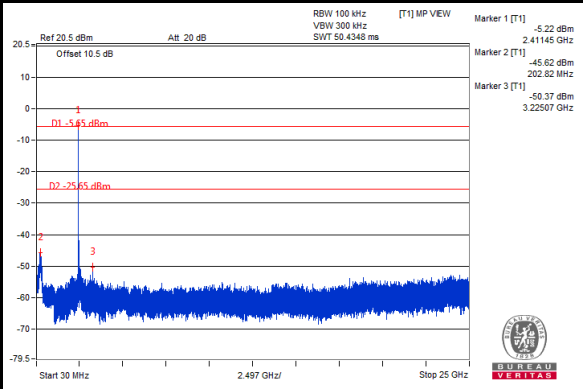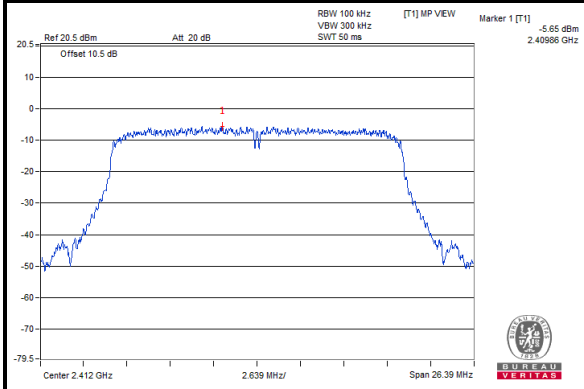

#### CH 6

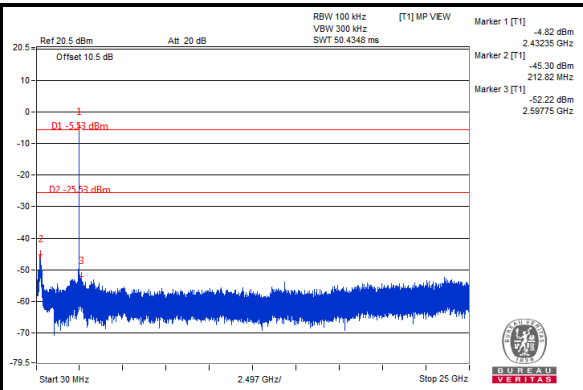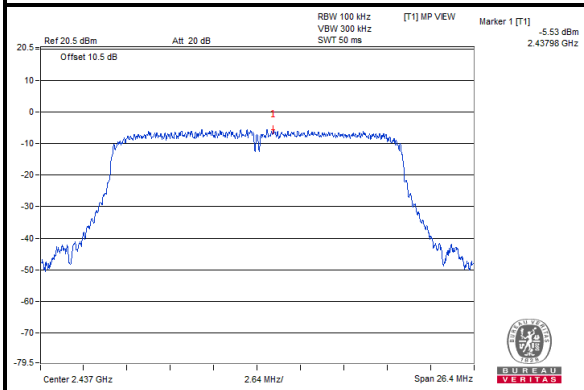

#### CH 11

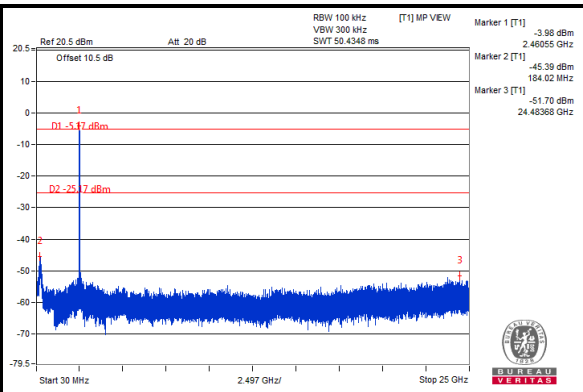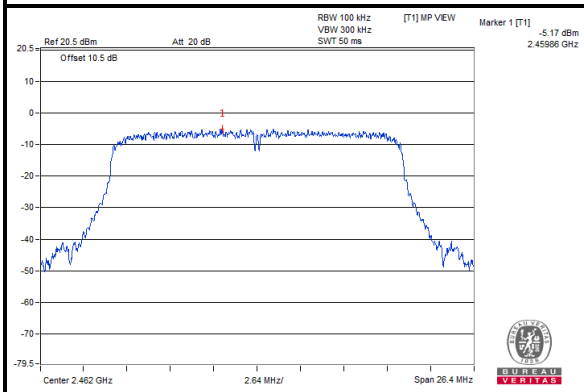




BUREAU VERITAS

Test Report No.: RF160314W002-2

### CHAIN1

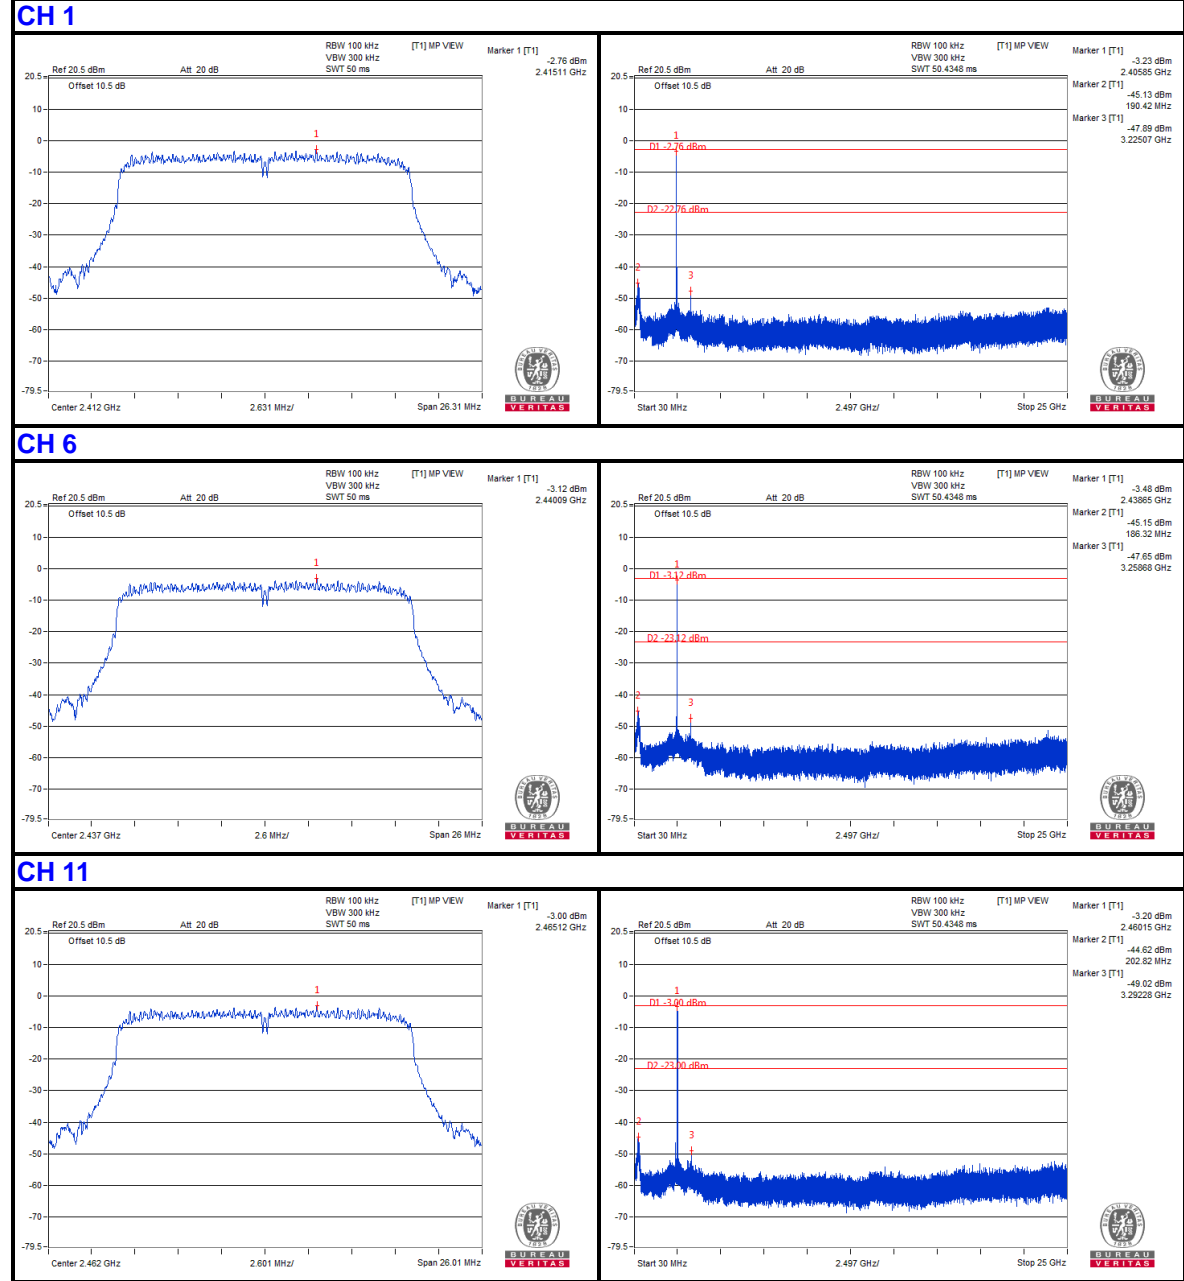

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)





BUREAU VERITAS

Test Report No.: RF160314W002-2



802.11n (40MHz)

CHAIN0



CH 3

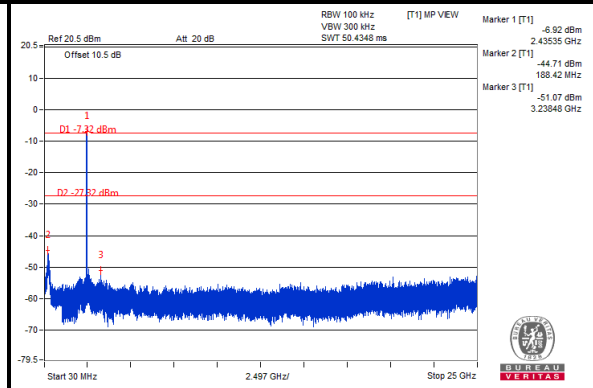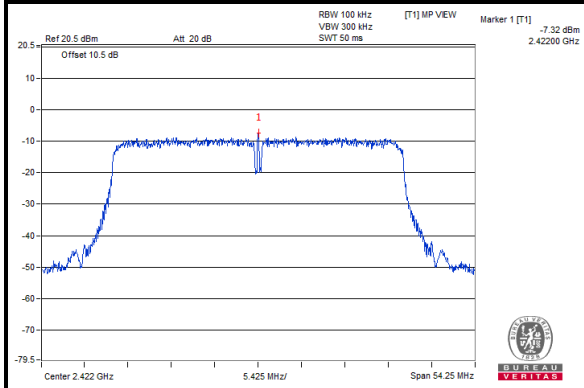

CH 6

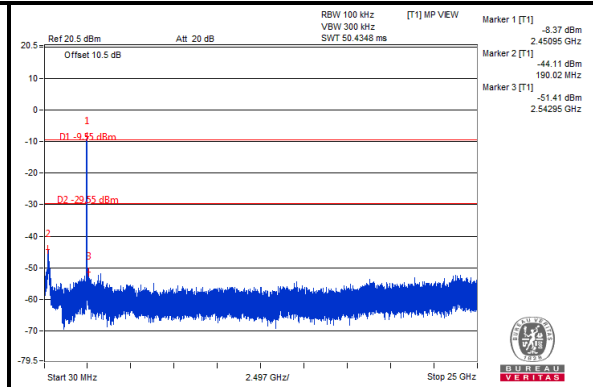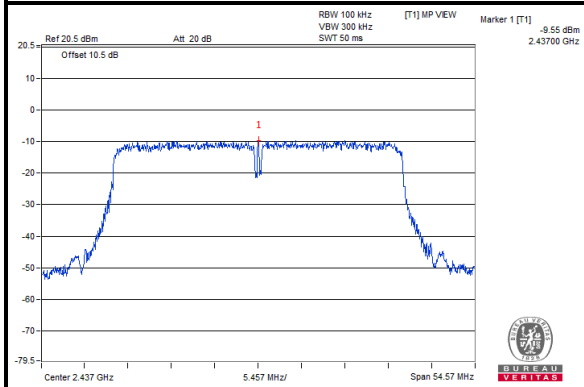

CH 9

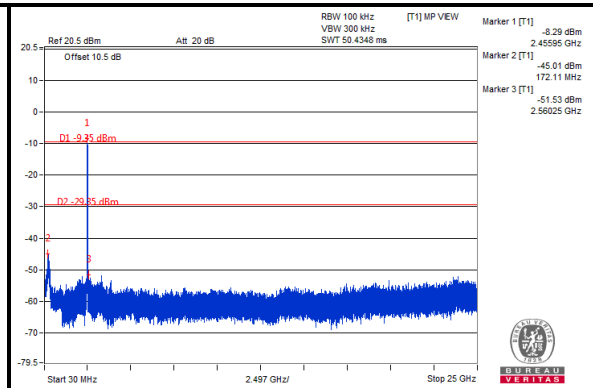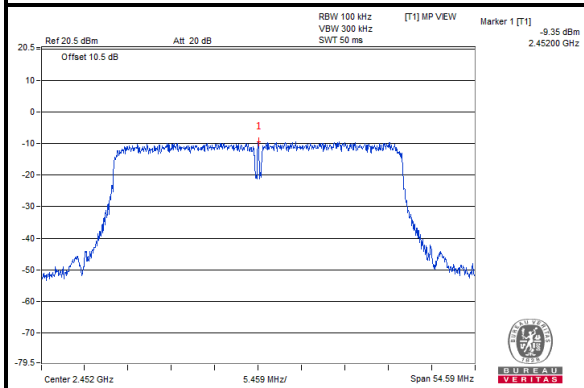

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)





BUREAU VERITAS



Test Report No.: RF160314W002-2

CHAIN1



CH 3

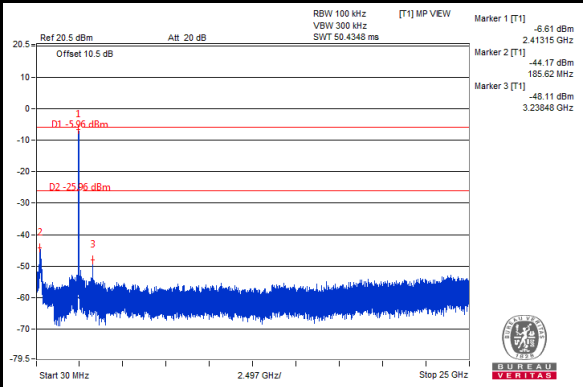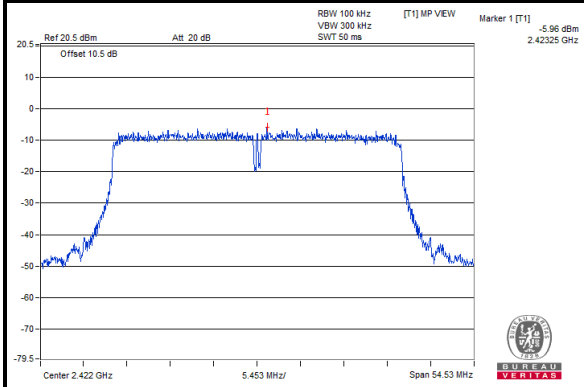

CH 6

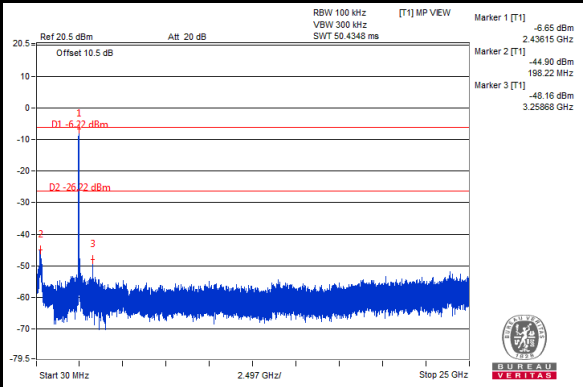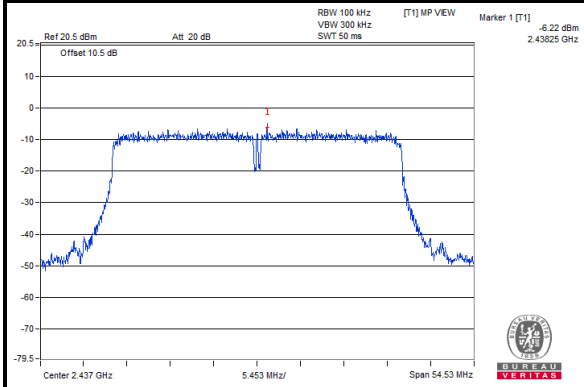

CH 9

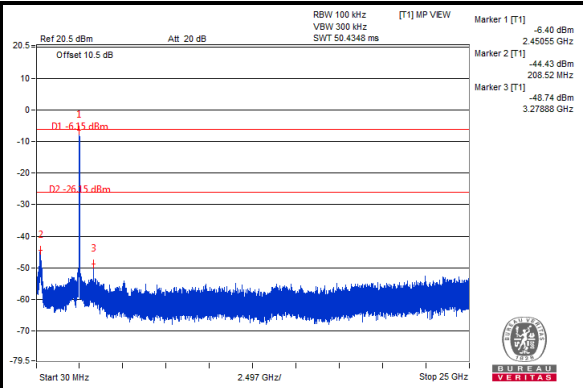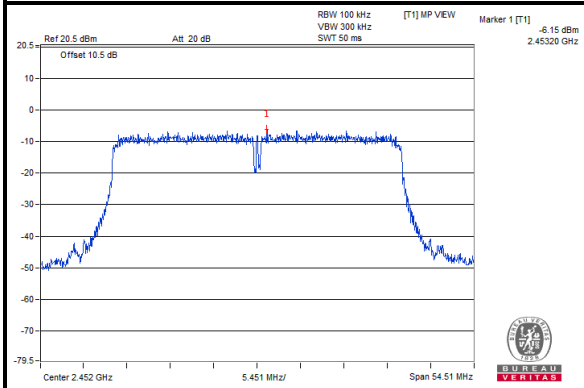

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080 Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)





**BUREAU  
VERITAS**



Test Report No.: RF160314W002-2

### BT-LE (GFSK)



#### CH 0

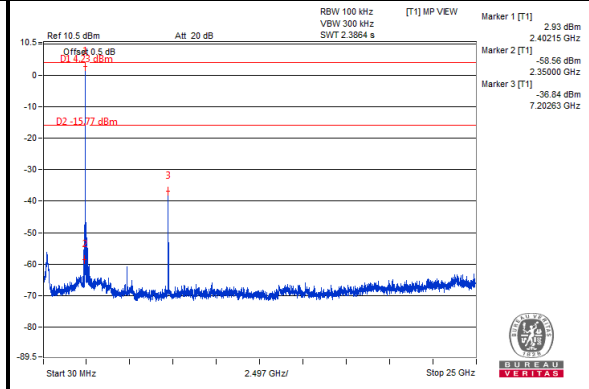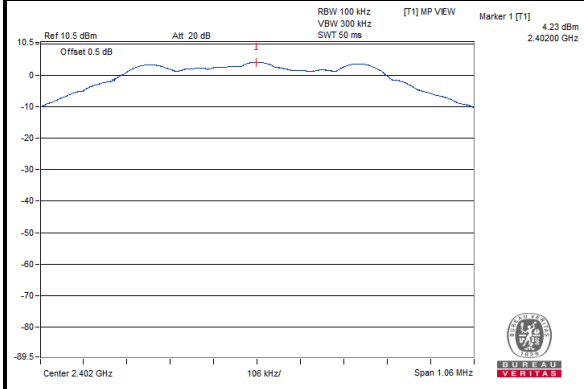

#### CH 19

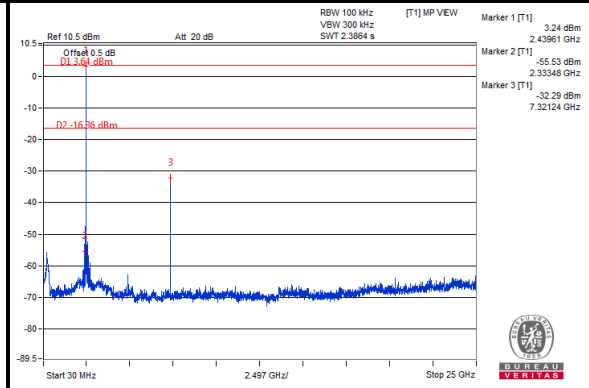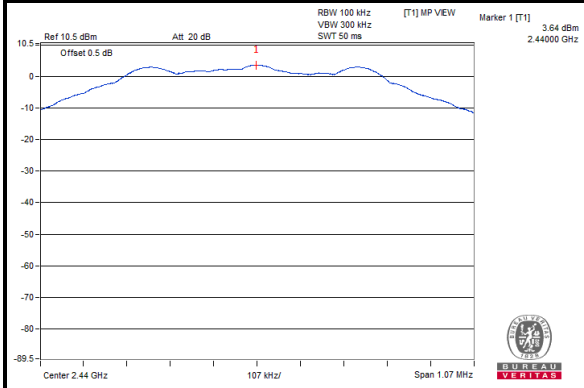

#### CH 39

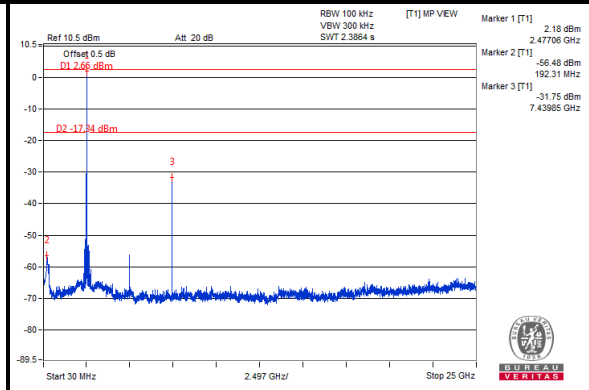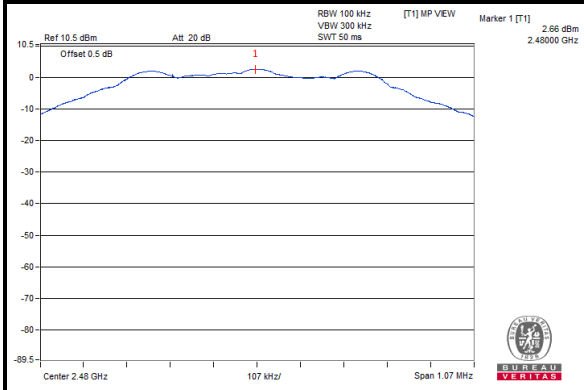



## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

**---END---**