



# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**

Pantech Co., Ltd.

**Address:**DMC I-2, PANTECH R&D Center Sang Am dong, Mapogu,  
121-792, Korea**Date of Issue:**

July 19, 2011

**Test Site/Location:**HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-  
si, Kyunggi-Do, Korea**Report No.:** HCTR1107FR20**HCT FRN:** 0005866421**FCC ID:****JYCCDMAPT11****APPLICANT:****Pantech Co., Ltd.****FCC Model(s):**

CDMA PT111

**Additional FCC Model(s):**

CDMA EIS01PT

**EUT Type:**

CDMA/ GSM/ WCDMA Phone with Bluetooth &amp; WLAN

**Max. RF Output Power:**

Wi-Fi 802.11b(23.11 dBm) / Wi-Fi 802.11g (22.96 dBm) / Wi-Fi 802.11n (21.59 dBm)

**Frequency Range:**

2412 MHz -2462 MHz

**Modulation type**

CCK/DSSS/OFDM

**FCC Classification:**

Digital Transmission System(DTS)

**FCC Rule Part(s):**

Part 15 subpart C 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by****: Jong Seok Lee****Test engineer of RF Team****Approved by****: Sang Jun Lee****Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1107FR20	July 19, 2011	- First Approval Report

# Table of Contents

- 1. GENERAL INFORMATION ..... 4
- 2. EUT DESCRIPTION ..... 4
- 3. TEST METHODOLOGY ..... 5
  - 3.1 EUT CONFIGURATION ..... 5
  - 3.2 EUT EXERCISE ..... 5
  - 3.3 GENERAL TEST PROCEDURES ..... 5
  - 3.4 DESCRIPTION OF TEST MODES ..... 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS ..... 6
  - 5.1 FACILITIES ..... 6
  - 5.2 EQUIPMENT ..... 6
- 6. ANTENNA REQUIREMENTS ..... 7
- 7. TEST RESULT ..... 8
  - 7.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n) ..... 8
  - 7.2 OUTPUT POWER MEASUREMENT (802.11b/g/n)..... 1 5
  - 7.3 POWER SPECTRAL DENSITY (802.11b/g/n)..... 4 9
  - 7.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ... 5 5
  - 7.5 RADIATED MEASUREMENT..... 6 9
    - 7.5.1 RADIATED SPURIOUS EMISSIONS..... 6 9
    - 7.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS ..... 7 7
  - 7.6 POWERLINE CONDUCTED EMISSIONS ..... 7 8
- 8. LIST OF TEST EQUIPMENT ..... 8 3

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN		FCC ID: JYCCDMAPT11



## 1. GENERAL INFORMATION

**Applicant:** Pantech Co., Ltd.  
**Address:** DMC I-2, PANTECH R&D Center Sang Am dong, Mapogu, 121-792, Korea  
**FCC ID:** JYCCDMAPT111  
**EUT Type:** CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN  
**Model Name:** CDMA PTI11  
**Additional Model Name:** CDMA EIS01PT  
**Date(s) of Tests:** July 05, 2011 ~ July 12, 2011  
**Contact person:** Name: In Youl Lee  
 Phone #: +82-2-2070-1297  
**Place of Tests:** HCT Co., Ltd.  
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA. (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>EUT Type</b>	CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN
<b>Model Name</b>	CDMA PTI11
<b>Additional Model Name</b>	CDMA EIS01PT
<b>Power Supply</b>	DC 3.7 V
<b>Battery type</b>	Li-ion Battery(Standard)
<b>Frequency Range</b>	TX: 2412 MHz ~ 2462 MHz RX: 2412 MHz ~ 2462 MHz
<b>Max. RF Output Power:</b>	Wi-Fi 802.11b(23.11 dBm) / Wi-Fi 802.11g (22.96 dBm) ) / Wi-Fi 802.11n (21.59 dBm)
<b>Modulation Type</b>	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)
<b>Antenna Specification</b>	Manufacturer: ARRO CO. LTD. Antenna type: SUB Antenna Peak Gain : 0 dBi

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

#### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

#### 5. FACILITIES AND ACCREDITATIONS

##### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

##### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

## 7. TEST RESULT


### 7.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n)

#### Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION

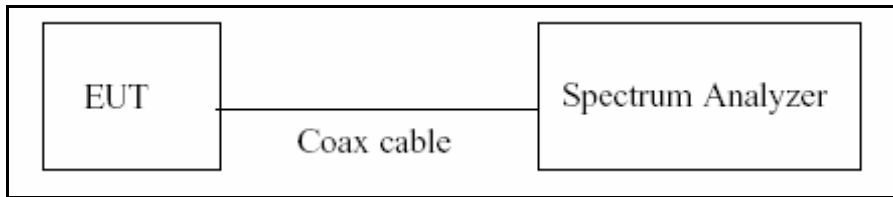

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 kHz

VBW: 100 kHz

SPAN: 40 MHz

#### ■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	8.047	0.500	Pass
2437	6	7.969	0.500	Pass
2462	11	8.233	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.449	0.500	Pass
2437	6	15.514	0.500	Pass
2462	11	15.674	0.500	Pass




Conducted 6dB Bandwidth Measurements for 802.11n


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.215	0.500	Pass
2437	6	15.189	0.500	Pass
2462	11	15.158	0.500	Pass

RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 1)

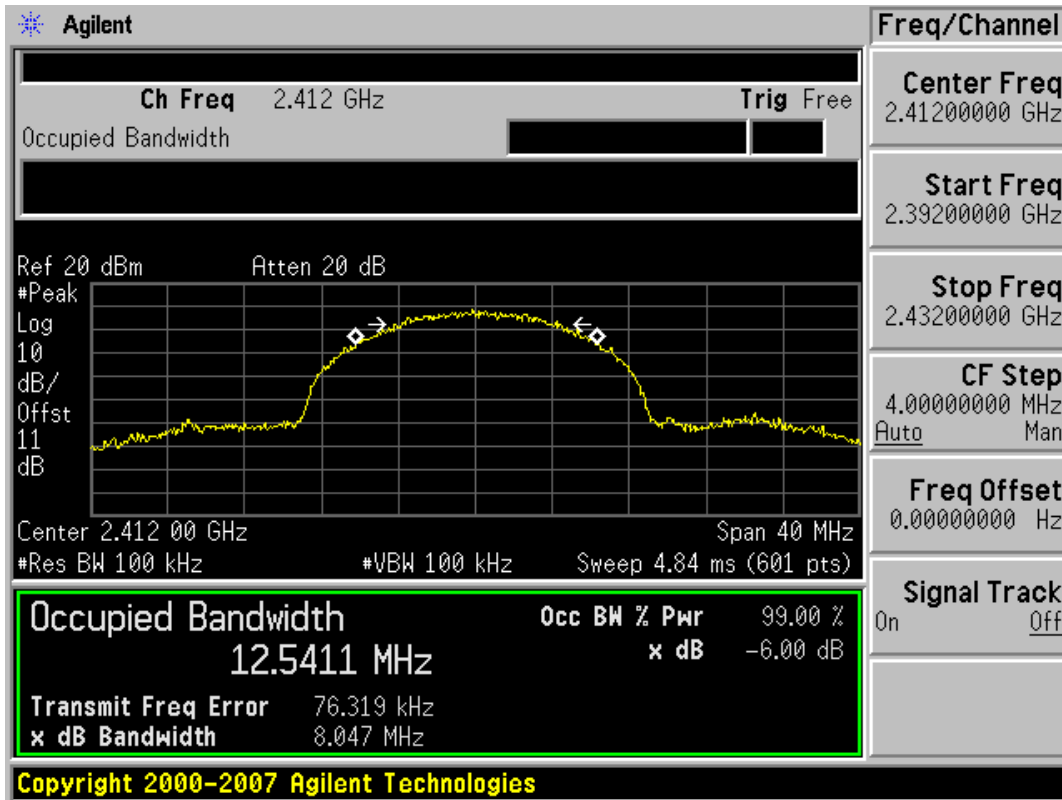


6dB Bandwidth plot (802.11b-CH 6)

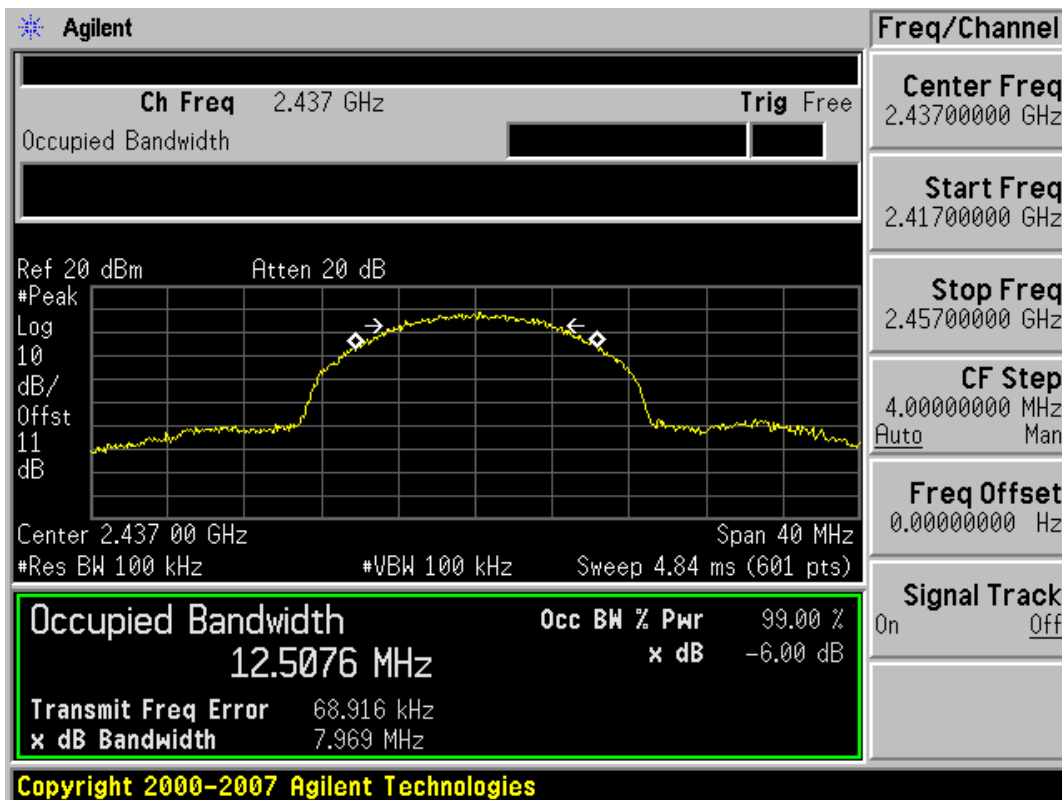


### 6dB Bandwidth plot (802.11b-CH 11)

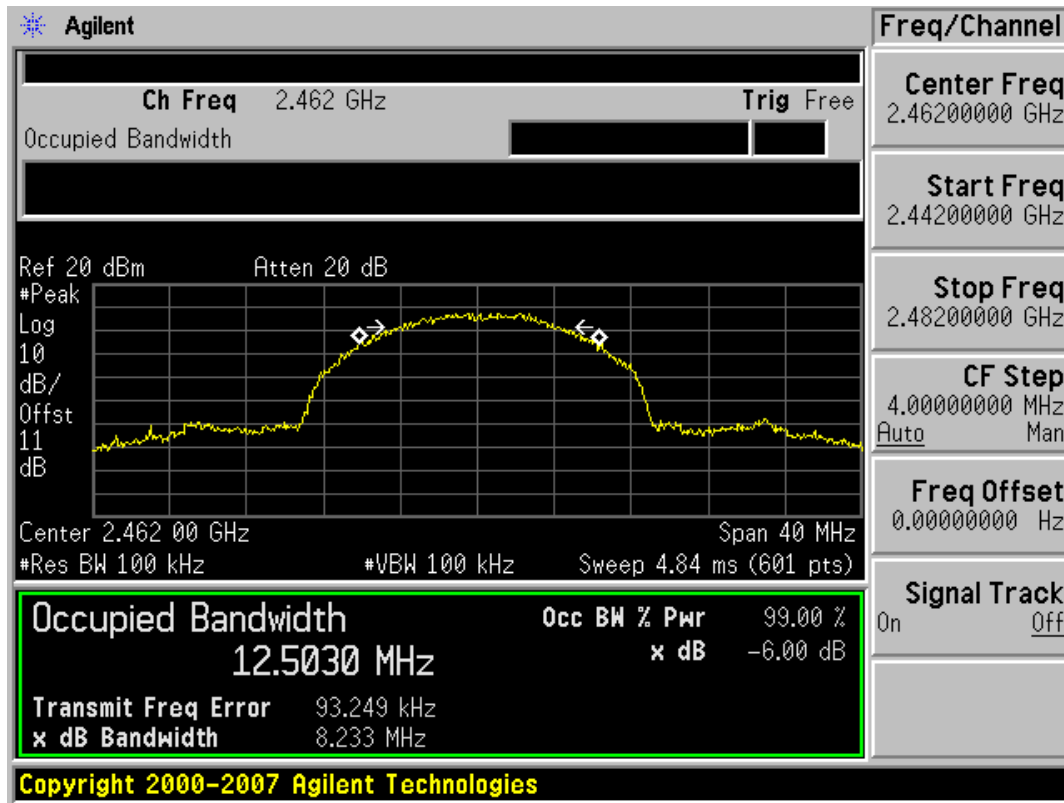


### 6dB Bandwidth plot (802.11g-CH 1)

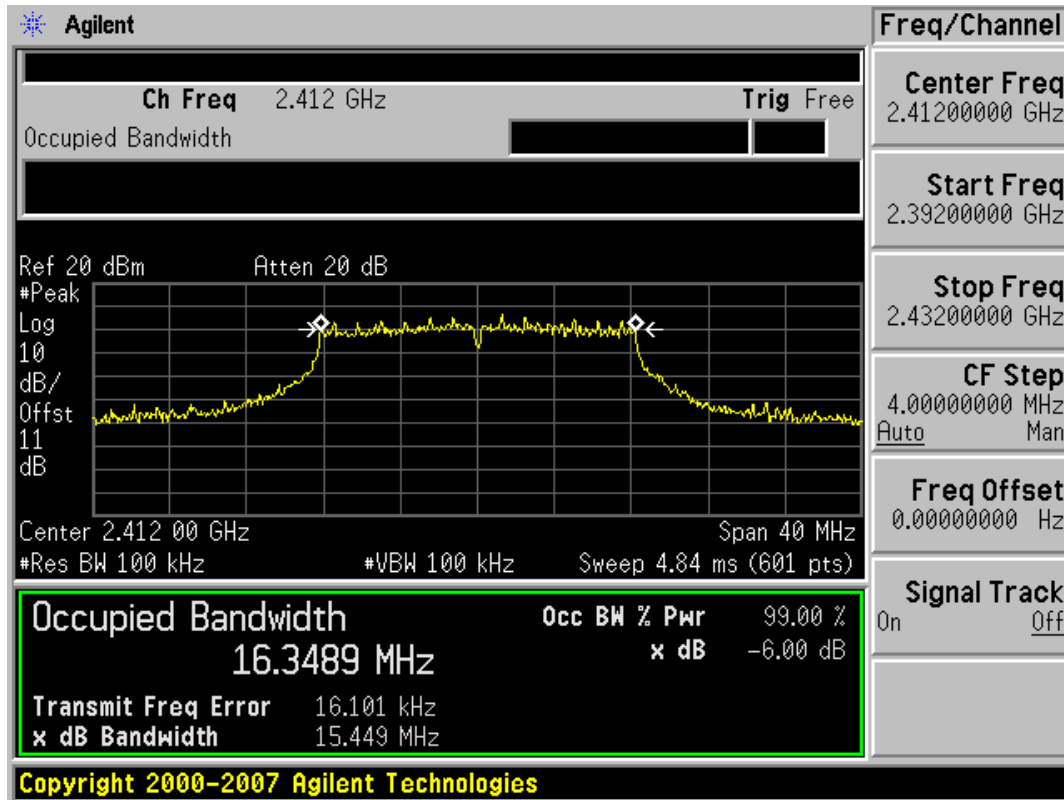


### 6dB Bandwidth plot (802.11g-CH 6)

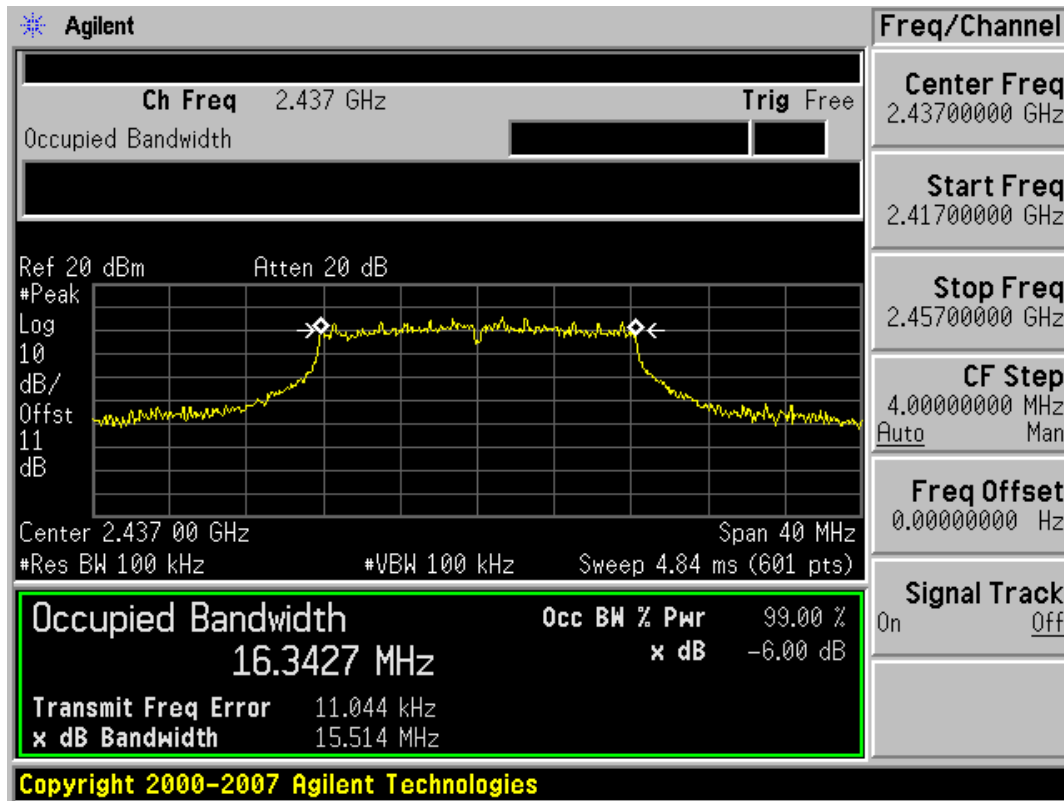


### 6dB Bandwidth plot (802.11g-CH 11)

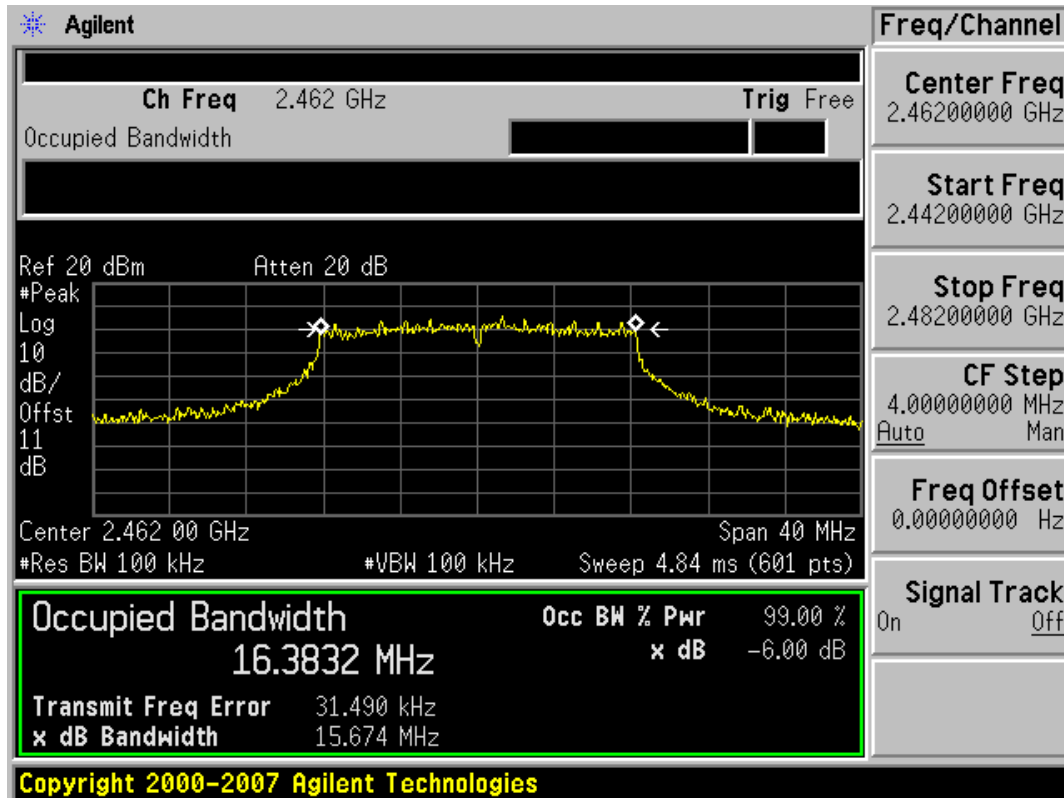


### 6dB Bandwidth plot (802.11n-CH 1)

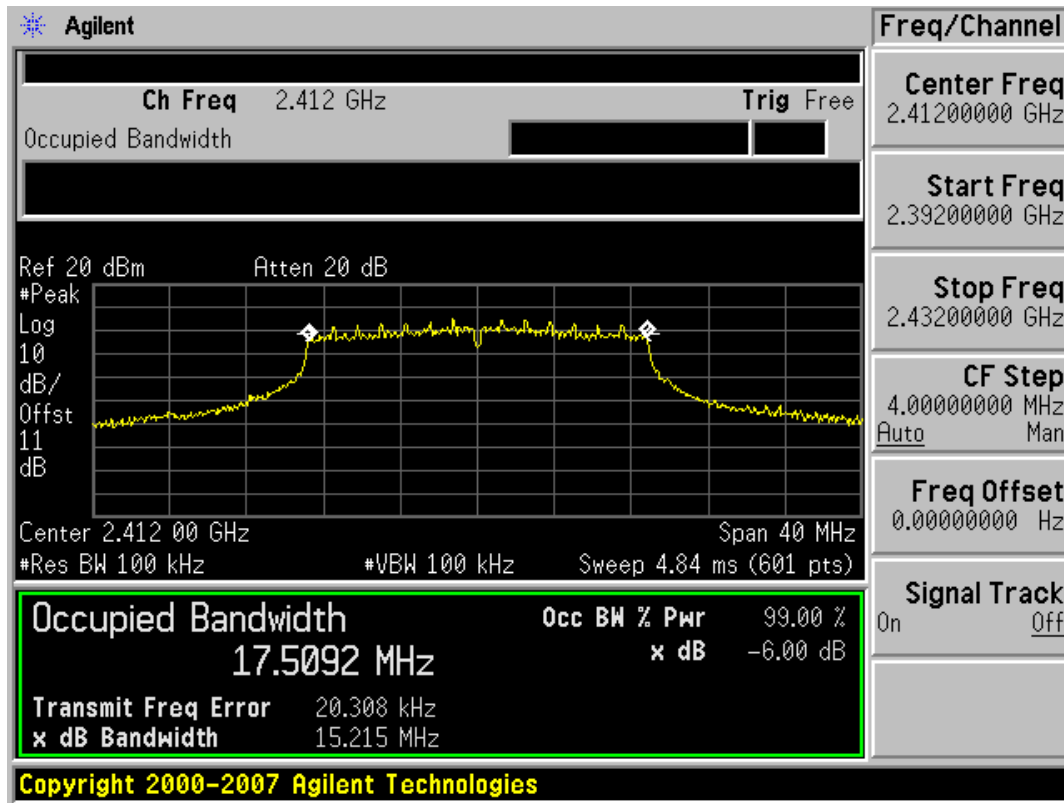

### 6dB Bandwidth plot (802.11n-CH 6)

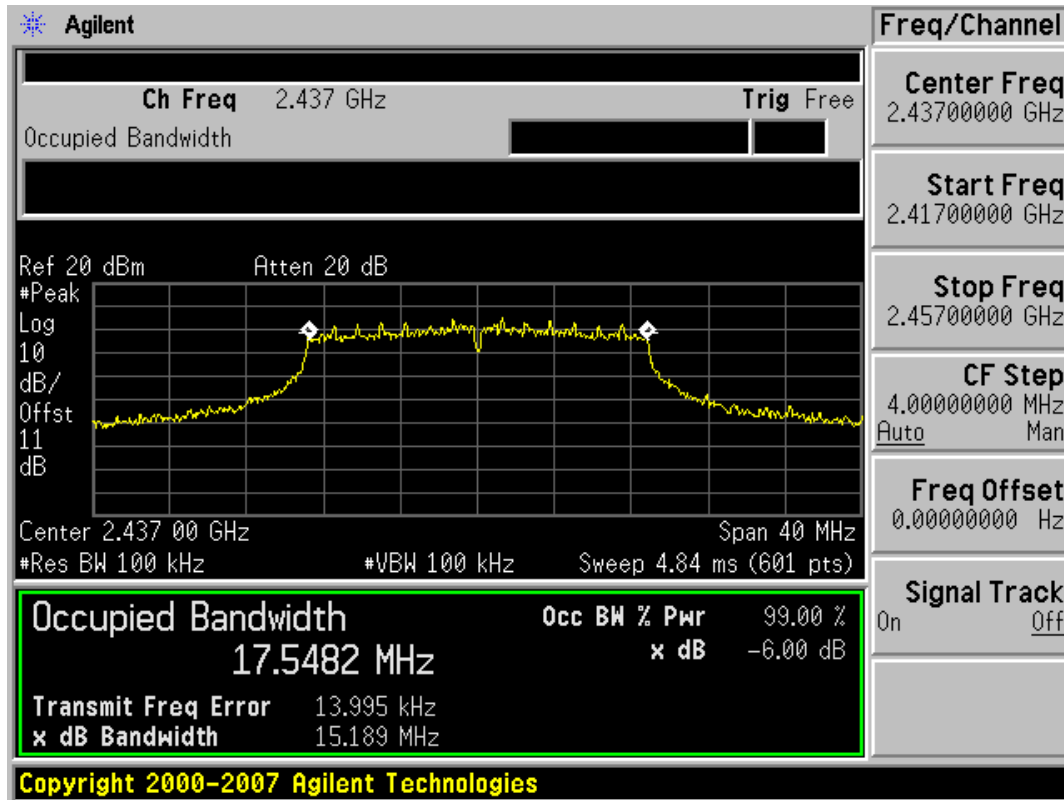

**6dB Bandwidth plot (802.11n-CH 11)**

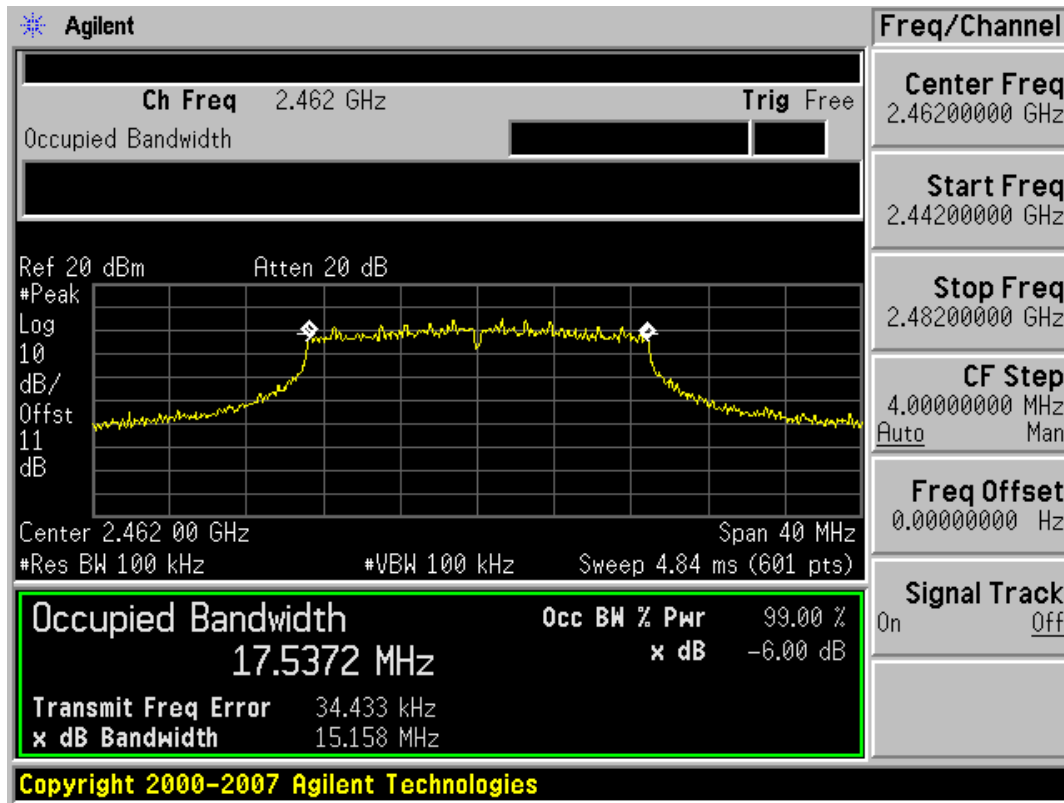

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11


## 7.2 OUTPUT POWER MEASUREMENT (802.11b/g/n)

### Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION

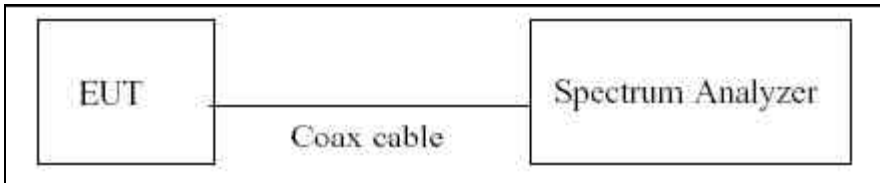

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 1 MHz

VBW: 1 MHz

SPAN: 40 MHz

Detector Mode = Peak

<b>FCC PT.15.247 TEST REPORT</b>		<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11	

■ TEST RESULTS

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	19.77	30
		2 Mbps	20.01	30
		5.5 Mbps	21.83	30
		11 Mbps	23.11	30
2437	6	1 Mbps	19.61	30
		2 Mbps	19.85	30
		5.5 Mbps	21.52	30
		11 Mbps	23.04	30
2462	11	1 Mbps	19.32	30
		2 Mbps	19.48	30
		5.5 Mbps	21.32	30
		11 Mbps	22.93	30



**Conducted Output Power Measurements (802.11g Mode)**


802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	22.25	30
		9 Mbps	22.37	30
		12 Mbps	22.45	30
		18 Mbps	22.25	30
		24 Mbps	22.82	30
		36 Mbps	22.77	30
		48 Mbps	22.96	30
		54 Mbps	22.91	30
2437	6	6 Mbps	22.20	30
		9 Mbps	22.24	30
		12 Mbps	22.74	30
		18 Mbps	22.15	30
		24 Mbps	22.65	30
		36 Mbps	22.44	30
		48 Mbps	22.70	30
		54 Mbps	22.72	30
2462	11	6 Mbps	22.18	30
		9 Mbps	22.20	30
		12 Mbps	22.26	30
		18 Mbps	22.19	30
		24 Mbps	22.45	30
		36 Mbps	22.21	30
		48 Mbps	22.50	30
		54 Mbps	22.65	30

Conducted Output Power Measurements (802.11n Mode)


802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	21.27	30
		13 Mbps	21.31	30
		19.5 Mbps	21.27	30
		26 Mbps	21.54	30
		39 Mbps	21.56	30
		52 Mbps	21.59	30
		58.5 Mbps	21.58	30
		65 Mbps	21.37	30
2437	6	6.5 Mbps	21.15	30
		13 Mbps	21.17	30
		19.5 Mbps	21.10	30
		26 Mbps	21.39	30
		39 Mbps	21.18	30
		52 Mbps	21.46	30
		58.5 Mbps	21.27	30
		65 Mbps	21.21	30
2462	11	6.5 Mbps	20.97	30
		13 Mbps	21.11	30
		19.5 Mbps	20.83	30
		26 Mbps	21.34	30
		39 Mbps	21.13	30
		52 Mbps	21.16	30
		58.5 Mbps	21.17	30
		65 Mbps	21.28	30

RESULT PLOTS


Conducted Output Power (802.11b-CH 1) 1Mbps

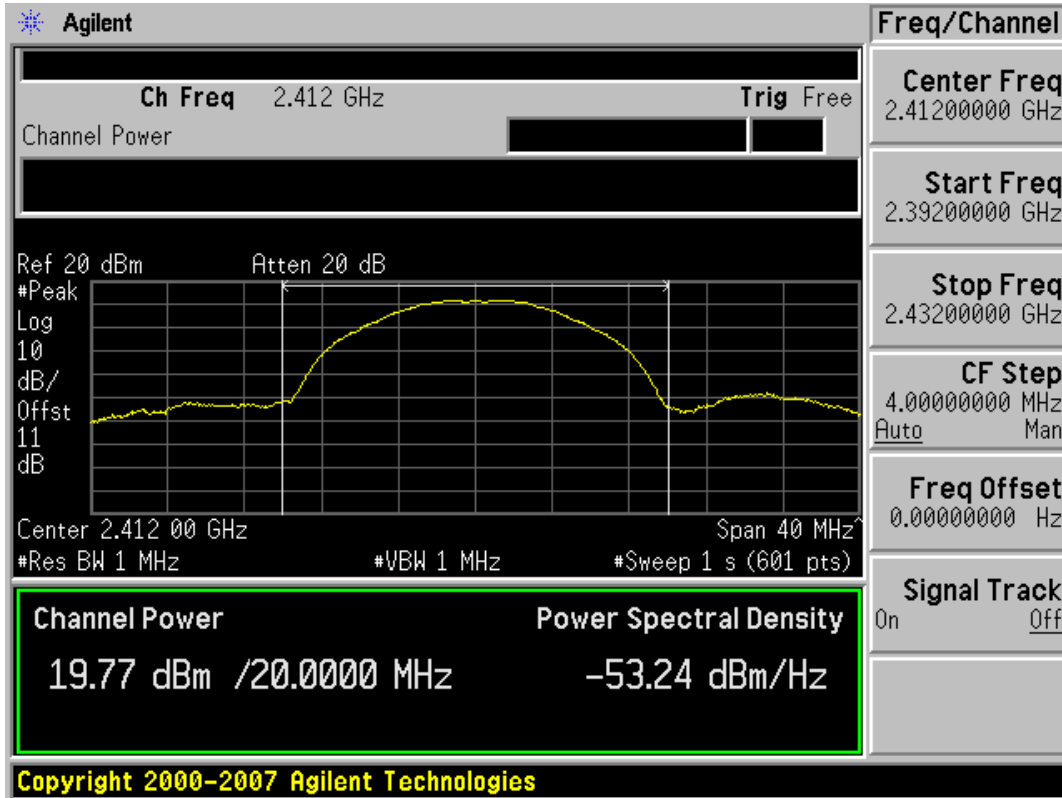


Conducted Output Power (802.11b-CH 1) 2Mbps

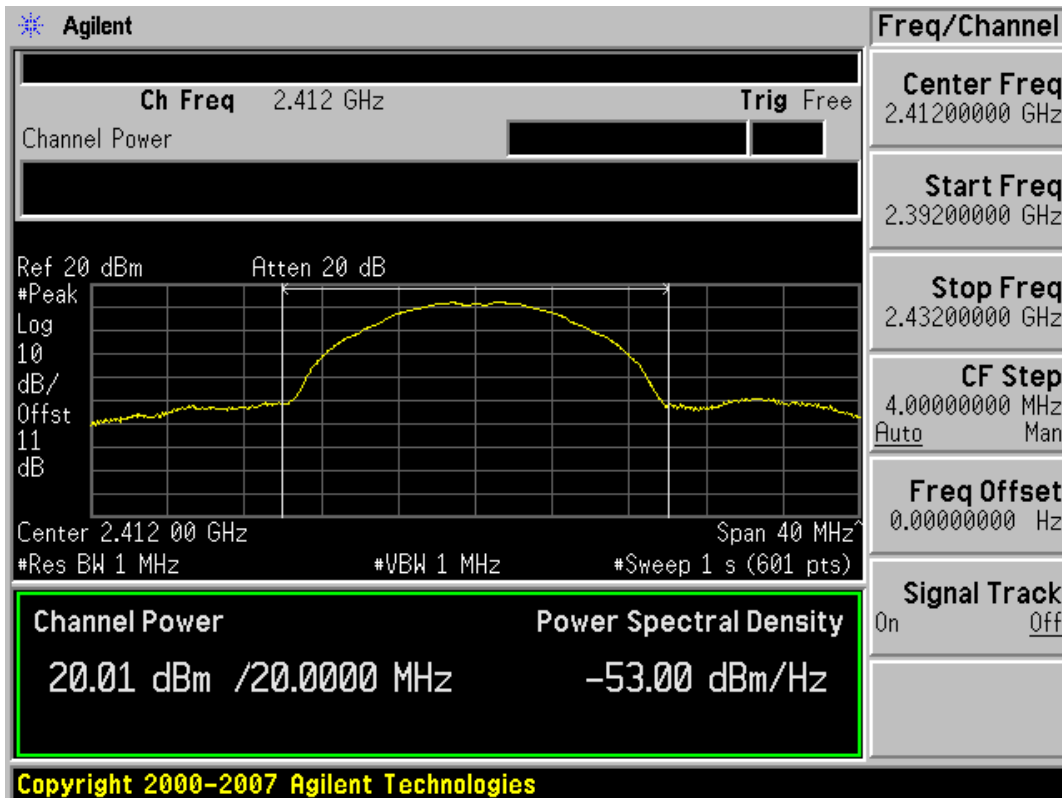


### Conducted Output Power (802.11b-CH 1) 5.5Mbps

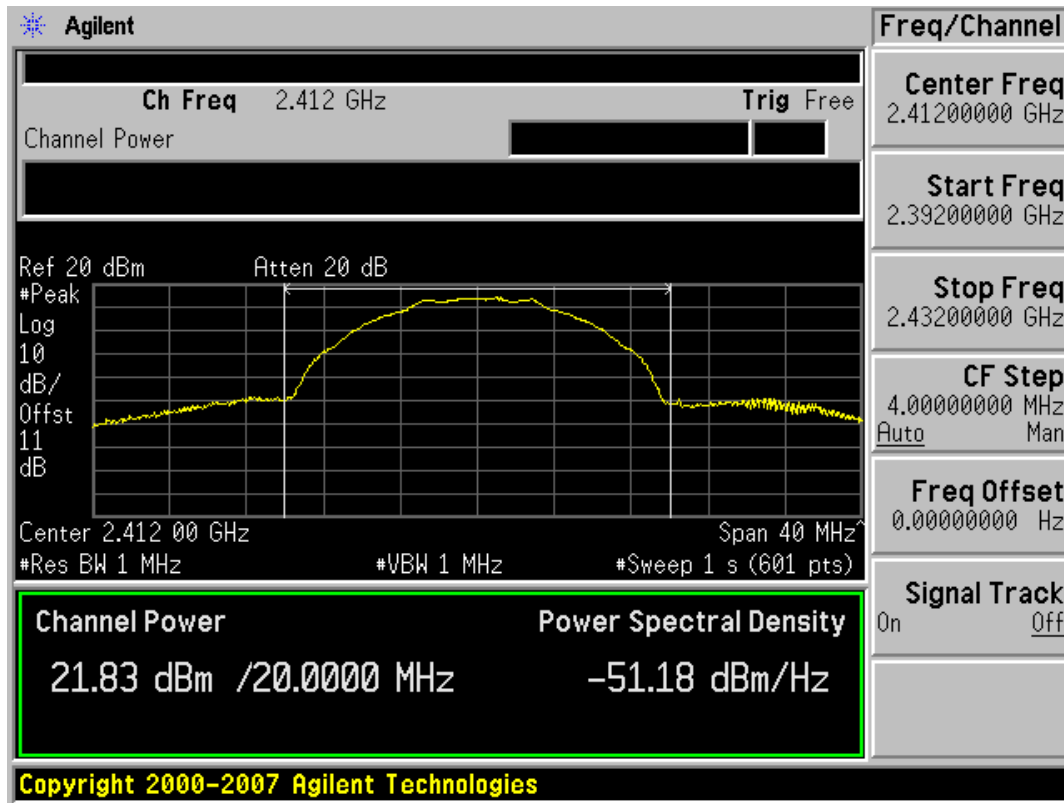


### Conducted Output Power (802.11b-CH 1) 11Mbps

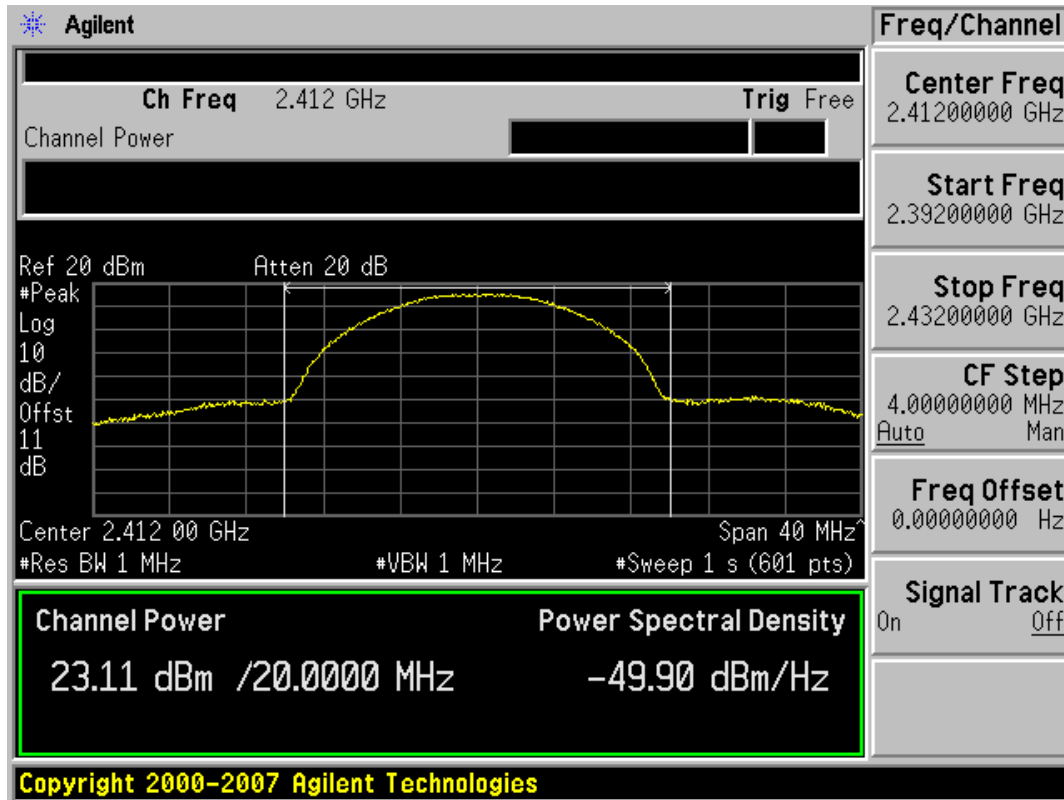


### Conducted Output Power (802.11b-CH 6) 1Mbps

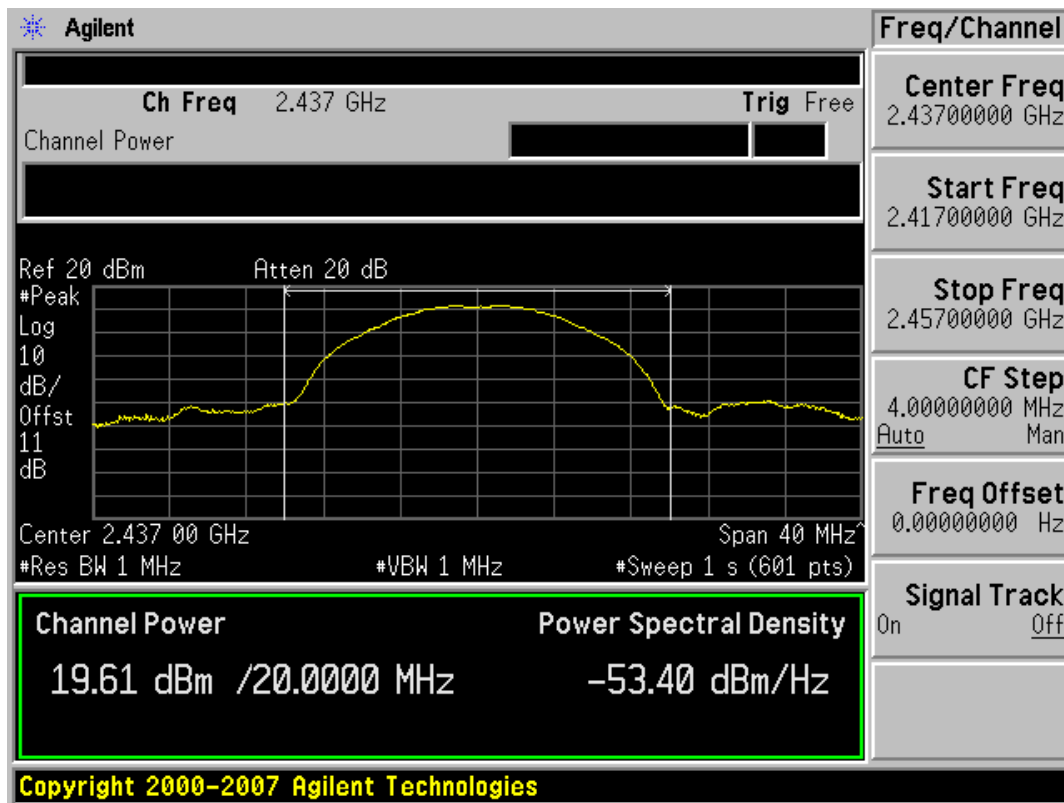


### Conducted Output Power (802.11b-CH 6) 2Mbps

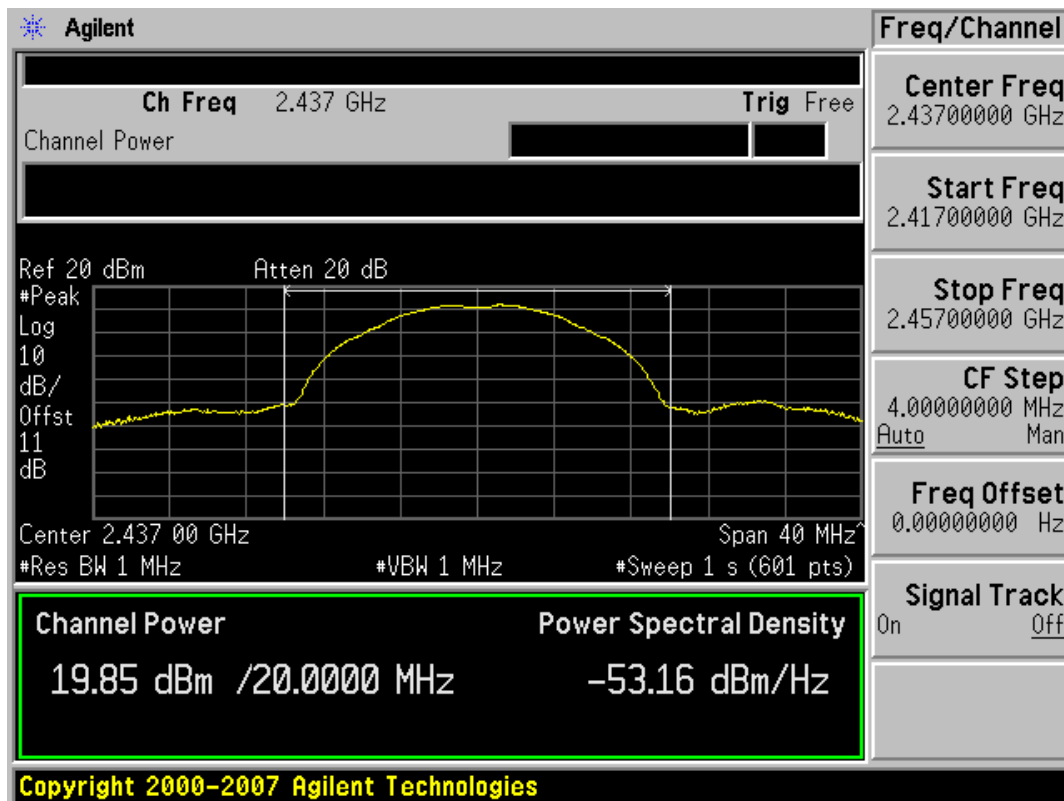


### Conducted Output Power (802.11b-CH 6) 5.5Mbps

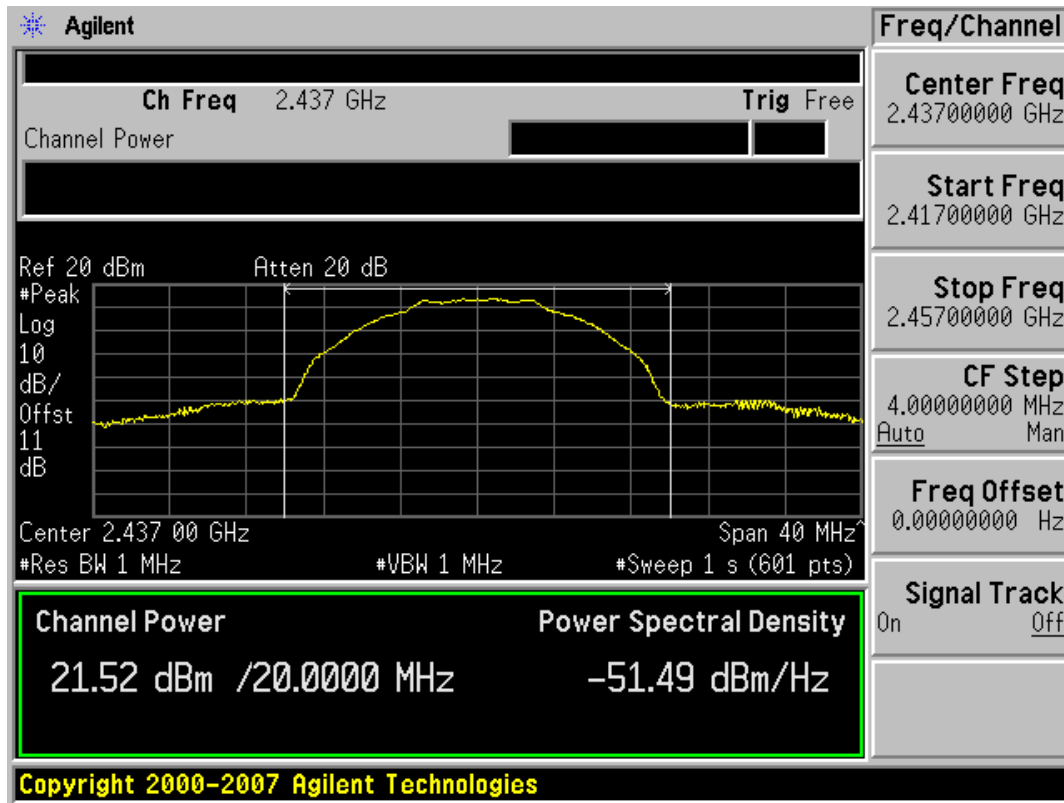


### Conducted Output Power (802.11b-CH 6) 11Mbps

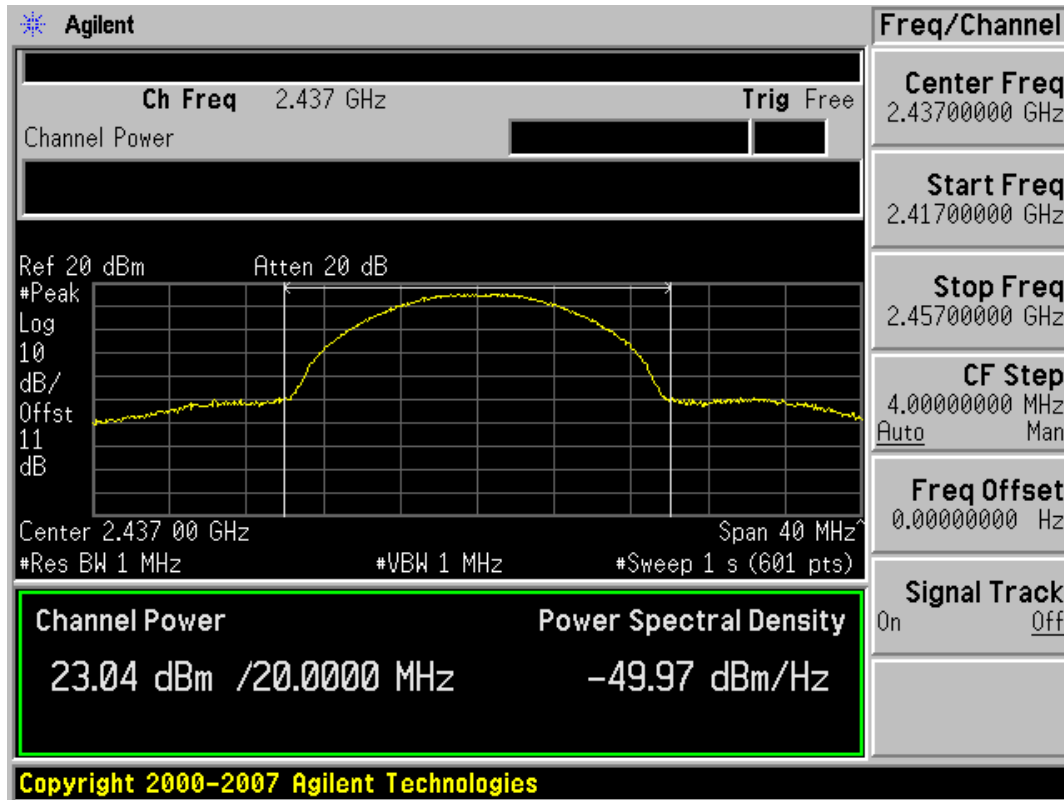


### Conducted Output Power (802.11b-CH 11) 1Mbps

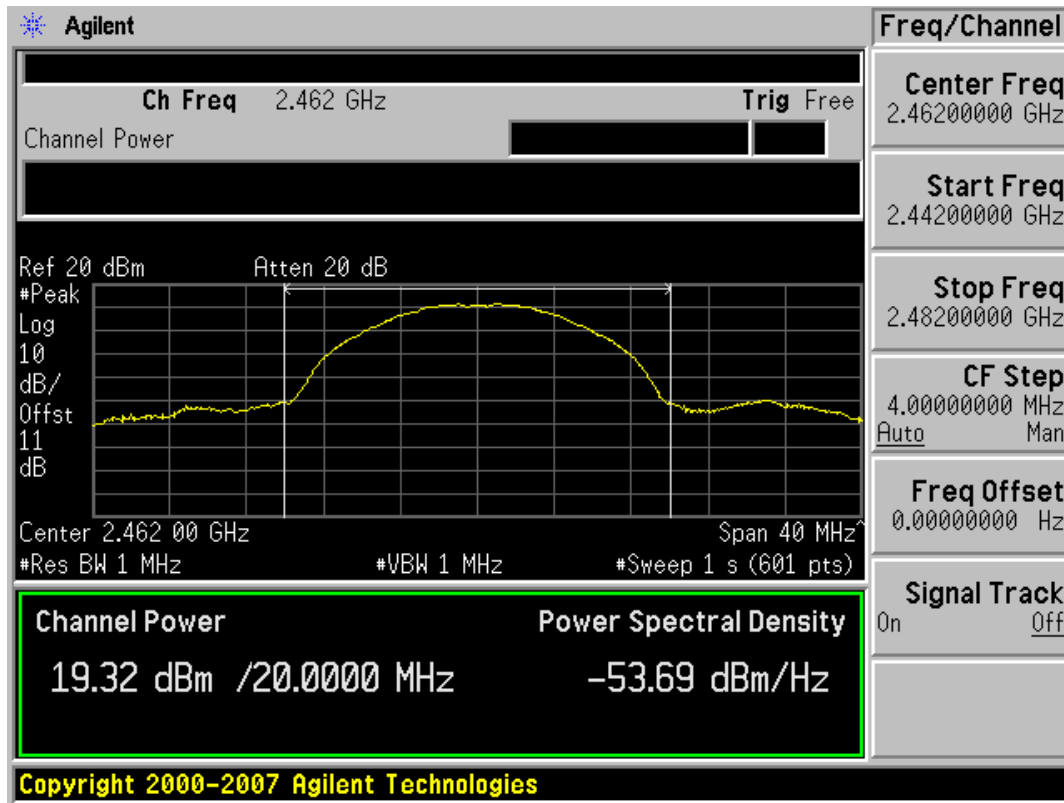


### Conducted Output Power (802.11b-CH 11) 2Mbps

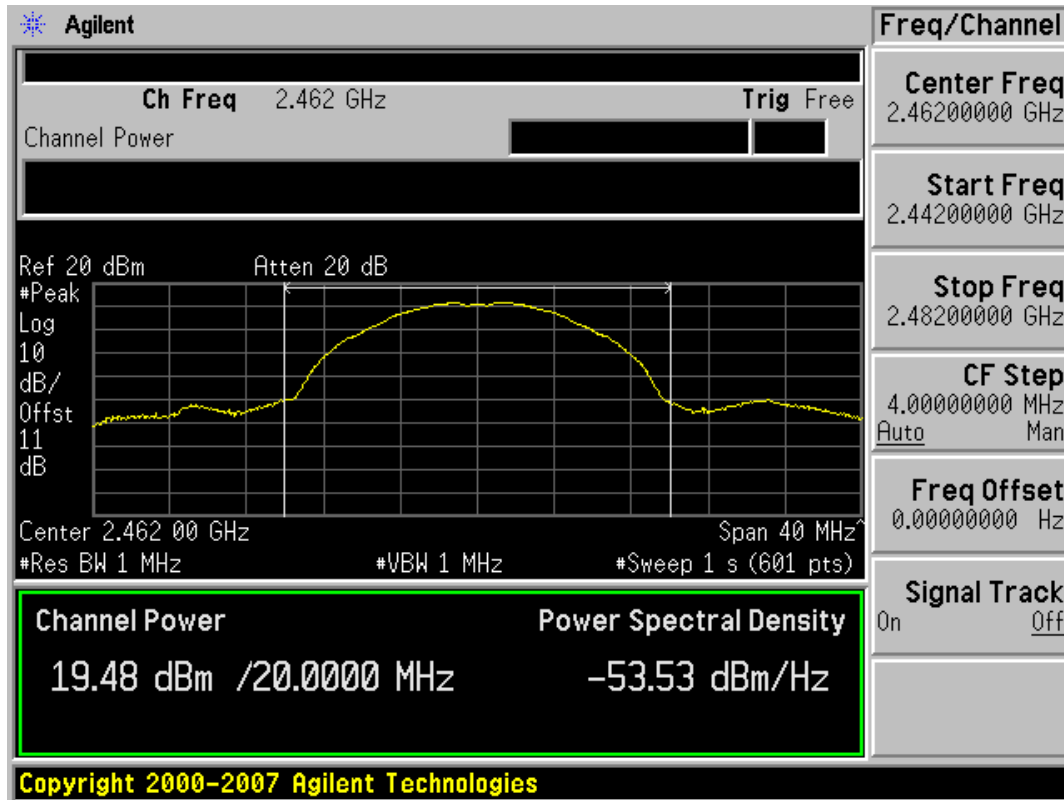

### Conducted Output Power (802.11b-CH 11) 5.5Mbps

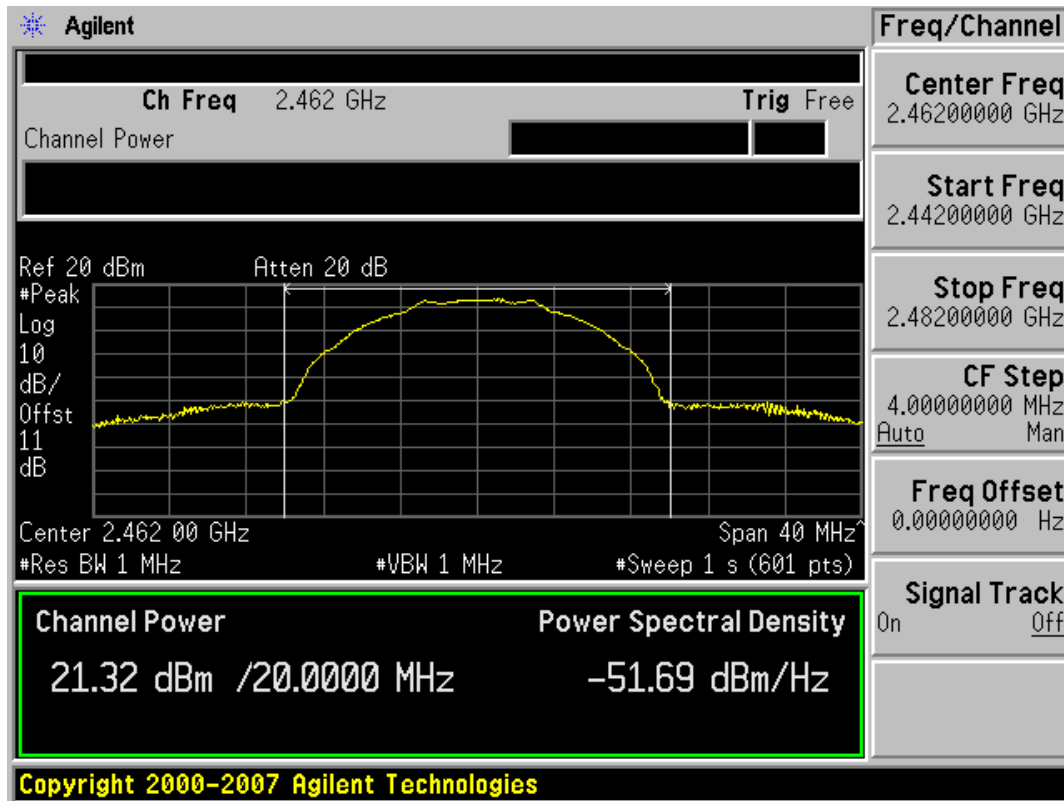


### Conducted Output Power (802.11b-CH 11) 11Mbps

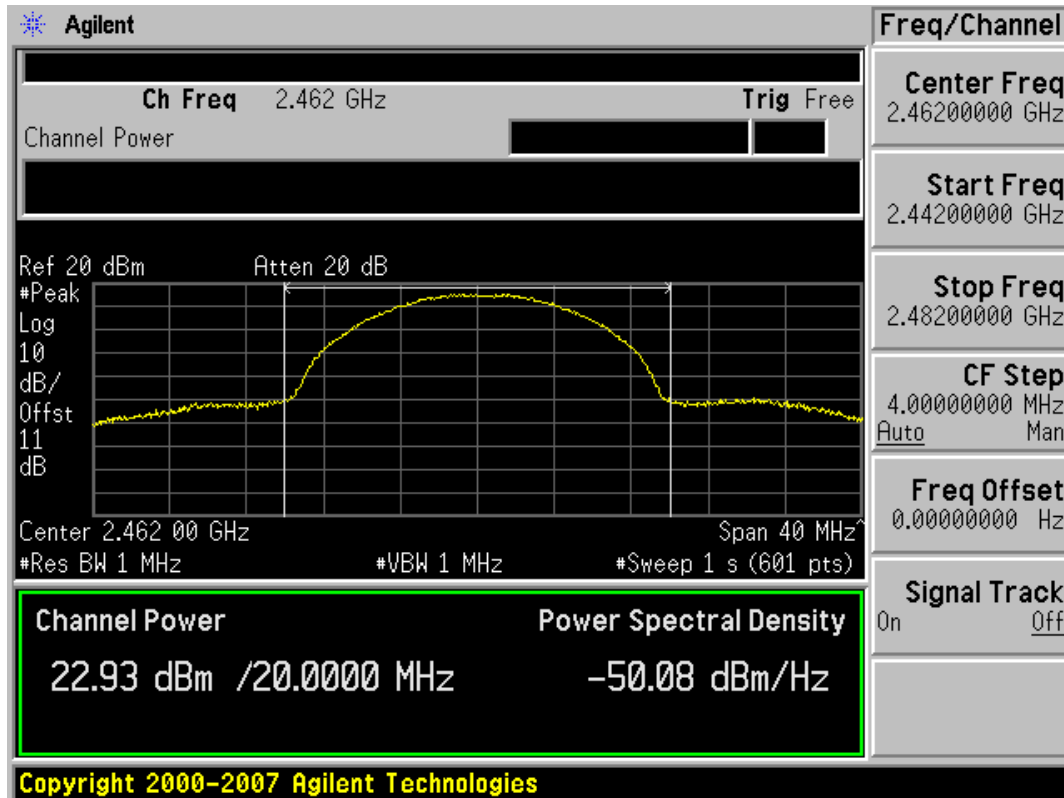





### Conducted Output Power (802.11g-CH 1) 6Mbps

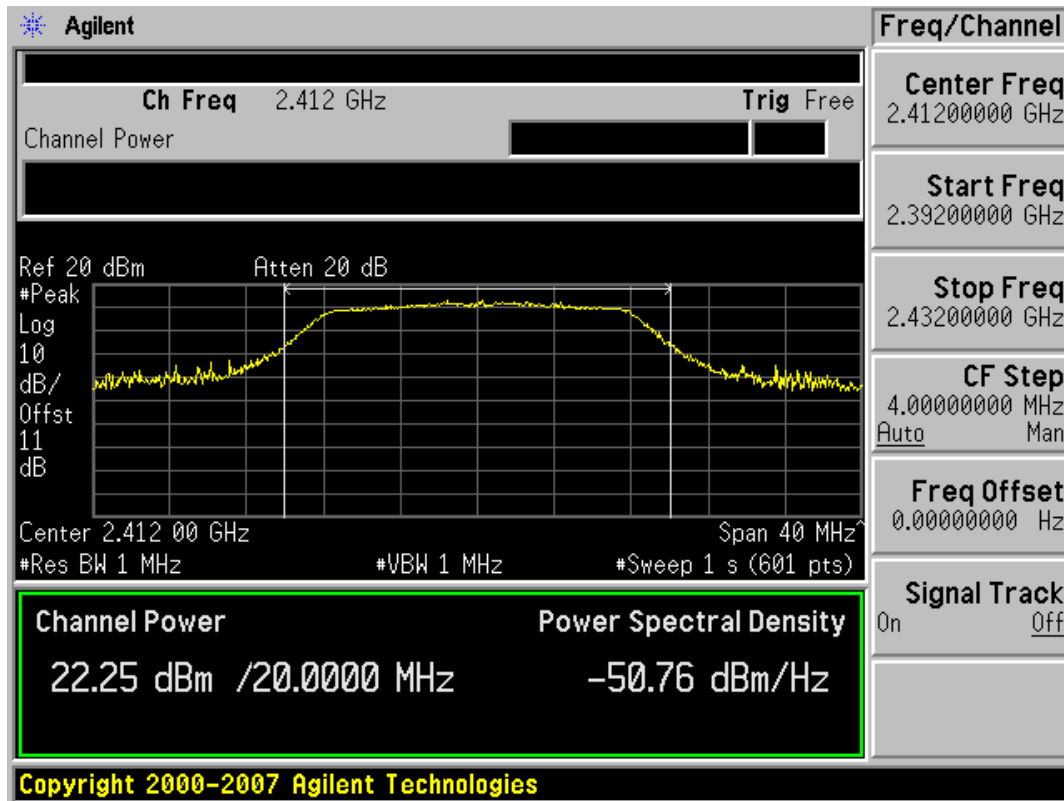


### Conducted Output Power (802.11g-CH 1) 9Mbps

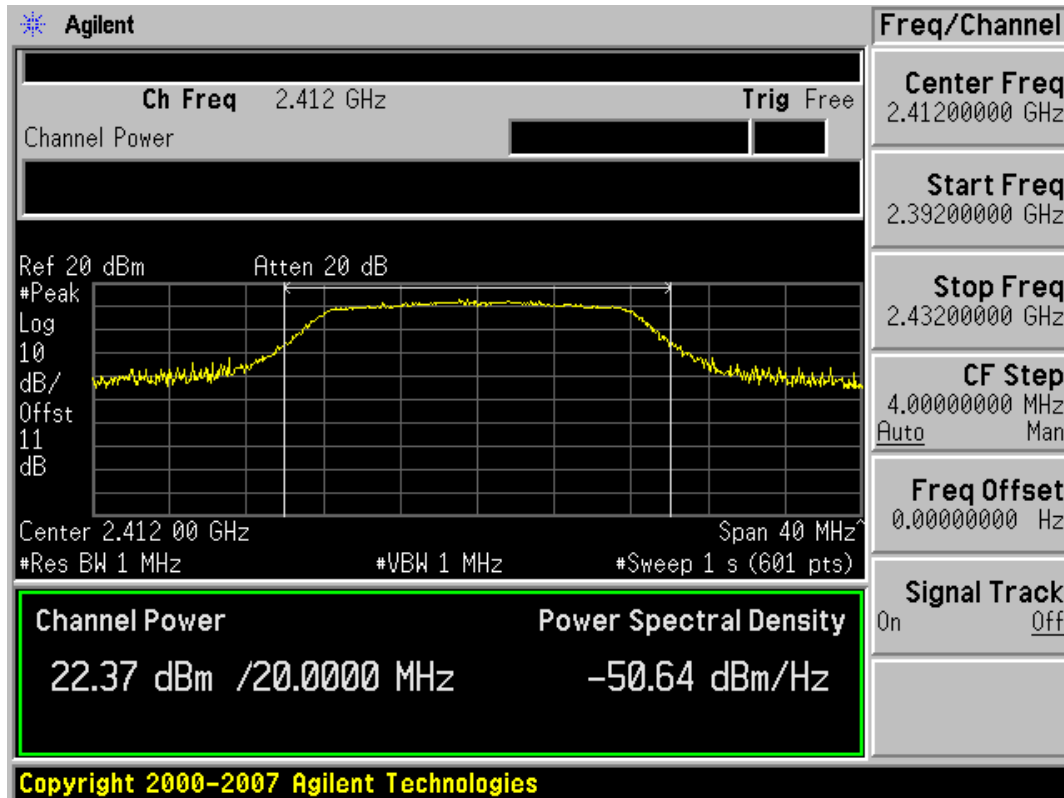


### Conducted Output Power (802.11g-CH 1) 12Mbps

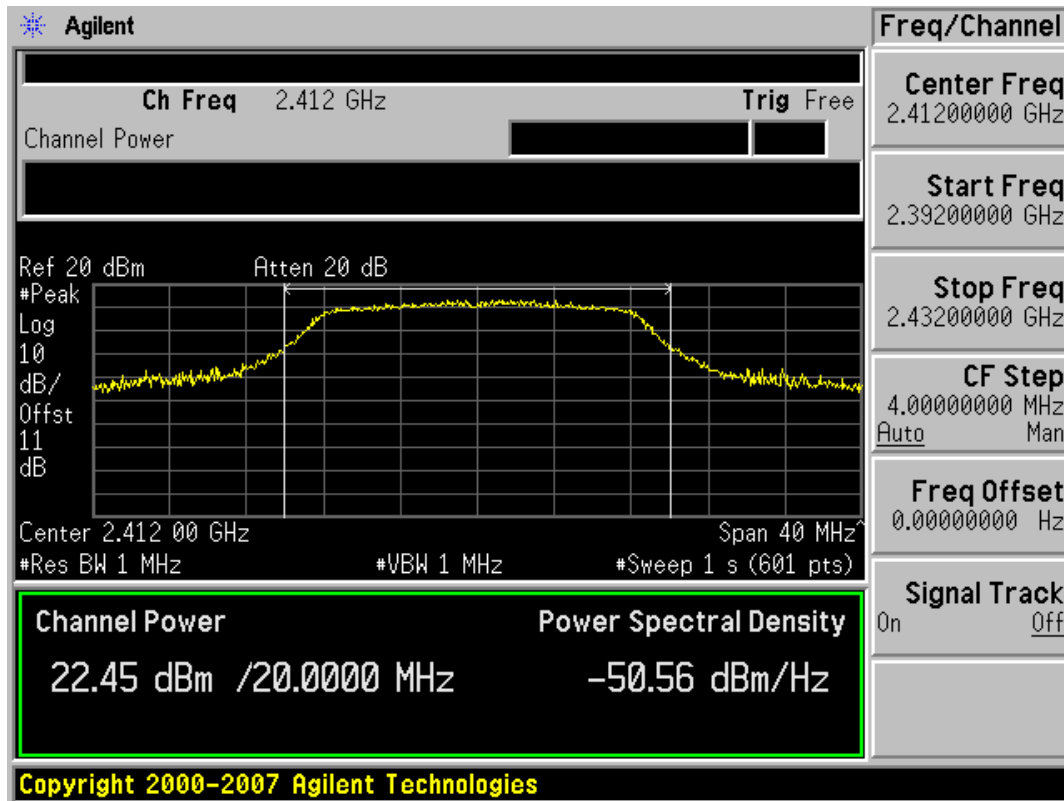


### Conducted Output Power (802.11g-CH 1) 18Mbps

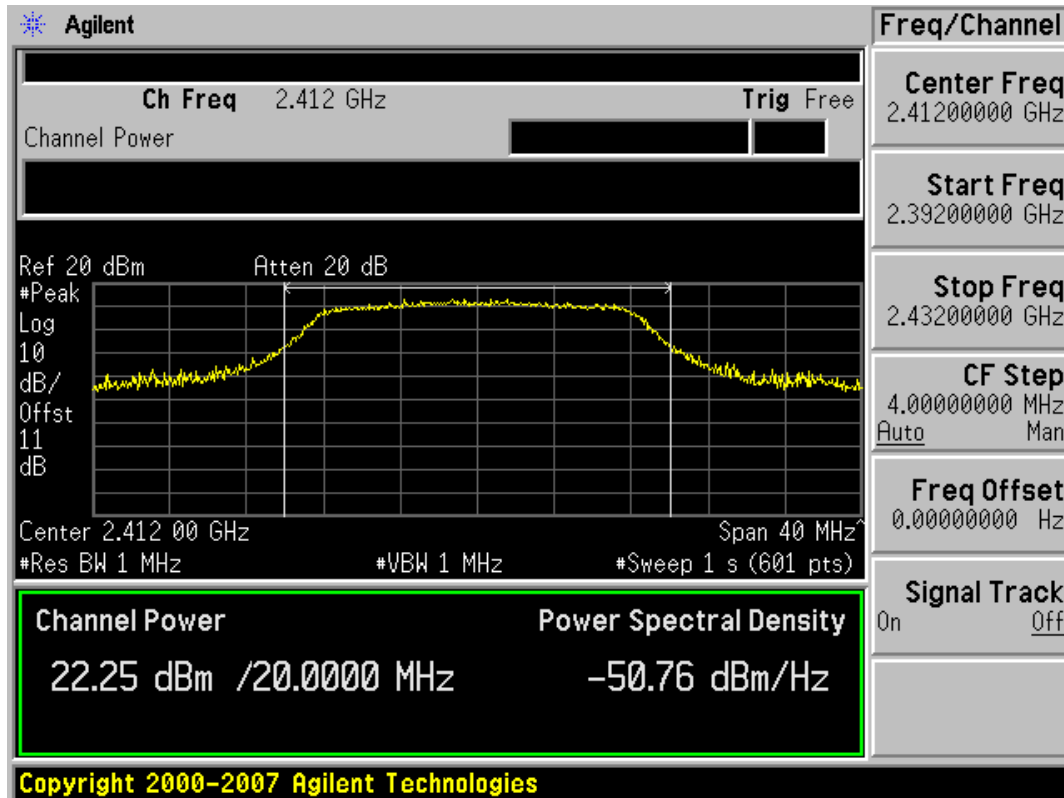


### Conducted Output Power (802.11g-CH 1) 24Mbps

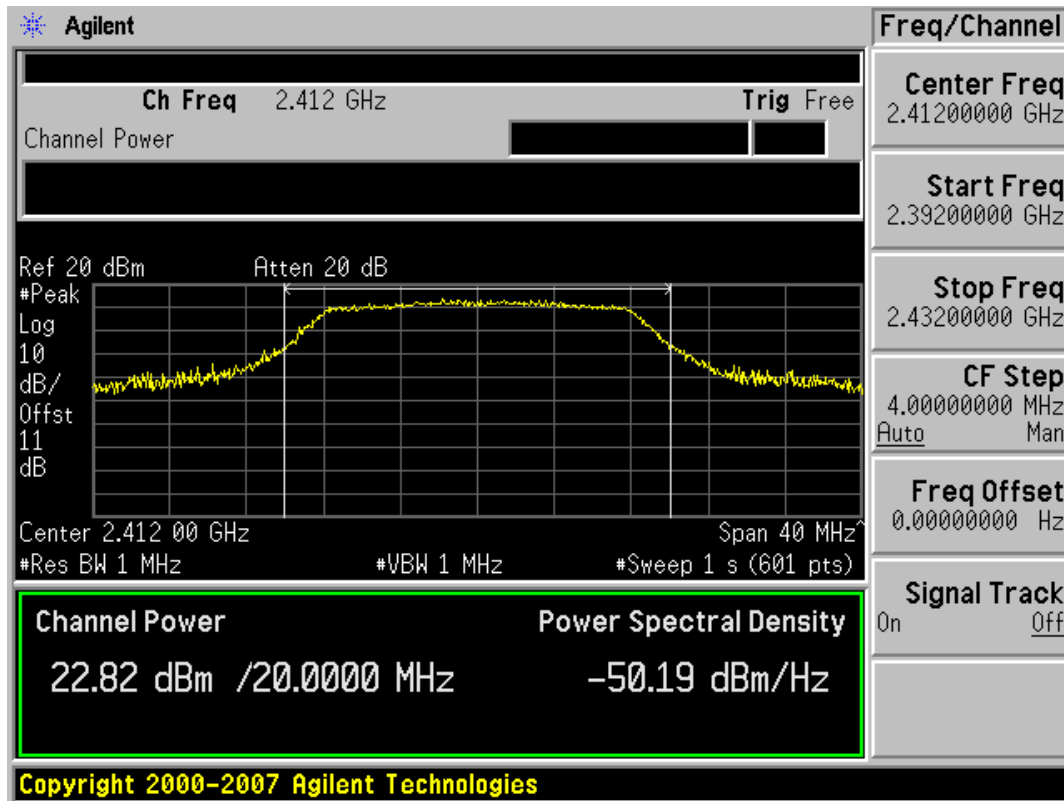


### Conducted Output Power (802.11g-CH 1) 36Mbps

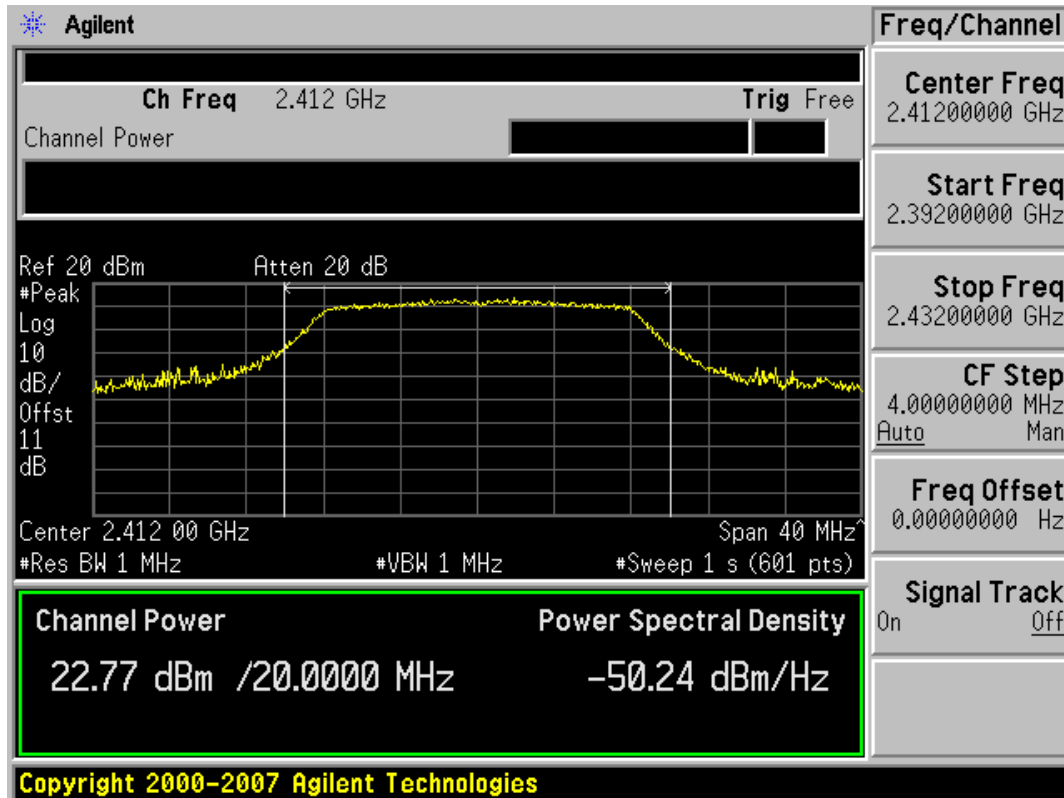


### Conducted Output Power (802.11g-CH 1) 48Mbps

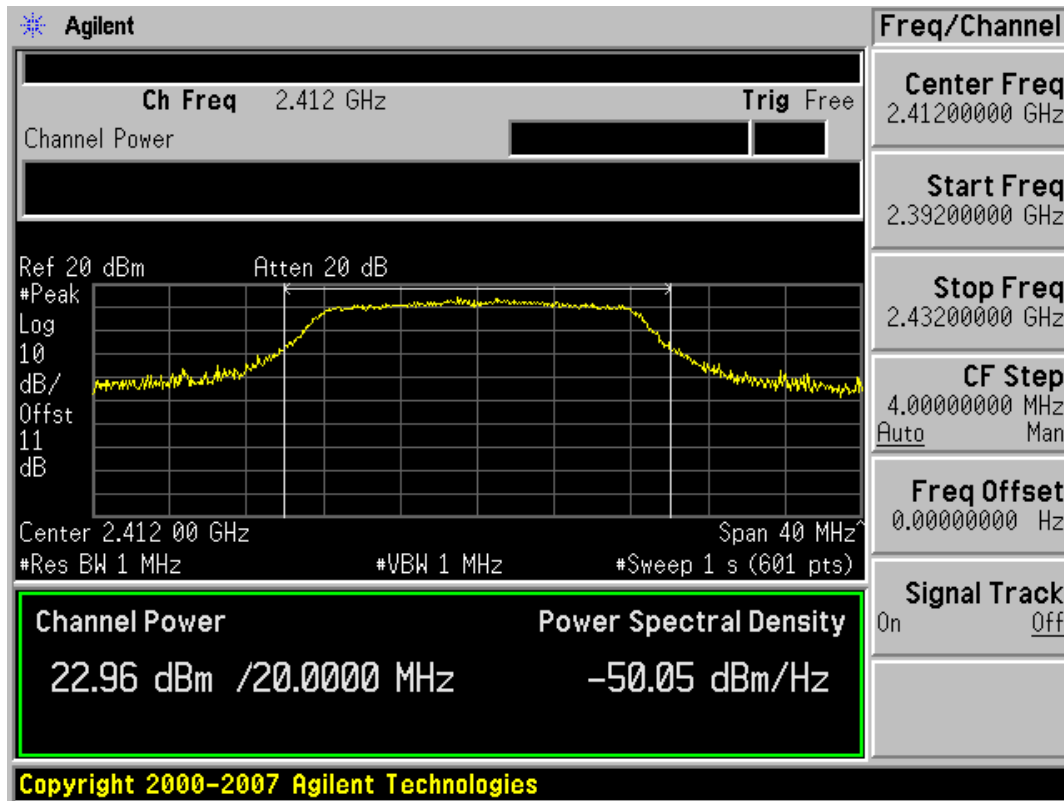


### Conducted Output Power (802.11g-CH 1) 54Mbps

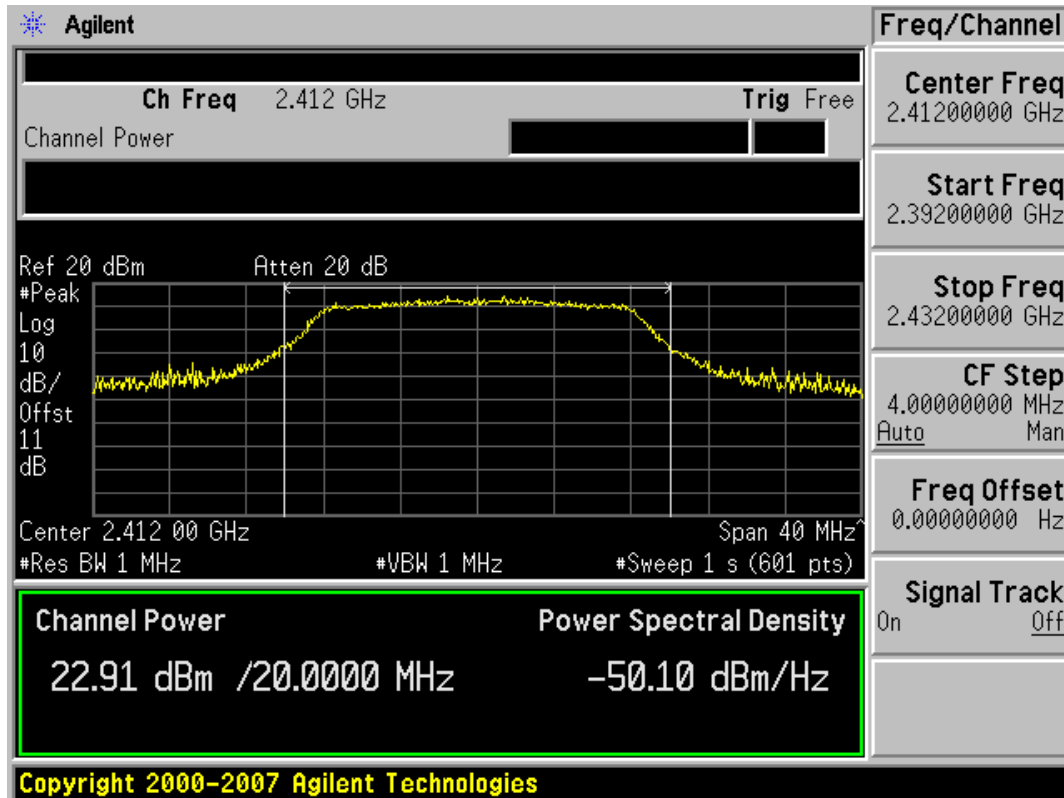


### Conducted Output Power (802.11g-CH 6) 6Mbps

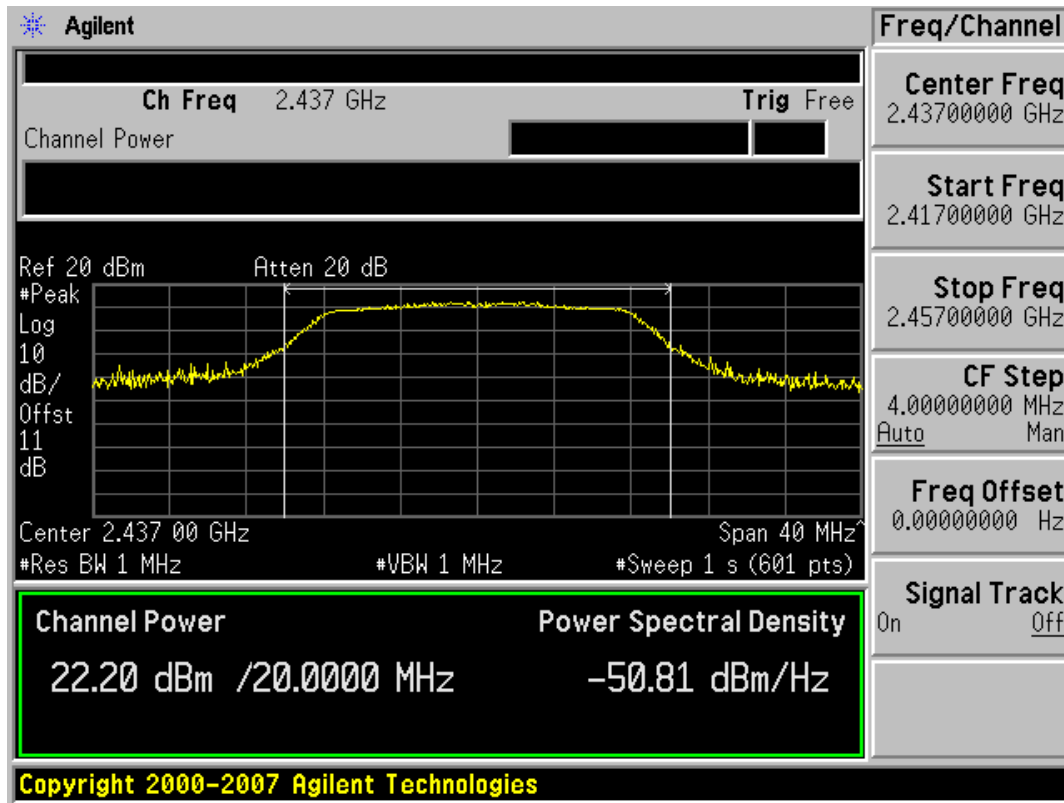


### Conducted Output Power (802.11g-CH 6) 9Mbps

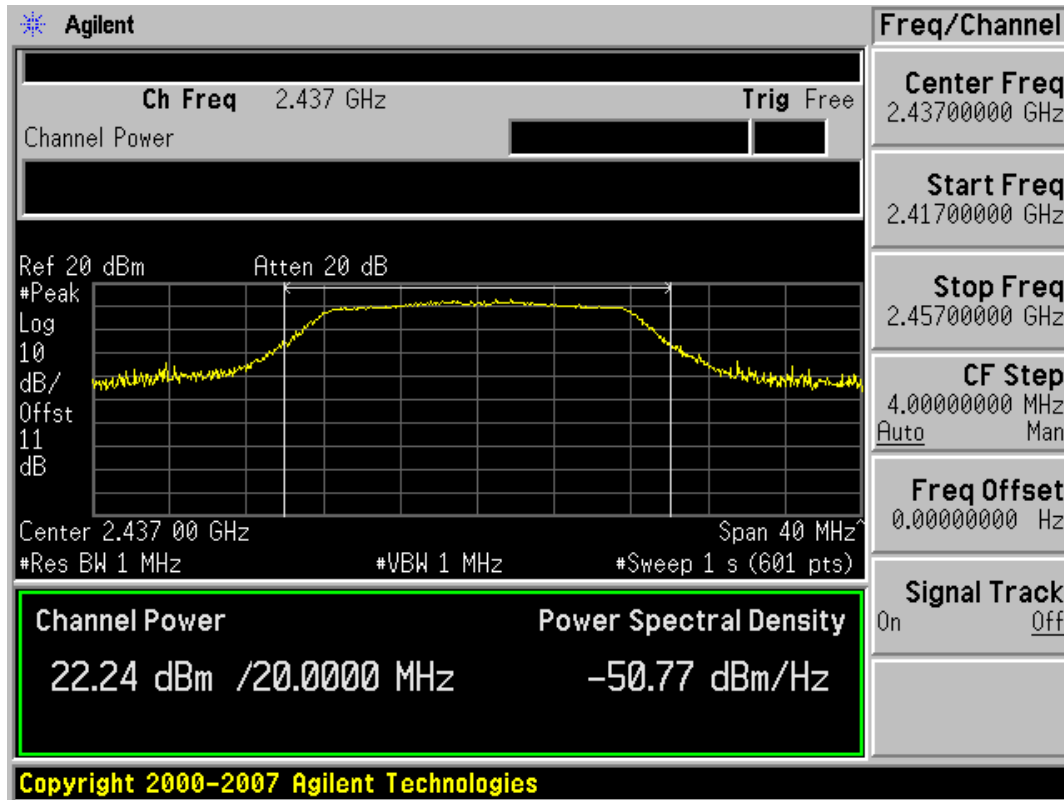


### Conducted Output Power (802.11g-CH 6) 12Mbps

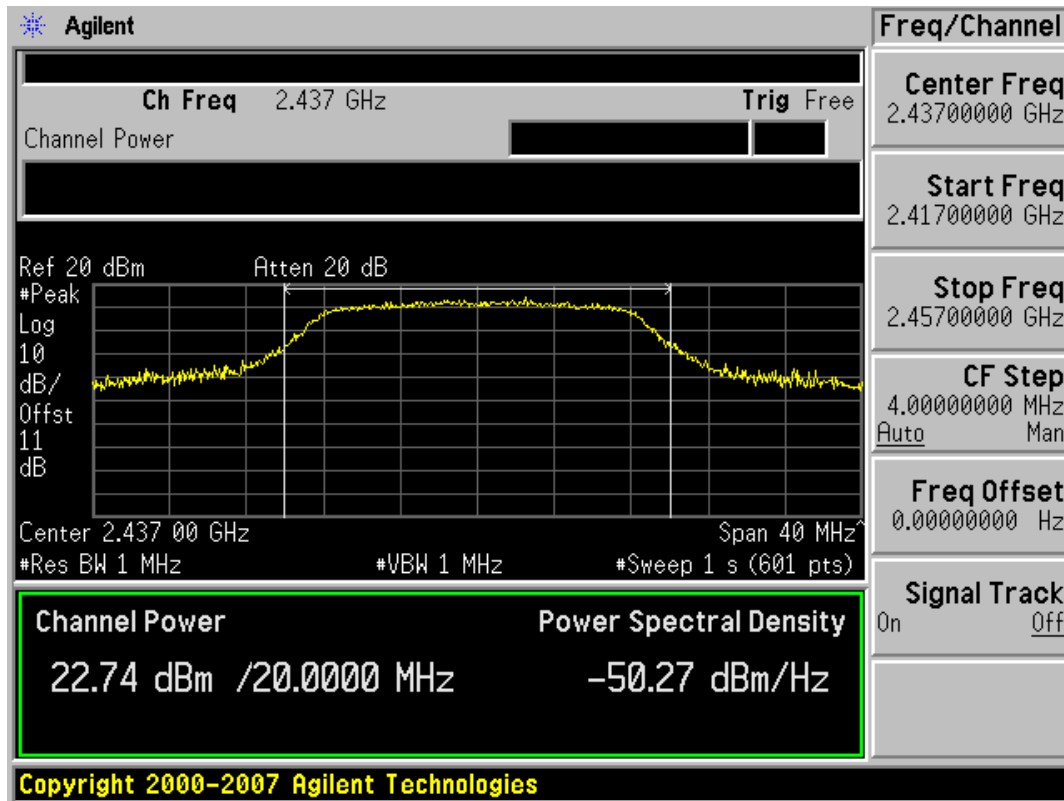


### Conducted Output Power (802.11g-CH 6) 18Mbps

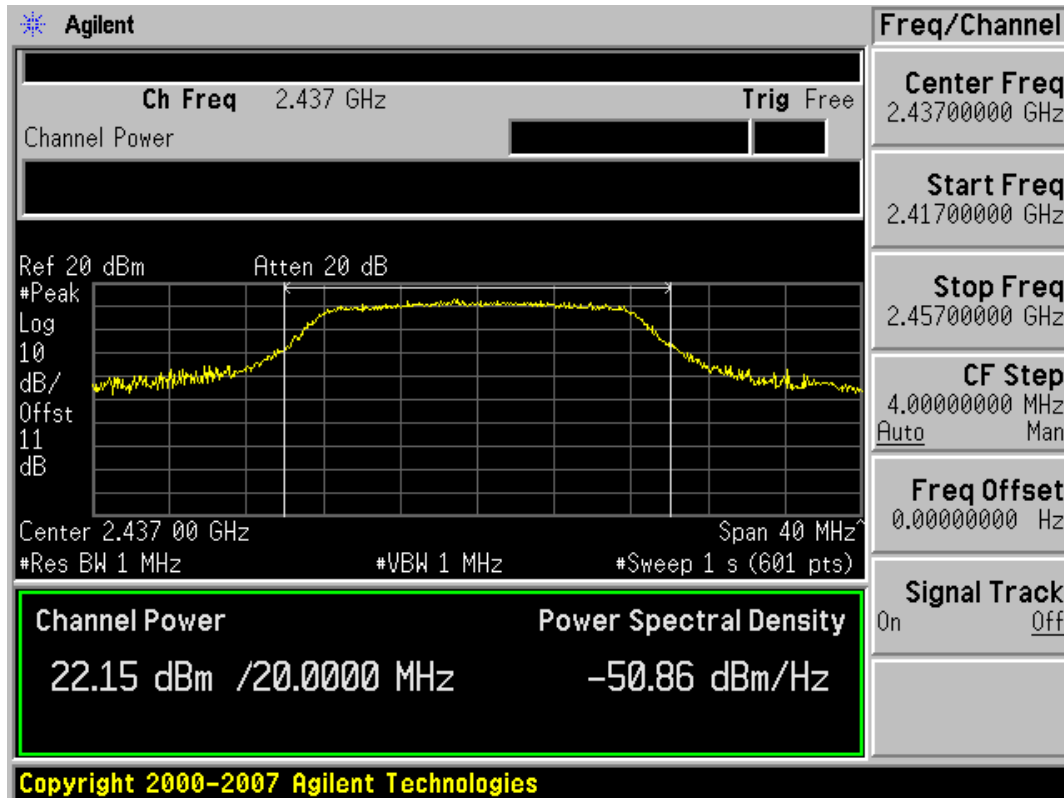


### Conducted Output Power (802.11g-CH 6) 24Mbps

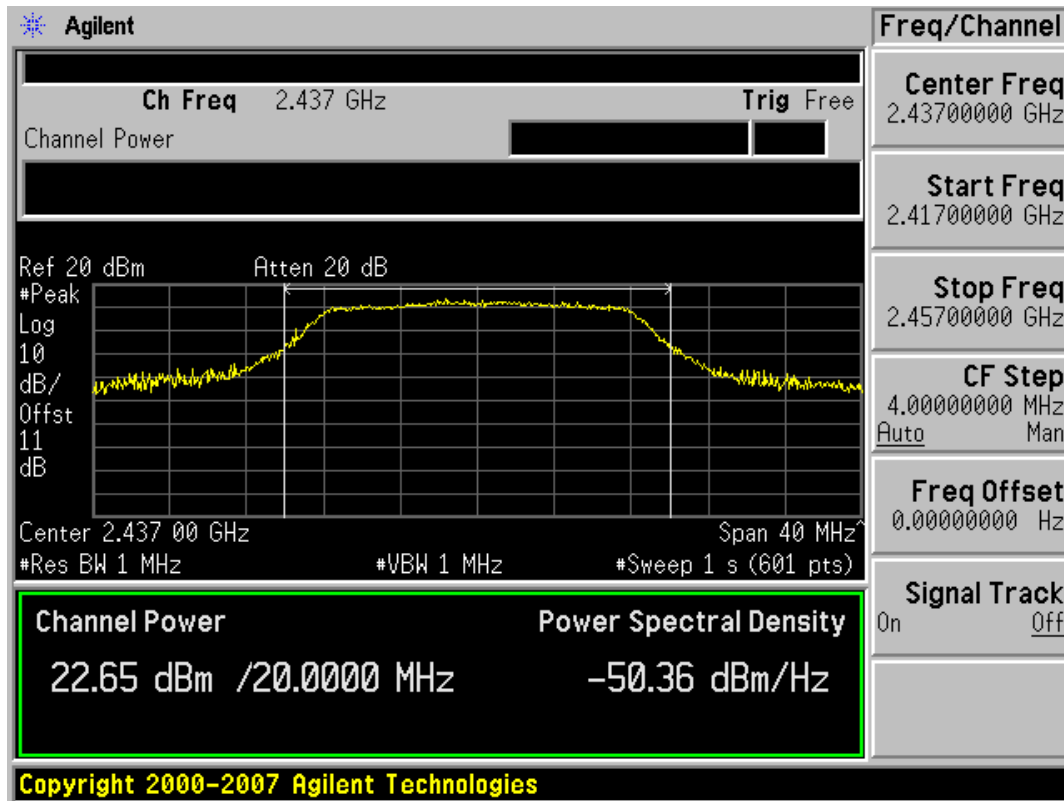


### Conducted Output Power (802.11g-CH 6) 36Mbps

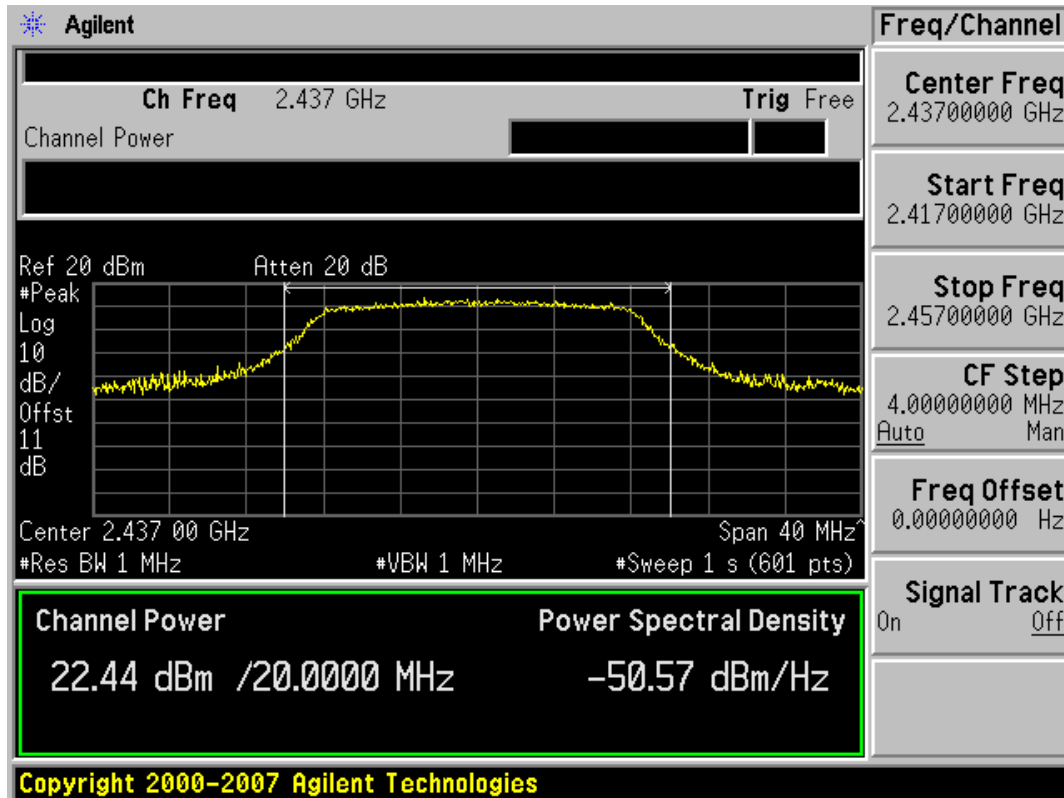

### Conducted Output Power (802.11g-CH 6) 48Mbps

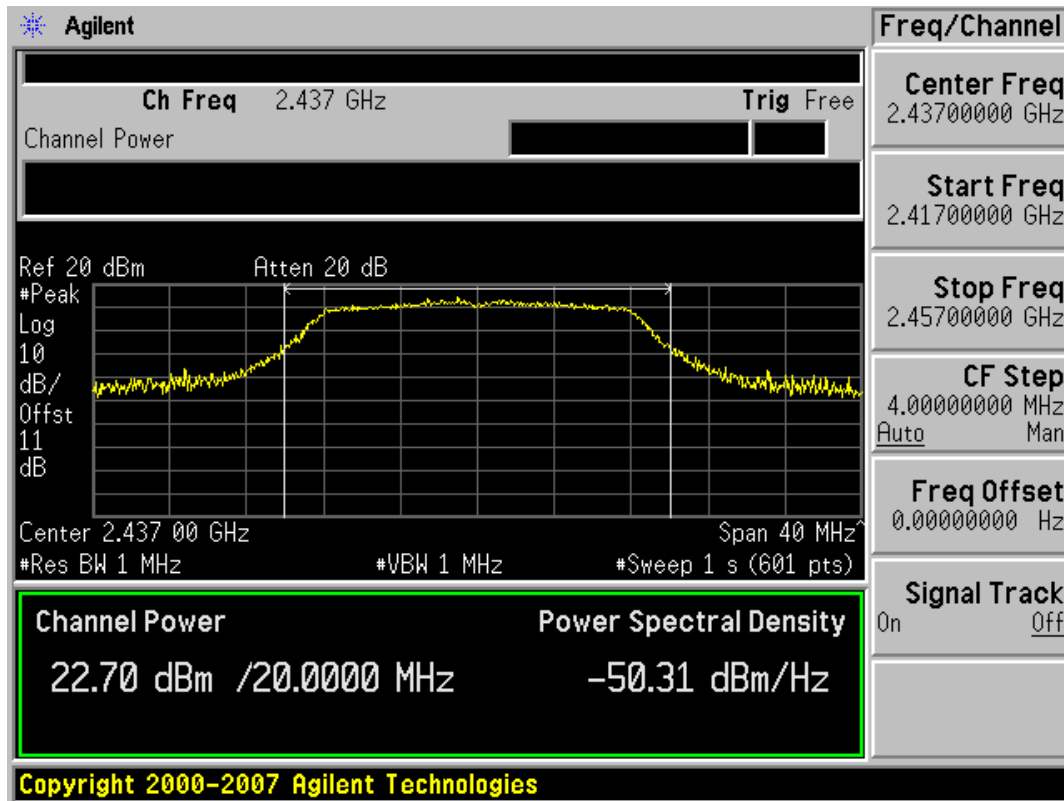


### Conducted Output Power (802.11g-CH 6) 54Mbps

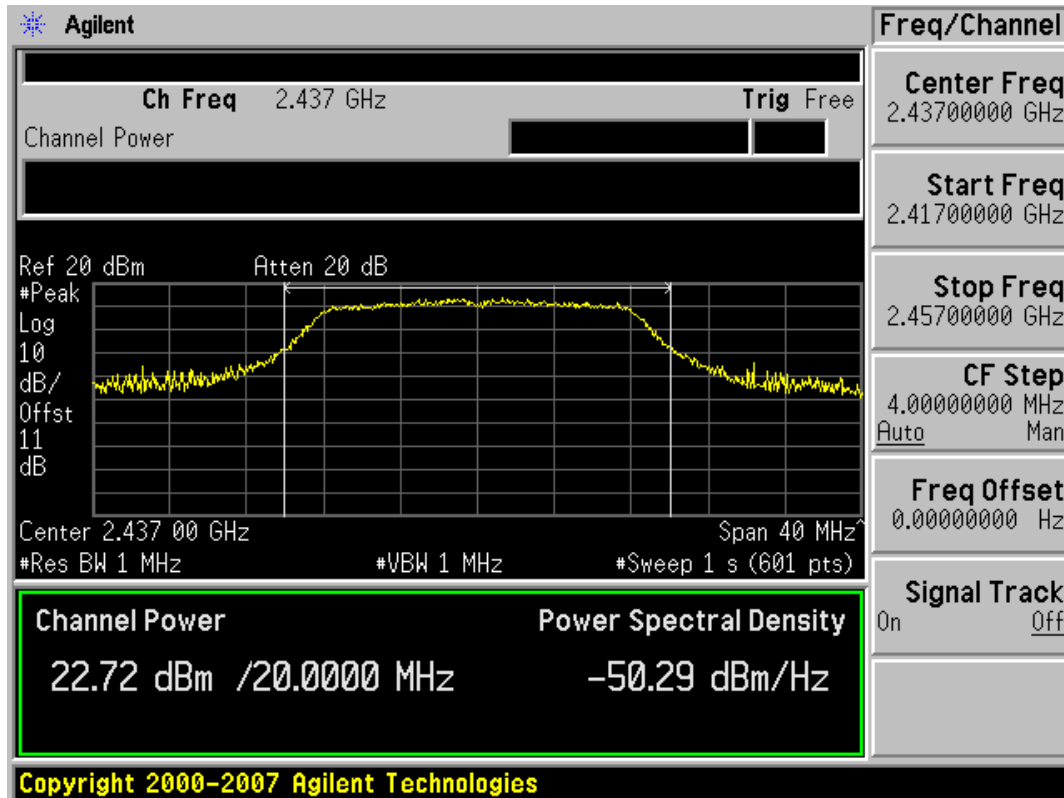





### Conducted Output Power (802.11g-CH 11) 6Mbps

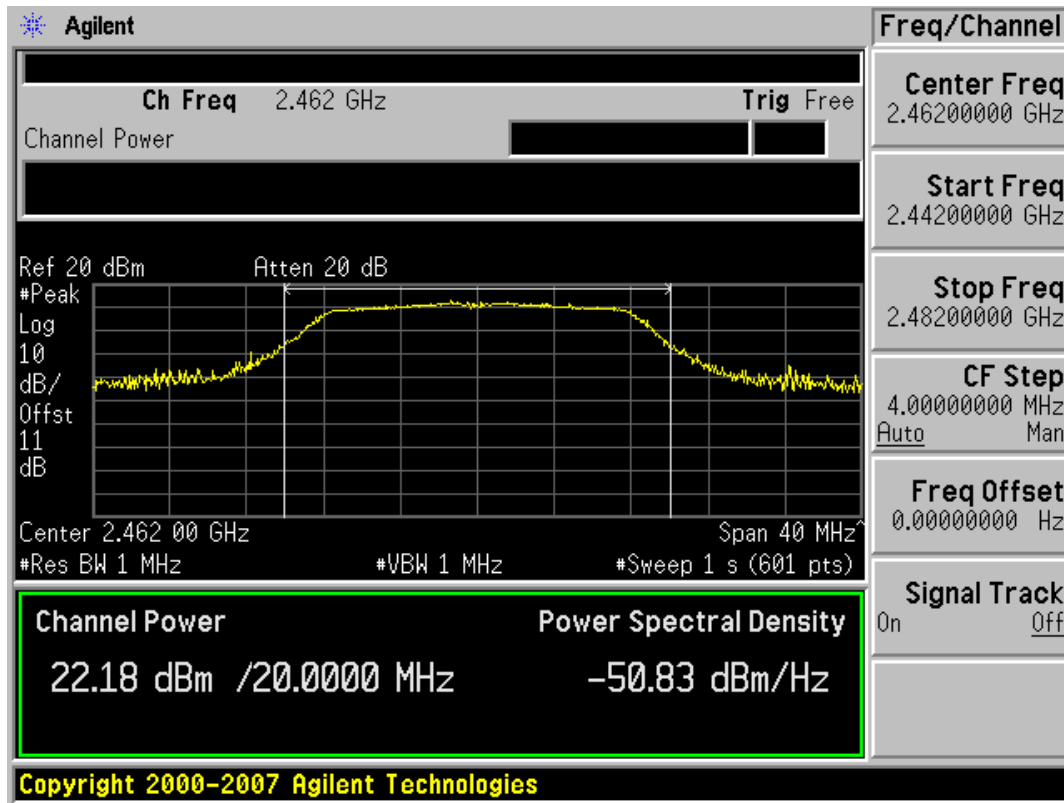


### Conducted Output Power (802.11g-CH 11) 9Mbps

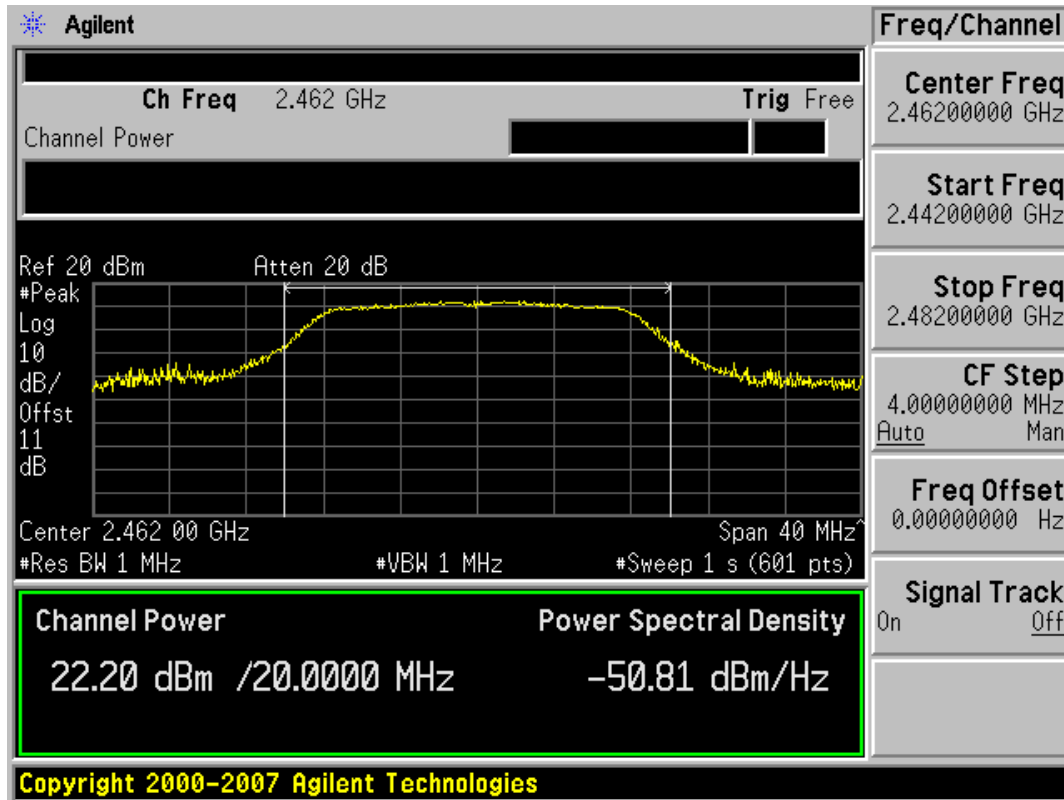


### Conducted Output Power (802.11g-CH 11) 12Mbps

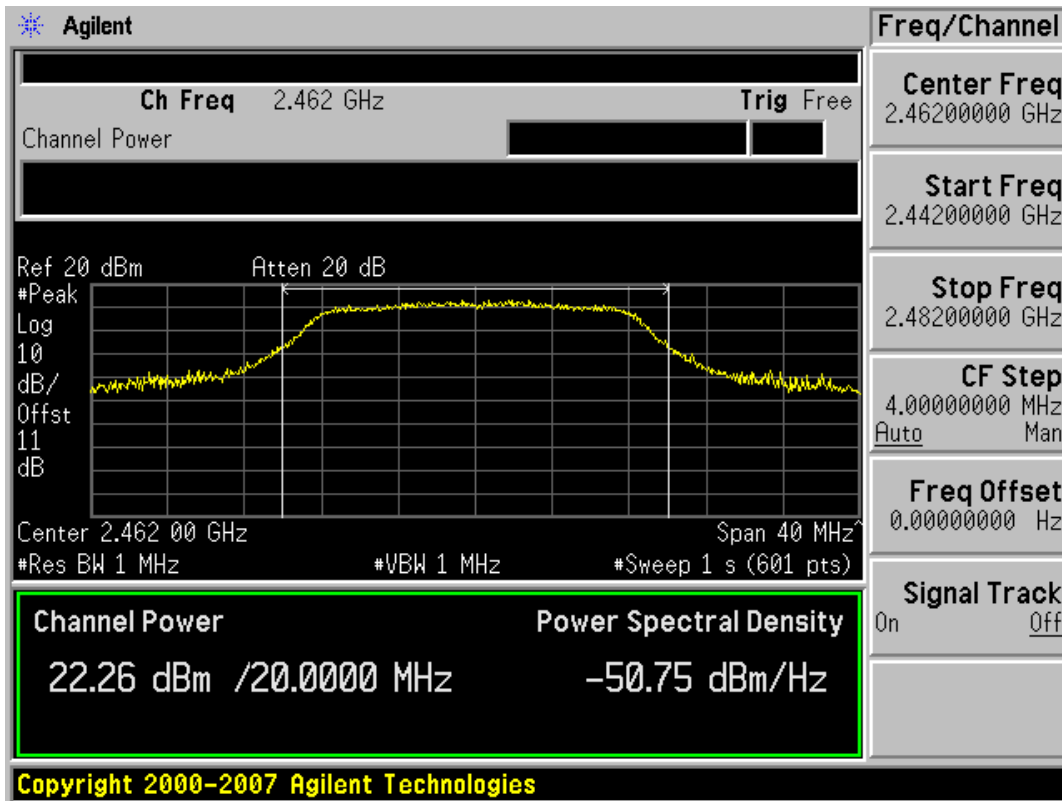


### Conducted Output Power (802.11g-CH 11) 18Mbps

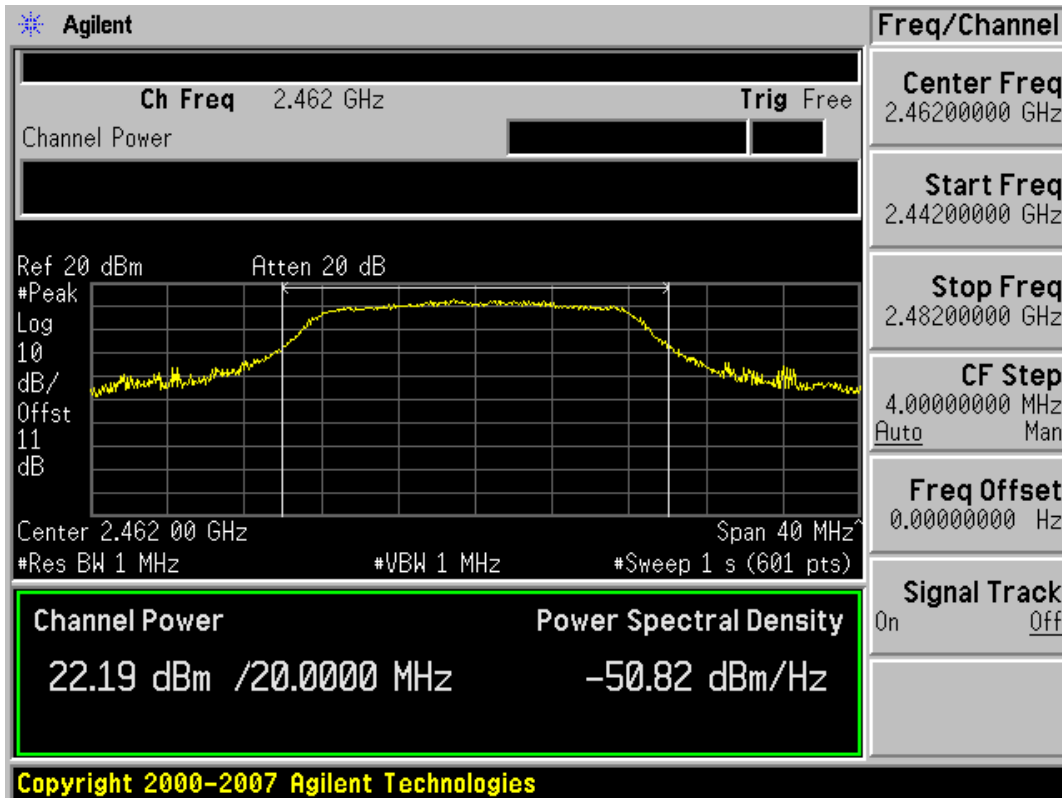


### Conducted Output Power (802.11g-CH 11) 24Mbps

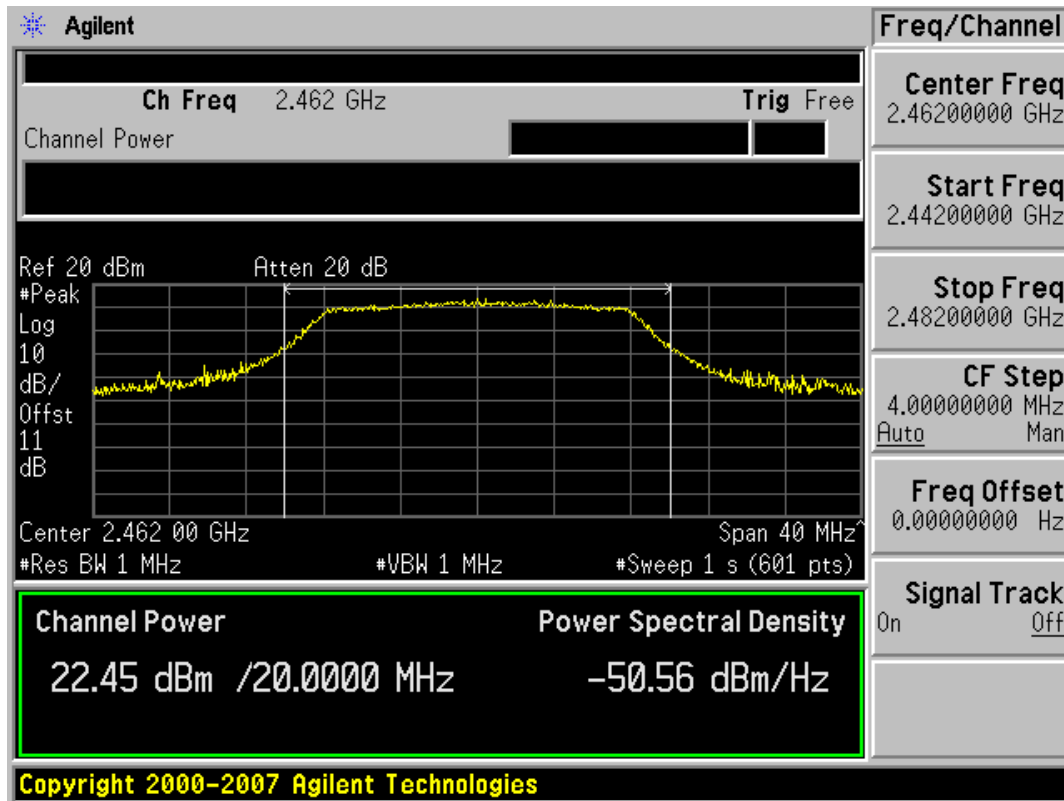


### Conducted Output Power (802.11g-CH 11) 36Mbps

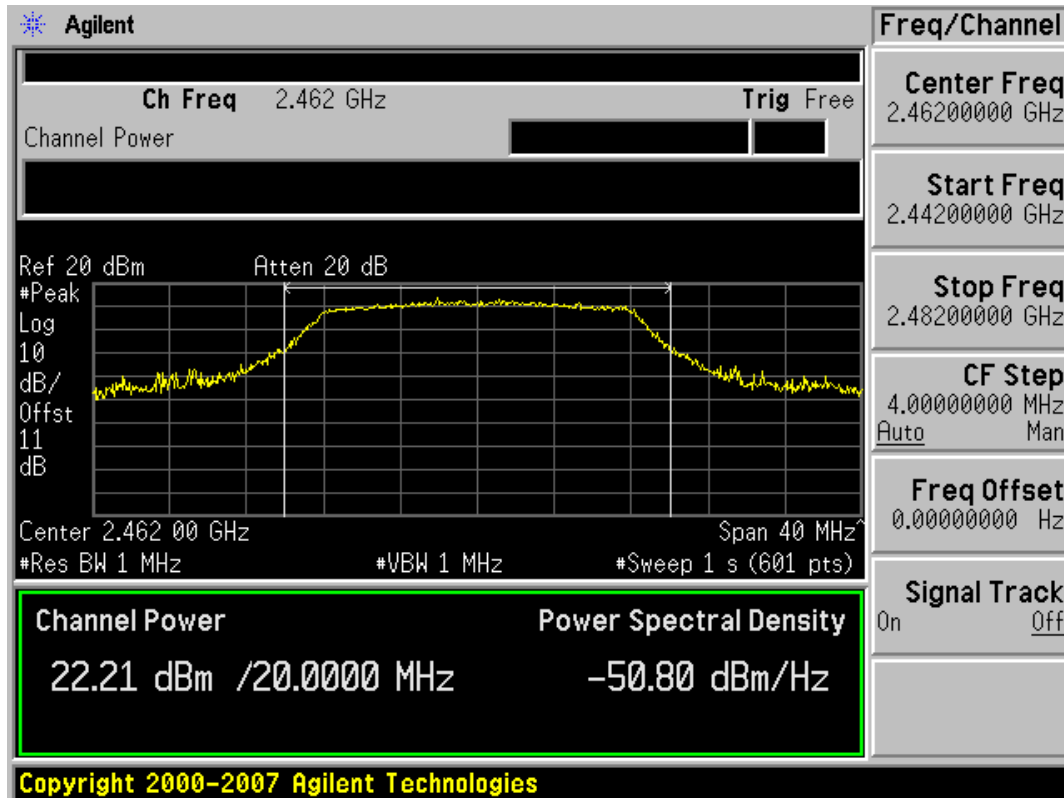


### Conducted Output Power (802.11g-CH 11) 48Mbps

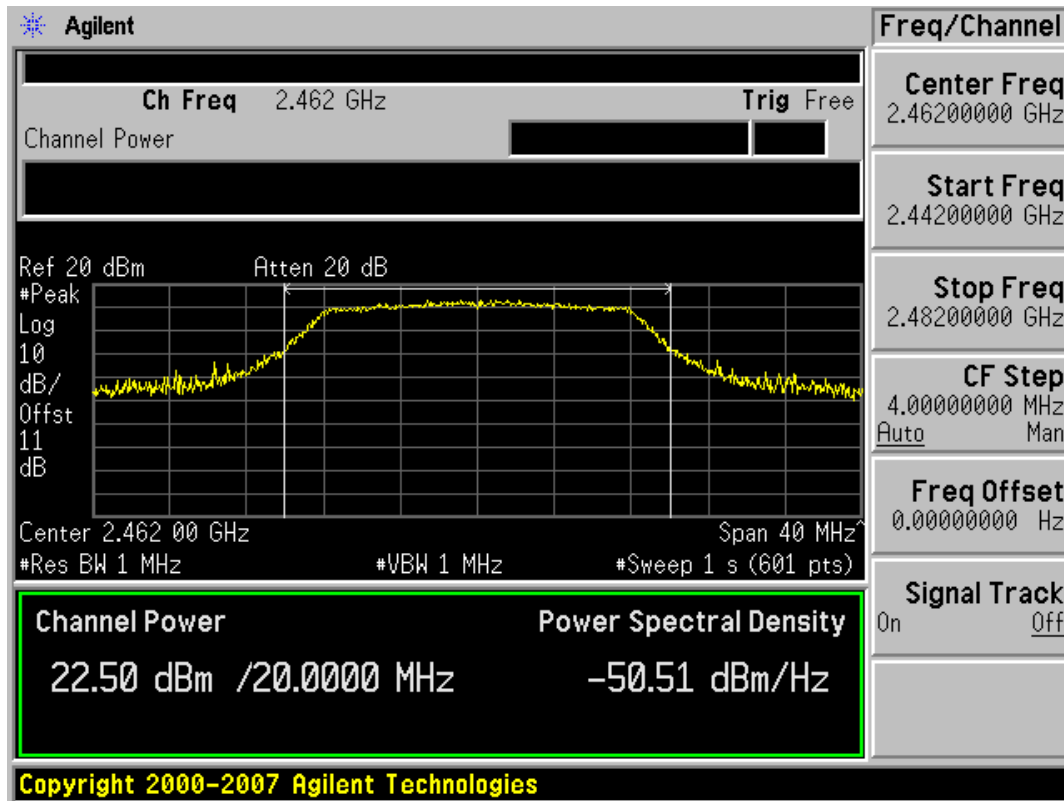


### Conducted Output Power (802.11g-CH 11) 54Mbps

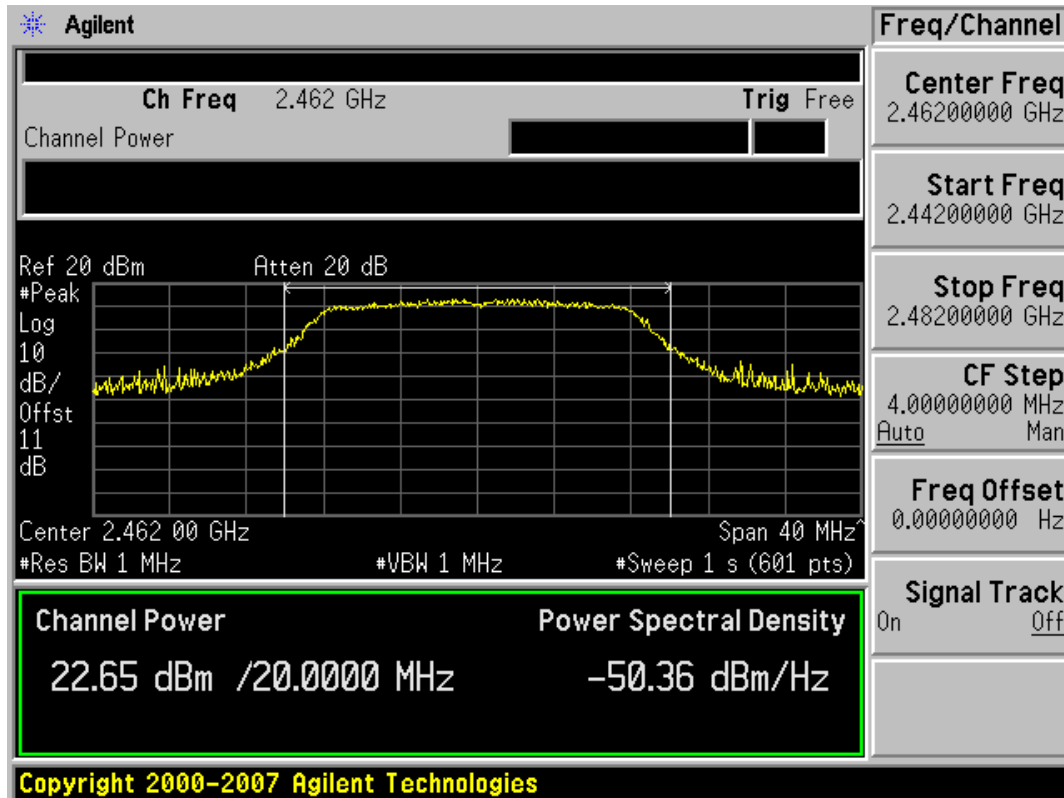


### Conducted Output Power (802.11n-CH 1) 6.5Mbps

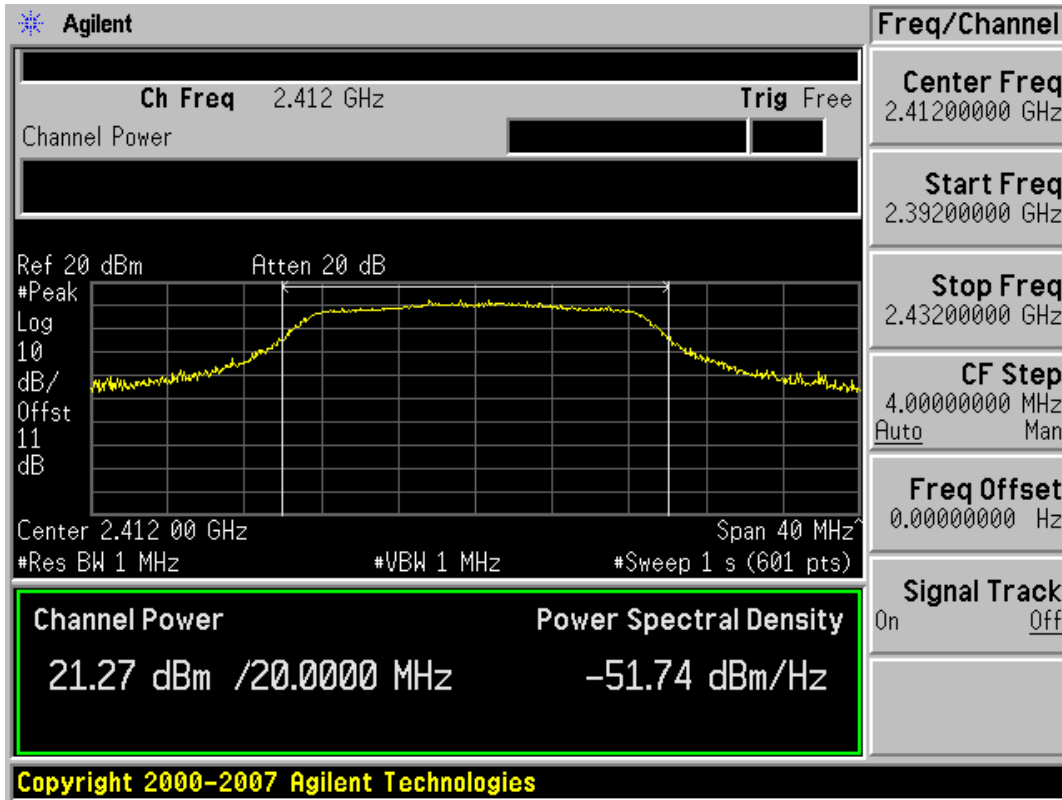


### Conducted Output Power (802.11n-CH 1) 13Mbps

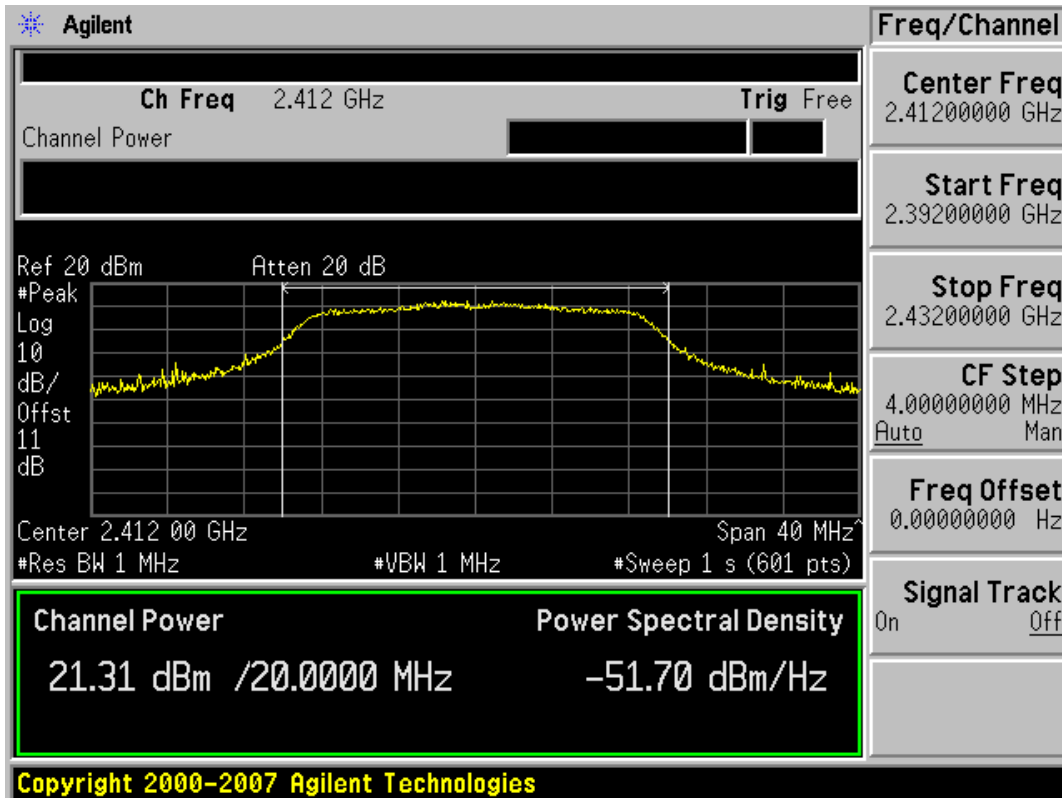


### Conducted Output Power (802.11n-CH 1) 19.5Mbps

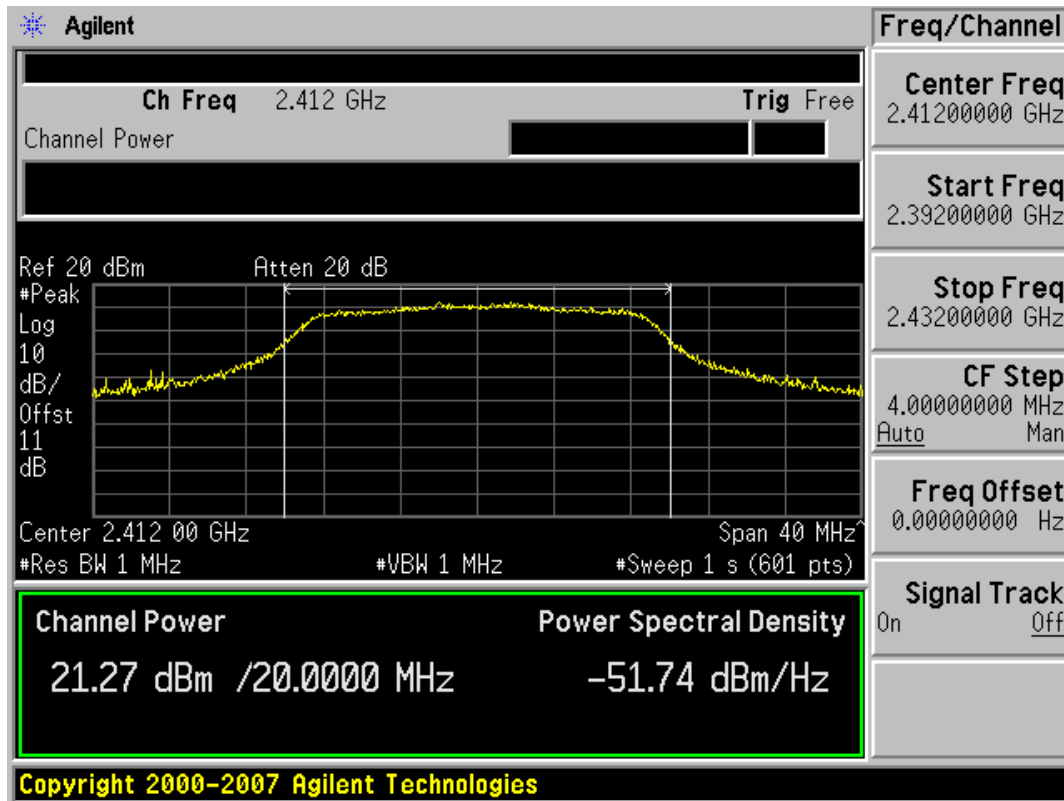


### Conducted Output Power (802.11n-CH 1) 26Mbps

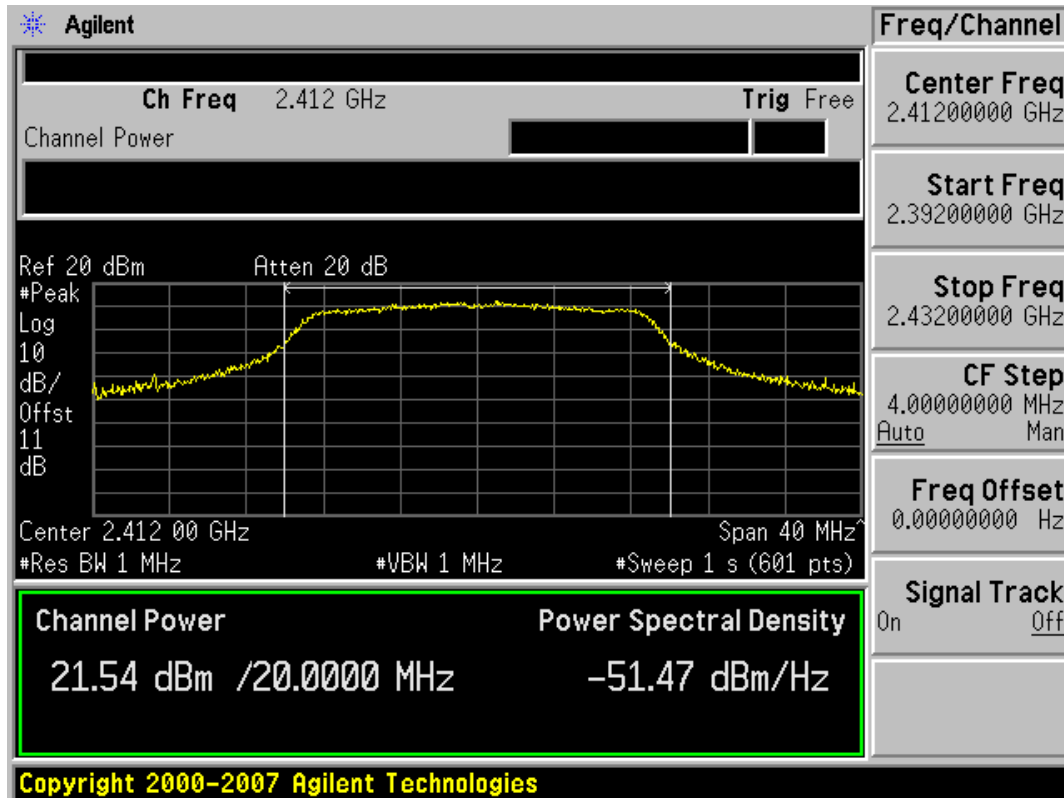


### Conducted Output Power (802.11n-CH 1) 39Mbps

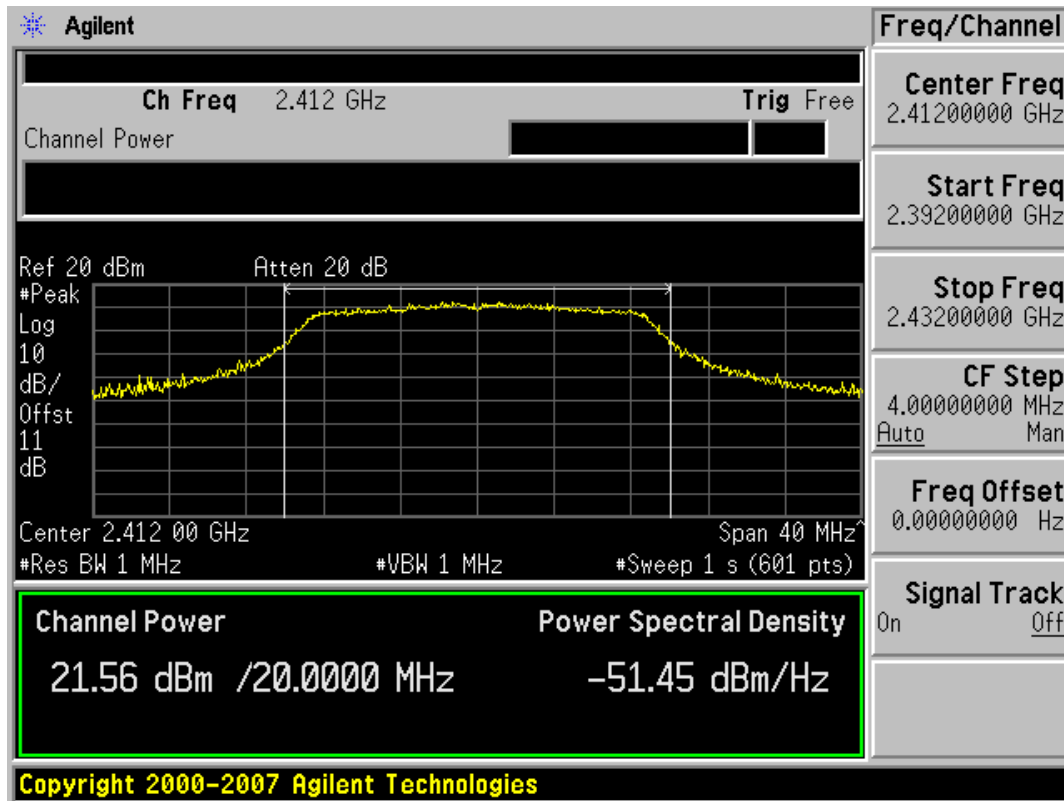


### Conducted Output Power (802.11n-CH 1) 52Mbps

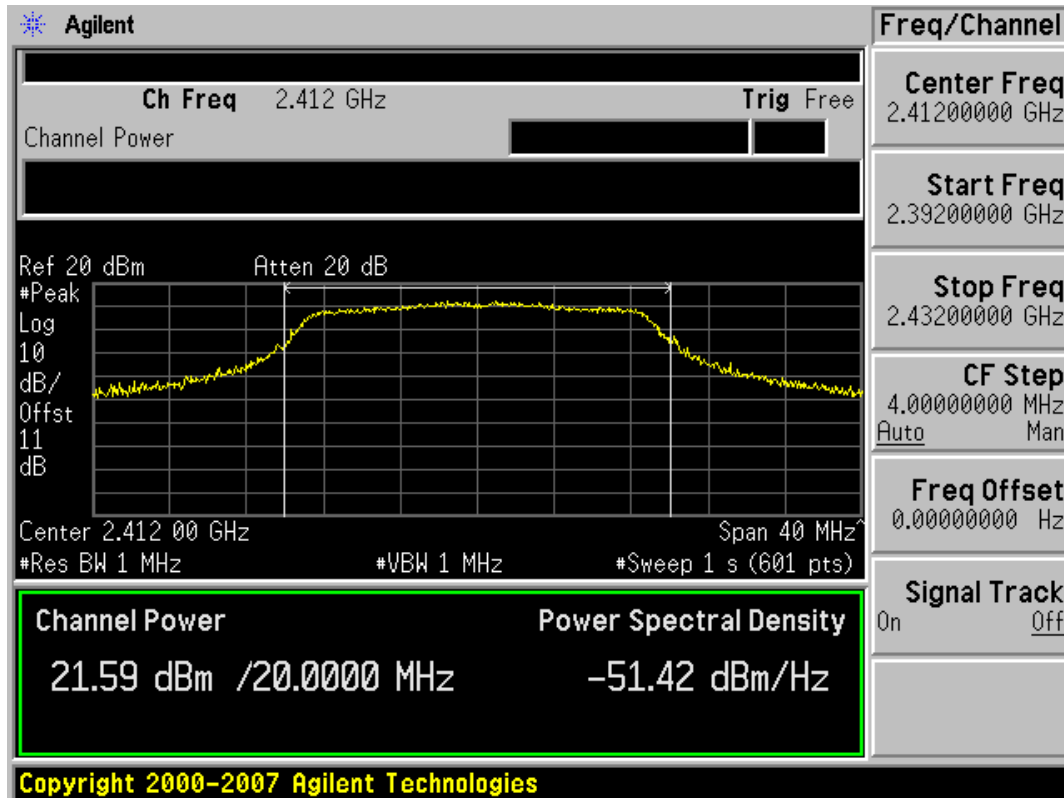

### Conducted Output Power (802.11n-CH 1) 58.5Mbps

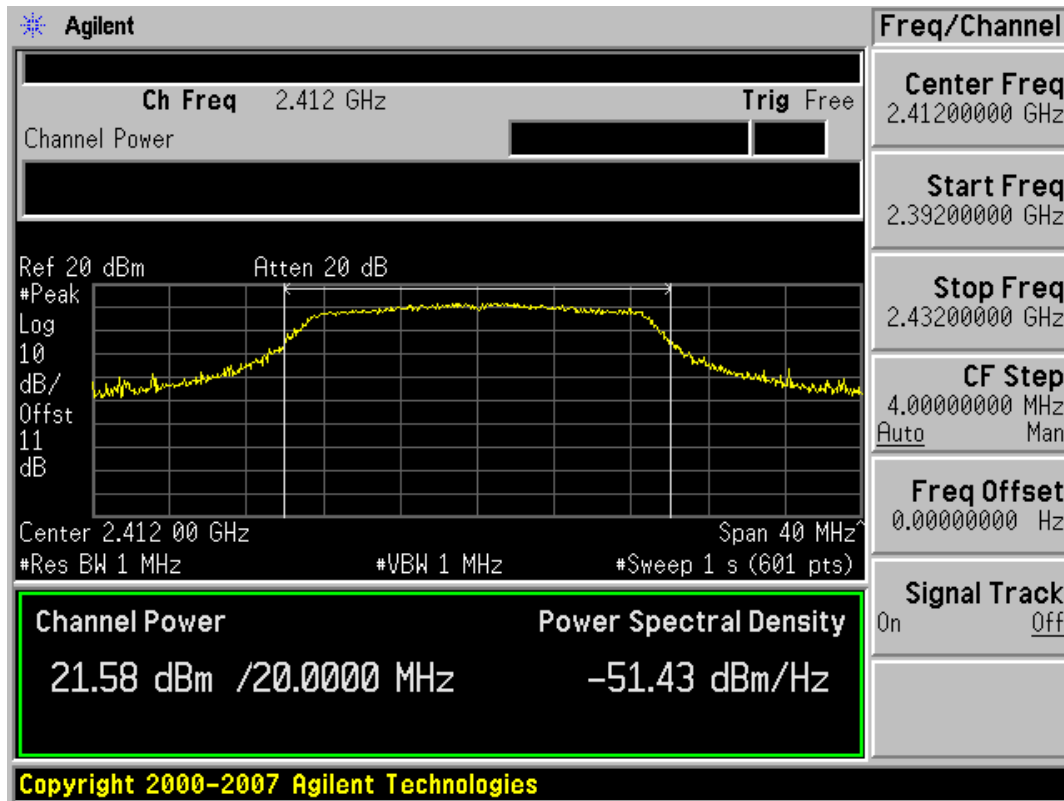


### Conducted Output Power (802.11n-CH 1) 65Mbps

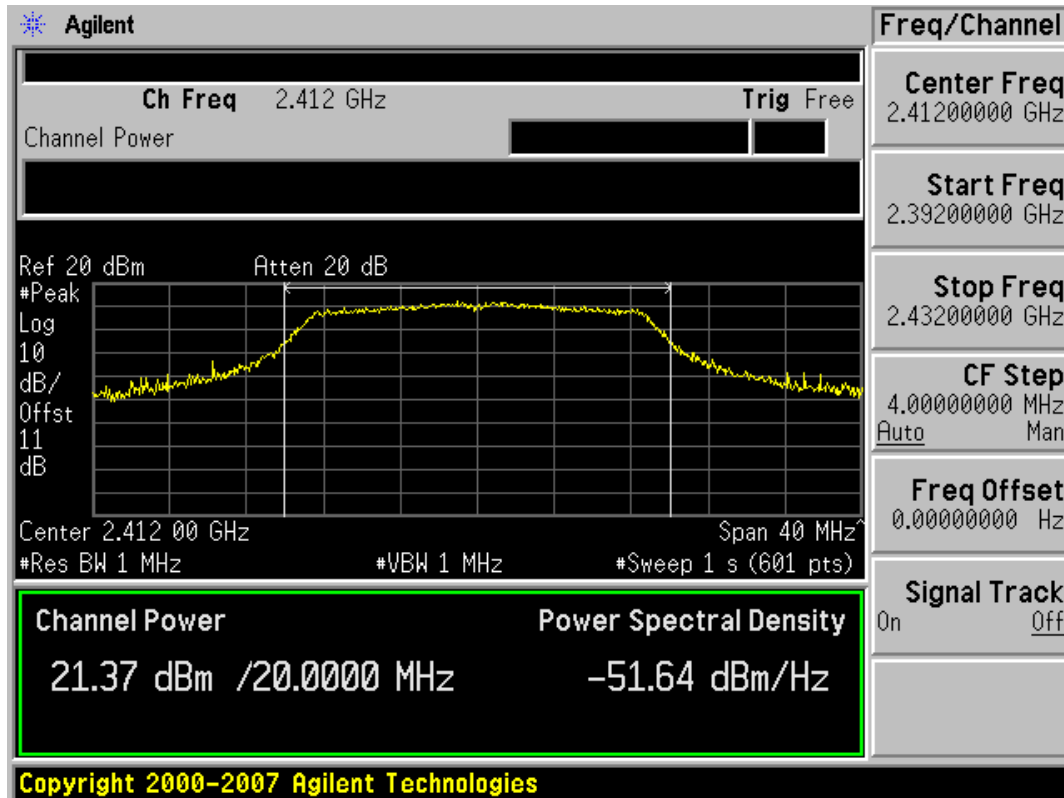





### Conducted Output Power (802.11n-CH 6) 6.5Mbps

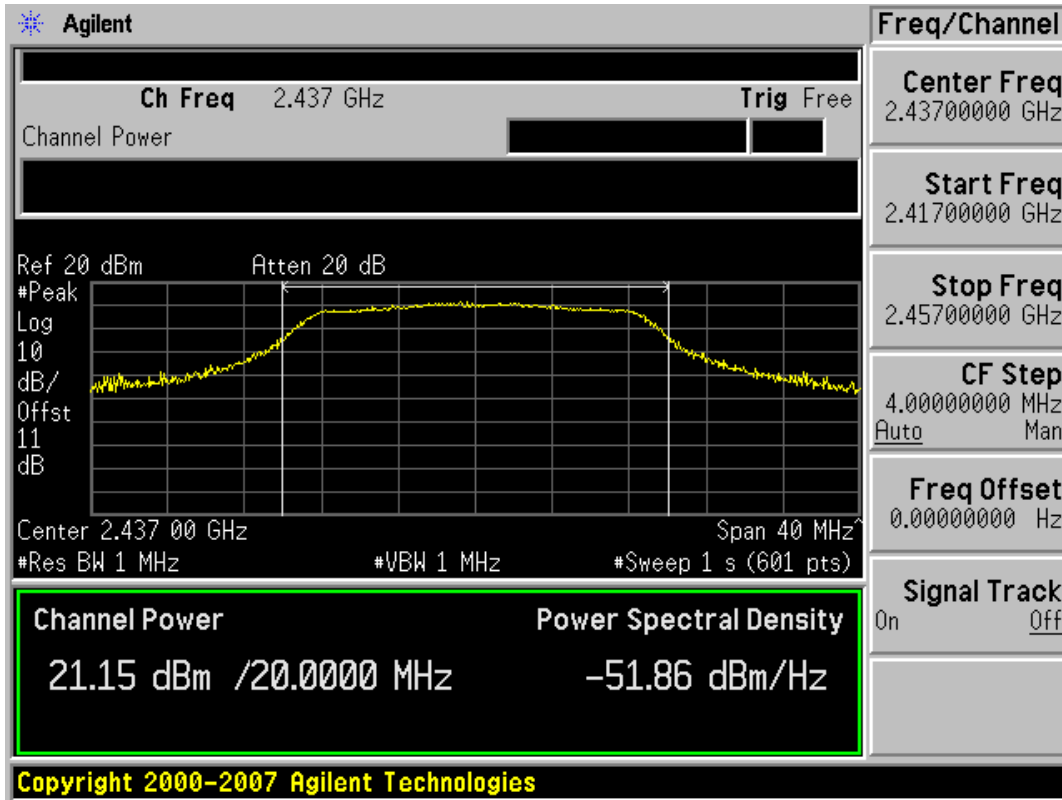


### Conducted Output Power (802.11n-CH 6) 13Mbps

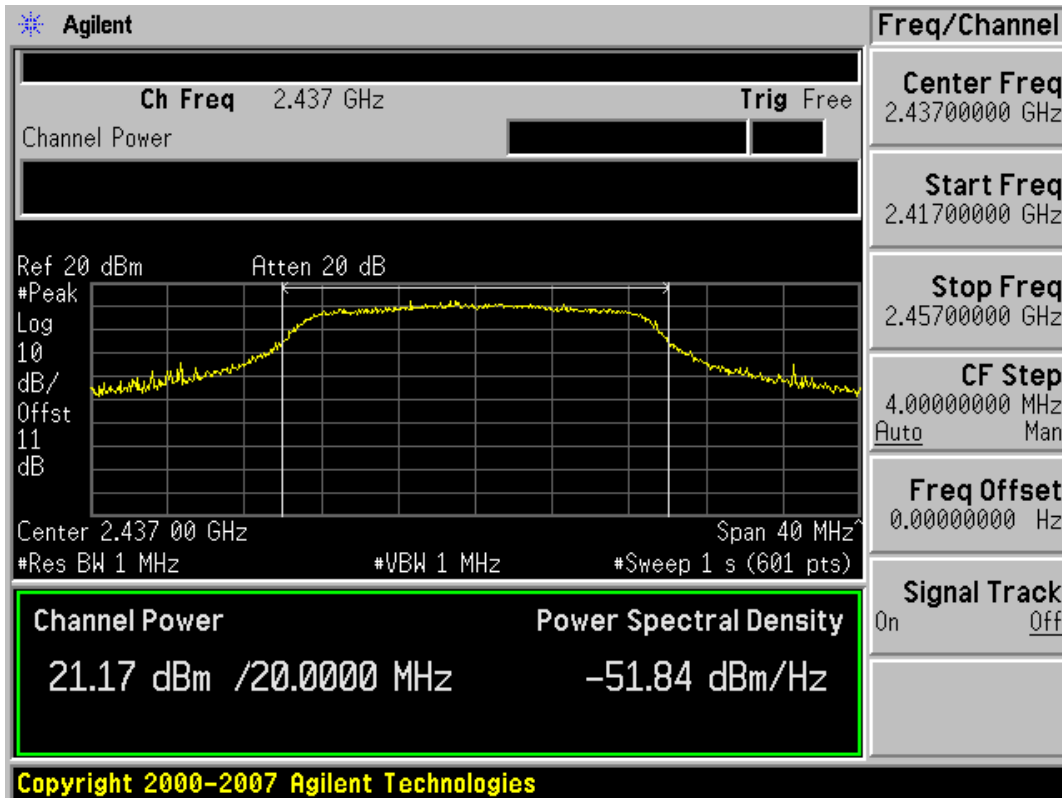


### Conducted Output Power (802.11n-CH 6) 19.5Mbps

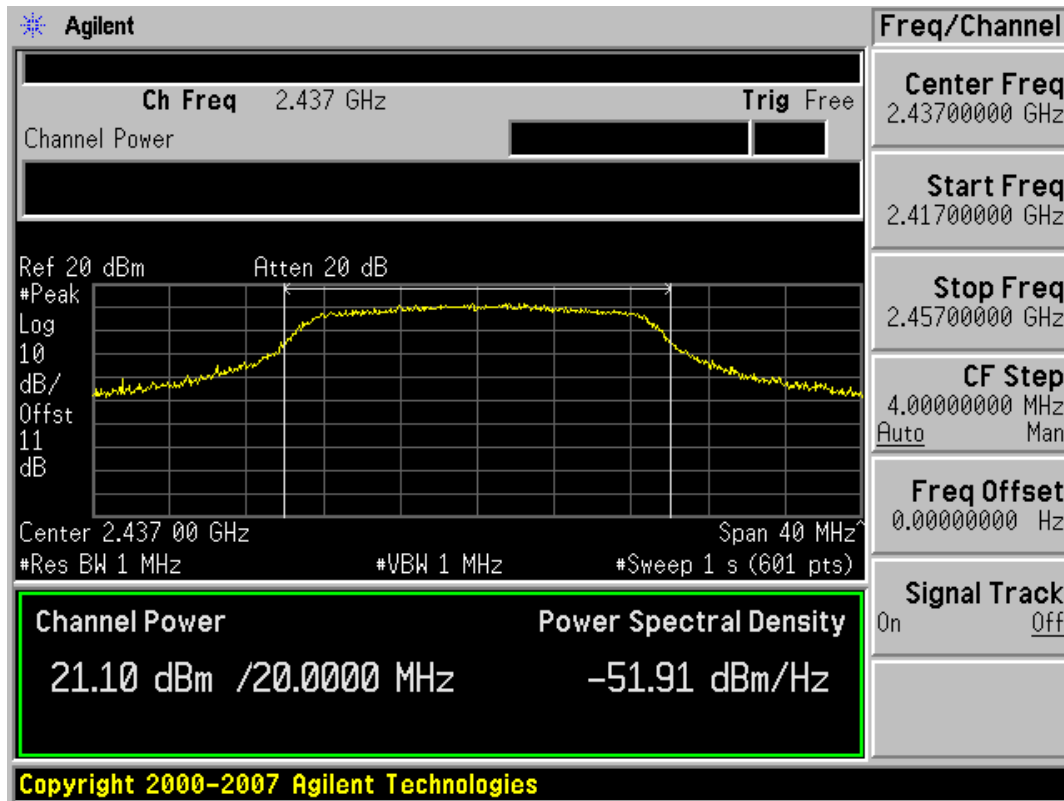


### Conducted Output Power (802.11n-CH 6) 26Mbps

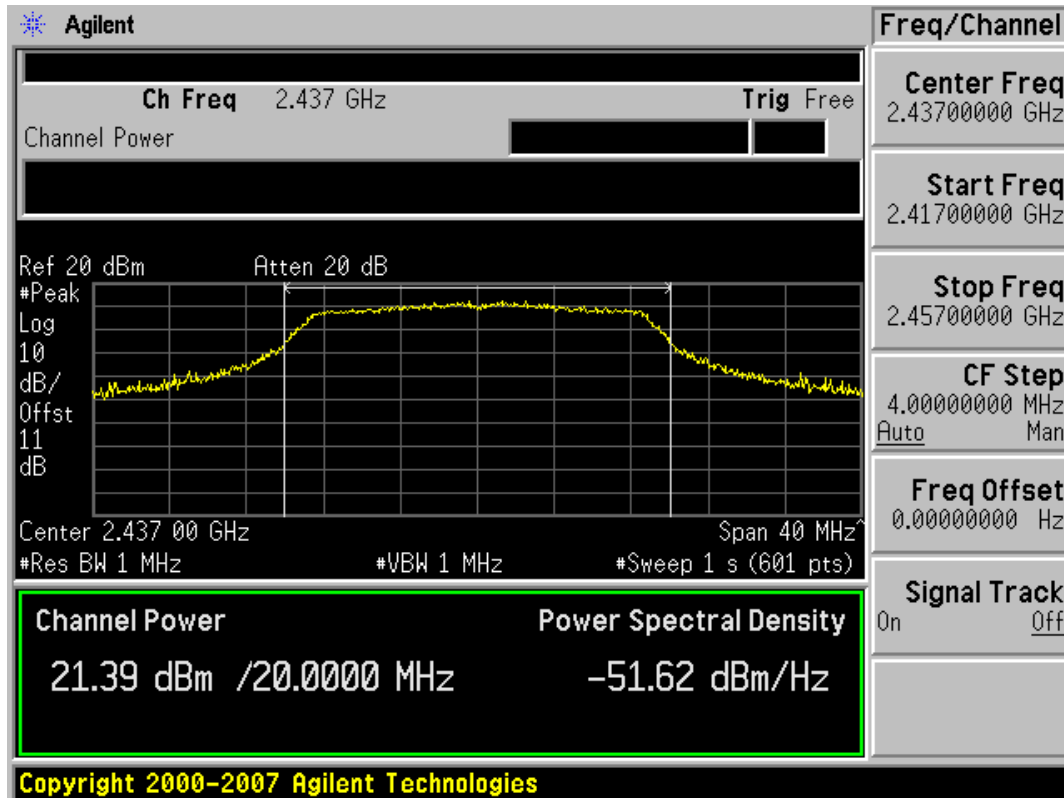


### Conducted Output Power (802.11n-CH 6) 39Mbps

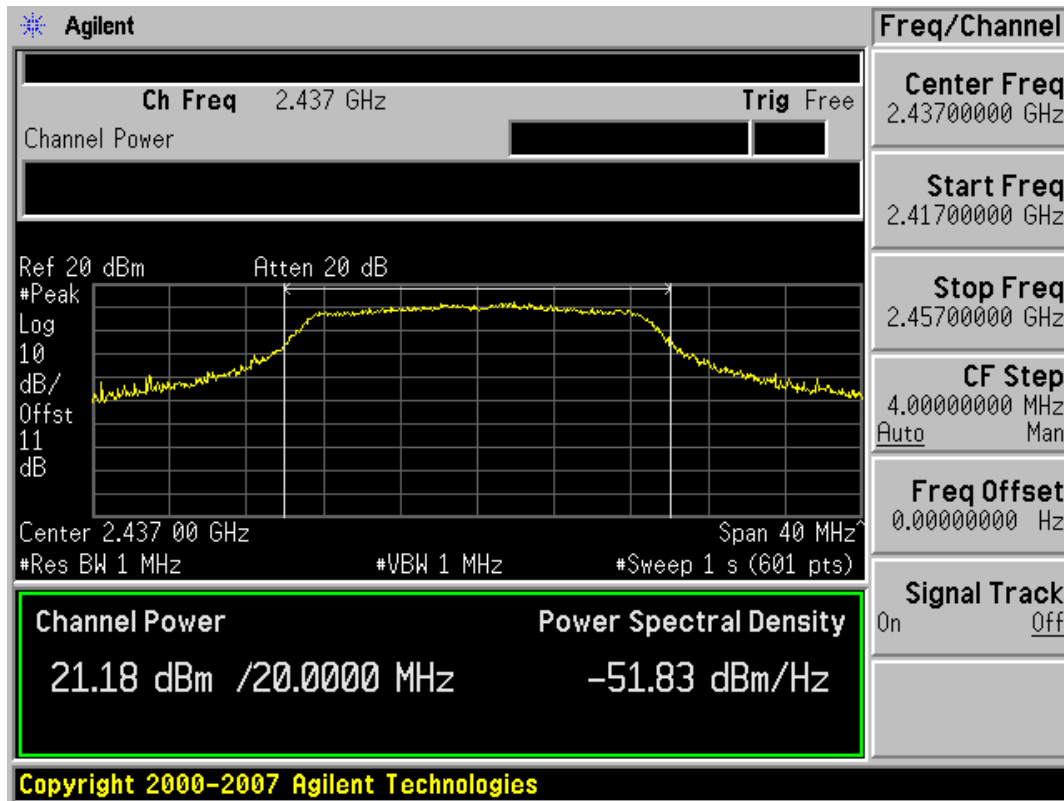


### Conducted Output Power (802.11n-CH 6) 52Mbps

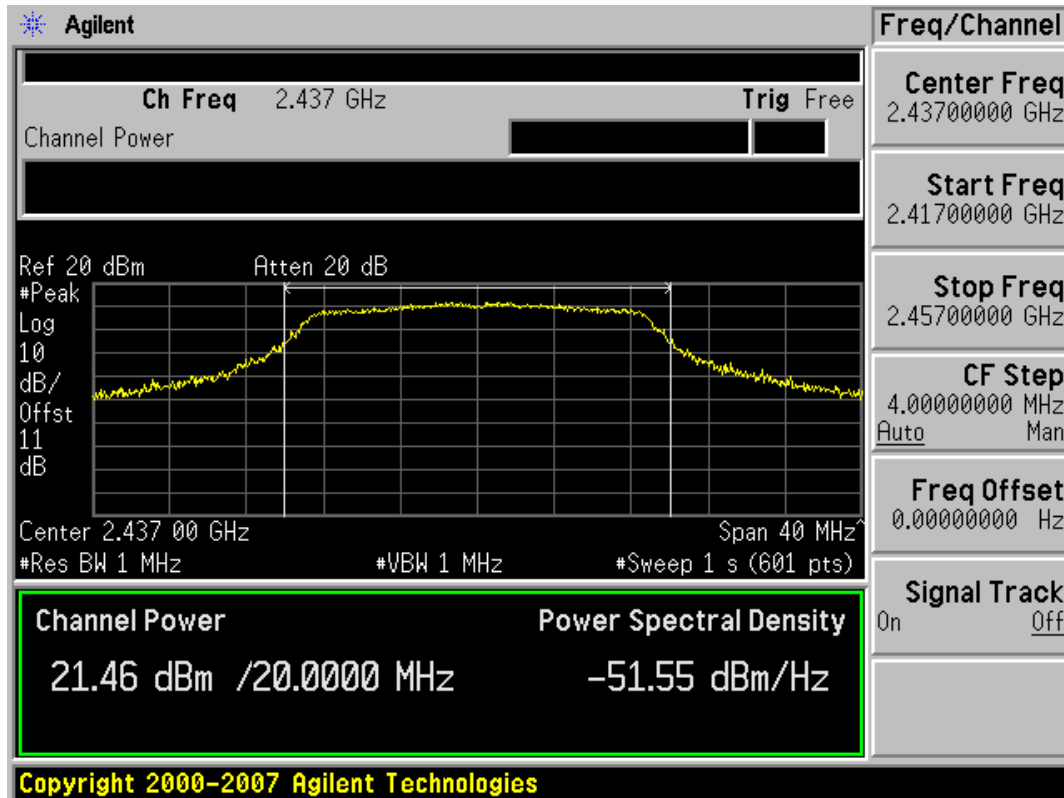


### Conducted Output Power (802.11n-CH 6) 58.5Mbps

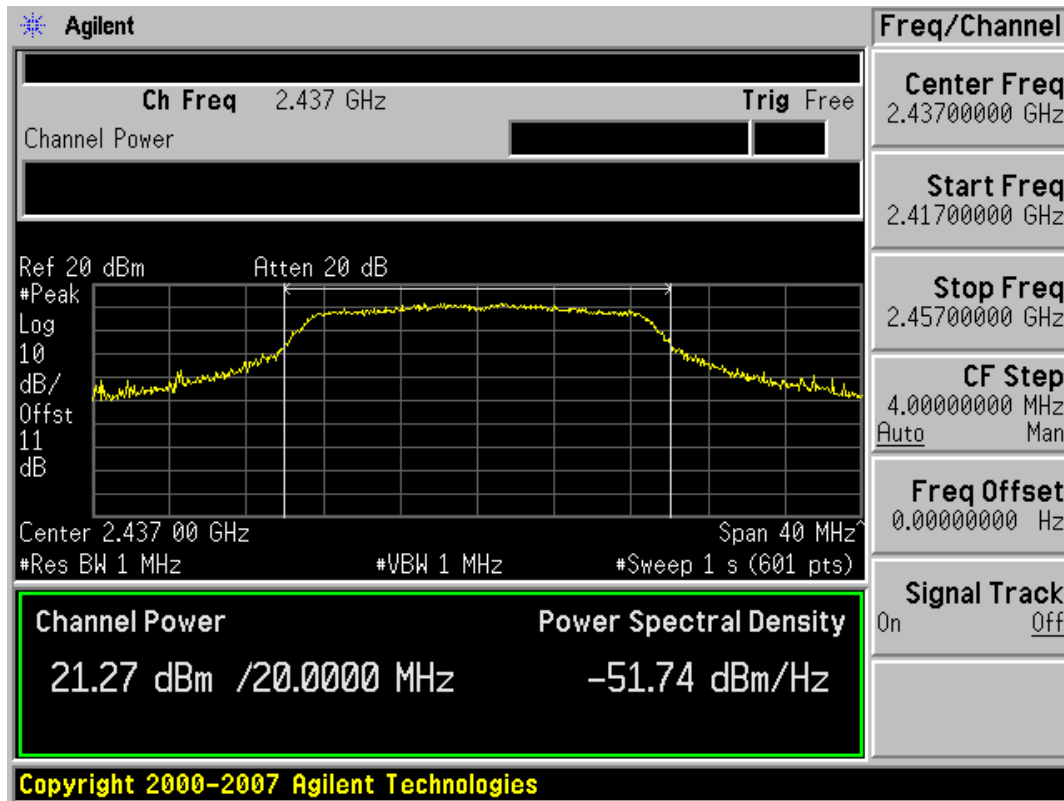


### Conducted Output Power (802.11n-CH 6) 65Mbps

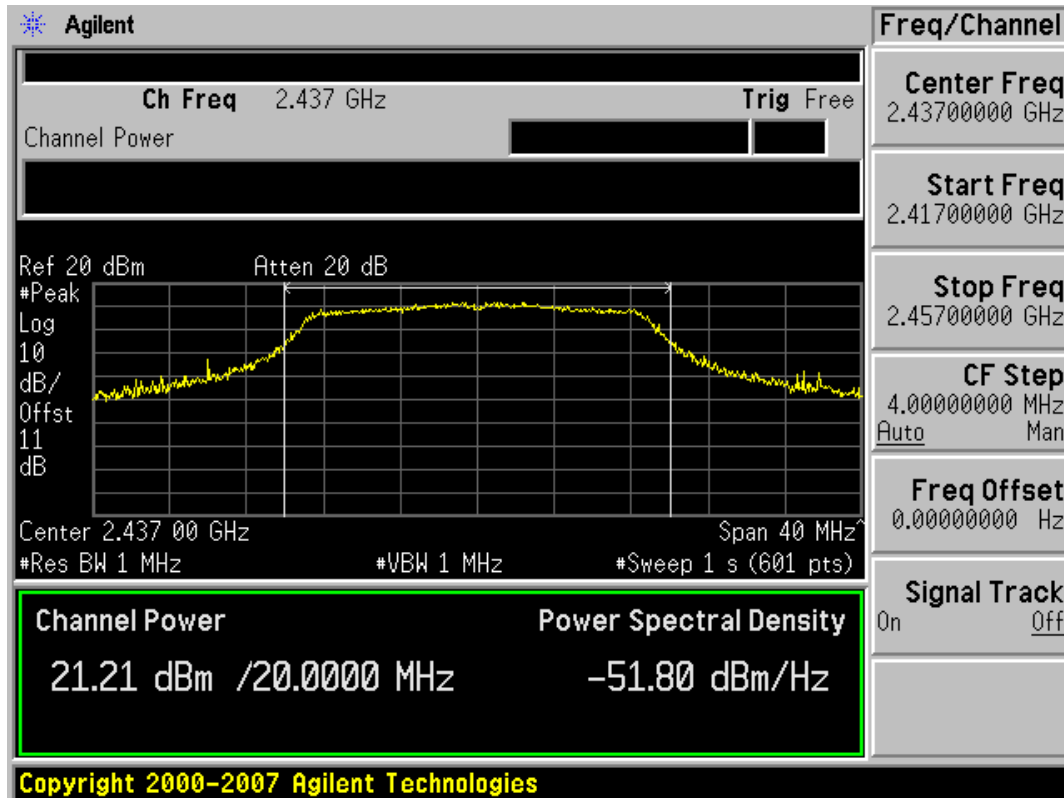


### Conducted Output Power (802.11n-CH 11) 6.5Mbps

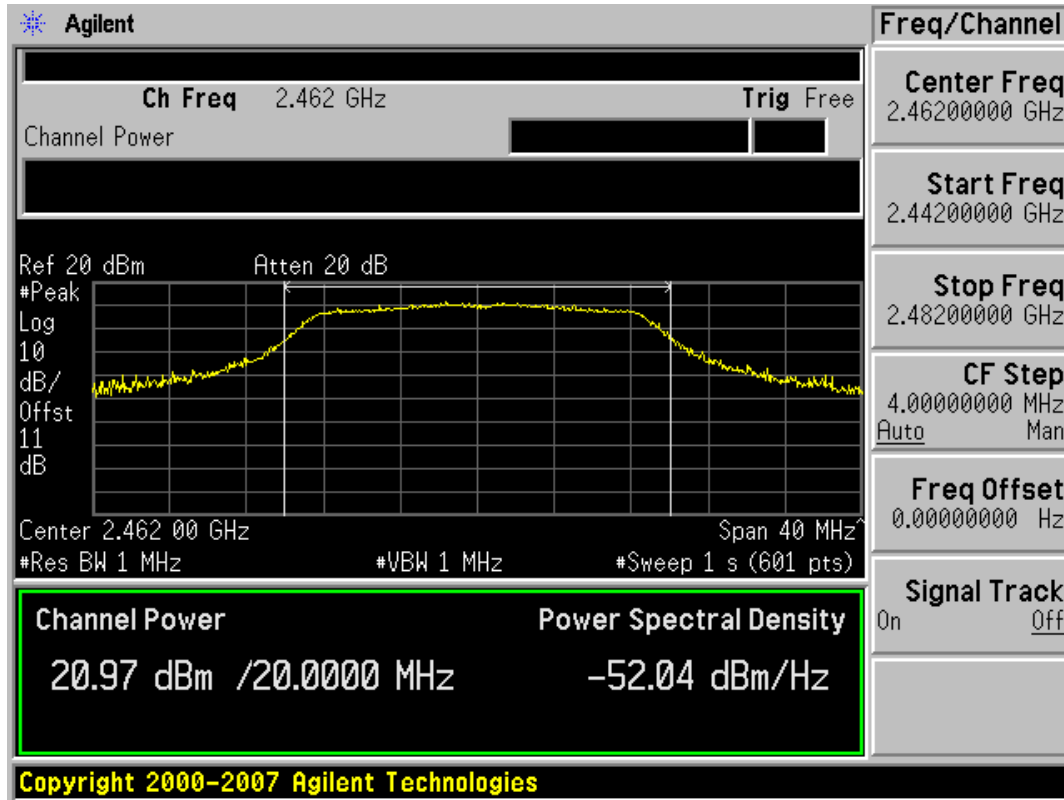


### Conducted Output Power (802.11n-CH 11) 13Mbps

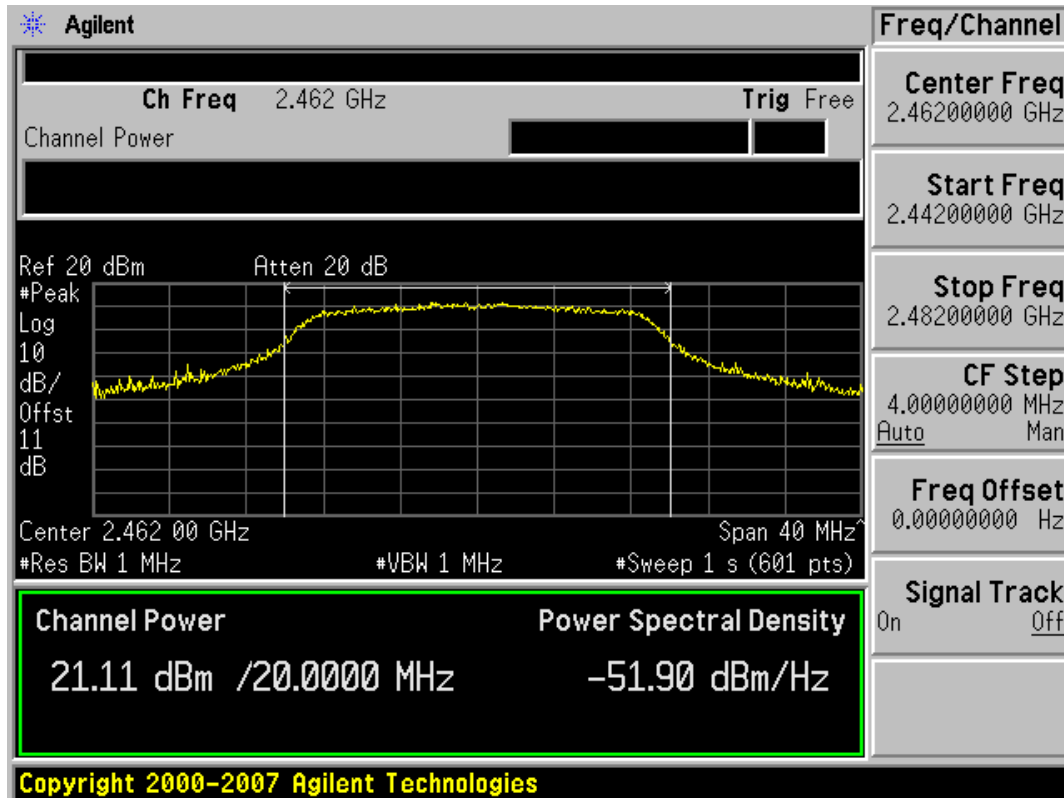


### Conducted Output Power (802.11n-CH 11) 19.5Mbps

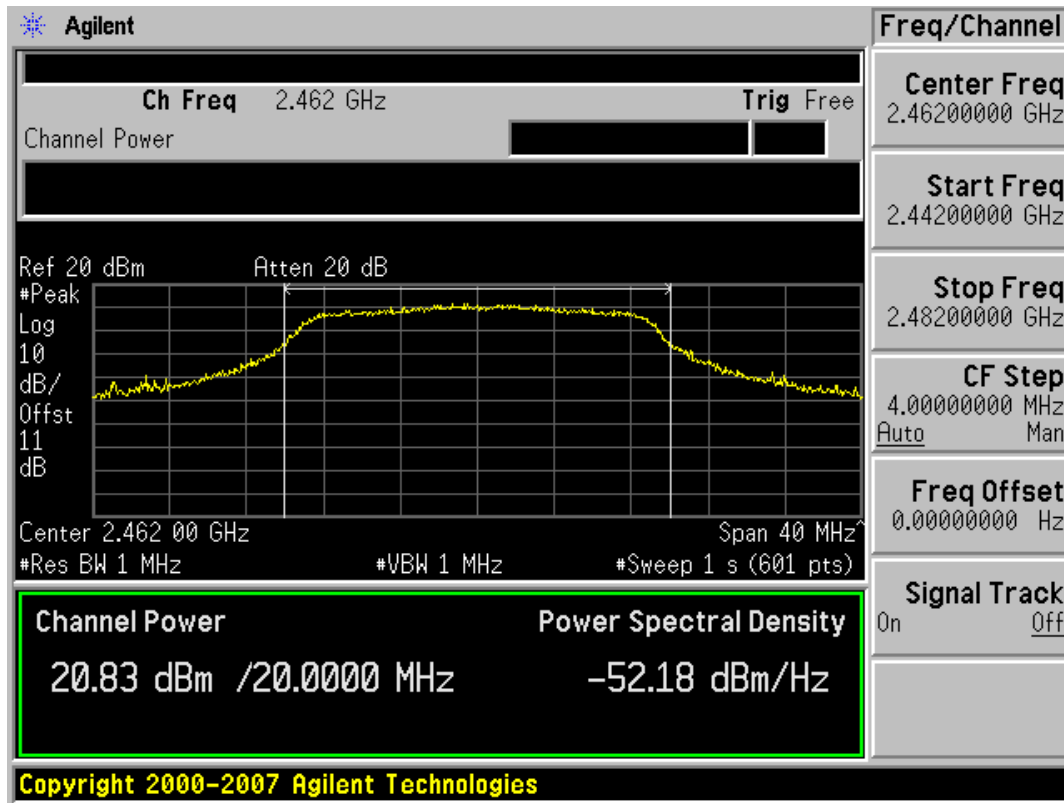


### Conducted Output Power (802.11n-CH 11) 26Mbps

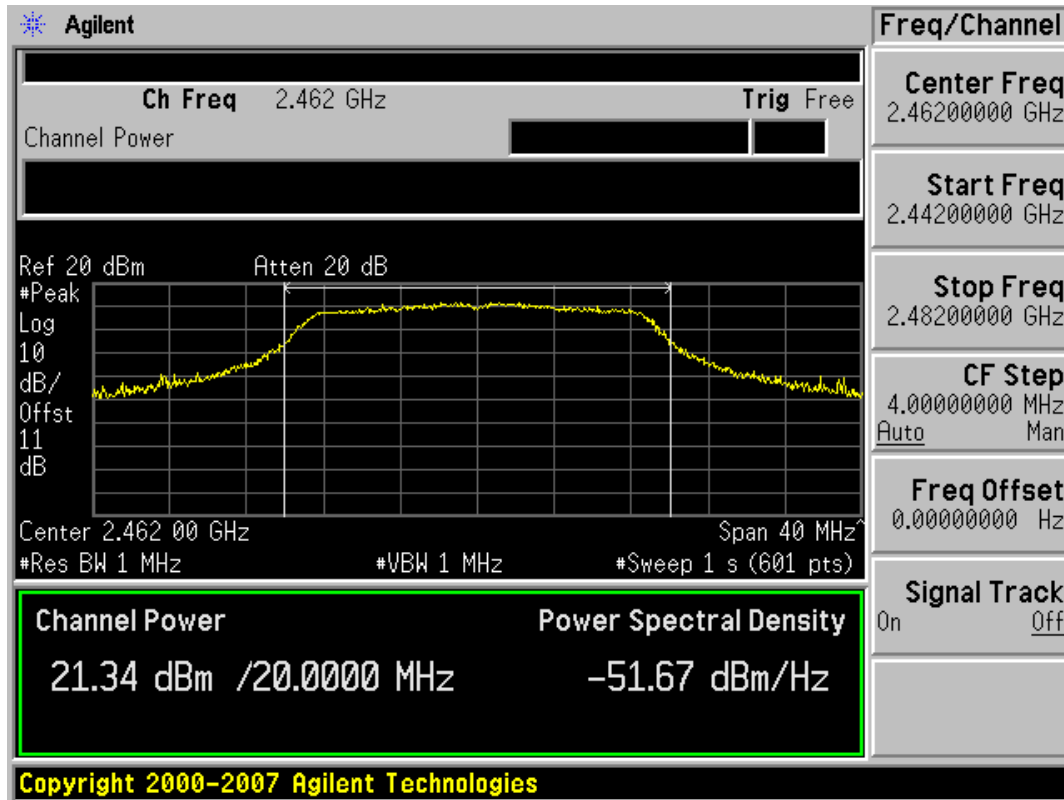


### Conducted Output Power (802.11n-CH 11) 39Mbps

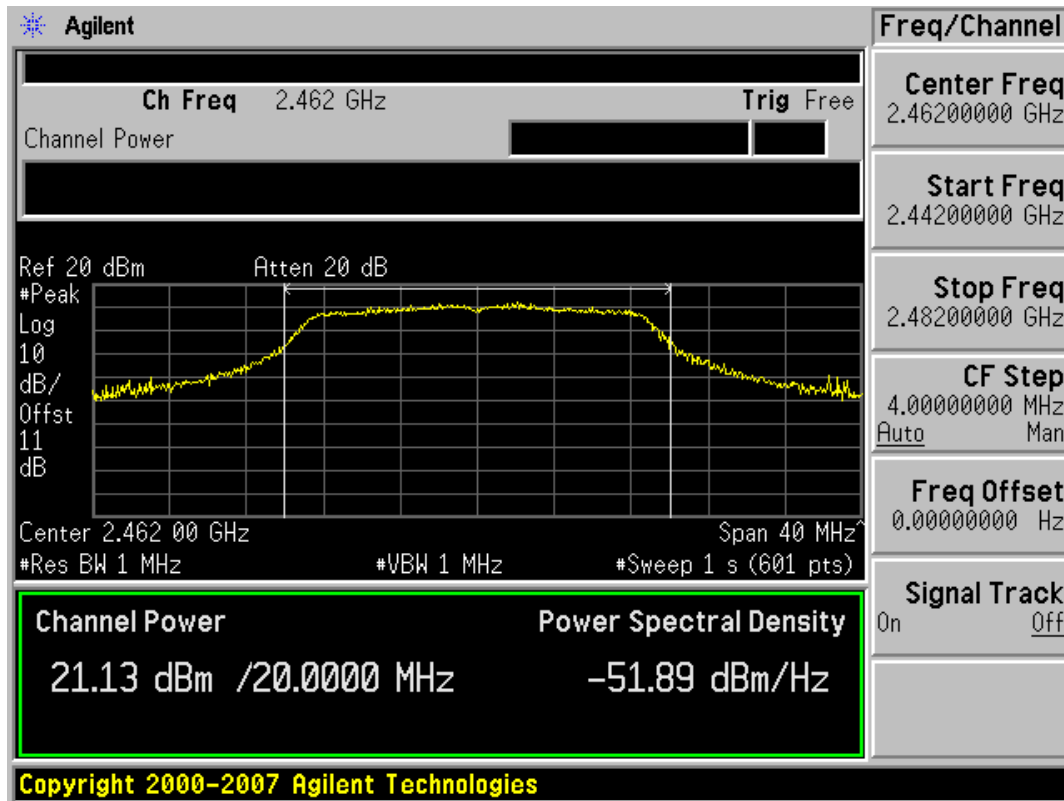


### Conducted Output Power (802.11n-CH 11) 52Mbps

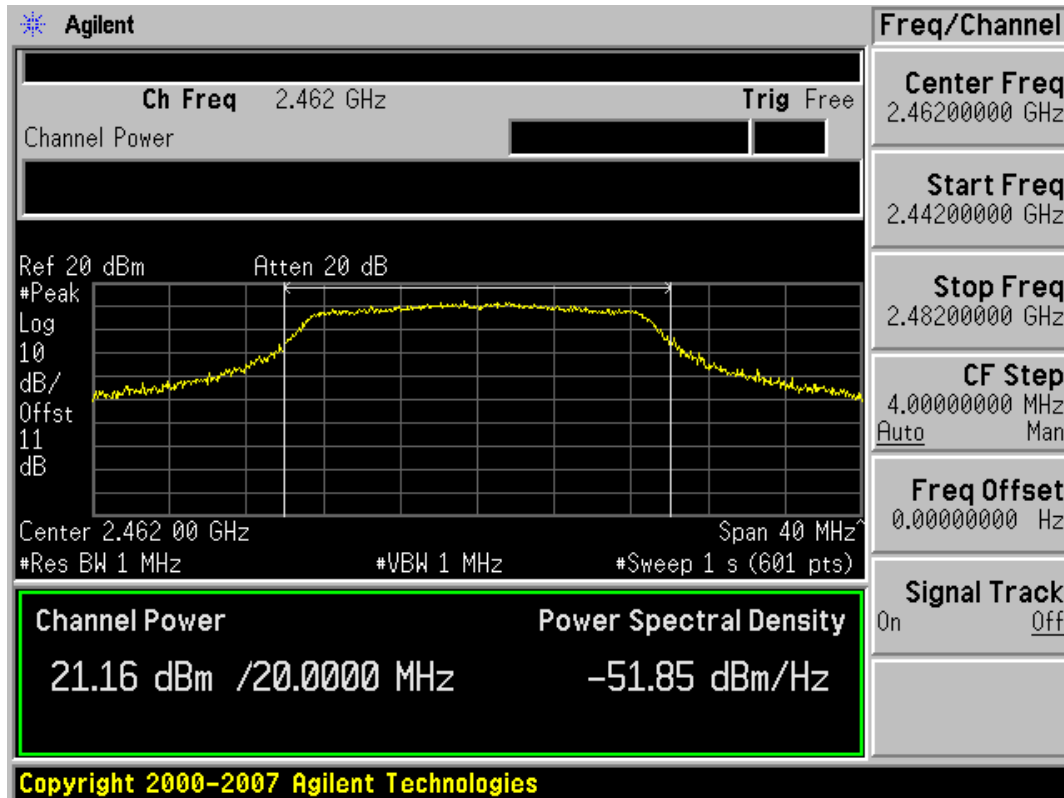

### Conducted Output Power (802.11n-CH 11) 58.5Mbps

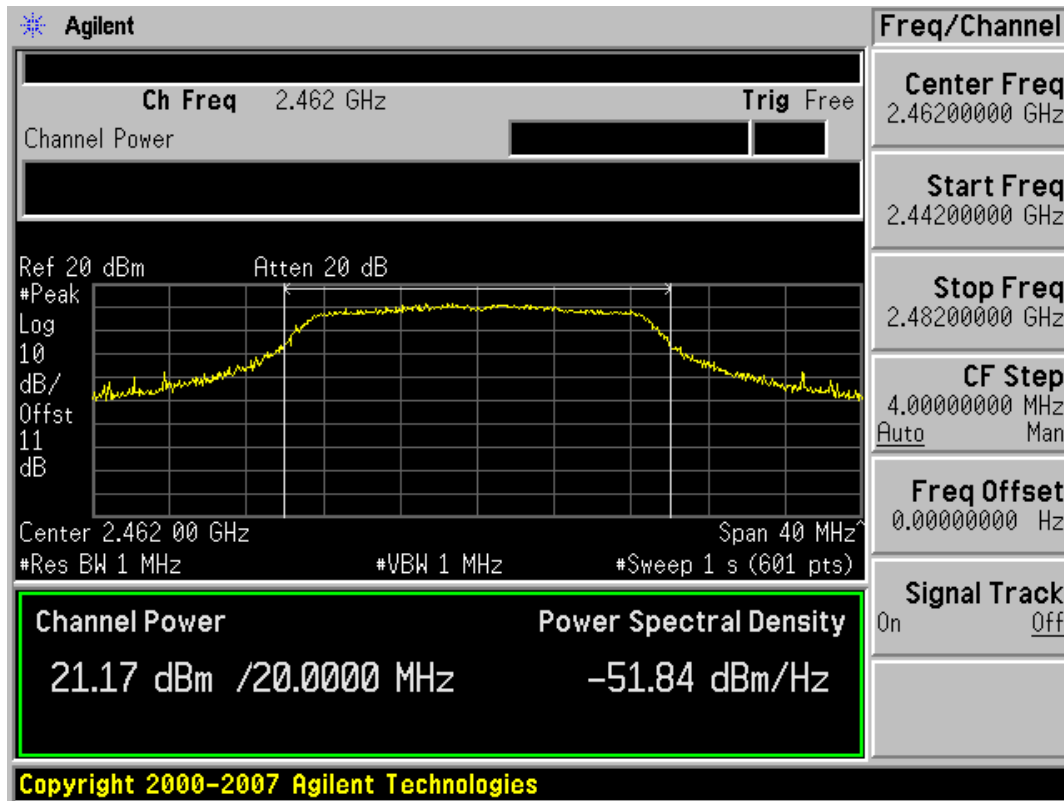

### Conducted Output Power (802.11n-CH 11) 65Mbps

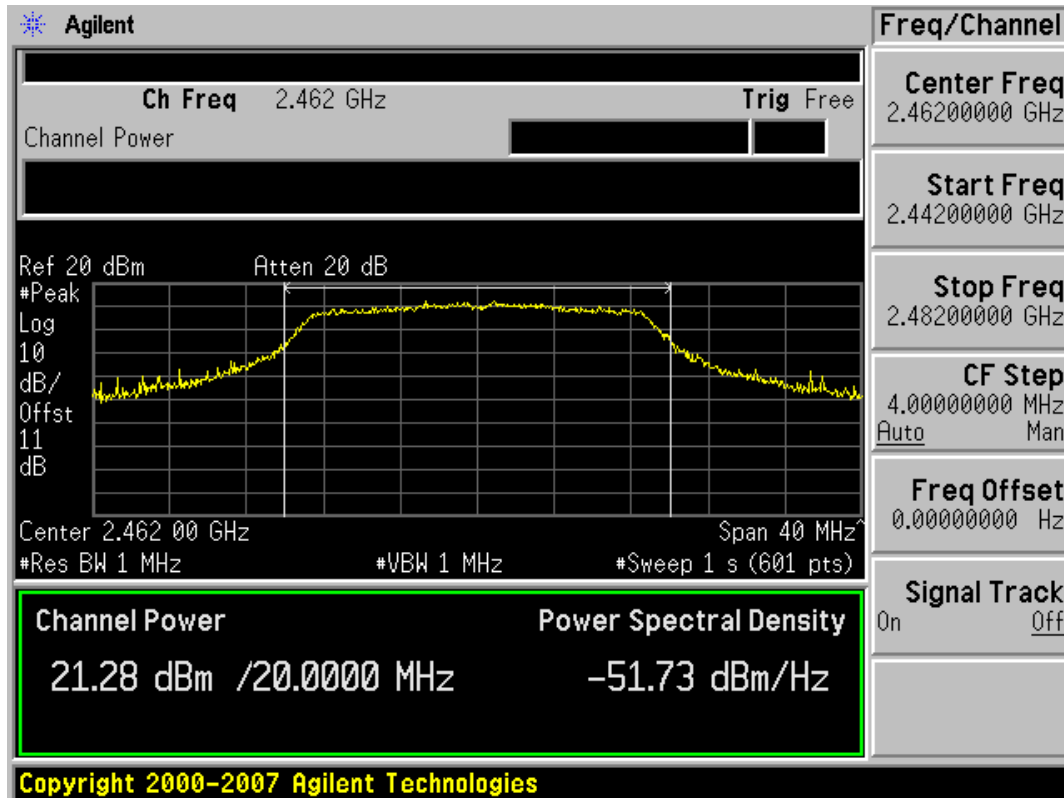




### 7.3 POWER SPECTRAL DENSITY (802.11b/g/n)

#### Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.**

#### ■ TEST CONFIGURATION

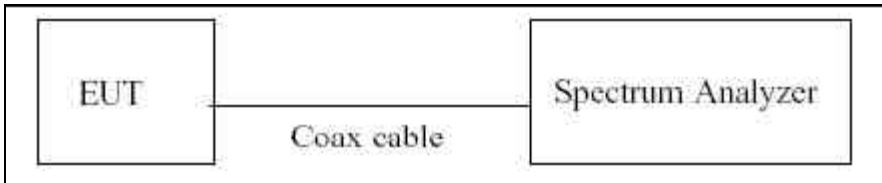

#### ■ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 kHz
2. RBW = 3 kHz (7dB/div)
3. VBW = 3 kHz
4. Sweep = 100 sec
5. Detector Mode = Peak


#### ■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result	
			Power Density (dBm)	Pass/Fail
2412	1	802.11b	-6.33	Pass
2437	6		-5.98	Pass
2462	11		-6.43	Pass
2412	1	802.11g	-10.63	Pass
2437	6		-10.81	Pass
2462	11		-11.25	Pass
2412	1	802.11n	-11.02	Pass
2437	6		-11.12	Pass
2462	11		-11.38	Pass

■ RESULT PLOTS


Power Spectral Density (802.11b-CH 1)

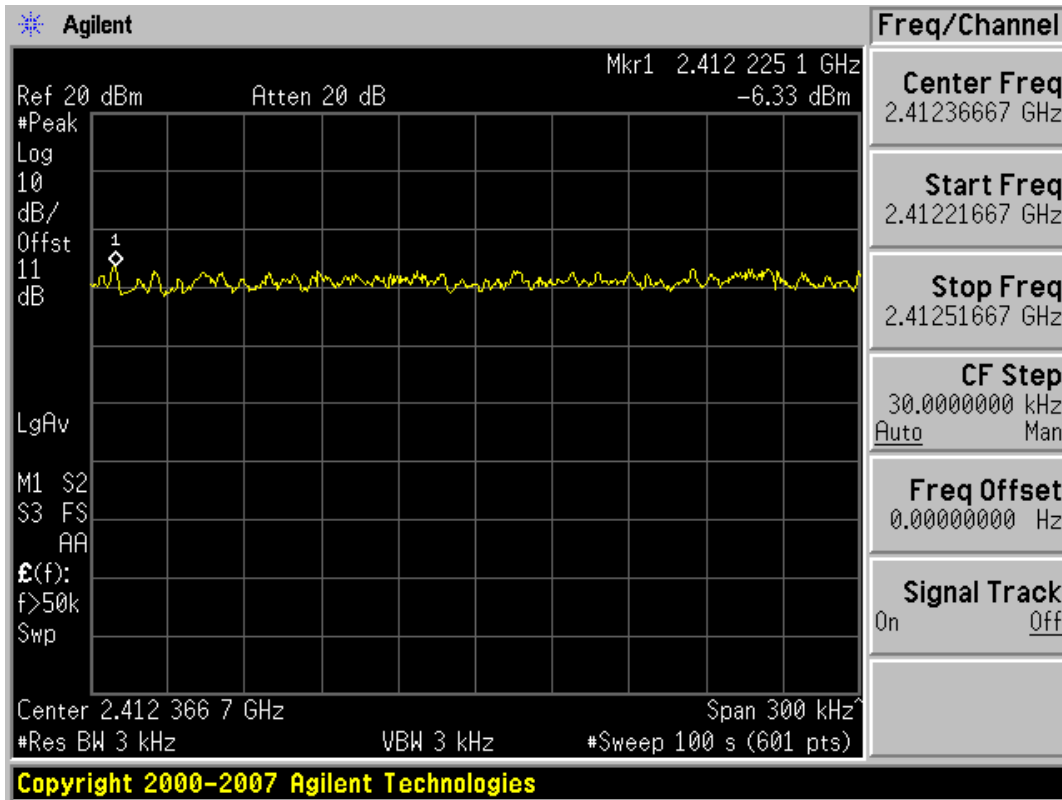


Power Spectral Density (802.11b-CH 6)

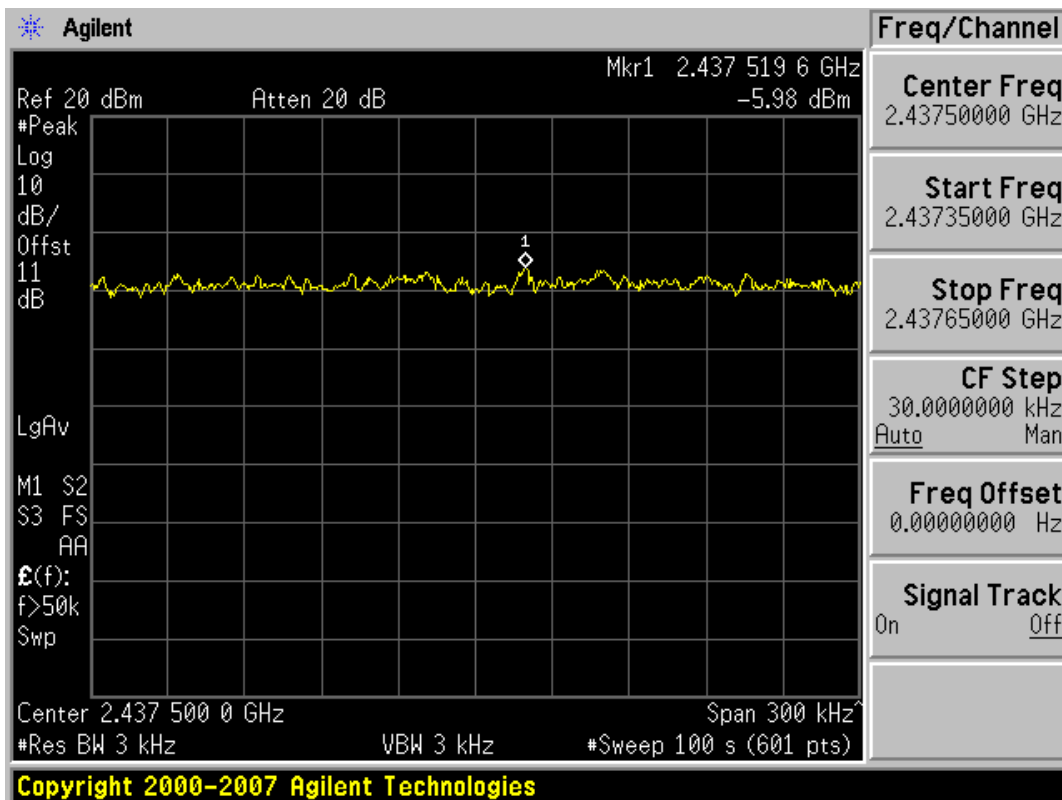

### Power Spectral Density (802.11b-CH 11)

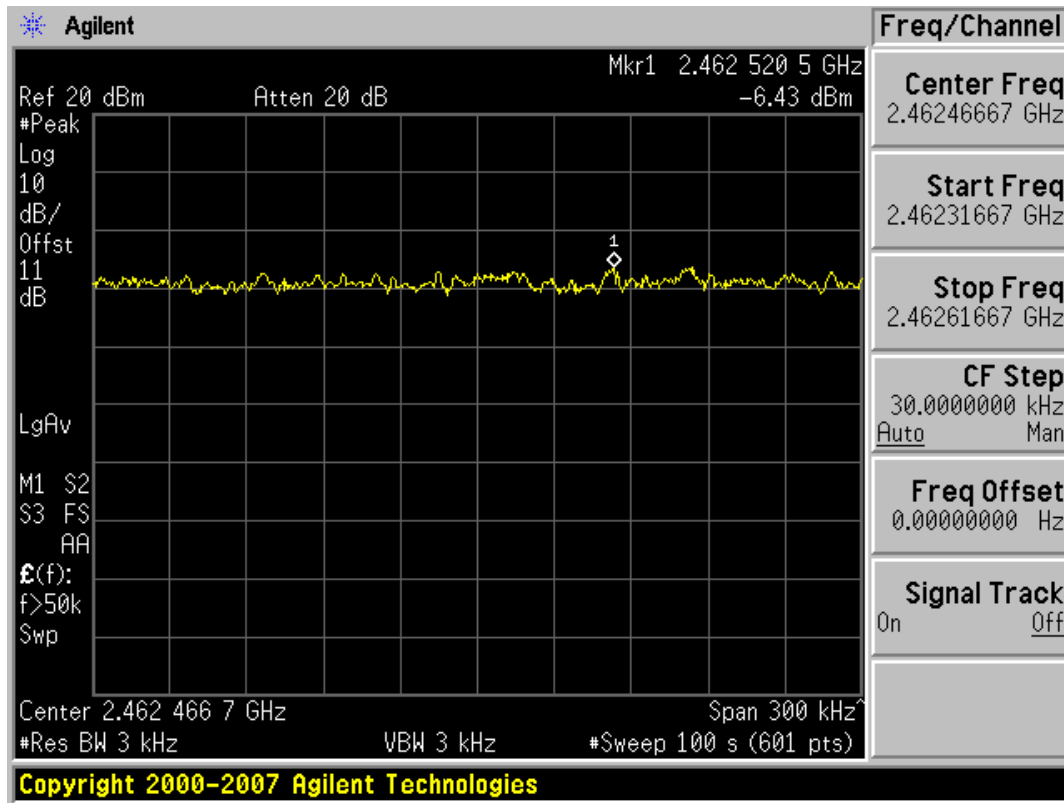


### Power Spectral Density (802.11g-CH 1)

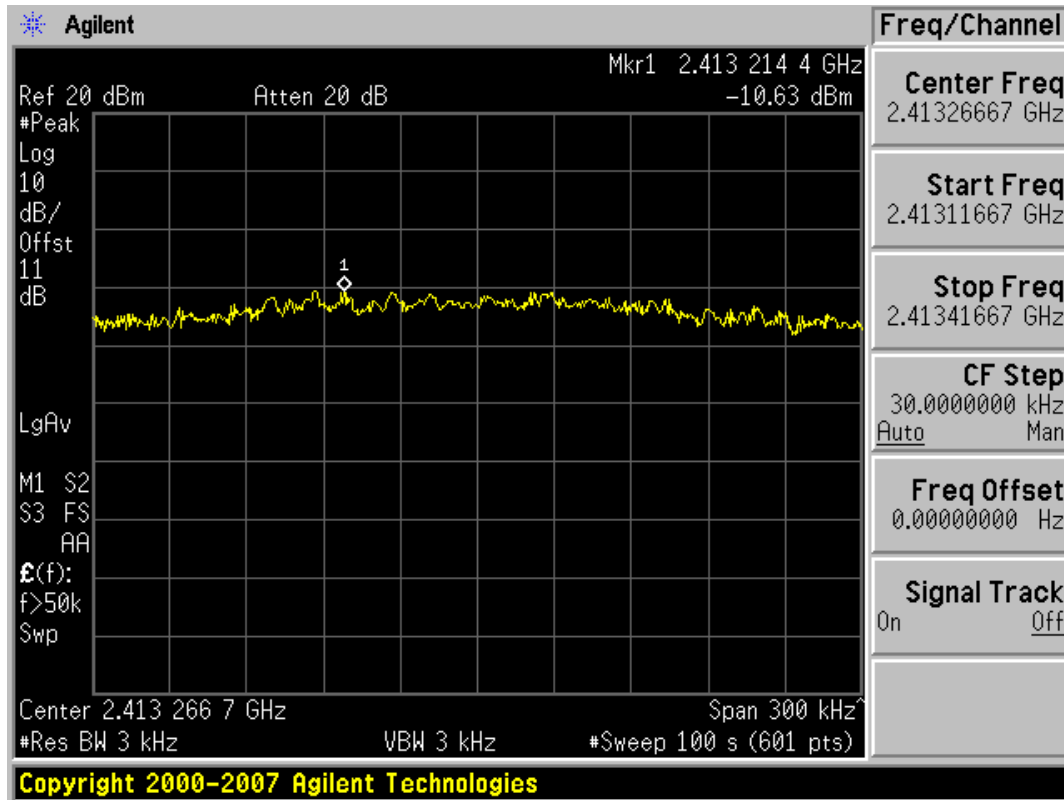


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11

### Power Spectral Density (802.11g-CH 6)

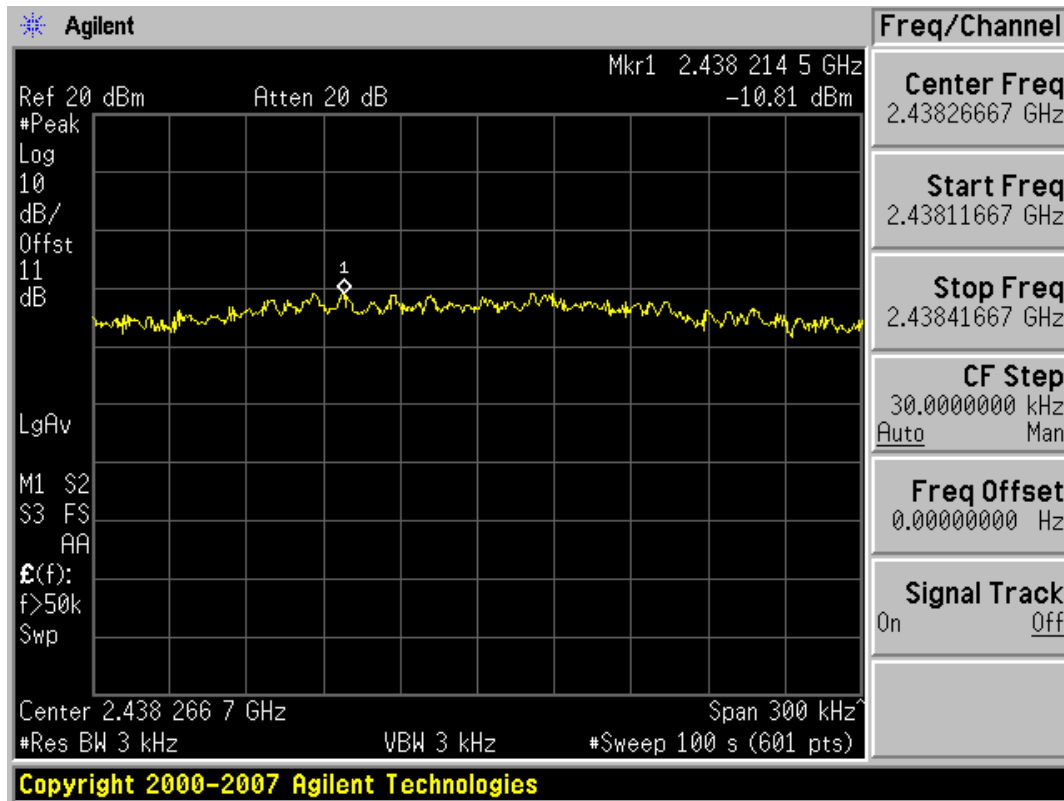


### Power Spectral Density (802.11g-CH11)

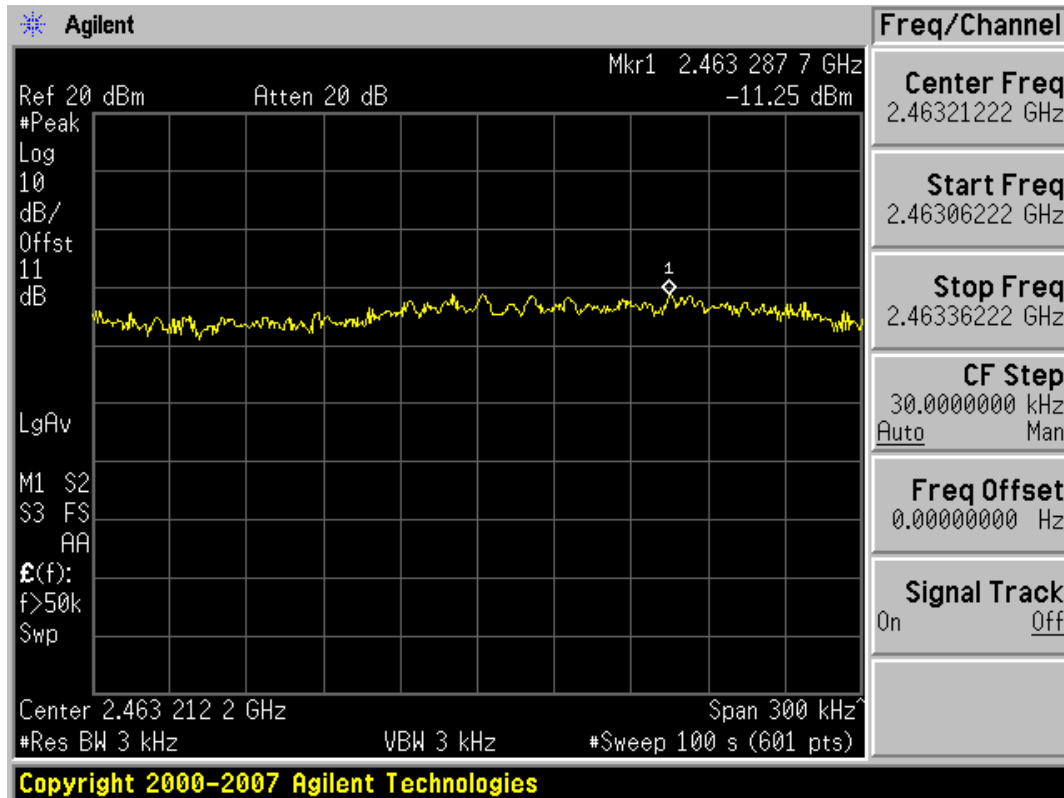


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11

### Power Spectral Density (802.11n-CH 1)

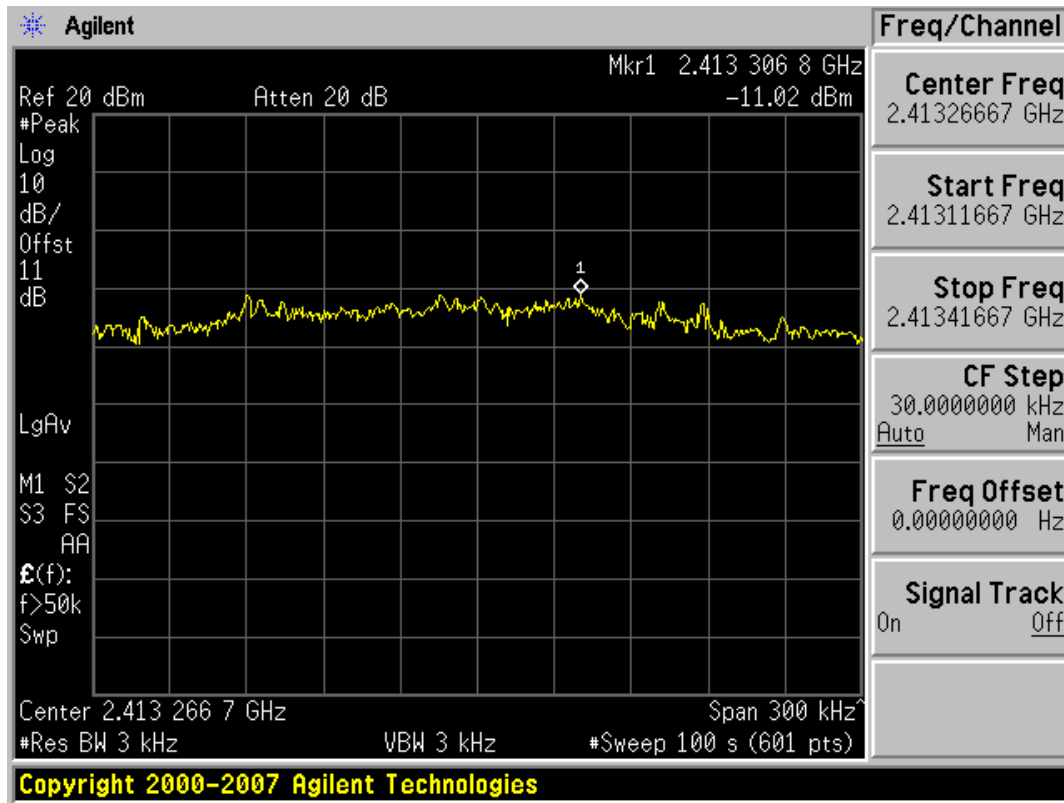


### Power Spectral Density (802.11n-CH 6)

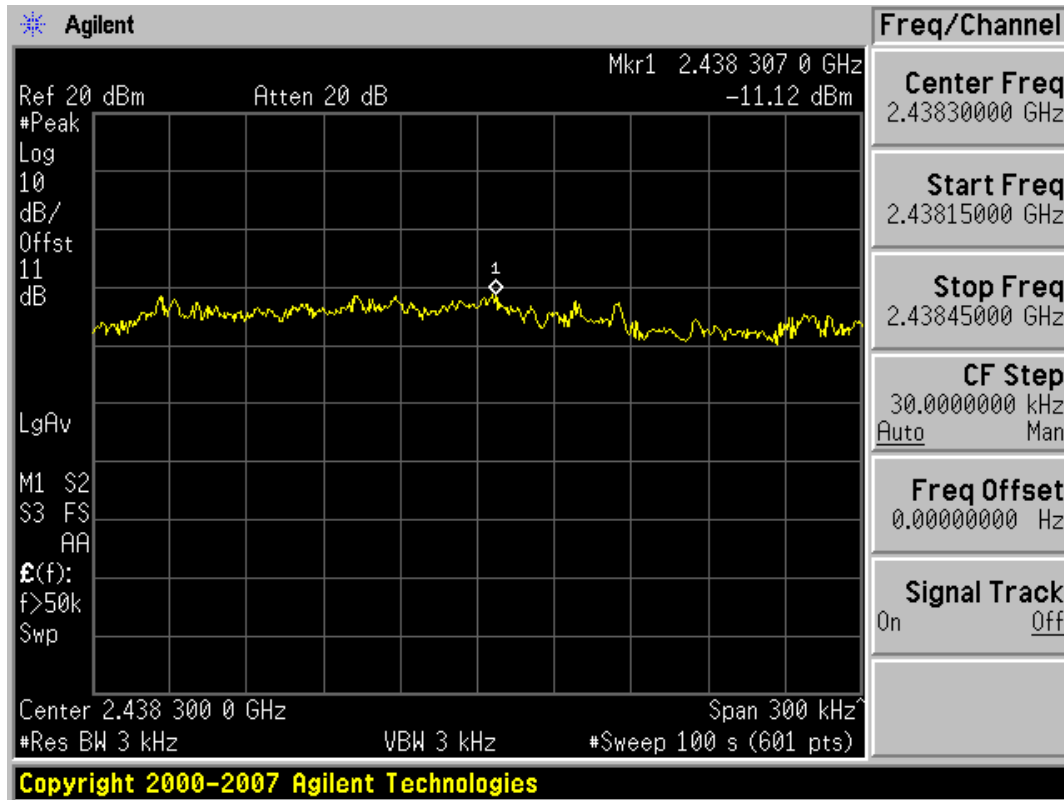

<b>FCC PT.15.247 TEST REPORT</b>		<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11	

### Power Spectral Density (802.11n-CH11)

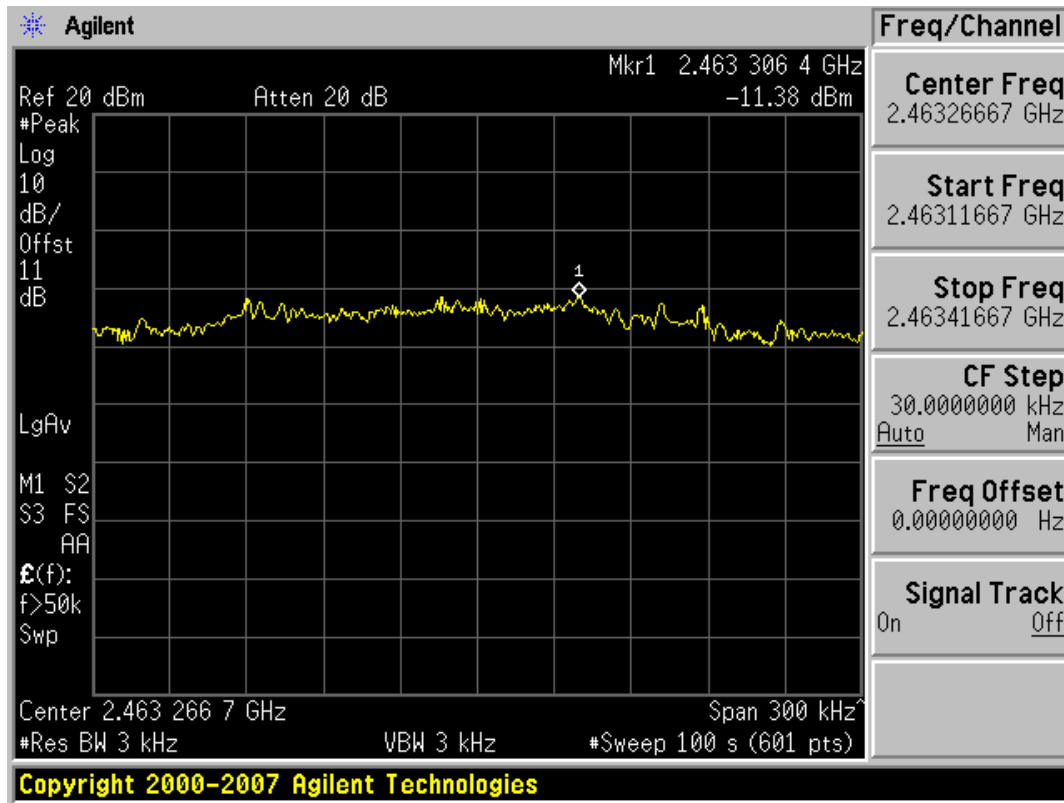


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

## 7.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

### Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### ■ TEST CONFIGURATION

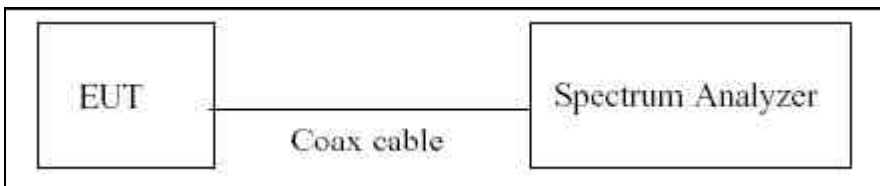

### ■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Detector Mode is set to a peak detector Mode.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

RESULT PLOTS

BandEdge (802.11b-CH1)

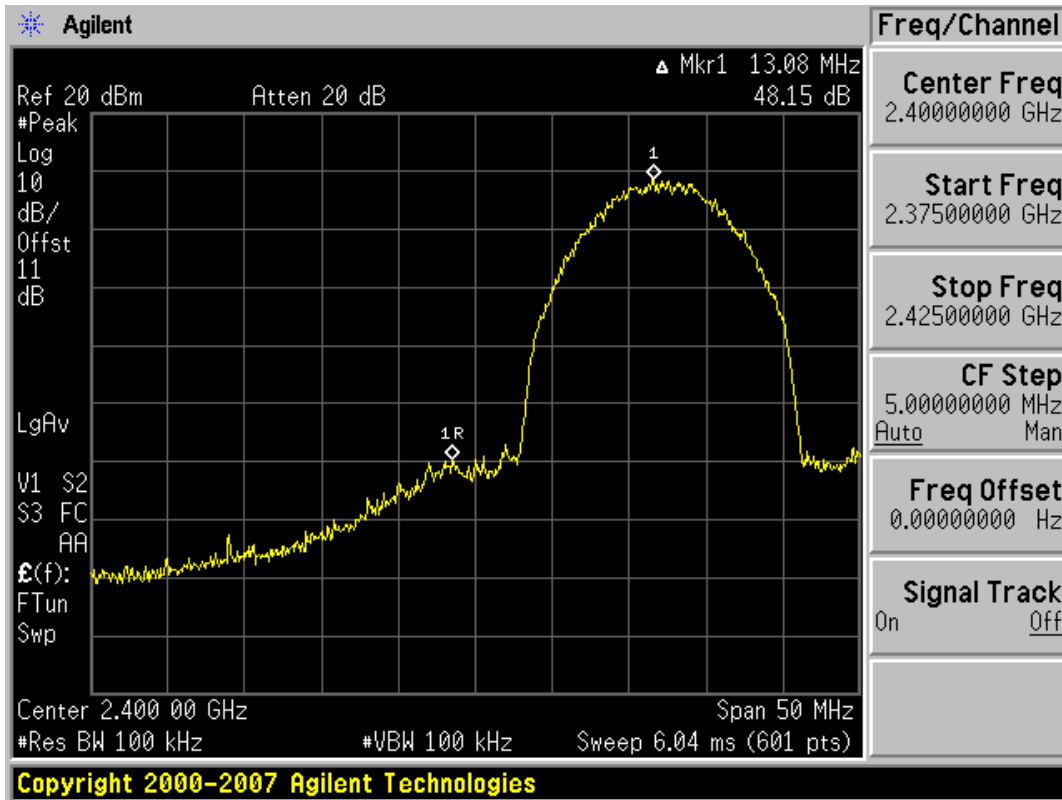


BandEdge (802.11b-CH11)

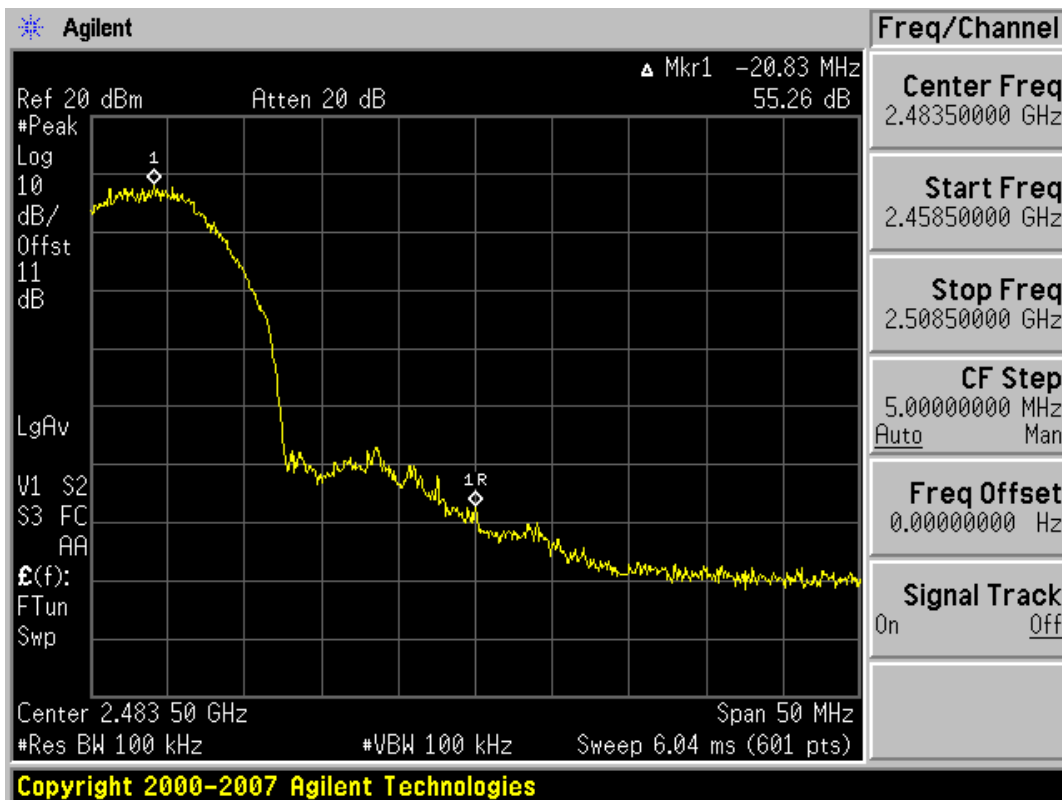


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11




### BandEdge (802.11g-CH1)

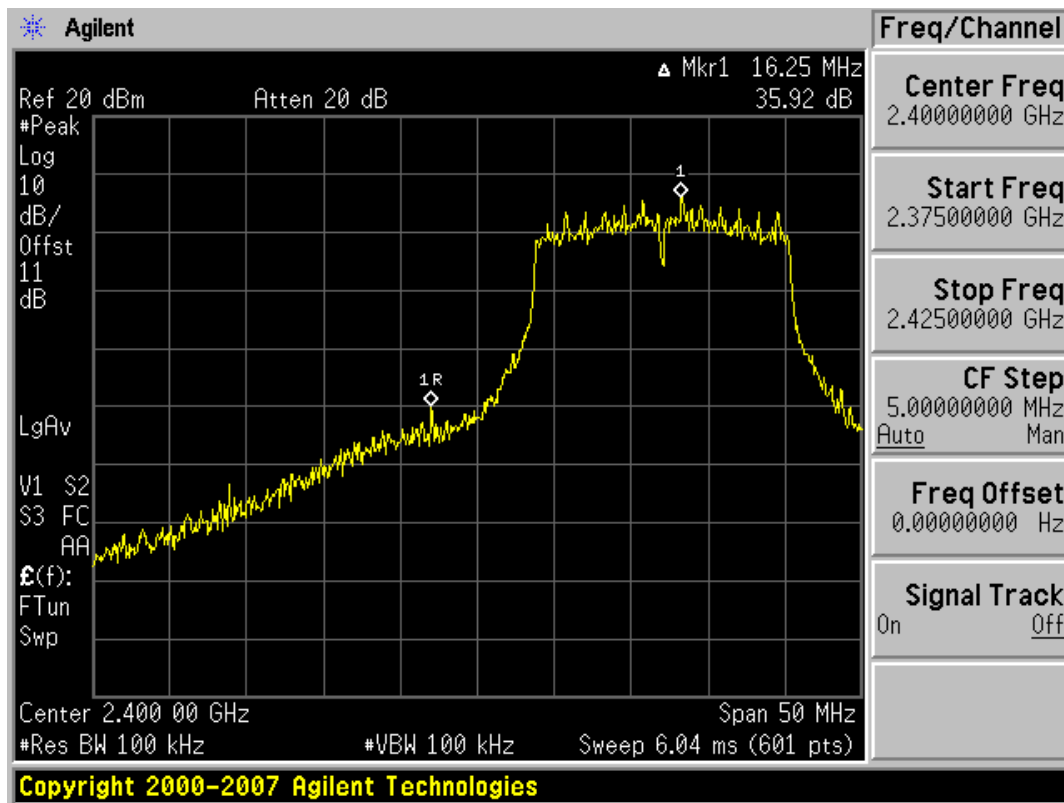


### BandEdge (802.11g-CH11)

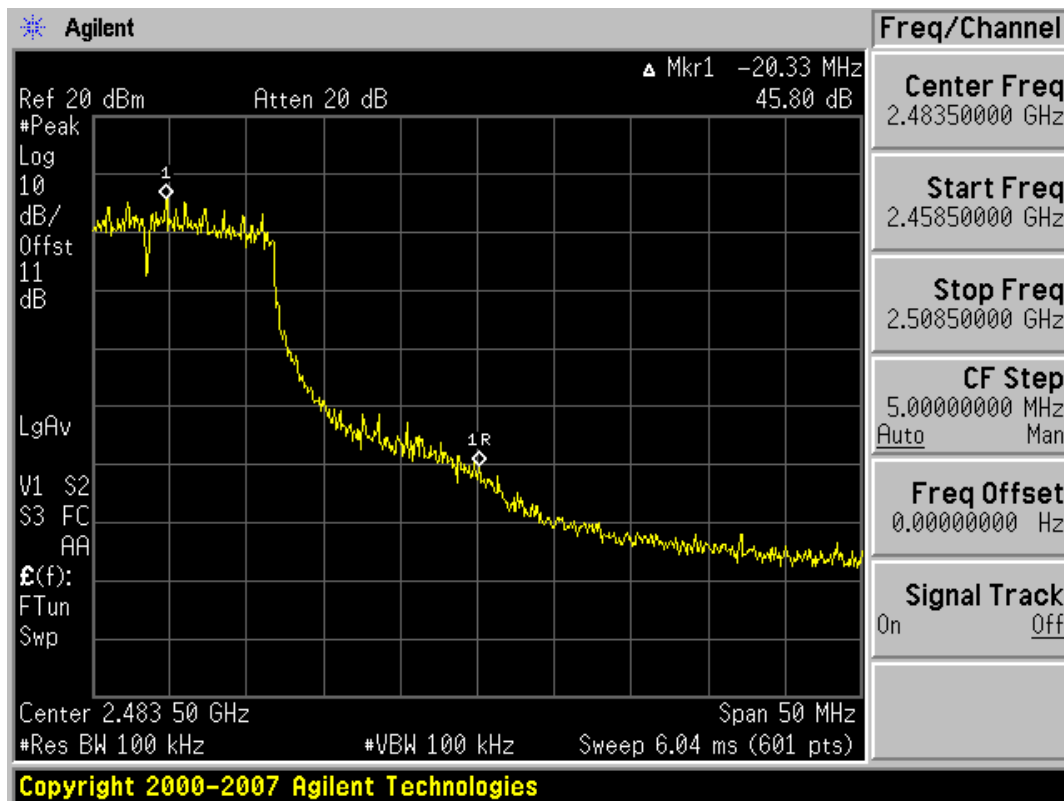


### BandEdge (802.11n-CH1)

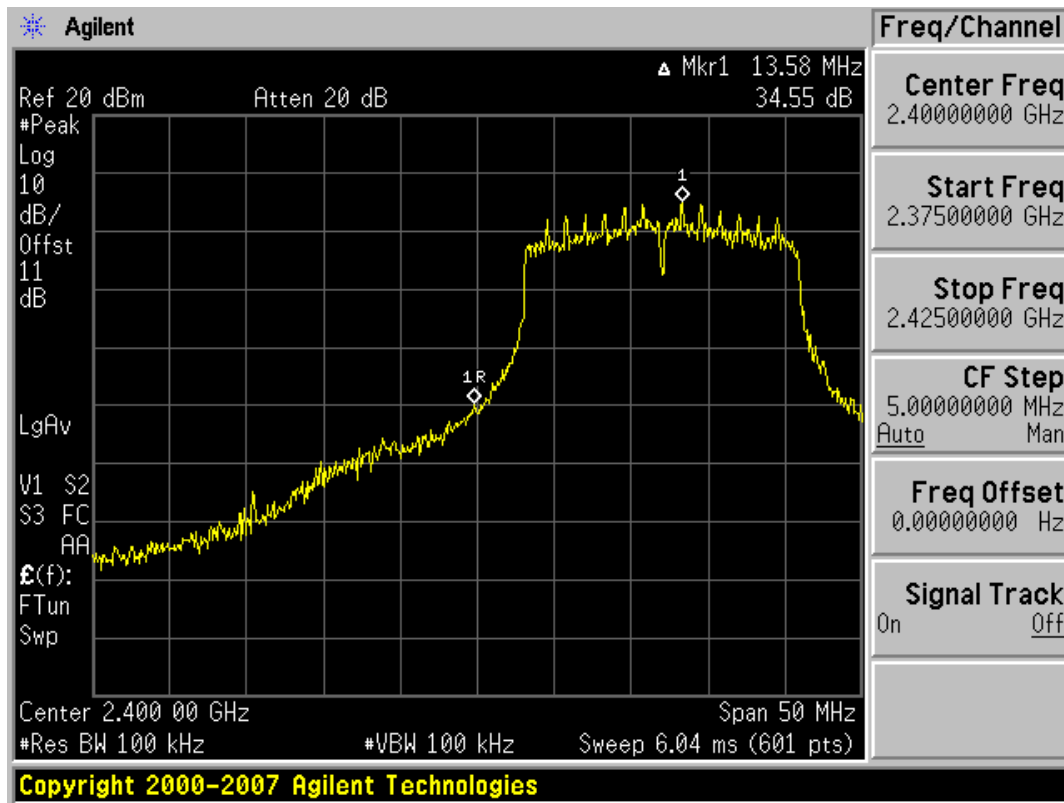


### BandEdge (802.11n-CH11)

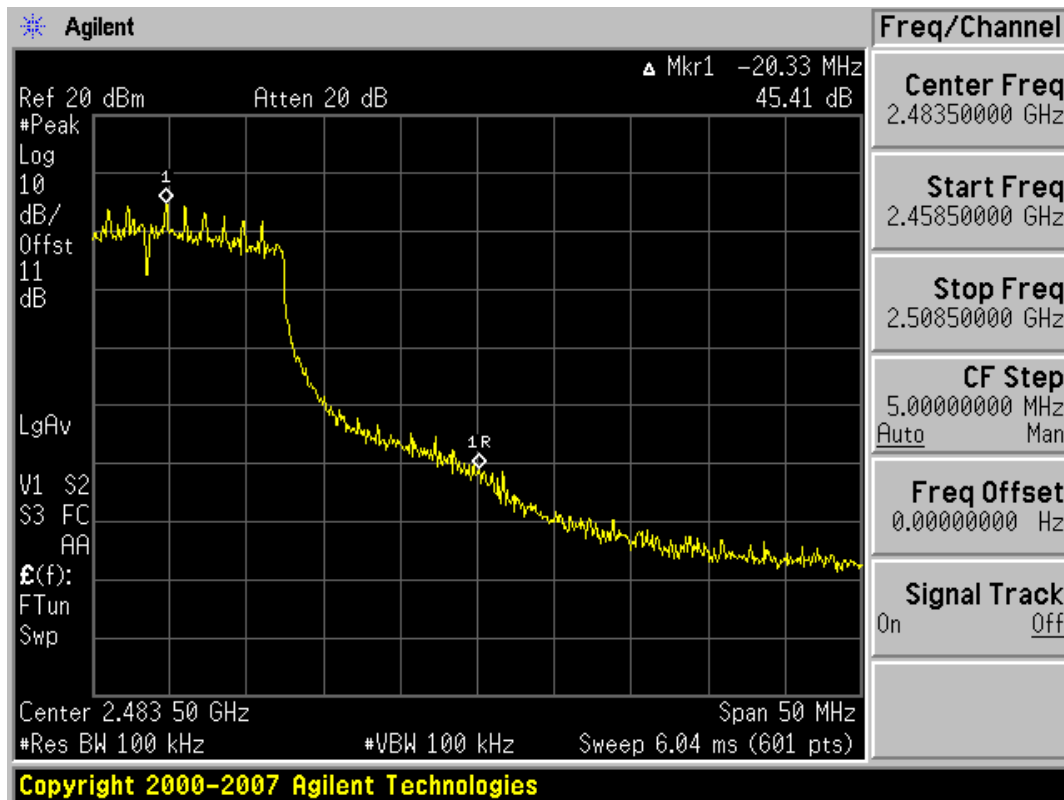

Conducted Spurious Emission (802.11b-CH1)

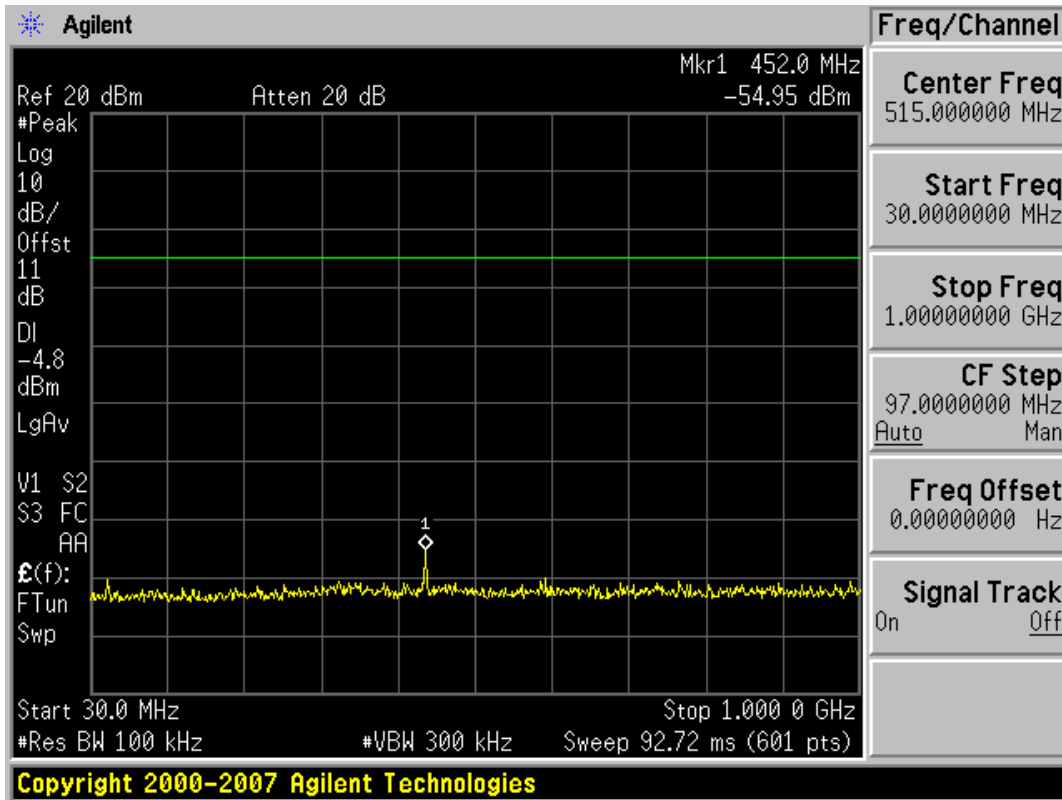


Conducted Spurious Emission (802.11b-CH6)

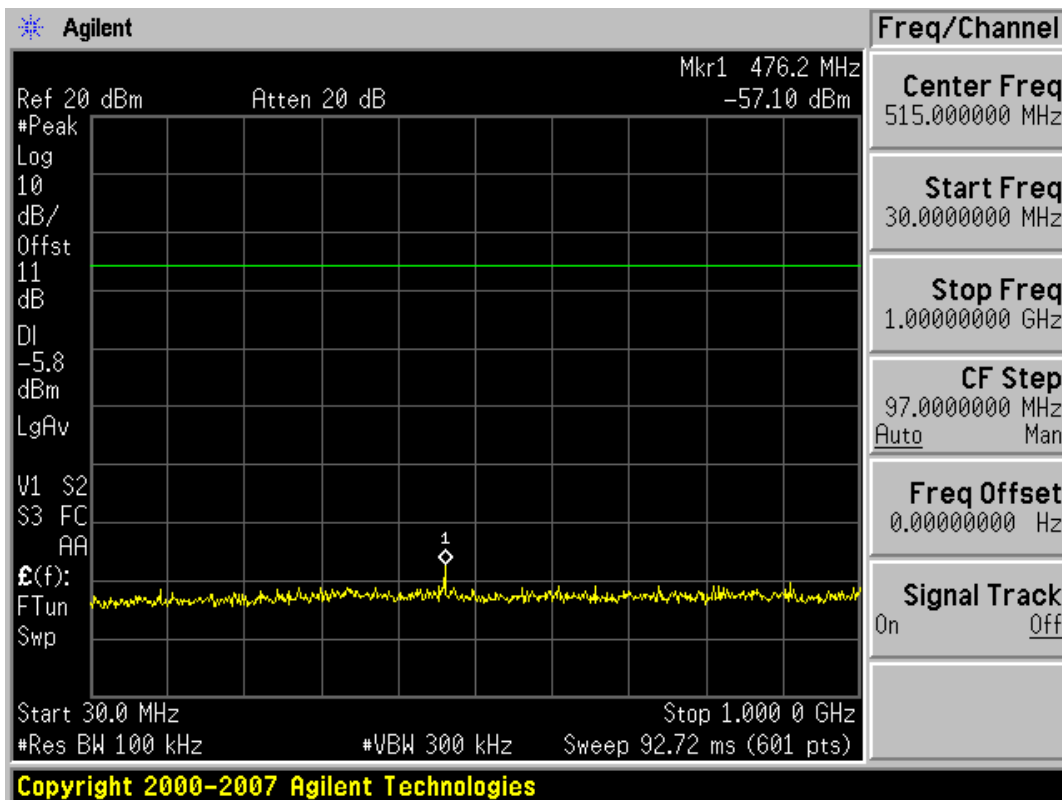


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11

### Conducted Spurious Emission (802.11b-CH11)

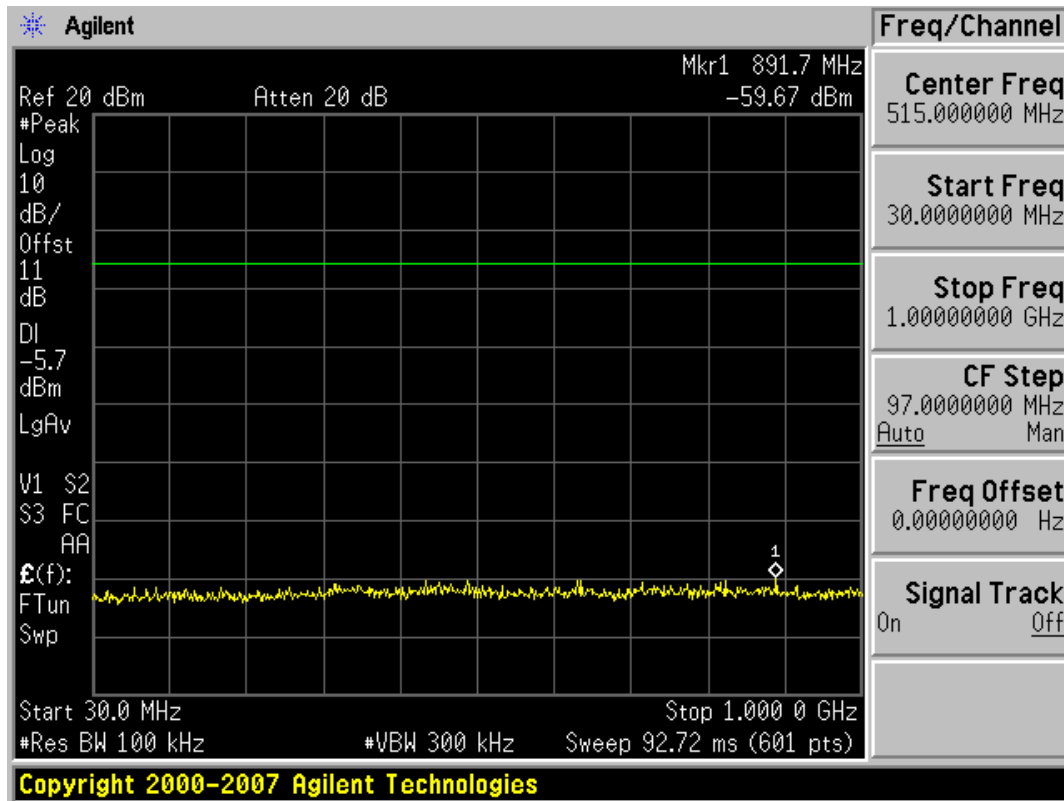


### Conducted Spurious Emission (802.11g-CH1)

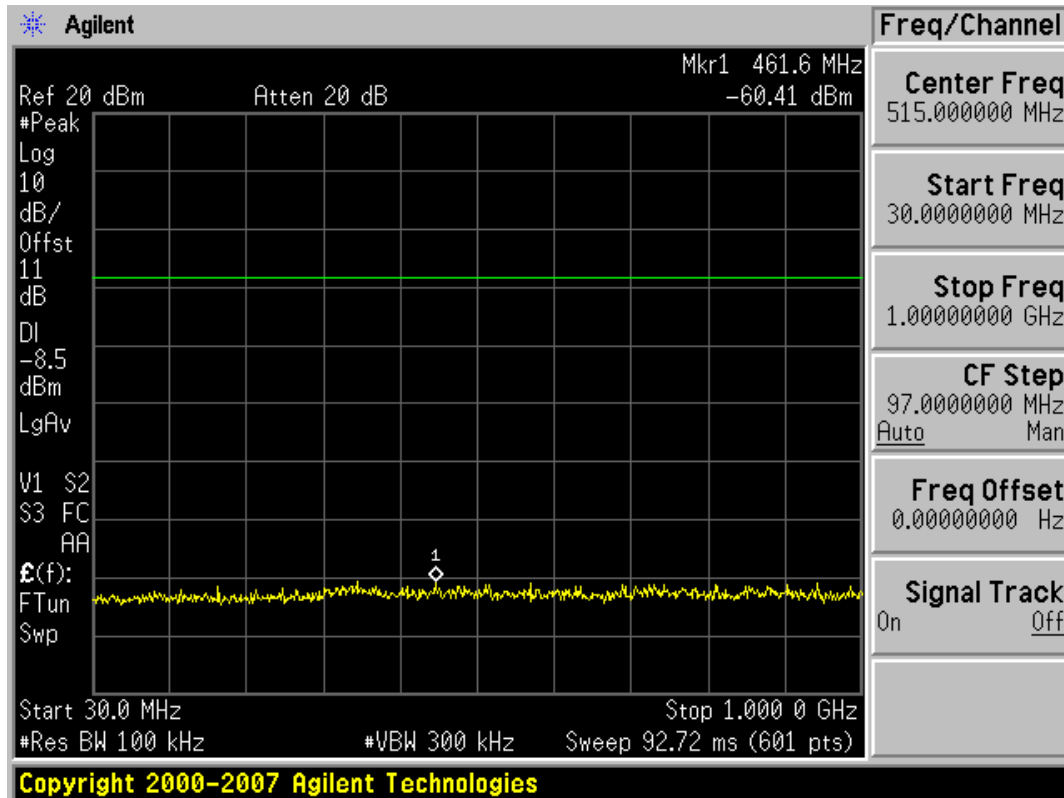


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11

### Conducted Spurious Emission (802.11g-CH6)

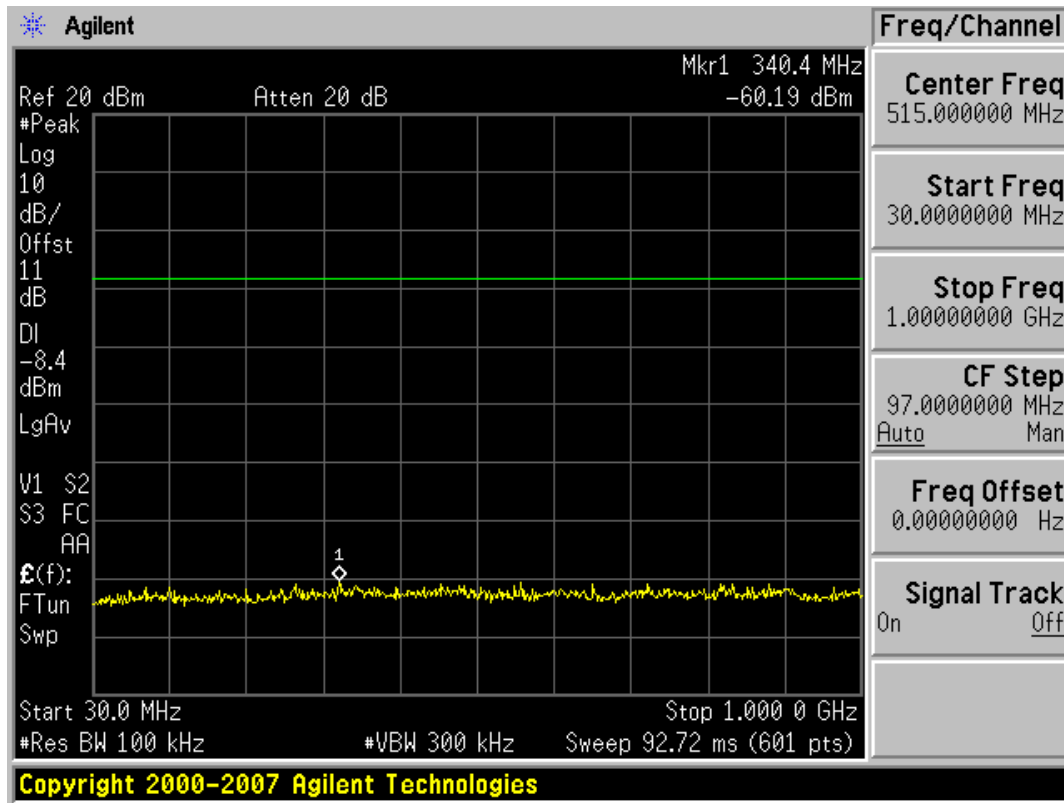


### Conducted Spurious Emission (802.11g-CH11)

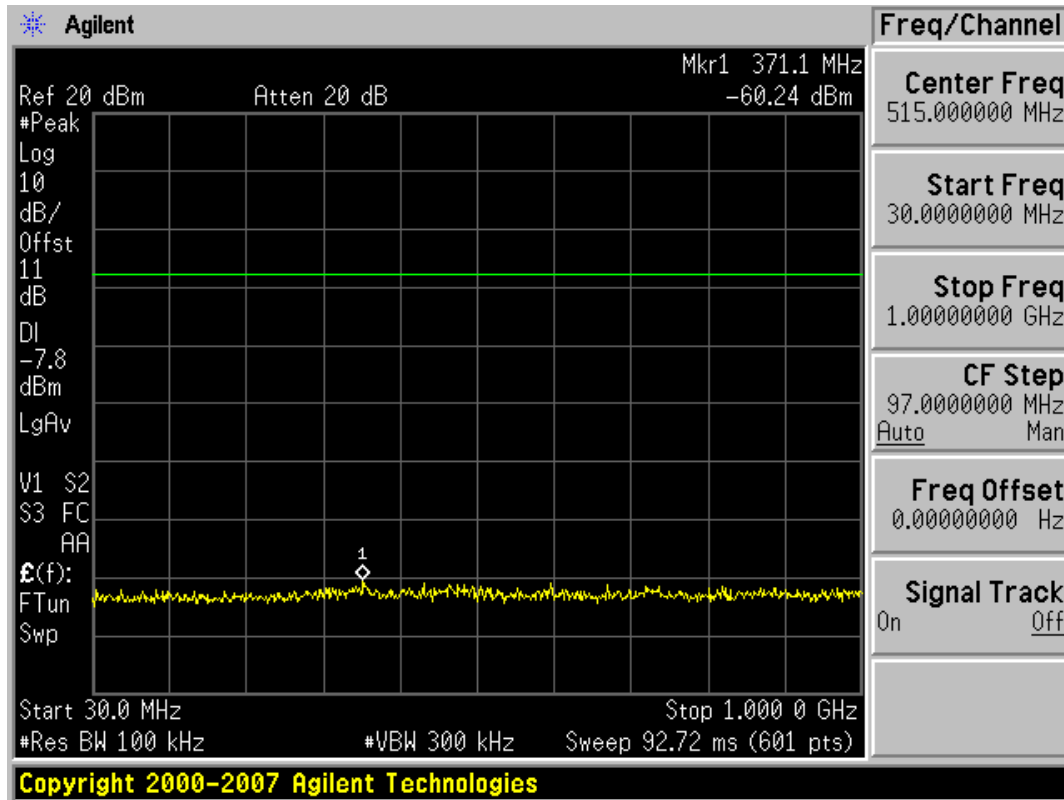


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1107FR20	Date of Issue: July 19, 2011	EUT Type: CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	FCC ID: JYCCDMAPT11


### Conducted Spurious Emission (802.11n-CH1)

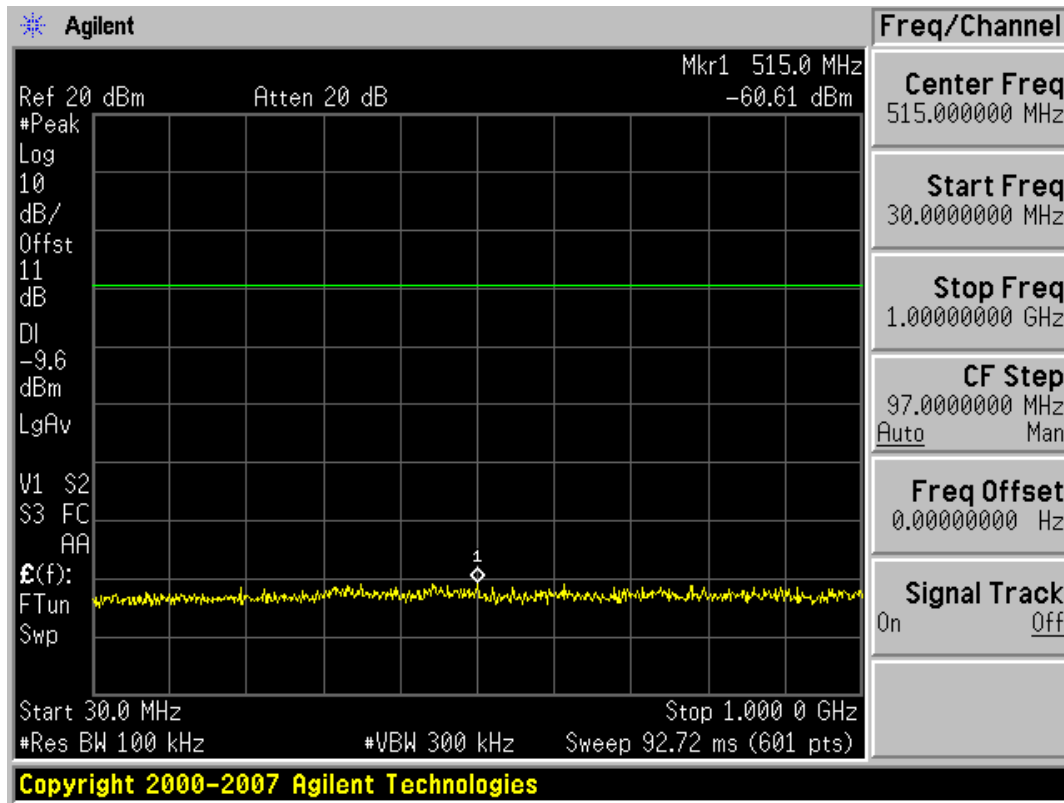

### Conducted Spurious Emission (802.11n-CH6)

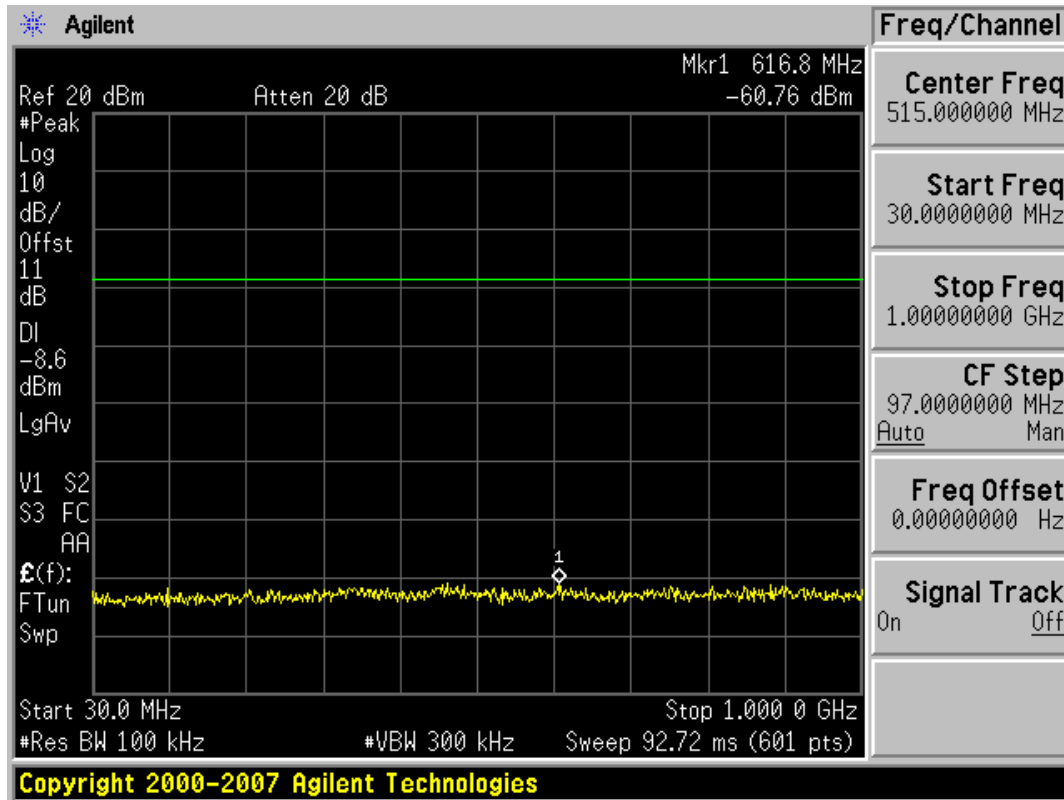


### Conducted Spurious Emission (802.11n-CH11)

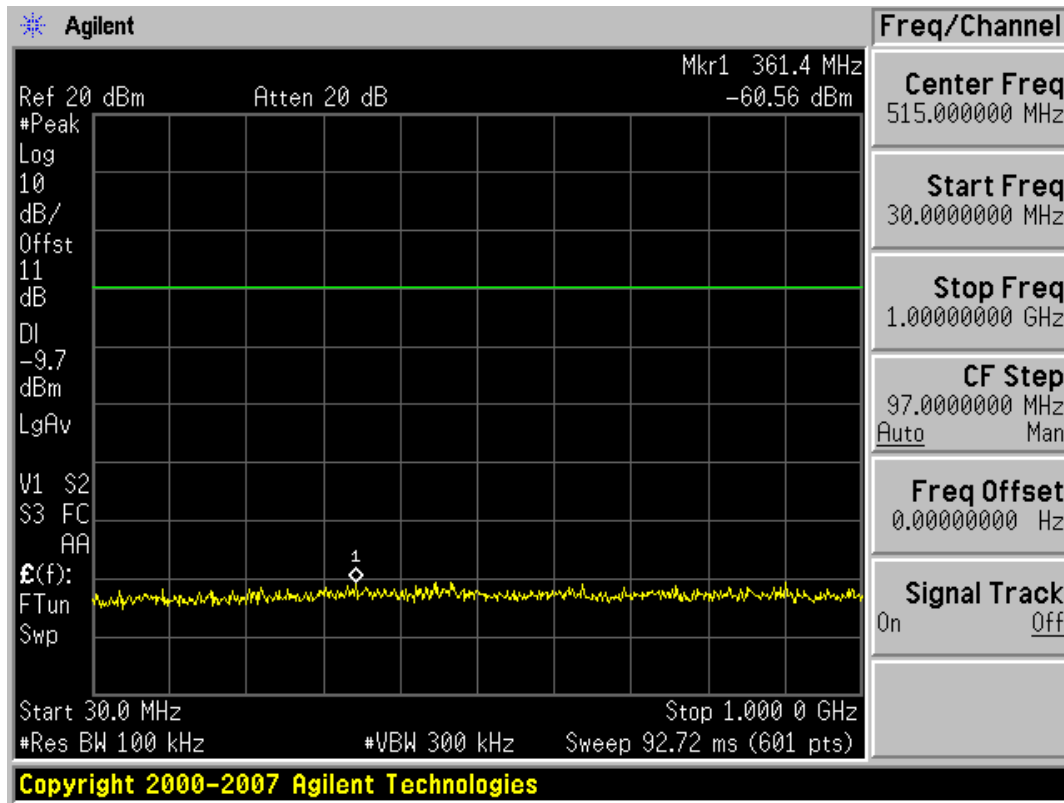


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

1 GHz ~ 26 GHz

**Conducted Spurious Emission (802.11b-CH1)**

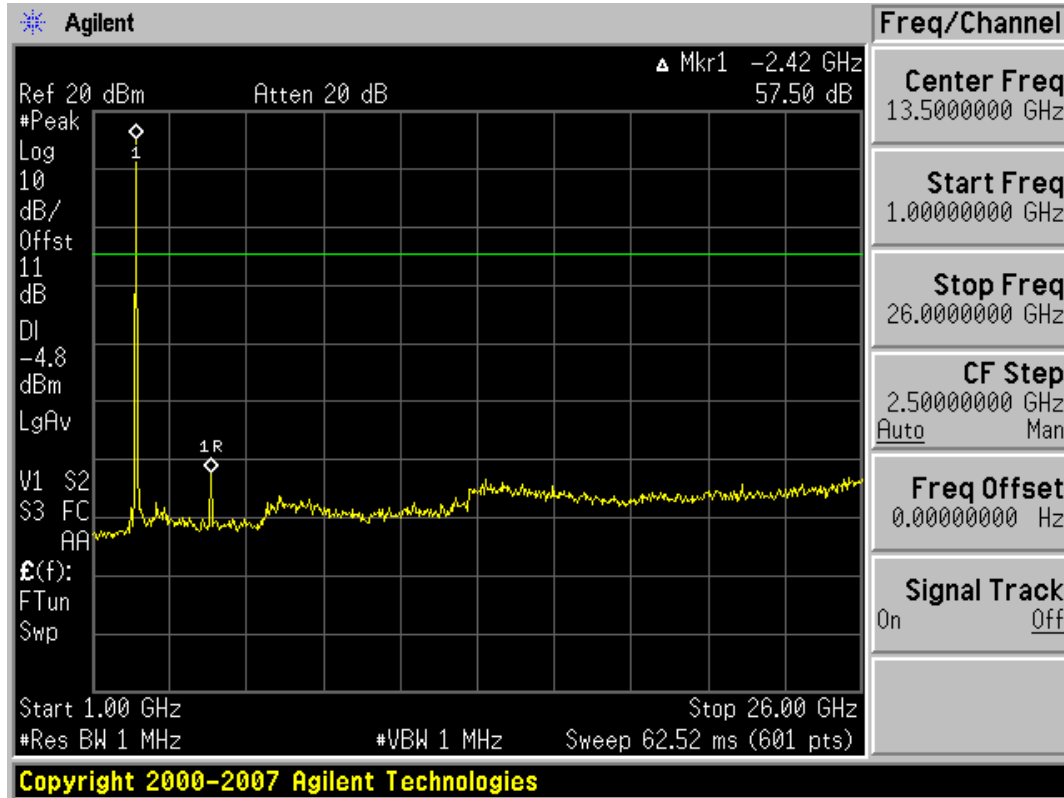


**Conducted Spurious Emission (802.11b-CH6)**

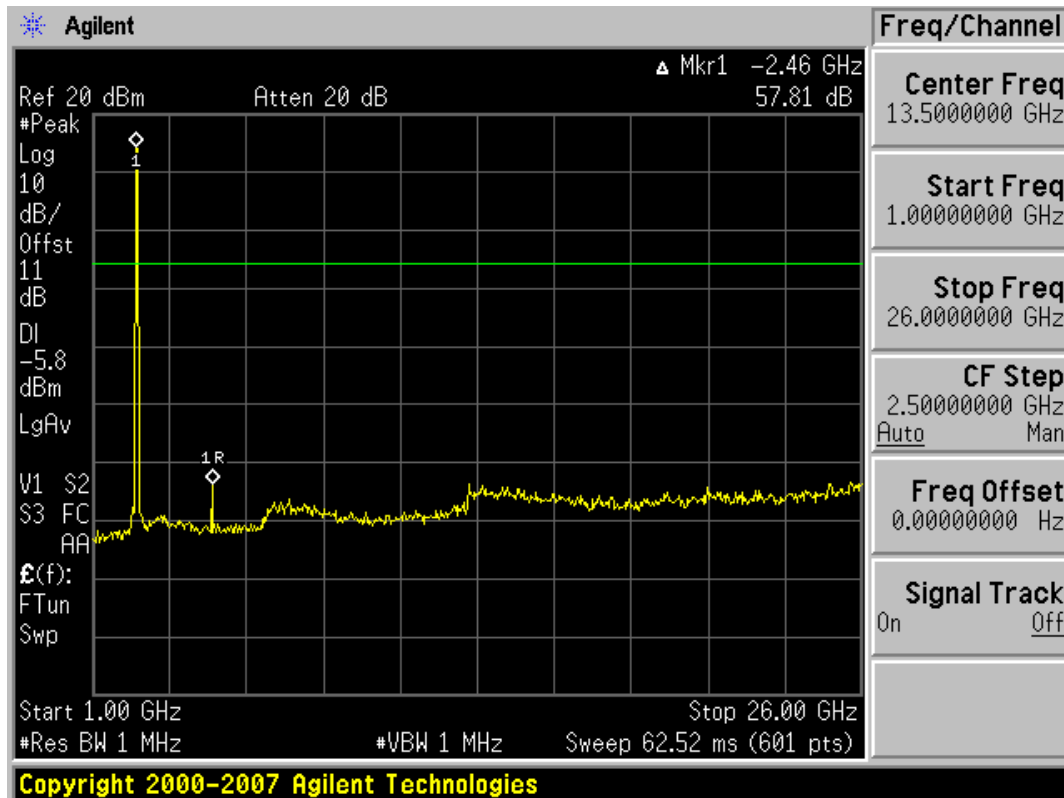





### Conducted Spurious Emission (802.11b-CH11)

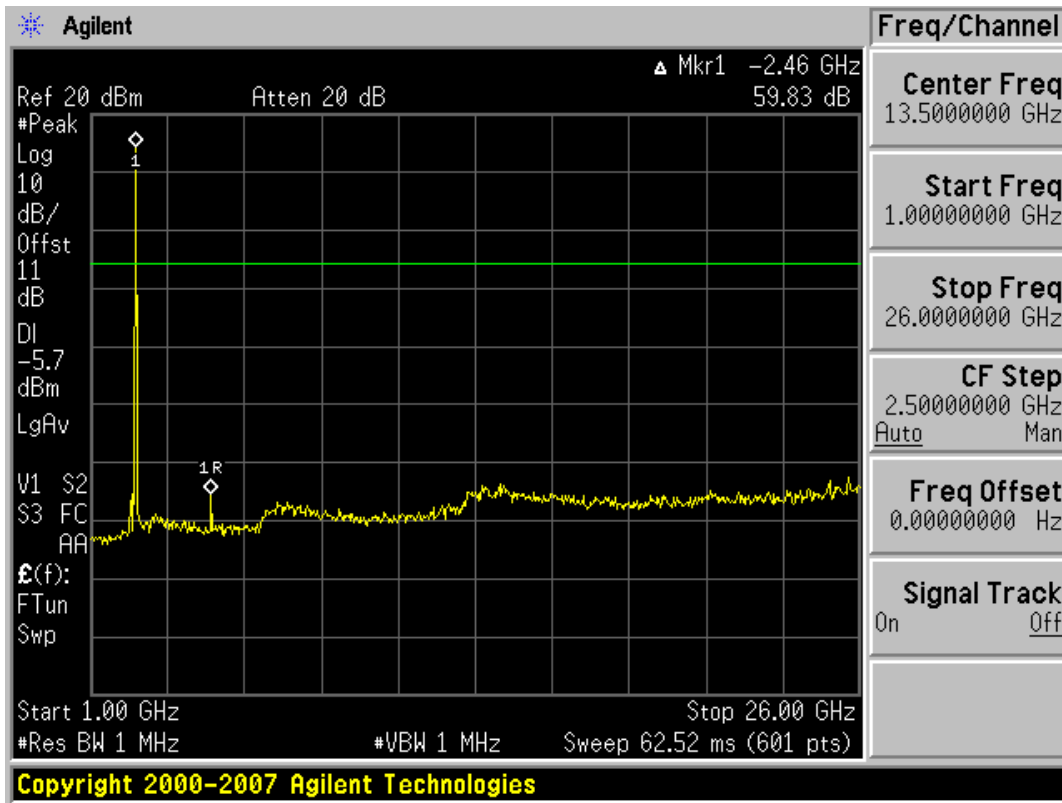


### Conducted Spurious Emission (802.11g-CH1)

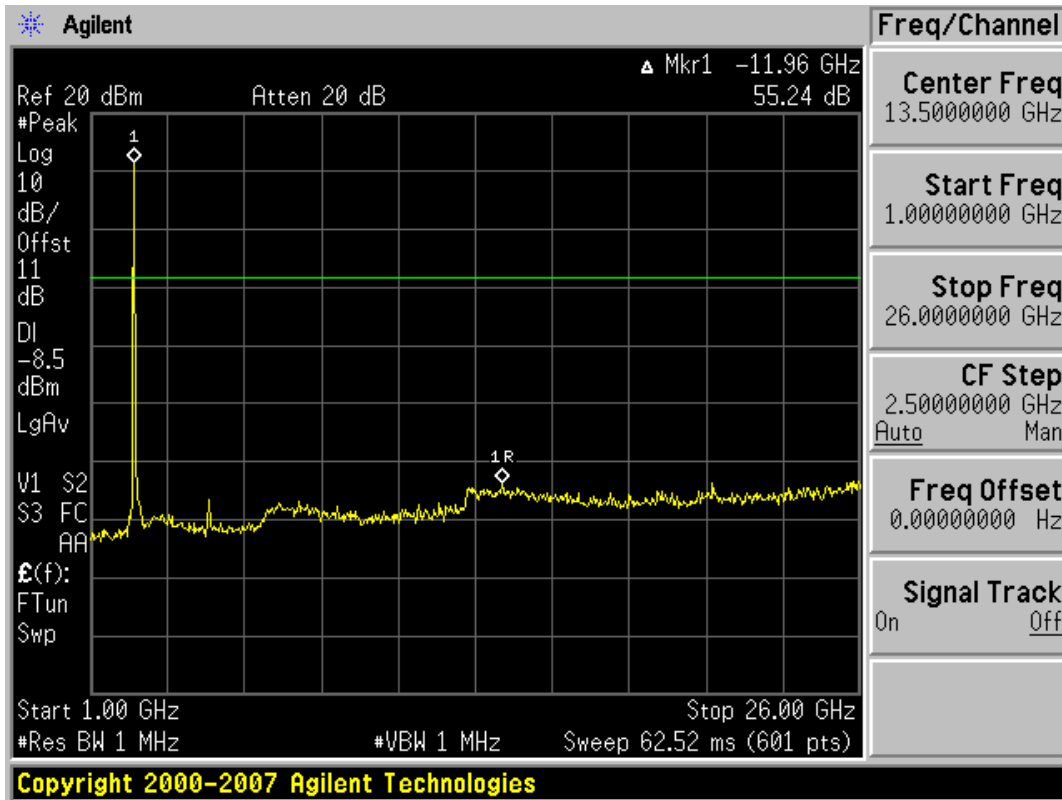


### Conducted Spurious Emission (802.11g-CH6)

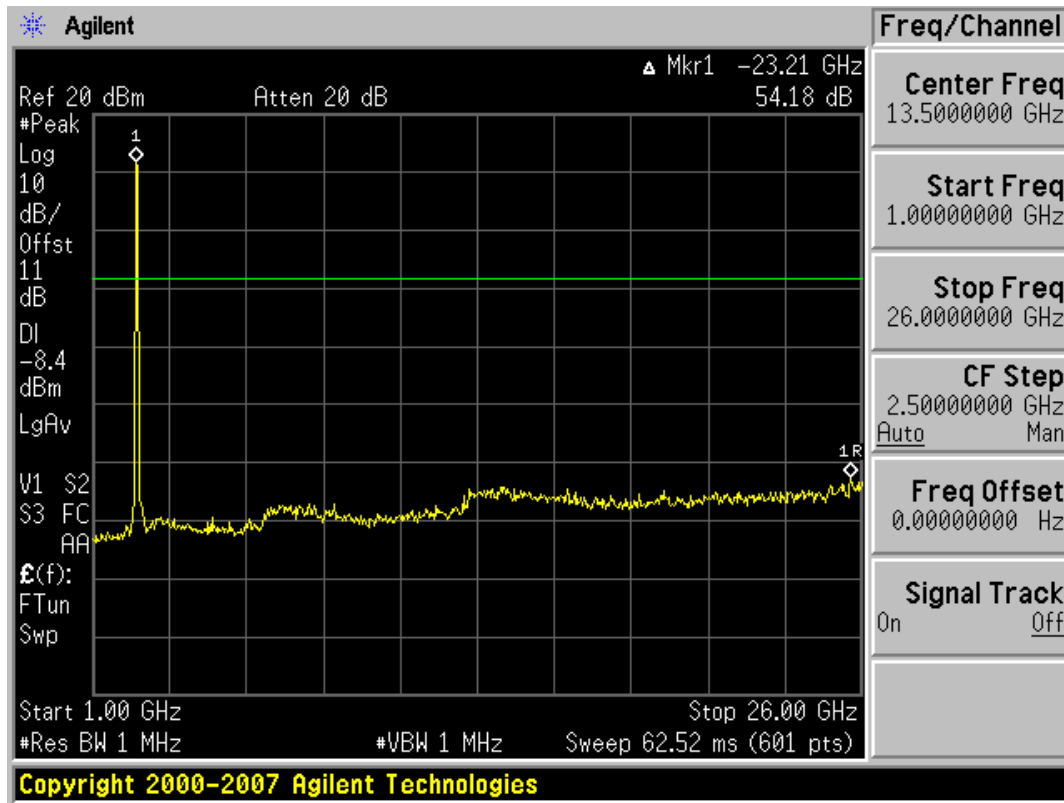


### Conducted Spurious Emission (802.11g-CH11)

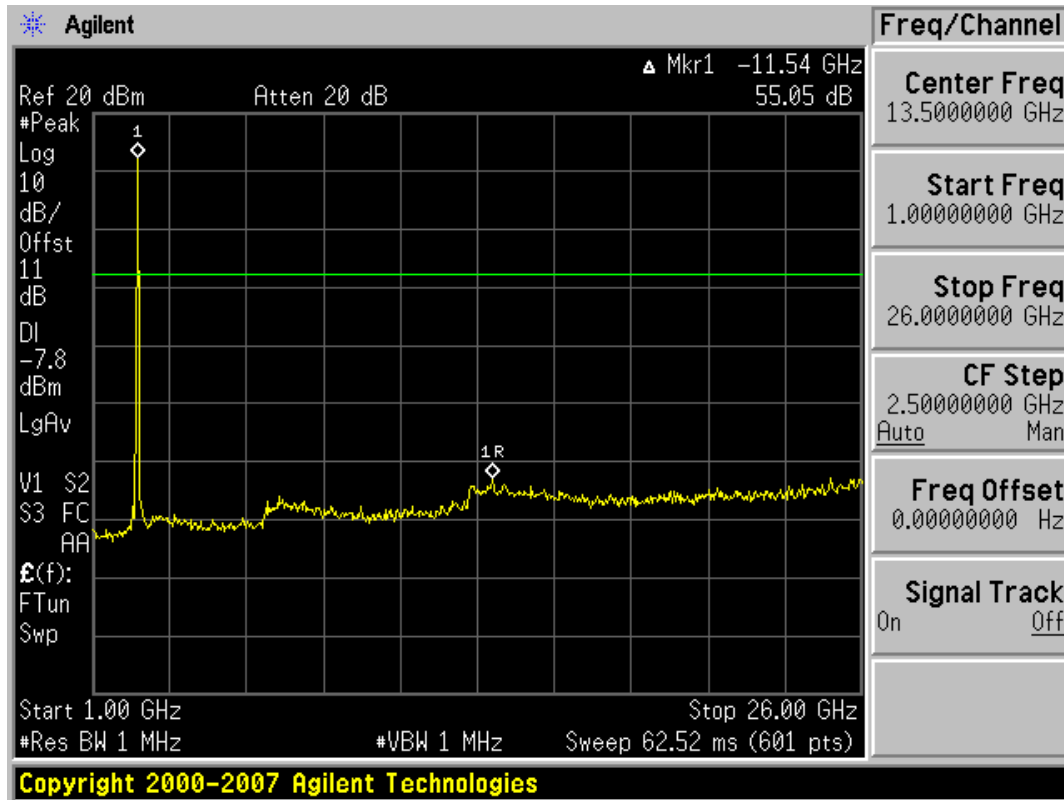


### Conducted Spurious Emission (802.11n-CH1)

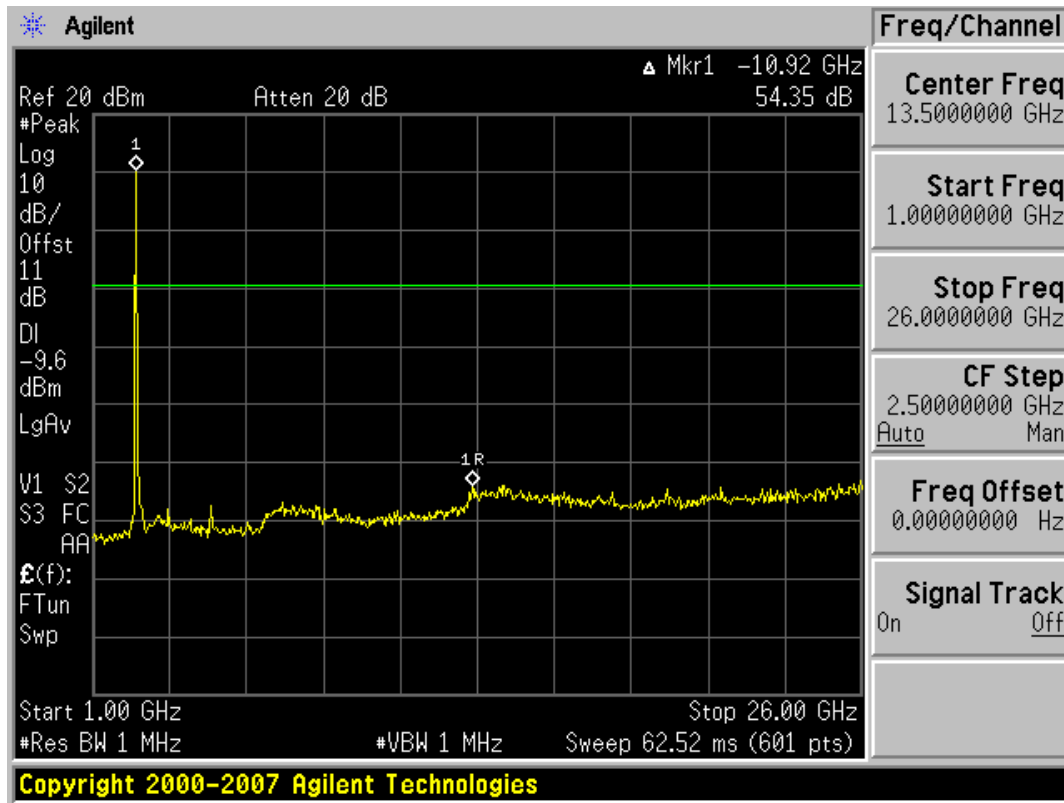

### Conducted Spurious Emission (802.11n-CH6)

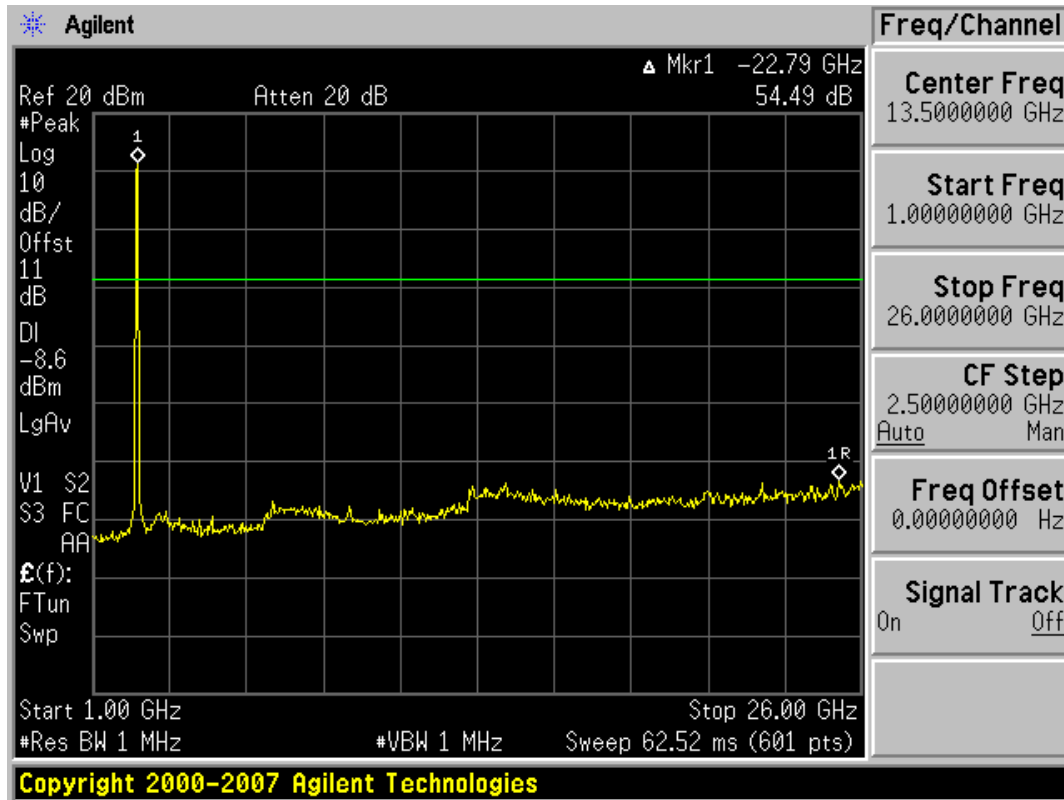

### Conducted Spurious Emission (802.11n-CH11)

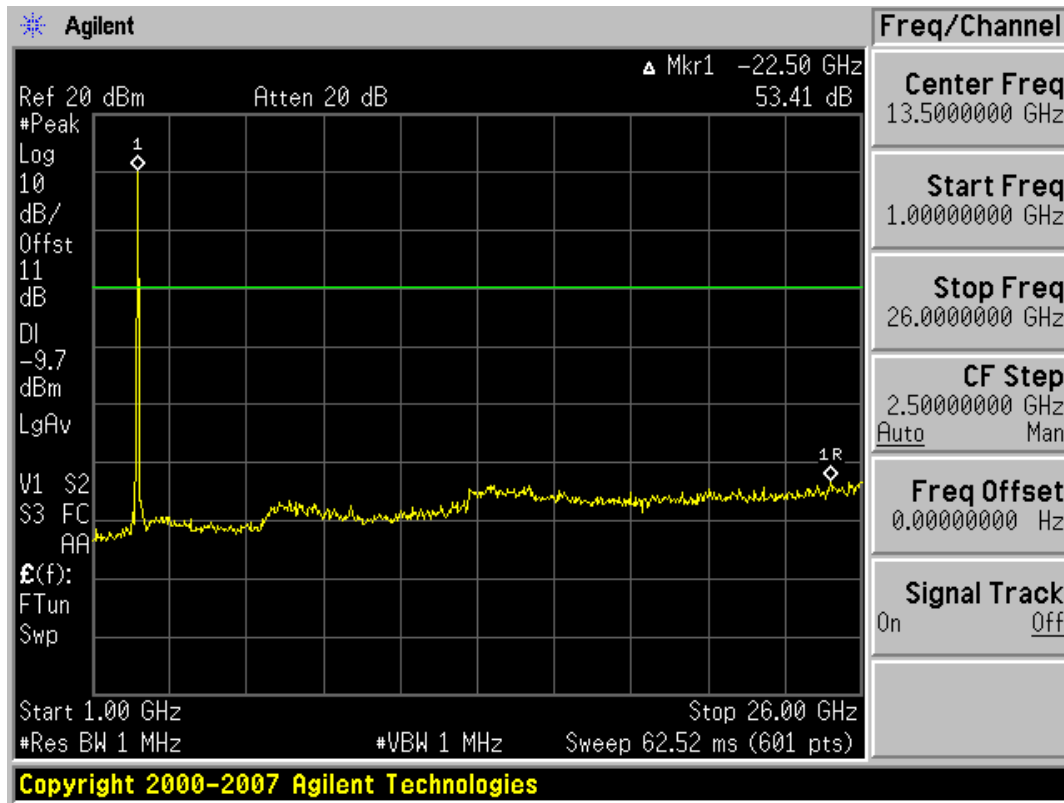

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11

**7.5 RADIATED MEASUREMENT.**


**7.5.1 RADIATED SPURIOUS EMISSIONS.**

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


**Below 30 MHz**

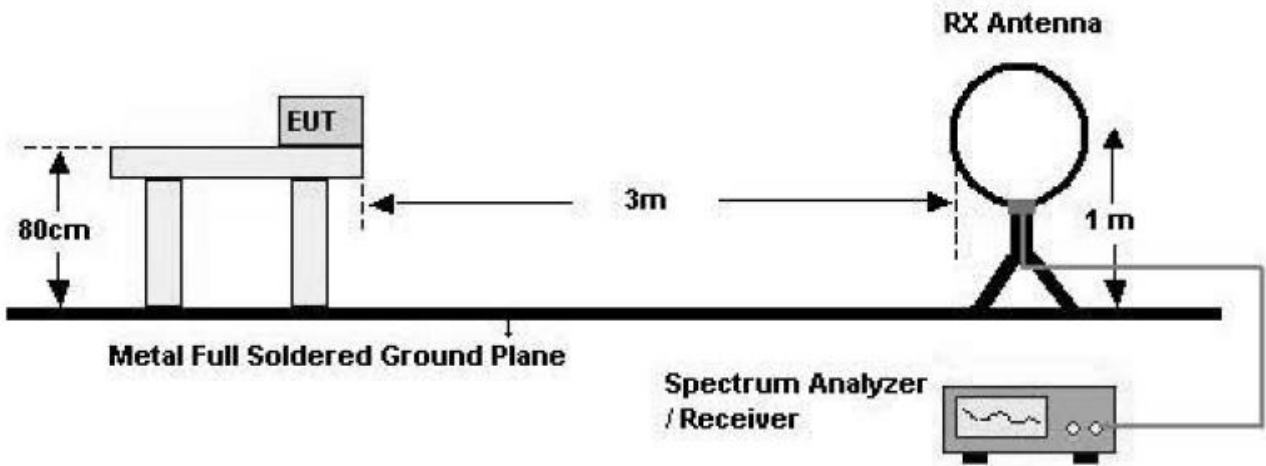

**30 MHz - 1 GHz**

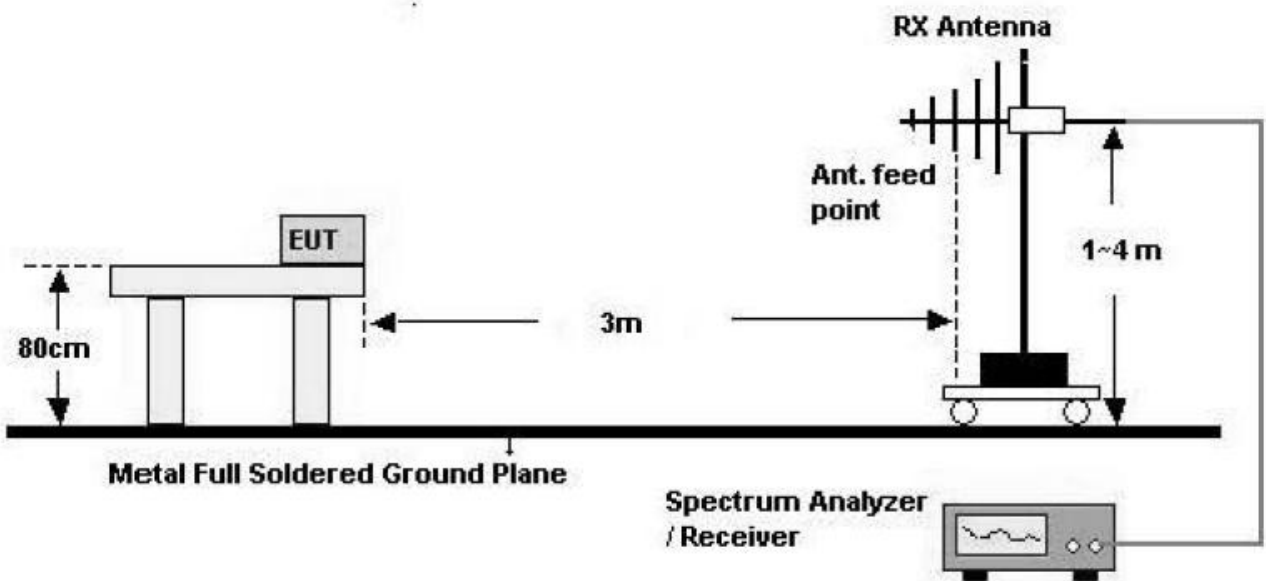

**Above 1 GHz**

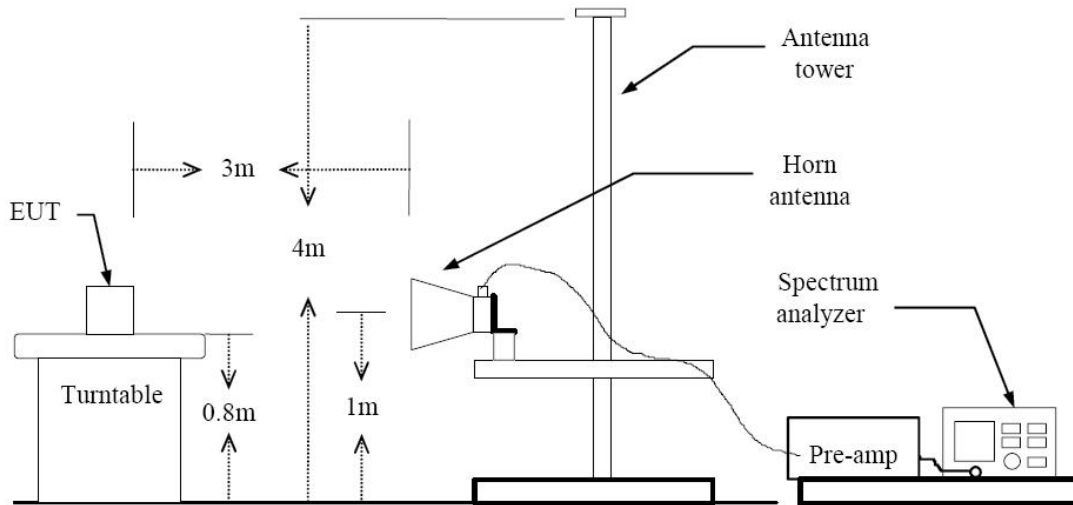

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

<b>FCC PT.15.247 TEST REPORT</b>		<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11	



**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN	<b>FCC ID:</b> JYCCDMAPT11



**TEST RESULTS**

**Below 1 GHz**

**Operation Mode:** 802.11b Mode (Channel : 1 , Data rate : 11 Mbps)

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
97.2	21.79	8.42	0.98	H	31.2	43.5	12.3
165.0	14.17	13.00	1.33	V	28.5	43.5	15.0
195.1	19.56	10.60	1.44	H	31.6	43.5	11.9
478.0	20.10	17.30	2.40	H	39.8	46.0	6.2
729.0	17.37	21.30	3.13	V	41.8	46.0	4.2
753.9	16.56	21.60	3.14	H	41.3	46.0	4.7

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done 802.11b Mode, 802.11g and 802.11n mode test. Worst case of EUT is 802.11b Mode.

### Above 1 GHz

Operation Mode:	802.11 b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	57.37	-3.81	V	53.56	74	20.44	PK
4824	47.50	-3.81	V	43.69	54	10.31	AV
7236	51.06	5.17	V	56.23	74	17.77	PK
7236	37.42	5.17	V	42.59	54	11.41	AV
4824	58.62	-3.81	H	54.81	74	19.19	PK
4824	50.39	-3.81	H	46.58	54	7.42	AV
7236	51.15	5.17	H	56.32	74	17.68	PK
7236	37.62	5.17	H	42.79	54	11.21	AV

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b, 802.11g and 802.11n test. Worst case of EUT is 1 Mbps in 802.11b.

Operation Mode: 802.11 b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	53.14	-3.72	V	49.42	74	24.58	PK
4874	39.81	-3.72	V	36.09	54	17.91	AV
7311	50.42	5.53	V	55.95	74	18.05	PK
7311	36.74	5.53	V	42.27	54	11.73	AV
4874	54.29	-3.72	H	50.57	74	23.43	PK
4874	40.88	-3.72	H	37.16	54	16.84	AV
7311	50.96	5.53	H	56.49	74	17.51	PK
7311	37.23	5.53	H	42.76	54	11.24	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b, 802.11g and 802.11n test. Worst case of EUT is 1 Mbps in 802.11b.

Operation Mode: 802.11 b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	53.83	-3.58	V	50.25	74	23.75	PK
4924	41.27	-3.58	V	37.69	54	16.31	AV
7386	50.38	6.15	V	56.53	74	17.47	PK
7386	36.59	6.15	V	42.74	54	11.26	AV
4924	54.74	-3.58	H	51.16	74	22.84	PK
4924	43.86	-3.58	H	40.28	54	13.72	AV
7386	50.90	6.15	H	57.05	74	16.95	PK
7386	36.70	6.15	H	42.85	54	11.15	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b, 802.11g and 802.11n test. Worst case of EUT is 1 Mbps in 802.11b.

## 7.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode: 802.11 g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	*Fund. Reading dBuV	※ A.F.+CL [dB]	Ant. Pol. [H/V]	*Fundamental [dBuV/m]	Delta Value [dBuV/m]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	75.04	33.25	H	108.29	39.04	69.25	74	4.75	PK
2390.0	47.80	33.25	H	81.05	39.04	42.01	54	11.99	AV
2390.0	70.43	33.25	V	103.68	39.61	64.07	74	9.93	PK
2390.0	44.48	33.25	V	77.73	39.61	38.12	54	15.88	AV
2483.5	76.00	33.73	H	109.73	38.80	70.93	74	3.07	PK
2483.5	48.68	33.73	H	82.41	38.80	43.61	54	10.39	AV
2483.5	71.89	33.73	V	105.62	37.86	67.76	74	6.24	PK
2483.5	44.97	33.73	V	78.70	37.86	40.84	54	13.16	AV

### Notes:

1. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
2. Radiated Restricted Band Edge measures by marker-delta method according to FCC guideline.
3. We have done 802.11b, 802.11g and 802.11n test. Worst case of EUT is 6 Mbps in 802.11g.

## 7.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ RESULT PLOTS

Conducted Emissions (Line 1)


HCT

EMC

EUT: CDMA PT111  
 Manufacturer: PANTECH  
 Operating Condition: WLAN MODE  
 Test Site: SHIELD ROOM  
 Operator: JS-LEE  
 Test Specification: FCC PART15 CLASS B  
 Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:	Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
FCC PART 15 CLASS B	150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
				Average			
	500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
				Average			
	5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
				Average			

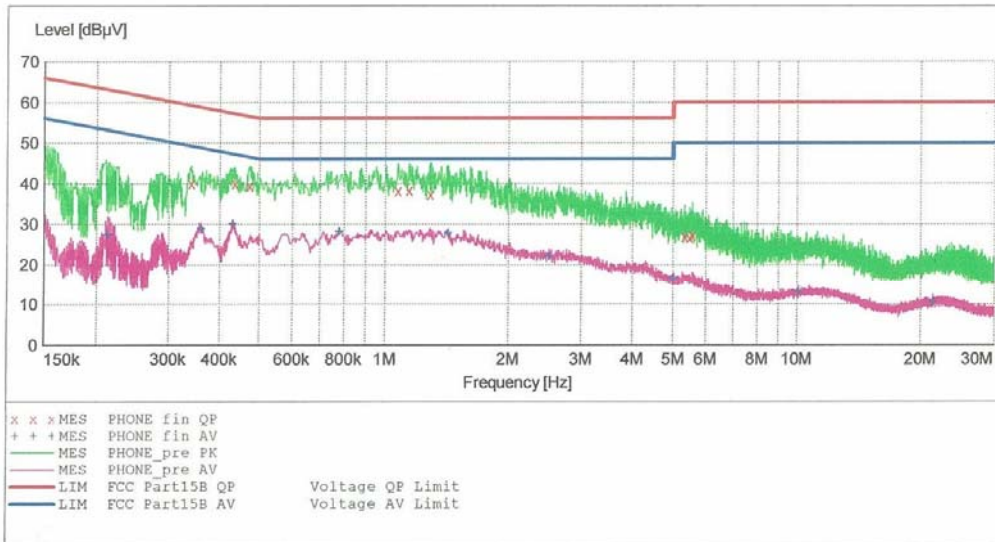

MEASUREMENT RESULT: "PHONE\_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.340010	40.00	10.1	59	19.2	---	---
0.435010	40.00	10.1	57	17.1	---	---
0.473010	39.40	10.1	57	17.1	---	---
1.076000	38.20	10.1	56	17.8	---	---
1.144000	38.30	10.1	56	17.7	---	---
1.292000	37.30	10.2	56	18.7	---	---
5.324000	26.90	10.6	60	33.1	---	---
5.500000	26.60	10.6	60	33.4	---	---
5.564000	27.10	10.6	60	32.9	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

7/12/2011 10:44AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.213010	27.40	10.1	53	25.7	---	---
0.360010	28.80	10.1	49	19.9	---	---
0.431010	30.00	10.1	47	17.2	---	---
0.780000	28.20	10.1	46	17.8	---	---
1.424000	27.70	10.2	46	18.3	---	---
2.520000	22.10	10.2	46	23.9	---	---
5.000000	16.30	10.5	46	29.7	---	---
10.112000	13.00	10.9	50	37.0	---	---
21.408000	10.50	11.9	50	39.5	---	---

<b>FCC PT.15.247 TEST REPORT</b>		<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN		<b>FCC ID:</b> JYCCDMAPT11



## Conducted Emissions (Line 2)


HCT

EMC

EUT: CDMA PTI11  
 Manufacturer: PANTECH  
 Operating Condition: WLAN MODE  
 Test Site: SHIELD ROOM  
 Operator: JS-LEE  
 Test Specification: FCC PART15 CLASS B  
 Comment: N

### SCAN TABLE: "FCC PART 15 B(N)"

Short Description:				FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

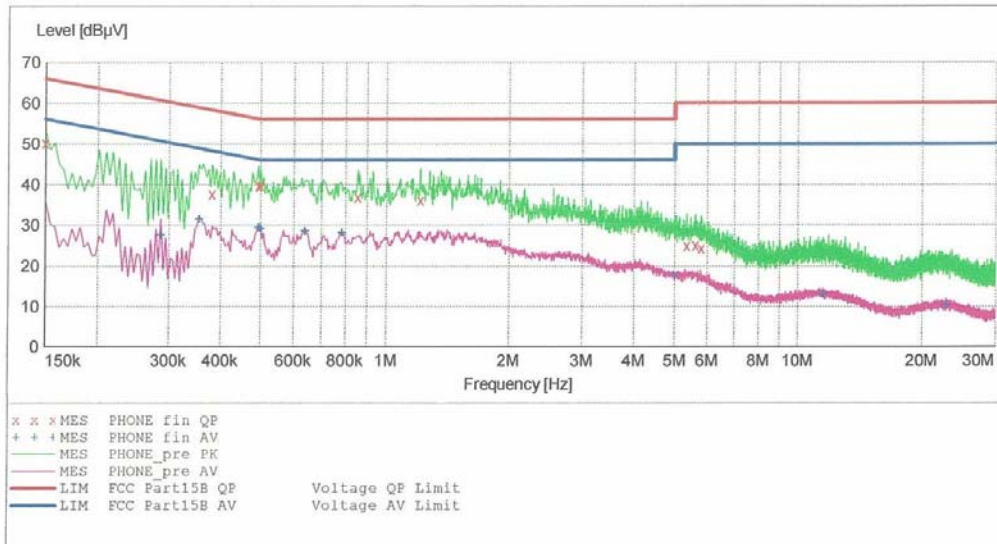

### MEASUREMENT RESULT: "PHONE\_fin\_QP"

7/12/2011 10:37AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150010	50.20	10.3	66	15.8	---	---
0.382010	37.70	10.3	58	20.6	---	---
0.494010	39.70	10.3	56	16.4	---	---
0.500000	39.90	10.3	56	16.1	---	---
0.856000	36.90	10.4	56	19.1	---	---
1.212000	36.10	10.4	56	19.9	---	---
5.348000	25.00	10.8	60	35.0	---	---
5.620000	25.10	10.8	60	34.9	---	---
5.812000	24.30	10.8	60	35.7	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

7/12/2011 10:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.286010	27.50	10.3	51	23.1	---	---
0.354010	31.50	10.3	49	17.3	---	---
0.494010	29.40	10.3	46	16.7	---	---
0.500000	29.20	10.3	46	16.8	---	---
0.640000	28.60	10.3	46	17.4	---	---
0.784000	28.20	10.4	46	17.8	---	---
5.000000	17.60	10.7	46	28.4	---	---
11.544000	13.00	11.1	50	37.0	---	---
22.844000	10.30	11.8	50	39.7	---	---

<b>FCC PT.15.247 TEST REPORT</b>		<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1107FR20	<b>Date of Issue:</b> July 19, 2011	<b>EUT Type:</b> CDMA/ GSM/ WCDMA Phone with Bluetooth & WLAN		<b>FCC ID:</b> JYCCDMAPT11

## 8. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/01/2012	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/25/2011	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/29/2011	10094
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	03/23/2012	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	01/04/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	12/29/2011	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/08/2011	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/04/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2011	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	04/01/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536