




# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
http://www.pctestlab.com



## HEARING AID COMPATIBILITY

**Applicant Name:**

Pantech Co Ltd  
Pantech Building, I-2, DMC  
Sangam-dong, Mapo-gu,  
Seoul, KOREA 121-792

**Date of Testing:**

February 16-21, 2012

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1202290266.JYC

**FCC ID:**

**JYCP8010**

**APPLICANT:**

**PANTECH CO LTD**

**Scope of Test:**

Audio Band Magnetic Testing (T-Coil)

**Application Type:**

Certification

**FCC Rule Part(s):**

CFR § 20.19(b)

**HAC Standard:**

ANSI C63.19-2007 §6.3(v), §7.3(v)

**EUT Type:**

Portable Handset

**Model(s):**

P8010

**Test Device Serial No.:**

*Pre-Production Sample* [S/N: 089H10284]

Band & Mode	Tx Frequency	C63.19-2007 HAC Category:
GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	<b>T3 (SIGNAL TO NOISE CATEGORY)</b>
WCDMA/HSPA 850	826.40 - 846.60 MHz	
GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	
WCDMA/HSPA 1900	1852.4 - 1907.6 MHz	
LTE Band 17	706.5 - 713.5 MHz	
LTE Band 5 (Cell)	826.5 - 846.5 MHz	
LTE Band 4 (AWS)	1712.5 - 1752.5 MHz	
LTE Band 2 (PCS)	1852.5 - 1907.5 MHz	
2.4 GHz WLAN	2412 - 2462 MHz	
5.8 GHz WLAN	5745 - 5825 MHz	
5.2 GHz WLAN	5180 - 5240 MHz	
5.3 GHz WLAN	5260 - 5320 MHz	
5.5 GHz WLAN	5500 - 5700 MHz	
Bluetooth	2402 - 2480 MHz	

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2007 and had been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President





<b>FCC ID:</b> «FCC_ID»		<b>HAC (T-COIL) TEST REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»		Page 1 of 39

# TABLE OF CONTENTS

---

1.	INTRODUCTION .....	3
2.	TEST SITE LOCATION .....	4
3.	EUT DESCRIPTION .....	5
4.	ANSI C63.19-2007 PERFORMANCE CATEGORIES .....	6
5.	METHOD OF MEASUREMENT .....	9
6.	FCC 3G MEASUREMENTS .....	19
7.	TEST SUMMARY .....	20
8.	MEASUREMENT UNCERTAINTY .....	25
9.	EQUIPMENT LIST .....	26
10.	CALIBRATION CERTIFICATES.....	27
11.	CONCLUSION.....	34
12.	REFERENCES .....	35
13.	TEST SETUP PHOTOGRAPHS .....	37

<b>FCC ID:</b> «FCC_ID»	 <small>ΠΙΣΤΟΠΟΙΗΜΕΝΟ ΚΑΙ ΕΚΔΟΣΗΜΟ ΚΕ.Κ.</small>	<b>HAC (T-COIL) TEST REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»	Page 2 of 39	

# 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

## Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- RF Magnetic-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

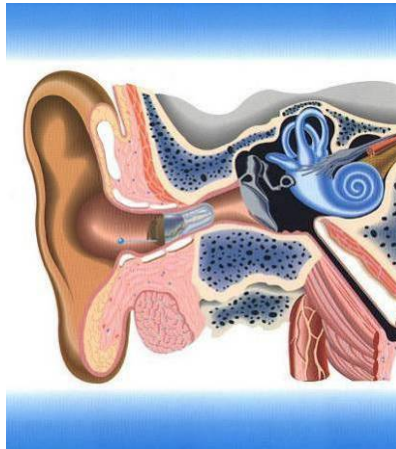




Figure 1-1 Hearing Aid *in-vitu*

<sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

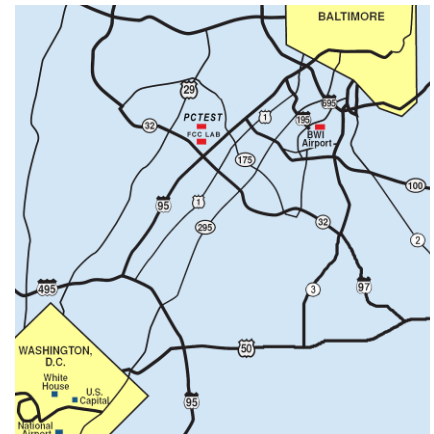
FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 3 of 39

## 2. TEST SITE LOCATION

### I. Introduction

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2-1).


These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles north of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.





**Figure 2-1**  
**Map of the Greater Baltimore and Metropolitan Washington, D.C. Area**

### II. Test Facility / Accreditations:

Measurements were performed at an independent accredited PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing-Aid Compatibility (HAC), CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS and CDMA, and EvDO mobile phones.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO Data, CDMA 1xRTT Data.

<b>FCC ID:</b> «FCC_ID»		<b>HAC (T-COIL) TEST REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»	Page 4 of 39	

### 3. EUT DESCRIPTION



FCC ID: JYCP8010  
 Applicant: Pantech Co Ltd  
 Pantech Building, I-2, DMC  
 Sangam-dong, Mapo-gu,  
 Seoul, KOREA 121-792

Model(s): P8010  
 Serial Number: 089H10284  
 Tx Frequencies: 824.20 - 848.80 MHz (GSM 850)  
 1850.20 - 1909.80 MHz (GSM 1900)  
 826.40 - 846.60 MHz (WCDMA850)  
 1852.4 - 1907.6 MHz (WCDMA1900)

HW Version: N/A  
 SW Version: JYUS02102012 REV\_01  
 Maximum Tested Conducted Power (HAC): 33.20 dBm (GSM 850), 29.60 dBm (GSM 1900),  
 22.99 dBm (WCDMA850), 23.45 dBm (WCDMA1900)  
 Antenna: Internal Antenna  
 HAC Test Configurations: GSM 850, 128, 190, 251, BT Off, WLAN Off, LTE Off  
 GSM 1900, 512, 661, 810, BT Off, WLAN Off, LTE Off  
 WCDMA850, 4132, 4183, 4233, BT Off, WLAN Off, LTE Off  
 WCDMA1900, 9262, 9400, 9538, BT Off, WLAN Off, LTE Off

EUT Type: Portable Handset

Air-Interface	Band (MHz)	Type	C63.19-2007 tested	Simultaneous Transmissions Scenarios in voice modes (Not to be tested)	Reduced power 20.19 (c)(1)	VOIP
GSM	850	Voice	Yes	Yes: WIFI or BT	NA	NA
	1900	Voice	Yes	Yes: WIFI or BT	NA	NA
	GPRS/EDGE	Data	NA	NA	NA	Yes
WCDMA	835	Voice	Yes	Yes: WIFI or BT	NA	NA
	1900	Voice				
	HSPA	Data	NA	NA	NA	Yes
LTE	700	Data	NA	Yes: WIFI or BT	NA	Yes
	850					
	1700					
	1900					
WIFI	2450	Data	NA	Yes: GSM or WCDMA or LTE	NA	Yes
	5200					
	5300					
	5500					
	5800					
BT	2450	Data	NA	Yes: GSM or WCDMA or LTE	NA	NA

NOTE: HAC Rating was not based on concurrent voice and data modes. Standalone mode was found to represent worst case rating for both M and T rating.

**Table 3: JYCP8010 Air Interfaces**

FCC ID: «FCC_ID»	PCTEST	HAC (T-COIL) TEST REPORT	PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 5 of 39

## 4. ANSI C63.19-2007 PERFORMANCE CATEGORIES



### I. RF EMISSIONS

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

Category	Telephone RF Parameters	
Near field Category	E-field emissions CW dB(V/m)	H-field emissions CW dB(A/m)
<b>f &lt; 960 MHz</b>		
<b>M1</b>	56 to 61 + 0.5 x AWF	5.6 to 10.6 +0.5 x AWF
<b>M2</b>	51 to 56 + 0.5 x AWF	0.6 to 5.6 +0.5 x AWF
<b>M3</b>	46 to 51 + 0.5 x AWF	-4.4 to 0.6 +0.5 x AWF
<b>M4</b>	< 46 + 0.5 x AWF	< -4.4 + 0.5 x AWF
<b>f &gt; 960 MHz</b>		
<b>M1</b>	46 to 51 + 0.5 x AWF	-4.4 to 0.6 +0.5 x AWF
<b>M2</b>	41 to 46 + 0.5 x AWF	-9.4 to -4.4 +0.5 x AWF
<b>M3</b>	36 to 41 + 0.5 x AWF	-14.4 to -9.4 +0.5 x AWF
<b>M4</b>	< 36 + 0.5 x AWF	< -14.4 + 0.5 x AWF
<b>Table 4-1</b> <b>Hearing aid and WD near-field categories</b> <b>as defined in ANSI C63.19-2007 [2]</b>		

### II. ARTICULATION WEIGHTING FACTOR (AWF)

Standard	Technology	Articulation Weighing Factor (AWF)
T1/T1P1/3GPP	UMTS (WCDMA)	0
TIA/EIA/IS-2000	CDMA	0
iDEN™	TDMA (22 and 11 Hz)	0
J-STD-007	GSM (217 Hz)	-5
<b>Table 4-2</b> <b>Articulation Weighting Factors</b>		

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 6 of 39	

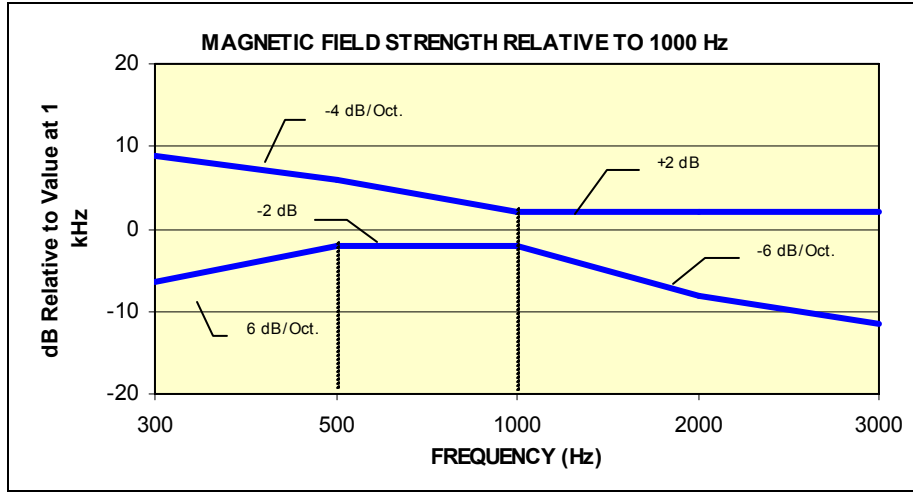
### III. MAGNETIC COUPLING

#### Axial and Radial Field Intensity

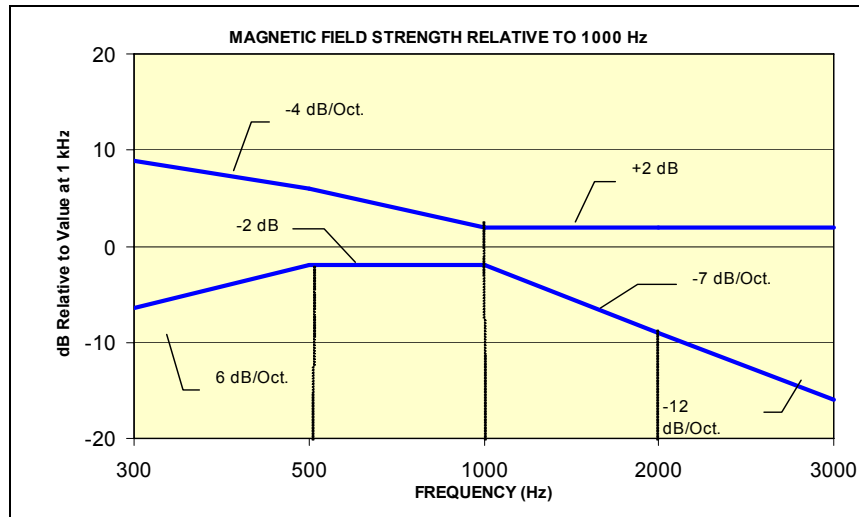
All orientations of the magnetic field, in the axial, horizontal and vertical position along the measurement plane shall be  $\geq -18$  dB(A/m) at 1 kHz in a 1/3 octave band filter per 7.3.1.

#### Frequency Response



The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per 7.3.2.



**Figure 4-1**  
Magnetic field frequency response for Wireless Devices with an axial field  $\leq -15$  dB (A/m) at 1 kHz



**Figure 4-2**  
Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 7 of 39



## Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters
	Wireless Device Signal Quality (Signal + Noise-to-noise ratio in dB)
T1	0 to 10 dB
T2	10 to 20 dB
T3	20 to 30 dB
T4	> 30 dB

Table 4-3  
Magnetic Coupling Parameters

FCC ID: «FCC_ID»	 PCTEST	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 8 of 39



## 5. METHOD OF MEASUREMENT

### I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

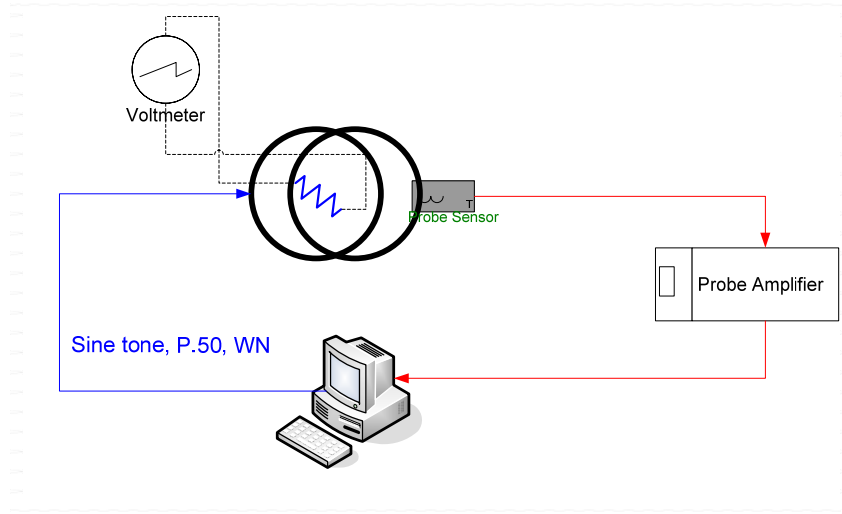


Figure 5-1 Validation Setup with Helmholtz Coil

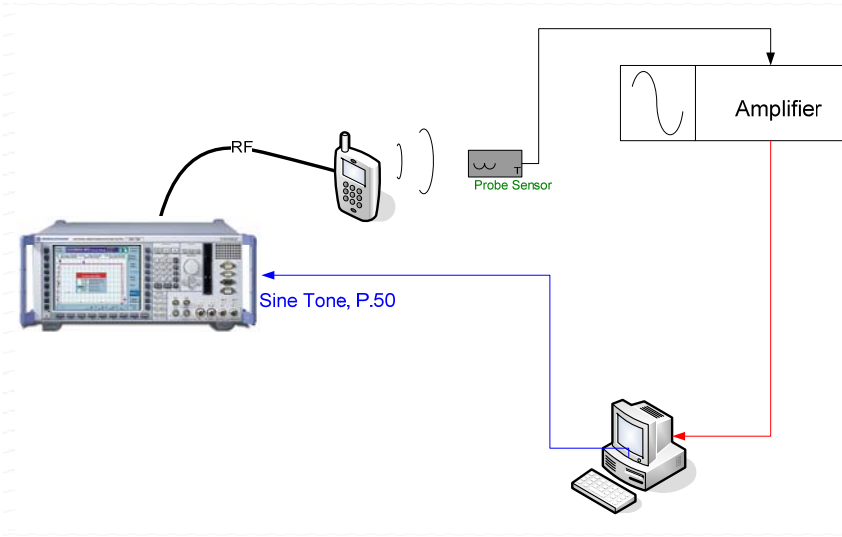


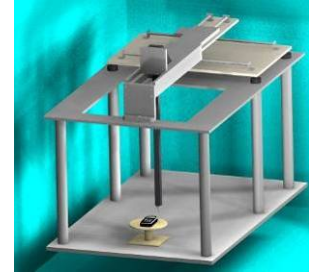


Figure 5-2 T-Coil Test Setup

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 9 of 39

## II. Scanning Mechanism

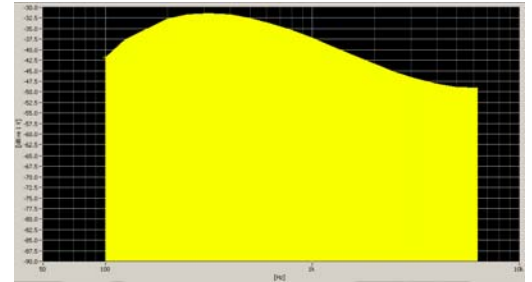
Manufacturer: TEM  
 Accuracy:  $\pm 0.83$  cm/meter  
 Minimum Step Size: 0.1 mm  
 Maximum speed: 6.1 cm/sec  
 Line Voltage: 115 VAC  
 Line Frequency: 60 Hz  
 Material Composite: Delrin (Acetal)  
 Data Control: Parallel Port  
 Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm  
 Dimensions: 36" x 25" x 38"  
 Operating Area: 36" x 49" x 55"  
 Reflections: < -20 dB (in anechoic chamber)



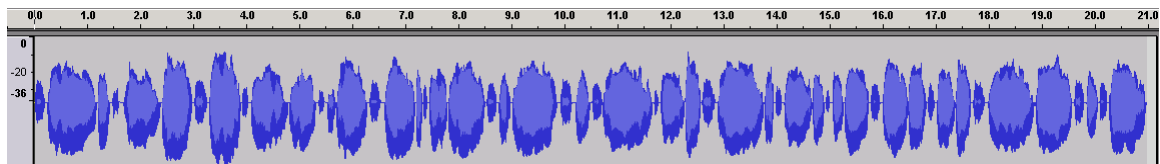
**Figure 5-3**  
RF Near-Field Scanner

## III. ITU-T P.50 Artificial Voice



Manufacturer: ITU-T  
 Active Frequency Range: 100 Hz – 8 kHz  
 Stimulus Type: Male and Female, no spaces  
 Single Sample Duration: 20.96 seconds  
 Activity Level: 100%



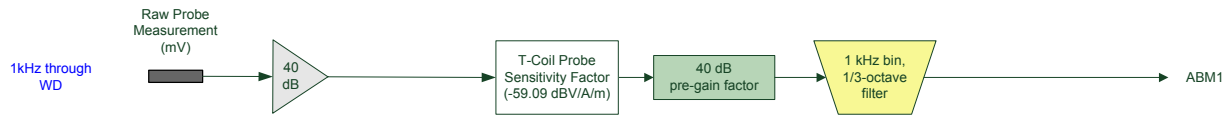
**Figure 5-4**  
Spectral Characteristic of full P.50




**Figure 5-5**  
Temporal Characteristic of full P.50

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 10 of 39

ABM1 Measurement Block Diagram:



ABM2 Measurement Block Diagram:



**Figure 5-6 Magnetic Measurement Processing Steps**

## IV. Test Procedure

1. Ambient Noise Check per C63.19 §6.2.1
  - a. Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
  - b. “A-weighting” and Half-Band Integration was applied to the measurements.
  - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be less than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:  

$$-18 - 30 - 10 = -58 \text{ dBA/m}$$
2. Measurement System Validation (See Figure 5-1)
  - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
  - b. ABM1 Validation  
 The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.9.1):



$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N\left(\frac{V}{R}\right)}{r\sqrt{1.25^3}}$$

Where  $H_c$  = magnetic field strength in amperes per meter  
 N = number of turns per coil

For the Helmholtz Coil,  $N=20$ ;  $r=0.08\text{m}$ ;  $R=10.193\Omega$  and using  $V=57\text{mV}$ :

$$H_c = \frac{20 \cdot \left(\frac{0.057}{10.193}\right)}{0.08 \cdot \sqrt{1.25^3}} = 1.0003 \text{ A/m}$$

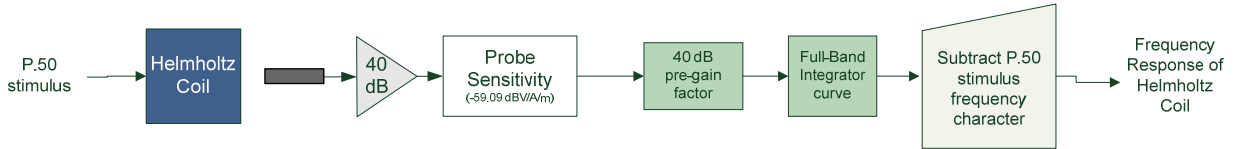
Therefore a pure tone of 1kHz was applied into the coils such that 57 mV was observed across the 10 Ω resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of 1 A/m in the center of the Helmholtz coil which was used to validate the probe

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 11 of 39

measurement at 1 A/m. This was verified to be within  $\pm 0.5$  dB of the 1 A/m value (see Page 21).

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1 kHz, between 300 – 3000 Hz using the ITU-P.50 artificial speech signal as shown below:



**Figure 5-7 Frequency Response Validation**

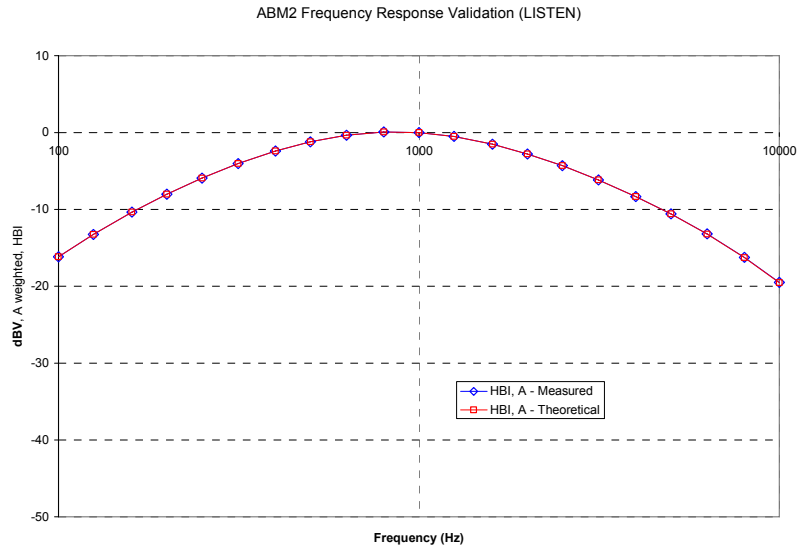
d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

**Table 5-1  
ABM2 Frequency Response Validation**

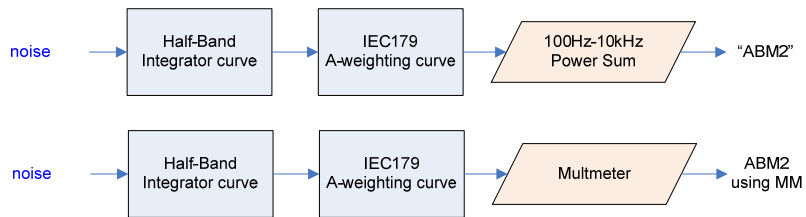
f (Hz)	HBI, A - Measured (dB re 1kHz)	HBI, A - Theoretical (dB re 1kHz)	dB Var.
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: «FCC_ID»	PCTEST	HAC (T-COIL) TEST REPORT	PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 12 of 39



**Figure 5-8**  
**ABM2 Frequency Response Validation**

The ABM2 result is a power sum from 100 Hz to 10 kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 5-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



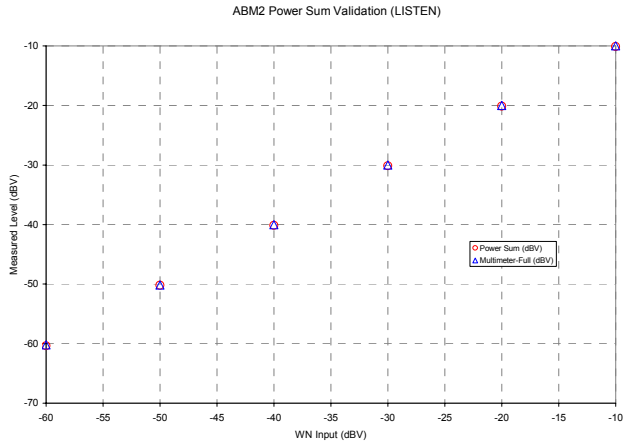
**Figure 5-9**  
**ABM2 Validation Block Diagram**

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

**Table 5-2**  
**ABM2 Power Sum Validation**

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 13 of 39

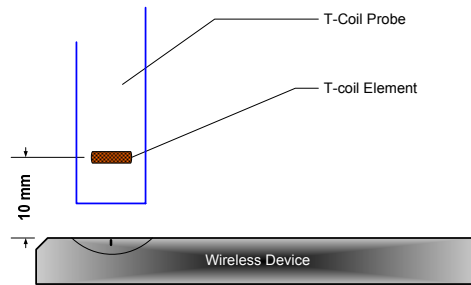


**Figure 5-10  
ABM2 Power Sum Validation**

3. Measurement Test Setup

a. Fine scan above the WD (TEM)

- i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below:





**Figure 5-11  
Measurement Distance**

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the sound check system.
- iii. These steps were repeated for the other T-coil orientations (of axial, radial transverse, or radial longitudinal) per Figure 5-16 after a T-coil orientation was fully measured with the sound check system.

b. Speech Signal Setup to Base Station Simulator

- i. C63.19 Table 6-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN™	TDMA (22 and 11 Hz)	-18

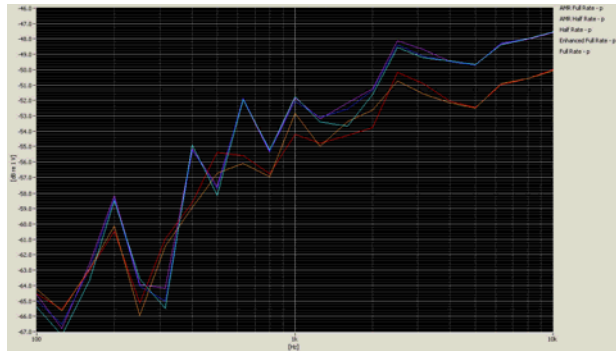
FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 14 of 39

The CMU200 audio levels were determined using base station simulator manufacturer calibration procedures resulting in the below corresponding voltages relative to handset test point level (in dBm0):

**Table 5-3  
CMU200 Voltage Input Levels for Audio**



dBm0 Ref.	Voltage		Notes
3.14 dBm0	990.5 mV	-0.08 dBV	From GSM "DECODER CAL". (What is needed through Encoder for FS)
-16 dBm0	109.4 mV	-19.2 dBV	For Speechcod/Handset Low
dBm0 Ref.	Voltage		Notes
3.14 dBm0	1068.5 mV	0.58 dBV	From UMTS "DECODER CAL". (What is needed through Encoder for FS)
-16 dBm0	118.0 mV	-18.6 dBV	For Handset Low

- c. Real-Time Analyzer (RTA)
  - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
  - i. The device was chosen to be tested in the worst-case ABM2 condition under EFR (GSM); AMR 12.2 kbps (WCDMA); (see below):

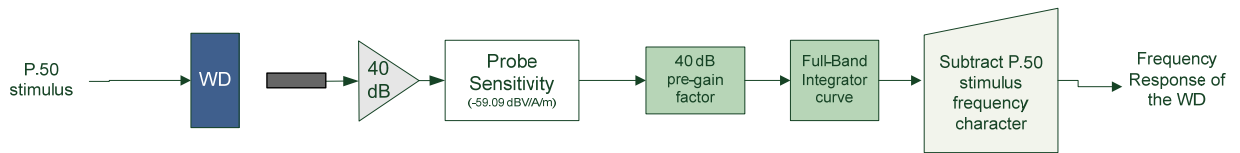


**Figure 5-12  
Vocoder Analysis for ABM Noise**

- 4. Signal Quality Data Analysis
  - a. Narrow-band Magnetic Intensity
    - i. The standard specifies a 1 kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
  - b. Frequency Response
    - i. The appropriate frequency response curve was measured to curves in Figure 4-1 or Figure 4-2 between 300 – 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a.) A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 15 of 39	

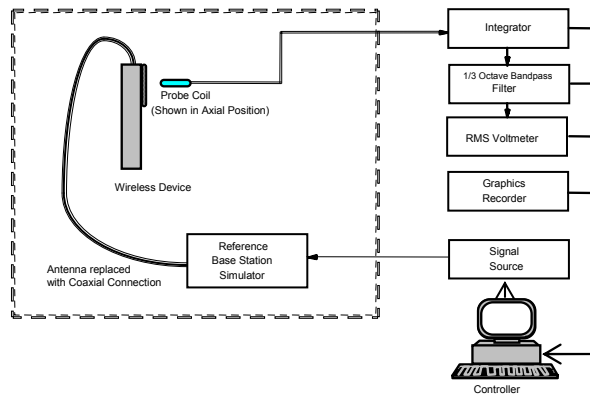
- ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 5-13. All R10 frequencies were plotted with respect to 0dB at 1 kHz value and aligned with respect to the EIA-504 mask.



**Figure 5-13 Frequency Response Block Diagram**

- iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
- c. Signal Quality Index
- i. Ensuring the WD was at maximum RF power, maximum volume, backlight on, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz – 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.)
  - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value
  - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.



## V. Test Setup



**Figure 5-14 Audio Magnetic Field Test Setup**

## VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection.

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 16 of 39



## VII. Wireless Device Channels and Frequencies

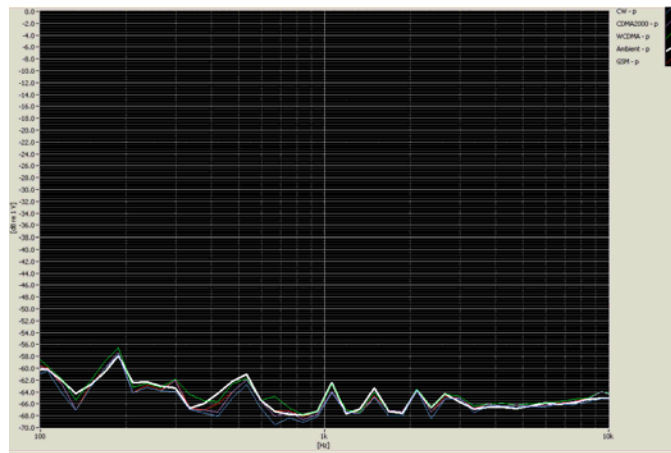
The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band.

To facilitate setting of a base station simulator for ABM measurements, specific band plan channel numbers are listed that may be used in lieu of the band center frequencies.

**Table 5-4  
Center Channels and Frequencies**



Test frequencies & associated channels	
Channel	Frequency (MHz)
<b>Cellular 850</b>	
4183(UMTS)	836.60
190 (GSM)	836.60
<b>AWS 1700 / PCS 1900</b>	
661 (GSM)	1880
1412 (UMTS)	1730.40
9400 (UMTS)	1880

## VIII. RF Emission Effect on T-coil Measurements



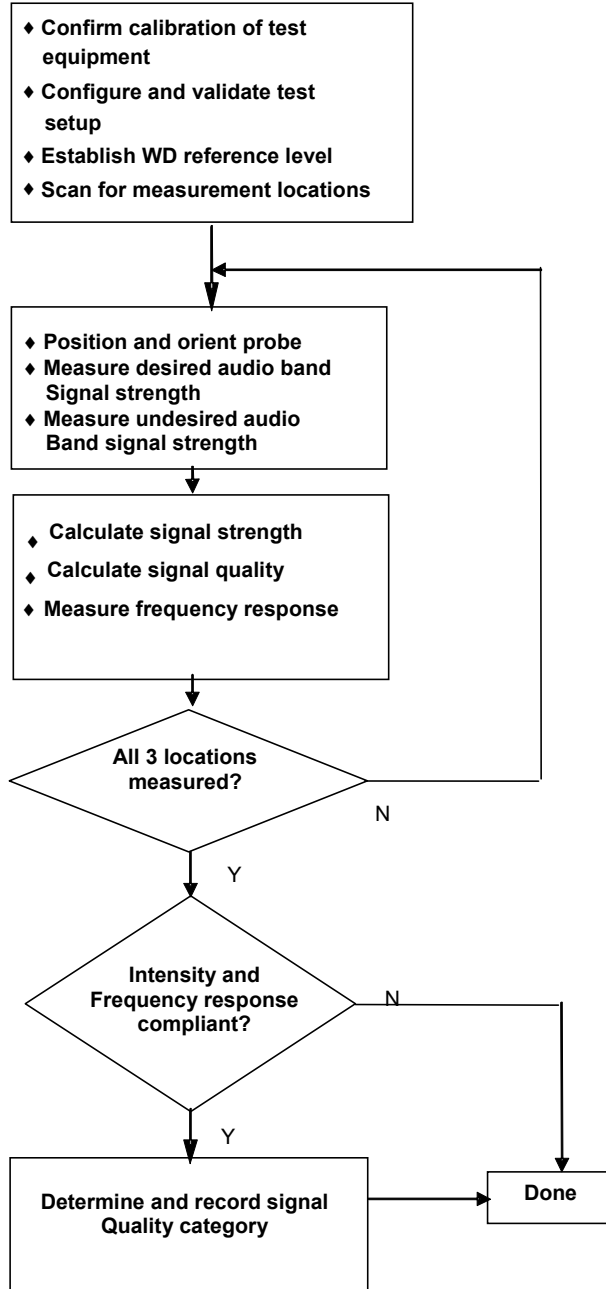
**Figure 5-15**

**High power RF Emissions Effect with HAC Dipole on the T-coil Probe System 10mm between dipole maximum and magnetic probe**



FCC ID: «FCC_ID»	 PCTEST Pulse Power and Electromagnetic, Inc.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 17 of 39

## IX. Test Flow

The flow diagram below was followed (From C63.19):

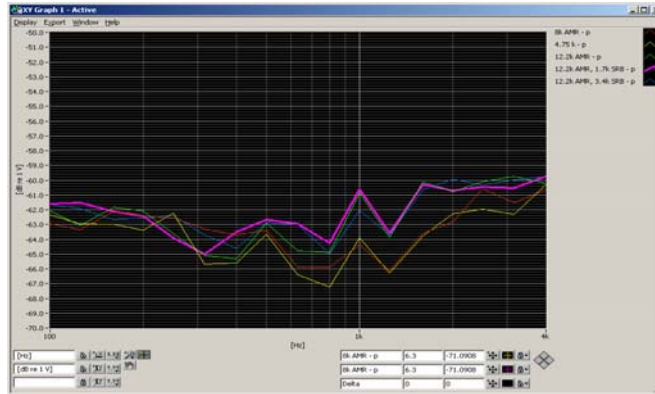


**Figure 5-16**  
**C63.19 T-Coil Signal Test Process**

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 18 of 39

## 6. FCC 3G MEASUREMENTS

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:



**Figure 6-1**  
WCDMA Audio Band Magnetic Noise

### I. ABM Measurements

**Table 6-1**  
FCC 3G ABM Measurements for P8010

**ABM2 Pre-Test (dBA/m), A, HBI**

AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
-35.92	-42.77	-44.50	RadialV	9262

**ABM1 Pre-Test (dBA/m)**

AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
-1.090	-0.960	-1.220	RadialV	9262

- Mute on; Backlight on; Max Volume, Max Contrast
- GSM850: PCL=5, GSM1900: PCL=0; WCDMA: TPC="All 1s";



**Figure 6-2**  
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: «FCC_ID»	PCTEST PICO SYSTEMS AND COMMUNICATIONS, INC.	HAC (T-COIL) TEST REPORT	PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 19 of 39

## 7. TEST SUMMARY

### I. T-Coil Test Summary



**Table 7-1**  
**Table of Results for GSM**

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				<i>dBa/m</i>	<i>dBa/m</i>	<i>PASS/FAIL</i>
7.3.1.1	GSM	Cellular	Intensity, Axial	-18	6.7	PASS
7.3.1.2			Intensity, RadialH	-18	-3.1	PASS
7.3.1.2			Intensity, RadialV	-18	-1.4	PASS
7.3.3			Signal-to-Noise/Noise, Axial	20	26.9	PASS
7.3.3			Signal-to-Noise/Noise, RadialH	20	27.4	PASS
7.3.3			Signal-to-Noise/Noise, RadialV	20	26.5	PASS
7.3.2			Frequency Response, Axial	0	1.8	PASS
7.3.1.1			GSM	PCS	Intensity, Axial	-18
7.3.1.2	Intensity, RadialH	-18			-2.8	PASS
7.3.1.2	Intensity, RadialV	-18			-1.3	PASS
7.3.3	Signal-to-Noise/Noise, Axial	20			28.2	PASS
7.3.3	Signal-to-Noise/Noise, RadialH	20			28.7	PASS
7.3.3	Signal-to-Noise/Noise, RadialV	20			27.4	PASS
7.3.2	Frequency Response, Axial	0			1.6	PASS

**Table 7-2**  
**Table of Results for WCDMA**

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				<i>dBa/m</i>	<i>dBa/m</i>	<i>PASS/FAIL</i>
7.3.1.1	WCDMA	Cellular	Intensity, Axial	-18	6.5	PASS
7.3.1.2			Intensity, RadialH	-18	-3.1	PASS
7.3.1.2			Intensity, RadialV	-18	-0.7	PASS
7.3.3			Signal-to-Noise/Noise, Axial	20	54.3	PASS
7.3.3			Signal-to-Noise/Noise, RadialH	20	38.9	PASS
7.3.3			Signal-to-Noise/Noise, RadialV	20	33.0	PASS
7.3.2			Frequency Response, Axial	0	1.7	PASS
7.3.1.1			WCDMA	PCS	Intensity, Axial	-18
7.3.1.2	Intensity, RadialH	-18			-3.0	PASS
7.3.1.2	Intensity, RadialV	-18			-1.1	PASS
7.3.3	Signal-to-Noise/Noise, Axial	20			55.2	PASS
7.3.3	Signal-to-Noise/Noise, RadialH	20			39.3	PASS
7.3.3	Signal-to-Noise/Noise, RadialV	20			31.4	PASS
7.3.2	Frequency Response, Axial	0			1.7	PASS

Note: The above summary tables represent the worst-case numerical values according to configurations in Tables 7-4 and 7-5.

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 20 of 39

**Table 7-3  
Consolidated Tabled Results**



	Volume Setting	Cellular			PCS		
		Axial	RadialH	RadialV	Axial	RadialH	RadialV
Freq. Response Margin	Maximum	PASS	PASS	PASS	PASS	PASS	PASS
Magnetic Intensity Verdict		PASS	PASS	PASS	PASS	PASS	PASS
FCC SNR Verdict		PASS	PASS	PASS	PASS	PASS	PASS

Note: Result shown is for T-coil category only.

## II. Raw Handset Data

**Table 7-4  
GSM Raw Data Results**

	Volume	Cellular Band								
		Axial			RadialH			RadialV		
		128	190	251	128	190	251	128	190	251
ABM1, dBA/m	Maximum	6.74	6.75	6.75	-2.86	-2.89	-3.14	-1.32	-1.36	-1.22
ABM2, dBA/m		-21.60	-21.19	-20.10	-32.39	-31.32	-30.58	-28.52	-28.95	-27.70
Ambient Noise, dBA/m		-59.52	-59.52	-59.52	-60.39	-60.39	-60.39	-60.82	-60.82	-60.82
Freq. Response Margin (dB)		1.77	1.77	1.78	1.78	1.77	1.77	1.76	1.77	1.75
S+N/N (dB)		28.34	27.94	26.85	29.53	28.44	27.44	27.19	27.60	26.48
S+N/N per orientation (dB)		26.85			27.44			26.48		
	Volume	PCS Band								
		Axial			RadialH			RadialV		
		512	661	810	512	661	810	512	661	810
ABM1, dBA/m	5.67	6.66	7.49	-2.79	-2.79	-2.83	-0.64	-1.28	-0.91	
ABM2, dBA/m	-22.69	-22.12	-20.70	-33.11	-31.46	-31.67	-28.44	-28.81	-28.30	
Ambient Noise, dBA/m	-59.52	-59.52	-59.52	-60.39	-60.39	-60.39	-60.82	-60.82	-60.82	
Freq. Response Margin (dB)	1.94	1.79	1.56	1.78	1.79	1.78	1.79	1.78	1.77	
S+N/N (dB)	28.36	28.77	28.20	30.32	28.67	28.84	27.80	27.53	27.40	
S+N/N per orientation (dB)	28.20			28.67			27.40			
T-coil Coordinates (cm)	[x,y] from bottom left	2.7,2.7			2.6,3.6			3.6,2.9		

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 21 of 39

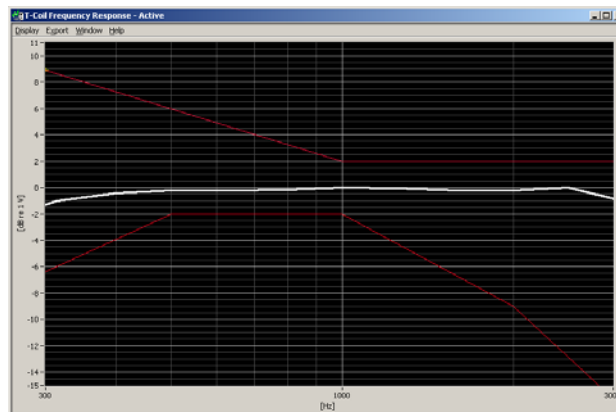
**Table 7-5  
WCDMA Raw Data Results**

	Volume	Cellular Band								
		Axial			RadialH			RadialV		
		4132	4183	4233	4132	4183	4233	4132	4183	4233
ABM1, dBA/m	Maximum	6.50	6.54	6.47	-3.12	-2.56	-3.07	-0.62	-0.70	-0.74
ABM2, dBA/m		-47.81	-49.31	-49.42	-43.24	-42.00	-41.97	-34.92	-33.69	-36.58
Ambient Noise, dBA/m		-59.52	-59.52	-59.52	-60.39	-60.39	-60.39	-60.82	-60.82	-60.82
Freq. Response Margin (dB)		1.79	1.69	1.67	1.80	1.80	1.80	1.79	1.77	1.79
S+N/N (dB)		54.31	55.86	55.89	40.13	39.43	38.90	34.30	32.99	35.84
S+N/N per orientation (dB)		54.31			38.9			32.99		
	Volume	PCS Band								
		Axial			RadialH			RadialV		
		9262	9400	9538	9262	9400	9538	9262	9400	9538
ABM1, dBA/m	6.70	6.60	6.56	-2.80	-3.00	-2.79	-1.08	-1.07	-0.79	
ABM2, dBA/m	-48.53	-48.96	-48.88	-42.11	-44.49	-42.64	-32.47	-34.48	-35.31	
Ambient Noise, dBA/m	-59.52	-59.52	-59.52	-60.39	-60.39	-60.39	-60.82	-60.82	-60.82	
Freq. Response Margin (dB)	1.80	1.74	1.83	1.80	1.77	1.81	1.78	1.77	1.80	
S+N/N (dB)	55.23	55.56	55.44	39.31	41.49	39.85	31.39	33.41	34.51	
S+N/N per orientation (dB)	55.23			39.31			31.39			
T-coil Coordinates (cm)	[x,y] from bottom left	2.7,2.7			2.6,3.6			3.6,2.9		

**Notes:**

1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0; WCDMA: TPC="All 1s";
2. Phone Condition: Mute on; Backlight on; Max Volume, Max Contrast
3. Vocoder Configuration: EFR (GSM); AMR 12.2 kbps (WCDMA);

**III. Frequency Response Graph**

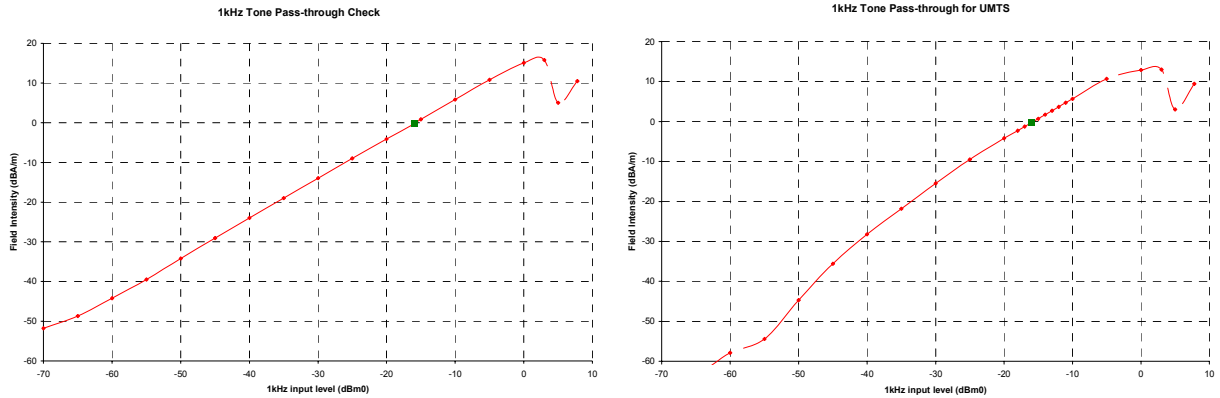


**Figure 7-1  
Axial Frequency Response**

Note: This frequency response represents the worst-case ABM2 test configuration according to Tables 7-4 and 7-5.

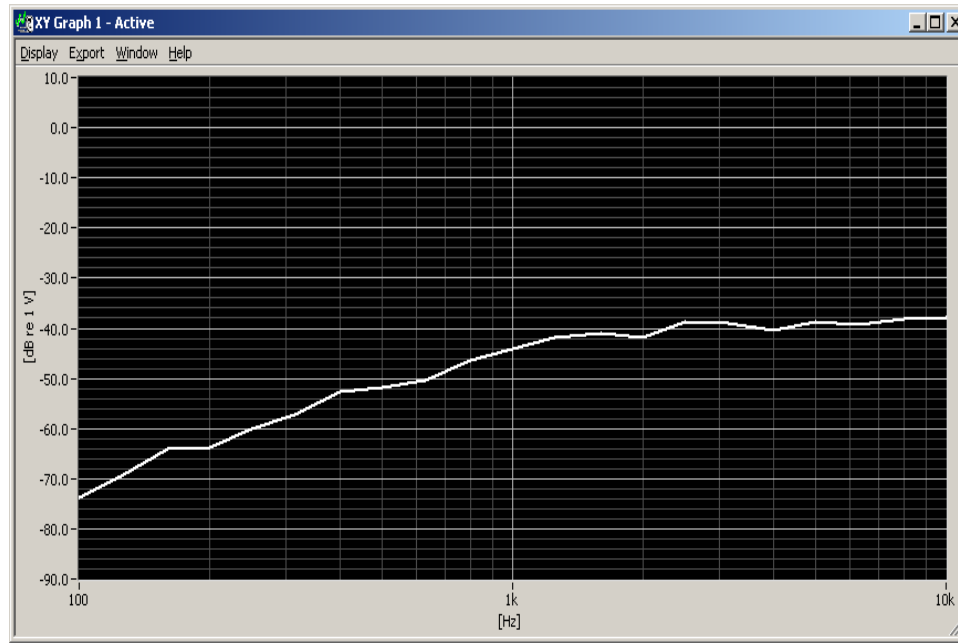
FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 22 of 39	

#### IV. 1 kHz Vocoder Application Check





This model was verified to be within the linear region for ABM1 measurements at -16 dBm0. This measurement was taken in the axial configuration above the maximum location, cellular band, mid channel.

#### V. Undesirable Audio Magnetic Band Plot (ABM2)

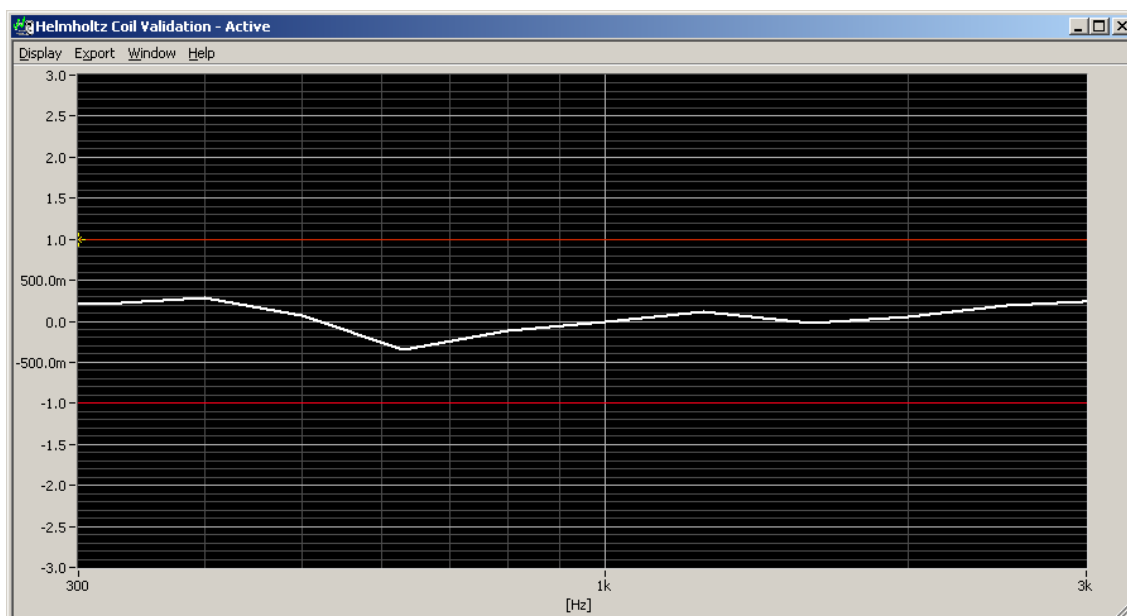


**Figure 7-2**  
**Worst-case ABM2 Plot for WD**

Note: This plot represents the data from the location/configuration resulting in the highest ABM2 result shown in Tables 7-4 and 7-5.

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 23 of 39



## VI. T-Coil Validation Test Results



**Figure 7-3**  
Helmholtz Coil Validation for Frequency Response

**Table 7-6**  
Helmholtz Coil Validation Table of Results

Item	Target	Result	Verdict
Signal Validation			
Frequency Response, from limits	$0 \pm 0.5 \text{ dB}$	0.34	PASS
Magnetic Intensity, -10 dBA/m	$-10 \pm 0.5 \text{ dB}$	-9.792	PASS
Noise Validation			
Axial Environmental Noise	< - 58 dBA/m	-59.52	PASS
RadialH Environmental Noise	< - 58 dBA/m	-60.39	PASS
RadialV Environmental Noise	< - 58 dBA/m	-60.82	PASS

FCC ID: «FCC_ID»	 PCTEST Pulse Power and Environmental Test, Inc.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 24 of 39



## 8. MEASUREMENT UNCERTAINTY



**Table 8-1  
Uncertainty Estimation Table**

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, $u_c$ (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level						35.3%	1.31

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.



Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 25 of 39



## 9. EQUIPMENT LIST

**Table 9-1  
Equipment List**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4407B	ESA Spectrum Analyzer	4/5/2011	Annual	4/5/2012	US39210313
Agilent	E5515C	Wireless Communications Tester	4/21/2011	Annual	4/21/2012	US41140256
Agilent	E5515C	Wireless Communications Test Set	2/14/2012	Annual	2/14/2013	GB43304447
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/12/2011	Annual	10/12/2012	1833460
Gigatronics	8651A	Universal Power Meter	10/12/2011	Annual	10/12/2012	8650319
Listen	Soundconnect	Microphone Power Supply	7/13/2011	Annual	7/13/2012	PS1435
Listen	SoundCheck	Acoustic Analyzer System	8/23/2011	Annual	8/23/2012	40603797
NI	4474	Data Acquisition Card	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/19/2011	Annual	4/19/2012	107826
Rohde & Schwarz	CMU200	Base Station Simulator	6/1/2011	Annual	6/1/2012	833855/0010
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Annual	10/7/2012	103962
TEM	Axial T-coil Probe	Axial T-Coil Probe	6/15/2011	Annual	6/15/2012	TEM-1105
TEM	Radial T-Coil Probe	Radial T-Coil Probe	6/15/2011	Annual	6/15/2012	TEM-1121
TEM	Radial T-Coil Probe	Radial T-Coil Probe	1/20/2012	Annual	1/20/2013	TEM-1130
TEM	Axial T-Coil Probe	Axial T-Coil Probe	1/20/2012	Annual	1/20/2013	TEM-1124
TEM	C63.19	Helmholtz Coil	11/11/2011	Biennial	11/11/2013	925
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A

FCC ID: «FCC_ID»	 PCTEST Pulsed Field Technology, Inc.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 26 of 39

## 10. CALIBRATION CERTIFICATES

<b>FCC ID:</b> «FCC_ID»	 <b>PCTEST</b> <small>Engineering Laboratory, Inc.</small>	<b>HAC (T-COIL) TEST REPORT</b>	 <b>PANTECH</b>	<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»		Page 27 of 39

West Caldwell Calibration Laboratories Inc.

# Certificate of Calibration

for

Axial T Coil Probe

Manufactured by: TEM CONSULTING  
 Model No: Axial T Coil Probe  
 Serial No: TEM-1124  
 Calibration Recall No: 21559

Submitted By:

Customer: STEVE LIU  
 Company: PCTEST ENGINEERING LAB  
 Address: 6660-B DOBBIN ROAD  
 COLUMBIA MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. Axial T Coi TEM

Upon receipt for Calibration, the instrument was found to be:

Within ( X ) see attached Report of Calibration.

the tolerance of the indicated specification.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date: 20-Jan-12

*6/27/12*

*FC*

Certificate No: 21559 - 1

Felix Christopher  
Quality Manager

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

**West Caldwell Calibration Laboratories, Inc.**  
 uncompromised calibration  
 1575 State Route 96, Victor, NY 14564, U.S.A.

ISO 9001:2008  
Registered Company  
Calibration Traceable  
To N. I. S. T.



Phone: (585) 586-3900 Fax.: (585) 586-4327

FCC ID: «FCC_ID»	PCTEST This report was generated by PCTEST	HAC (T-COIL) TEST REPORT	PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 28 of 39

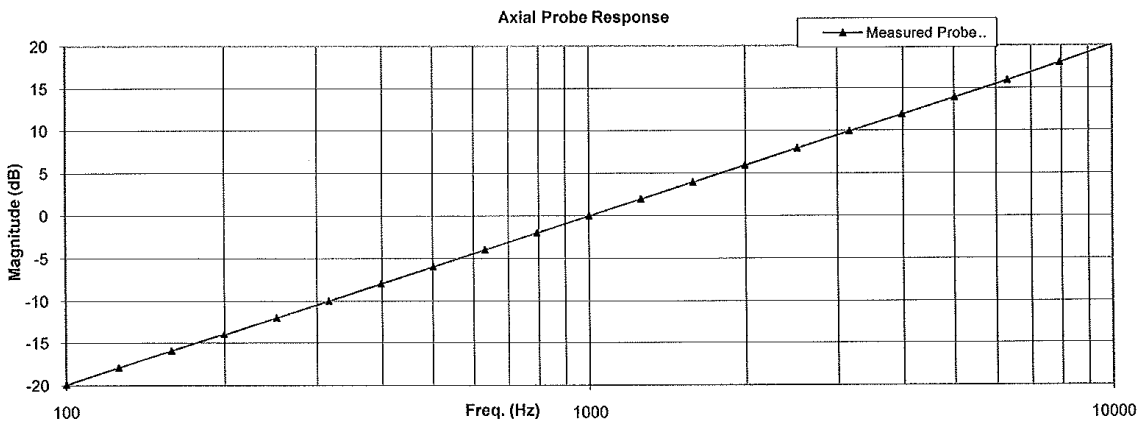
## REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe      Model No.: Axial T Coil Probe      Serial No.: TEM-1124  
 Company : Pctest Engineering Lab.      I. D. No: 80578

Calibration results:	Before data: .....	After data: .....
<b>Probe Sensitivity measured with Helmholtz Coil</b>		
<i>Helmholtz Coil;</i>		
the number of turns on each coil;	10	No.
the radius of each coil, in meters;	0.204	m
the current in the coils, in amperes.;	0.08	A
<i>Helmholtz Coil Constant;</i>		
	6.98	A/m/V
<i>Helmholtz Coil magnetic field;</i>		
	5.90	A/m
<b>Probe Sensitivity at</b>		
was	1000	Hz.
	-60.16	dBV/A/m
	0.981	mV/A/m
<b>Probe resistance</b>	904	Ohms
<b>Before &amp; after data same: ...X.....</b>		
Laboratory Environment:		
Ambient Temperature:	22.1	°C
Ambient Humidity:	30.8	% RH
Ambient Pressure:	100.1	kPa
Calibration Date:	20-Jan-12	1:01 PM
Re-calibration Due:	20-Jan-13	
Report Number:	21559	-1
Control Number:	21559	



The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers: ,205342  
 The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.  
 Graph represents Probes Frequency Response.



The above listed instrument was checked using calibration procedure documented in West Caldwell Calibration Laboratories Inc. procedure : **Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCATEMC**  
 Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 20-Jan-2012 1:01 PM      Measurements performed by:   
 Calibrated on WCCL system type 9700      **Felix Christopher**  
 This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.      Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCATEMC

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 29 of 39

HCATEMC\_TEM-1124\_Jan-20-2012

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564  
Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe      for      Model No.: Axial T Coil Probe      Serial No.: TEM-1124

Company : Pctest Engineering Lab.

Test	Function	Tolerance	Measured values			
			Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.      dBV/A/m	-60.16			
2.0	Probe Level Linearity	dB				
		6	6.03			
		0	0.00			
		-6	-6.02			
		Ref. (0 dB)				
		-12	-12.03			
3.0	Probe Frequency Response	Hz				
		100	-19.9			
		126	-17.9			
		158	-15.9			
		200	-13.9			
		251	-11.9			
		316	-10.0			
		398	-8.0			
		501	-6.0			
		631	-4.0			
		794	-2.0			
			Ref. (0 dB)			
		1000	0.0			
		1259	2.0			
		1585	4.0			
		1995	6.0			
		2512	7.9			
3162	9.9					
3981	11.9					
5012	13.9					
6310	15.9					
7943	18.0					
10000	20.2					



Instruments used for calibration:			Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	17-Oct-2011	,205342	16-Oct-2012
HP	34401A	S/N US361024	17-Oct-2011	,205342	16-Oct-2012
HP	33120A	S/N S3604371	17-Oct-2011	,205342	16-Oct-2012
B&K	2133	S/N 1492410	4-Nov-2011	681/280411-11	4-Nov-2012

Cal. Date: 20-Jan-2012 1:01 PM  
Calibrated on WCCL system type 9700

Tested by: Felix Christopher

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCATEMC

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 30 of 39

West Caldwell Calibration Laboratories Inc.

# Certificate of Calibration

for

Radial T Coil Probe

Manufactured by: TEM CONSULTING  
 Model No: Radial T Coil Probe  
 Serial No: TEM-1130  
 Calibration Recall No: 21559

Submitted By:

Customer: STEVE LIU  
 Company: PCTEST ENGINEERING LAB  
 Address: 6660-B DOBBIN ROAD  
 COLUMBIA MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. Radial T C TEM

Upon receipt for Calibration, the instrument was found to be:

Within ( X ) see attached Report of Calibration.

the tolerance of the indicated specification.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date: 20-Jan-12 *ok ✓ 20/1/12*

*FC*

Certificate No: 21559 - 2

Felix Christopher  
Quality Manager

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

**West Caldwell Calibration Laboratories, Inc.**  
 uncompromised calibration  
 1575 State Route 96, Victor, NY 14564, U.S.A.

ISO 9001:2008  
Registered Company  
Calibration Traceable  
To N. I. S. T.



Phone: (585) 586-3900 Fax.: (585) 586-4327

FCC ID: «FCC_ID»	PCTEST This report was generated by PCTEST	HAC (T-COIL) TEST REPORT	PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 31 of 39	





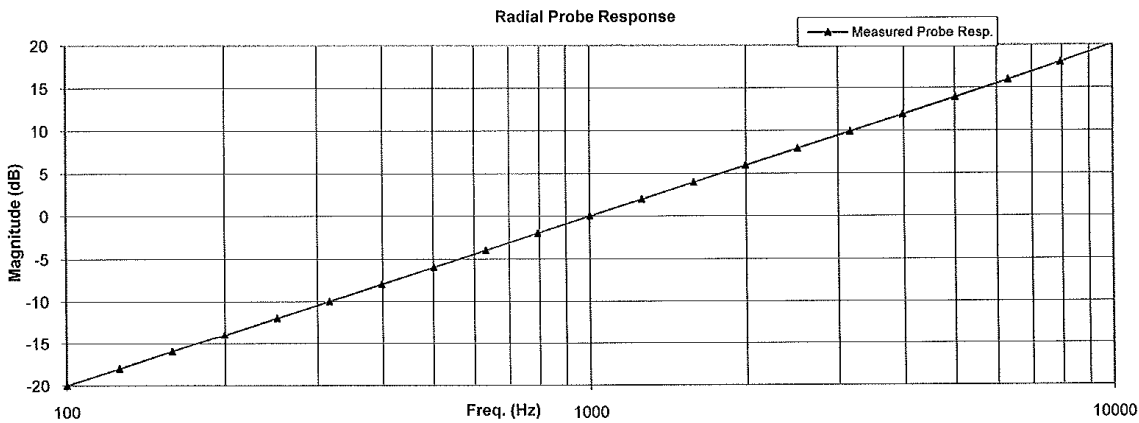
## REPORT OF CALIBRATION

for  
**TEM Consulting LP Radial T Coil Probe**      **Model No.: Radial T Coil Probe**      **Serial No.: TEM-1130**  
**Company : Pctest Engineering Lab.**      **I. D. No: 80579**

<p>Calibration results:</p> <p style="text-align: center;"><b>Probe Sensitivity measured with Helmholtz Coil</b></p> <p style="text-align: center;"><i>Helmholtz Coil;</i></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">the number of turns on each coil;</td> <td style="width: 10%; text-align: center;">10</td> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">No.</td> </tr> <tr> <td>the radius of each coil, in meters;</td> <td style="text-align: center;">0.204</td> <td></td> <td style="text-align: center;">m</td> </tr> <tr> <td>the current in the coils, in amperes.;</td> <td style="text-align: center;">0.08</td> <td></td> <td style="text-align: center;">A</td> </tr> <tr> <td><i>Helmholtz Coil Constant;</i></td> <td style="text-align: center;">6.98</td> <td></td> <td style="text-align: center;">A/m/V</td> </tr> <tr> <td><i>Helmholtz Coil magnetic field;</i></td> <td style="text-align: center;">5.90</td> <td></td> <td style="text-align: center;">A/m</td> </tr> </table> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Probe Sensitivity at</td> <td style="width: 10%; text-align: center;">1000</td> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">Hz.</td> </tr> <tr> <td>was</td> <td style="text-align: center;">-60.50</td> <td></td> <td style="text-align: center;">dBV/A/m</td> </tr> <tr> <td></td> <td style="text-align: center;">0.944</td> <td></td> <td style="text-align: center;">mV/A/m</td> </tr> <tr> <td>Probe resistance</td> <td style="text-align: center;">903</td> <td></td> <td style="text-align: center;">Ohms</td> </tr> </table>	the number of turns on each coil;	10		No.	the radius of each coil, in meters;	0.204		m	the current in the coils, in amperes.;	0.08		A	<i>Helmholtz Coil Constant;</i>	6.98		A/m/V	<i>Helmholtz Coil magnetic field;</i>	5.90		A/m	Probe Sensitivity at	1000		Hz.	was	-60.50		dBV/A/m		0.944		mV/A/m	Probe resistance	903		Ohms	<p>Before data: .....      After data: .....</p> <p style="text-align: center;">Before &amp; after data same: ...X.....</p> <p>Laboratory Environment:</p> <table style="width: 100%; border: none;"> <tr> <td>Ambient Temperature:</td> <td style="text-align: center;">22.1</td> <td style="text-align: center;">°C</td> </tr> <tr> <td>Ambient Humidity:</td> <td style="text-align: center;">30.8</td> <td style="text-align: center;">% RH</td> </tr> <tr> <td>Ambient Pressure:</td> <td style="text-align: center;">100.1</td> <td style="text-align: center;">kPa</td> </tr> <tr> <td>Calibration Date:</td> <td style="text-align: center;">20-Jan-12</td> <td style="text-align: center;">1:30 PM</td> </tr> <tr> <td>Re-calibration Due:</td> <td style="text-align: center;">20-Jan-13</td> <td></td> </tr> <tr> <td>Report Number:</td> <td style="text-align: center;">21559</td> <td style="text-align: center;">-2</td> </tr> <tr> <td>Control Number:</td> <td style="text-align: center;">21559</td> <td></td> </tr> </table>	Ambient Temperature:	22.1	°C	Ambient Humidity:	30.8	% RH	Ambient Pressure:	100.1	kPa	Calibration Date:	20-Jan-12	1:30 PM	Re-calibration Due:	20-Jan-13		Report Number:	21559	-2	Control Number:	21559	
the number of turns on each coil;	10		No.																																																							
the radius of each coil, in meters;	0.204		m																																																							
the current in the coils, in amperes.;	0.08		A																																																							
<i>Helmholtz Coil Constant;</i>	6.98		A/m/V																																																							
<i>Helmholtz Coil magnetic field;</i>	5.90		A/m																																																							
Probe Sensitivity at	1000		Hz.																																																							
was	-60.50		dBV/A/m																																																							
	0.944		mV/A/m																																																							
Probe resistance	903		Ohms																																																							
Ambient Temperature:	22.1	°C																																																								
Ambient Humidity:	30.8	% RH																																																								
Ambient Pressure:	100.1	kPa																																																								
Calibration Date:	20-Jan-12	1:30 PM																																																								
Re-calibration Due:	20-Jan-13																																																									
Report Number:	21559	-2																																																								
Control Number:	21559																																																									

**The above listed instrument meets or exceeds the tested manufacturer's specifications.**

This Calibration is traceable through NIST test numbers: ,205342  
 The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.  
 Graph represents Probes Frequency Response.



The above listed instrument was checked using calibration procedure documented in West Caldwell Calibration Laboratories Inc. procedure : **Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCRTEMC**  
 Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 20-Jan-2012 1:30 PM      Measurements performed by: *Felix Christopher*  
 Calibrated on WCCL system type 9700      **Felix Christopher**  
 This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.      Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCRTEMC

FCC ID: «FCC_ID»		HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 32 of 39



HCRTEMC\_TEM-1130\_Jan-20-2012

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564  
Tel. (585) 586-3900 FAX (585) 586-4327

**Calibration Data Record**

TEM Consulting LP Radial T Coil Probe      for      Model No.: Radial T Coil Probe      Serial No.: TEM-1130

Company : Pctest Engineering Lab.

Test	Function	Tolerance	Measured values			
			Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.      dBV/A/m	-60.50			
2.0	Probe Level Linearity					
			6	6.03		
		Ref. (0 dB)	0	0.00		
			-6	-6.02		
		-12	-12.02			
3.0	Probe Frequency Response					
			Hz			
			100	-20.0		
			126	-18.0		
			158	-15.9		
			200	-13.9		
			251	-11.9		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
			Ref. (0 dB)	1000	0.0	
				1259	2.0	
				1585	4.0	
				1995	6.0	
				2512	7.9	
		3162	9.9			
		3981	11.9			
		5012	13.9			
		6310	15.9			
		7943	18.0			
		10000	20.1			



Instruments used for calibration:			Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	17-Oct-2011	,205342	16-Oct-2012
HP	34401A	S/N US361024	17-Oct-2011	,205342	16-Oct-2012
HP	33120A	S/N S3604371	17-Oct-2011	,205342	16-Oct-2012
B&K	2133	S/N 1492410	4-Nov-2011	681/280411-11	4-Nov-2012

Cal. Date: 20-Jan-2012 1:30 PM  
Calibrated on WCCL system type 9700

Tested by: Felix Christopher

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.



Rev. 5.0 Sept. 10, 2010 Doc. # 1038 HCRTEMC

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 33 of 39

## 11. CONCLUSION



The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.



<b>FCC ID:</b> «FCC_ID»	 PCTEST Engineering Laboratory, Inc.	<b>HAC (T-COIL) TEST REPORT</b>	 PANTECH	<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»		Page 34 of 39

## 12. REFERENCES

1. ANSI C63.19-2007, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, June 2007
2. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
3. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
4. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
5. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
6. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
7. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
8. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
9. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
10. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
11. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
12. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
13. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
14. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
15. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.

FCC ID: «FCC_ID»	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	HAC (T-COIL) TEST REPORT	 PANTECH	Reviewed by: Quality Manager
Filename: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 35 of 39

16. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
17. Joyner, K. H., et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
18. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
19. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
20. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
21. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
22. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
23. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1040, July 1981.
24. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
25. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
26. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
27. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
28. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

<b>FCC ID:</b> «FCC_ID»	 <b>PCTEST</b> <small>PROFESIONAL COMMUNICATIONS TESTING, INC.</small>	<b>HAC (T-COIL) TEST REPORT</b>	 <b>PANTECH</b>	<b>Reviewed by:</b> Quality Manager
<b>Filename:</b> «Report_SN»	<b>Test Dates:</b> «Date_of_Testing»	<b>EUT Type:</b> «EUT_Type»	Page 36 of 39	