

HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.



PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI , BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hct.co.kr

VERIFICATION

Pantech Co., Ltd.

Shinsong Bldg, 25-12, Yeouido-dong,
Youngdeungpo-Gu, Seoul, 150-711, Korea

FRN: 0008874489

Date of Issue: March 31, 2006

Test Report No.: HCT-SAR06-0318

Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.

FRN: 0005866421

MODEL

:

PC-8200N

Classification/ Standard(s): FCC PART 15 CLASS B / CISPR 22 CLASS B
Equipment (EUT) Type: Dual-Mode CDMA Phone with Bluetooth- Prototype
Trade Name/Model(s): Pantech / PC-8200N
Port/ Connector(s) DC Input Port / Ear Phone Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).

Report prepared by : **Ki-Soo Kim**
Manager of Product Compliance Team



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Justification.....	5
2.2 EUT exercise Software.....	5
2.3 Cable Description.....	6
2.4 Noise Suppression Parts on Cable.....	6
2.5 Equipment Modifications.....	7
2.6 Configuration of Test system.....	8
3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	9
3.1 Conducted Emission Tests.....	10-11
3.2 Radiated Emission Tests.....	12
3.3 Test Setup Photos.....	13-14
4. FIELD STRENGTH CALCULATION.....	15
5. Test Equipment.....	16
6. Conclusion.....	17

1. GENERAL INFORMATION

1.1 Product Description

The Pantech Co., Ltd. PC-8200N Dual-Mode (CDMA/ PCS CDMA) phone. Its basic purpose is used for communications. It transmits from CDMA (824.70~848.31), PCS CDMA (1851.25~1908.75) MHz and receives from CDMA (869.70~893.31), PCS CDMA (1931.25~1988.75) MHz. The RF power is rated at CDMA (0.272 W), PCS CDMA (0.279 W).

FCC ID	JYCPC-8200N
EUT Type	Dual-Mode CDMA Phone with Bluetooth- Prototype
Model	PC-8200N
TX Frequency	824.70 — 848.31 MHz (CDMA) 1851.25 — 1908.75 MHz (PCS CDMA)
RX Frequency	869.70 — 893.31 MHz (CDMA) 1931.25 — 1988.75 MHz (PCS CDMA)
FCC Classification	Licensed Portable Transmitter Held to Ear (PCE)
Max RF. Output Power	0.272W ERP CDMA (24.4dBm) 0.279W EIRP PCS CDMA (24.5dBm)
Modulation	CDMA

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
Dual- Mode CDMA Phone	Pantech Co., Ltd.	PC-8200N	JYCPC-8200N	Adaptor/ P.C
Adaptor	Pantech Co., Ltd.	PTA-5070C6US	N/A	CDMA Phone
Head-Set	Pantech Co., Ltd.	-	N/A	EUT
Notebook P.C	TOSHIBA	PSA50K-04007	DoC	N/A
Adapter	TOSHIBA	ADP-60RH A	DoC	Notebook P.C
MOUSE	H.P	M-S48a	DoC	P.C
PRINTER	H/P	C4569A	DoC	P.C

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003(Registration Number: 90661)

2.SYSTEM TEST CONFIGURATION

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	Pantech Co., Ltd.	PC-8200N

2.2 EUT exercise Software

The EUT was tested on the charging battery during the radiated and conducted emission testing.

2.3 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
EUT	N/A	Y	1.5(D)
Charger	N	N/A	1.5(P)
Notebook PC	N	N/A	1.8(P)
Adaptor	N	N/A	1.8(P)
Head-Set	N/A	N	1.5(D)
MOUSE	N/A	Y	1.8(D)
PRINTER	N	Y	1.8(P),1.8(D)

2.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Y	P.C END	Y	PC END
Charger	N	N/A	N	EUT END
Adaptor	Y	Adaptor END	Y	PC END
Head-Set	N	N/A	N	P.C END
MOUSE	N	N/A	Y	P.C END
PRINTER	N	N/A	Y	P.C END


2.5 Equipment Modifications

N/A

2.6 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were Connected to another LISN. Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worse perating condition. Final Radiated Emission tests were conducted at 3 meter open area test site.

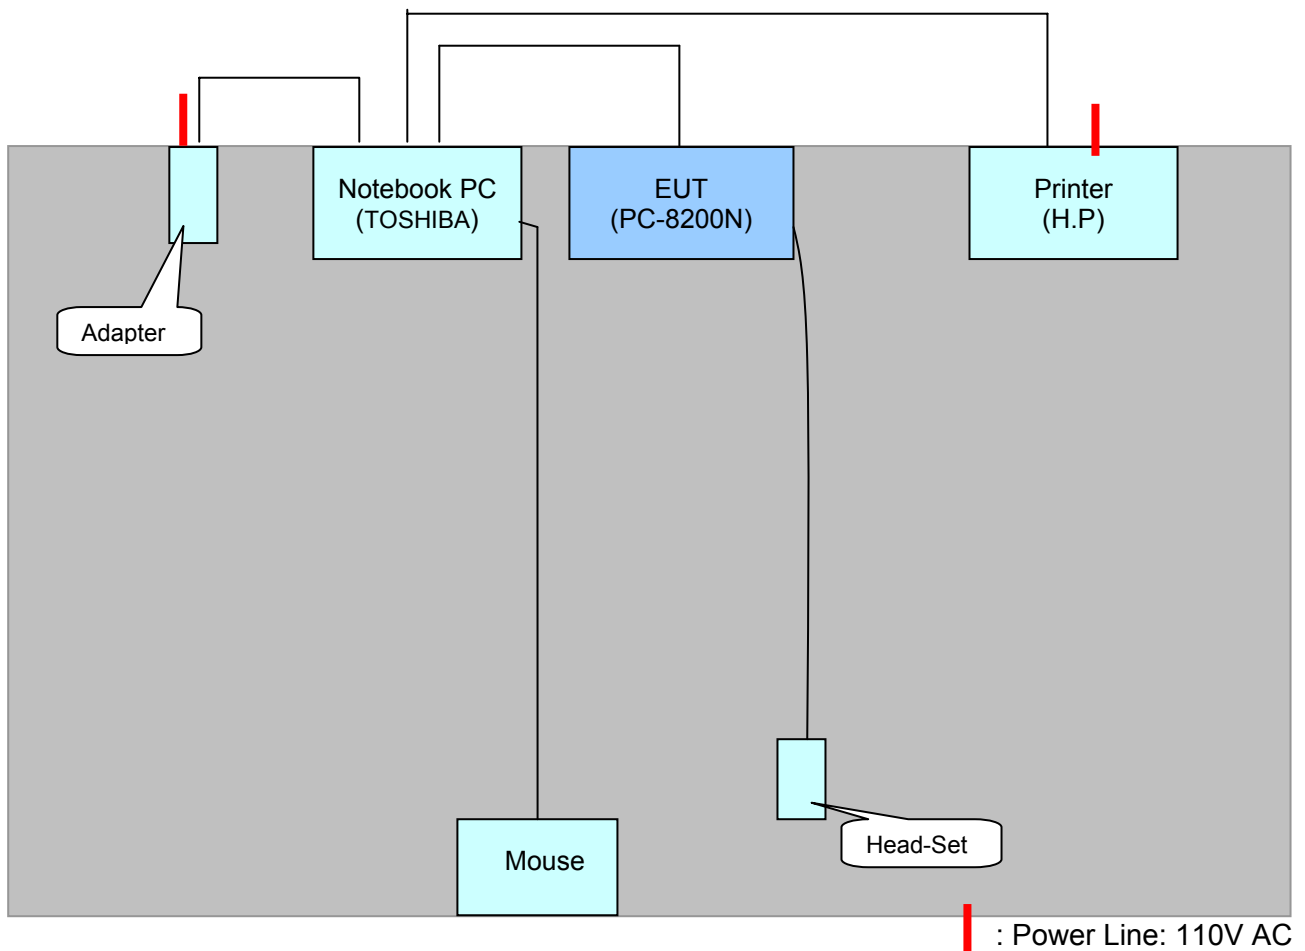

[Configuration of Tested System]

3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

3.1 Conducted Emissions Tests

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

```

=====
Humidity Level      : 43 %                      Temperature: 21.7 °C
Limit apply to     : CISPR 22 CLASS B
Result             : PASSED BY – 8.1 dB
Operating Condition : CHARGING BATTERY
Detector           : CISPR Quasi-Peak (6 dB Bandwidth: 9 KHz)
  
```

Power Line Conducted Emissions				CISPR 22 CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Result	Limit (dBuV)	Margin (dB)
0.160	54.7	NEUTRAL	Quasi-Peak	66	-10.7
0.171	41.4	NEUTRAL	Average	55	-13.5
0.162	57.2	HOT	Quasi-Peak	65	-8.1
0.170	43.8	HOT	Average	55	-11.2

Line Conducted Emissions Tabulated Data



Measured by : Keun-Ho Park / Engineer

Date : April 02, 2006


HCT

EMC TEST LAB

EUT: PC-8200N
 Manufacturer: PANTECH
 Operating Condition: NORMAL
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

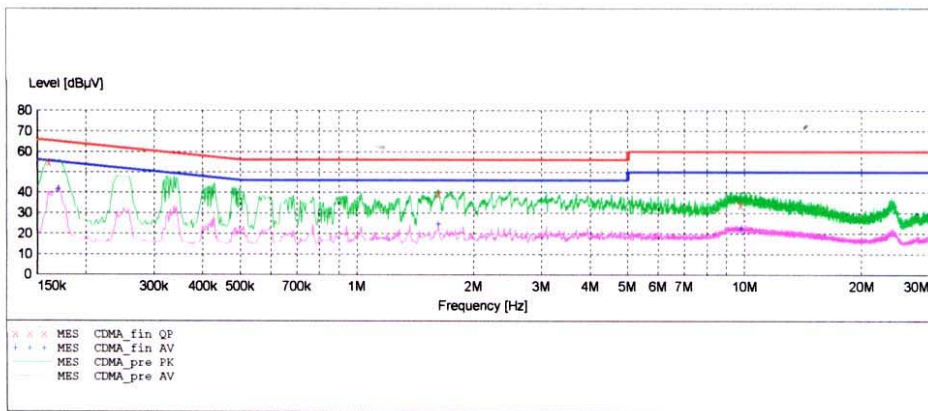

MEASUREMENT RESULT: "CDMA_fin QP"

4/2/2006 3:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.160100	54.70	10.1	66	10.7	---	---
1.625000	39.30	10.2	56	16.7	---	---
9.765000	34.10	10.4	60	25.9	---	---

MEASUREMENT RESULT: "CDMA_fin AV"

4/2/2006 3:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170100	41.40	10.1	55	13.5	---	---
1.625000	24.60	10.2	46	21.4	---	---
9.850000	22.60	10.4	50	27.4	---	---


HCT

EMC TEST LAB

EUT: PC-8200N
 Manufacturer: PANTECH
 Operating Condition: NORMAL
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

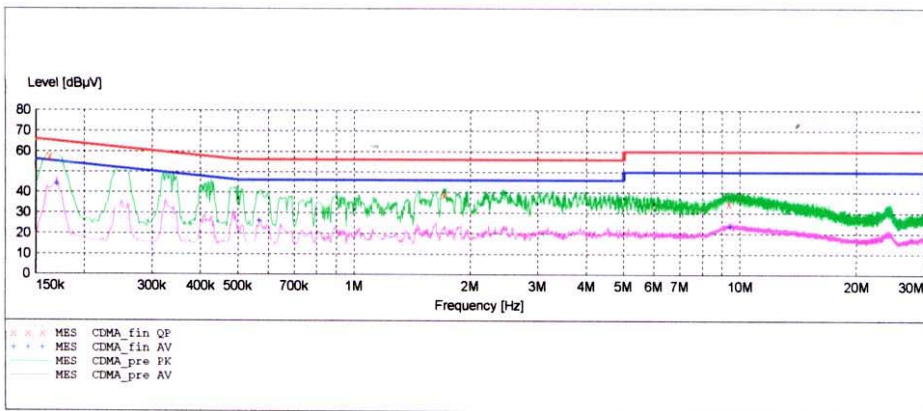

MEASUREMENT RESULT: "CDMA_fin QP"

4/2/2006 3:07PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.162600	57.20	10.1	65	8.1	---	---
1.710000	39.10	10.2	56	16.9	---	---
9.360000	34.70	10.4	60	25.3	---	---

MEASUREMENT RESULT: "CDMA_fin AV"

4/2/2006 3:07PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170100	43.80	10.1	55	11.2	---	---
0.570000	26.00	10.1	46	20.0	---	---
9.460000	23.50	10.4	50	26.5	---	---

3.3.1 Conducted Radiated Emission



3.3.2 Radiated Emission



4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

5.1 Test Equipment

Type	Manufacture	Model Number	CAL Date
EMI Test Receiver	Rohde & Schwarz	ESI40	2005.11.16
EMI Test Receiver	Rohde & Schwarz	ESVS30	2005.07.16
LISN	Rohde & Schwarz	ESH2-Z5	2005.07.28
LISN	EMCO	ESH3-Z5	2005.07.28
Attenuator	Rohde & Schwarz	ESH3-Z2	2005.11.16
Amplifier	Hewlett-Packard	8447E	2005.08.23
TRILOG Antenna	Schwarzbeck	9160	2006.04.06
Antenna Position Tower	EMCO	1051-12	N/A
Turn Table	EMCO	1060-06	N/A
Power Analyzer	Voltech	PM 3300	2006.02.15
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2005.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A

6.1 Conclusion

The data collected shows that the Pantech Co., Ltd. Dual-Mode CDMA Phone with Bluetooth.
FCC ID: JYCPC-8200N. Complies with §15.107 and §15.109 of the FCC Rules.