



## TEST REPORT

REGULATION :

FCC Part 2, 90

Applicant	Testing Laboratory
JVC KENWOOD Corporation  1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel.: +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Kashima Laboratory URL: <a href="http://www.japan.intertek-etlsemko.com">http://www.japan.intertek-etlsemko.com</a> (Anechoic chamber) 298-6 Sada, Kashima, Ibaraki 314-0027 Japan Tel. +81 299 82 8464 (Open area test site) 3-2 Sunayama, Kamisu, Ibaraki 314-0255 Japan Tel. +81 479 40 1097
Equipment type	VHF DIGITAL TRANSCEIVER
Trademark	KENWOOD
FCC Model(s)	NX-740-M, NX-740H-K, NX-740HV-K
Serial No.	10
FCC ID	K44452600
Test Result	Complied
Report Number	15030396JKA-003
Original Issue Date	April 27, 2015

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Hideaki Kosemura

[Manager]

Tested by

Koichi Wagatsuma

[Engineer]

**In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90**

**Sub-part 2.1033**

<b>(c)(1) Applicant and Manufacture Information</b>	
APPLICANT	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
Contact Person	: Tamaki Shimamura Manager, Communications Systems Business Operation
MANUFACTURER	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
<b>(c)(2) FCC ID</b>	
FCC ID	: K44452600
Model number	: NX-740-M, NX-740H-K, NX-740HV-K
Serial number	: 10
<b>(c)(3) Instruction Manual(S)</b>	
Instruction manual(s)	: Please refer to attached Exhibits F
<b>(c)(4) Type of Emission</b>	
Emission Designation	: 11K0F3E(Narrow) 8K30F1E(Narrow) / 8K30F1D(Narrow) / 8K30F7W(Narrow) 4K00F1E(Very Narrow) / 4K00F1D(Very Narrow) / 4K00F7W(Very Narrow) 4K00F2D(Very Narrow) (add Emission Designation is 8K30F1E/F1D/F7W) (Test Emission Designation is 8K30F1E/F1D/F7W)
<b>(c)(5) Frequency range</b>	
Frequency Range	: 150 to 174 MHz
<b>(c)(6) Power Rating</b>	
Output Power	: 5 to 50 W
Type	: Continuously Variable
<b>(c)(7) Maximum Power Rating</b>	
Output Power	: 50W
<b>(c)(8): Voltages &amp; currents in all elements in final RF stage, including final transistor or solid-state device</b>	
Collector Current, A	: 15.0 A Maximum
Collector Voltage, Vdc	: 13.6 Vdc
Supply Voltage, Vdc	: 13.6 Vdc
<b>Other Information</b>	
Number of Channel	: 32 channels / 2 zone
Maximum Deviation	: $\pm 2.5$ kHz (11K0F3E)
Frequency Stability	: 2.0 ppm
	:
Antenna Impedance	: 50 $\Omega$ Nominal
<b>Note</b>	

## TABLE OF CONTENTS

---

	Page
SECTION 1. GENERAL INFORMATION	4
SECTION 2. SUMMARY OF TEST RESULT	5
SECTION 3. TEST AND MEASUREMENT DATA	6
SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)	7
SECTION 5. OPERATING CONDITION	8
SECTION 6. MEASUREMENT UNCERTAINTY	9
SECTION 7. TEST DATA	
7.1 Carrier Output Power (Conducted)	10
7.2 Unwanted Emissions (Transmitter Conducted)	12
7.3 Emission Masks (Occupied Bandwidth)	15
7.4 Transient Frequency Behavior	18
7.5 Necessary Bandwidth and Emission Bandwidth	21
APPENDIX      PHOTOGRAPHS	

---

## SECTION 1. GENERAL INFORMATION

### TEST PERFORMED

Location	Kashima No.1 Test Site		
EUT Received	April 01, 2015		
Date of Test	April 01, 2015	to	April 14, 2015
Standard Applied	FCC Part 2, 90		
Measurement Method	ANSI/TIA-603-D-2010		
Deviation from Standard(s)	Not applicable		

### QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	EMC Testing	VLAC-008-1	JAPAN
BSMI	EMC Testing	SL2-IN-E-6008	TAIWAN
FILING			
VCCI	EMC Testing	A-0126	JAPAN
FCC	EMC Testing	JP0008	
IC	EMC Testing	IC-2042K-3, IC-2042Q-12	CANADA
CB-Scheme	EMC Testing	TL222	IECEE

### ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	4LEVEL FSK	4LEVEL Frequency Shift Key
GMSK	Gaussian Maximum Shift Key	CW ID	Continuously Repeating bit stream
FM	Frequency Modulation	C4FM	Constant envelope 4 Level FM
PTT	Push to Talk	AFC	Automatic frequency control

### Revision Summary

Revised Date	Section	Description of Changes

## SECTION 2. SUMMARY OF TEST RESULT

FCC Part2	Part90	TEST ITEM	RESULTS	Comments
2.1046 (a)	-	Carrier Output Power (Conducted)	<b>PASS</b>	
2.1051	90.210	Unwanted Emissions (Transmitter Conducted)	<b>PASS</b>	
2.1053 (a)	90.210	Field Strength of Spurious Radiation	<b>N/A</b>	<b>See Note</b>
2.1049 (c) (1)	90.210	Emission Masks (Occupied Bandwidth)	<b>PASS</b>	
-	90.214	Transient Frequency Behavior	<b>PASS</b>	
2.1047 (a)	-	Audio Low Pass Filter (Voice Input)	<b>N/A</b>	<b>See Note</b>
2.1047 (a)	-	Audio Frequency Response	<b>N/A</b>	<b>See Note</b>
2.1047 (b)	-	Modulation Limiting	<b>N/A</b>	<b>See Note</b>
2.1055 (a) (1)	90.213 (a)	Frequency Stability (Temperature Variation)	<b>N/A</b>	<b>See Note</b>
2.1055 (d) (1)	90.213 (a)	Frequency Stability (Voltage Variation)	<b>N/A</b>	<b>See Note</b>
-	90.203 (j)(3)	Certification required (FCC Part 90.203(j)(3))	<b>Complied</b>	
-	90.203 (j)(4)	Certification required (FCC Part 90.203(j)(4))	<b>Complied</b>	
-	90.203 (j)(5)	Certification required (FCC Part 90.203(j)(5))	<b>Complied</b>	
-	90.203 (e)	Certification required (FCC Part 90.203(e))	<b>Complied</b>	

### Note

Report is intended for Class 2 Permissive Change which is adding modulation bandwidths.  
(add 8K30F1E/F1D/F7W)

This test is not applicable as the addition would not alter these measurements.

### Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report.

This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

### Note:

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Verification by JVC Kenwood Corporation.

### SECTION 3. TEST AND MEASUREMENT DATA

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts:

FCC Rule	Test Item	Tested
Part 21	Domestic Public Fixed radio Services	N.A.
Part 22	Non Cellular	N.A.
Part 22	Public Mobile Services	N.A.
Part 22	Subpart H - Cellular Radiotelephone Service	N.A.
Part 22	Alternative technologies and auxiliary service	N.A.
Part 23	International Fixed Public Radiocommunication service	N.A.
Part 24	Personal Communications Services	N.A.
Part 74	Experimental Radio Auxiliary , Special Broadcast and Other Program Distributional Services	N.A.
Part 80	Stations in the Maritime Services	N.A.
Part 80	Subpart E - general Technical Standards	N.A.
Part 80	Subpart F - Equipment Authorization for Compulsory Ships	N.A.
Part 80	Subpart K - Private Coast Stations and Marine Utility Stations	N.A.
Part 80	Subpart S - Compulsory radiotelephone Installations for Small Passenger Boats	N.A.
Part 80	Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes	N.A.
Part 80	Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act	N.A.
Part 80	Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)	N.A.
Part 80	Subpart W - Global Maritime Distress and Safety System (GMDSS)	N.A.
Part 80	Subpart X - Voluntary Radio Installations	N.A.
Part 87	Aviation Services	N.A.
<b>Part 90</b>	<b>Private Land Mobile radio Services</b>	<b>YES</b>
Part 94	Private Operational - Fixed Microwave Service	N.A.
Part 95	Subpart A - General Mobile radio Service	N.A.
Part 95	Subpart C - Radio Control (R/C) radio Service	N.A.
Part 95	Subpart D - Citizens Band (CB) Radio Service	N.A.
Part 95	Subpart E -Family radio Service	N.A.
Part 95	Subpart F -Interactive Video and Data Service (IVDS)	N.A.
Part 97	Amateur Radio Service	N.A.
Part 101	Fixed Microwave Service	N.A.

IC Rule	Test Item	Tested
RSS-119	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz	N.A.
RSS-134	900MHz Narrowband Personal Communication Service	N.A.
RSS-Gen	General Requirements and Information for the Certification of Radio Apparatus	N.A.

## SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)

### 4.1 List of System Configuration

Symbol	Item	Model No.	Serial No.	Manufacture	Remarks
A	VHF DIGITAL TRANSCEIVER	NX-740-M NX-740H-K NX-740HV-K	10	JVC KENWOOD Corporation	EUT
Power Ratings of EUT :		DC 13.6 V +/- 15%		15.0 A Maximum	
Power Supply :		DC 13.6 V +/- 15%			
Condition of Equipment		Proto type			
Type		Mobile type			
Suppression Devices		No Modifications by the laboratory were made to the device			

### 4.2 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
ACC	D-sub	15 pin	
External Speaker	3.5φ	2 pin	
RF Antenna	M	2 pin	
Microphone	RJ-45	8 pin	

### 4.3 Highest Frequency Oscillator(s)/Crystal(s)

Operating Frequency	Board Name	Remarks
223.95 MHz	TXRX UNIT	

## SECTION 5. OPERATING CONDITION

The EUT was operated under the following condition during the test.

### 8.1 Operating Condition

The test was carried out under Transmit mode.


(150.05MHz, 162.05MHz, 173.95MHz)

(High Power : 50W, Low Power : 5 W)

EUT was examined in the operating conditions that had maximum emissions.

### 8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.

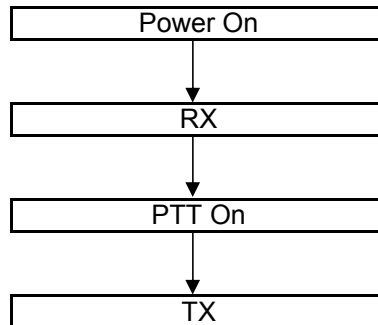



## SECTION 6. MEASUREMENT UNCERTAINTY

Carrier Output Power (Conducted)	U <sub>lab</sub>	Utia-603-d
	+/- 0.29dB (k = 2)	+/- 0.59 dB
Unwanted Emissions (Transmitter Conducted)		
	+/- 2.19 dB (k = 2)	+/- 1.1 dB
Field Strength of Spurious Radiation		
	+/- 2.78dB (k = 2)	+/- 3.3 dB
Emission Masks (Occupied Bandwidth)		
	+/- 0.5dB (k = 2)	+/- 2.1 dB
Transient Frequency Behavior		
	+/- 1.10% (k = 2)	+/- 21.6 %
Audio Low Pass Filter (Voice Input)		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Audio Frequency Response		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Modulation Limiting		
	+/- 1% (k = 2)	+/- 1 %
Frequency Stability (Temperature Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz
Frequency Stability (Voltage Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz

## SECTION 7. TEST DATA

### 7.1 Carrier Output Power (Conducted)

REGULATIONS : FCC Part 2 Section 1046 (a)

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.1.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The EUT was conducted to a resistive coaxial attenuator of normal load impedance.  
RF Power (dBm) = Power Meter reading (dBm) + Attenuator Loss (dB) + Cable Loss (dB)  
RF Power (W) =  $10^{(\text{RF Power (dBm)}/10)/1000}$
- 3 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 03, 14	Jun. 30, 15
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 03, 14	Jun. 30, 15
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
4	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
5	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
6	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

#### Measuring Equipment Configuration

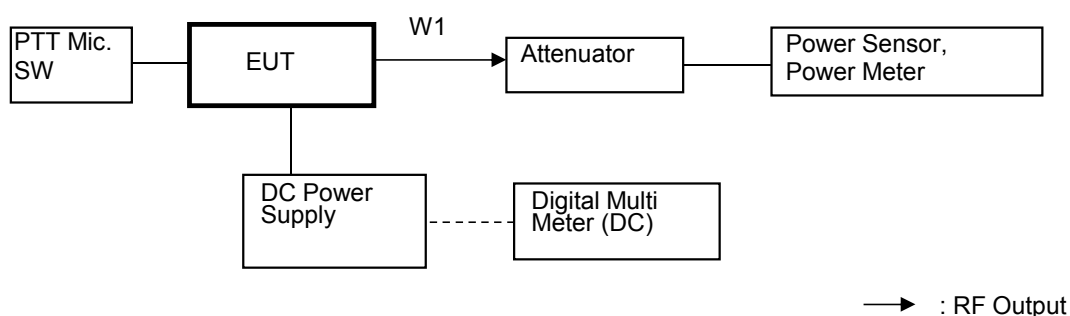

## Test Results

Test date	Apr 01, 2015	
Location	Kashima No.1 Test Site	
temperature	23.0	[degree C]
Humidity Variation	50.0	[%]
Atmospheric Pressure	100.6	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the Authorized Bandwidth.  
State the worst case (below).

No.	Frequency (MHz)	Band	Setting	RF Power (W)
1	150.05	Low	High Power	50
2	162.05	Middle	High Power	50
3	173.95	High	High Power	50
4	150.05	Low	Low Power	5
5	162.05	Middle	Low Power	5
6	173.95	High	Low Power	5

RF Power: Peak reading

## 7.2 Unwanted Emissions (Transmitter Conducted)

REGULATIONS	: FCC Part 2 Section 1051, Part 90 Section 210
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.13.2

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that than that necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
  - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.


### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Highpass Filter	Anritsu	MP526B	6200220636	Jan. 20, 15	Jan. 31, 16
4	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
5	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16

## Measuring Equipment Configuration

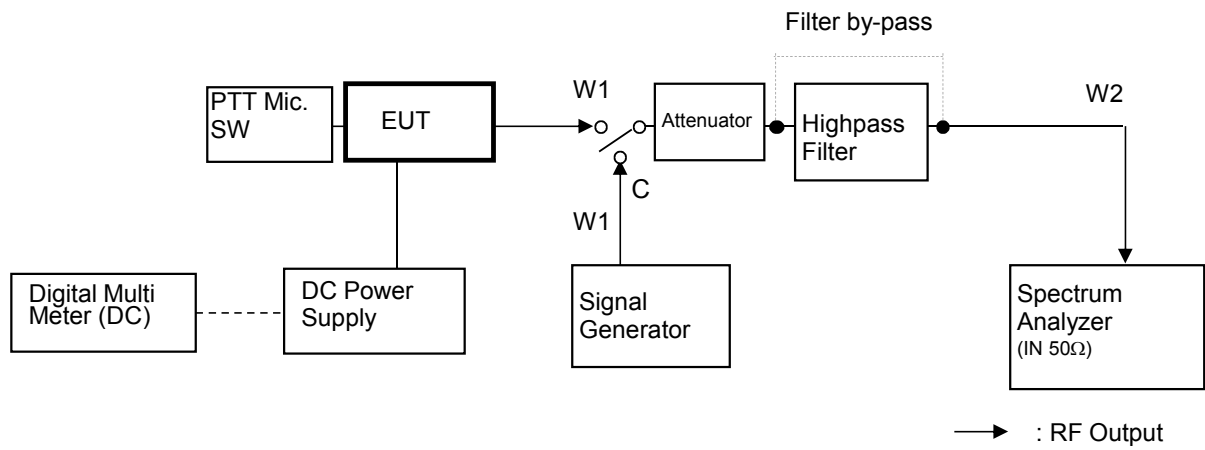

## Test Results

Test date	Apr 14, 2015	
Location	Kashimai No.1 Test Site	
temperature	20.0	[degree C]
Humidity Variation	55.0	[%]
Atmospheric Pressure	101.1	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 12.5 kHz (8K30F1E/F1D/F7W)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	150.05	Low	300.10	-40.90	<b>-87.89</b>	-67.0	20.9
2	162.05	Middle	324.10	-45.00	<b>-91.99</b>	-67.0	25.0
3	173.95	High	347.90	-39.00	<b>-85.99</b>	-67.0	19.0
There is the margin of 20dB over except for the above points.							

Mask D Limit (dBc) =  $-(50+10\log(P))$   
Correct Level (dBm) = Substitute SG Level (dBm)  
Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$   
P = Carrier Level (W)  
" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 12.5 kHz (8K30F1E/F1D/F7W)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	150.05	Low	300.10	-42.36	<b>-79.35</b>	-57.0	22.3
2	162.05	Middle	324.10	-46.60	<b>-83.59</b>	-57.0	26.6
3	173.95	High	347.90	-43.90	<b>-80.89</b>	-57.0	23.9
There is the margin of 20dB over except for the above points.							

Mask D Limit (dBc) =  $-(50+10\log(P))$   
Correct Level (dBm) = Substitute SG Level (dBm)  
Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$   
P = Carrier Level (W)  
" - " = Measurement Limit

### 7.3 Emission Masks (Occupied Bandwidth)

REGULATIONS	: FCC Part 2 Section 1049 (c) (1), Part 90 Section 210
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.11.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 For EUT supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for +/- 2.5 kHz deviation (or 50 % modulation). (FM modulation).
- 3 With level constant, the signal level was increased 16 dB.
- 4 For EUT supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- 5 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100Hz (Non modulation and Authorized Band 6 kHz),  
100Hz (Non modulation and Authorized Band 11.25 kHz),  
300Hz (Non modulation and Authorized Band 20 kHz).
  - b) VBW : 10times the RBW (Non modulation , Authorized Band 11.25 kHz and Authorized Band 20 kHz).
  - c) RBW and VBW : 30 kHz (Non Modulation / Digital Modulation).
- 6 The occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
4	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16

## Measuring Equipment Configuration

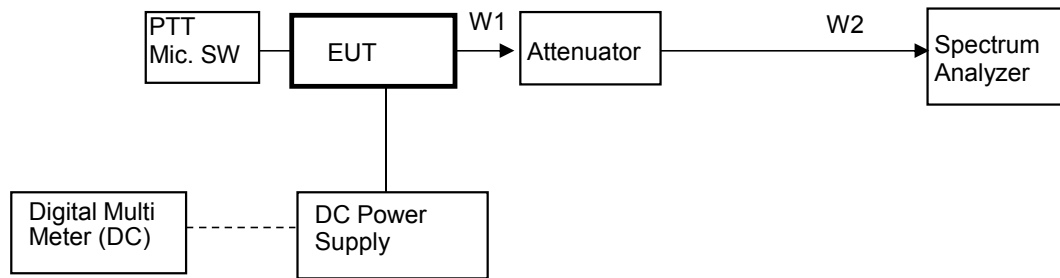

Note: Configuration of other Modulation test is composed without the Audio Generator.

→ : RF Output




## Test Results

Test date	Apr 14, 2015	
Location	Kashima No.1 Test Site	
temperature	20	[degree C]
Humidity Variation	58	[%]
Atmospheric Pressure	101.1	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W / 162.05 MHz

Limit : Mask D

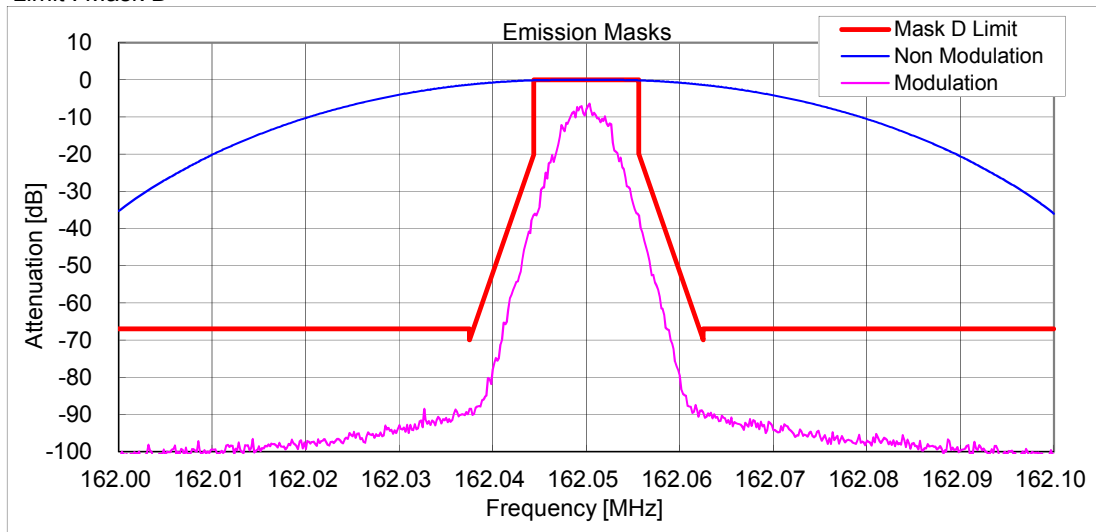

State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W / 162.05 MHz

Limit : Mask D

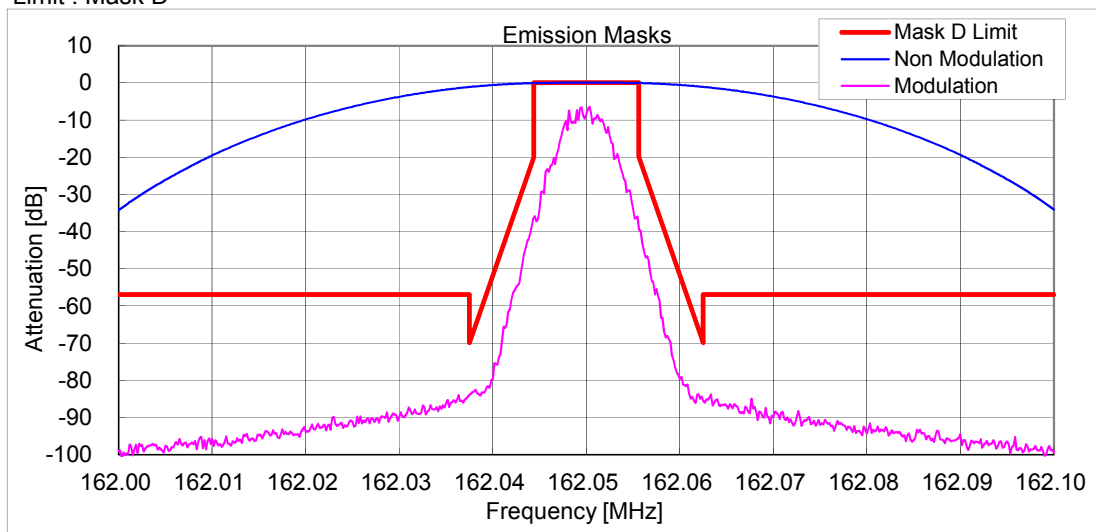

#### 7.4 Transient Frequency Behavior

REGULATIONS	: FCC Part 90 Section 214
TEST METHOD/GUIDE	: ANSI/TIA-603-D, Section 2.2.19.3

#### Test Procedure


- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The transmitter was turned on.
- 3 The transmitter carrier level was measured at the output of the combiner .
- 4 The transmitter was turned off.
- 5 An RF signal generator (1) modulated with a 1 kHz tone at either 25 kHz or 12.5 kHz or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -30 dB below the level recorded in Procedure 3, as measured at the output of the combiner.  
This level was then fixed for the remainder of the test and is recorded at step h.
- 6 The oscilloscope was setup using TIA-603 steps j and k as a guide, however 1000 Hz tone was adjusted at +- 2.5 /div vertically centered on the display.
- 7 The transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
- 8 The carrier on-time as referenced in TIA-603 steps m, n, and o was captured and plotted.
- 9 The carrier off-time as referenced in TIA-603 steps p, q, r, and s was captured and plotted.

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 03, 14	Jun. 30, 15
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 03, 14	Jun. 30, 15
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
4	Attenuator (3dB)	TME	CFA-20NPJ-3	679701	Jun. 23, 14	Jun. 30, 15
5	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
6	Step Attenuator	Hewlett Packard	8494B	272614515	Jan. 23, 15	Jan. 31, 16
7	Combiner(1)	Anritsu	Z-164A	M89249	Jan. 20, 15	Jan. 31, 16
8	Combiner(2)	Anritsu	Z-164A	M89549	Jan. 20, 15	Jan. 31, 16
9	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
10	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
11	Oscilloscope	Tektronix	TDS 680B	B010292	Jan. 30, 15	Jan. 31, 16
12	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
13	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00097	Jan. 23, 15	Jan. 31, 16
W5	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W3	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00041	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

### Measuring Equipment Configuration

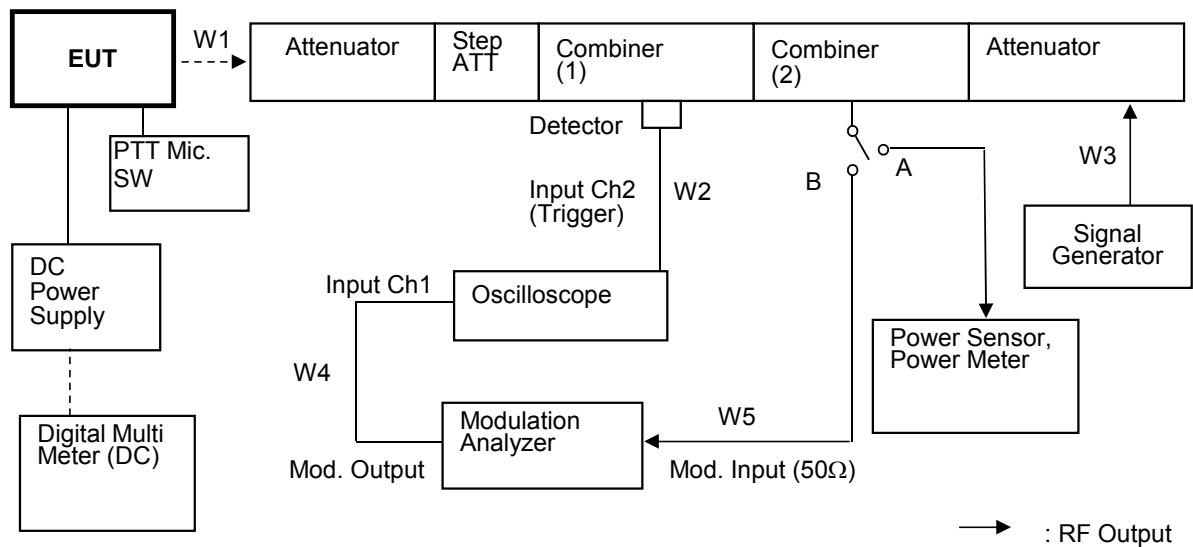


## Test Results


Test date	Apr 08, 2015	
Location	Kashima No.1 Test Site	
temperature	21	[degree C]
Humidity Variation	58	[%]
Atmospheric Pressure	102.3	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 162.05 MHz / PTT:OFF -ON

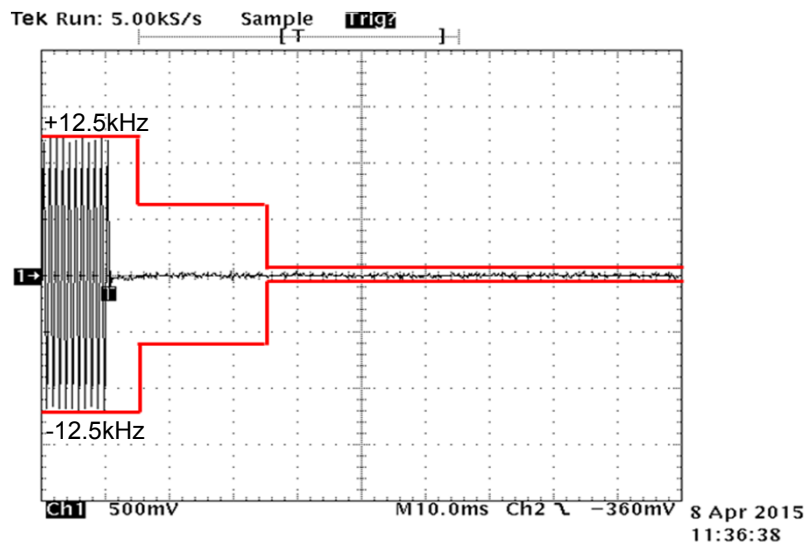

State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 162.05 MHz / PTT:ON -OFF

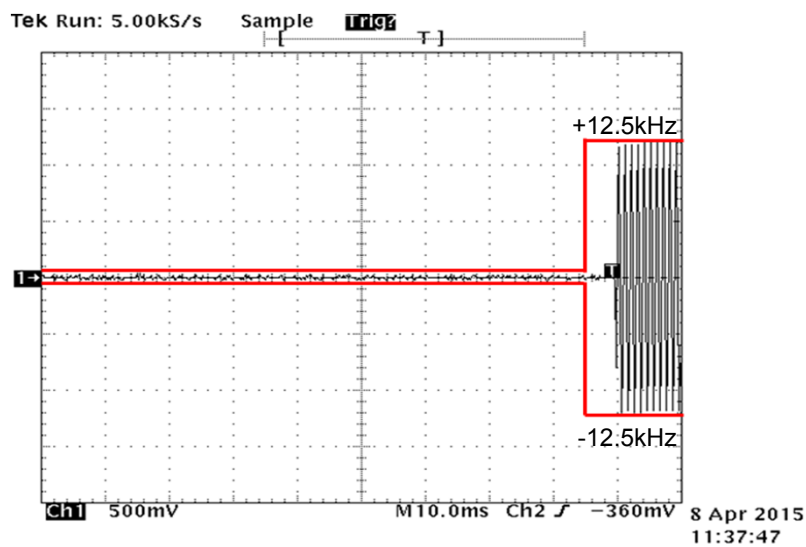

## 7.5 Necessary Bandwidth and Emission Bandwidth

REGULATIONS	: FCC Part 2 Section 202 (g) & Federal Register/ Vol.68, No236 TRC 43
-------------	--

### Calculation Results

State : 8K30F1E / 8K30F1D / 8K30F7W (4Level FSK / 9600bps, Authorized Bandwidth 11.25 kHz)

Item	Mark		
Digital information rate	(R)	9600	bps
Peak frequency deviation	(D)	3.391	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.516	
Necessary Bandwidth	(Bn)	8.3	kHz

$$Bn = (R/\log_2 S) + 2 \times D \times K$$