

TEST REPORT

For

HF/VHF/UHF All Mode Transceiver

In conformity with

FCC CFR 47 Part15 Subpart B

Model : FT-991

FCC ID : K6620575X50

Test Item : HF/VHF/UHF All Mode Transceiver

Report No. : ERY1410P23R3

Issue Date : 23 Oct. 2014

Prepared for

YAESU MUSEN CO., LTD.
Tennozu Parkside Building 2-5-8 Higashi-Shinagawa,
Shinagawa-ku, Tokyo 140-0002 JAPAN

Prepared by

SGS RF Technologies Inc.
472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan
Telephone: +81+(0)45- 534-0645
FAX: +81+(0)45- 534-0646

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS RF Technologies Inc. is managed to ISO17025 and has the necessary knowledge and test facilities for testing according to the referenced standards. The test results in this report apply only to the sample tested.

Table of contents

1	General information.....	4
1.1	Product description	4
1.2	Test(s) performed/ Summary of test result	4
1.3	Test facility	5
1.4	Measurement uncertainty.....	5
1.5	Summary of test results.....	6
1.6	Setup of equipment under test (EUT)	6
1.6.1	Test configuration of EUT	6
1.6.2	Operating condition:	6
1.6.3	Setup diagram of tested system.....	7
1.7	Equipment modifications	7
1.8	Deviation from the standard	7
2	Test procedure and test data	8
2.1	Radiated emissions	8
2.2	Conducted emissions for receiver	15
2.3	AC power line conducted emissions.....	17
3	Test setup photographs	21
3.1	Radiated emissions	21
3.2	AC power line conducted emissions.....	21
4	List of utilized test equipment / calibration	22

History

Report No.	Date	Revisions	Issued By
ERY1409P22R1	22 Sep. 2014	Initial Issue	T.Kato
ERY1410P23R3	23 Oct. 2014	Add the chart for radiated emission test (above 1GHz) in 118MHz operating condition. (Sec 2.1)	T.Kato
		Change the comment in test data (Sec 2.2)	T.Kato

1 General information

1.1 Product description

Test item	: HF/VHF/UHF All Mode Transceiver
Manufacturer	: YAESU MUSEN CO., LTD.
Address	: 43 Utsuroda, Morijuku, Sukagawa-shi, Fukushima-ken 962-0001 JAPAN
Model	: FT-991
FCC ID	: K6620575X50
Serial number	: SPP02
Software version	: V1.0
Hardware version	: V1.0
Operating frequency range	: HF band (0.03 - 56 MHz), VHF band (118 - 164 MHz), UHF band (420 - 470 MHz)
Highest internal operating Freq.	: 539.449995 MHz
Receipt date of EUT	: 01 Sep. 2014
Nominal power source voltages	: DC 13.8 V

1.2 Test(s) performed/ Summary of test result

Test specification(s)	: FCC CFR 47 Part 15 Subpart B (01 Oct. 2013)
Test method(s)	: ANSI C63.4: 2003
Test(s) started	: 09 Sep. 2014
Test(s) completed	: 16 Sep. 2014
Purpose of test(s)	: Certification

Summary of test result : Complied

Note: The above judgment is only based on the measurement data and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result.

The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory.

Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer

: 
T. Kato
EMC testing Department

Reviewer

: 
K. Onishi
Manager
EMC testing Department

1.3 Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at SGS RF Technologies Inc., located in 472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948, per October 1, 2013.

The description of the test facilities has been filed under registration number 319924 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at <http://www.fcc.gov>.

Registered by Industry Canada (IC): The registered facility number is as follows;

Test site No. 1 (Semi-Anechoic chamber 3m): 6974A-1

Accredited by **National Voluntary Laboratory Accreditation Program (NVLAP)** for the emission tests stated in the scope of the certificate under Certificate Number 200780-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB CODE 200780-0

1.4 Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in "Guide to the expression of uncertainty in measurement (GUM)" published by ISO. The Lab's uncertainty is determined by referring UKAS Publication LAB34: 2002 "The Expression of Uncertainty in EMC Testing" and CISPR16-4-2: 2011 "Uncertainty in EMC Measurements".

The uncertainty of the measurement result in the level of confidence of approximately 95% ($k=2$) is as follows;

Conducted emission: ± 3.4 dB (10 kHz - 30 MHz)

Radiated emission (9 kHz - 30 MHz): ± 3.8 dB

Radiated emission (30 MHz - 200 MHz): ± 5.0 dB

Radiated emission (200 MHz - 1000 MHz): ± 6.2 dB

1.5 Summary of test results

Requirement	Section in specification	Result	Section in this report
Radiated emissions (30 to 5000 MHz) (*)	15.109	Complied	2.1
Conducted emission for receiver	15.111	Complied	2.2
AC power line conducted emissions	15.107	Complied	2.3
38 dB Rejection (cellular band)	15.121 (b)	- (**)	-

(*) The highest internal operating frequency is 539.449995 MHz

(**) This item was not tested in this report.

1.6 Setup of equipment under test (EUT)

1.6.1 Test configuration of EUT

Equipment(s) under test

No.	Item	Manufacture	Model No.	Serial No.
A	Hf/VHF/UHF All Mode Transceiver	YAESU MUSEN CO., LTD.	FT-991	SPP02
-	-	-	-	-

Support Equipment(s)

No.	Item	Manufacture	Model No.	Serial No.
B	Microphone	YAESU MUSEN CO., LTD.	MH-31A8J	SPP02
C	Headphone	YAESU MUSEN CO., LTD.	YH-77STA	YTS03
D	Power Supply	YAESU MUSEN CO., LTD.	FP-1030A	1208137783

Connected cable(s)


No.	Item	Identification (Manu.etc.)	Cable Shielded	Ferrite Core	Length [m]
1	DC Power cable	YAESU MUSEN CO., LTD.	No	No	2.0
2	Mic. cable	YAESU MUSEN CO., LTD.	Yes	No	0.6
3	Phones cable	YAESU MUSEN CO., LTD.	Yes	No	1.8
4	KEY cable	YAESU MUSEN CO., LTD.	Yes	No	1.4
5	DATA cable	YAESU MUSEN CO., LTD.	Yes	No	1.6
6	REM cable	YAESU MUSEN CO., LTD.	Yes	No	1.0
7	EXT SPKR cable	YAESU MUSEN CO., LTD.	Yes	No	1.0
8	LINER cable	YAESU MUSEN CO., LTD.	Yes	No	0.6
9	CAT cable	YAESU MUSEN CO., LTD.	Yes	No	0.8
10	USB cable	YAESU MUSEN CO., LTD.	Yes	No	1.8
11	GND cable	YAESU MUSEN CO., LTD.	Yes	No	2.0

1.6.2 Operating condition:

- Rx 0.03 MHz (EUT is set to 0.03 MHz as low channel for HF band)
- Rx 30 MHz (Middle channel for HF band)
- Rx 55.999995 MHz (High channel for HF band)
- Rx 118 MHz (Low channel for VHF band)
- Rx 144 MHz (Middle channel for VHF band)
- Rx 163.999995 MHz (High channel for VHF band)
- Rx 420 MHz (Low channel for UHF band)
- Rx 430 MHz (Middle channel for UHF band)
- Rx 469.999995 MHz (High channel for UHF band)

Note: Operating frequency was selected by the manufacturer.

1.6.3 Setup diagram of tested system

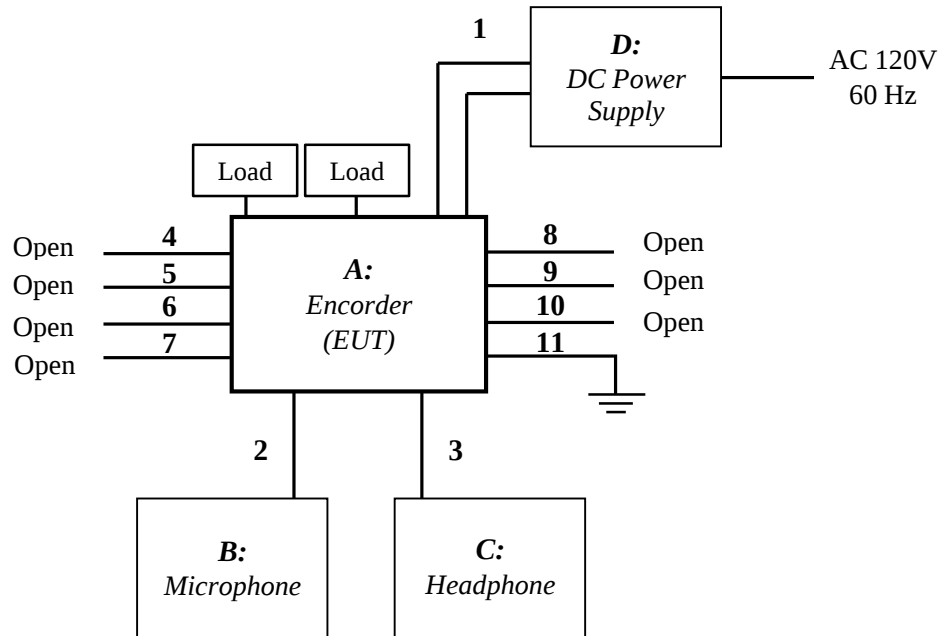

Note: The signal cable 4 to 10 were connected to no AE by a request from the manufacturer.
50 ohm terminals were connected to the antenna terminals (HF / VHF & UHF).

1.7 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the applicable standards described in clause 1.2.

1.8 Deviation from the standard


No deviations from the standards described in clause 1.2.

2 Test procedure and test data

2.1 Radiated emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4: 2003 clause 6 “General requirements for EUT equipment arrangements and operation”, clause 8.2 and Annex H.3 “Radiated emission measurements setup”.

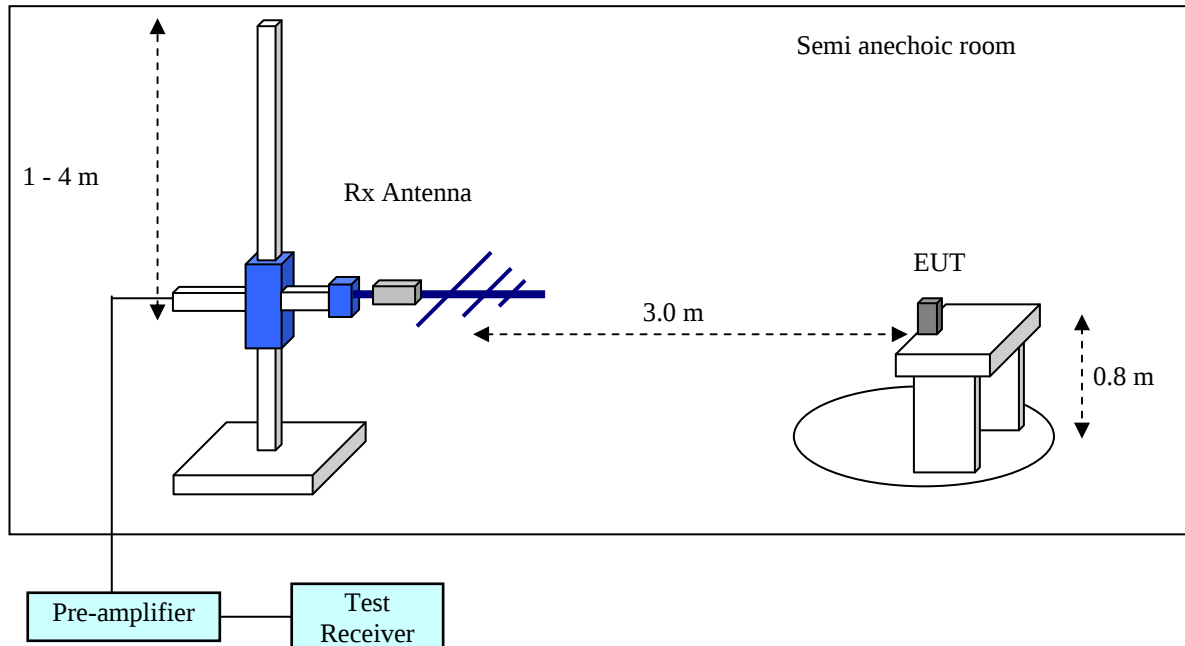

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4: 2003 clauses 8.2. The EUT is placed on a non-conductive table which is 0.8 m high from a ground plane and the measurement antenna to EUT distance is 3 meters. The turn table is rotated for 360 degrees to determine the maximum emission level.

The antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

The spectrum analyzer and receiver are set to the followings;

RBW=100 kHz (up to 1000 MHz) or 1 MHz (above 1000 MHz) ,

VBW= 300 kHz (up to 1000 MHz) or 3 MHz (above 1000 MHz)

Final measurement is carried out with a receiver RBW of 120 kHz (up to 1000 MHz), or 1 MHz (above 1000 MHz).

Applicable rule and limitation

FCC 15.109 Radiated emissions limits

Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measurement Distance [m]	Field Strength [dB $\mu\text{V/m}$]
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
Above 960	500	3	53.9

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a QP detector (up to 1000 MHz) or AVE/PEAK detector (above 1000 MHz).

Test results - Complied with requirement

Test equipment used (refer to List of utilized test equipment)

AC01(EM)	CL11	TR06	PR15	BA10	AC01(EG)	CL29
CL30	PR12	DH01				

Test software used

EMI Ver. 5.6

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] – Gain [dB]

Result [dBμV/m] = Reasding [dBμV] + Correction Factor [dB/m]

Test Data

Operating mode: Rx 0.03 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.9	10.3	8.6	29.9	38.9	43.5	4.6	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.5	19.3	10.6	29.5	43.9	46.0	2.1	Hori.
4	720.000	41.0	21.0	11.2	30.0	43.2	46.0	2.8	Hori.
5	864.000	40.2	22.7	11.9	30.4	44.4	46.0	1.6	Hori.
6	216.000	51.4	10.3	8.6	29.9	40.4	43.5	3.1	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1472.376	63.2	42.6	-9.2	54.0	33.4	73.9	53.9	19.9	20.5	Hori.
2	2943.703	56.7	37.4	-2.9	53.8	34.5	73.9	53.9	20.1	19.4	Hori.
3	4414.229	56.5	36.7	0.9	57.4	37.6	73.9	53.9	16.5	16.3	Hori.
4	1472.376	65.7	44.8	-9.2	56.5	35.6	73.9	53.9	17.4	18.3	Vert.
5	2943.503	60.3	40.0	-2.9	57.4	37.1	73.9	53.9	16.5	16.8	Vert.
6	4414.629	59.5	39.0	0.9	60.4	39.9	73.9	53.9	13.5	14.0	Vert.

Operating mode: Rx 30 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.7	10.3	8.6	29.9	38.7	43.5	4.8	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.3	19.3	10.6	29.5	43.7	46.0	2.3	Hori.
4	720.000	41.1	21.0	11.2	30.0	43.3	46.0	2.7	Hori.
5	864.000	40.3	22.7	11.9	30.4	44.5	46.0	1.5	Hori.
6	216.000	51.4	10.3	8.6	29.9	40.4	43.5	3.1	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1473.176	62.9	42.1	-9.2	53.7	32.9	73.9	53.9	20.2	21.0	Hori.
2	2945.303	57.0	37.3	-2.9	54.1	34.4	73.9	53.9	19.8	19.5	Hori.
3	4416.829	56.2	36.3	0.9	57.1	37.2	73.9	53.9	16.8	16.7	Hori.
4	1473.376	65.5	44.3	-9.2	56.3	35.1	73.9	53.9	17.6	18.8	Vert.
5	2945.103	60.2	39.7	-2.9	57.3	36.8	73.9	53.9	16.6	17.1	Vert.
6	4417.029	59.0	38.4	0.9	59.9	39.3	73.9	53.9	14.0	14.6	Vert.

Operating mode: Rx 55.999995 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.7	10.3	8.6	29.9	38.7	43.5	4.8	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.4	19.3	10.6	29.5	43.8	46.0	2.2	Hori.
4	720.000	40.9	21.0	11.2	30.0	43.1	46.0	2.9	Hori.
5	864.000	40.4	22.7	11.9	30.4	44.6	46.0	1.4	Hori.
6	216.000	51.4	10.3	8.6	29.9	40.4	43.5	3.1	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1473.576	62.8	41.9	-9.2	53.6	32.7	73.9	53.9	20.3	21.2	Hori.
2	2945.103	56.7	37.0	-2.9	53.8	34.1	73.9	53.9	20.1	19.8	Hori.
3	4417.429	56.7	37.0	0.9	57.6	37.9	73.9	53.9	16.3	16.0	Hori.
4	1473.576	65.4	44.2	-9.2	56.2	35.0	73.9	53.9	17.7	18.9	Vert.
5	2945.503	60.2	39.6	-2.9	57.2	36.7	73.9	53.9	16.7	17.2	Vert.
6	4417.429	59.0	38.2	0.9	59.9	39.1	73.9	53.9	14.0	14.8	Vert.

Operating mode: Rx 118 MHz


Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.7	10.3	8.6	29.9	38.7	43.5	4.8	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.4	19.3	10.6	29.5	43.8	46.0	2.2	Hori.
4	720.000	41.0	21.0	11.2	30.0	43.2	46.0	2.8	Hori.
5	864.000	40.3	22.7	11.9	30.4	44.5	46.0	1.5	Hori.
6	187.450	55.5	9.0	8.4	30.0	42.9	43.5	0.6	Vert.
7	216.000	51.4	10.3	8.6	29.9	40.4	43.5	3.1	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

No spurious was found.

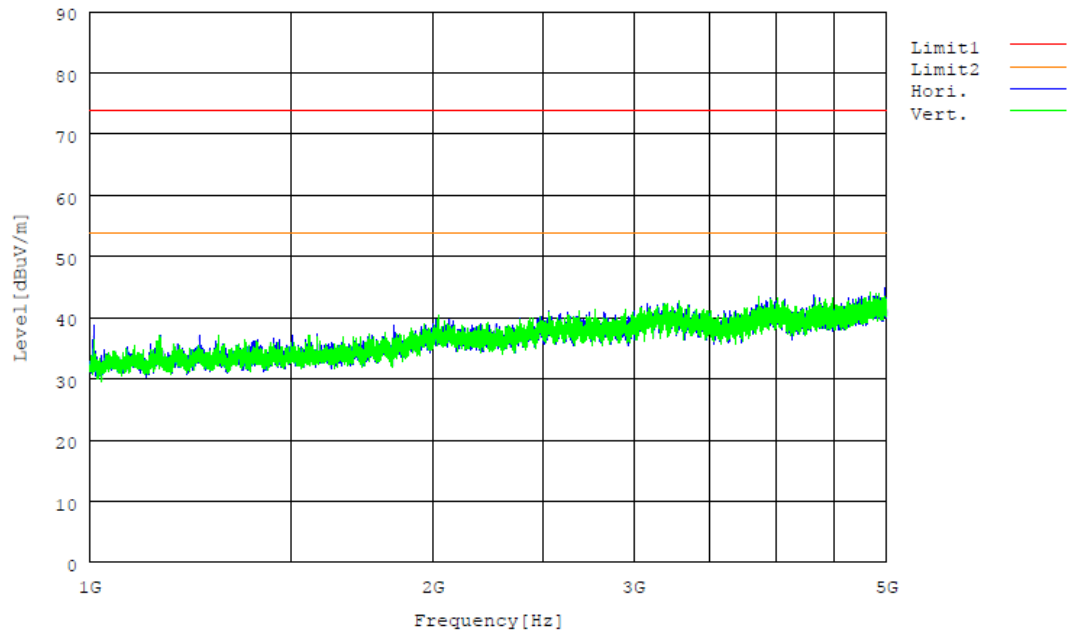

Operating mode: Rx 144 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.9	10.3	8.6	29.9	38.9	43.5	4.6	Hori.
2	360.000	49.1	15.0	9.5	29.9	43.7	46.0	2.3	Hori.
3	576.000	43.4	19.3	10.6	29.5	43.8	46.0	2.2	Hori.
4	720.000	41.0	21.0	11.2	30.0	43.2	46.0	2.8	Hori.
5	864.000	40.5	22.7	11.9	30.4	44.7	46.0	1.3	Hori.
6	213.450	45.6	10.1	8.6	29.9	34.2	43.5	9.3	Vert.
7	216.000	51.6	10.3	8.6	29.9	40.6	43.5	2.9	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1470.776	64.4	44.7	-9.3	55.1	35.4	73.9	53.9	18.8	18.5	Hori.
2	2939.503	55.7	37.3	-3.0	52.7	34.3	73.9	53.9	21.2	19.6	Hori.
3	4408.229	55.0	36.3	0.9	55.9	37.2	73.9	53.9	18.0	16.7	Hori.
4	1471.176	65.2	45.4	-9.3	55.9	36.1	73.9	53.9	18.0	17.8	Vert.
5	2939.703	58.4	39.3	-3.0	55.4	36.3	73.9	53.9	18.5	17.6	Vert.
6	4407.229	57.1	37.9	0.9	58.0	38.8	73.9	53.9	15.9	15.1	Vert.

Operating mode: Rx 163.999995 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.9	10.3	8.6	29.9	38.9	43.5	4.6	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.3	19.3	10.6	29.5	43.7	46.0	2.3	Hori.
4	720.000	41.0	21.0	11.2	30.0	43.2	46.0	2.8	Hori.
5	864.000	40.4	22.7	11.9	30.4	44.6	46.0	1.4	Hori.
6	216.000	51.6	10.3	8.6	29.9	40.6	43.5	2.9	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1465.977	66.0	43.6	-9.3	56.7	34.3	73.9	53.9	17.2	19.6	Hori.
2	2929.104	57.8	36.8	-3.0	54.8	33.8	73.9	53.9	19.1	20.1	Hori.
3	4391.630	57.0	35.4	0.9	57.9	36.3	73.9	53.9	16.0	17.6	Hori.
4	1465.377	66.6	43.9	-9.3	57.3	34.6	73.9	53.9	16.6	19.3	Vert.
5	2928.504	60.9	38.8	-3.0	57.9	35.8	73.9	53.9	16.0	18.1	Vert.
6	4391.831	58.6	36.6	0.9	59.5	37.5	73.9	53.9	14.4	16.4	Vert.

Operating mode: Rx 420 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.8	10.3	8.6	29.9	38.8	43.5	4.7	Hori.
2	360.000	49.3	15.0	9.5	29.9	43.9	46.0	2.1	Hori.
3	576.000	43.4	19.3	10.6	29.5	43.8	46.0	2.2	Hori.
4	720.000	41.1	21.0	11.2	30.0	43.3	46.0	2.7	Hori.
5	864.000	40.5	22.7	11.9	30.4	44.7	46.0	1.3	Hori.
6	216.000	51.6	10.3	8.6	29.9	40.6	43.5	2.9	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1468.350	57.1	53.9	-9.3	47.8	44.6	73.9	53.9	26.1	9.3	Hori.
2	1478.776	63.3	46.1	-9.2	54.1	36.9	73.9	53.9	19.8	17.0	Hori.
3	2955.302	54.1	37.3	-2.8	51.3	34.5	73.9	53.9	22.6	19.4	Hori.
4	4432.428	53.2	36.3	0.9	54.1	37.2	73.9	53.9	19.8	16.7	Hori.
5	1468.350	58.4	55.7	-9.3	49.1	46.4	73.9	53.9	24.8	7.5	Vert.
6	1478.176	63.6	46.2	-9.2	54.4	37.0	73.9	53.9	19.5	16.9	Vert.
7	2955.502	57.0	39.9	-2.8	54.2	37.1	73.9	53.9	19.7	16.8	Vert.
8	4432.828	56.9	39.0	0.9	57.8	39.9	73.9	53.9	16.1	14.0	Vert.

Operating mode: Rx 430 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.8	10.3	8.6	29.9	38.8	43.5	4.7	Hori.
2	360.000	49.3	15.0	9.5	29.9	43.9	46.0	2.1	Hori.
3	576.000	43.6	19.3	10.6	29.5	44.0	46.0	2.0	Hori.
4	720.000	41.0	21.0	11.2	30.0	43.2	46.0	2.8	Hori.
5	864.000	40.3	22.7	11.9	30.4	44.5	46.0	1.5	Hori.
6	216.000	51.6	10.3	8.6	29.9	40.6	43.5	2.9	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1475.976	63.1	45.1	-9.2	53.9	35.9	73.9	53.9	20.0	18.0	Hori.
2	1498.350	60.0	55.9	-9.0	51.0	46.9	73.9	53.9	22.9	7.0	Hori.
3	2949.302	53.7	36.8	-2.9	50.8	33.9	73.9	53.9	23.1	20.0	Hori.
4	4424.629	53.7	36.5	0.9	54.6	37.4	73.9	53.9	19.3	16.5	Hori.
5	1475.976	64.0	45.8	-9.2	54.8	36.6	73.9	53.9	19.1	17.3	Vert.
6	1498.350	59.2	56.3	-9.0	50.2	47.3	73.9	53.9	23.7	6.6	Vert.
7	2950.103	56.4	39.1	-2.9	53.5	36.2	73.9	53.9	20.4	17.7	Vert.
8	2969.700	49.7	38.3	-2.5	47.2	35.8	73.9	53.9	26.7	18.1	Vert.
9	3499.275	51.6	33.6	-1.5	50.1	32.1	73.9	53.9	23.8	21.8	Vert.
10	4423.829	56.1	38.4	0.9	57.0	39.3	73.9	53.9	16.9	14.6	Vert.

Operating mode: Rx 469.999995 MHz

Range: 30 - 1000 MHz



No.	Frequency [MHz]	Reading [dBμV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Ant.
1	216.000	49.8	10.3	8.6	29.9	38.8	43.5	4.7	Hori.
2	360.000	49.2	15.0	9.5	29.9	43.8	46.0	2.2	Hori.
3	576.000	43.3	19.3	10.6	29.5	43.7	46.0	2.3	Hori.
4	720.000	41.2	21.0	11.2	30.0	43.4	46.0	2.6	Hori.
5	864.000	40.3	22.7	11.9	30.4	44.5	46.0	1.5	Hori.
6	216.000	51.5	10.3	8.6	29.9	40.5	43.5	3.0	Vert.

Range: 1000 - 5000 MHz

No.	Frequency [MHz]	Reading PK [dBμV]	Reading AVE [dBμV]	C.Factor [dB/m]	Result PK [dBμV/m]	Result AVE [dBμV/m]	Limit PK [dBμV/m]	Limit AVE [dBμV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1463.977	66.9	43.2	-9.3	57.6	33.9	73.9	53.9	16.3	20.0	Hori.
2	2926.904	57.9	36.5	-3.1	54.8	33.4	73.9	53.9	19.1	20.5	Hori.
3	4388.630	57.4	34.8	0.9	58.3	35.7	73.9	53.9	15.6	18.2	Hori.
4	1465.177	67.4	43.5	-9.3	58.1	34.2	73.9	53.9	15.8	19.7	Vert.
5	2926.504	60.9	38.4	-3.1	57.8	35.3	73.9	53.9	16.1	18.6	Vert.
6	4388.031	58.7	35.8	0.9	59.6	36.7	73.9	53.9	14.3	17.2	Vert.

[Chart]

Operating mode: Rx 430 MHz

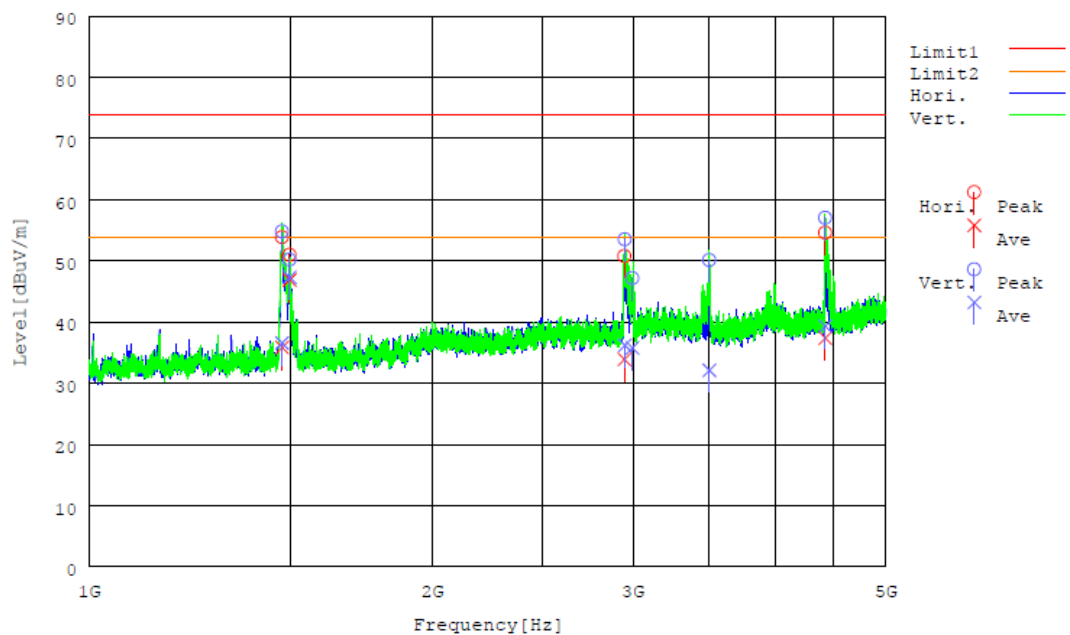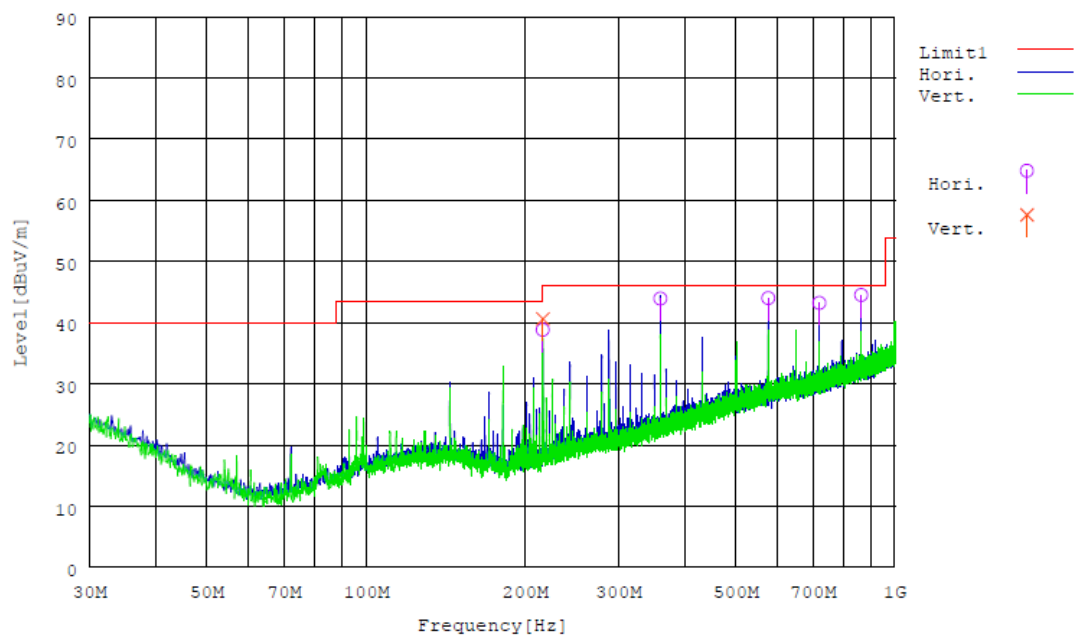

[Test condition]

30 - 1000 MHz

Tested Date: 12 Sep. 2014
Humidity: 67 %

Temperature: 23 degC
Atmos. Press: 1011 hPa


1000 - 5000 MHz

Tested Date: 09 Sep. 2014
Humidity: 63 %

Temperature: 21 degC
Atmos. Press: 1006 hPa

2.2 Conducted emissions for receiver

Test setup



Applicable rule and limitation

§15.111 (b) Antenna power conducted limit : 2 nW (= -57 dBm)

Test equipment used (refer to List of utilized test equipment)

TR09		
------	--	--

Test results - Complied with requirement

Test Data

[The maximum spurious level at each antenna port]

ANT port	Operating freq. [MHz]	Frequency range 30 - 1000 MHz		Frequency range 1000 - 5000 MHz	
		Freq. [MHz]	Level [dBm]	Freq. [MHz]	Level [dBm]
HF	0.03	69.479	-80.7 (P)	4368.800	-72.1/-52.5
	30	-	-	4370.400	-72.7/-53.2
	55.999995	125.448	-80.8 (P)	4372.800	-70.8/-53.7
	118	-	-	-	-
	144	60.548	-82.4 (P)	4372.800	-72.7/-53.9
	163.999995	60.361	-82.8 (P)	4356.000	-70.7/-51.3
	420	489.489	-78.4 (P)	4390.400	-72.3/-55.6
	430	499.480	-77.5 (P)	4386.400	-73.3/-58.7
VHF/UHF	469.999995	288.020	-81.9 (P)	4369.600	-72.9/54.9
	0.03	69.479	-82.2 (P)	2915.200	-77.5/-56.8
	30	99.452	-82.2 (P)	2917.672	-78.3/-58.1
	55.999995	125.448	-80.8 (P)	2917.662	-78.4/-57.2
	118	187.431	-79.5 (P)	-	-
	144	-	-	2912.769	-78.5/-59.1
	163.999995	-	-	2904.851	-79.0/-57.3
	420	489.489	-69.1 (P)	2930.492	-79.1/-61.6
	430	499.480	-72.6 (P)	2929.487	- /-64.8
	469.999995	528.968	-79.6 (P)	2908.031	-79.7/-59.3




Note

(P) : Spurious level by peak detector is lower than limit for average detector, so average measurement was omitted.

AA/BB : A is the result by average detector, B is the result by peak detector.

[Chart]

Ant Port: VHF/UHF port
Operating mode: Rx 430 MHz

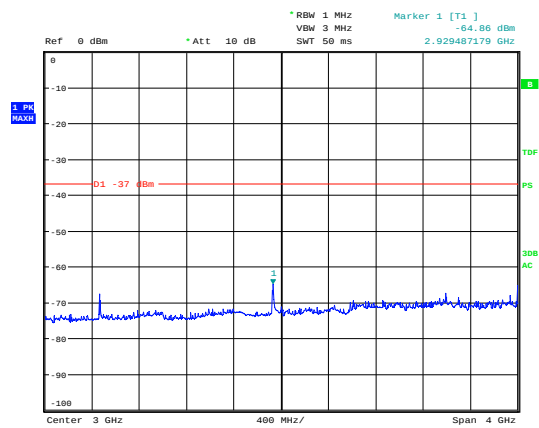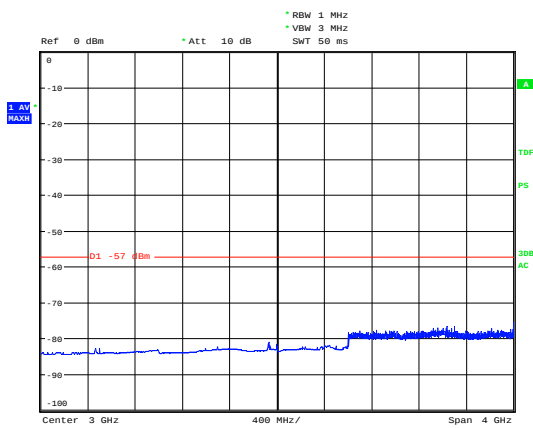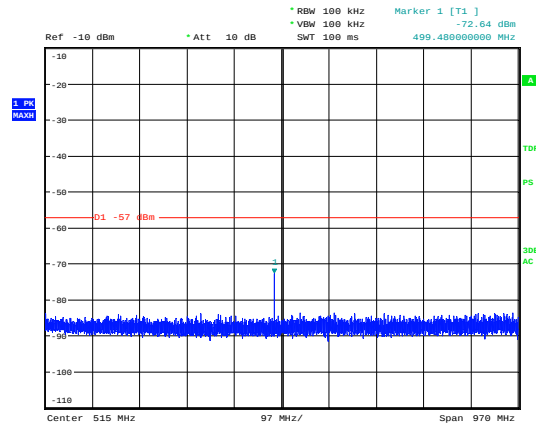

[Test condition]

Tested Date: 16 Sep. 2014
Humidity: 56 %

Temperature: 23 degC
Atmos. Press: 1011 hPa

2.3 AC power line conducted emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4: 2003 clause 6 “General requirements for EUT equipment arrangements and operation” and Annex H.1 “AC power line conducted emission measurements setup”.

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4: 2003 clauses 7, clause 13.1.3 and Annex H.2 “AC power line conducted emission measurements”.

Exploratory measurements were used the spectrum analyzer to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement.

Final ac power line conducted emission measurements were performed based on the exploratory tests.

The EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit are selected for the final measurement.

When the measurement value is greater than average limitation the average detection measurements were performed.

Applicable rule and limitation

§15.107 (b) AC power line conducted limits

Frequency of Emission [MHz]	Conducted emissions Limit [dBμV]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency. The lower limit applies at the band edges.

Test equipment used (refer to List of utilized test equipment)

TR09	LN05	CL18
------	------	------

Test software used

EMI Ver. 5.6

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB]

Result [dBμV] = Reading [dBμV] + Correction Factor [dB]

Test results - Complied with requirement

Test Data

[Emission level]

Operating mode: Rx 0.03 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]		
1	0.15444	21.3	0.1	10.3	31.6	10.4	65.8	55.8	Va	Pass
2	0.15037	22.2	0.4	10.3	32.5	10.7	66.0	56.0	Vb	Pass
3	18.65467	7.2	0.6	10.5	17.7	11.1	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 30 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]		
1	0.15222	22.1	0.3	10.3	32.4	10.6	65.9	55.9	Va	Pass
2	0.15074	22.4	0.4	10.3	32.7	10.7	66.0	56.0	Vb	Pass
3	18.76025	7.9	0.8	10.5	18.4	11.3	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 55.999995 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]		
1	0.15555	21.4	0.1	10.3	31.7	10.4	65.7	55.7	Va	Pass
2	0.15777	20.6	0.1	10.3	30.9	10.4	65.6	55.6	Vb	Pass
3	19.12977	8.3	0.8	10.5	18.8	11.3	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 118 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]		
1	0.15370	21.1	0.1	10.3	31.4	10.4	65.8	55.8	Va	Pass
2	0.15185	21.9	0.2	10.3	32.2	10.5	65.9	55.9	Vb	Pass
3	19.47730	7.0	-0.1	10.5	17.5	10.4	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 144 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]		
1	0.15296	21.7	0.2	10.3	32.0	10.5	65.8	55.8	Va	Pass
2	0.15037	22.5	0.5	10.3	32.8	10.8	66.0	56.0	Vb	Pass
3	18.97581	8.2	1.9	10.5	18.7	12.4	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 163.999995 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dBμV]	AV [dBμV]		QP [dBμV]	AV [dBμV]	QP [dBμV]	AV [dBμV]		
1	0.15000	22.8	0.7	10.3	33.1	11.0	66.0	56.0	Va	Pass
2	0.15037	22.3	0.4	10.3	32.6	10.7	66.0	56.0	Vb	Pass
3	18.84383	7.6	0.6	10.5	18.1	11.1	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 420 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dBμV]	AV [dBμV]		QP [dBμV]	AV [dBμV]	QP [dBμV]	AV [dBμV]		
1	0.15074	22.4	0.5	10.3	32.7	10.8	66.0	56.0	Va	Pass
2	0.15074	22.5	0.4	10.3	32.8	10.7	66.0	56.0	Vb	Pass
3	18.78224	7.8	1.2	10.5	18.3	11.7	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

Operating mode: Rx 430 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dBμV]	AV [dBμV]		QP [dBμV]	AV [dBμV]	QP [dBμV]	AV [dBμV]		
1	0.15074	22.5	0.5	10.3	32.8	10.8	66.0	56.0	Va	Pass
2	0.15074	22.3	0.4	10.3	32.6	10.7	66.0	56.0	Vb	Pass
3	19.02419	7.8	1.0	10.5	18.3	11.5	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.


Operating mode: Rx 469.999995 MHz

No.	Frequency [MHz]	Reading		C.F. [dB]	Result		Limit		Phase	Pass/Fail
		QP [dBμV]	AV [dBμV]		QP [dBμV]	AV [dBμV]	QP [dBμV]	AV [dBμV]		
1	0.15074	22.4	0.4	10.3	32.7	10.7	66.0	56.0	Va	Pass
2	0.15111	22.3	0.4	10.3	32.6	10.7	65.9	55.9	Vb	Pass
3	18.79104	8.1	1.8	10.5	18.6	12.3	60.0	50.0	Vb	Pass

Other emissions have more than 20 dB margin.

[Chart]

Operating mode: Rx 430 MHz

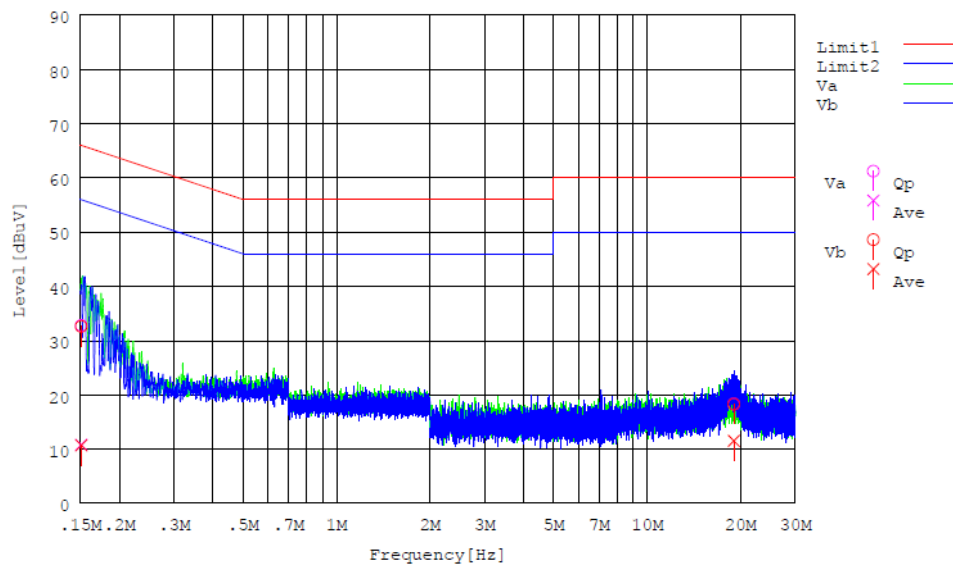

[Test condition]

Tested Date: 16 Sep. 2014
Humidity: 56 %

Temperature: 23 degC
Atmos. Press: 1011 hPa

4 List of utilized test equipment / calibration

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AC01(EM)	Anechoic Chamber (1st test room)	JSE	203397C	-	2014/4/26	2015/4/30
AC01(EG)	Anechoic Chamber (1st test room)	JSE	203397C	-	2013/11/23	2014/11/30
BA10	Biological Antenna	TESEQ	CBL6111D	32342	2014/6/9	2015/6/30
CL11	Antenna Cable for RE	RFT	-	-	2014/3/31	2015/3/31
CL18	Antenna Cable for CE	RFT	-	-	2014/4/18	2015/4/30
CL29	RF Cable 2 m	SUHNER	SUCOFLEX104PE	94709	2014/1/21	2015/1/31
CL30	RF Cable 5 m	SUHNER	SUCOFLEX104PE	MY3599	2014/8/28	2015/8/31
DH01	DRG Horn Antenna	A.H. Systems	SAS-571	785	2014/1/21	2016/1/31
LN05	LISN	Kyoritsu	KNW-407F	8-1773-2	2014/5/22	2015/5/31
PR12	Pre. Amplifier (1-26G)	Agilent Technologies	8449B	3008A02513	2014/1/21	2015/1/31
PR15	Pre. Amplifier	Anritsu	MH648A	6201156141	2014/6/10	2015/6/30
TR06	Test Receiver (F/W : 3.93 SP2)	Rohde & Schwarz	ESU26	100002	2014/9/5	2015/9/30
TR09	Test Receiver (F/W : 4.43 SP3)	Rohde & Schwarz	ESU8	100386	2014/2/4	2015/2/28

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.