



TEST REPORT

Test report no.: 1-0512/20-01-05

BNetzA-CAB-02/21-102

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

HONEYWELL, SPOL. S R.O. Honeywell Aerospace

Turanka 100/1387

62700 Brno / CZECH REPUBLIC

Phone:

Contact: Kevin Watson

e-mail: kevin.watson@honeywell.com

Phone:

Manufacturer

HONEYWELL, SPOL. S R.O. Honeywell Aerospace

Turanka 100/1387

62700 Brno / CZECH REPUBLIC

Test standard/s

47 CFR Part 25

Title 47 of the Code of Federal Regulations; Chapter I; Part 25 - Satellite Communications

47 CFR Part 87

Title 47 of the Code of Federal Regulations; Chapter I; Part 87 - Aviation Services

RSS - 170 Issue 3

Mobile Earth Stations (MESs) and Ancillary Terrestrial Component (ATC) Equipment Operating in the Mobile-Satellite Service (MSS) Bands

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Satcom Transceiver

Model name: Small UAV SATCOM

FCC ID: K6KSMALLSATCOM

IC: 1275B-SMALLSATCOM

Frequency: RX: 1518.0 MHz – 1559.0 MHz
TX: 1626.5 MHz – 1660.5 MHz

Antenna: Omni-directional LGA active antenna

Power supply: 27 V to 30 V DC

Temperature range: -40°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Thomas Vogler
Lab Manager
Radio Communications & EMC

Test performed:

Meheza Walla
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	List of components	6
6.3	Antenna system(s)	7
6.4	Operating conditions	7
6.5	Additional information	7
7	Sequence of testing	8
7.1	Sequence of testing radiated spurious 30 MHz to 1 GHz	8
7.2	Sequence of testing radiated spurious 1 GHz to 18 GHz	9
8	Description of the test setup	10
8.1	Shielded fully anechoic chamber	11
8.2	Conducted measurements (RF-Laboratory)	12
9	Measurement results	13
9.1	Summary	13
9.2	Overview	14
10	Glossary	26
11	Document history	27
12	Accreditation Certificate – D-PL-12076-01-04	27
13	Accreditation Certificate – D-PL-12076-01-05	28

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2020-06-18
Date of receipt of test item:	2020-10-26
Start of test:*	2020-10-26
End of test:*	2020-11-10
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.





2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
47 CFR Part 25		Title 47 of the Code of Federal Regulations; Chapter I; Part 25 - Satellite Communications
47 CFR Part 87		Title 47 of the Code of Federal Regulations; Chapter I; Part 87 - Aviation Services
RSS - 170 Issue 3	07-2015	Mobile Earth Stations (MESs) and Ancillary Terrestrial Component (ATC) Equipment Operating in the Mobile-Satellite Service (MSS) Bands


Guidance	Version	Description
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices
ANSI C63.4-2017	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Accreditation	Description	
D-PL-12076-01-04	Telecommunication and EMC Canada https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf	  Deutsche Akkreditierungsstelle D-PL-12076-01-04
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf	  Deutsche Akkreditierungsstelle D-PL-12076-01-05

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3. The measurement uncertainty is mentioned in this test report, see chapter 7, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

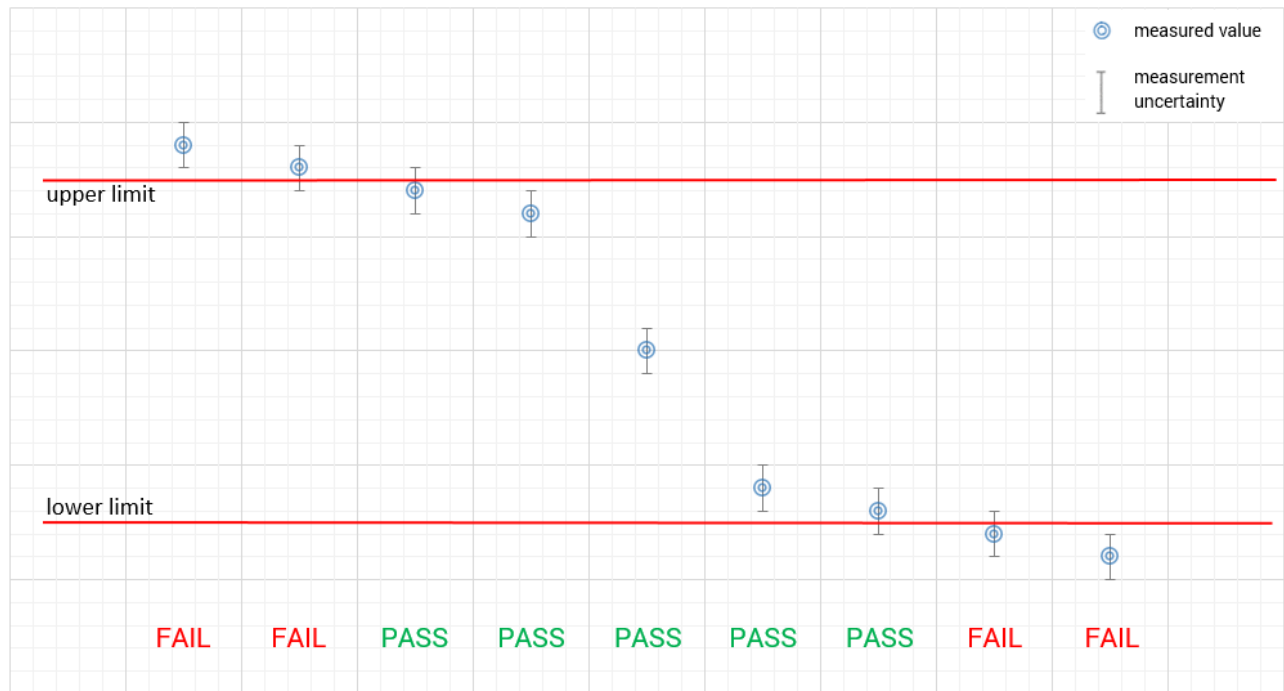

5 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests +55 °C during high temperature tests -40 °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	V_{nom} V_{max} V_{min}	28 V DC 30 V 27 V

6 Test item

6.1 General description

Kind of test item	:	Satcom Transceiver
Model name	:	Small UAV SATCOM
HMN	:	-/-
PMN	:	SMALLSATCOM
HVIN	:	SMALLSATCOM
FVIN	:	-/-
S/N serial number	:	000004
Hardware status	:	90600511
Software status	:	LI-90609184
Frequency band	:	RX: 1518.0 MHz – 1559.0 MHz TX: 1626.5 MHz – 1660.5 MHz
Type of radio transmission	:	FDMA/TDMA/FDD
Use of frequency spectrum	:	
Type of modulation	:	QPSK, 16 – QAM
Channel Bandwidth	:	21 ~ 190 kHz
Type of radio transmission	:	G1W, D1W
TX output power cond.	:	38.8 dBm (measured value)
TX output powered rad. (EIRP)	:	40.6 dBm (calculated value)
Antenna	:	Omni-directional LGA active antenna
Antenna Gain	:	1.37 dBic @ 1625 MHz / 1.21 dBic @ 1675 MHz
Power supply	:	27 V to 30 V DC
Temperature range	:	-40°C to +55°C

6.2 List of components

No.	Equipment	Manufacturer	(Part number / version / model)	Serial number	Software version	tested (Y/N)
1	Small SATCOM SDU	Honeywell	90600511	000004	-/-	Y
2	Amplifier AMP1595-113	Aeroantenna Technology, Inc.	AMP1595-113	3006	-/-	Y
3	Physical Layer tester	Square PEG Communications	PLTM-02	02052	-/-	N

6.3 Antenna system(s)

Description	PN	Polarization	Gain	Datasheet / Pattern / Test Report
BendixKing Aerowave 100	89000015-009	Omni-directional	1.37 dBic @ 1625 MHz 1.21 dBic @ 1675 MHz	-/-

Note:

Verification of Antenna pattern or antenna test reports is not part of this test report.
Above listed antennas should be compliant to test standard(s) listed under section 3!

6.4 Operating conditions

Operating condition 1: 1.643.... GHz (=fm*, 1.626 6 GHz=fl, 1.660 4 GHz=fh)

Operating condition 2: TX-Off

Operation condition 3: Continuous wave (for frequency stability tests)

* fm varying due to different bearer types and different modulations (see table below)

Note: fl = lowest operating frequency, fm = middle frequency of the band, fh = highest operating frequency

#	Bearer Identifier	Systems designator
1	R5T1XD	50K0D1W
2	R5T2XD	100KD1W
3	R5T4.5XD	200KD1W
4	R20T1XD	50K0D1W
5	R20T2XD	100KD1W
6	R20T4.5XD	200KD1W
7	R5T2QD	100KG1W
8	R5T4.5QD	200KG1W
9	R20T0.5QD	25K0G1W
10	R20T1QD	50K0G1W
11	R20T2QD	100KG1W
12	R20T4.5QD	200KG1W

6.5 Additional information

EUT external photos are included in test report: 1-0512/20-01-01_AnnexA

EUT internal photos are included in test report: 1-0512/20-01-01_AnnexB

Test setup photos are included in test report: 1-0512/20-01-01_AnnexD

Measurement results are included in test report 1-0512/20-01-01_AnnexE

7 Sequence of testing

7.1 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.2 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8 Description of the test setup


Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

8.1 Shielded fully anechoic chamber

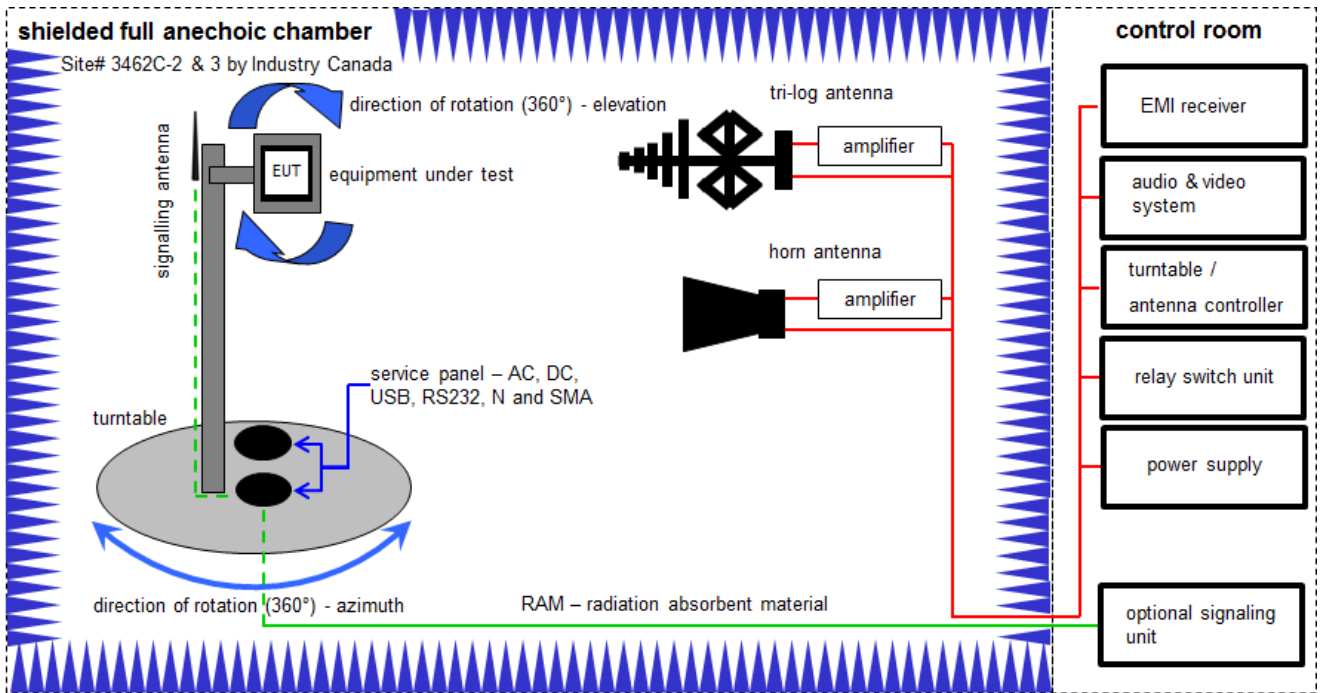

Measurement distance: tri-log antenna and horn antenna 3 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 \mu W)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
2	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIK!	27.02.2019	26.02.2021
3	n. a.	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
4	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev	-/-	-/-
5	n. a.	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2019	10.12.2020
6	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vIK!	19.02.2019	18.02.2021
7	n. a.	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
8	n. a.	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
9	n. a.	NEXIO EMV-Software	BAT EMC V3.19.1.21	EMCO		300004682	ne	-/-	-/-
10	n. a.	PC	ExOne	F+W		300004703	ne	-/-	-/-
11	n. a.	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-

8.2 Conducted measurements (RF-Laboratory)

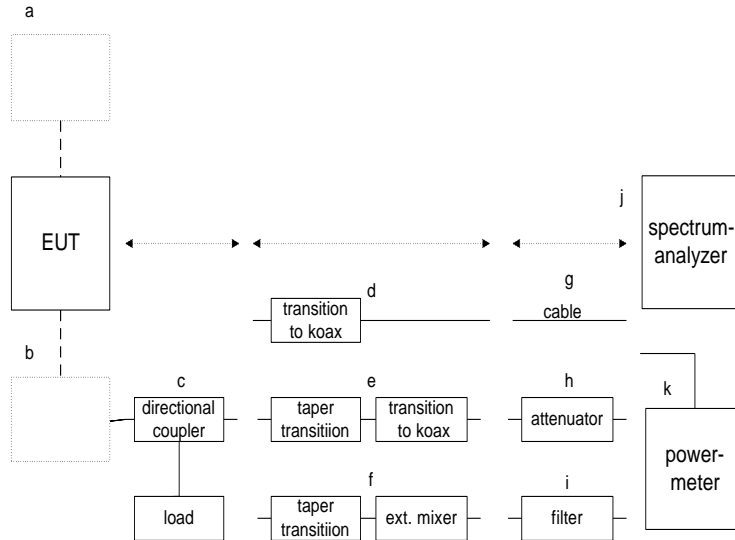

Setup 1.1 x..x

For inband measurements: hgj + hgk
(10 dB + 10 dB att + power splitter + 6dB att + cable and analyzer or power meter)
([U330 = U311 + 10ATT+PS + 6 dB] + C220)

For out-of-band and spurious measurements: higj
(10 dB + 10 dB att + power splitter + 6dB att + cable + band reject filter and analyzer)
([U331 = U311 + 10ATT+PS + BRF + 6 dB] + C220)

For spurious measurements > 3 GHz: higj:
(10 dB + 10 dB att + power splitter + 6dB att + cable + high pass filter and analyzer)
([U332 = U311 + 10ATT+PS + HPF + 6 dB] + C220)

RF-Laboratory Equipment:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No	Kind of Calibration	Last Calibration	Next Calibration
1	C220	HF-Cable	SUCOFLEX 101	Huber&Suhner	3054/1		ev	-/-	-/-
2	U311	High Power Attenuator 10 dB	WA-91-10-34	Weinschel	A244	300004265	ev	-/-	-/-
3	PS	Power splitter	11667B	HP	00621	300000193	ev	-/-	-/-
4	n. a.	Power Meter	438A	HP	2804U01015	300000357	vIKI!	12.12.2019	11.12.2021
5	n. a.	Power Sensor, 10MHz to 26.5GHz, -30 to +20 dBm	8485A	HP	2238A00798	300000511	vIKI!	18.12.2018	17.12.2020
6	R001	Spectrum Analyzer 20Hz - 50GHz	FSU50	R&S	200012	300003443	k	19.02.2019	18.02.2021
7	n. a.	Temperature and Climatic Test Chamber	VT4011	Voetsch	58566230600010	300005363	ev	08.05.2020	07.05.2022
8	HPF	High Pass Filter	SHC2600/12750-1.5-KK	Trilithic INC.	9833011	400001484	ev	-/-	-/-
9	BRF	Band Reject Filter	WRCGV14-1616-1626-1661-1671-70SS	Wainwright	1	300005614	ev	-/-	-/-
10	10ATT	Attenuator 10dB / 5W	MCL BW-N10W	Mini Circuits	1143	---	ev	-/-	-/-

9 Measurement results

9.1 Summary

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input checked="" type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR 47 Part 25 CFR 47 Part 87	see below	2020-11-30	-/-

Test Specification Clause	Test Case	Pass	Fail	N/A	N/P	Results
§2.1046 §25.204 §87.131 RSS-170, 5.3.2	RF power output Power limits	X				11.5 dBW (EIRP)
§2.1049 §87.139 (i)(3)	Emissions masks	X				complies
§2.1049 §87.135 RSS-170, 5.1	Occupied bandwidth	X				170 kHz
§2.1051 §25.202 §87.139 (a) §87.139 (i)(1) RSS-170, 5.4.3.1	Spurious emissions at antenna terminals Emission limitations (conducted emissions)	X				complies
§2.1053 §25.202	Field strength of spurious radiation Emission limitations (radiated emissions)	X				complies
§25.216/ RSS-170, 5.4.3.2 & 5.4.4	Limits on emissions from mobile earth stations for protection of aeronautical radionavigation- satellite service / Carrier-Off State Emissions	X				complies
§2.1055 §25.202 §87.133 (a) RSS-170, 5.2	Frequency stability Frequency tolerances		X			FAIL
§15.107	Unintentional Radiators: AC conducted limits			X		DC powered
§15.109	Unintentional Radiators: Radiated emission limits	X				Refer to 1-0512_20-01-06.pdf

Note:

N/A = Not applicable; N/P = Not performed

9.2 Overview

I.	RF power output / Power limits.....	15
II.	Emission masks	17
III.	Occupied bandwidth	18
IV.	Emissions limitations (conducted emissions)	19
V.	Emissions limits (radiated emissions).....	22
VI.	Protection of aeronautical radionavigation-satellite service	23
VII.	Transmitter frequency tolerance	24

I. RF power output / Power limits

Test setup(s): section 8.2

The power is measured at the transmitter output terminals and the type of power is determined according to the emission designator as follows:

- (i) Mean power (pY) for amplitude modulated emissions and transmitting both sidebands using unmodulated full carrier.
- (ii) Peak envelope power (pX) for all emission designators other than those referred to in paragraph (i) of this note.

Limits:

§87.131

Class of Station	Frequency	Authorized emissions	Maximum power
Aircraft earth	UHF	G1D, G1E, G1W	60W

Power may not exceed 60 watts per carrier, as measured at the input of the antenna subsystem, including any installed diplexer. The maximum EIRP may not exceed 2000W per carrier.

Limits:

RSS-170 5.3.2

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

Note: The measurement was performed at the antenna amplifier output.

Result: The measurement is passed.

Output Power Conducted with Power meter (measured)

Modulation Scheme	max. Bandwidth	Transmitter conducted output power [dBm]			Transmitter radiated output power / EIRP [dBm]		
		f _{low}	f _{mid}	f _{high}	f _{low}	f _{mid}	f _{high}
R5T1X	42 kHz	37.2	38.0	37.6	39.2	39.9	39.4
R5T2X	84 kHz	37.1	37.5	37.0	39.1	40.4	38.8
R5T45X	189 kHz	36.6	37.1	36.9	38.6	39.0	38.6
R20T1X	42 kHz	37.9	38.8	38.3	39.9	40.4	39.6
R20T2X	84 kHz	37.5	38.4	38.3	39.5	40.3	40.1
R20T45X	189 kHz	37.4	38.7	38.4	39.4	40.6	40.2
R5T2Q	84 kHz	37.0	37.5	37.1	39.0	39.4	38.9
R5T45Q	189 kHz	36.8	37.0	36.9	38.8	38.9	38.7
R20T05Q	21 kHz	37.3	38.5	38.0	39.3	40.4	39.8
R20T1Q	42 kHz	37.2	38.5	38.1	39.2	40.4	39.9
R20T2Q	84 kHz	37.0	38.5	38.2	39.0	40.4	40.0
R20T45Q	189 kHz	36.9	38.5	38.0	38.9	40.4	39.8

Note: The customer will include a SMA connector on the amplifier on the test antenna. Therefore, we added 0.6dB which is the insertion loss of the SMA to the calculated EIRP

Summary:

Maximum conducted output power:

38.8 dBm = 8.8 dBW = **7.6 W**

Maximum radiated output power (EIRP):

40.6 dBm = 10.6 dBW = **11.5 W**

1.37 dBic @ 1625.0 MHz / 1.30 dBic @ 1643.5 MHz / 1.21 dBic @ 1675.0 MHz

II. Emission masks

Test setup(s): section 8.2

Limits:

§87.131 (i)(3)

While transmitting a single modulated signal at the rated output power of the transmitter, the emissions must be attenuated below the maximum emission level by at least:

Frequency Offset (normalized to SR)	Attenuation (dB)
$\pm 0.75 \times \text{SR}$	0
$\pm 1.40 \times \text{SR}$	20
$\pm 2.95 \times \text{SR}$	40

Where:

SR = Symbol Rate,

SR = 1 × channel rate for BPSK,

SR = 0.5 × channel rate for QPSK.

The mask shall be defined by drawing straight lines through the above points.

Plots:

See Annex E / 2, plots 49 to 56, 82 to 93, 115 to 123.

Result: The measurement is passed.

III. Occupied bandwidth

Test setup(s): section 8.2

(a) Occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5 percent of the total mean power of a given emission.

(b) The authorized bandwidth is the maximum occupied bandwidth authorized to be used by a station.

(c) The necessary bandwidth for a given class of emission is the width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions.

Modulation Scheme	Occupied Bandwidth (99%)			Limit [kHz]
	f_{low}	f_{mid}	f_{high}	
R5T1X	38.3 kHz	37.8 kHz	37.5 kHz	42 kHz
R5T2X	76.6 kHz	75.9 kHz	75.3 kHz	84 kHz
R5T45X	169.9 kHz	167.9 kHz	167.3 kHz	189 kHz
R20T1X	37.8 kHz	37.6 kHz	37.2 kHz	42 kHz
R20T2X	76.3 kHz	75.3 kHz	75.0 kHz	84 kHz
R20T45X	169.2 kHz	168.6 kHz	167.9 kHz	189 kHz
R5T2Q	75.6 kHz	75.6 kHz	75.6 kHz	84 kHz
R5T45Q	169.2 kHz	169.2 kHz	168.6 kHz	189 kHz
R20T05Q	18.8 kHz	18.8 kHz	18.6 kHz	21 kHz
R20T1Q	37.3 kHz	37.2 kHz	37.0 kHz	42 kHz
R20T2Q	75.3 kHz	75.0 kHz	74.7 kHz	84 kHz
R20T45Q	168.6 kHz	167.9 kHz	167.9 kHz	189 kHz

Limits: §87.135

Limits: RSS-170 5.1

Frequency range	$f(\text{lowest}) > 1625.5 \text{ MHz}$	$f(\text{highest}) < 1660.5 \text{ MHz}$
-----------------	---	--

Plots:

See Annex E / 2, plots 1 to 36

Result: The measurement is passed.

IV. Emissions limitations (conducted emissions)

Test setup(s): section 8.2

In case of conflict with other provisions of §87.139, the provisions of this paragraph shall govern for aircraft earth stations. When using G1D, G1E, or G1W emissions in the 1646.5-1660.5 MHz frequency band, the emissions must be attenuated as shown below.

At rated output power, while transmitting a modulated single carrier, the composite spurious and noise output shall be attenuated by at least:

Limits:

§87.139 (i)(1)

Frequency (MHz)	Attenuation (dB) ¹
0.01 to 1525	-135 dB/4 kHz
1525 to 1559	-203 dB/4 kHz
1559 to 1585	-155 dB/MHz
1585 to 1605	-143 dB/MHz
1605 to 1610	-117 dB/MHz
1610 to 1610.6	-95 dB/MHz
1610.6 to 1613.8	-80 dBW/MHz ³
1613.8 to 1614	-95 dB/MHz
1614 to 1626.5	-70 dB/4 kHz
1626.5 to 1660	-70 dB/4 kHz ^{2 3 4}
1660 to 1670	-49.5 dBW/20 kHz ^{2 3 4}
1670 to 1735	-60 dB/4 kHz
1735 to 12000	-105 dB/4 kHz
12000 to 18000	-70 dB/4 kHz

¹These values are expressed in dB referenced to the carrier for the bandwidth indicated, and relative to the maximum emission envelope level, except where the attenuation is shown in dBW, the attenuation is expressed in terms of absolute power referenced to the bandwidth indicated.

²Attenuation measured within the transmit band excludes the band ± 35 kHz of the carrier frequency.

³This level is not applicable for intermodulation products.

⁴The upper limit for the excess power for any narrow-band spurious emission (excluding intermodulation products within a 30 kHz measurement bandwidth) shall be 10 dB above the power limit in this table.

Note:

Frequency response of rejection filter AT1595-13 as declared by the manufacturer:

TX Path Frequenc [MHz]	Attenuation [dB]
0.10 to 1026.5	120
1026.5 to 1525	110
1525 to 1559	117
1559 to 1585	107
1585 to 1605	108
1605 to 1614	91
1614 to 1735	4.5
1735 to 18000	118

Filter response data delivered by the customer were also used as correction data during the measurements.

Plots:

See Annex E / 2, plots 57 to 69, 90 to 102, 125 to 135.

Limits:

§87.139 (a) / RSS-170 5.3.4.1

The average power of unwanted emissions shall be attenuated below the average output power, P (dBW), of the transmitter, as specified below:

- (1) 25 dB in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 50%, up to and including 100% of the occupied bandwidth or necessary bandwidth, whichever is greater;
- (2) 35 dB in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 100%, up to and including 250% of the occupied bandwidth or necessary bandwidth, whichever is greater; and
- (3) $43 + 10 \log p$ (watts) in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 250% of the occupied bandwidth or necessary bandwidth, whichever is greater.

Plots:

See Annex E / 2, plots 37 to 48, 70 – 81, 103 to 114.

Result: The measurement is passed.

V. Emissions limits (radiated emissions)

Test setup(s): section 7.1

Limits: **§2.1053**

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Measurement results:

Radiated Spurious Emissions [dBm]								
Low frequency			Middle frequency			High channel		
F [GHz]	Detector	Level [dBm]	F [GHz]	Detector	Level [dBm]	F [GHz]	Detector	Level [dBm]
No critical peaks detected.			No critical peaks detected.			No critical peaks detected.		
Measurement uncertainty			± 3 dB					

Plots:

see also Annex E / 3, plots 139 to 143.

Result: The measurement is passed.

VI. Protection of aeronautical radionavigation-satellite service

Test setup(s): section 7.1

Limits:

§25.216

Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service.

(g) Mobile earth stations manufactured more than six months after FEDERAL REGISTER publication of the rule changes adopted in FCC 03–283 with assigned uplink frequencies in the 1610–1626.5 MHz band shall suppress the power density of emissions in the 1605–1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -46 dBW/MHz at 1610 MHz, averaged over any 2 millisecond active transmission interval. The e.i.r.p of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -20 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

Measurement results:

Radiated Spurious Emissions [dBm]								
Low frequency			Middle frequency			High channel		
F [GHz]	Detector	Level [dBm]	F [GHz]	Detector	Level [dBm]	F [GHz]	Detector	Level [dBm]
No critical peaks detected.			No critical peaks detected.			No critical peaks detected.		
Measurement uncertainty			± 3 dB					

Plots:

see also Annex E / 3, plots 136 to 138.

VII. Transmitter frequency tolerance

Test setup(s): section 8.2, setup 1.1hgj

Limits:

§87.133 (a)

Frequency band-470 to 2450 MHz (lower limit exclusive, upper limit inclusive), and categories of stations:	Tolerance ¹	Tolerance ²
Aeronautical stations	100	20
Aircraft stations	100	20
Aircraft earth station		320 Hz³

¹This tolerance is the maximum permitted until January 1, 1990, for transmitters installed before January 2, 1985, and used at the same installation. Tolerance is indicated in parts in 10⁶ unless shown as Hertz (Hz).

²This tolerance is the maximum permitted after January 1, 1985 for new and replacement transmitters and to all transmitters after January 1, 1990. Tolerance is indicated in parts in 10⁶ unless shown as Hertz (Hz).

³For purposes of certification, a tolerance of 160 Hz applies to the reference oscillator of the AES transmitter. This is a bench test.

Limits:

RSS-170 5.2

For mobile earth station equipment, the carrier frequency shall not depart from the reference frequency by more than ±10 ppm.

Measurement results:

Temperature [°C]	Voltage [V DC]	Reference Frequency [MHz]	Measured Frequency [MHz]	Deviation [ppm]	Deviation [Hz]
-40	28	fl: 1626. 600 000	1626.600264	0.16	264
-30	28		1626.600825	0.51	825
-20	28		1626.600761	0.47	761
-10	28		1626.600192	0.12	192
0	28		1626.600256	0.16	256
10	28		1626.600272	0.17	272
20	27		1626.600553	0.34	553
20	28		1626.600537	0.33	537
20	30		1626.600617	0.38	617
30	28		1626.600800	0.49	800
40	28		1626.600530	0.33	530
50	28		1626.600112	0.07	112
55	28		1626.600064	0.04	64

Temperature [°C]	Voltage [V DC]	Reference Frequency [MHz]	Measured Frequency [MHz]	Deviation [ppm]	Deviation [Hz]
-40	28	fm: 1643. 500 000	1643.500545	0.33	545
-30	28		1643.500825	0.50	825
-20	28		1643.500769	0.48	769
-10	28		1643.500184	0.11	184
0	28		1643.500256	0.16	256
10	28		1643.500232	0.14	232
20	27		1643.500530	0.32	530
20	28		1643.500537	0.33	537
20	30		1643.500673	0.41	673
30	28		1643.500760	0.46	760
40	28		1643.500535	0.33	535
50	28		1643.500144	0.09	144
55	28		1643.500032	0.02	32

Temperature [°C]	Voltage [V DC]	Reference Frequency [MHz]	Measured Frequency [MHz]	Deviation [ppm]	Deviation [Hz]
-40	28	fh: 1660. 400 000	1660.400577	0.35	577
-30	28		1660.400845	0.51	845
-20	28		1660.400769	0.46	769
-10	28		1660.400184	0.11	184
0	28		1660.400256	0.15	256
10	28		1660.400280	0.17	280
20	27		1660.400601	0.36	601
20	28		1660.400657	0.40	657
20	30		1660.400681	0.41	681
30	28		1660.400825	0.50	825
40	28		1660.400585	0.35	585
50	28		1660.400120	0.07	120
55	28		1660.400072	0.04	72

Note:

The EUT was set to a continuous wave mode during this test.
 The marker frequency counter function of the spectrum analyzer was used for reading frequency values before and after temperature and voltage changes.
 The 10 MHz reference frequency of the spectrum analyzer was locked to a GPS reference signal.

Result: The measurement is failed.

10 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

11 Document history

Version	Applied changes	Date of release
-/-	Initial release - DRAFT	2020-11-13
-/-	Applicant and RF output power updated	2020-11-30

12 Accreditation Certificate – D-PL-12076-01-04

first page

last page



Deutsche Akkreditierungsstelle GmbH

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV
Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

Accreditation



The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory

CTC advanced GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:

Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards

The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.

Registration number of the certificate: **D-PL-12076-01-04**

Frankfurt am Main, 09.06.2020

by  Peter Egner
Head of Division

The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.
<https://www.dakks.de/en/content/accredited-bodies-dakks>
See notes on next page.

Deutsche Akkreditierungsstelle GmbH

Office Berlin
Spittelmarkt 10
10117 Berlin

Office Frankfurt am Main
Europa-Allee 52
60327 Frankfurt am Main

Office Braunschweig
Bundesallee 100
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAKKS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf>

13 Accreditation Certificate – D-PL-12076-01-05

first page

last page



Deutsche Akkreditierungsstelle GmbH

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

Accreditation



The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory

CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:

Telecommunication (FCC Requirements)

The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.

Registration number of the certificate: D-PL-12076-01-05

Frankfurt am Main, 09.06.2020

by origy Dipl.-Ing. (FH) Ralf Egnor Head of Division

The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks

Deutsche Akkreditierungsstelle GmbH

Office Berlin Spittelmarkt 10 10117 Berlin

Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main

Office Braunschweig Bundesallee 100 38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request

https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf

END OF TEST REPORT