



A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.
Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT




Test Report No.	:	0705FS13
Applicant	:	Giant Electronics Limited
FCC ID :	:	K7GT8525
Trade Mark	:	Motorola
Model Number	:	T8525
Battery Type	:	Ni-MH Battery (3.6V , 650mAh) ALKALINE Battery X 3 (1.5V AA)
Product Name	:	Two Way Radio with FRS
Date of Test	:	May. 12 ~ 15, 2007
Test Environment	:	Ambient Temperature : 22 ± 3 °C Relative Humidity : 40 - 70 %
Test Specification	:	Standard C95.1-1999 IEEE Std. 1528-2003
Max. SAR	:	0.518 W/kg FRS Face SAR (50% Duty Cycle) 0.271 W/kg FRS Body SAR With Belt-Clip (50% Duty Cycle) 0.317 W/kg FRS Body w/o Belt-Clip SAR (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift)
FCC Rule Part(s)	:	2.1093;FCC/OET Bulletin 65 Supplement C [July 2001]
Test Lab :	:	Changan Lab.



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.


Country Huang 20070525
Measurement Center Manager


Sam Chuang 20070525
Testing Engineer



Contents

1. Description of Equipment Under Test (EUT)	3
2. Other Accessories	5
3. Introduction	7
4. SAR Definition	8
5. SAR Measurement Setup	9
6. System Components	11
6.1 DASY4 E-Field Probe System	11
6.2 Data Acquisition Electronic (DAE) System	13
6.3 Robot	14
6.4 Measurement Server	14
6.5 Device Holder for Transmitters	14
6.6 Phantom - SAM v4.0	15
6.7 Data Storage and Evaluation	15
7. Test Equipment List	18
8. Tissue Simulating Liquids	19
8.1 Liquid Confirmation	20
9. Measurement Process	22
9.1 Device and Test Conditions	22
9.2 System Performance Check	23
9.3 Dosimetric Assessment Setup	25
9.4 Spatial Peak SAR Evaluation	27
10. Measurement Uncertainty	28
11. SAR Test Results Summary	30
11.1 FRS Face SAR -1.5 cm Spacing	30
11.2 FRS Body SAR with Belt - clip	32
11.3 FRS Body SAR w/o Belt-clip -1.5 cm Spacing	34
11.4 Std. C95.1-1999 RF Exposure Limit	36
12. Conclusion	37
13. References	38
Appendix A - System Performance Check	39
Appendix B - SAR Measurement Data	43
Appendix C - Calibration	71



1. Description of Equipment Under Test (EUT)

Applicant :

Giant Electronics Limited

7/F., Elite Industrial Bldg., 135-137 Hoi Bun Road, Kwun Tong, Kowloon, Hong Kong

Manufacturer	: Giant Electronics Ltd.
Manufacturer Address	: 7/F., Elite Building, Nan Shan Road, Nan Shan District, Nam Tau, Shen Zhen, China
FCC ID	: K7GT8525
Product Name	: Two Way Radio with FRS
Trade Mark	: Motorola
Model Number	: T8525
Battery Type	: Ni-MH Battery (3.6V , 650mAh) ALKALINE Battery X 3 (1.5V AA)
Test Device	: Production Unit
TX Frequency	: 462.5625 - 462.7125 MHz (FRS CH1 - CH 7) 467.5625 - 467.7125 MHz (FRS CH8 - CH 14)
Max. RF Output Power	: 0.302 W ERP (24.8 dBm) FRS CH1 - CH 7 0.316 W ERP (25.0 dBm) FRS CH8 - CH 14
Max. SAR Measurement	: 0.518 W/kg FRS Face SAR (50% Duty Cycle) 0.271 W/kg FRS Body SAR With Belt-Clip (50% Duty Cycle) 0.317 W/kg FRS Body w/o Belt-Clip SAR (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift)
Antenna Type	: Fixed Type (Antenna Gain = 0dBi)
Device Category	: Portable
RF Exposure Environment	: General Population / Uncontrolled
Battery Option	: Standard
Application Type	: Certification

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.



2. Other Accessories



Figure 2. Headset

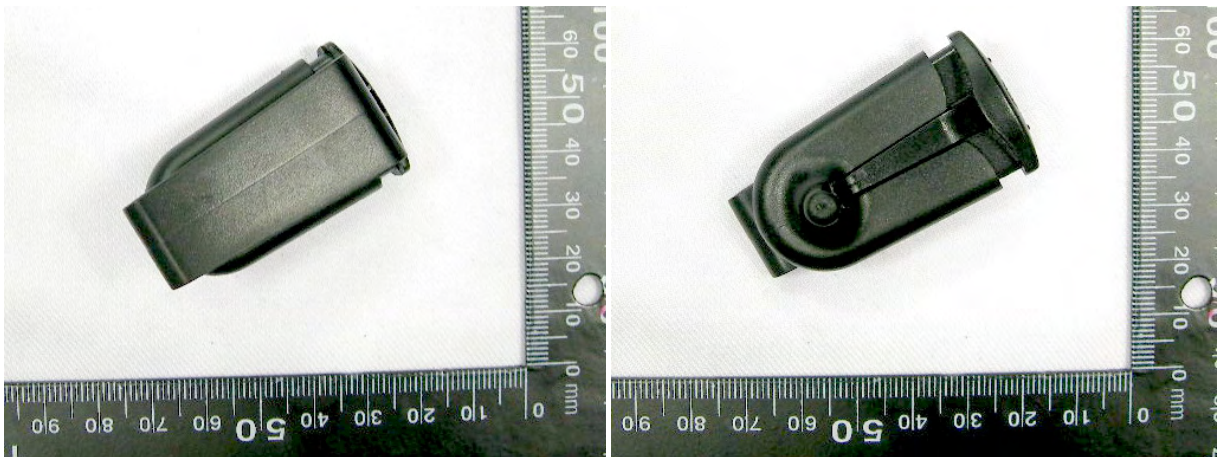


Figure 3. Belt Clip



Figure 4. ALKALINE Battery (1.5V AA)



Figure 5. Ni-MH Battery (3.6V 650mAh)



Figure 6. Charger Tray

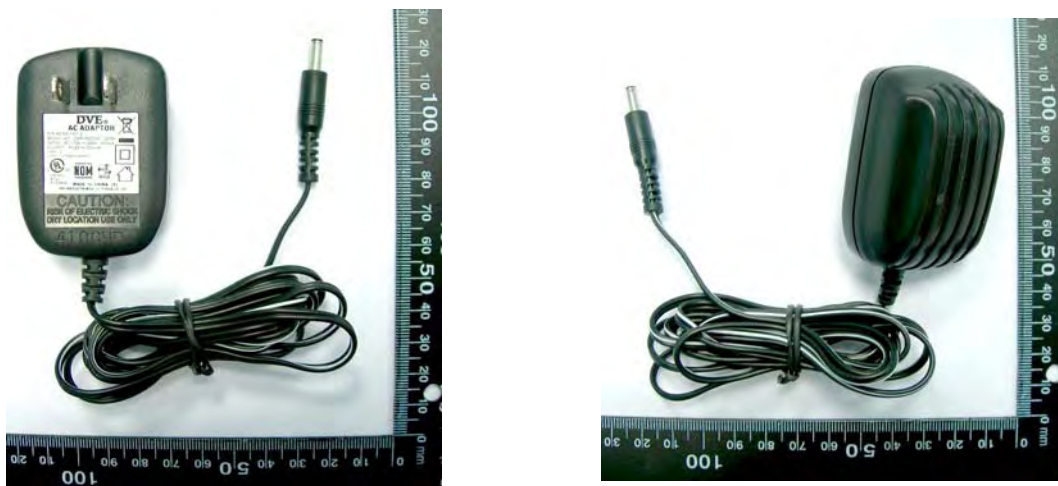


Figure 7. AC Adapter



3. **Introduction**

The A Test Lab Techno. Corp. RF Testing Laboratory has performed measurements of the maximum potential exposure to the user of **Giant Electronics Limited Trade Mark : Motorola Model(s) : T8525**. The test procedures, as described in American National Standards, , Institute C95.1 - 1999 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.



4. **SAR Definition**

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 8. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

*** Note :**

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]



5. SAR Measurement Setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.025\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Pentium 4 2.4GHz computer with Windows2000 system and SAR Measurement Software DASY4, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

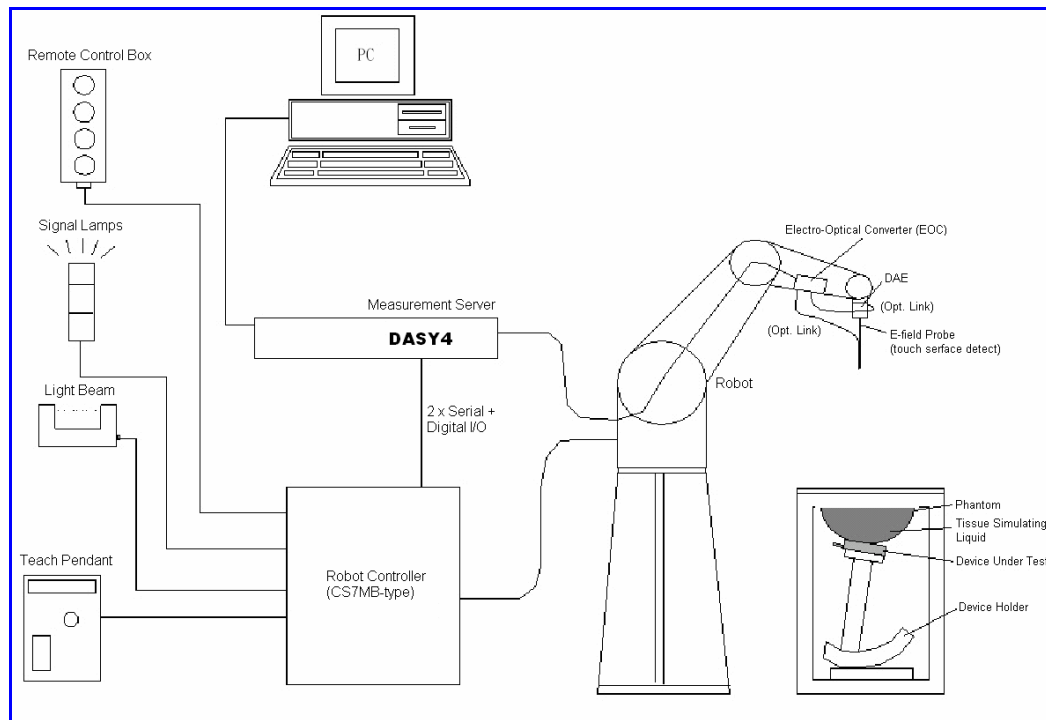


Figure 9. SAR Lab Test Measurement Setup

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3] .



6. System Components

6.1 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

6.1.1 EX3DV3 E-Field Probe Specification

Construction	Symmetrical design with triangular core
	Built-in optical fiber for surface detection System (EX3DV3 only)
Calibration	Built-in shielding against static charges
	PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Frequency	In air from 10 MHz to 6 GHz
	In brain and muscle simulating tissue at frequencies of 900MHz, 1800MHz, 5200MHz and 5500MHz and 5800MHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Directivity	10 MHz to > 6 GHz; Linearity: ± 0.2 dB
	(30 MHz to 3 GHz)
Dynamic Range	± 0.3 dB in brain tissue (rotation around probe axis)
	± 0.5 dB in brain tissue (rotation normal probe axis)
Surface Detection	10 μ W/g to > 100mW/g; Linearity: ± 0.2 dB
	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface(EX3DV3 only)
Dimensions	Overall length: 330mm
	Tip length: 20mm Body diameter: 12mm Tip diameter: 2.5mm Distance from probe tip to dipole centers: 1.0mm
Application	General dosimetry up to 6GHz
	Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



Figure 10.
EX3DV3 E-field Probe



Figure 11.
Probe setup on robot



6.1.2 EX3DV3 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [4] with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [5] and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

6.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Pentium 4
Clock Speed : 2.4GHz
Operating System : Windows 2000 Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY4 v4.7 (Build 53) & SEMCAD v1.8 (Build 172)
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock



6.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: RX90L
Repeatability : ± 0.025 mm
No. of Axis : 6

6.4 Measurement Server

Processor : PC/104 with a 166MHz low-power Pentium
I/O-board : Link to DAE3
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

6.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

***Note :** A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6] . To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

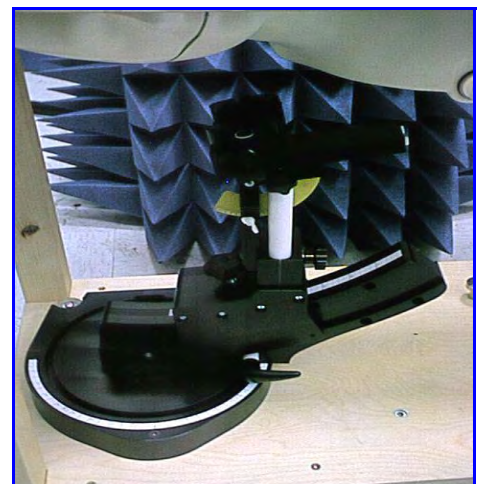


Figure 12. Device Holder

6.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

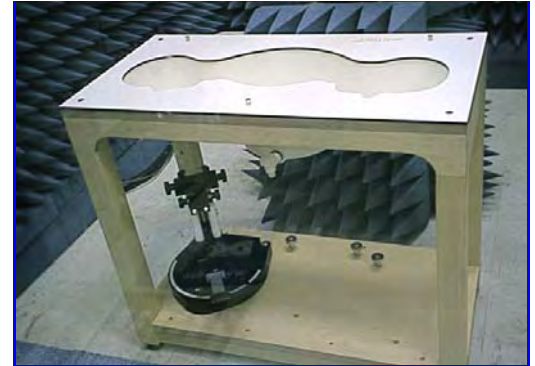


Figure 13. SAM Twin Phantom

Shell Thickness	2 \pm 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	810×1000×500 mm (H×L×W)

Table 1. Specification of SAM v4.0

6.7 Data Storage and Evaluation

6.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



6.7.2 Data Evaluation

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$



H-field probes :

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
 $\mu V/(V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

*** Note :** that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m



7. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1530	Sep. 21, 2006	Sep. 21, 2007
SPEAG	450MHz System Validation Kit	D450V2	1021	Mar. 15, 2007	Mar. 15, 2008
SPEAG	Data Acquisition Electronics	DAE4	541	Oct. 16, 2006	Oct. 16, 2007
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	SAM V4.0	1009	NCR	NCR
SPEAG	Robot	Staubli RX90L	F00/589B1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.7 Build 53	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.8 Build 172	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
Agilent	Wireless Communication Test Set	8960(E5515C)	GB41450409	Feb. 14, 2007	Feb. 14, 2008
Agilent	S-Parameter Network Analyzer	8720ES	US39172472	Aug. 15, 2006	Aug. 15, 2007
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	NCR
Agilent	Power Meter	E4418B	GB40206143	Apr. 24, 2007	Apr. 24, 2008
Agilent	Power Sensor	8481H	3318A20779	Apr. 25, 2007	Apr. 25, 2008
Agilent	Signal Generator	8648C	3847A05201	Jul. 06, 2006	Jul. 06, 2007
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	NCR

Table 2. Test Equipment List



8. Tissue Simulating Liquids

The Head and body mixtures consist of a viscous gel using hydroxethylcellulouse (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8720ES Network Analyzer.

INGREDIENT	FREQUENCY	
	HSL450 - Head (400-500MHz)	MSL450 - Body (400-500MHz)
Water	38.91 %	46.21 %
HEC	0.25 %	0.18 %
Sugar	56.93 %	51.17 %
Preventol	0.12 %	0.08 %
Salt	3.79 %	2.34 %
Glycol monobutyl	0 %	0 %
Dielectric Parameters at 22°C	f = 450 MHz $\epsilon_r = 43.5$, $\sigma = 0.87$ S/m	f = 450 MHz $\epsilon_r = 56.7$, $\sigma = 0.94$ S/m

Table 3. Recipes for Head & Body Tissue Simulating Liquids

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)				

Table 4. Tissue dielectric parameters for head and body phantoms

8.1 Liquid Confirmation

8.1.1 Parameters

Liquid Verify								
Ambient Temperature : $22 \pm 3 \text{ }^\circ\text{C}$; Relative Humidity : 40-70 %								
Liquid Type	Freq.	Temp ($^\circ\text{C}$)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
450MHz Head	450MHz	22.0	ϵ_r	43.5	44.20	1.61	± 5	May. 12, 2007
			σ	0.87	0.862	-0.92	± 5	
450MHz Body	450MHz	22.0	ϵ_r	56.7	56.10	-1.06	± 5	May. 14, 2007
			σ	0.94	0.94	0.00	± 5	

Table 5. Measured Tissue dielectric parameters for head and body phantoms

8.1.2 Liquid Depth

The liquid level was during measurement 15cm \pm 0.5cm.

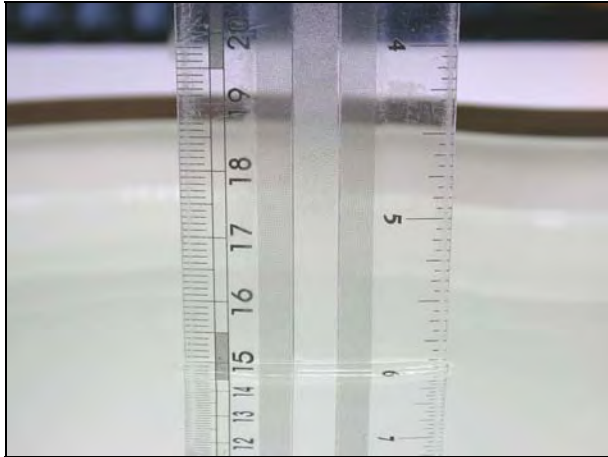


Figure 14. Head-Tissue-Simulating-Liquid



Figure 15. Body-Tissue-Simulating-Liquid



9. Measurement Process

9.1 Device and Test Conditions

The Test Device was provided by Giant Electronics Limited for this evaluation. The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by FRS (Ch1 = 462.5625MHz, Ch4 = 462.6375MHz, Ch7 = 462.7125MHz, Ch8 = 467.5625MHz, Ch11 = 467.6375MHz, Ch14 = 467.7125MHz) systems. Battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

Usage	Operates with a built-in test mode by client		Distance between antenna axis at the joint and the liquid surface:	For Body, EUT front to phantom, 15mm separation. EUT back to phantom, to attach belt clip. EUT back to phantom, 15mm separation.	
Simulating human Head/Body	Body		EUT Battery	Fully-charged with Nickel-Metal Hydride battery.	
Output Power (ERP)	Channel		Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	FRS	Highest - 14	467.7125	25.00	24.98
		Middle - 11	467.6375	24.97	24.96
		Lowest - 8	467.5625	24.98	24.96
		Highest - 7	462.7125	24.80	24.79
		Middle - 4	462.6375	24.76	24.75
		Lowest - 1	462.5625	24.78	24.76

Note:

1. The EUT has built-in test mode that used to evaluate SAR.
2. The EUT take Nickel-Metal as its power source. Each test was preceded under the condition of fully-charged EUT.

9.2 System Performance Check

9.2.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	450, 900, 1800, 2000, 2450, 5000MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D450V2 : dipole length 270 mm; overall height 330 mm D900V2 : dipole length 149 mm; overall height 330 mm D1800V2 : dipole length 72 mm; overall height 300 mm D2000V2 : dipole length 65 mm; overall height 300 mm D2450V2 : dipole length 51.5 mm; overall height 300 mm D5GHzV2 : dipole length 20.6 mm; overall height 450 mm



Figure 16. Validation Kit



9.2.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation was performed at 450 MHz.

Validation kit		Mixture Type		SAR _{1g} [mW/g]	SAR _{10g} [mW/g]	Date of Calibration	
D450V2-SN1021		Head		5.15	3.475	Mar. 15, 2007	
		Body		4.8	3.2		
Frequency (MHz)	Power (dBm)	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
					1g	10g	
450 (Head)	400mW	2.05	1.38	-0.124	-0.5 %	-0.7 %	May. 12, 2007
	Normalize to 1 Watt	5.125	3.45				
450 (Body)	400mW	1.92	1.26	0.014	0.0 %	-1.6 %	May. 14, 2007
	Normalize to 1 Watt	4.8	3.15				



9.3 Dosimetric Assessment Setup

9.3.1 Headset Test Position - Body-Worn

Body-Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a handset output should be tested with a handset connected to the device.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

For this test :

- The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.
- Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 15 mm was tested to confirm the necessary "minimum SAR separation distance".
(* Note : This distance includes the 2 mm phantom shell thickness.)



9.3.2 Measurement Procedures

The evaluation was performed with the following procedures :

- Surface Check :** A surface checks job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.
- Reference :** The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.
- Area Scan :** The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm.
- Zoom Scan :** Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 5 x 5 x 7 points in a 32 x 32 x 30 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.
- Drift :** The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.



9.4 Spatial Peak SAR Evaluation

The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement in a volume of $(32 \times 32 \times 30) \text{ mm}^3$ ($5 \times 5 \times 7$ points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY4, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



10. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 27\%$ [8] .

According to Std. C95.3 [9] , the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10] , typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Source of Uncertainty	Uncertainty Value	Probability Distribution	Divisor	C_i	Standard Uncertainty $\pm 1\%$ (1-g)	V_i or V_{eff}
Type-A	0.9 %	Normal	1	1	0.9	9
Measurement System						
Probe Calibration	7 %	Normal	2	1	3.5	∞
Axial Isotropy	0.2dB	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
Hemispherical Isotropy	9.6 %	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
Spatial Resolution	0 %	Rectangular	$\sqrt{3}$	1	0	∞
Boundary Effect	11.0 %	Rectangular	$\sqrt{3}$	1	6.4	∞
Linearity	0.2dB	Rectangular	$\sqrt{3}$	1	2.7	∞
Detection Limit	1.0 %	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	1.0 %	Normal	1	1	1.0	∞
RF Ambient Conditions	3.0 %	Rectangular	$\sqrt{3}$	1	1.73	∞
Probe Positioner Mech. Const.	0.4 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	0.35 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Extrapolation and Integration	3.9 %	Rectangular	$\sqrt{3}$	1	2.3	∞
Test sample Related						
Test sample Positioning	4.7 %	Normal	1	1	4.7	5
Device Holder Uncertainty	6.1 %	Normal	1	1	6.1	5
Drift of Output Power	5.0 %	Rectangular	$\sqrt{3}$	1	2.9	∞
Phantom and Setup						
Phantom Uncertainty (Including temperature effects)	4.0%	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Conductivity (meas.)	10.0%	Rectangular	$\sqrt{3}$	0.6	3.4	∞
Liquid Permittivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity (meas.)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Combined standard uncertainty		RSS			13.5	88.7
Expanded uncertainty (Coverage factor = 2)		Normal (k=2)			27	

Table 6. Uncertainty Budget of DASY



11. SAR Test Results Summary

11.1 FRS Face SAR -1.5 cm Spacing

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40-70

Liquid :

Mixture Type :

HSL450

Liquid Temperature (°C) :

22

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

1530

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Remark	Amb. Temp	Liq. Temp
					Duty Cycle					
MHz	Ch.				100%	50%				
462.5625	1	FM	Ni-MH	N/A	0.726	0.363	0.139	-	22.0	22
462.6375	4	FM	Ni-MH	N/A	0.733	0.367	0.142	-	22.0	22
462.7125	7	FM	Ni-MH	N/A	0.770	0.385	0.086	-	22.0	22
462.7125	7	FM	ALKALINE	N/A	0.917	0.459	0.105	-	22.0	22
467.5625	8	FM	Ni-MH	N/A	0.719	0.360	-0.084	-	22.0	22
467.5625	8	FM	ALKALINE	N/A	1.010	0.505	-0.112	-	22.0	22
467.6375	11	FM	Ni-MH	N/A	0.674	0.337	-0.119	-	22.0	22
467.7125	14	FM	Ni-MH	N/A	0.639	0.320	-0.178	-	22.0	22
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)	
			Duty Cycle				Duty Cycle	
MHz	Ch.		100%	50%			100%	50%
462.5625	1	Ni-MH	0.726	0.363	0.139	1.033	0.750	0.375
462.6375	4	Ni-MH	0.733	0.367	0.142	1.033	0.757	0.379
462.7125	7	Ni-MH	0.770	0.385	0.086	1.020	0.785	0.393
462.7125	7	ALKALINE	0.917	0.459	0.105	1.024	0.939	0.470
467.5625	8	Ni-MH	0.719	0.360	-0.084	1.020	0.733	0.367
467.5625	8	ALKALINE	1.010	0.505	-0.112	1.026	1.036	0.518
467.6375	11	Ni-MH	0.674	0.337	-0.119	1.028	0.693	0.346
467.7125	14	Ni-MH	0.639	0.320	-0.178	1.042	0.666	0.333

SAR is basically proportional to average transmit power and duty cycle
(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where

Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

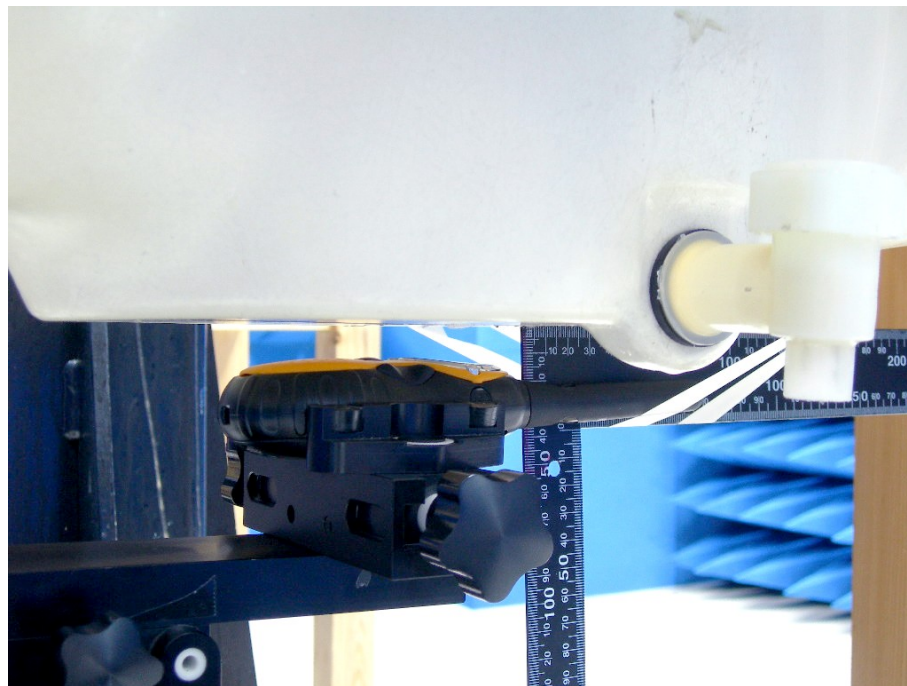


Figure 17. SAR Test Setup Face Position



11.2 FRS Body SAR with Belt - clip

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40-70

Liquid :

Mixture Type :

MSL450

Liquid Temperature (°C) :

22

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

1530

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Remark	Amb. Temp	Liq. Temp
					Duty Cycle					
MHz	Ch.				100%	50%				
462.5625	1	FM	Ni-MH	Headset	0.425	0.213	-0.011	-	22.1	22
462.6375	4	FM	Ni-MH	Headset	0.450	0.225	-0.017	-	22.1	22
462.7125	7	FM	Ni-MH	Headset	0.459	0.230	-0.020	-	22.1	22
462.7125	7	FM	ALKALINE	Headset	0.519	0.260	-0.059	-	22.1	22
467.5625	8	FM	Ni-MH	Headset	0.480	0.240	-0.008	-	22.1	22
467.5625	8	FM	ALKALINE	Headset	0.540	0.270	-0.014	-	22.1	22
467.6375	11	FM	Ni-MH	Headset	0.418	0.209	-0.011	-	22.1	22
467.7125	14	FM	Ni-MH	Headset	0.442	0.221	-0.068	-	22.1	22
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)	
			Duty Cycle				Duty Cycle	
MHz	Ch.		100%	50%			100%	50%
462.5625	1	Ni-MH	0.425	0.213	-0.011	1.003	0.426	0.213
462.6375	4	Ni-MH	0.450	0.225	-0.017	1.004	0.452	0.226
462.7125	7	Ni-MH	0.459	0.230	-0.020	1.005	0.461	0.231
462.7125	7	ALKALINE	0.519	0.260	-0.059	1.014	0.526	0.263
467.5625	8	Ni-MH	0.480	0.240	-0.008	1.002	0.481	0.240
467.5625	8	ALKALINE	0.540	0.270	-0.014	1.003	0.542	0.271
467.6375	11	Ni-MH	0.418	0.209	-0.011	1.003	0.419	0.210
467.7125	14	Ni-MH	0.442	0.221	-0.068	1.016	0.449	0.224

SAR is basically proportional to average transmit power and duty cycle
(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where

Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

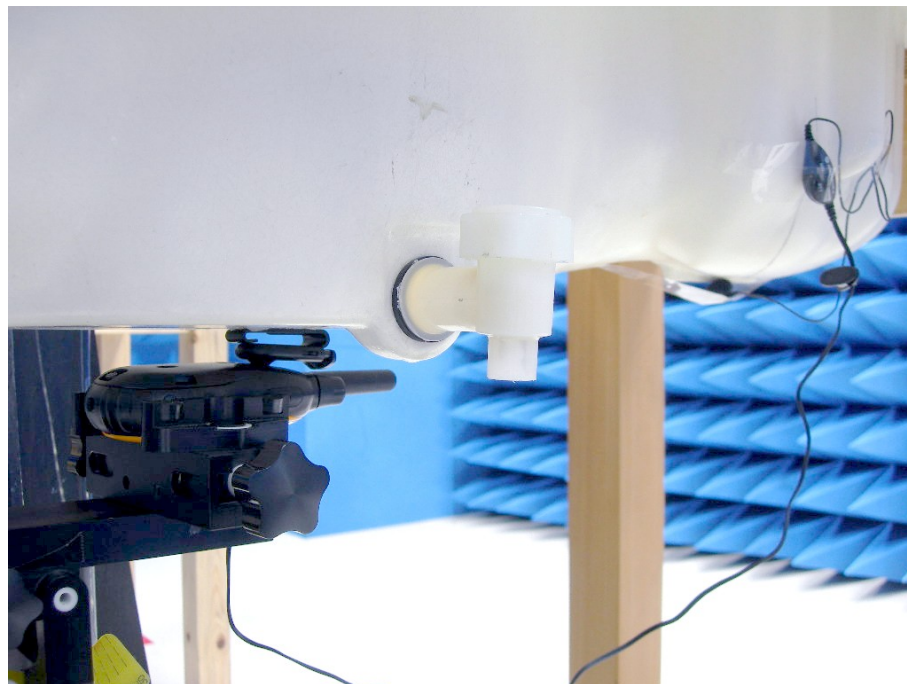


Figure 18. SAR Test Setup with Belt Clip



11.3 FRS Body SAR w/o Belt-clip -1.5 cm Spacing

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40-70

Liquid :

Mixture Type :

MSL450

Liquid Temperature (°C) :

22

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

1530

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Remark	Amb. Temp	Liq. Temp
					Duty Cycle					
MHz	Ch.				100%	50%				
462.5625	1	FM	Ni-MH	Headset	0.437	0.219	0.111	-	21.9	22
462.6375	4	FM	Ni-MH	Headset	0.462	0.231	-0.049	-	21.9	22
462.7125	7	FM	Ni-MH	Headset	0.472	0.236	-0.179	-	21.9	22
462.7125	7	FM	ALKALINE	Headset	0.579	0.290	-0.028	-	21.9	22
467.5625	8	FM	Ni-MH	Headset	0.462	0.231	-0.019	-	21.9	22
467.5625	8	FM	ALKALINE	Headset	0.628	0.314	-0.041	-	21.9	22
467.6375	11	FM	Ni-MH	Headset	0.452	0.226	0.085	-	21.9	22
467.7125	14	FM	Ni-MH	Headset	0.458	0.229	-0.029	-	21.9	22
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)	
			Duty Cycle				Duty Cycle	
MHz	Ch.		100%	50%			100%	50%
462.5625	1	Ni-MH	0.437	0.219	0.111	1.026	0.448	0.224
462.6375	4	Ni-MH	0.462	0.231	-0.049	1.011	0.467	0.234
462.7125	7	Ni-MH	0.472	0.236	-0.179	1.042	0.492	0.246
462.7125	7	ALKALINE	0.579	0.290	-0.028	1.006	0.583	0.291
467.5625	8	Ni-MH	0.462	0.231	-0.019	1.004	0.464	0.232
467.5625	8	ALKALINE	0.628	0.314	-0.041	1.009	0.634	0.317
467.6375	11	Ni-MH	0.452	0.226	0.085	1.020	0.461	0.230
467.7125	14	Ni-MH	0.458	0.229	-0.029	1.007	0.461	0.231

SAR is basically proportional to average transmit power and duty cycle
(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where

Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

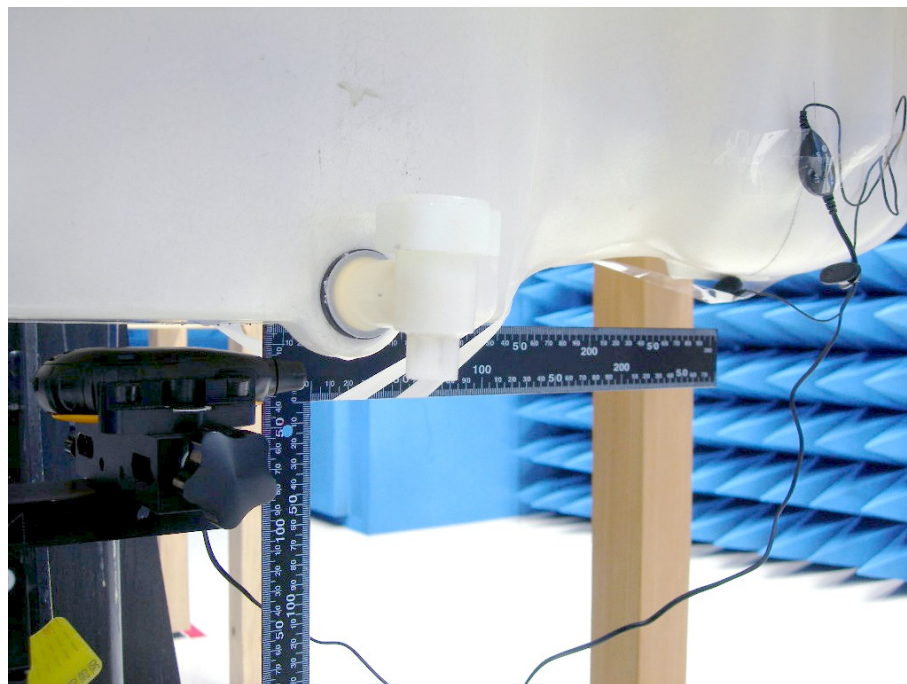


Figure 19.SAR Test Setup w/o Belt Clip



11.4 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole - body.
- *** The Spatial Average value of the SAR averaged over the partial - body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



12. Conclusion

The SAR test values found for the portable mobile phone **Giant Electronics Limited Trade Mark : Motorola Model(s) : T8525** are below the maximum recommended level of 1.6 W/kg (mW/g).



13. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency. 10KHz-300GHz, Jan. 1995.



Appendix A - System Performance Check

See following Attached Pages for System Performance Check.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 8:01:12 AM

System Performance Check at 450MHz_20070512_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.862 \text{ mho/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

System Performance Check at 450MHz/Area Scan (51x191x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.17 mW/g

System Performance Check at 450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.0 V/m ; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.05 mW/g ; SAR(10 g) = 1.38 mW/g

Maximum value of SAR (measured) = 2.17 mW/g

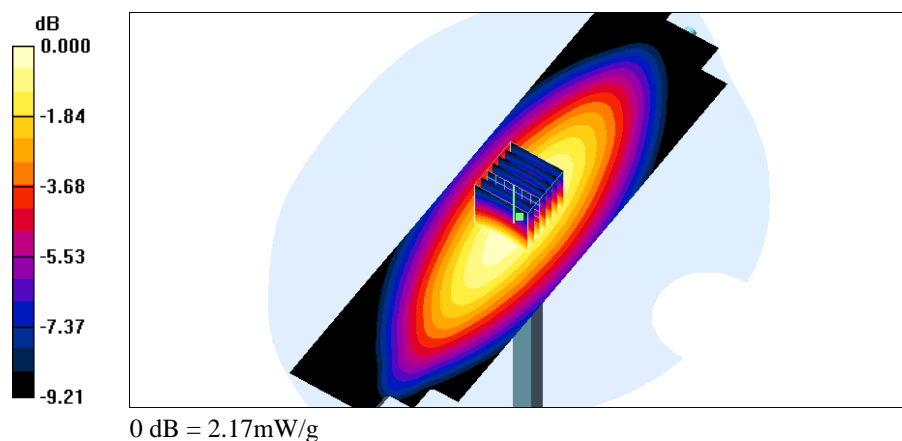



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 4:43:35 PM

System Performance Check for 450 MHz_20070514_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

System Performance Check at 450MHz/Area Scan (51x201x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.03 mW/g

System Performance Check at 450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.5 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 3.14 W/kg


SAR(1 g) = 1.92 mW/g; SAR(10 g) = 1.26 mW/g

Maximum value of SAR (measured) = 2.07 mW/g

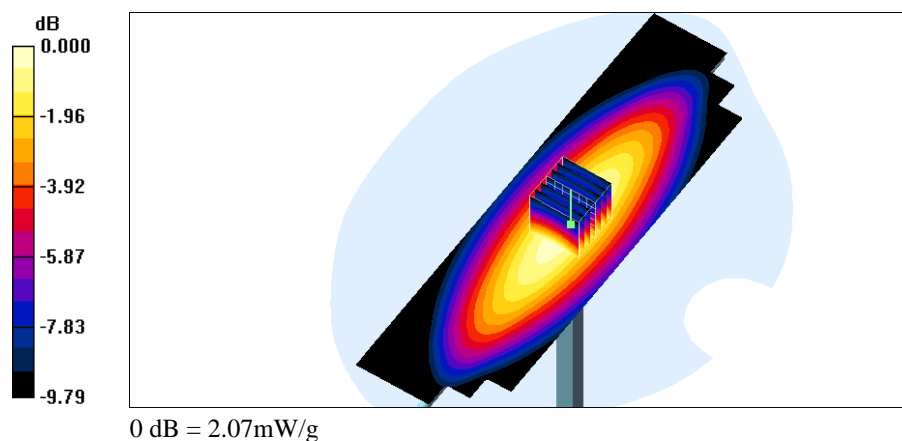




Z-axis Plot of System Performance Check

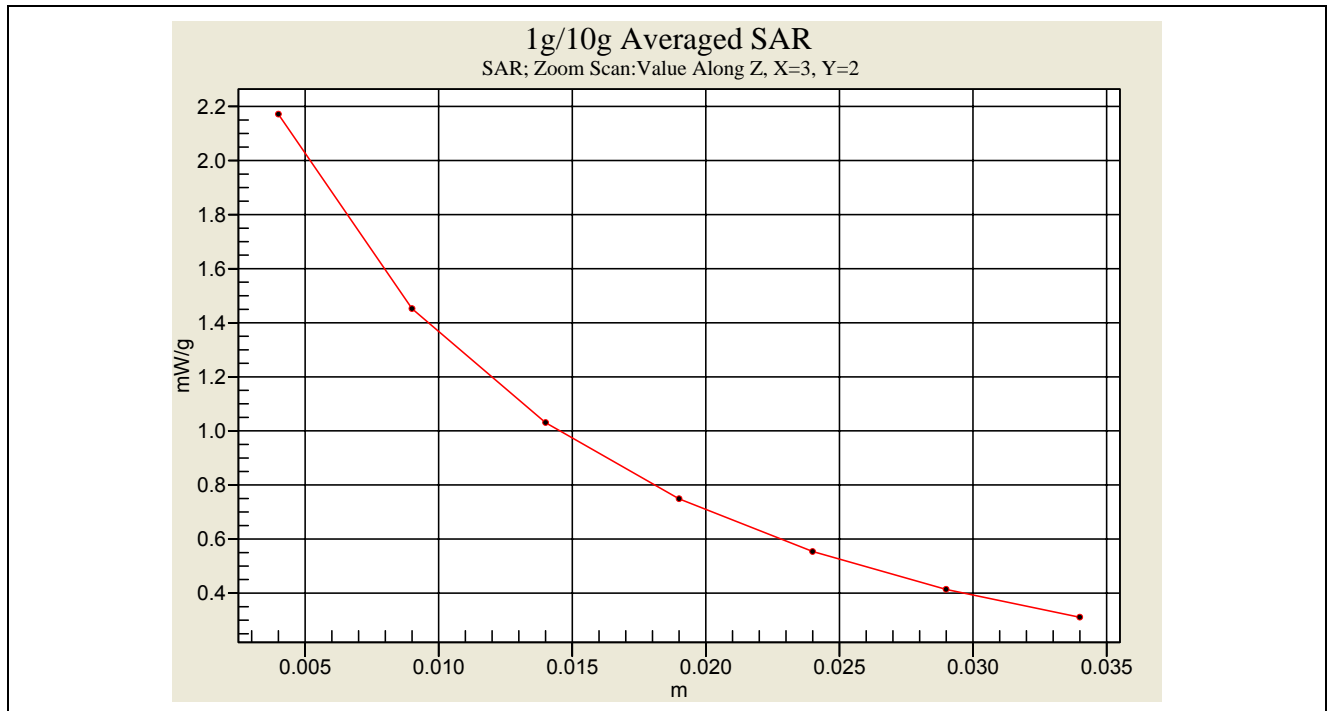

Head-Tissue-Simulating-Liquid 450MHz

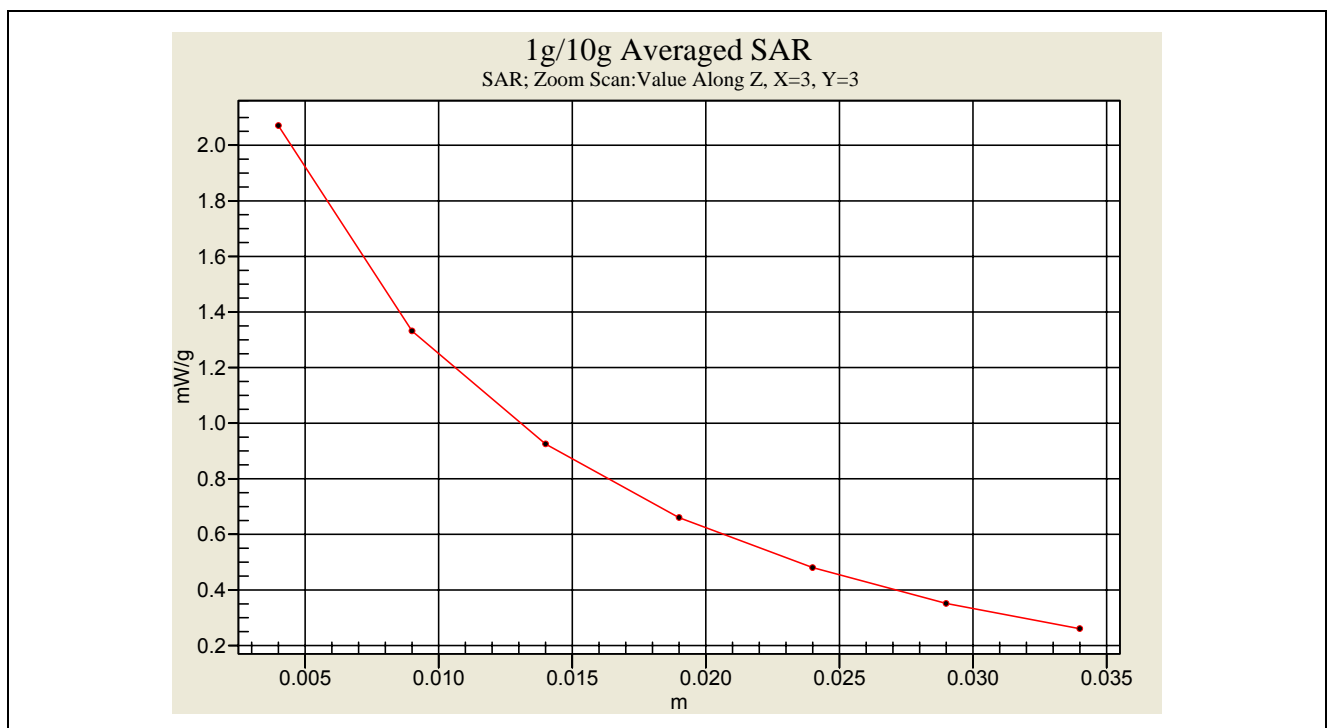

Body-Tissue-Simulating-Liquid 450MHz



Appendix B - SAR Measurement Data

See following Attached Pages for SAR Measurement Data.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 9:40:07 AM

Flat_FRS CH1_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5625 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.825 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.7 V/m ; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.726 mW/g ; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 0.766 mW/g

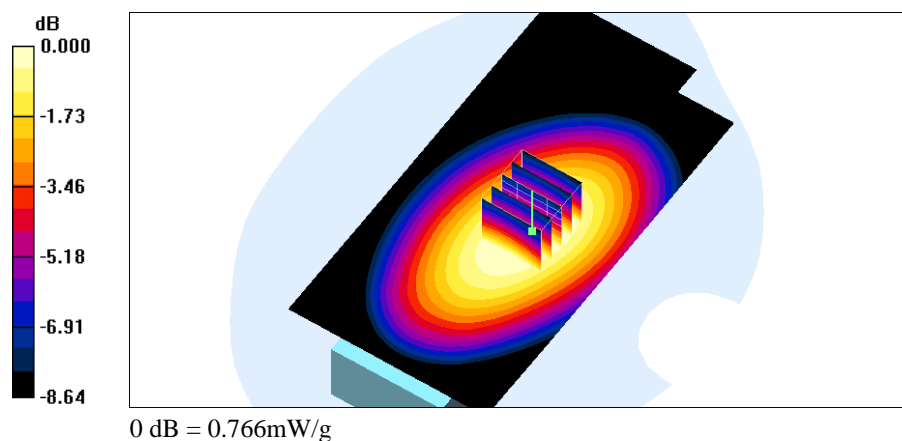



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 10:17:30 AM

Flat_FRS CH4_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.818 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.4 V/m; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.733 mW/g; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 0.772 mW/g

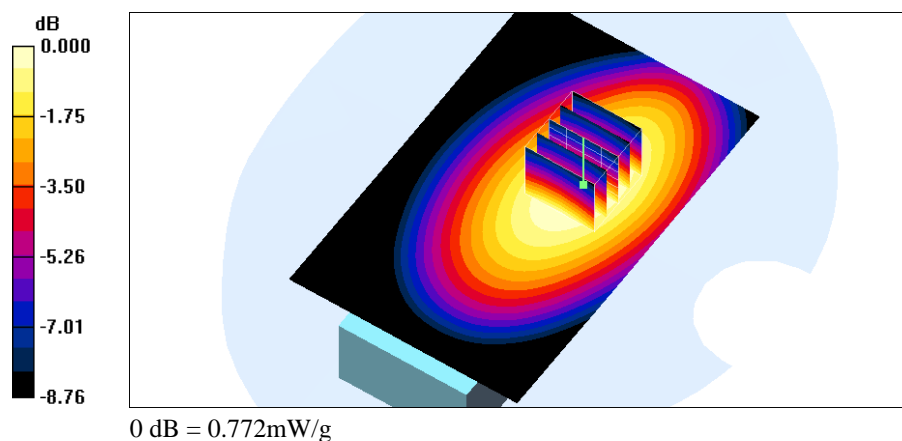



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 10:45:31 AM

Flat_FRS CH7_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.856 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.3 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 0.811 mW/g

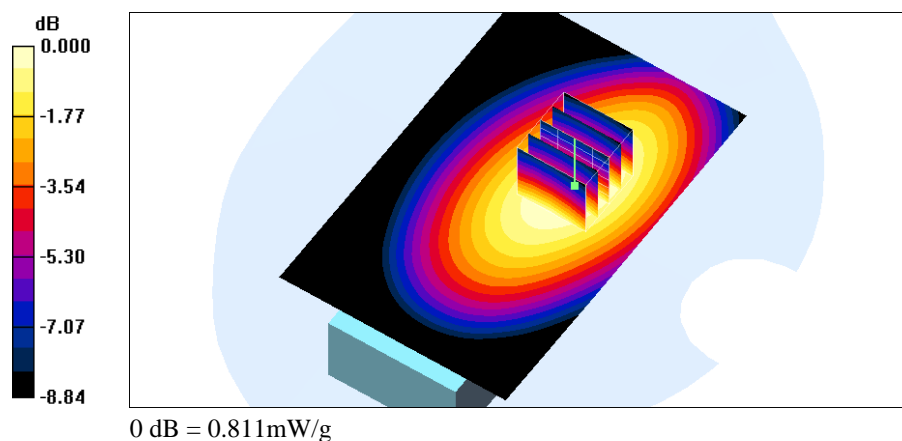



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 11:29:57 AM

Flat_FRS CH7_Brain_Alkaline_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.00 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.3 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.917 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

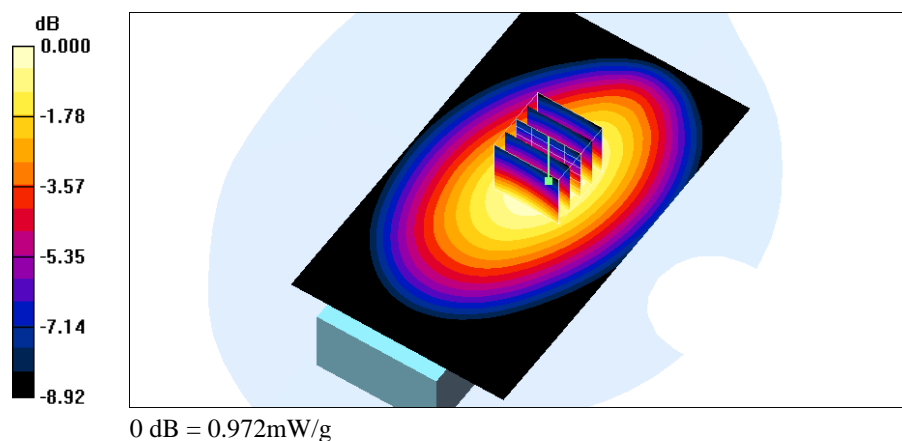



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 8:30:01 AM

Flat_FRS CH8_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 43.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.766 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.3 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.759 mW/g

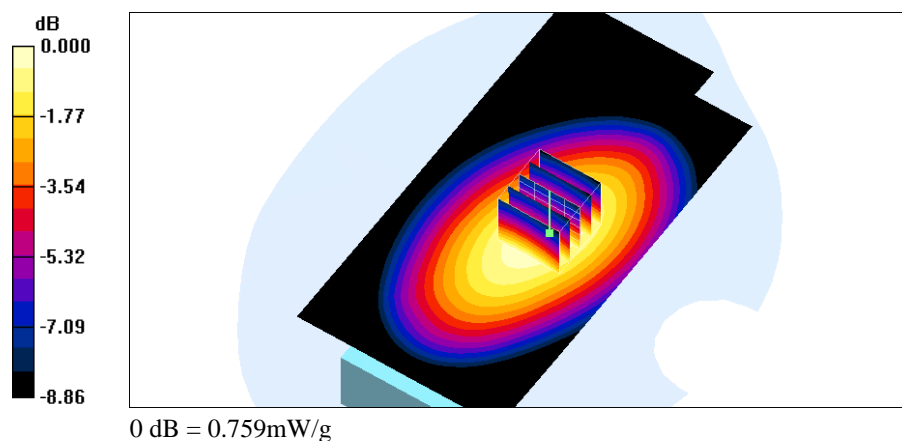



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 11:55:29 AM

Flat_FRS CH8_Brain_Alkaline_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 43.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.10 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.8 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

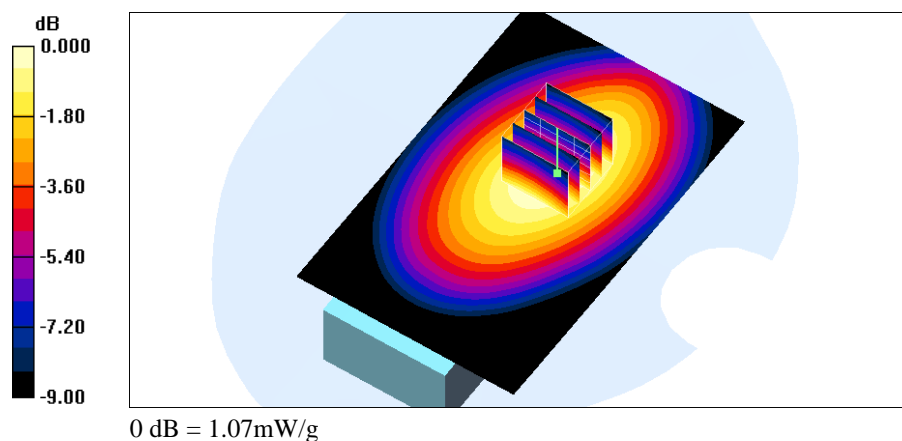



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 8:55:58 AM

Flat_FRS CH11_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 43.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.713 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.5 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.478 mW/g

Maximum value of SAR (measured) = 0.711 mW/g

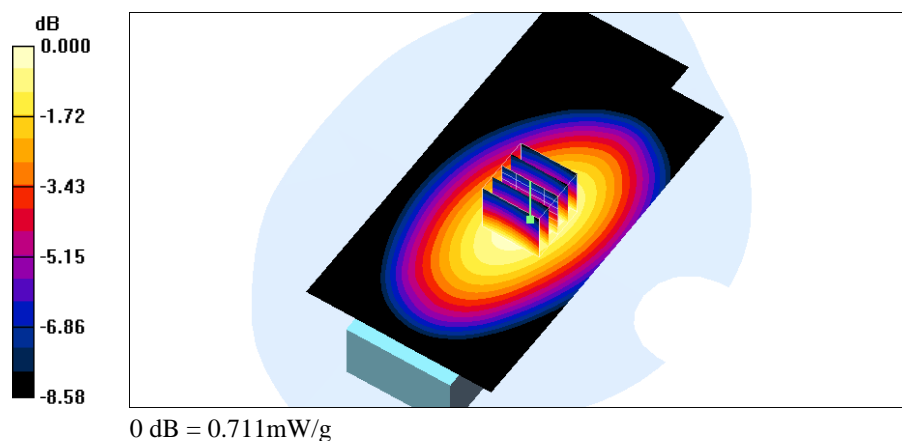



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/12/2007 9:15:17 AM

Flat_FRS CH14_Brain_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 43.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(6.8, 6.8, 6.8); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.682 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.1 V/m; Power Drift = -0.178 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.673 mW/g

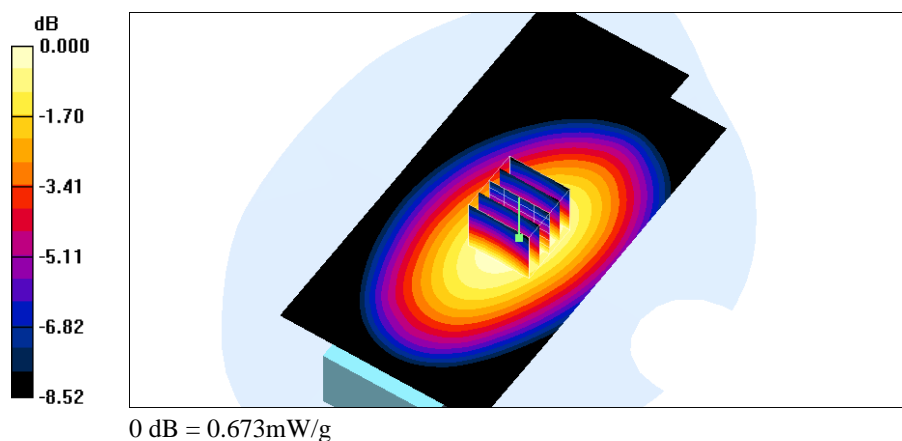



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/15/2007 12:16:11 AM

Flat_FRS CH1_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5625 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.469 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.0 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.306 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

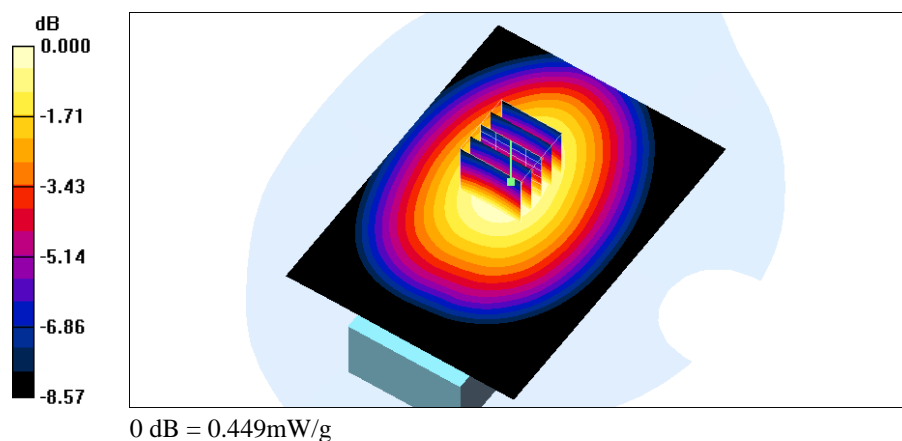



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 11:31:53 PM

Flat_FRS CH4_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.491 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.0 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.473 mW/g

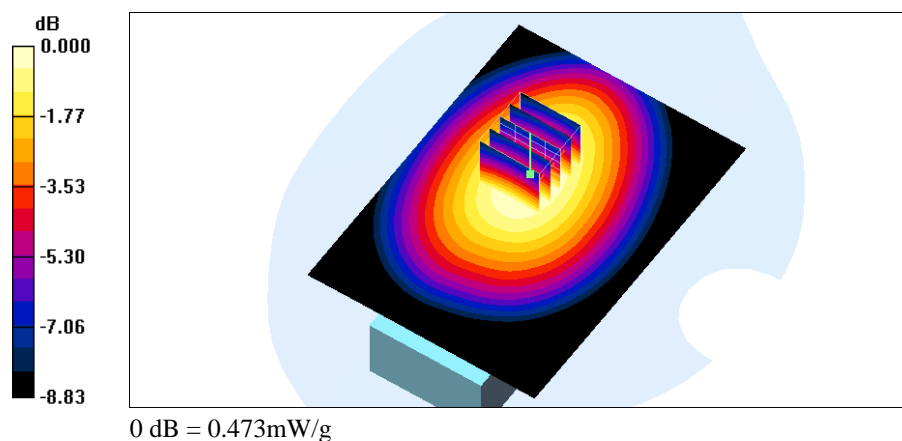



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 11:53:11 PM

Flat_FRS CH7_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.506 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.8 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.483 mW/g

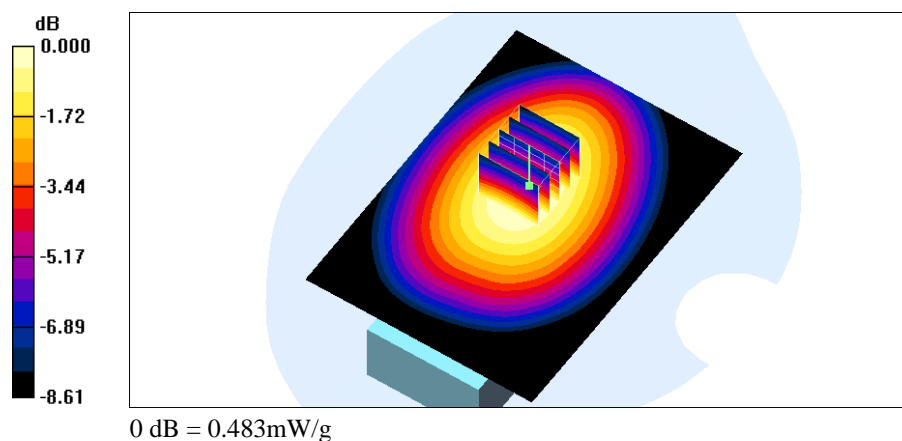



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/15/2007 12:39:59 AM

Flat_FRS CH7_Headset_muscle_belt clip_Alkaline

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.560 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.7 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.548 mW/g

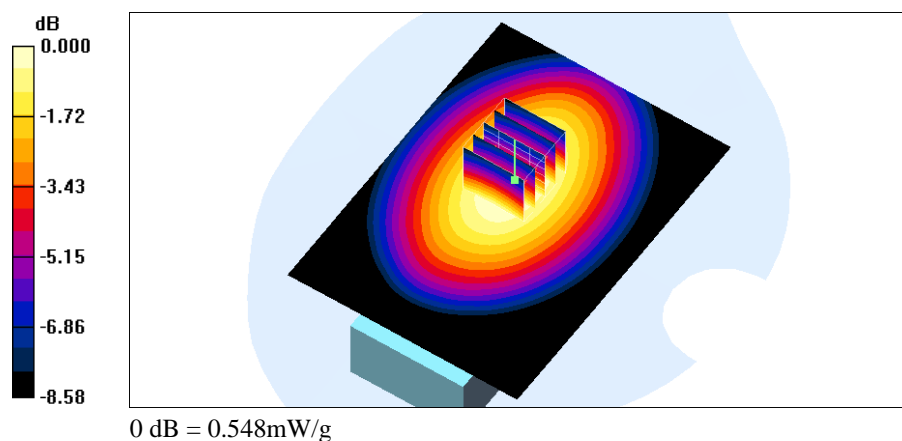



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 9:18:59 PM

Flat_FRS CH8_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.525 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.7 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

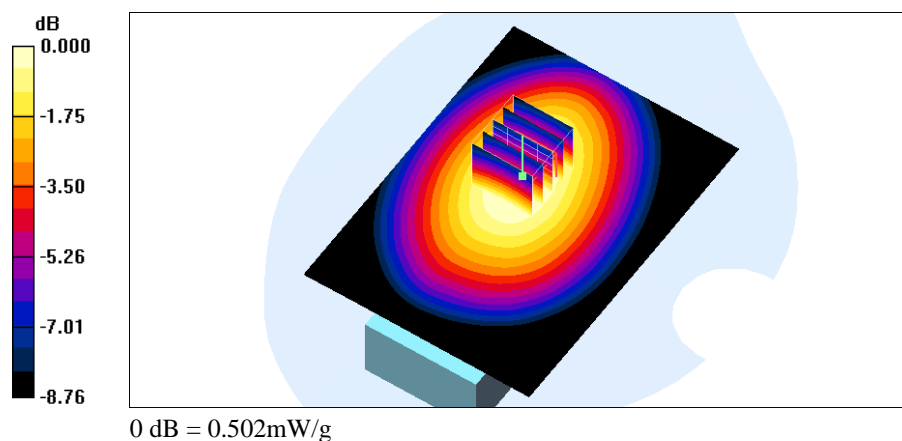



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 10:47:22 PM

Flat_FRS CH8_Headset_muscle_belt clip_Alkaline

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.593 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.8 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.568 mW/g

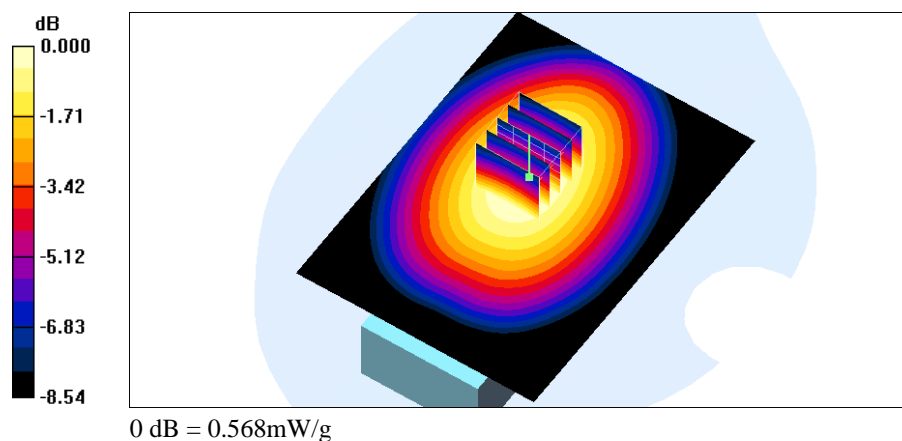



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 10:26:27 PM

Flat_FRS CH11_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.463 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.2 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

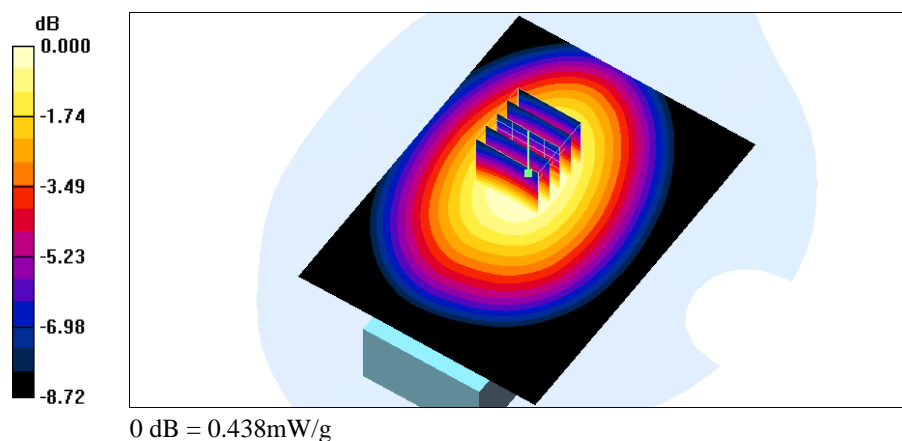



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 10:04:16 PM

Flat_FRS CH14_Headset_muscle_belt clip_Ni-MH

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.483 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.7 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

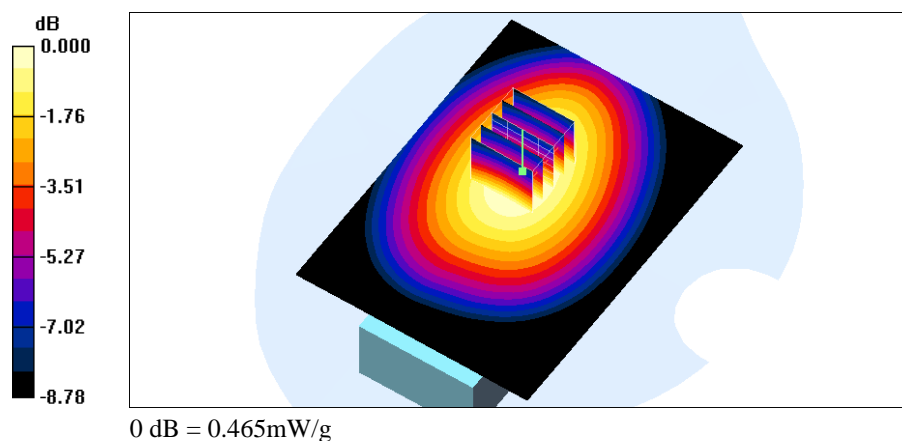



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 5:40:38 PM

Flat_FRS CH1_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5625 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.472 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.5 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.458 mW/g

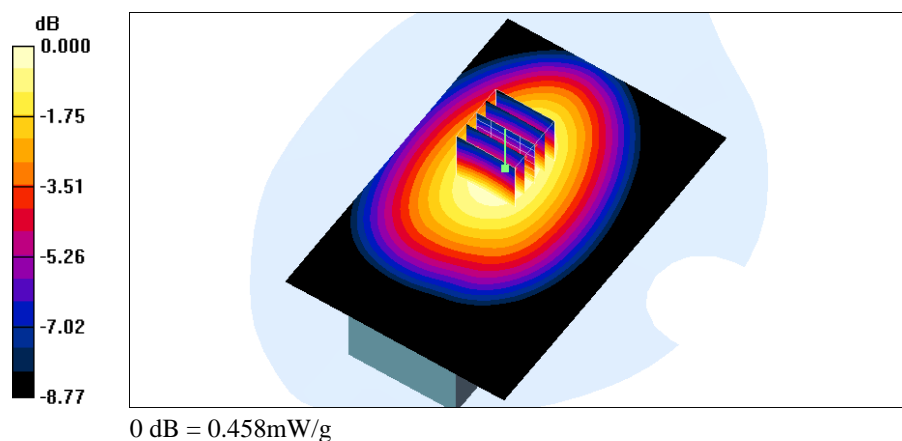



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 6:04:50 PM

Flat_FRS CH4_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.501 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.4 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

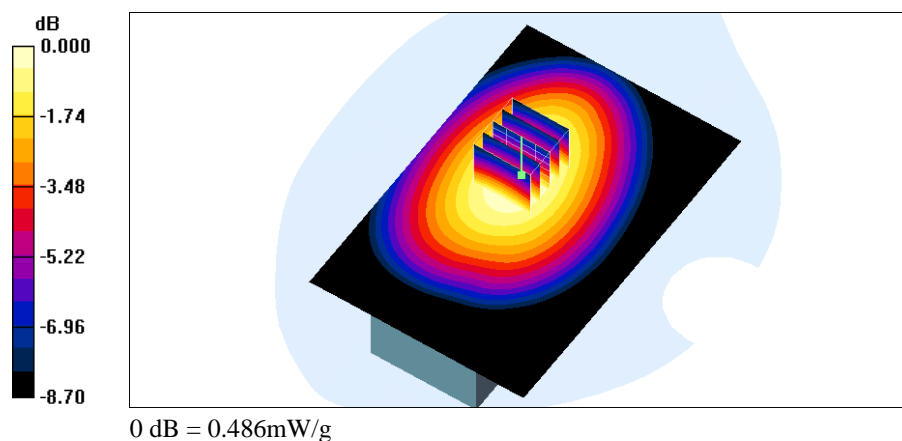



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 6:27:37 PM

Flat_FRS CH7_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.516 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.9 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.497 mW/g

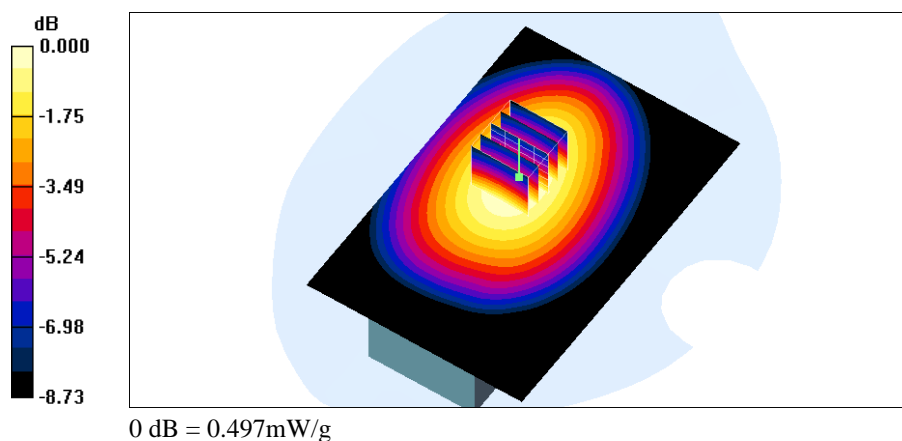



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 6:50:27 PM

Flat_FRS CH7_Headset_muscle_Alkaline_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 462.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7125 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x121x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.635 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.8 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

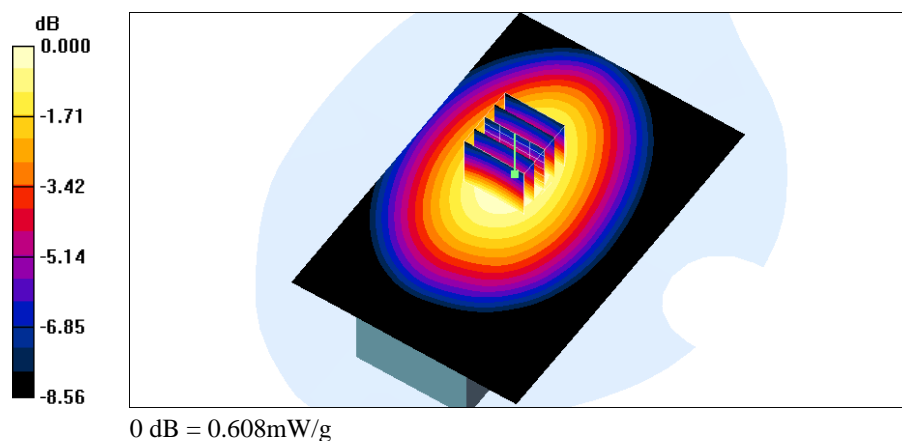



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 7:11:11 PM

Flat_FRS CH8_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.500 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.2 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.487 mW/g

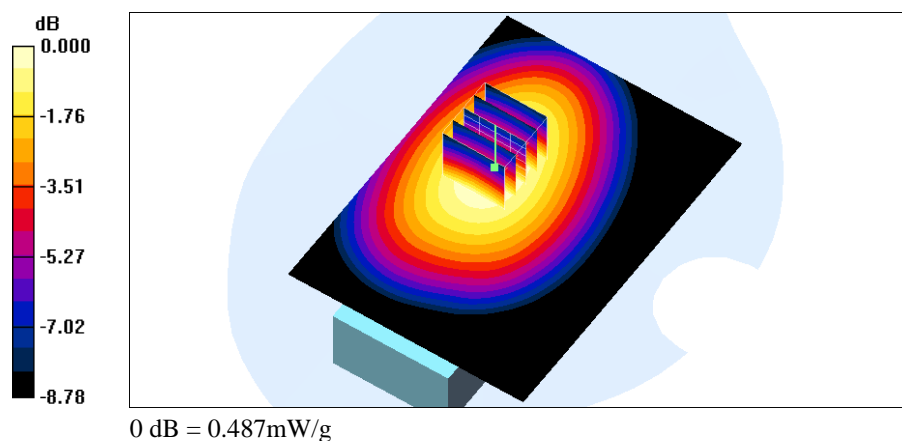



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 8:55:38 PM

Flat_FRS CH8_Headset_muscle_Alkaline_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.699 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.9 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.452 mW/g

Maximum value of SAR (measured) = 0.661 mW/g

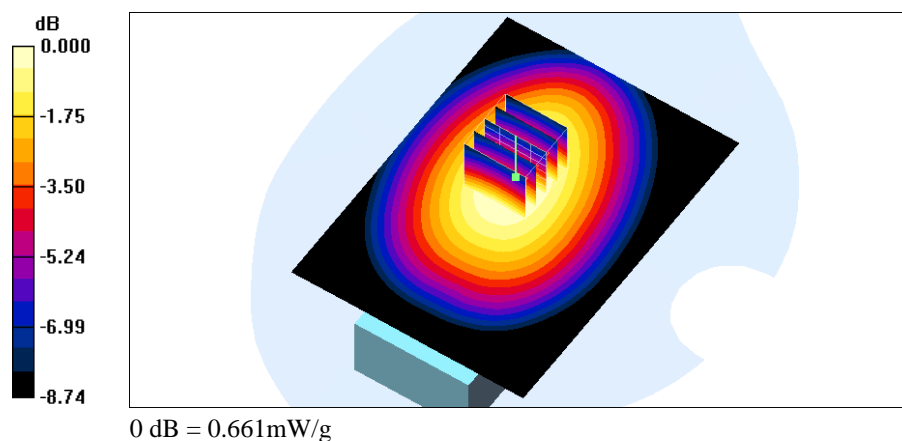



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 7:33:22 PM

Flat_FRS CH11_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.496 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.3 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

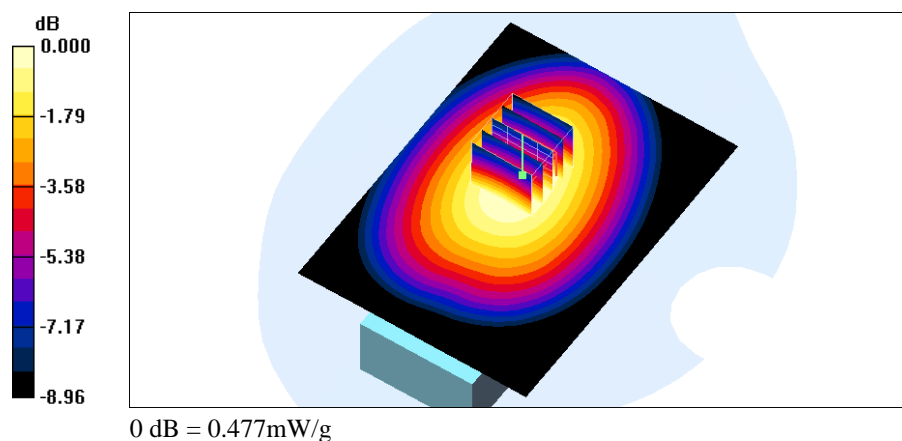



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/14/2007 7:57:09 PM

Flat_FRS CH14_Headset_muscle_Ni-MH_15mm

DUT: Motorola T8525; Type: Two way radio with FRS; FCC ID:K7GT8525

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.59, 7.59, 7.59); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (81x111x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.514 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.5 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.667 W/kg


SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

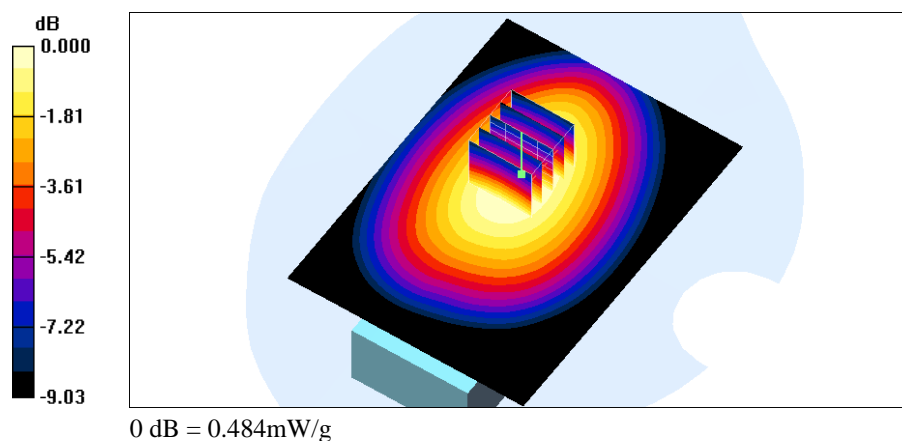





Z-axis Plot of SAR Measurement

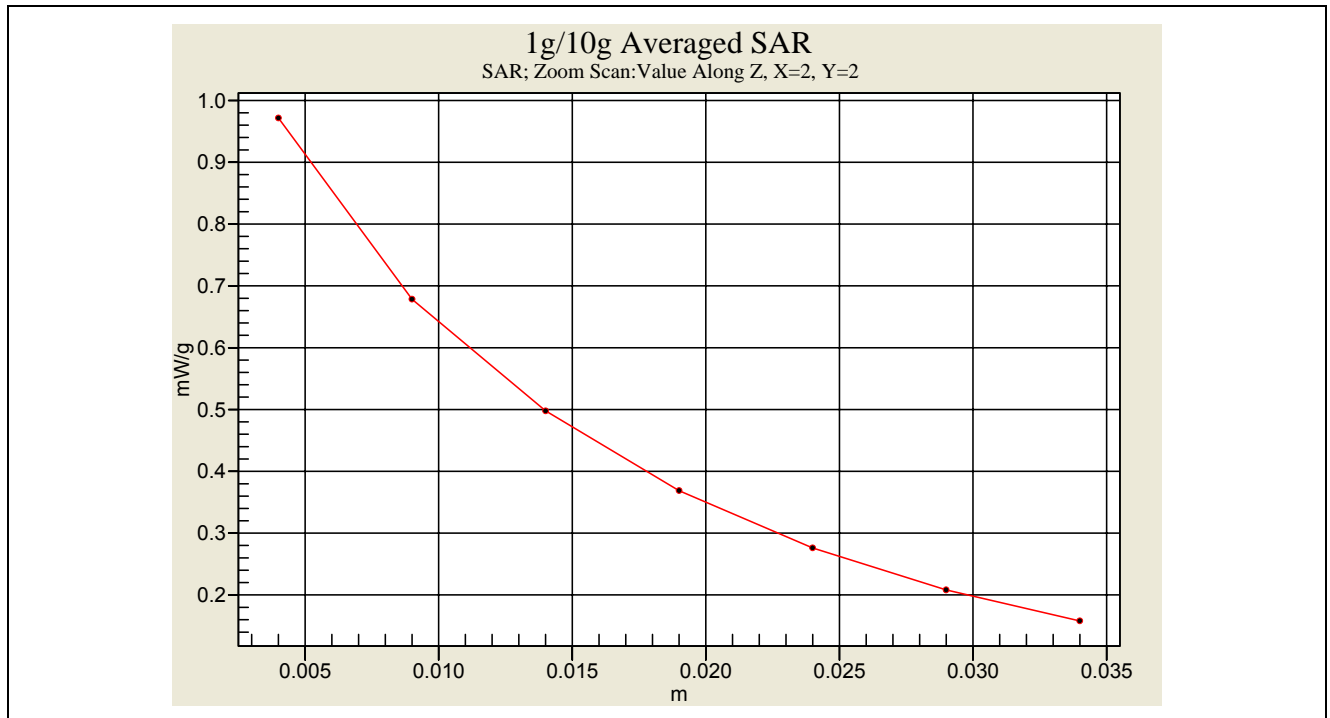


FRS Face SAR -1.5 cm Spacing _ CH7 _ ALKALINE

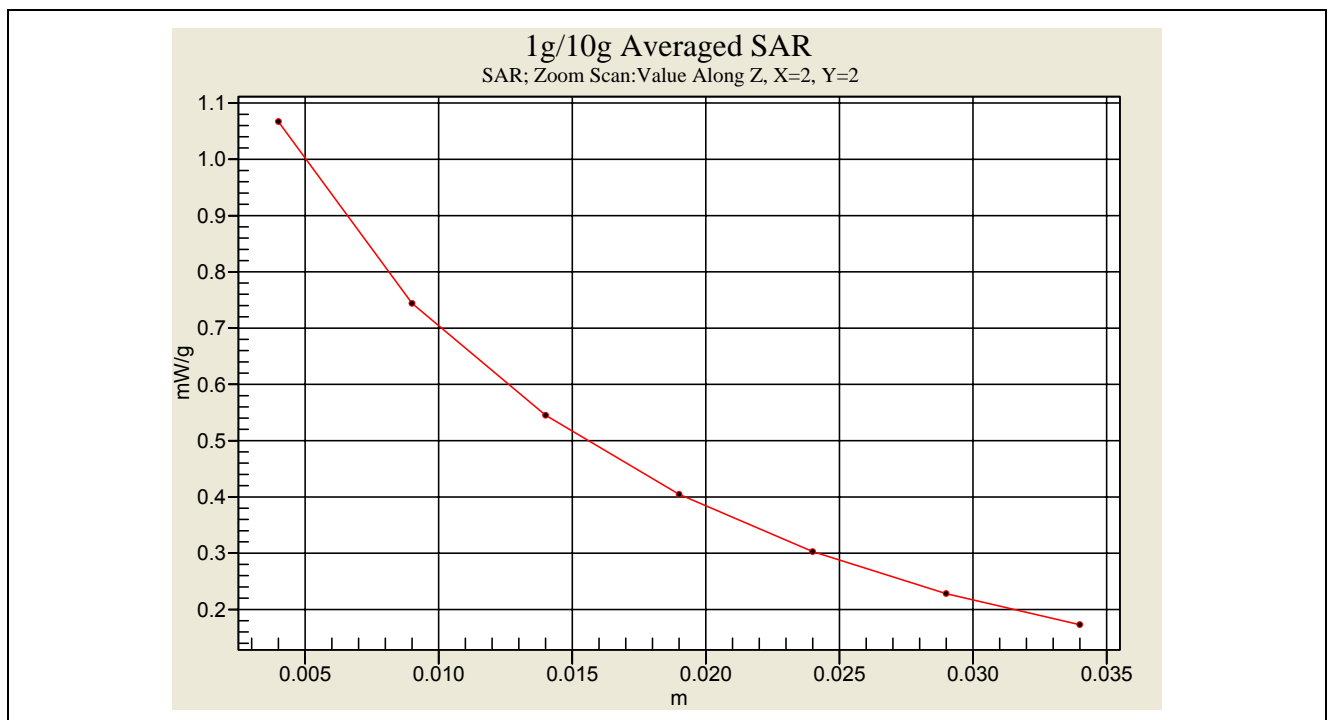


FRS Face SAR -1.5 cm Spacing _ CH8 _ ALKALINE

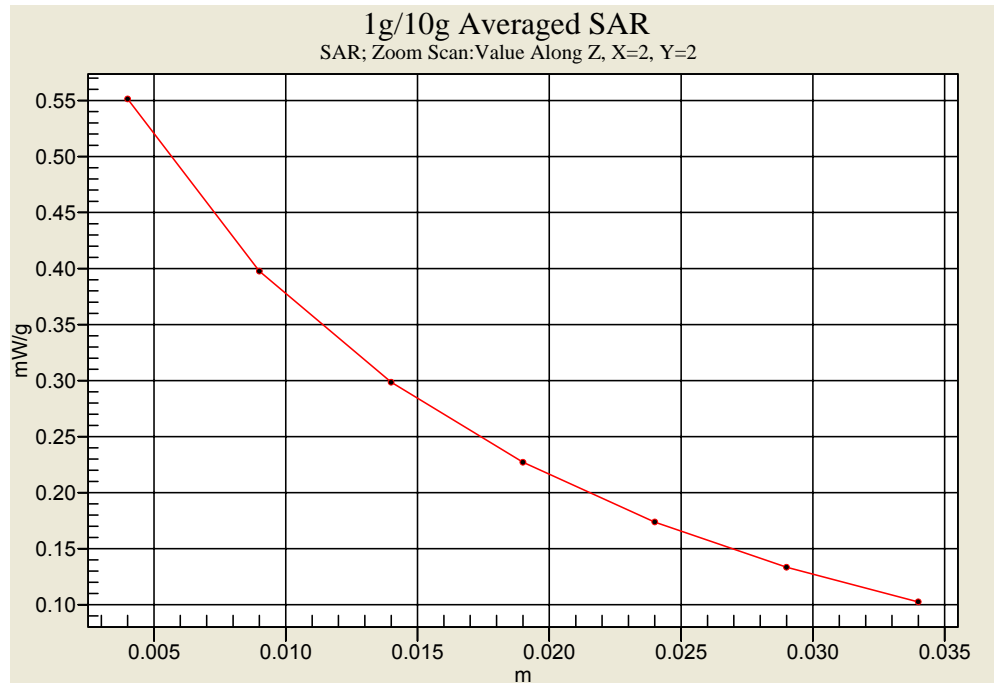


FRS Body SAR with Belt-clip _ CH7 _ ALKALINE

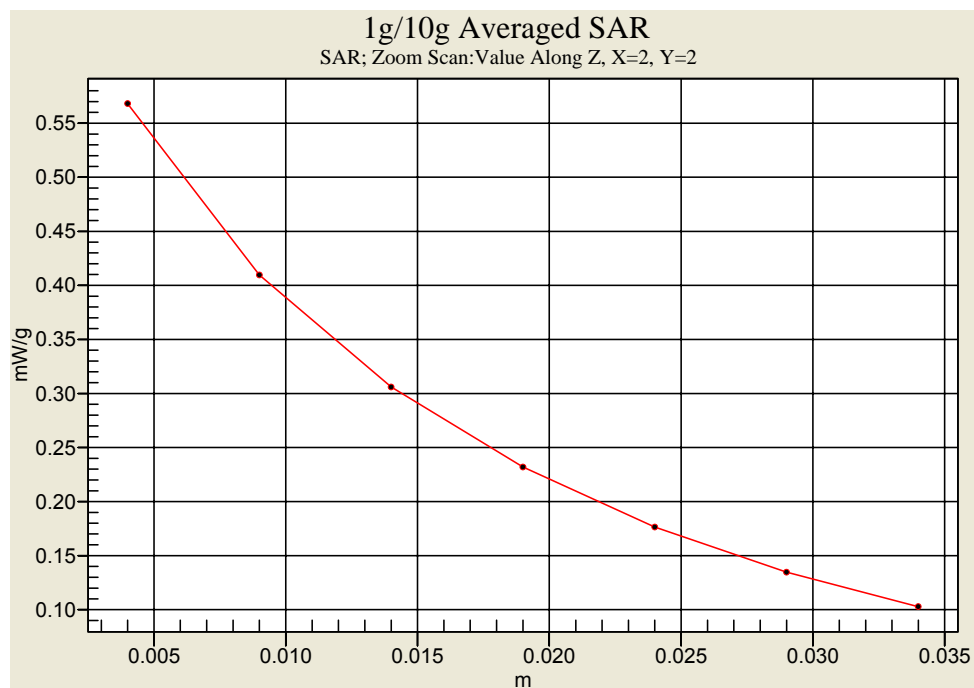

FRS Body SAR with Belt-clip _ CH8 _ ALKALINE

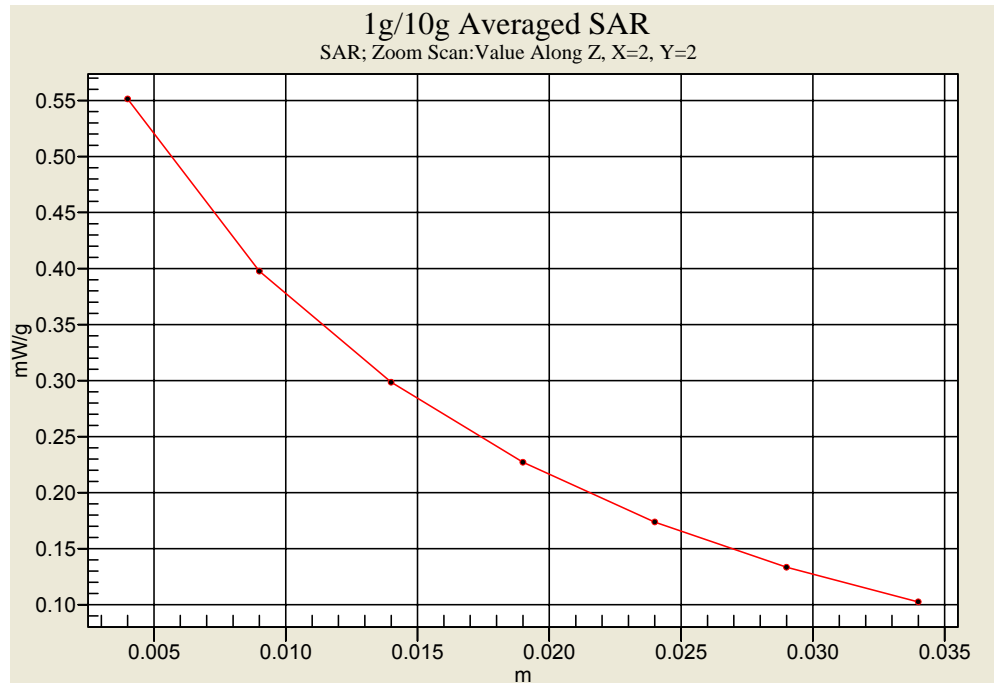

FRS Body SAR w/o Belt-clip -1.5 cm Spacing _ CH7 _ ALKALINE

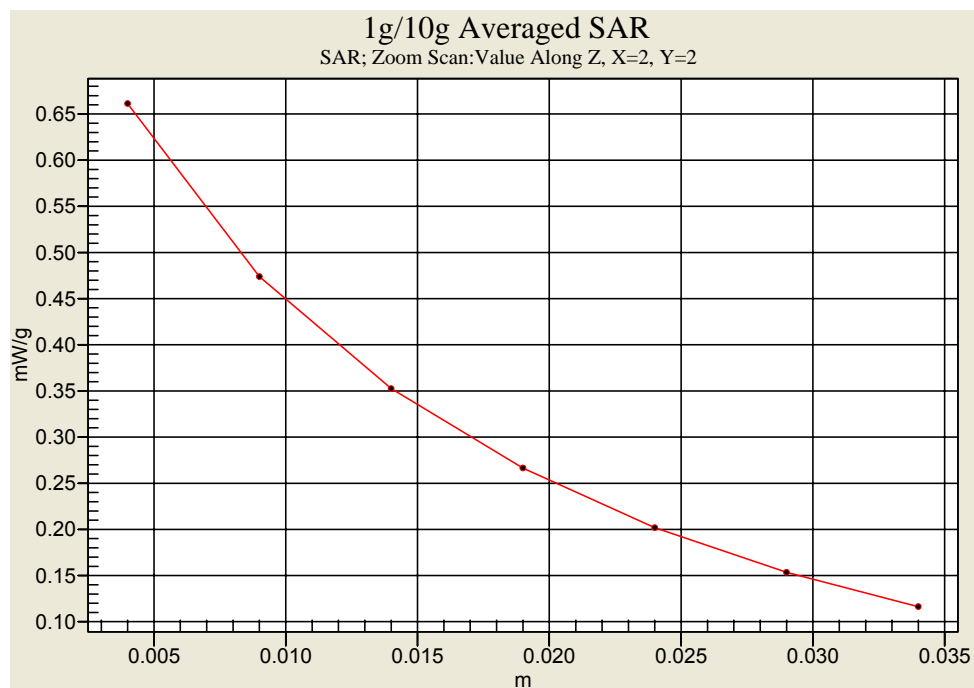

FRS Body SAR w/o Belt-clip -1.5 cm Spacing _ CH8 _ ALKALINE



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D450V2 SN:1021 Calibration No.D450V2-1021_Mar07
- Probe _ ET3DV6 SN:1530 Calibration No.ET3-1530_Sep06
- DAE _ DAE4 SN:541 Calibration No.DAE4-541_Oct06