



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1113V2

Product Name	AC1200 DB Wi-Fi Dual-Band AC+ Gigabit Router
Brand Name	Belkin
Model No.	F9K1113v2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Apr. 11, 2013
Final Test Date	Apr. 25, 2013
Submission Type	Original Equipment
Operating Mode	Master

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes .....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle.....	10
3.11. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>15</b>
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth Measurement.....	21
4.3. Maximum Conducted Output Power Measurement.....	29
4.4. Power Spectral Density Measurement .....	32
4.5. Peak Excursion Measurement .....	38
4.6. Radiated Emissions Measurement .....	52
4.7. Band Edge Emissions Measurement .....	69
4.8. Frequency Stability Measurement .....	75
4.9. Antenna Requirements .....	77
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>78</b>
<b>6. TEST LOCATION.....</b>	<b>80</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A12</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. CO-LOCATION REPORT.....</b>	<b>D1 ~ D3</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR341129AB	Rev. 01	Initial issue of report	Apr. 29, 2012

## 1. CERTIFICATE OF COMPLIANCE

Product Name : AC1200 DB Wi-Fi Dual-Band AC+ Gigabit Router  
Brand Name : Belkin  
Model No. : F9K1113v2  
Applicant : Belkin International, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 11, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.01 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.08 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.01 dB
4.5	15.407(a)	Peak Excursion	Complies	2.73 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.07 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (20MHz): 18.08 MHz 802.11ac MCS0/Nss1 (40MHz): 36.48 MHz 802.11ac MCS0/Nss1 (80MHz): 76.16 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (20MHz): 15.72 dBm ; 802.11ac MCS0/Nss1 (40MHz): 15.92 dBm ; 802.11ac MCS0/Nss1 (80MHz): 15.78 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 17.28 MHz
Maximum Conducted Output Power	11a: 15.72 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)			Two (TX)		
	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	X	X	X	V	X	X
IEEE 802.11an	X	X	X	V	V	X
IEEE 802.11ac	X	X	X	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	M0-15
802.11n (HT40)	2	M0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

Power	Brand	Model	Rating
Adapter 1	LEI	ML30-V120250-A1	INPUT: 120V ~ 60Hz 0.8A OUTPUT: 12V – 2.5A
Adapter 2	DVE	DSA-30PFB-12 FUS 120250	INPUT: 100-240V ~ 50/60Hz 0.8A OUTPUT: 12V – 2.5A




### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Arcadyan	-	Dipole Antenna	I-PEX	3.98	-
2	Arcadyan	-	Dipole Antenna	I-PEX	4.60	-
3	Arcadyan	-	Dipole Antenna	I-PEX	-	4.06
4	Arcadyan	-	Dipole Antenna	I-PEX	-	4.09

Note: The EUT has four antennas

For IEEE 802.11a/an/ac mode (2TX/2RX):

Chain 3 and Chain 4 could transmit/receive simultaneously.

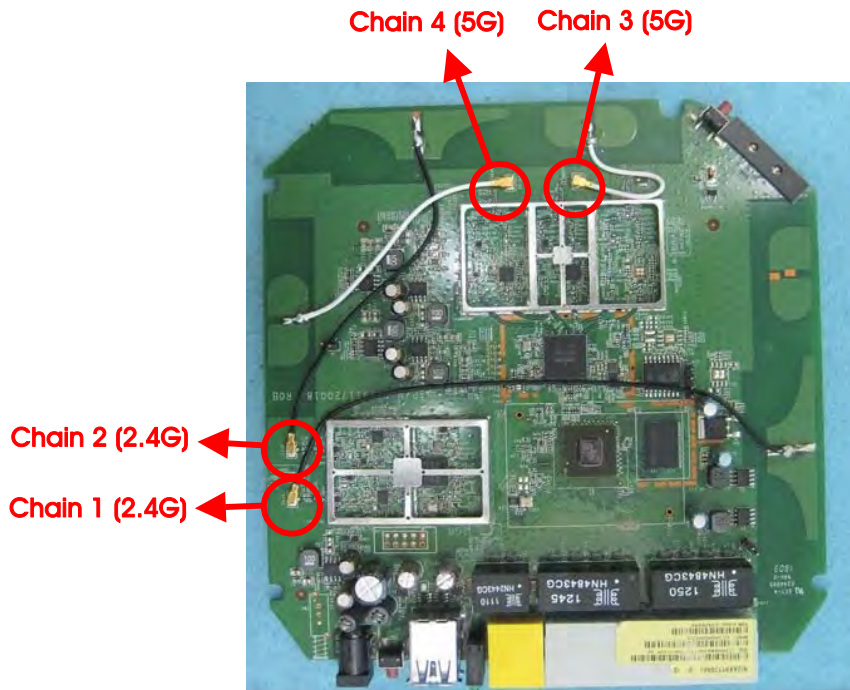

### 3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal link		Auto	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	3+4
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	3+4
	11ac 80MHz	Band 1	MCS0/Nss1	42	3+4
	11a	Band 1	6Mbps	36/40/48	3+4
Power Spectral Density	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	3+4
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	3+4
	11ac 80MHz	Band 1	MCS0/Nss1	42	3+4
	11a	Band 1	6Mbps	36/40/48	3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	3+4
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	3+4
	11ac 80MHz	Band 1	MCS0/Nss1	42	3+4
	11a	Band 1	6Mbps	36/40/48	3+4
Radiated Emission Below 1GHz	Normal link		Auto	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	3+4
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	3+4
	11ac 80MHz	Band 1	MCS0/Nss1	42	3+4
	11a	Band 1	6Mbps	36/40/48	3+4
Band Edge Emission	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	3+4
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	3+4
	11ac 80MHz	Band 1	MCS0/Nss1	42	3+4
	11a	Band 1	6Mbps	36/40/48	3+4
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Upstanding EUT + Adapter 1

Mode 2. Upstanding EUT + Adapter 2

**For Radiated Emission test below 1GHz:**

Mode 1. Upstanding EUT + Adapter 1

Mode 2. Upstanding EUT + Adapter 2

**For Radiated Emission test above 1GHz:**

Mode 1. CTX

**<For MPE and Co-location Test>:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC) Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Test Site No.: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	QDS-BRCM1049LE
Flash disk3.0	Silicon	I-Series	DoC
Flash disk3.0	ADATA	C103	DoC

Test Site No.: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	QDS-BRCM1049LE
Flash disk3.0	Silicon	I-Series	DoC
Flash disk3.0	ADATA	C103	DoC

Test Site No.: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 20MHz

Test Software Version	Manual Tool Version : 2.0.0.3		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 20MHz	40	40	40

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 40MHz

Test Software Version	Manual Tool Version : 2.0.0.3	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 40MHz	42	42

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 80MHz

Test Software Version	Manual Tool Version : 2.0.0.3
Frequency	5210 MHz
MCS0/Nss1 80MHz	44

#### Power Parameters of IEEE 802.11a


Test Software Version	Manual Tool Version : 2.0.0.3		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	40	40	40

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle


#### IEEE 802.11ac MCS0/Nss1 20MHz

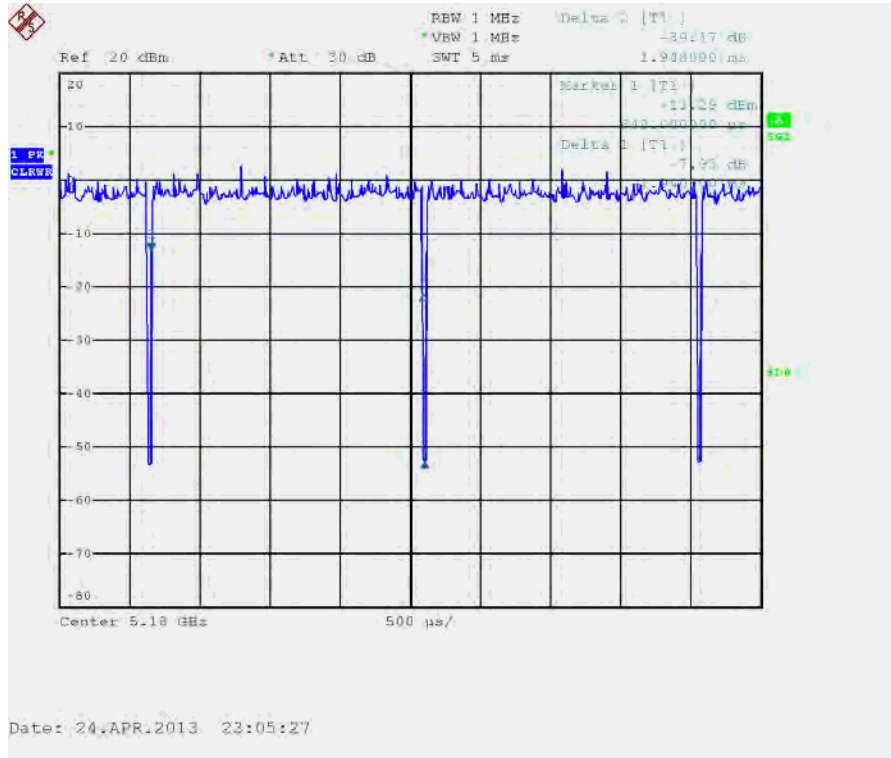


#### IEEE 802.11ac MCS0/Nss1 40MHz

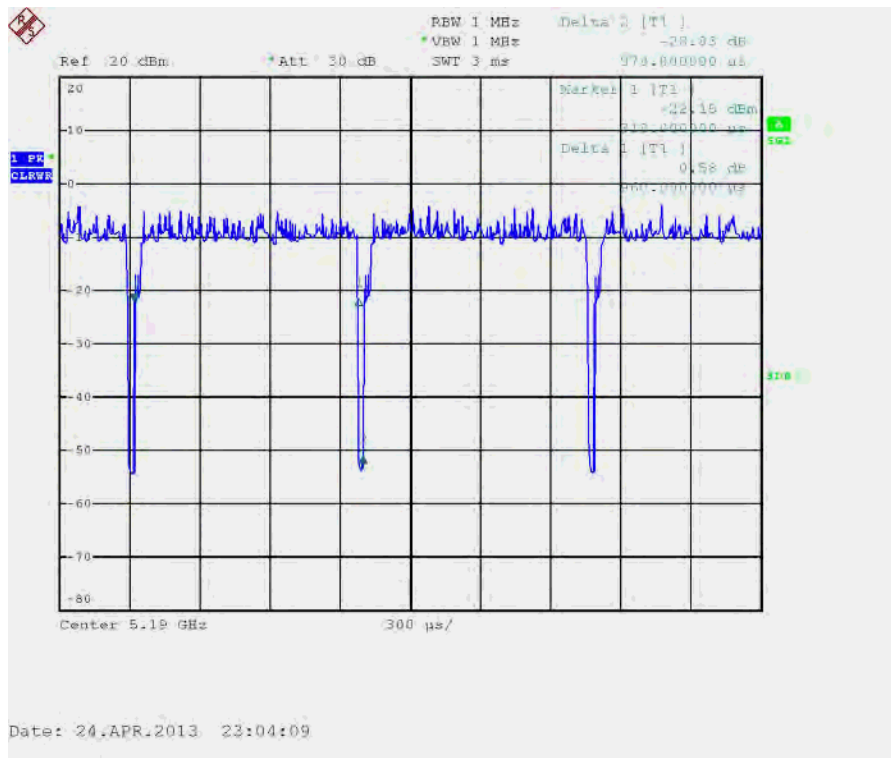

IEEE 802.11ac MCS0/Nss1 80MHz

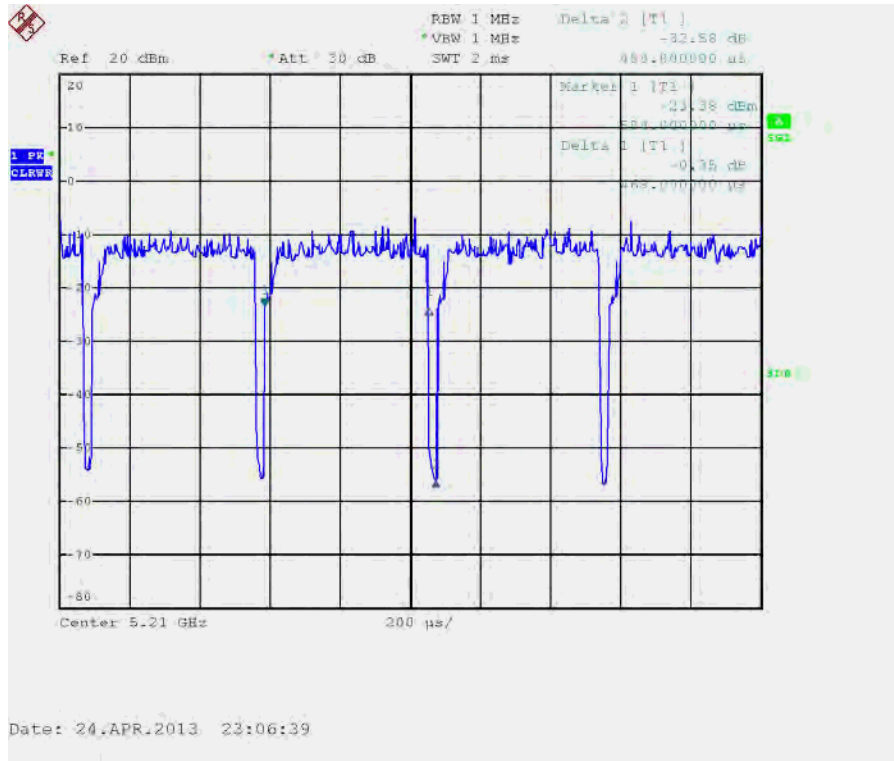


IEEE 802.11a

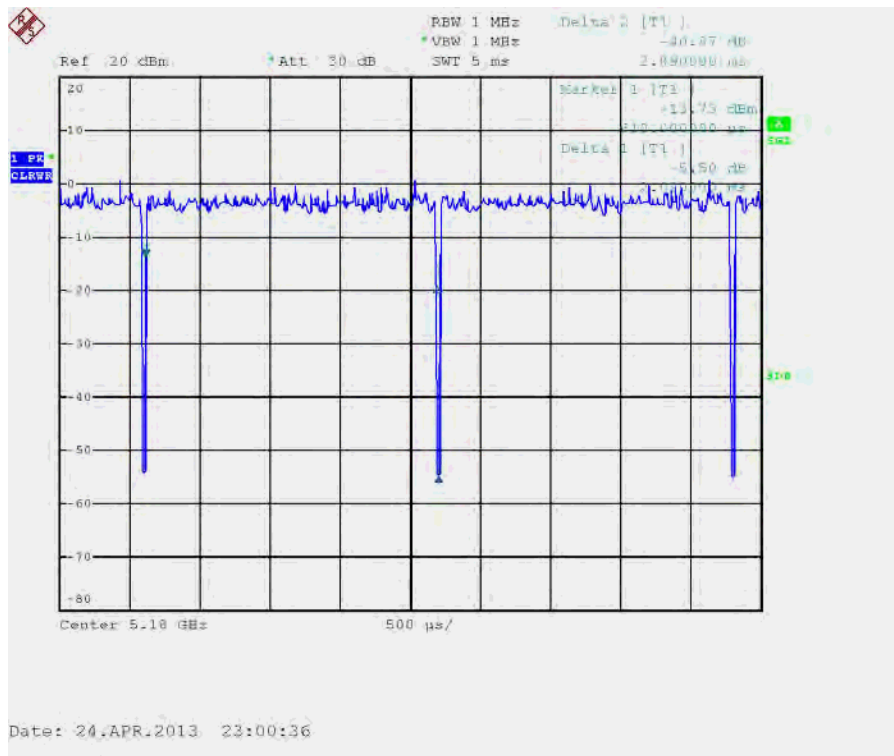

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

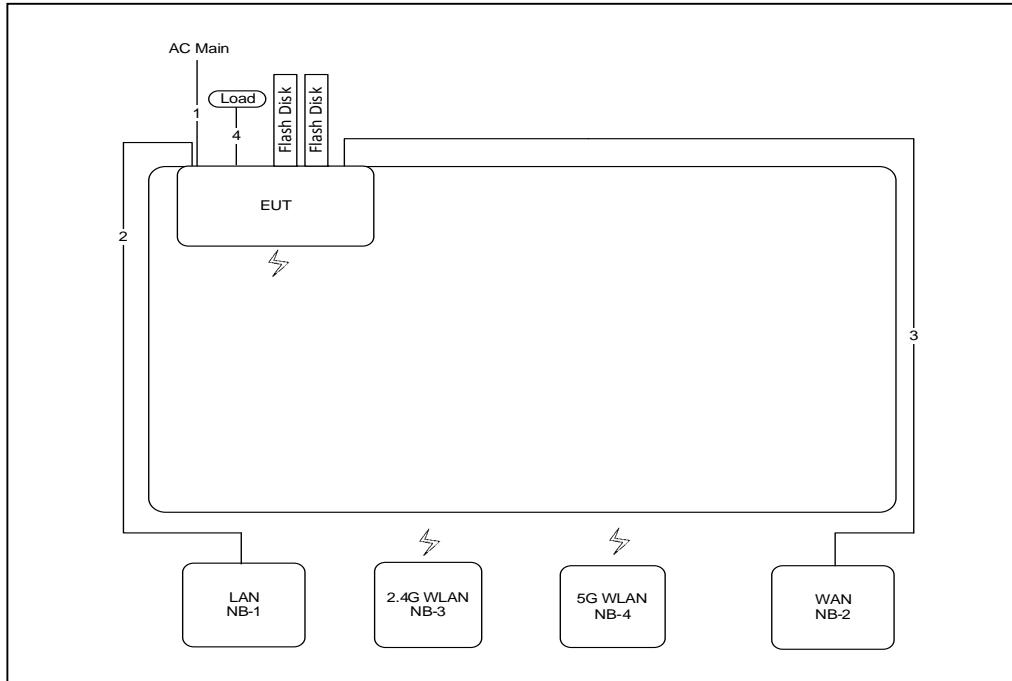

Item	Connection	Shield	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1m

### 3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

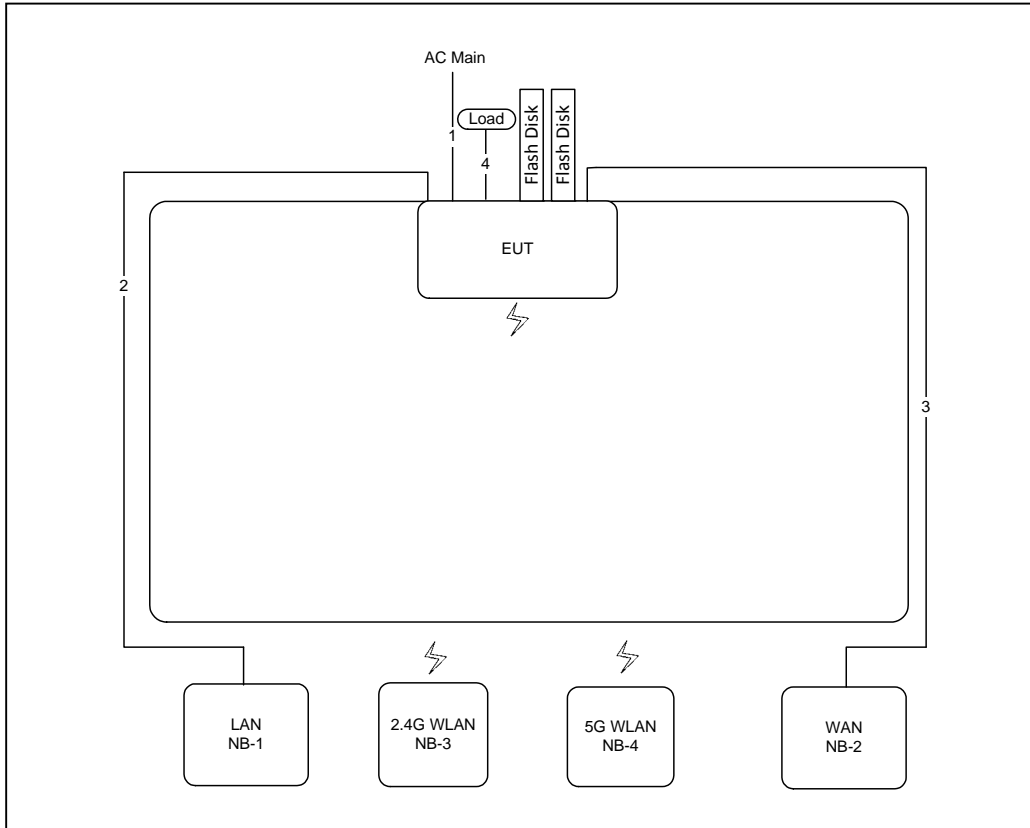

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ45 cable	No	10m
3	RJ45 cable	No	10m
4	RJ45 cable*3	No	1m



Test Configuration: above 1GHz

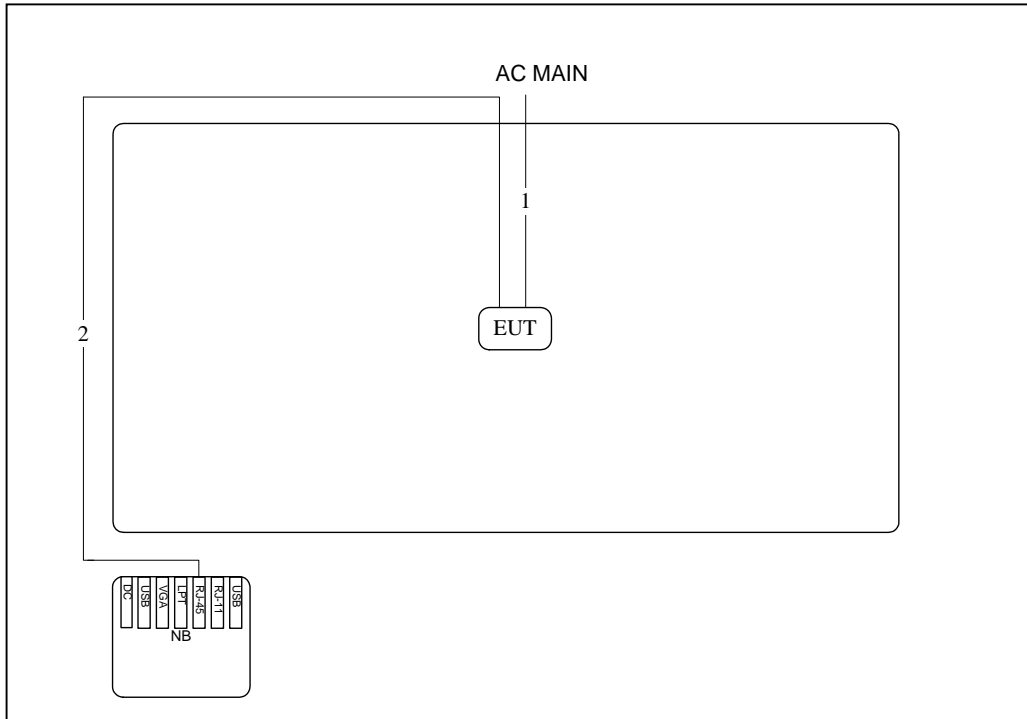

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	49%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

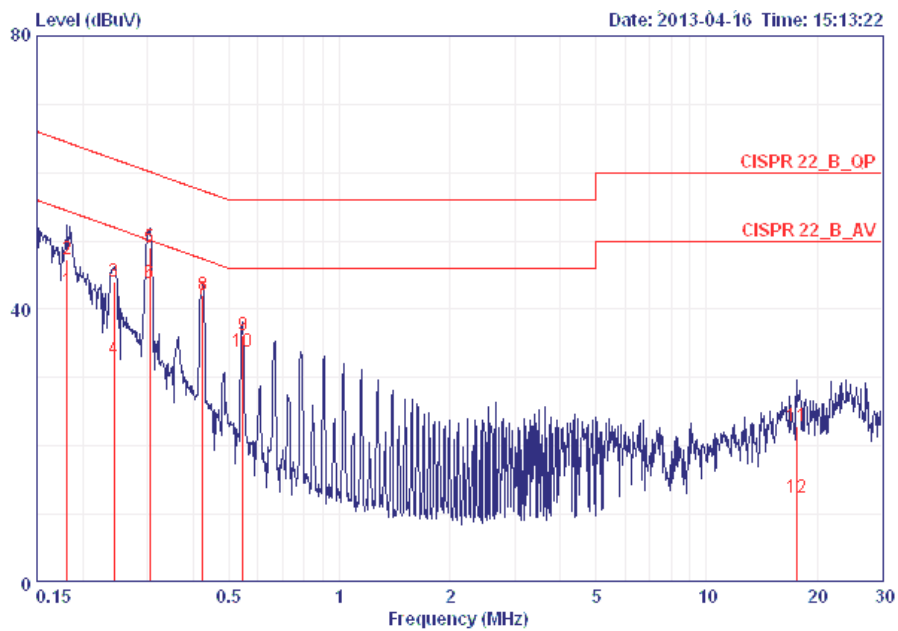

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18152	42.62	-11.79	54.42	42.28	0.15	0.19	AVERAGE
2	0.18152	47.24	-17.17	64.42	46.90	0.15	0.19	QP
3	0.24293	43.97	-18.03	62.00	43.62	0.15	0.20	QP
4	0.24293	32.80	-19.20	52.00	32.45	0.15	0.20	AVERAGE
5	0.30509	49.00	-11.10	60.10	48.65	0.15	0.20	QP
6	0.30509	43.91	-6.19	50.10	43.56	0.15	0.20	AVERAGE
7	0.42373	41.36	-6.01	47.37	41.01	0.15	0.20	AVERAGE
8	0.42373	42.17	-15.20	57.37	41.82	0.15	0.20	QP
9	0.54644	36.20	-19.81	56.00	35.84	0.16	0.20	QP
10	0.54644	33.77	-12.24	46.00	33.41	0.16	0.20	AVERAGE
11	17.568	22.95	-37.05	60.00	22.04	0.45	0.46	QP
12	17.568	12.52	-37.48	50.00	11.61	0.45	0.46	AVERAGE

Temperature	25°C	Humidity	49%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

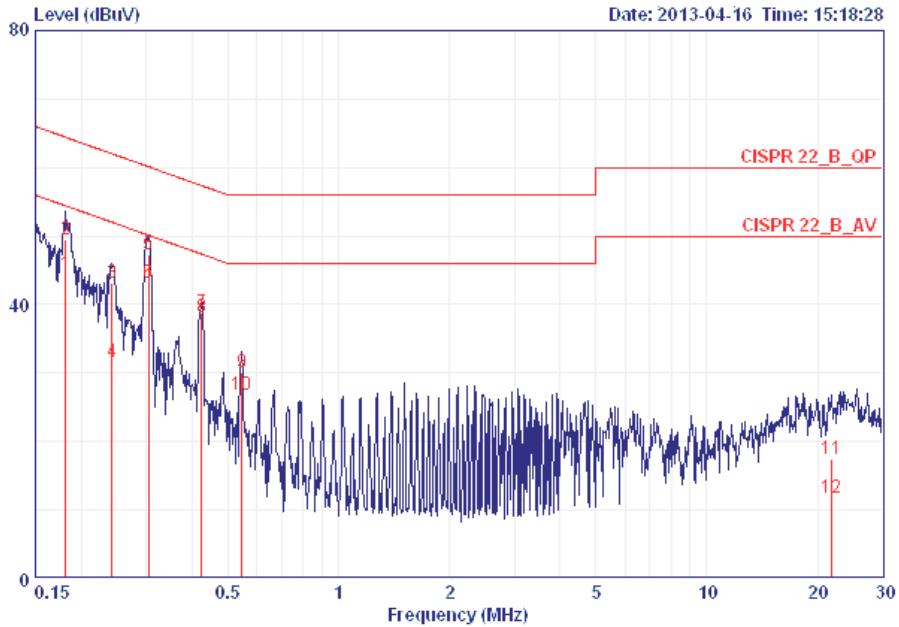


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18152	44.50	-9.91	54.42	44.23	0.08	0.19	AVERAGE
2	0.18152	49.48	-14.93	64.42	49.21	0.08	0.19	QP
3	0.24165	43.13	-18.91	62.04	42.85	0.08	0.20	QP
4	0.24165	31.64	-20.40	52.04	31.36	0.08	0.20	AVERAGE
5	0.30509	47.24	-12.86	60.10	46.96	0.08	0.20	QP
6	0.30509	43.13	-6.97	50.10	42.85	0.08	0.20	AVERAGE
7	0.42373	38.75	-18.62	57.37	38.47	0.08	0.20	QP
8	0.42373	38.07	-9.30	47.37	37.79	0.08	0.20	AVERAGE
9	0.54644	30.08	-25.92	56.00	29.80	0.08	0.20	QP
10	0.54644	26.77	-19.23	46.00	26.49	0.08	0.20	AVERAGE
11	21.830	17.42	-42.58	60.00	16.49	0.43	0.50	QP
12	21.830	11.75	-38.25	50.00	10.82	0.43	0.50	AVERAGE

Note:


$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

Temperature	25°C	Humidity	49%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

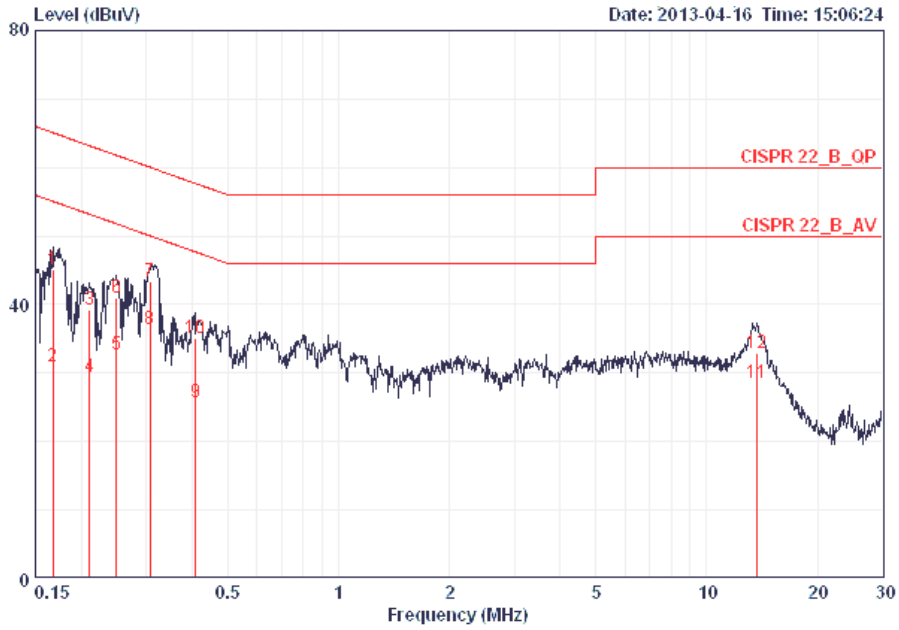

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16765	45.17	-19.91	65.08	44.82	0.16	0.19	QP
2	0.16765	30.98	-24.10	55.08	30.63	0.16	0.19	AVERAGE
3	0.21055	39.33	-23.85	63.18	38.98	0.15	0.20	QP
4	0.21055	29.40	-23.78	53.18	29.05	0.15	0.20	AVERAGE
5	0.24945	32.75	-19.03	51.78	32.40	0.15	0.20	AVERAGE
6	0.24945	41.06	-20.72	61.78	40.71	0.15	0.20	QP
7	0.30671	43.29	-16.77	60.06	42.94	0.15	0.20	QP
8	0.30671	36.44	-13.62	50.06	36.09	0.15	0.20	AVERAGE
9	0.40831	25.73	-21.95	47.68	25.38	0.15	0.20	AVERAGE
10	0.40831	35.02	-22.66	57.68	34.67	0.15	0.20	QP
11	13.623	28.47	-21.53	50.00	27.68	0.39	0.40	AVERAGE
12	13.623	32.92	-27.08	60.00	32.13	0.39	0.40	QP

Temperature	25°C	Humidity	49%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

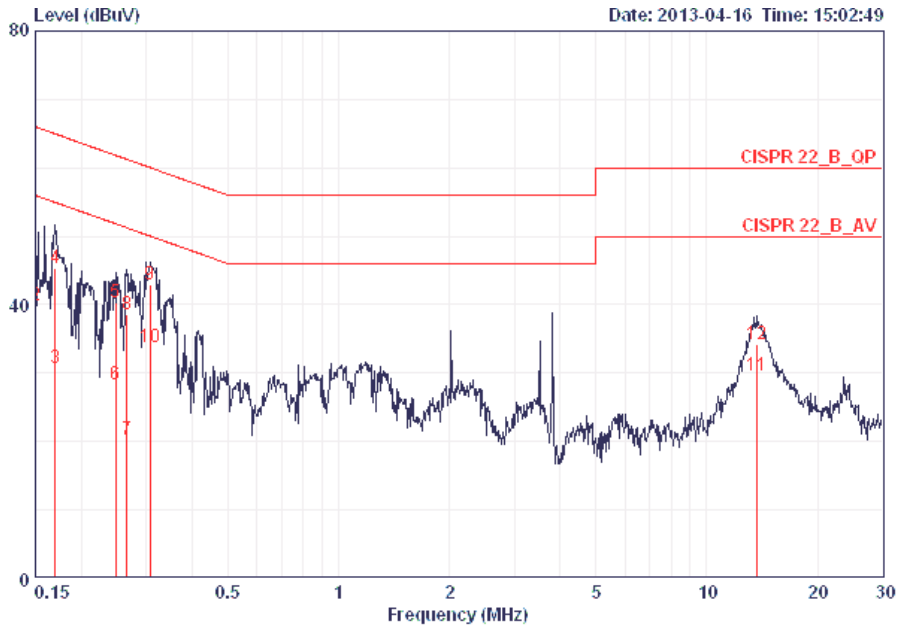

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	15.05	-40.95	56.00	14.79	0.08	0.18	AVERAGE
2	0.15000	39.96	-26.04	66.00	39.70	0.08	0.18	QP
3	0.16944	30.77	-24.22	54.99	30.50	0.08	0.19	AVERAGE
4	0.16944	45.29	-19.70	64.99	45.02	0.08	0.19	QP
5	0.24814	40.38	-21.44	61.82	40.10	0.08	0.20	QP
6	0.24814	28.42	-23.40	51.82	28.14	0.08	0.20	AVERAGE
7	0.26583	20.25	-31.00	51.25	19.97	0.08	0.20	AVERAGE
8	0.26583	38.53	-22.72	61.25	38.25	0.08	0.20	QP
9	0.30671	42.85	-17.21	60.06	42.57	0.08	0.20	QP
10	0.30671	33.77	-16.29	50.06	33.49	0.08	0.20	AVERAGE
11	13.695	29.60	-20.40	50.00	28.90	0.30	0.40	AVERAGE
12	13.695	34.16	-25.84	60.00	33.46	0.30	0.40	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	Approximately 1% of the emission bandwidth
VB	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

7. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
8. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

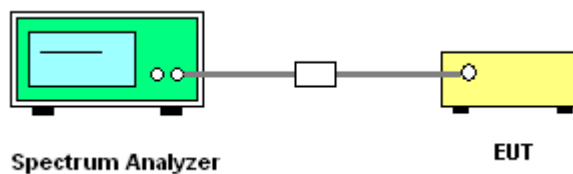

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 4.2.7. Test Result of 26 dB Bandwidth Plot

<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11ac

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	18.08
40	5200 MHz	20.48	18.08
48	5240 MHz	20.48	18.08

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.16
46	5230 MHz	39.04	36.48

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	79.36	76.16




<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Chain 3 + Chain 4**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	20.32	17.28
40	5200 MHz	20.32	17.28
48	5240 MHz	20.32	17.28

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 5180 MHz

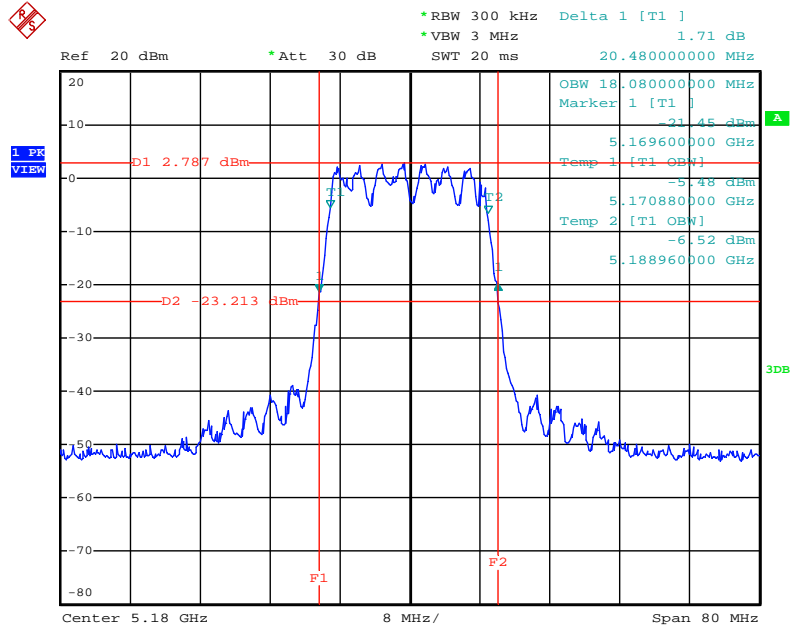


Date: 24.APR.2013 22:16:28

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 5200 MHz

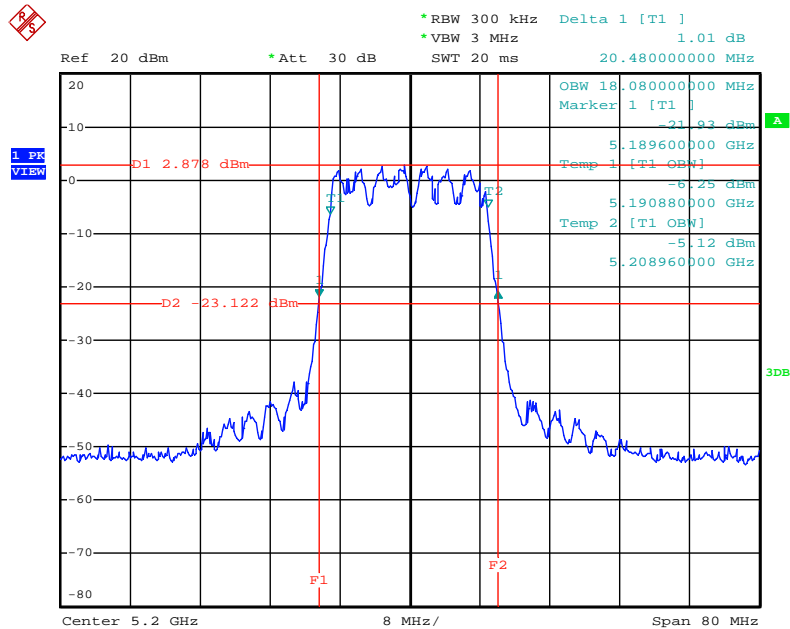


Date: 24.APR.2013 22:16:04

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 5240 MHz

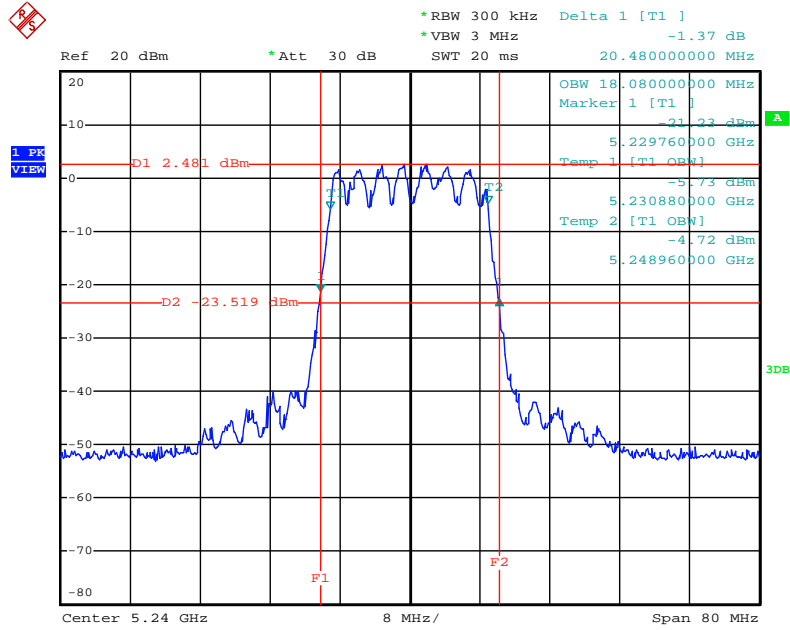


Date: 24.APR.2013 22:15:29

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 5190 MHz

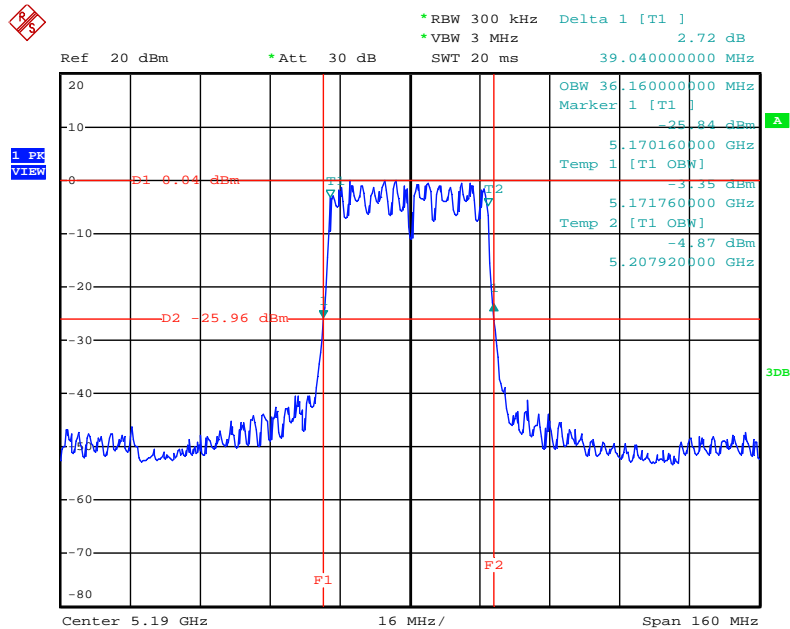


Date: 24.APR.2013 22:18:06

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 5230 MHz

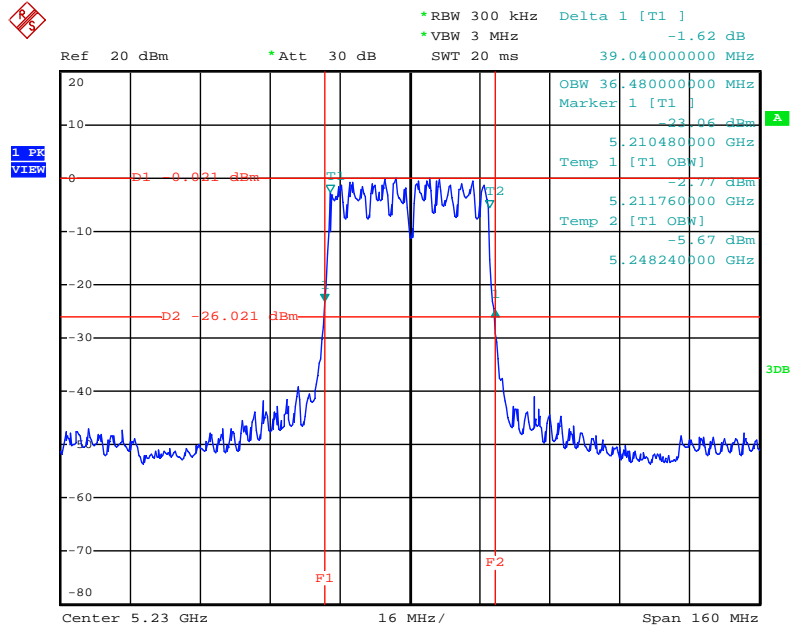


Date: 24.APR.2013 22:18:50

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / 5210 MHz

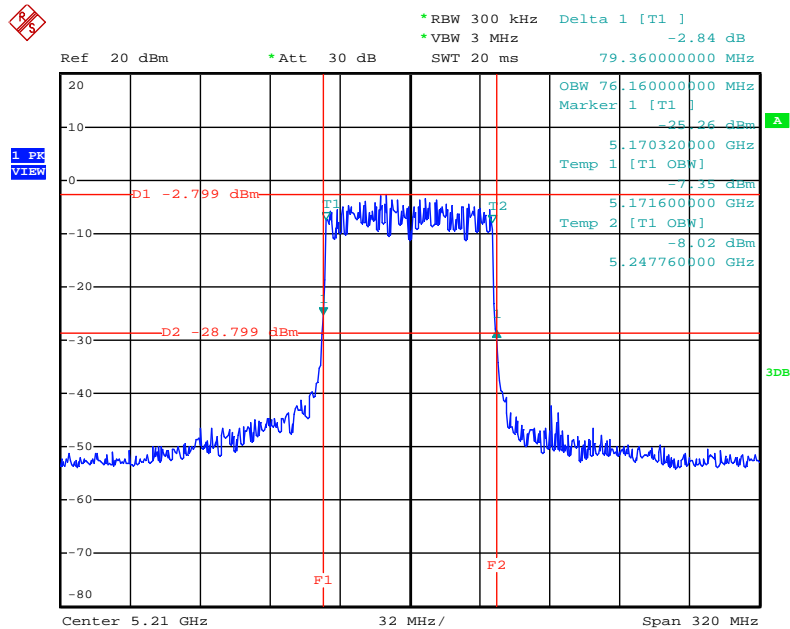


Date: 24.APR.2013 22:19:53

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 5180 MHz

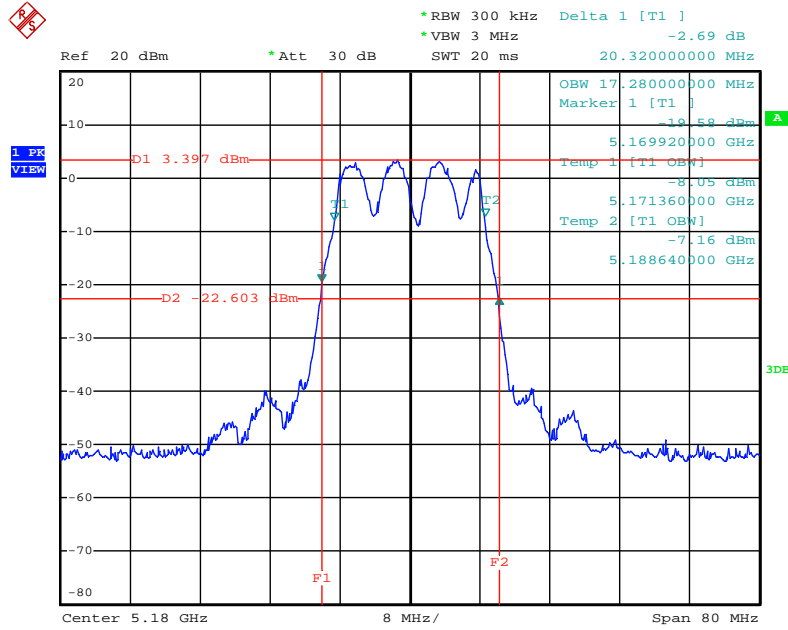


Date: 24.APR.2013 22:12:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 5200 MHz

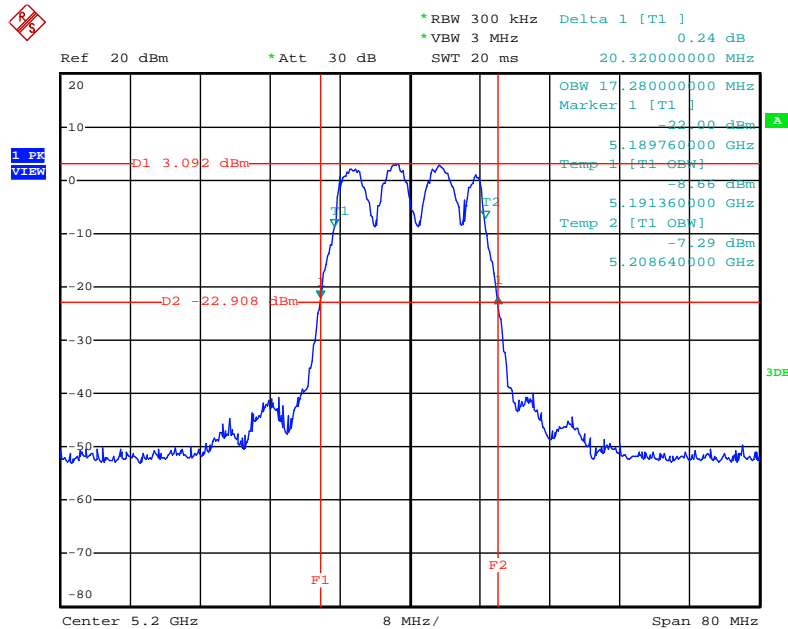

Date: 24.APR.2013 22:14:02

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 5240 MHz

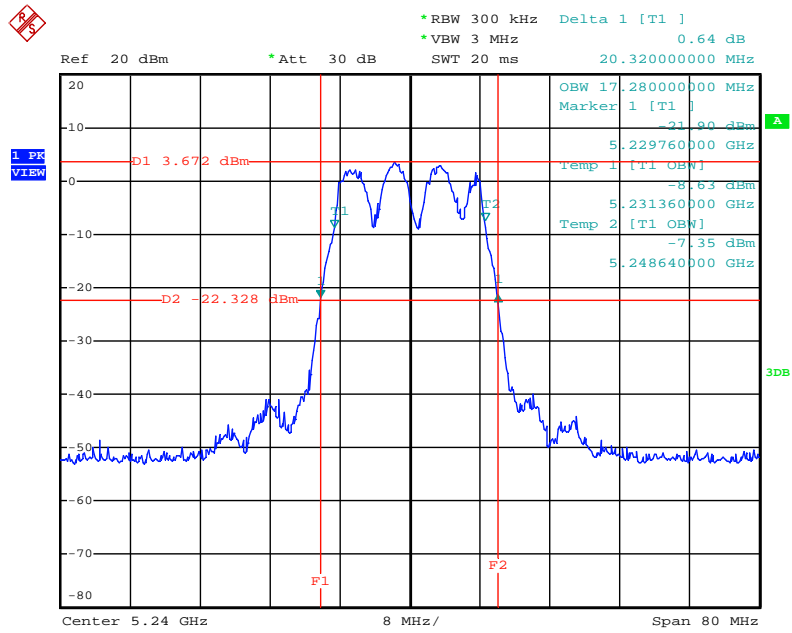

Date: 24.APR.2013 22:14:40

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v01r02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Apr. 24, 2013		

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
36	5180 MHz	13.19	12.18	15.72	17.00	Complies
40	5200 MHz	13.11	11.95	15.58	17.00	Complies
48	5240 MHz	12.91	12.05	15.51	17.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
38	5190 MHz	13.35	12.43	15.92	17.00	Complies
46	5230 MHz	13.35	12.25	15.85	17.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
42	5210 MHz	12.96	12.58	15.78	17.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Apr. 24, 2013		

**Configuration IEEE 802.11a / Chain 3 + Chain 4**

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
36	5180 MHz	13.21	12.05	15.68	17.00	<b>Complies</b>
40	5200 MHz	13.18	12.18	15.72	17.00	<b>Complies</b>
48	5240 MHz	13.09	11.91	15.55	17.00	<b>Complies</b>

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v01r02 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

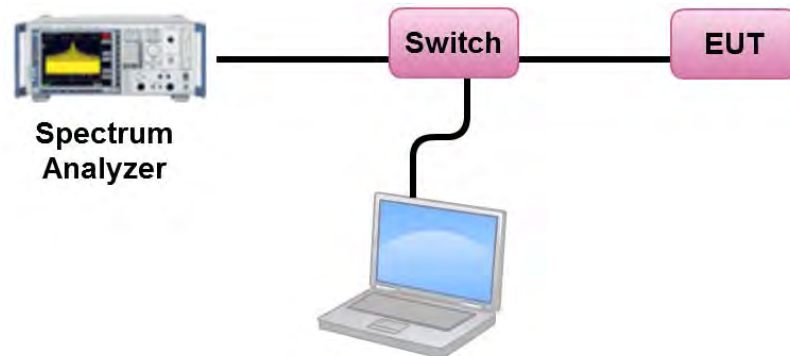

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Apr. 24, 2013		

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.90	2.91	Complies
40	5200 MHz	2.72	2.91	Complies
48	5240 MHz	2.85	2.91	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 12.77\text{dBi} > 6\text{dBi}$ , so Band 1  
 Limit=4-(7.09-6)=2.91 dBm/MHz

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.13	2.91	Complies
46	5230 MHz	0.31	2.91	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 12.77\text{dBi} > 6\text{dBi}$ , so Band 1  
 Limit=4-(7.09-6)=2.91 dBm/MHz

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.83	2.91	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 12.77\text{dBi} > 6\text{dBi}$ , so Band 1  
 Limit=4-(7.09-6)=2.91 dBm/MHz

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Apr. 24, 2013		

**Configuration IEEE 802.11a / Chain 3 + Chain 4**


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.89	2.91	Complies
40	5200 MHz	2.82	2.91	Complies
48	5240 MHz	2.70	2.91	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 12.77\text{dBi} > 6\text{dBi}$ , so Band 1  
 Limit =  $4 - (7.09 - 6) = 2.91\ \text{dBm/MHz}$


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 5180 MHz

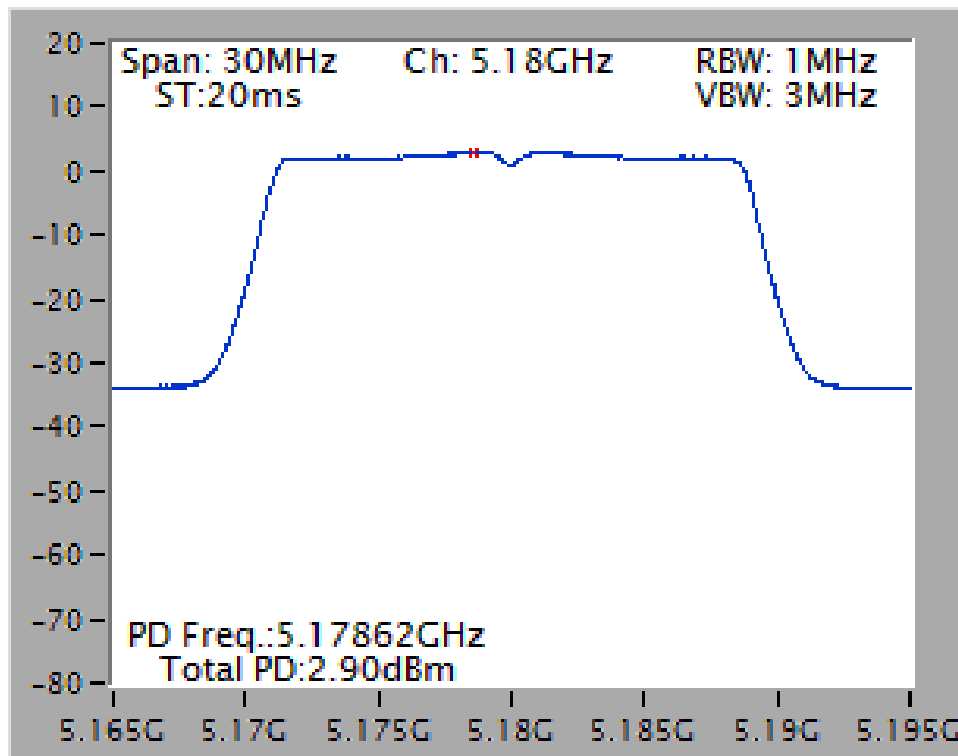


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 5230 MHz

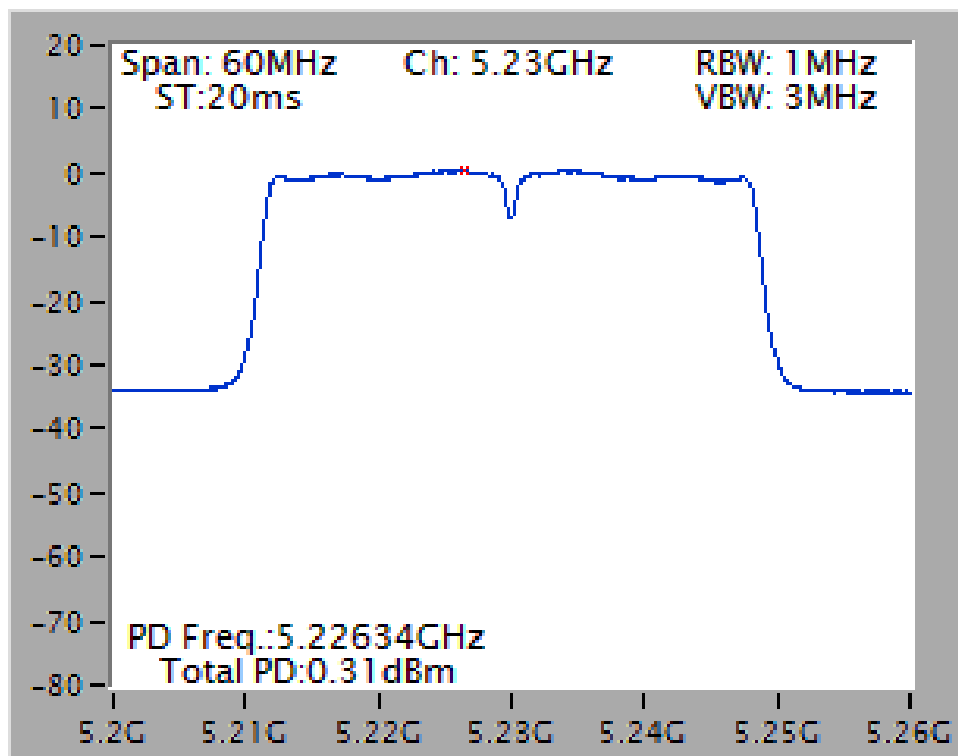

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / 5210 MHz

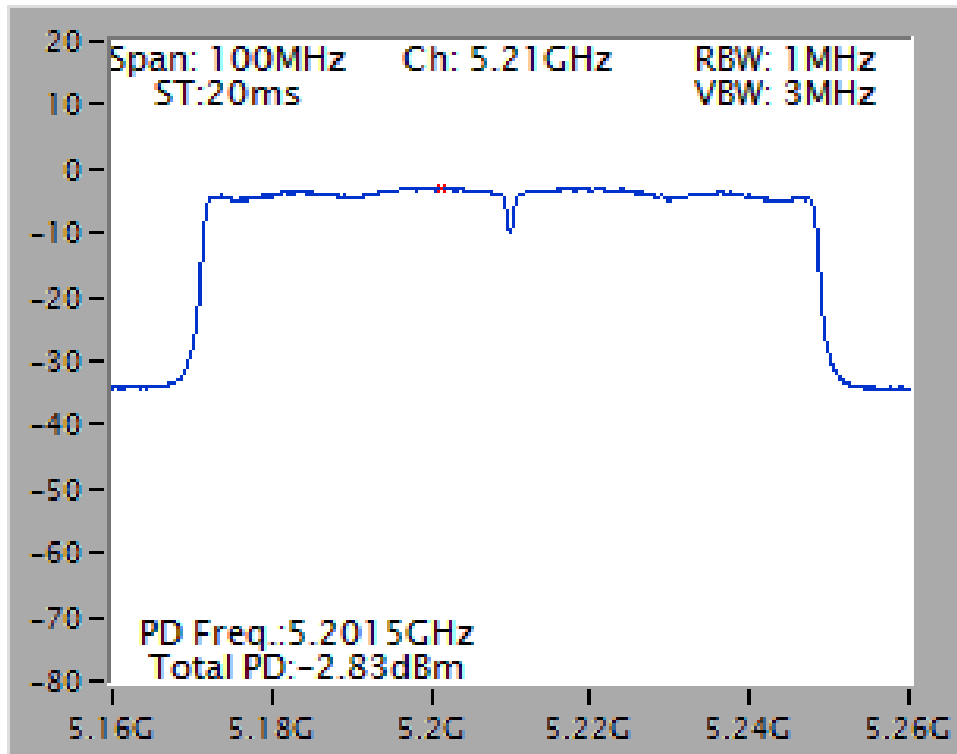

Power Density Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 5180 MHz

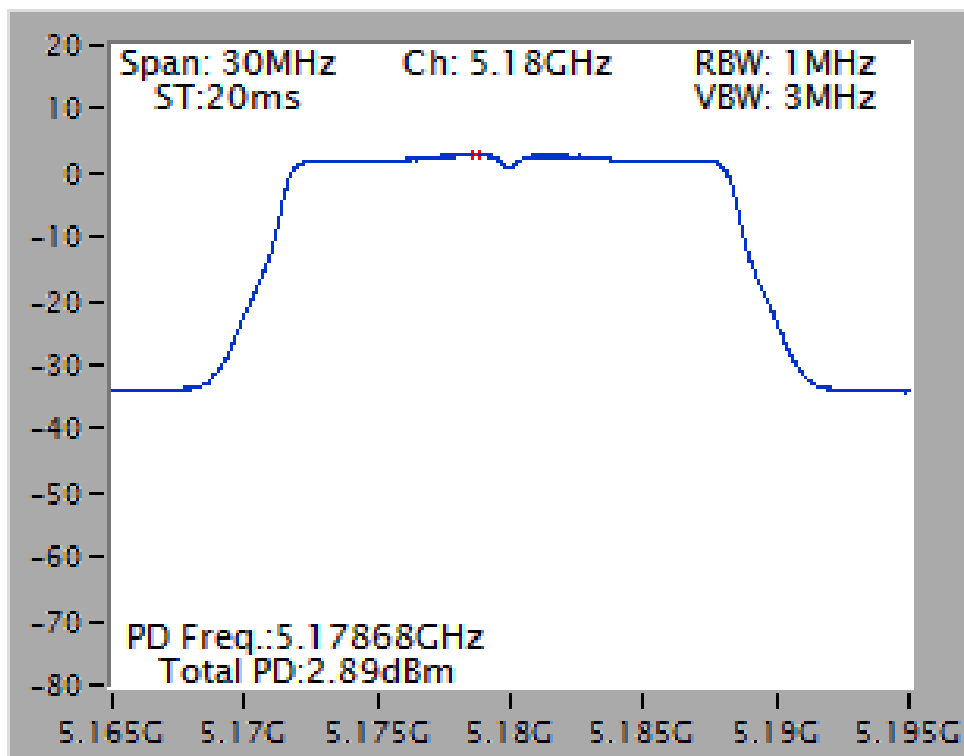



## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	3MHz (Peak Trace) / 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Peak : Trace :Max hold/Average: Trace Average Sweep Count 100
Sweep Time	AUTO

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.5.7. Test Result of Peak Excursion

<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11ac

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5180 MHz	8.61	13	Complies
QPSK(MCS1)	5180 MHz	8.95	13	Complies
16QAM(MCS3)	5180 MHz	9.79	13	Complies
64QAM(MCS5)	5180 MHz	9.67	13	Complies
256QAM(MCS8)	5180 MHz	10.27	13	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5190 MHz	8.40	13	Complies
QPSK(MCS1)	5190 MHz	9.01	13	Complies
16QAM(MCS3)	5190 MHz	9.43	13	Complies
64QAM(MCS5)	5190 MHz	9.99	13	Complies
256QAM(MCS8)	5190 MHz	10.09	13	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5210 MHz	8.86	13	Complies
QPSK(MCS1)	5210 MHz	9.36	13	Complies
16QAM(MCS3)	5210 MHz	9.11	13	Complies
64QAM(MCS5)	5210 MHz	9.51	13	Complies
256QAM(MCS8)	5210 MHz	9.78	13	Complies




<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Chain 3 + Chain 4**


<b>Modulation</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
BSPK(6Mbps)	5200 MHz	8.38	13	<b>Complies</b>
QPSK(12Mbps)	5200 MHz	8.43	13	<b>Complies</b>
16QAM(24Mbps)	5200 MHz	9.05	13	<b>Complies</b>
64QAM(48Mbps)	5200 MHz	8.88	13	<b>Complies</b>

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / BSPK(MCS0) / 5180 MHz**

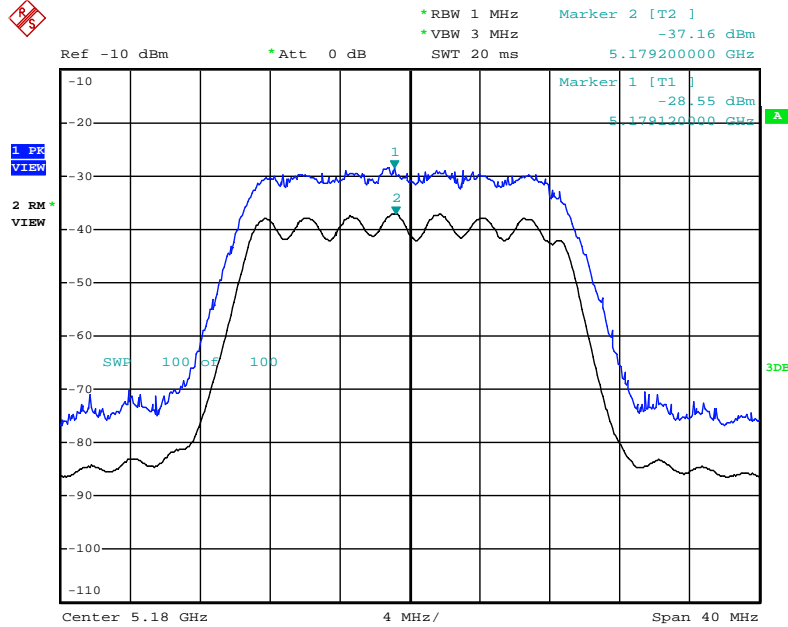


Date: 24.APR.2013 22:46:46

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / QPSK(MCS1) / 5180 MHz**

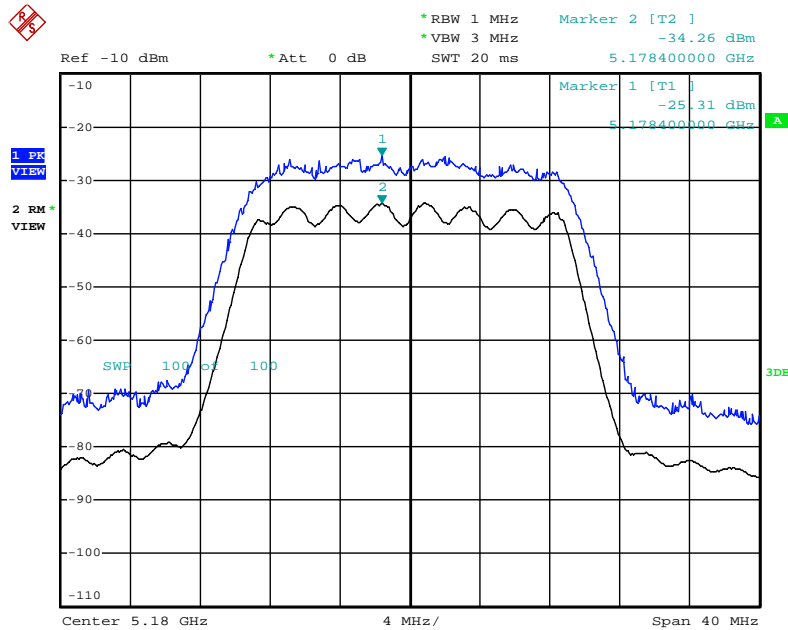


Date: 25.APR.2013 08:45:35

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 16QAM(MCS3) / 5180 MHz**

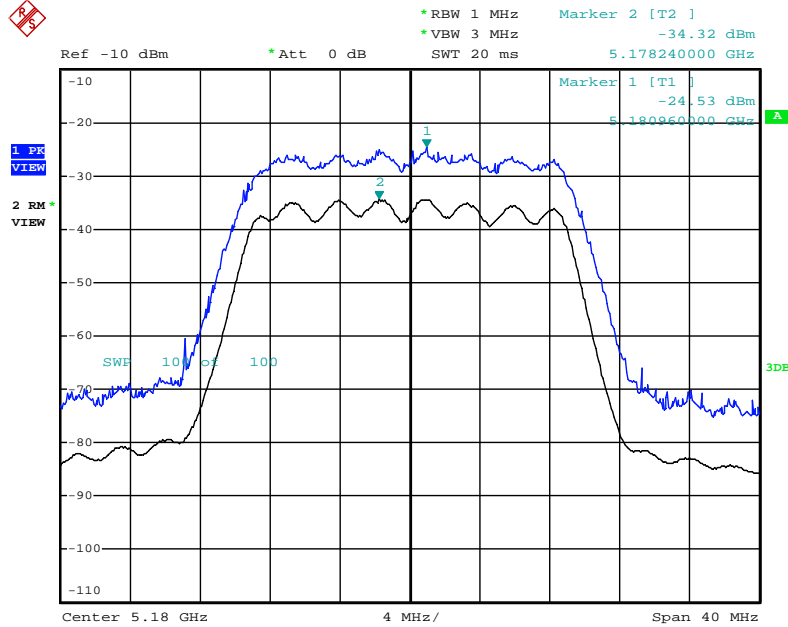


Date: 25.APR.2013 08:46:11

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 64QAM(MCS5) / 5180 MHz**

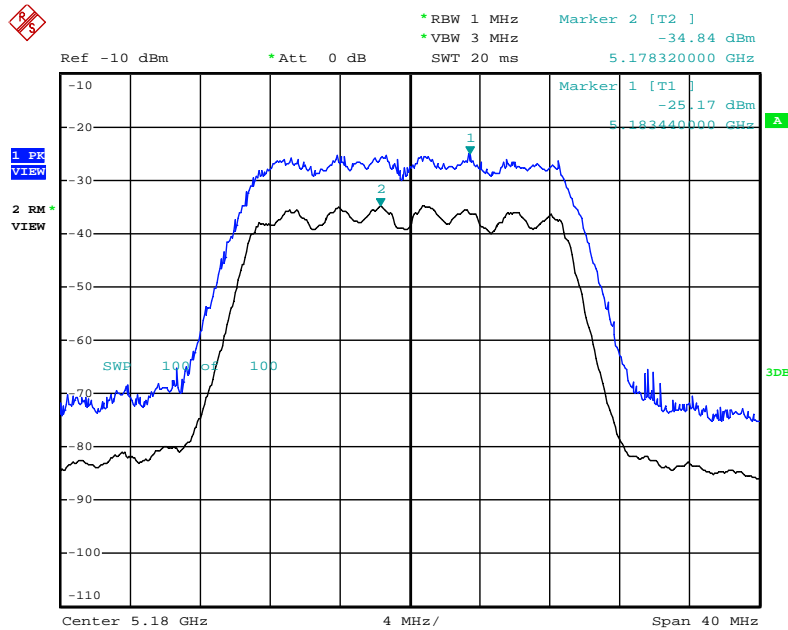


Date: 25.APR.2013 08:46:42

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 3 + Chain 4 / 256QAM(MCS8) / 5180 MHz**

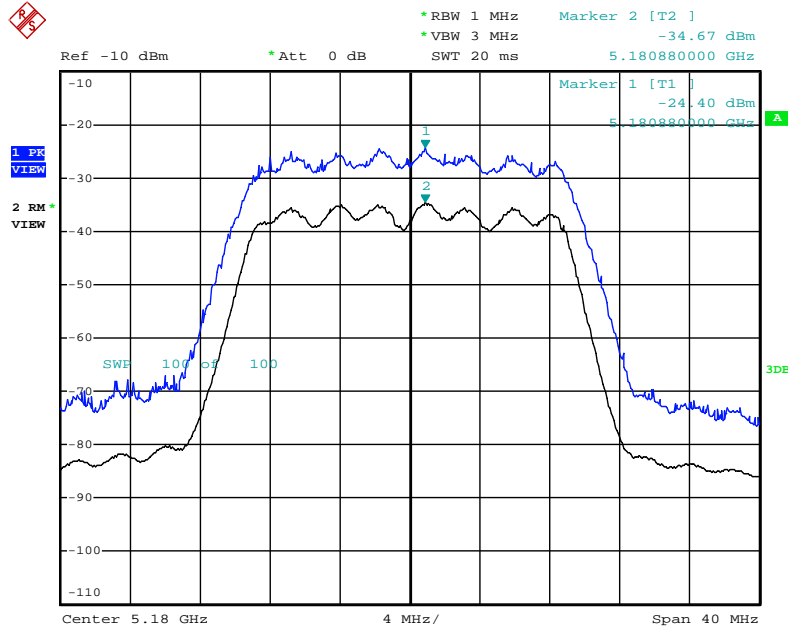


Date: 25.APR.2013 08:47:16

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / BSPK(MCS0) / 5190 MHz**

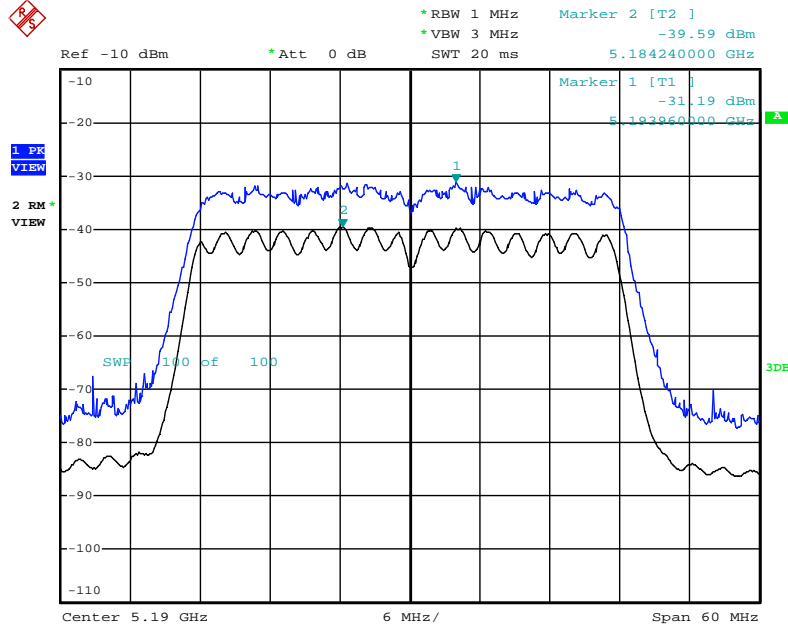


Date: 24.APR.2013 22:45:31

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / QPSK(MCS1) / 5190 MHz**

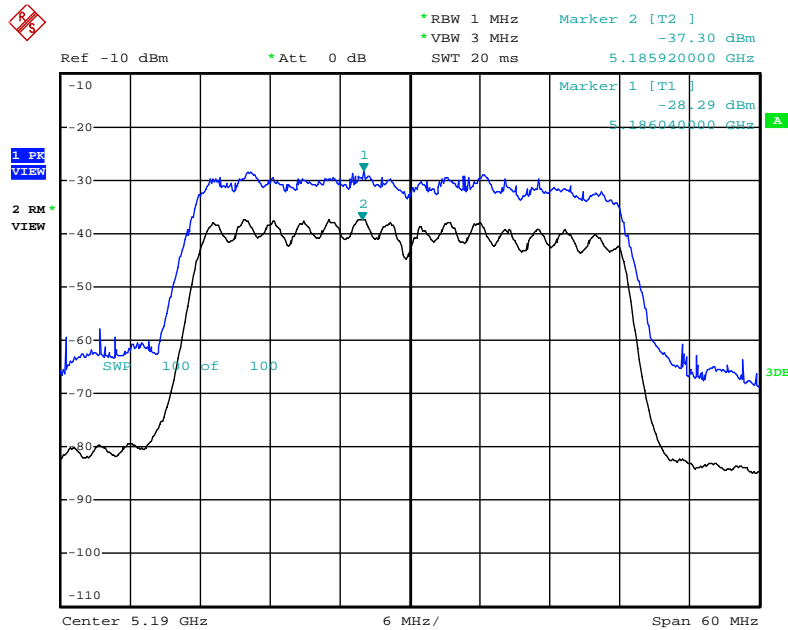


Date: 25.APR.2013 08:48:07

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 16QAM(MCS3) / 5190 MHz**

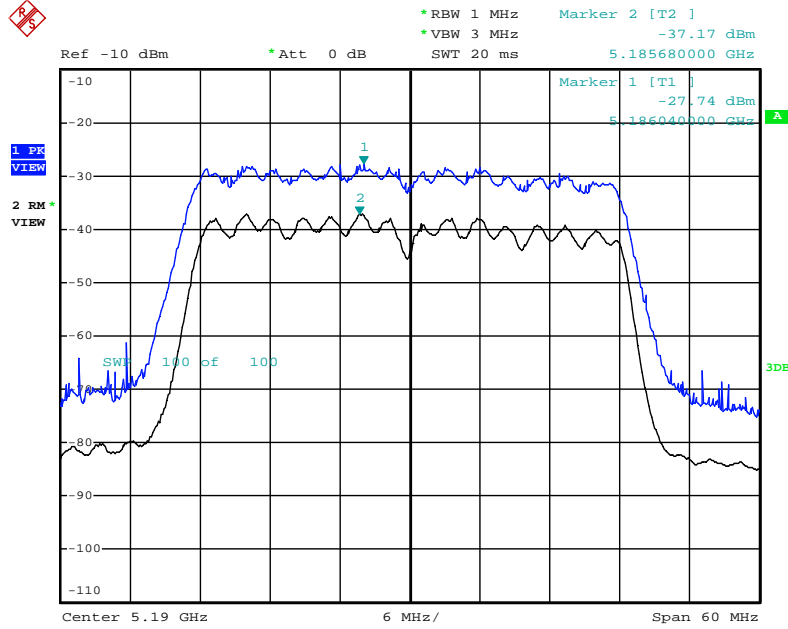

Date: 25.APR.2013 08:48:55


**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 64QAM(MCS5) / 5190 MHz**

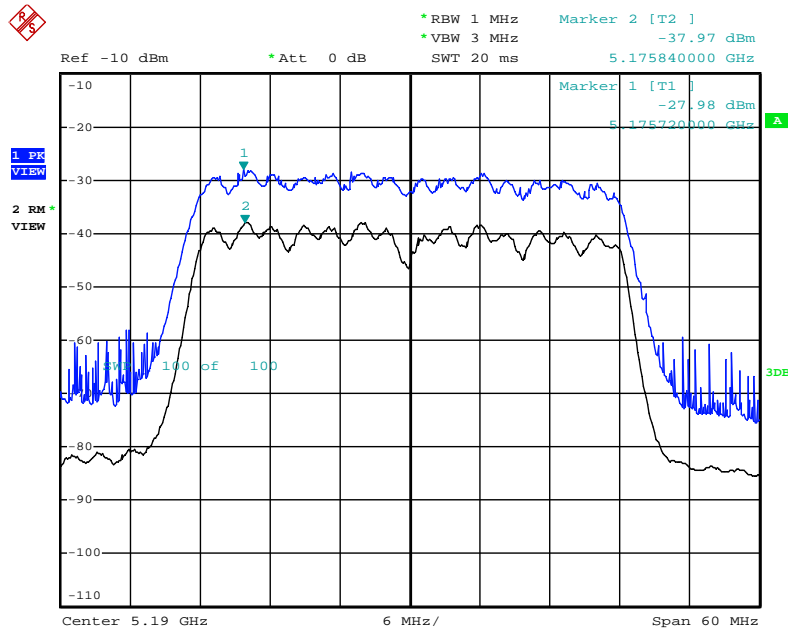

Date: 25.APR.2013 08:49:23




**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 3 + Chain 4 / 256QAM(MCS8) / 5190 MHz**

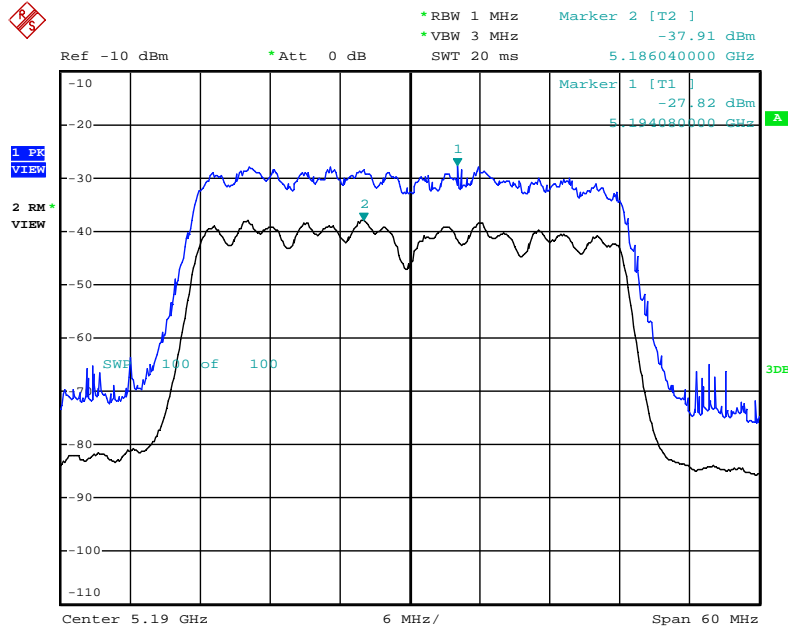


Date: 25.APR.2013 08:50:00

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / BSPK(MCS0) / 5210 MHz**

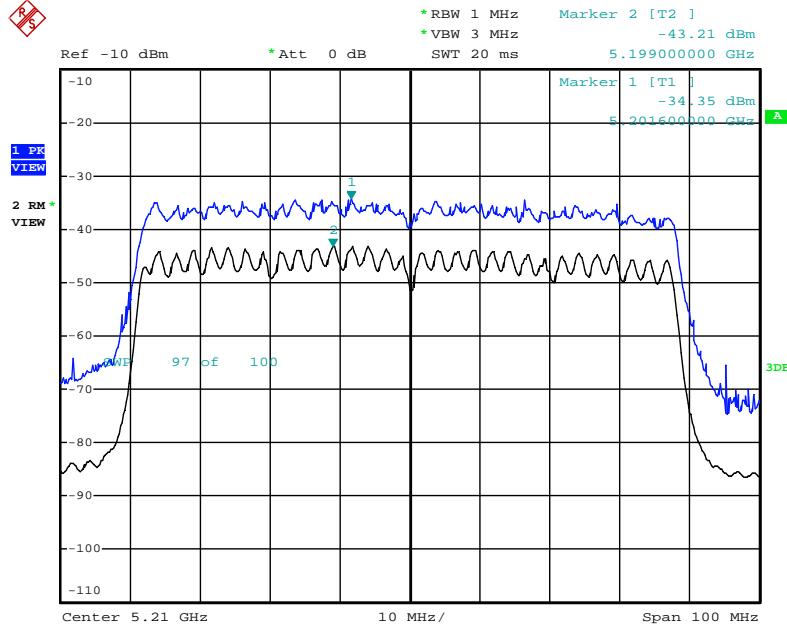


Date: 24.APR.2013 22:42:17

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / QPSK(MCS1) / 5210 MHz**

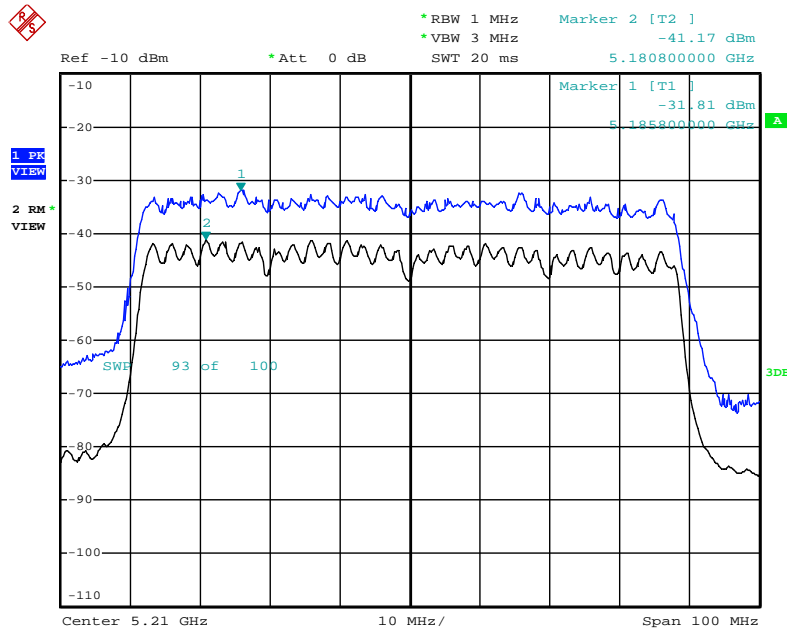


Date: 25.APR.2013 08:52:16

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / 16QAM(MCS3) / 5210 MHz**

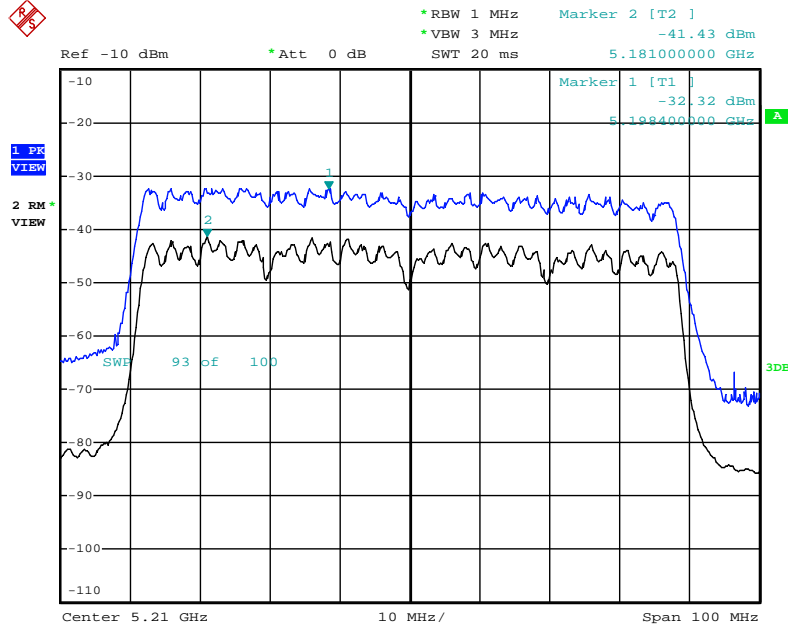


Date: 25.APR.2013 08:52:49

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / 64QAM(MCS5) / 5210 MHz**

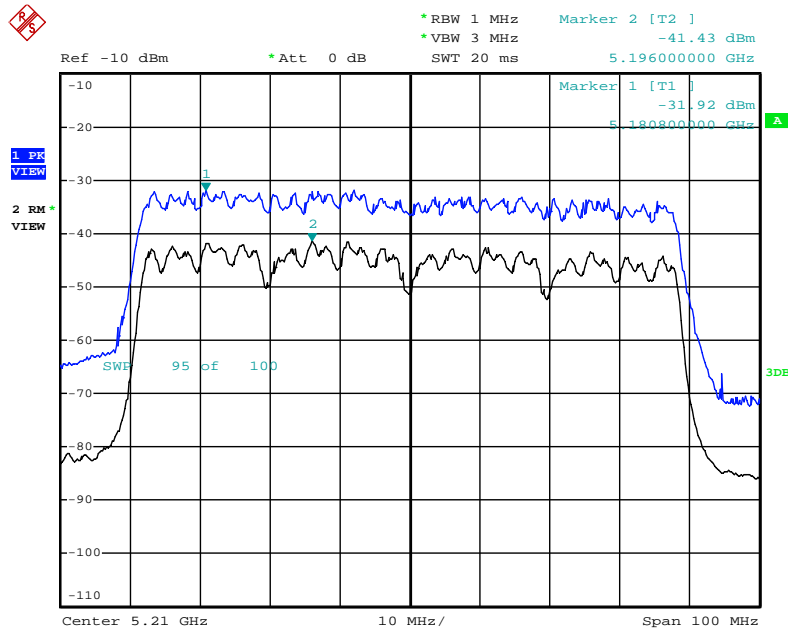


Date: 25.APR.2013 08:53:19

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 3 + Chain 4 / 256QAM(MCS8) / 5210 MHz**

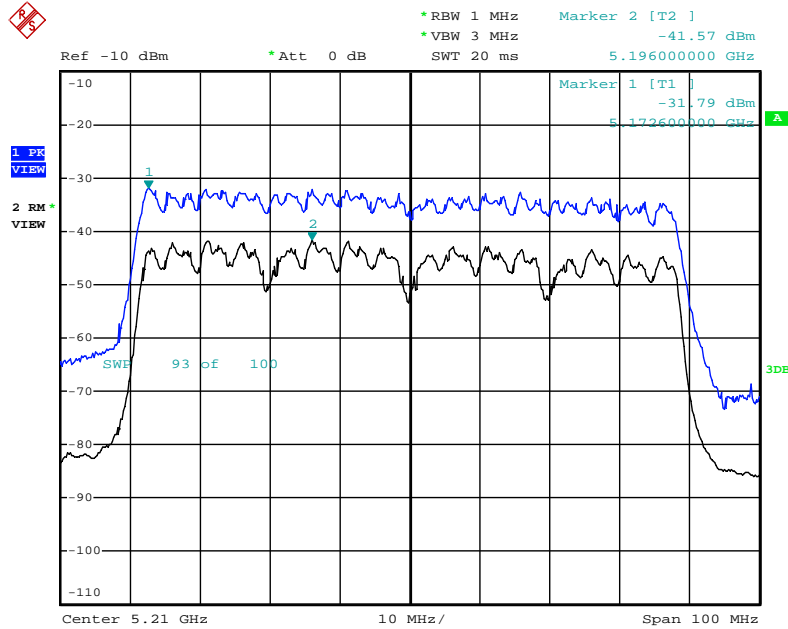


Date: 25.APR.2013 08:53:49

Peak Excursion Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / BSPK(6Mbps) / 5200 MHz

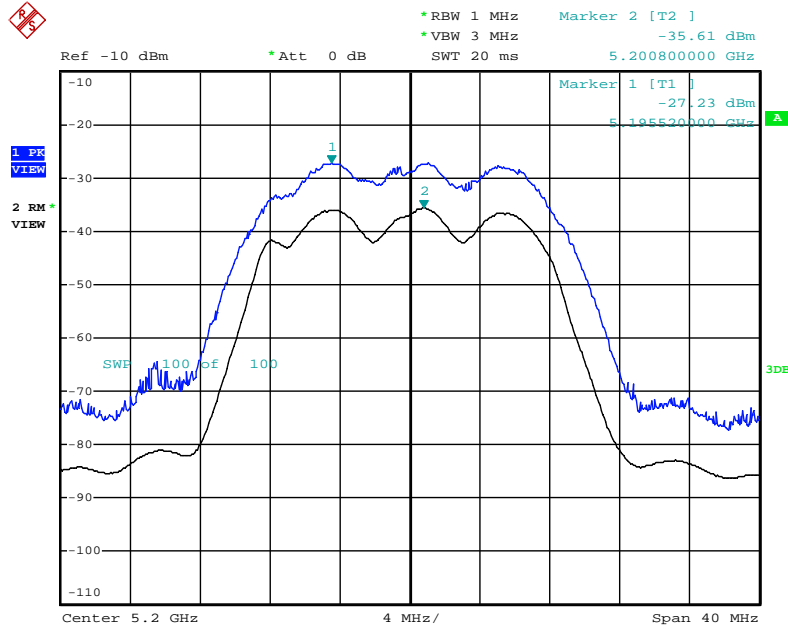


Date: 25.APR.2013 09:06:12

Peak Excursion Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / QPSK(12Mbps) / 5200 MHz

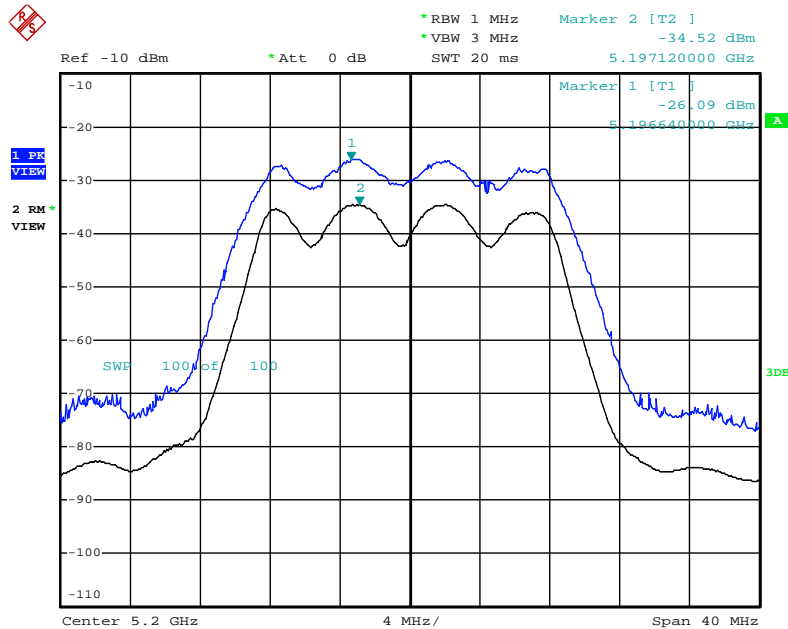


Date: 25.APR.2013 08:42:42

Peak Excursion Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 16QAM(24Mbps) / 5200 MHz

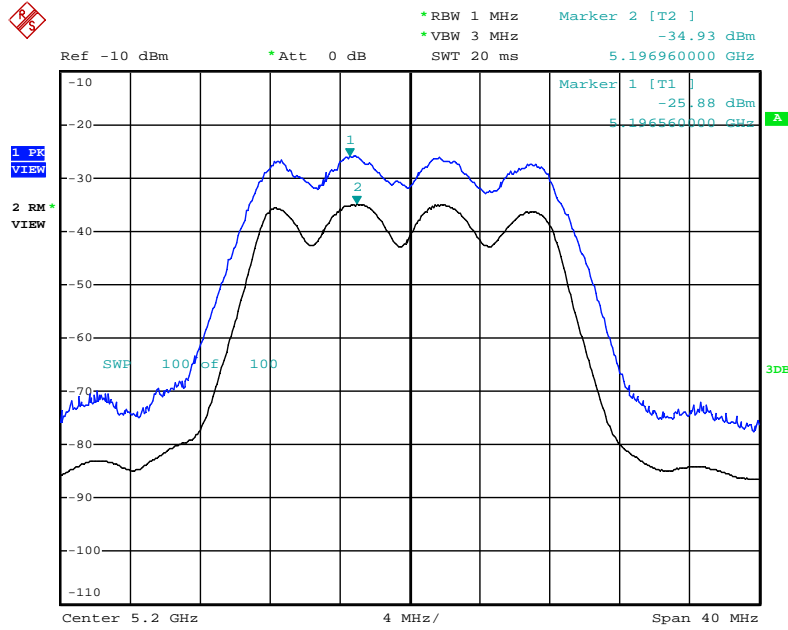

Date: 25.APR.2013 08:43:23

Peak Excursion Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 64QAM(48Mbps) / 5200 MHz

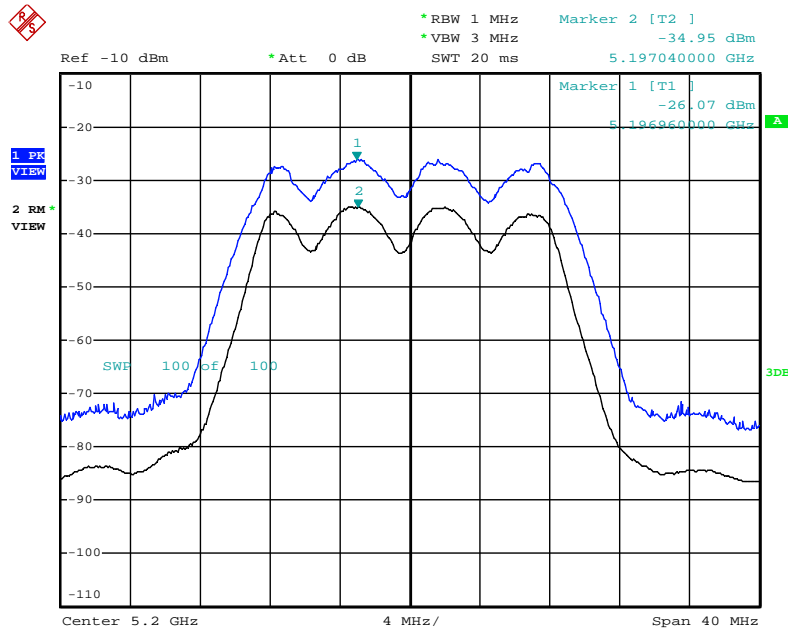

Date: 25.APR.2013 08:44:02

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


#### 4.6.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

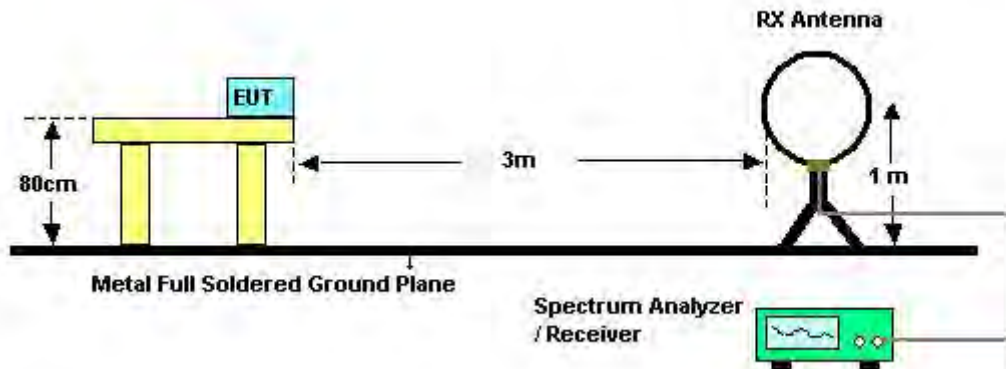

For radiated emissions above 1GHz

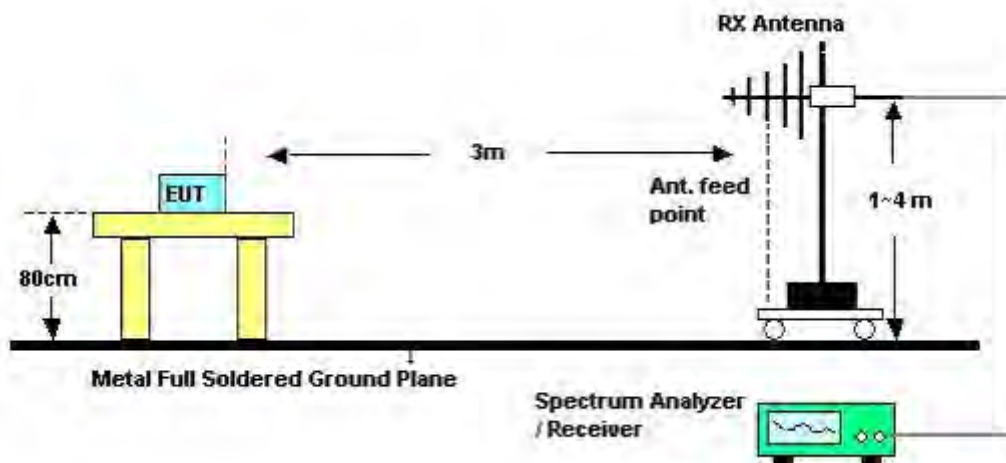

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Apr. 24, 2013		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Normal Link / Mode 1

Horizontal

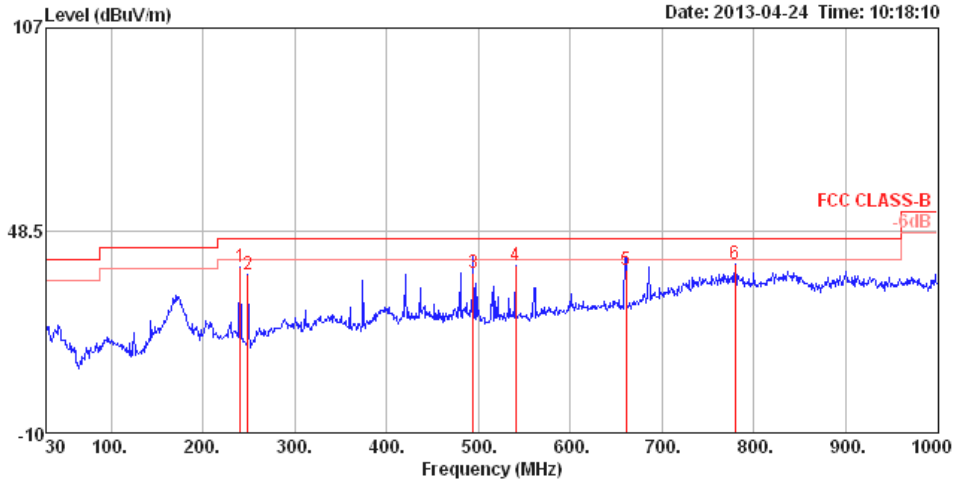

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	240.49	37.73	46.00	-8.27	56.40	1.86	10.91	31.44	125	358	HORIZONTAL Peak
2	249.22	35.75	46.00	-10.25	53.53	1.90	11.81	31.49	100	1	HORIZONTAL Peak
3	494.63	36.09	46.00	-9.91	47.82	2.79	16.85	31.37	125	160	HORIZONTAL QP
4	540.22	38.54	46.00	-7.46	48.83	2.91	18.16	31.36	100	260	HORIZONTAL Peak
5 qp	660.50	36.95	46.00	-9.05	46.33	3.29	18.76	31.43	150	110	HORIZONTAL QP
6 pp	779.81	38.86	46.00	-7.14	46.80	3.63	19.77	31.34	125	206	HORIZONTAL Peak

**Vertical**

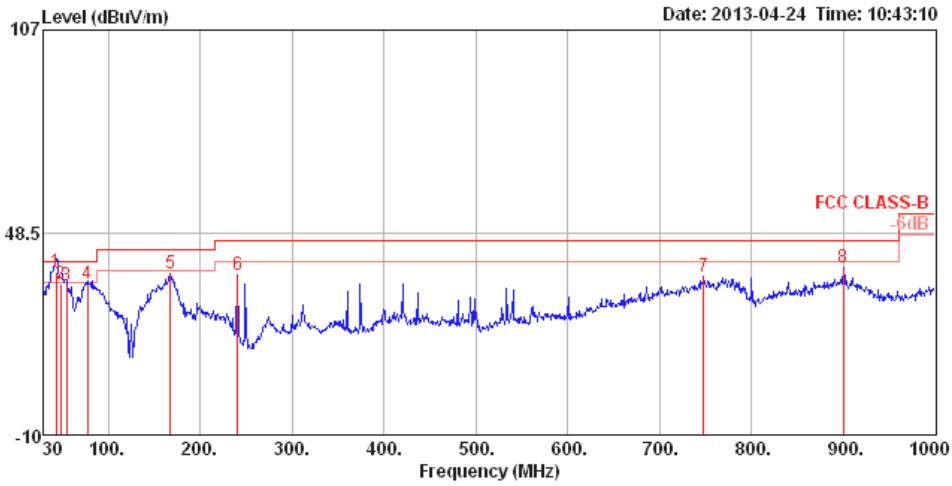

	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos			Remark	
Freq	Level	Line	Limit	Level	Loss	Factor	Factor		Pol/Phase		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pp	43.58	36.93	40.00	-3.07	57.74	0.78	10.25	31.84	100	84 VERTICAL	QP
2	48.43	33.72	40.00	-6.28	56.37	0.83	8.32	31.80	100	35 VERTICAL	QP
3	54.25	33.06	40.00	-6.94	57.80	0.86	6.18	31.78	150	25 VERTICAL	QP
4	77.53	33.63	40.00	-6.37	57.77	1.03	6.53	31.70	125	254 VERTICAL	QP
5 pk	167.74	36.43	43.50	-7.07	57.14	1.57	9.25	31.53	100	51 VERTICAL	Peak
6	240.49	36.37	46.00	-9.63	55.04	1.86	10.91	31.44	100	146 VERTICAL	Peak
7	747.80	35.58	46.00	-10.42	43.74	3.52	19.69	31.37	100	137 VERTICAL	Peak
8	900.09	38.30	46.00	-7.70	44.90	3.97	20.64	31.21	100	157 VERTICAL	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




Temperature	22°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Normal Link / Mode 2

**Horizontal**

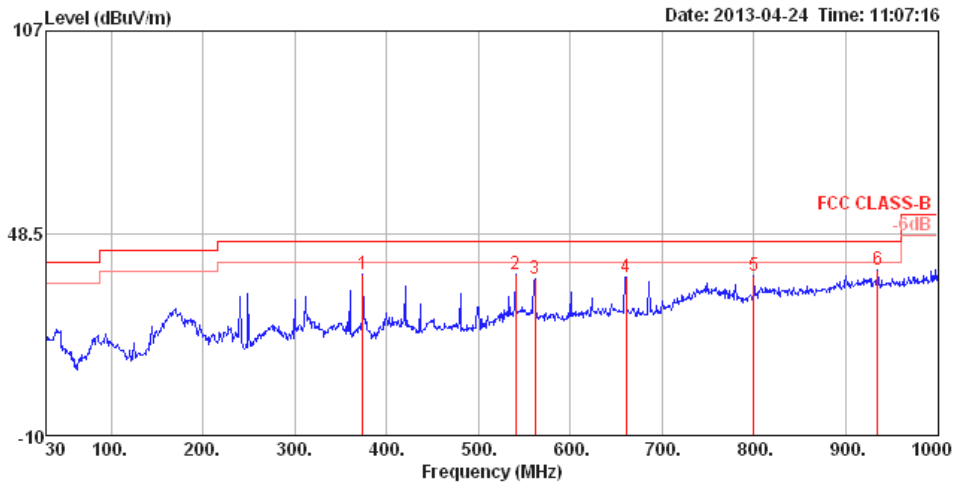

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	374.35	36.52	46.00	-9.48	50.61	2.43	14.91	31.43	125	113	HORIZONTAL Peak
2	540.22	36.63	46.00	-9.37	46.92	2.91	18.16	31.36	150	330	HORIZONTAL Peak
3	561.56	35.41	46.00	-10.59	45.30	2.97	18.38	31.24	125	322	HORIZONTAL Peak
4	660.50	35.80	46.00	-10.20	45.18	3.29	18.76	31.43	125	303	HORIZONTAL Peak
5	800.18	36.39	46.00	-9.61	44.23	3.67	19.76	31.27	100	58	HORIZONTAL Peak
6 pp	935.01	37.88	46.00	-8.12	44.22	4.04	20.76	31.14	100	115	HORIZONTAL Peak

**Vertical**

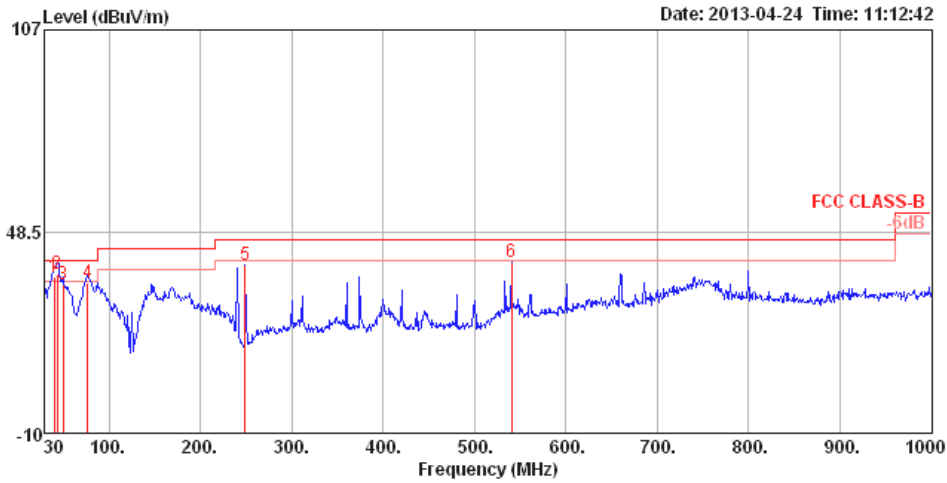

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	39.70	35.49	40.00	-4.51	54.20	0.74	12.43	31.88	100	137	VERTICAL	QP
2 pp	43.58	36.01	40.00	-3.99	56.82	0.78	10.25	31.84	100	82	VERTICAL	QP
3	49.40	33.32	40.00	-6.68	56.40	0.83	7.88	31.79	100	47	VERTICAL	QP
4	76.56	33.70	40.00	-6.30	58.04	1.03	6.32	31.69	100	269	VERTICAL	QP
5	249.22	38.58	46.00	-7.42	56.36	1.90	11.81	31.49	100	224	VERTICAL	Peak
6 pk	540.22	39.51	46.00	-6.49	49.80	2.91	18.16	31.36	100	339	VERTICAL	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 20MHz Ch 36 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5395.79	43.55	54.00	-10.45	38.11	6.15	34.49	35.20	Average	158	278	HORIZONTAL
2	5395.85	52.47	74.00	-21.53	47.03	6.15	34.49	35.20	Peak	158	278	HORIZONTAL
3	15540.17	59.36	74.00	-14.64	40.80	16.03	38.12	35.59	Peak	100	303	HORIZONTAL
4	15540.36	45.44	54.00	-8.56	26.88	16.03	38.12	35.59	Average	100	303	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5395.77	47.88	54.00	-6.12	42.44	6.15	34.49	35.20	Average	100	340	VERTICAL
2	5395.91	55.15	74.00	-18.85	49.71	6.15	34.49	35.20	Peak	100	340	VERTICAL
3	15539.81	59.87	74.00	-14.13	41.31	16.03	38.12	35.59	Peak	100	224	VERTICAL
4	15540.31	45.41	54.00	-8.59	26.85	16.03	38.12	35.59	Average	100	224	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 20MHz Ch 40 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5416.55	52.10	74.00	-21.90	46.58	6.16	34.56	35.20	Peak	128	284	HORIZONTAL
2	5416.61	44.21	54.00	-9.79	38.69	6.16	34.56	35.20	Average	128	284	HORIZONTAL
3	15600.12	45.55	54.00	-8.45	26.78	16.31	38.04	35.58	Average	100	225	HORIZONTAL
4	15600.23	60.13	74.00	-13.87	41.36	16.31	38.04	35.58	Peak	100	225	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5416.46	54.14	74.00	-19.86	48.62	6.16	34.56	35.20	Peak	111	320	VERTICAL
2	5416.63	48.18	54.00	-5.82	42.66	6.16	34.56	35.20	Average	111	320	VERTICAL
3	15599.58	59.23	74.00	-14.77	40.46	16.31	38.04	35.58	Peak	100	137	VERTICAL
4	15600.10	45.54	54.00	-8.46	26.77	16.31	38.04	35.58	Average	100	137	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 20MHz Ch 48 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5458.24	53.58	74.00	-20.42	47.97	6.18	34.63	35.20	Peak	124	280	HORIZONTAL
2	5458.29	46.22	54.00	-7.78	40.61	6.18	34.63	35.20	Average	124	280	HORIZONTAL
3	15719.61	46.12	54.00	-7.88	27.03	16.80	37.85	35.56	Average	100	259	HORIZONTAL
4	15719.94	60.24	74.00	-13.76	41.15	16.80	37.85	35.56	Peak	100	259	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5458.23	55.08	74.00	-18.92	49.47	6.18	34.63	35.20	Peak	100	317	VERTICAL
2	5458.31	47.98	54.00	-6.02	42.37	6.18	34.63	35.20	Average	100	317	VERTICAL
3	15719.87	46.11	54.00	-7.89	27.02	16.80	37.85	35.56	Average	100	77	VERTICAL
4	15720.38	60.12	74.00	-13.88	41.03	16.80	37.85	35.56	Peak	100	77	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 40MHz Ch 38 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15569.79	59.97	74.00	-14.03	41.29	16.17	38.09	35.58	Peak	100	272	HORIZONTAL
2	15570.23	45.29	54.00	-8.71	26.61	16.17	38.09	35.58	Average	100	272	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15570.01	59.13	74.00	-14.87	40.45	16.17	38.09	35.58	Peak	100	129	VERTICAL
2	15570.27	45.27	54.00	-8.73	26.59	16.17	38.09	35.58	Average	100	129	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 40MHz Ch 46 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.57	46.00	54.00	-8.00	26.99	16.66	37.91	35.56 Average	100	267	HORIZONTAL
2	15689.84	60.05	74.00	-13.95	41.04	16.66	37.91	35.56 Peak	100	267	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.53	46.00	54.00	-8.00	26.99	16.66	37.91	35.56 Average	100	198	VERTICAL
2	15690.27	60.21	74.00	-13.79	41.20	16.66	37.91	35.56 Peak	100	198	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.1ac MCS0/Nss1 80MHz Ch 42 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15629.73	59.59	74.00	-14.41	40.72	16.45	37.99	35.57	Peak	100	153	HORIZONTAL
2	15630.00	45.31	54.00	-8.69	26.44	16.45	37.99	35.57	Average	100	153	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15629.99	45.32	54.00	-8.68	26.45	16.45	37.99	35.57	Average	100	349	VERTICAL
2	15630.43	58.90	74.00	-15.10	40.03	16.45	37.99	35.57	Peak	100	349	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a Ch 36 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5395.79	45.36	54.00	-8.64	39.92	6.15	34.49	35.20	Average	132	276	HORIZONTAL
2	5395.79	52.93	74.00	-21.07	47.49	6.15	34.49	35.20	Peak	132	276	HORIZONTAL
3	15540.25	59.66	74.00	-14.34	41.10	16.03	38.12	35.59	Peak	100	242	HORIZONTAL
4	15540.34	45.58	54.00	-8.42	27.02	16.03	38.12	35.59	Average	100	242	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5395.76	48.39	54.00	-5.61	42.95	6.15	34.49	35.20	Average	100	320	VERTICAL
2	5395.84	54.75	74.00	-19.25	49.31	6.15	34.49	35.20	Peak	100	320	VERTICAL
3	15540.29	59.52	74.00	-14.48	40.96	16.03	38.12	35.59	Peak	100	76	VERTICAL
4	15540.30	45.57	54.00	-8.43	27.01	16.03	38.12	35.59	Average	100	76	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a Ch 40 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5416.61	51.99	74.00	-22.01	46.47	6.16	34.56	35.20	Peak	127	284	HORIZONTAL
2	5416.62	44.32	54.00	-9.68	38.80	6.16	34.56	35.20	Average	127	284	HORIZONTAL
3	15599.98	59.65	74.00	-14.35	40.88	16.31	38.04	35.58	Peak	100	228	HORIZONTAL
4	15600.08	45.64	54.00	-8.36	26.87	16.31	38.04	35.58	Average	100	228	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5416.61	48.04	54.00	-5.96	42.52	6.16	34.56	35.20	Average	110	319	VERTICAL
2	5416.63	53.38	74.00	-20.62	47.86	6.16	34.56	35.20	Peak	110	319	VERTICAL
3	15599.60	59.79	74.00	-14.21	41.02	16.31	38.04	35.58	Peak	100	155	VERTICAL
4	15600.12	45.66	54.00	-8.34	26.89	16.31	38.04	35.58	Average	100	155	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a Ch 48 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5458.27	45.82	54.00	-8.18	40.21	6.18	34.63	35.20	Average	125	281	HORIZONTAL
2	5458.40	53.28	74.00	-20.72	47.67	6.18	34.63	35.20	Peak	125	281	HORIZONTAL
3	15719.54	46.14	54.00	-7.86	27.05	16.80	37.85	35.56	Average	100	353	HORIZONTAL
4	15719.72	59.90	74.00	-14.10	40.81	16.80	37.85	35.56	Peak	100	353	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5458.27	48.94	54.00	-5.06	43.33	6.18	34.63	35.20	Average	110	316	VERTICAL
2	5458.38	55.31	74.00	-18.69	49.70	6.18	34.63	35.20	Peak	110	316	VERTICAL
3	15719.71	46.15	54.00	-7.85	27.06	16.80	37.85	35.56	Average	100	227	VERTICAL
4	15720.05	60.01	74.00	-13.99	40.92	16.80	37.85	35.56	Peak	100	227	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 3MHz for peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.



#### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz Ch 36, 40, 48 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

## Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5101.60	52.84	54.00	-1.16	13.01	5.92	33.91	0.00	Average	104	16	VERTICAL
2	5101.60	63.46	74.00	-10.54	23.63	5.92	33.91	0.00	Peak	104	16	VERTICAL
3	5178.72	101.99			61.92	5.99	34.08	0.00	Average	104	16	VERTICAL
4	5181.28	112.39			72.32	5.99	34.08	0.00	Peak	104	16	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

## Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5118.59	52.90	54.00	-1.10	13.02	5.94	33.94	0.00	Average	103	16	VERTICAL
2	5121.15	63.99	74.00	-10.01	24.11	5.94	33.94	0.00	Peak	103	16	VERTICAL
3	5198.72	111.32			71.21	6.00	34.11	0.00	Peak	103	16	VERTICAL
4	5200.96	101.47			61.36	6.00	34.11	0.00	Average	103	16	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

## Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5127.56	56.34	74.00	-17.66	16.41	5.95	33.98	0.00	Peak	164	277	HORIZONTAL
2	5128.13	43.24	54.00	-10.76	3.31	5.95	33.98	0.00	Average	164	277	HORIZONTAL
3	5241.12	101.05			60.85	6.02	34.18	0.00	Average	164	277	HORIZONTAL
4	5243.37	111.78			71.57	6.03	34.18	0.00	Peak	164	277	HORIZONTAL
5	5396.56	58.81	74.00	-15.19	18.17	6.15	34.49	0.00	Peak	164	277	HORIZONTAL
6	5398.24	47.51	54.00	-6.49	6.87	6.15	34.49	0.00	Average	164	277	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38, 46 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Channel 38**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.72	52.79	54.00	-1.21	12.82	5.96	34.01	0.00 Average	102	16	VERTICAL
2	5149.04	67.85	74.00	-6.15	27.88	5.96	34.01	0.00 Peak	102	16	VERTICAL
3	5186.15	100.27			60.20	5.99	34.08	0.00 Average	102	16	VERTICAL
4	5186.15	112.75			72.68	5.99	34.08	0.00 Peak	102	16	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5146.15	50.97	54.00	-3.03	11.00	5.96	34.01	0.00 Average	102	21	VERTICAL
2	5146.80	62.48	74.00	-11.52	22.51	5.96	34.01	0.00 Peak	102	21	VERTICAL
3	5233.53	101.00			60.80	6.02	34.18	0.00 Average	102	21	VERTICAL
4	5235.77	112.74			72.54	6.02	34.18	0.00 Peak	102	21	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Channel 42**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.40	52.85	54.00	-1.15	12.88	5.96	34.01	0.00 Average	103	16	VERTICAL
2	5150.00	68.20	74.00	-5.80	28.23	5.96	34.01	0.00 Peak	103	16	VERTICAL
3	5203.59	93.94			53.83	6.00	34.11	0.00 Average	103	16	VERTICAL
4	5203.59	107.15			67.04	6.00	34.11	0.00 Peak	103	16	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a Ch 36, 40, 48 / Chain 3 + Chain 4
<b>Test Date</b>	Apr. 24, 2013		

**Channel 36**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5102.40	63.83	74.00	-10.17	24.00	5.92	33.91	0.00	Peak	104	15 VERTICAL
2	5102.80	52.96	54.00	-1.04	13.13	5.92	33.91	0.00	Average	104	15 VERTICAL
3	5177.20	102.56			62.53	5.99	34.04	0.00	Average	104	15 VERTICAL
4	5177.60	112.93			72.86	5.99	34.08	0.00	Peak	104	15 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5117.60	52.99	54.00	-1.01	13.11	5.94	33.94	0.00	Average	103	14 VERTICAL
2	5118.00	63.63	74.00	-10.37	23.75	5.94	33.94	0.00	Peak	103	14 VERTICAL
3	5202.00	102.58			62.47	6.00	34.11	0.00	Average	103	14 VERTICAL
4	5202.00	112.65			72.54	6.00	34.11	0.00	Peak	103	14 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5083.25	58.76	74.00	-15.24	18.98	5.91	33.87	0.00	Peak	102	22 VERTICAL
2	5087.70	47.70	54.00	-6.30	7.92	5.91	33.87	0.00	Average	102	22 VERTICAL
3	5242.10	106.18			65.97	6.03	34.18	0.00	Average	102	22 VERTICAL
4	5242.24	116.09			75.88	6.03	34.18	0.00	Peak	102	22 VERTICAL
5	5396.20	47.84	54.00	-6.16	7.20	6.15	34.49	0.00	Average	102	22 VERTICAL
6	5396.20	59.00	74.00	-15.00	18.36	6.15	34.49	0.00	Peak	102	22 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

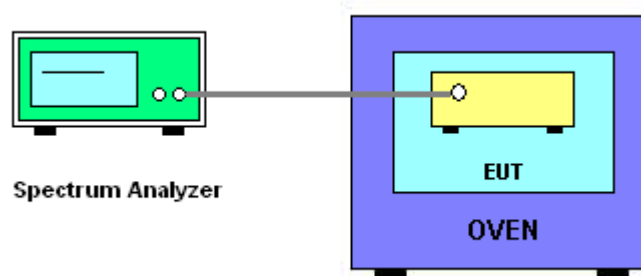

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0654
110.00	5200.0762
93.50	5200.0567
Max. Deviation (MHz)	0.076200
Max. Deviation (ppm)	14.65

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5200.0899
-20	5200.0898
-10	5200.0898
0	5200.0832
10	5200.0844
20	5200.0762
30	5200.0743
40	5200.0742
50	5200.0714
Max. Deviation (MHz)	0.089900
Max. Deviation (ppm)	17.29

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085