



FCC TEST REPORT(15.407)

REPORT NO.: RF120530E05-1

MODEL NO.: DAP-2690

FCC ID: KA2AP2690B1

RECEIVED: May 30, 2012

TESTED: June 07 to July 03, 2012

ISSUED: Sep. 11, 2012

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS (MODE 1)	22
4.1.8 TEST RESULTS (MODE 2)	24
4.1.9 TEST RESULTS (MODE 3)	26
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	28
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	28
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	29
4.2.3 TEST INSTRUMENTS.....	30
4.2.4 TEST PROCEDURES	32
4.2.5 DEVIATION FROM TEST STANDARD	32
4.2.6 TEST SETUP	33
4.2.7 EUT OPERATING CONDITION	33
4.2.8 TEST RESULTS	34
4.3 TRANSMIT POWER MEASUREMENT	43
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	43
4.3.2 TEST INSTRUMENTS.....	43
4.3.3 TEST PROCEDURE.....	44
4.3.4 DEVIATION FROM TEST STANDARD	44
4.3.5 TEST SETUP	45



A D T

4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS	46
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.2	TEST INSTRUMENTS.....	48
4.4.3	TEST PROCEDURES	48
4.4.4	DEVIATION FROM TEST STANDARD.....	48
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	PEAK POWER EXCURSION MEASUREMENT	51
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	51
4.5.4	DEVIATION FROM TEST STANDARD.....	51
4.5.5	TEST SETUP	51
4.5.6	EUT OPERATING CONDITIONS	51
4.5.7	TEST RESULTS	52
4.6	FREQUENCY STABILITY.....	58
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE.....	58
4.6.4	DEVIATION FROM TEST STANDARD.....	59
4.6.5	TEST SETUP	59
4.6.6	EUT OPERATING CONDITION.....	59
4.6.7	TEST RESULTS	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	61
6.	INFORMATION ON THE TESTING LABORATORIES	62
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	63



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120530E05-1	Original release	Sep. 11, 2012



A D T

1. CERTIFICATION

PRODUCT: DAP-2690 AirPremier N Dual Band Concurrent PoE Access Point

BRAND NAME: D-Link

MODEL NO.: DAP-2690

TEST SAMPLE: MASS-PRODUCTION

APPLICANT: D-Link Corporation

TESTED: June 07 to July 03, 2012

STANDARDS: **FCC Part 15, subpart E (section 15.407)**
ANSI C63.10-2009

The above equipment (Model: DAP-2690) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, **DATE:** Sep. 11, 2012
(Midoli Peng, Specialist)

APPROVED BY : May Chen, **DATE:** Sep. 11, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5180~5240MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.19dB at 0.15391MHz
15.407(b/1/2/3) (b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 5439.98MHz & 5150.00MHz & 5399.94MHz
15.407(a/1/2)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA Plug Reverse not a standard connector.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	DAP-2690 AirPremier N Dual Band Concurrent PoE Access Point
MODEL NO.	DAP-2690
POWER SUPPLY	DC 48V from Power adapter or POE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g / a: up to 54Mbps 802.11n (20MHz, 800ns GI): up to 130Mbps 802.11n (20MHz, 400ns GI): up to 144.444Mbps 802.11n (40MHz, 800ns GI): up to 270Mbps 802.11n (40MHz, 400ns GI): up to 300Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) For 15.247 (5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 15.754mW 802.11n (20MHz): 30.868mW 802.11n (40MHz): 44.335mW For 15.247(2.4GHz) 802.11b: 283.170mW 802.11g: 424.097mW 802.11n (20MHz): 266.886mW 802.11n (40MHz): 62.886mW For 15.247(5GHz) 802.11a: 322.157mW 802.11n (20MHz): 245.093mW 802.11n (40MHz): 257.526mW



A D T

ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1 POE x 1

NOTE:

1. The antennas provided to the EUT, please refer to the following table:

For 2.4GHz					
Transmitter Circuit	Manufacture	Model name	Antenna Gain	Antenna Type	Connector
			Gain (dBi)		
Chain (0)	WHA YU GROUP	NP-9022	4.29	Dipole	SMA Plug Reverse
Chain (1)	WHA YU GROUP	NP-9022	4.29	Dipole	SMA Plug Reverse
For 5GHz					
Transmitter Circuit	Manufacture	Model name	Antenna Gain	Antenna Type	Connector
			Gain (dBi)		
Chain (0)	WHA YU GROUP	SSR-12968	5G Band1: 5.646 5G Band2: 6.270 5G Band3: 5.428 5G Band4: 5.264	Dipole	SMA Plug Reverse
Chain (1)	WHA YU GROUP	SSR-12968	5G Band1: 5.646 5G Band2: 6.270 5G Band3: 5.428 5G Band4: 5.264	Dipole	SMA Plug Reverse

2. The EUT must be supplied with a power adapter or POE as following table:

POE 1		
Brand	Model No.	Spec.
Lanredy	PE03G	Output: 12-48V , 1A
POE 2		
Manufacture	Model No.	Spec.
Bothhand	EBU-101G-T2 LF	Output: 48V, 0.4A
Adapter		
Brand	Model No.	Spec.
LEI	MU24-B480050-A1	Input: 100-240V, 1.0A, 50/60Hz Output: 48V, 0.5A DC output cable (Unshielded, 1.5m)

3. The EUT incorporates a MIMO function.

MODULATION MODE	Tx/Rx FUNCTION
802.11b	2Tx/2Rx
802.11g	2Tx/2Rx
802.11a	2Tx/2Rx
802.11n (20MHz)	2Tx/2Rx
802.11n (40MHz)	2Tx/2Rx

4. The EUT was pre-tested in chamber under the following modes:

Pre-test Mode	Description
Mode A	EUT : Laying-flat type + adapter
Mode B	EUT : Stand-up type + adapter
Mode C	EUT : Laying-flat type + POE 1
Mode D	EUT : Stand-up type + POE 1
Mode E	EUT : Laying-flat type + POE 2
Mode F	EUT : Stand-up type + POE 2

The worse radiated emission (Below 1GHz) was found in **Mode C** and the radiated emission (Above 1GHz) was found in **Mode D**. Therefore only the test data of the modes were recorded in this report.

5. Radiated and Conducted emission of the simultaneous operation (2.4GHz and 5GHz WLAN technology) has been evaluated and no non-compliance was found.
6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5180 ~ 5240MHz band:

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
1	√	-	-	-	EUT : Laying-flat type + adapter
2	√	√	-	-	EUT : Laying-flat type + POE 1
3	√	-	-	-	EUT : Laying-flat type + POE 2
4	-	-	√	√	EUT : Stand-up type + POE 1

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: "-" means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11n (20MHz)	36 to 48	40	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	36 to 48	40	OFDM	BPSK	6.5



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (40MHz)	36 to 48	38, 46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (40MHz)	36 to 48	38, 46	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	23deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	26deg. C, 72%RH	120Vac, 60Hz	Nelson Teng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is > 98 %, duty factor is not required.

802.11a: Duty cycle = 1.365 ms/1.392 ms = 0.9806

802.11n (20MHz): Duty cycle = 1.287 ms/1.311 ms = 0.9816

802.11n (40MHz): Duty cycle = 646 us/658 us = 0.9817

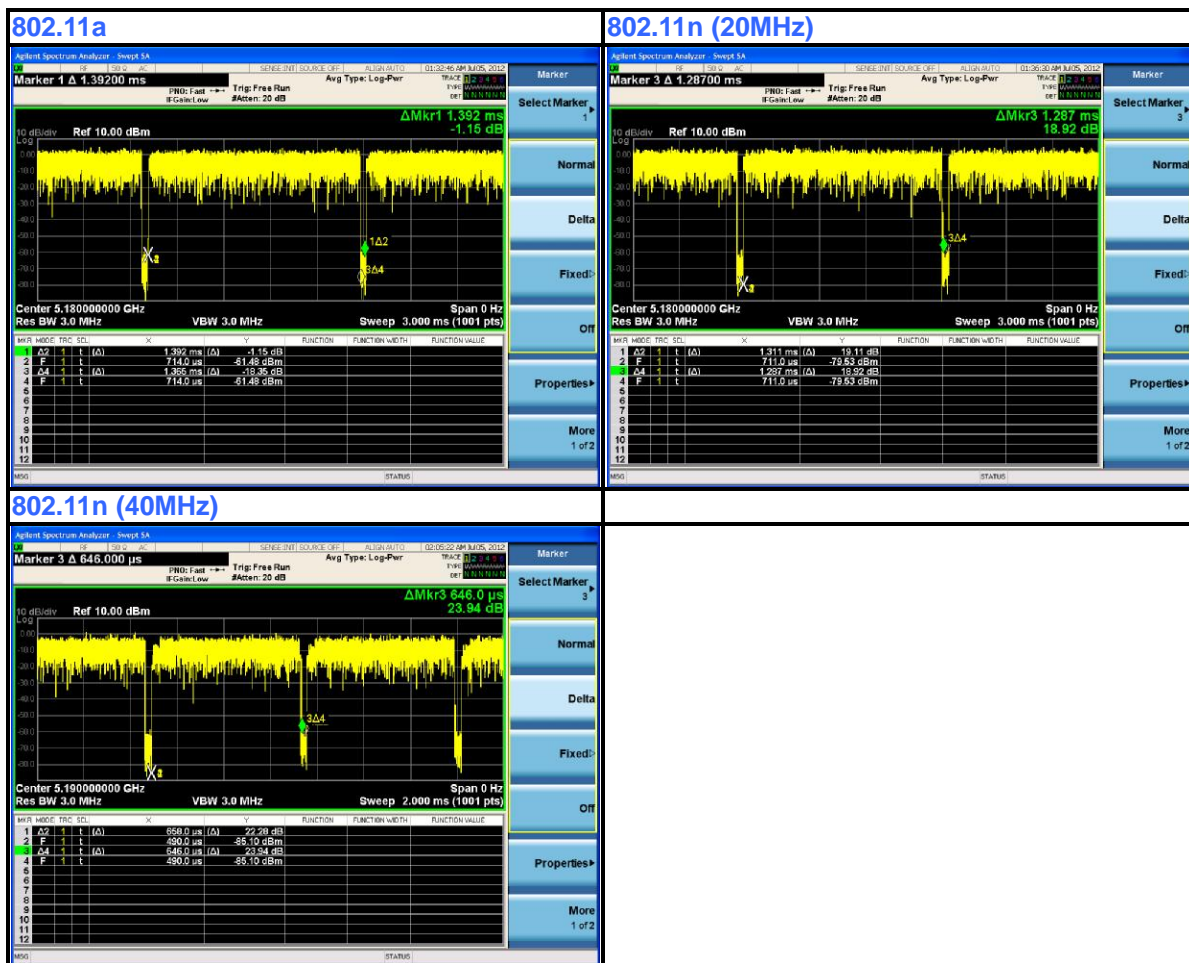



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For conducted emission test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	E6420	B92T3R1	FCC DoC


For other test items					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable, 10m

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST


With adapter mode

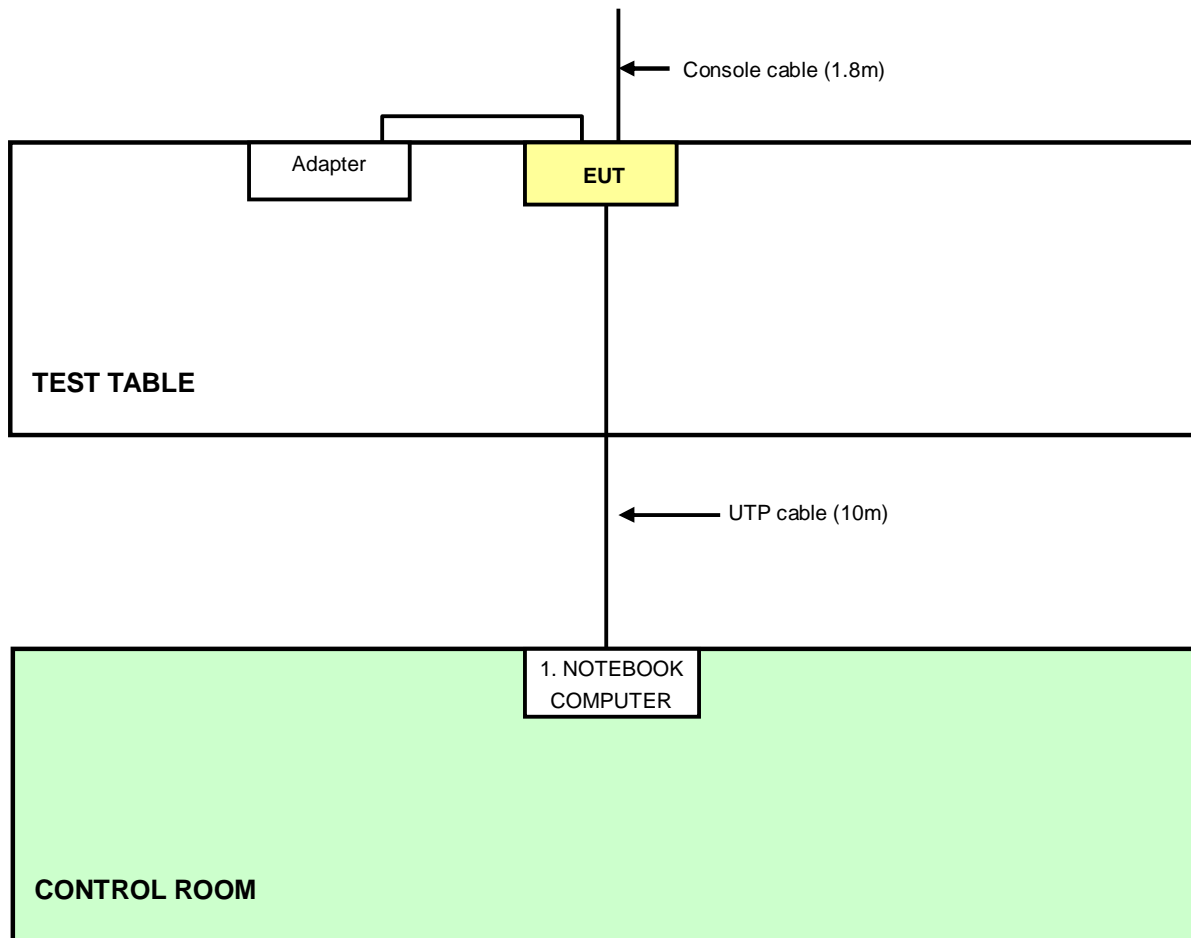



A D T

With POE mode

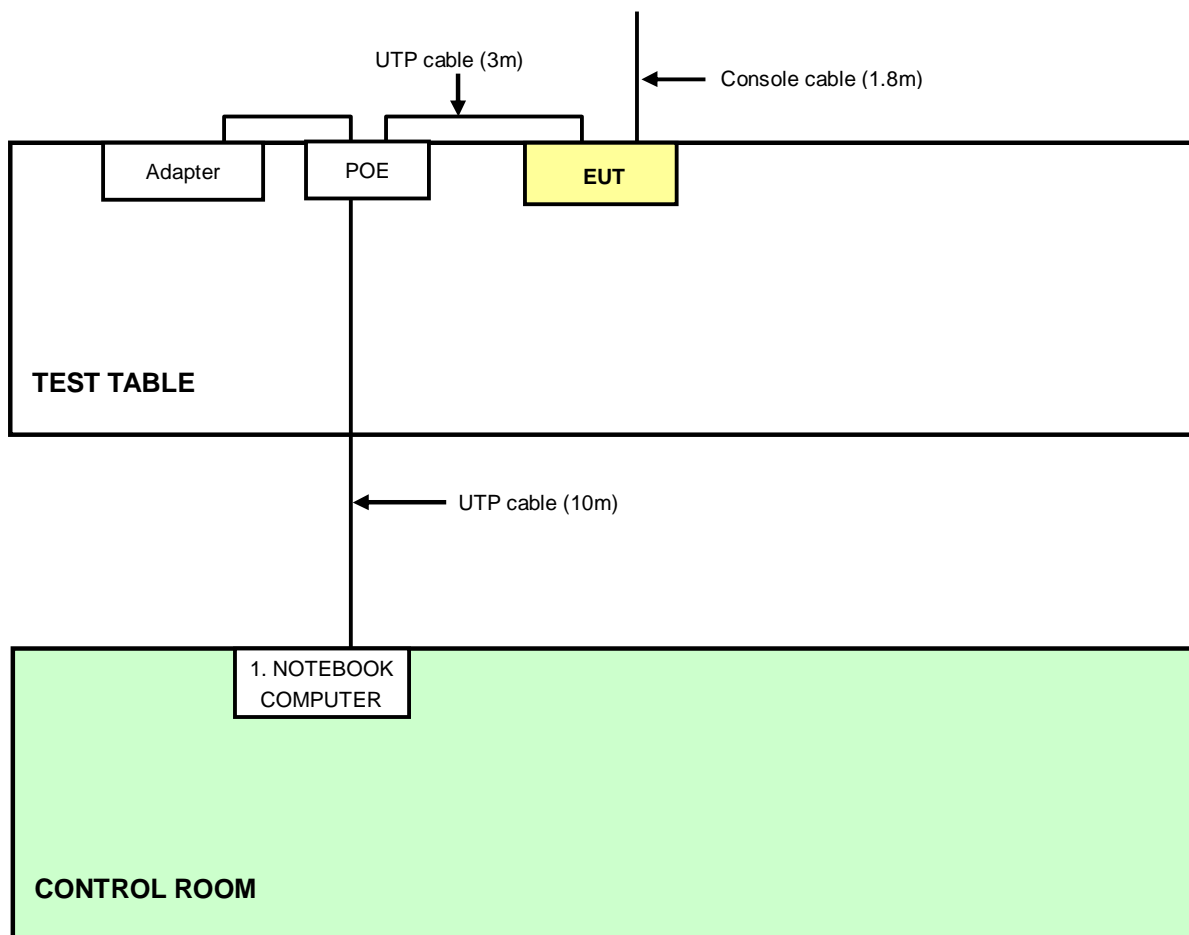



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar.11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	EMC-3	Sep. 26, 2011	Sep. 25, 2012
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: July 03, 2012



A D T


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

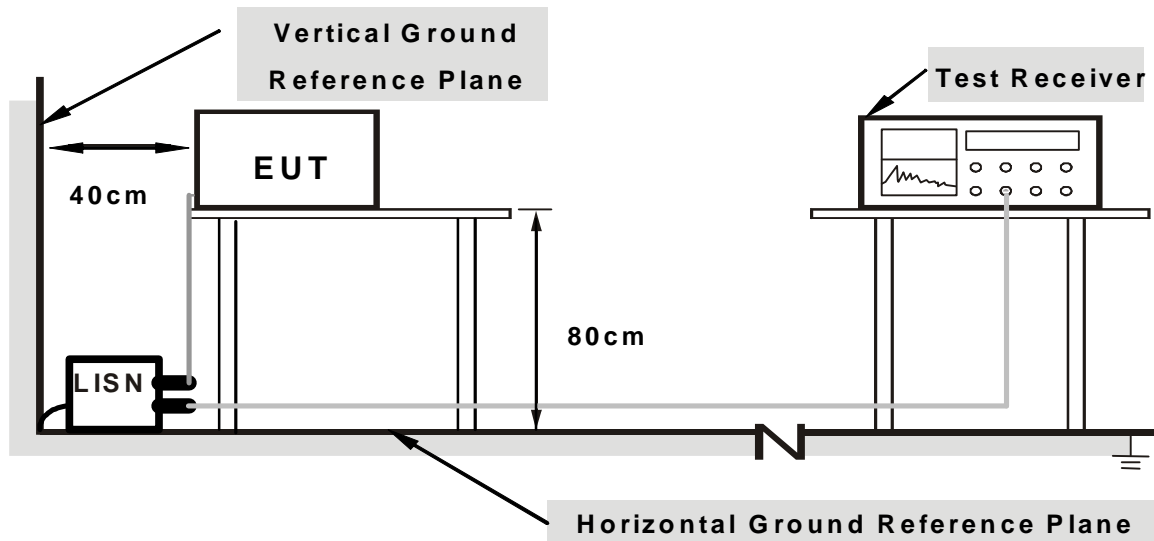

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “artgui.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	[dB]	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)
1	0.15000	0.07	54.36	39.27	54.43	39.34	66.00	56.00	-11.57	-16.66
2	0.18219	0.08	49.85	37.10	49.93	37.18	64.39	54.39	-14.46	-17.21
3	0.29063	0.09	40.34	33.96	40.43	34.05	60.51	50.51	-20.07	-16.45
4	0.67344	0.13	28.52	23.21	28.65	23.34	56.00	46.00	-27.35	-22.66
5	4.63672	0.43	33.47	27.46	33.90	27.89	56.00	46.00	-22.10	-18.11
6	11.58594	0.78	37.67	32.05	38.45	32.83	60.00	50.00	-21.55	-17.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

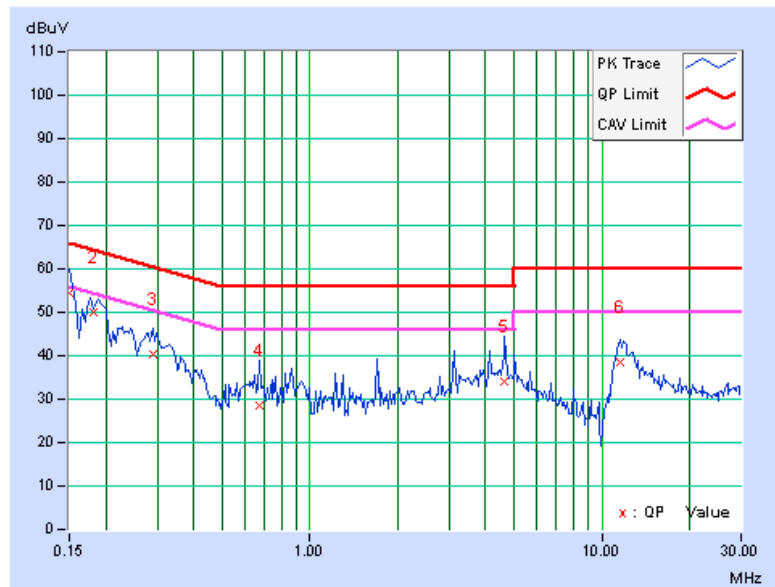


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.06	54.11	39.13	54.17	39.19	66.00	56.00	-11.83	-16.81
2	0.18009	0.07	49.97	37.32	50.04	37.39	64.48	54.48	-14.45	-17.10
3	0.27109	0.08	43.13	35.04	43.21	35.12	61.08	51.08	-17.87	-15.96
4	0.79453	0.11	27.57	21.37	27.68	21.48	56.00	46.00	-28.32	-24.52
5	3.83984	0.30	31.83	26.20	32.13	26.50	56.00	46.00	-23.87	-19.50
6	12.36719	0.70	35.20	29.91	35.90	30.61	60.00	50.00	-24.10	-19.39

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

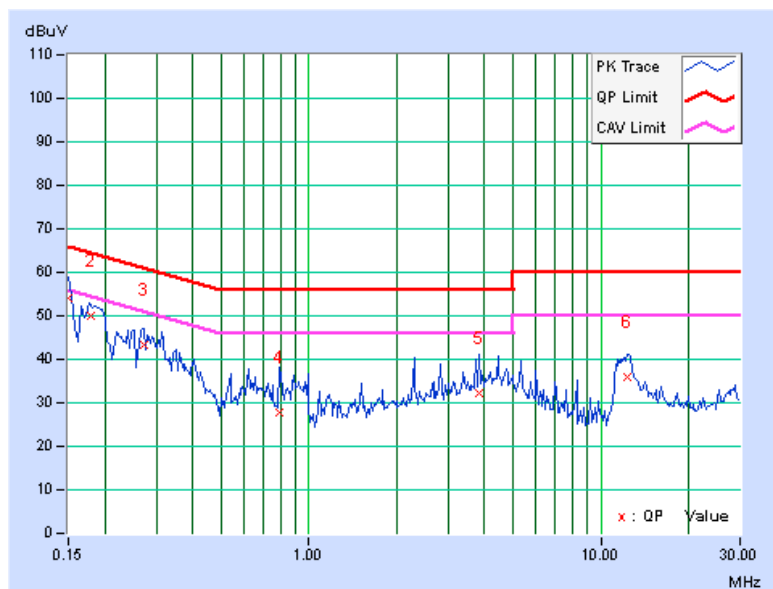


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15925	0.07	55.81	44.70	55.88	44.77	65.50	55.50	-9.62	-10.73
2	0.22031	0.07	44.18	32.91	44.25	32.98	62.81	52.81	-18.56	-19.83
3	0.28487	0.07	44.02	33.82	44.09	33.89	60.67	50.67	-16.58	-16.78
4	0.68703	0.09	32.43	26.29	32.52	26.38	56.00	46.00	-23.48	-19.62
5	1.37500	0.14	33.66	27.73	33.80	27.87	56.00	46.00	-22.20	-18.13
6	4.08594	0.32	38.15	32.28	38.47	32.60	56.00	46.00	-17.53	-13.40

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

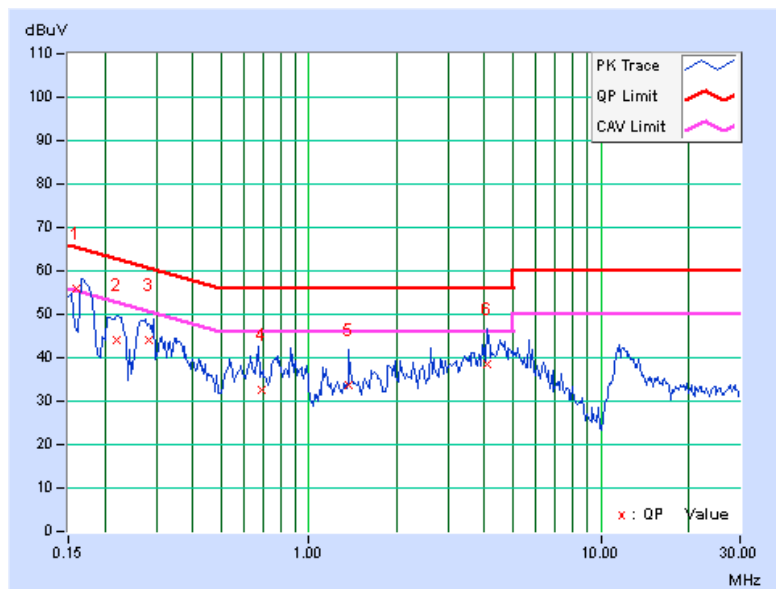


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.06	54.68	43.15	54.74	43.21	65.38	55.38	-10.63	-12.16
2	0.21641	0.07	44.99	32.81	45.06	32.88	62.96	52.96	-17.89	-20.07
3	0.36875	0.10	39.72	34.39	39.82	34.49	58.53	48.53	-18.71	-14.04
4	0.77212	0.11	33.77	24.87	33.88	24.98	56.00	46.00	-22.12	-21.02
5	4.88281	0.35	36.87	30.55	37.22	30.90	56.00	46.00	-18.78	-15.10
6	12.46094	0.70	34.57	28.91	35.27	29.61	60.00	50.00	-24.73	-20.39

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

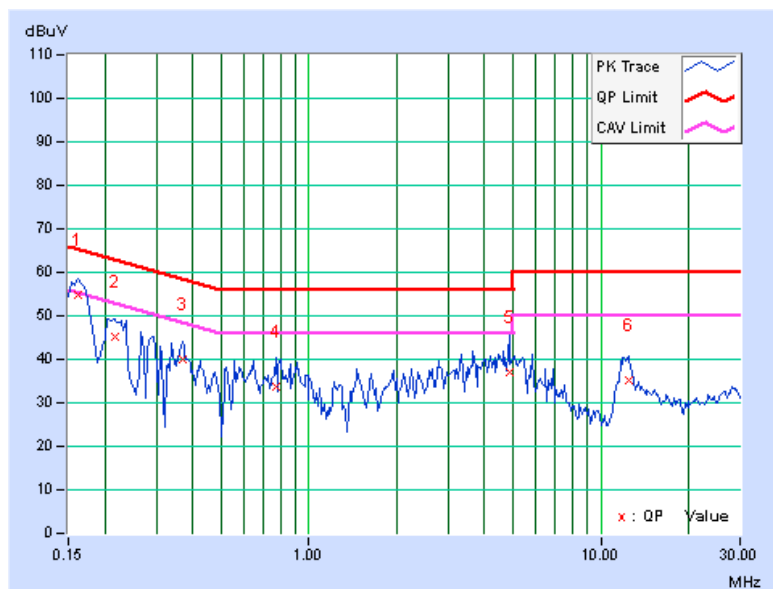


4.1.9 TEST RESULTS (MODE 3)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.07	56.15	46.53	56.22	46.60	65.79	55.79	-9.57	-9.19
2	0.25844	0.09	43.78	39.72	43.87	39.81	61.48	51.48	-17.61	-11.67
3	0.36484	0.10	39.90	35.24	40.00	35.34	58.62	48.62	-18.61	-13.27
4	0.85703	0.14	31.18	25.69	31.32	25.83	56.00	46.00	-24.68	-20.17
5	3.52734	0.37	35.32	30.33	35.69	30.70	56.00	46.00	-20.31	-15.30
6	12.12891	0.80	40.50	35.42	41.30	36.22	60.00	50.00	-18.70	-13.78

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

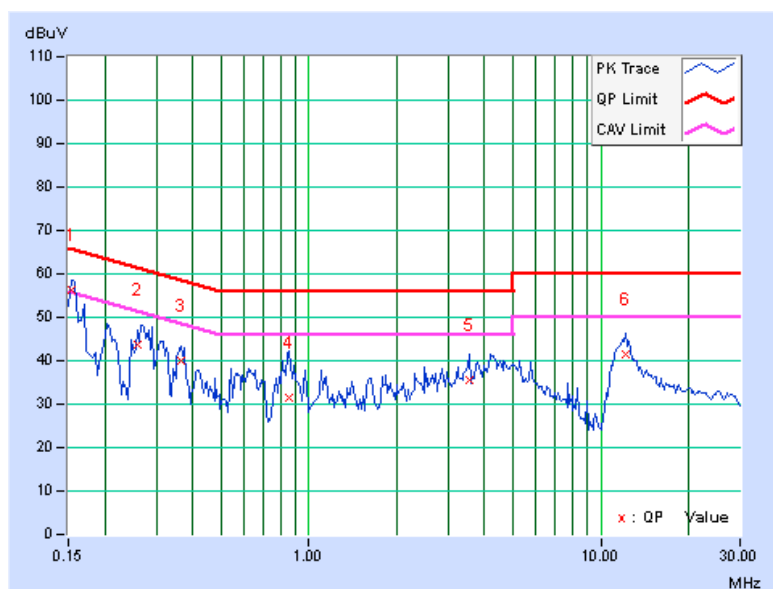


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15572	0.06	54.42	45.81	54.48	45.87	65.69	55.69	-11.21	-9.82
2	0.25938	0.08	43.50	36.78	43.58	36.86	61.45	51.45	-17.87	-14.59
3	0.36484	0.09	39.84	35.06	39.93	35.15	58.62	48.62	-18.68	-13.46
4	0.68125	0.10	31.48	25.78	31.58	25.88	56.00	46.00	-24.42	-20.12
5	4.25781	0.32	36.40	31.32	36.72	31.64	56.00	46.00	-19.28	-14.36
6	11.70313	0.66	38.62	33.06	39.28	33.72	60.00	50.00	-20.72	-16.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

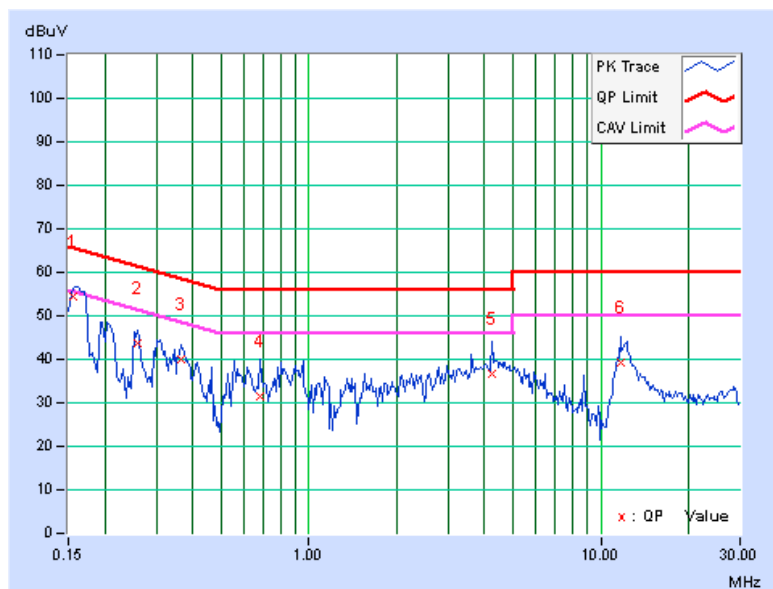

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *NOTE 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *NOTE 1	68.3
	-17 *NOTE 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

For below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
*R&S Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 3 The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in 966 Chamber No. G.
- 5 The FCC Site Registration No. is 966073.
- 6 The VCCI Site Registration No. is G-137.
- 7 The CANADA Site Registration No. is IC 7450H-2.
- 8 Tested Date: June 07, 2012



A D T

For above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012
Spectrum Analyzer Agilent PSA	E4446A	MY48250113	Nov. 30 , 2011	Nov. 29 , 2012
Pre_Amplifier HP	8449B	300801923	Oct. 31, 2011	Oct. 30, 2012
Test Receiver ROHDE & SCHWARZ	ESCS30	847124/029	Sep. 02, 2011	Sep. 01, 2012
TRILOG Broadband Antenna SCHWARZBECK	VULB 9168	138	Apr. 02, 2012	Apr. 01, 2013
Horn_Antenna SCHWARZBECK	BBHA9120	D124	Dec. 16, 2011	Dec. 15, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170153	Jan. 17, 2012	Jan. 16, 2013
RF Switches	EMH-011	1001	Sep. 24, 2011	Sep. 23, 2012
RF Cable (Chaintek)	Sucoflex 106	RF106-102	Jan. 19, 2012	Jan. 18, 2013
RF Cable	8DFB	STCCAB-30M -1GHz	Sep. 24, 2011	Sep. 23, 2012
Software	ADT_Radiated _V7.6.15.9.2	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in Open Site No. C.
4. The FCC Site Registration No. is 656396.
- 5 The VCCI Site Registration No. is R-1626.
- 6 The CANADA Site Registration No. is IC 7450G-3.
- 7 Tested Date: June 22, 2012

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room(below 1GHz test) & 10 meters open site(above 1GHz test). The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

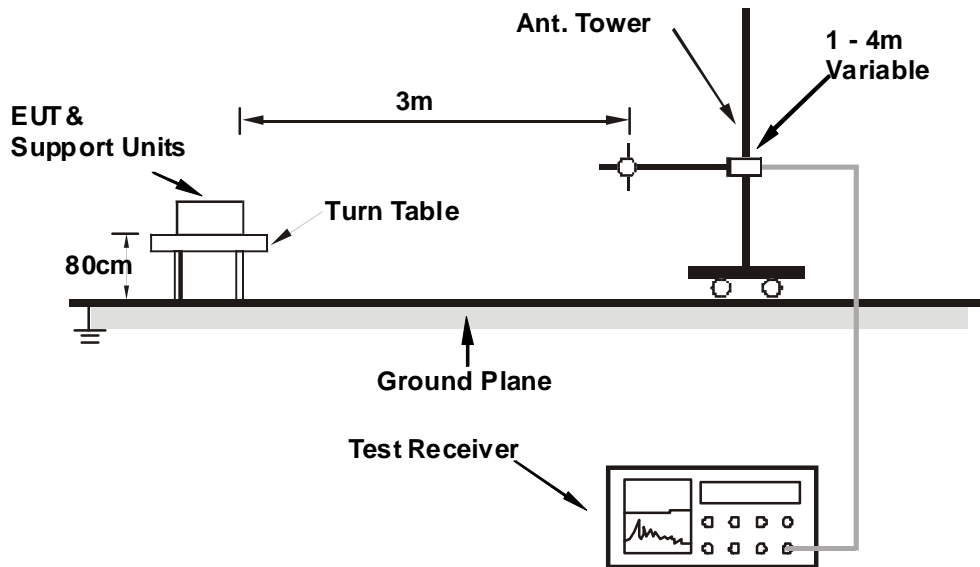

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.24	33.7 QP	40.0	-6.3	2.00 H	277	20.69	13.01
2	88.38	35.1 QP	43.5	-8.4	2.00 H	131	26.34	8.78
3	151.03	33.1 QP	43.5	-10.4	2.00 H	79	18.15	14.94
4	189.04	33.6 QP	43.5	-9.9	1.00 H	63	21.46	12.15
5	205.27	35.1 QP	43.5	-8.4	1.00 H	88	23.72	11.39
6	290.17	33.3 QP	46.0	-12.7	1.00 H	309	18.40	14.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.13	35.7 QP	40.0	-4.3	1.00 V	168	21.81	13.93
2	75.47	36.5 QP	40.0	-3.5	1.00 V	305	25.45	11.03
3	137.88	31.9 QP	43.5	-11.6	1.00 V	360	18.12	13.79
4	289.23	29.8 QP	46.0	-16.2	2.00 V	0	14.95	14.87
5	450.05	29.2 QP	46.0	-16.8	1.00 V	133	10.09	19.14
6	675.17	32.1 QP	46.0	-13.9	1.50 V	68	8.51	23.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.00 H	43	23.60	36.00
2	5150.00	46.4 AV	54.0	-7.6	1.00 H	43	10.40	36.00
3	*5180.00	96.3 PK			1.00 H	43	60.25	36.05
4	*5180.00	85.9 AV			1.00 H	43	49.85	36.05
5	#10360.00	56.3 PK	68.3	-12.0	1.12 H	54	10.15	46.15
6	15540.00	62.2 PK	74.0	-11.8	1.39 H	114	14.09	48.11
7	15540.00	51.5 AV	54.0	-2.5	1.39 H	114	3.39	48.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.7 PK	74.0	-7.3	1.05 V	67	30.70	36.00
2	5150.00	52.7 AV	54.0	-1.3	1.05 V	67	16.70	36.00
3	*5180.00	110.2 PK			1.00 V	12	74.15	36.05
4	*5180.00	99.7 AV			1.00 V	12	63.65	36.05
5	5440.00	63.2 PK	74.0	-10.8	1.00 V	72	26.74	36.46
6	5440.00	52.9 AV	54.0	-1.1	1.00 V	72	16.44	36.46
7	#10360.00	56.1 PK	68.3	-12.2	1.35 V	333	9.95	46.15
8	15540.00	61.4 PK	74.0	-12.6	1.25 V	264	13.29	48.11
9	15540.00	51.3 AV	54.0	-2.7	1.25 V	264	3.19	48.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	96.1 PK			1.00 H	46	60.02	36.08
2	*5200.00	86.3 AV			1.00 H	46	50.22	36.08
3	#10400.00	56.9 PK	68.3	-11.4	1.15 H	61	10.69	46.21
4	15600.00	62.1 PK	74.0	-11.9	1.42 H	115	14.16	47.94
5	15600.00	51.2 AV	54.0	-2.8	1.42 H	115	3.26	47.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.1 PK			1.00 V	11	74.02	36.08
2	*5200.00	99.3 AV			1.00 V	11	63.22	36.08
3	5439.94	62.6 PK	74.0	-11.4	1.00 V	73	26.14	36.46
4	5439.94	53.0 AV	54.0	-1.0	1.00 V	73	16.54	36.46
5	#10400.00	55.9 PK	68.3	-12.4	1.38 V	342	9.69	46.21
6	15600.00	62.5 PK	74.0	-11.5	1.23 V	257	14.56	47.94
7	15600.00	51.4 AV	54.0	-2.6	1.23 V	257	3.46	47.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	96.3 PK			1.00 H	45	60.16	36.14
2	*5240.00	86.4 AV			1.00 H	45	50.26	36.14
3	5350.00	60.2 PK	74.0	-13.8	1.00 H	45	23.88	36.32
4	5350.00	46.5 AV	54.0	-7.5	1.00 H	45	10.18	36.32
5	#10480.00	56.7 PK	68.3	-11.6	1.14 H	57	10.38	46.32
6	15720.00	62.3 PK	74.0	-11.7	1.43 H	116	14.71	47.59
7	15720.00	51.4 AV	54.0	-2.6	1.43 H	116	3.81	47.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.9 PK			1.00 V	12	73.76	36.14
2	*5240.00	99.3 AV			1.00 V	12	63.16	36.14
3	5439.98	62.7 PK	74.0	-11.3	1.00 V	72	26.24	36.46
4	5439.98	53.4 AV	54.0	-0.6	1.00 V	72	16.94	36.46
5	#10480.00	56.2 PK	68.3	-12.1	1.36 V	321	9.88	46.32
6	15720.00	62.9 PK	74.0	-11.1	1.24 V	251	15.31	47.59
7	15720.00	51.6 AV	54.0	-2.4	1.24 V	251	4.01	47.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.00 H	34	21.10	36.00
2	5150.00	45.2 AV	54.0	-8.8	1.00 H	34	9.20	36.00
3	*5180.00	96.7 PK			1.00 H	34	60.65	36.05
4	*5180.00	85.5 AV			1.00 H	34	49.45	36.05
5	#10360.00	55.3 PK	68.3	-13.0	1.10 H	162	9.15	46.15
6	15540.00	60.9 PK	74.0	-13.1	1.00 H	55	12.79	48.11
7	15540.00	49.5 AV	54.0	-4.5	1.00 H	55	1.39	48.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.06 V	64	32.10	36.00
2	5150.00	52.3 AV	54.0	-1.7	1.06 V	64	16.30	36.00
3	*5180.00	109.3 PK			1.00 V	26	73.25	36.05
4	*5180.00	99.1 AV			1.00 V	26	63.05	36.05
5	5439.96	64.0 PK	74.0	-10.0	1.00 V	72	27.54	36.46
6	5439.96	52.6 AV	54.0	-1.4	1.00 V	72	16.14	36.46
7	#10360.00	55.4 PK	68.3	-12.9	1.15 V	153	9.25	46.15
8	15540.00	62.3 PK	74.0	-11.7	1.55 V	267	14.19	48.11
9	15540.00	50.9 AV	54.0	-3.1	1.55 V	267	2.79	48.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	97.1 PK			1.00 H	42	61.02	36.08
2	*5200.00	85.8 AV			1.00 H	42	49.72	36.08
3	#10400.00	55.8 PK	68.3	-12.5	1.09 H	157	9.59	46.21
4	15600.00	61.2 PK	74.0	-12.8	1.33 H	56	13.26	47.94
5	15600.00	50.1 AV	54.0	-3.9	1.33 H	56	2.16	47.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.6 PK			1.00 V	29	73.52	36.08
2	*5200.00	99.3 AV			1.00 V	29	63.22	36.08
3	5440.03	62.7 PK	74.0	-11.3	1.00 V	74	26.24	36.46
4	5440.03	52.6 AV	54.0	-1.4	1.00 V	74	16.14	36.46
5	#10400.00	54.9 PK	68.3	-13.4	1.12 V	151	8.69	46.21
6	15600.00	62.1 PK	74.0	-11.9	1.53 V	265	14.16	47.94
7	15600.00	50.8 AV	54.0	-3.2	1.53 V	265	2.86	47.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	96.2 PK			1.00 H	39	60.06	36.14
2	*5240.00	86.1 AV			1.00 H	39	49.96	36.14
3	5350.00	58.5 PK	74.0	-15.5	1.00 H	39	22.18	36.32
4	5350.00	46.7 AV	54.0	-7.3	1.00 H	39	10.38	36.32
5	#10480.00	55.6 PK	68.3	-12.7	1.13 H	161	9.28	46.32
6	15720.00	61.5 PK	74.0	-12.5	1.32 H	53	13.91	47.59
7	15720.00	50.2 AV	54.0	-3.8	1.32 H	53	2.61	47.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.1 PK			1.00 V	30	73.96	36.14
2	*5240.00	99.4 AV			1.00 V	30	63.26	36.14
3	5350.00	61.2 PK	74.0	-12.8	1.00 V	30	24.88	36.32
4	5350.00	48.9 AV	54.0	-5.1	1.00 V	30	12.58	36.32
5	5440.00	62.9 PK	74.0	-11.1	1.00 V	72	26.44	36.46
6	5440.00	53.2 AV	54.0	-0.8	1.00 V	72	16.74	36.46
7	#10480.00	55.3 PK	68.3	-13.0	1.10 V	149	8.98	46.32
8	15720.00	62.5 PK	74.0	-11.5	1.55 V	261	14.91	47.59
9	15720.00	50.5 AV	54.0	-3.5	1.55 V	261	2.91	47.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.00 H	42	22.50	36.00
2	5150.00	46.9 AV	54.0	-7.1	1.00 H	42	10.90	36.00
3	*5190.00	96.2 PK			1.00 H	42	60.14	36.06
4	*5190.00	84.8 AV			1.00 H	42	48.74	36.06
5	#10380.00	55.8 PK	68.3	-12.5	1.12 H	171	9.62	46.18
6	15570.00	62.8 PK	74.0	-11.2	1.29 H	33	14.77	48.03
7	15570.00	50.3 AV	54.0	-3.7	1.29 H	33	2.27	48.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	1.00 V	100	29.10	36.00
2	5150.00	53.4 AV	54.0	-0.6	1.00 V	100	17.40	36.00
3	*5190.00	111.8 PK			1.00 V	30	75.74	36.06
4	*5190.00	99.2 AV			1.00 V	30	63.14	36.06
5	#10380.00	55.8 PK	68.3	-12.5	1.15 V	159	9.62	46.18
6	15570.00	61.3 PK	74.0	-12.7	1.53 V	249	13.27	48.03
7	15570.00	50.7 AV	54.0	-3.3	1.53 V	249	2.67	48.03

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	95.8 PK			1.00 H	41	59.67	36.13
2	*5230.00	85.2 AV			1.00 H	41	49.07	36.13
3	5350.00	58.4 PK	74.0	-15.6	1.00 H	41	22.08	36.32
4	5350.00	46.5 AV	54.0	-7.5	1.00 H	41	10.18	36.32
5	#10460.00	55.4 PK	68.3	-12.9	1.16 H	167	9.11	46.29
6	15690.00	62.7 PK	74.0	-11.3	1.30 H	40	15.02	47.68
7	15690.00	50.6 AV	54.0	-3.4	1.30 H	40	2.92	47.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5148.32	64.8 PK	74.0	-9.2	1.00 V	237	28.80	36.00
2	5148.32	51.2 AV	54.0	-2.8	1.00 V	237	15.20	36.00
3	*5230.00	109.2 PK			1.00 V	31	73.07	36.13
4	*5230.00	97.9 AV			1.00 V	31	61.77	36.13
5	5399.94	64.8 PK	74.0	-9.2	1.00 V	102	28.40	36.40
6	5399.94	53.4 AV	54.0	-0.6	1.00 V	102	17.00	36.40
7	#10460.00	55.7 PK	68.3	-12.6	1.18 V	154	9.41	46.29
8	15690.00	62.2 PK	74.0	-11.8	1.55 V	162	14.52	47.68
9	15690.00	50.9 AV	54.0	-3.1	1.55 V	162	3.22	47.68

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Average Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 13, 2012

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 13, 2012

4.3.3 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

FOR 26dB OCCUPIED BANDWIDTH


- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

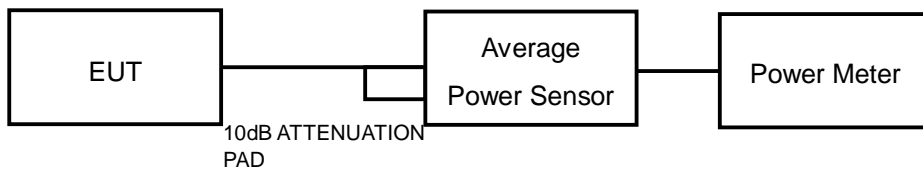

FOR 26dB OCCUPIED BANDWIDTH

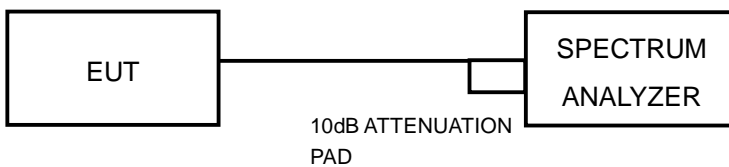

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



4.3.7 TEST RESULTS

POWER OUTPUT: 802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	9.8	7.3	14.920	11.74	14.34	PASS
40	5200	10.0	7.6	15.754	11.97	14.34	PASS
48	5240	9.9	7.7	15.660	11.95	14.34	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 8.66

The effective legacy gain is 8.66dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.1	11.4	30.022	14.77	17	PASS
40	5200	12.4	11.3	30.868	14.90	17	PASS
48	5240	12.3	11.3	30.472	14.84	17	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	11.9	11.7	30.279	14.81	17	PASS
46	5230	13.7	13.2	44.335	16.47	17	PASS



26dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	24.85	23.76
40	5200	24.64	23.83
48	5240	25.47	24.01

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	26.22	25.40
40	5200	25.46	25.74
48	5240	24.88	25.11

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
38	5190	55.40	53.00
46	5230	52.42	53.39



A D T

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 13, 2012


4.4.3 TEST PROCEDURES

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = auto, trigger set to "free run".
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

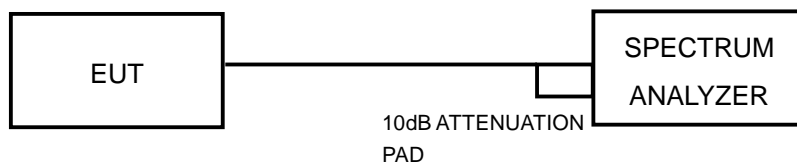

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



4.4.7 TEST RESULTS

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-0.71	-3.37	1.17	1.34	PASS
40	5200	-0.63	-3.39	1.20	1.34	PASS
48	5240	-0.80	-3.17	1.07	1.34	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 8.66

The effective legacy gain is 8.66dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	1.24	0.29	3.79	4	PASS
40	5200	1.62	0.18	3.79	4	PASS
48	5240	1.59	0.18	3.90	4	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-1.88	-2.01	0.87	4	PASS
46	5230	0.61	-0.87	2.87	4	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 13, 2012


4.5.3 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.5.7 TEST RESULTS



802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	8.38	7.04	-0.71	-3.37	9.09	10.41	13	PASS
40	5200	8.37	7.52	-0.63	-3.39	9.00	10.91	13	PASS
48	5240	8.19	7.57	-0.80	-3.17	8.99	10.74	13	PASS



A D T

CH 40

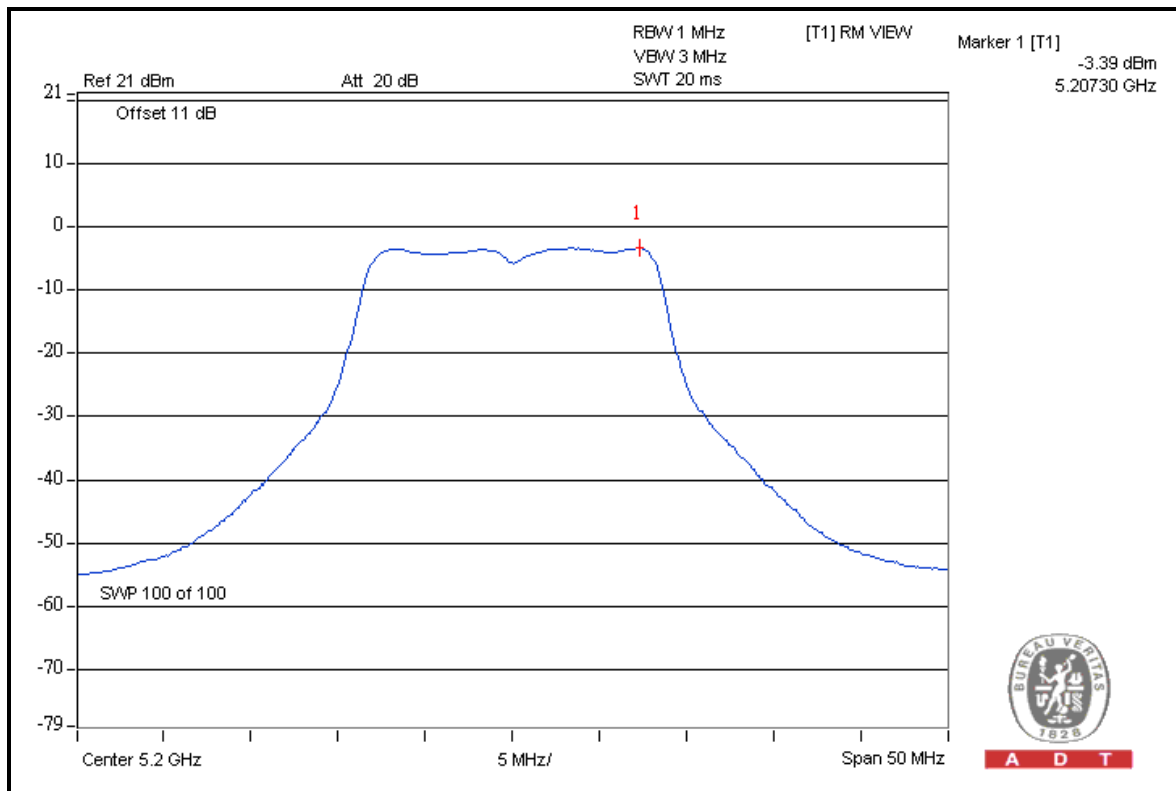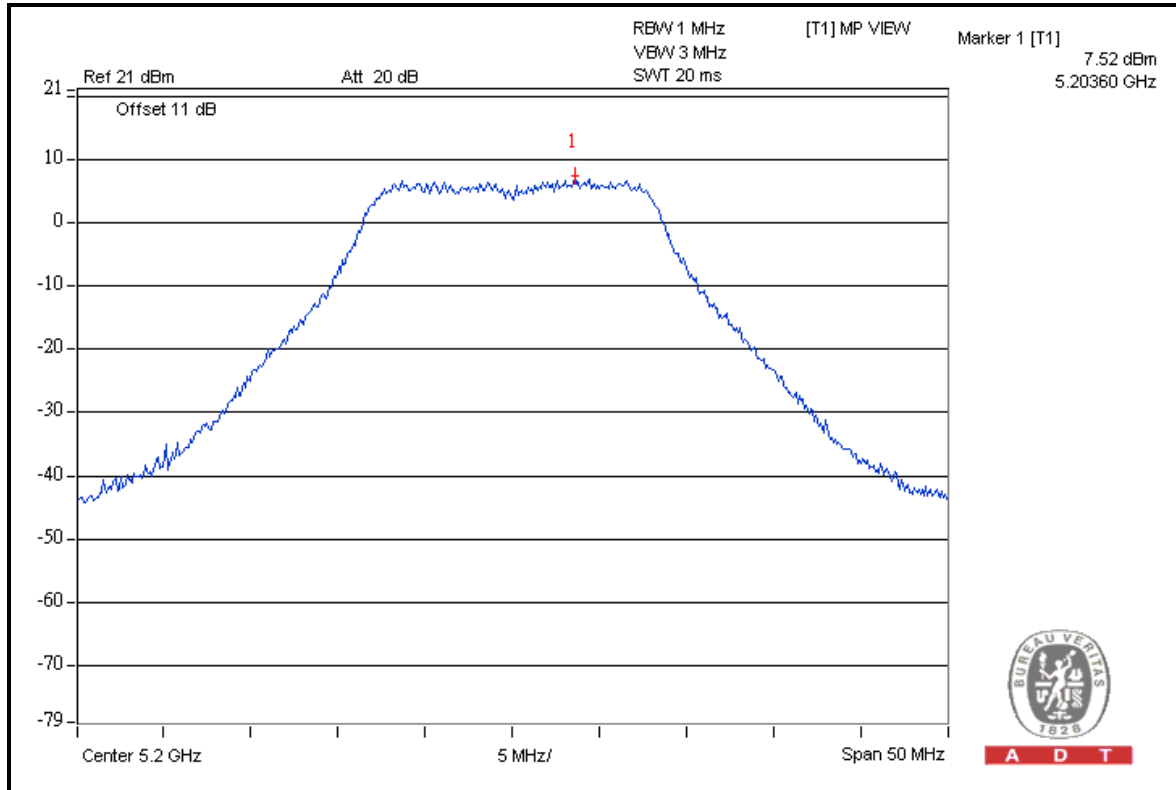



A D T



802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	10.17	10.08	1.24	0.29	8.93	9.79	13	PASS
40	5200	10.54	9.88	1.62	0.18	8.92	9.70	13	PASS
48	5240	11.00	10.25	1.59	0.18	9.41	10.07	13	PASS



A D T

CH 48

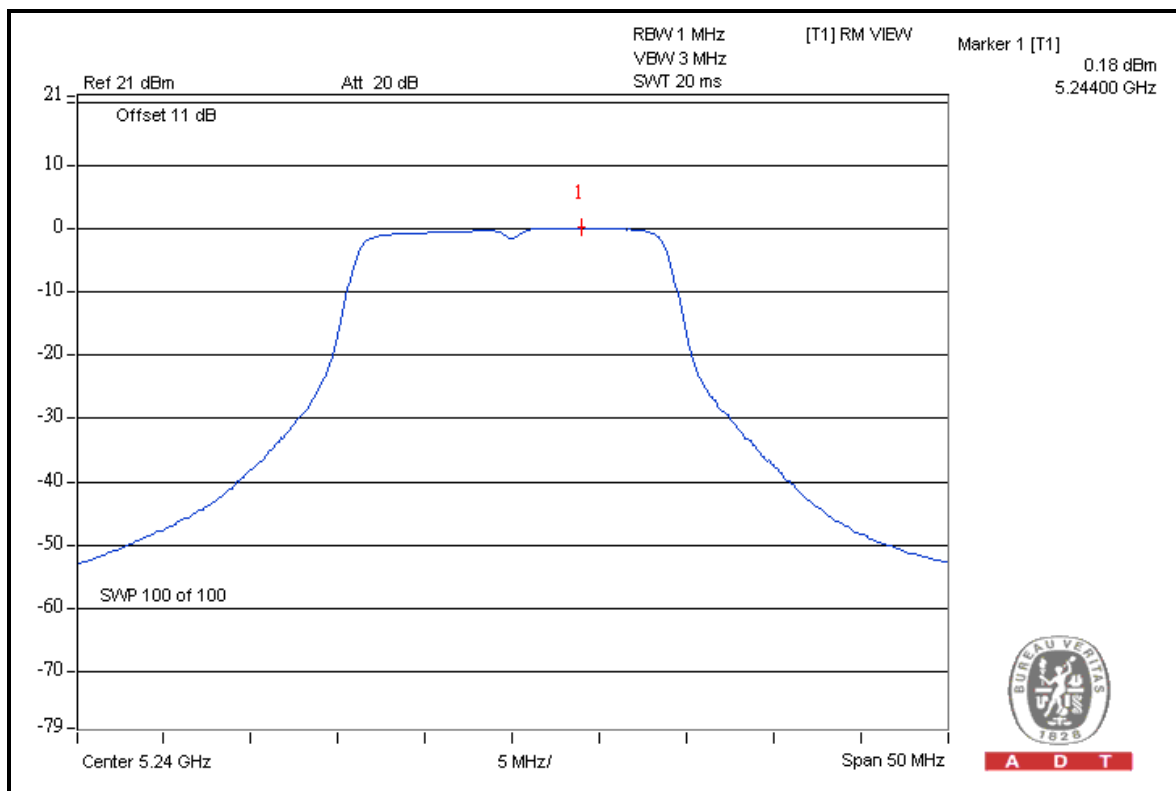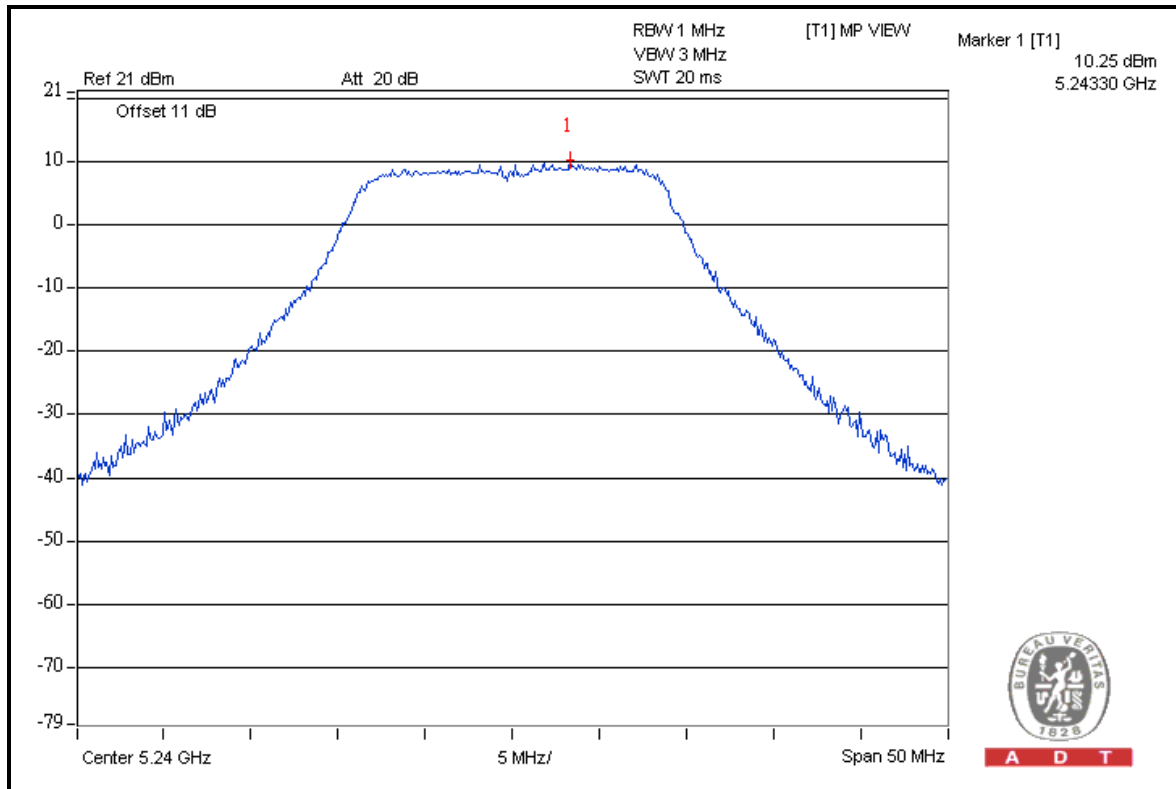



A D T



802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
38	5190	7.97	8.04	-1.88	-2.01	9.85	10.05	13	PASS
46	5230	9.97	9.32	0.61	-0.87	9.36	10.19	13	PASS



A D T

CH 46

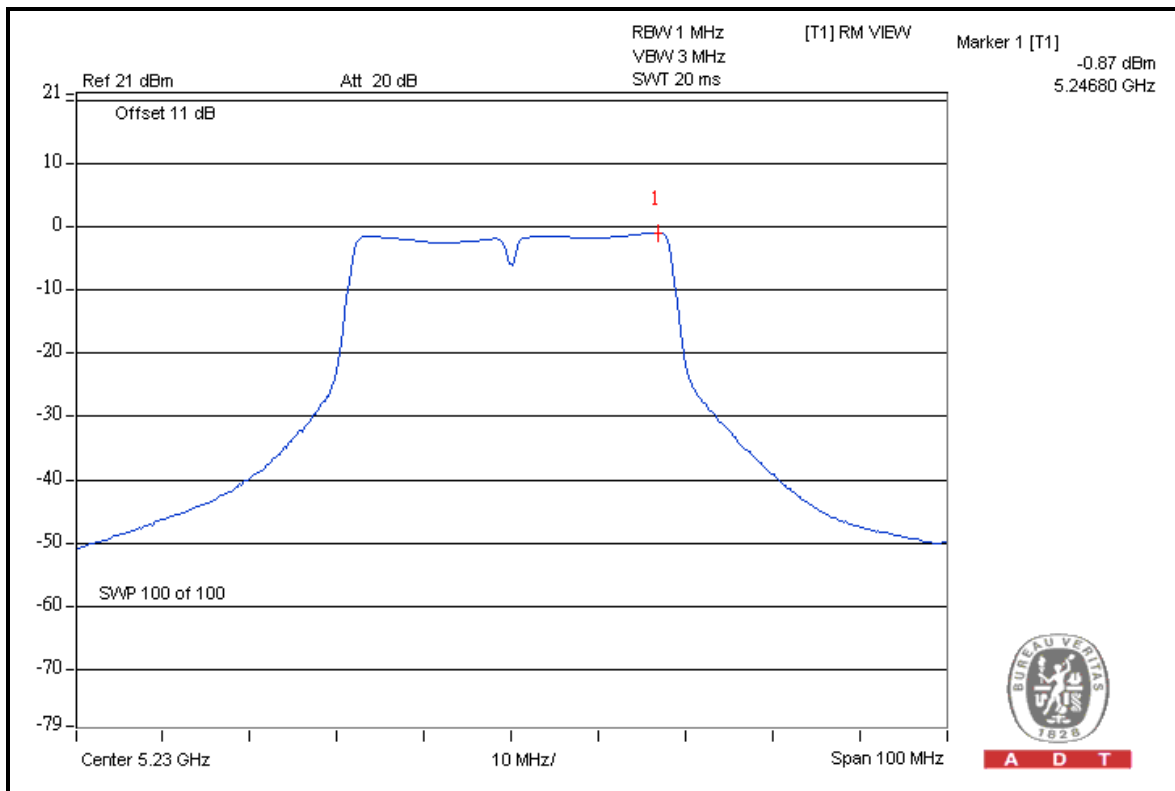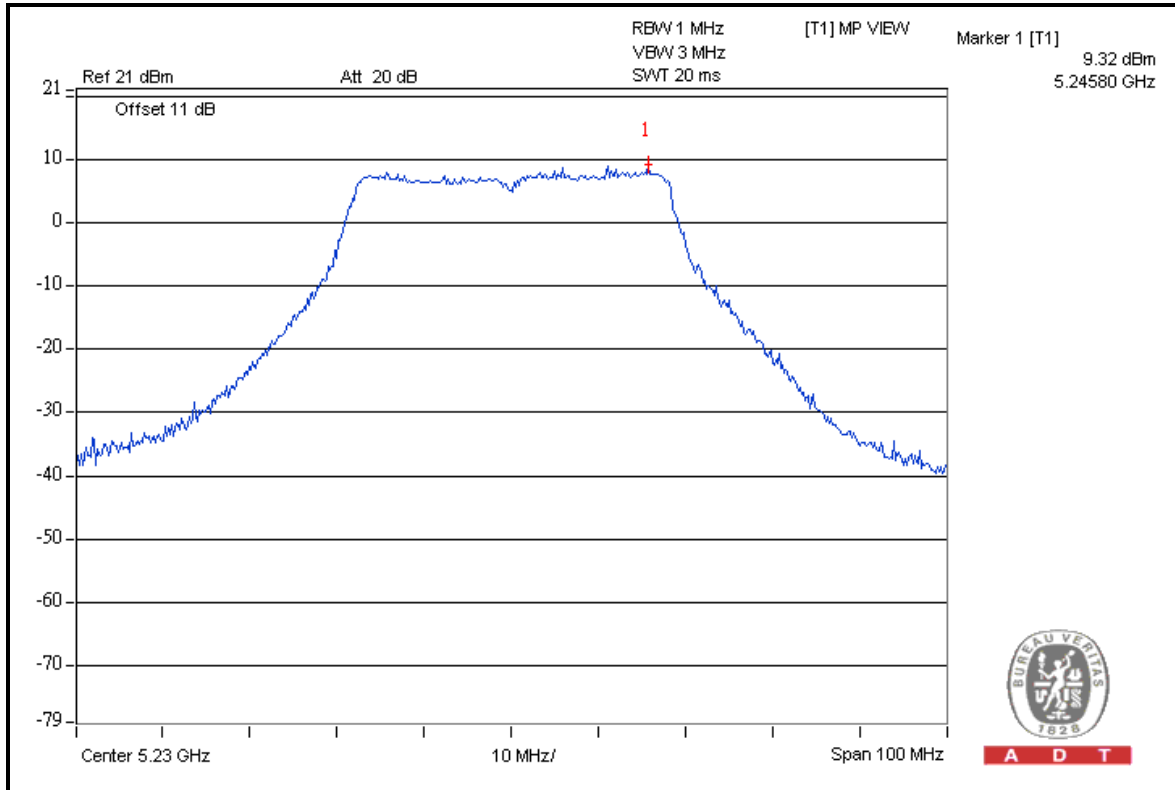

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 13, 2012


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

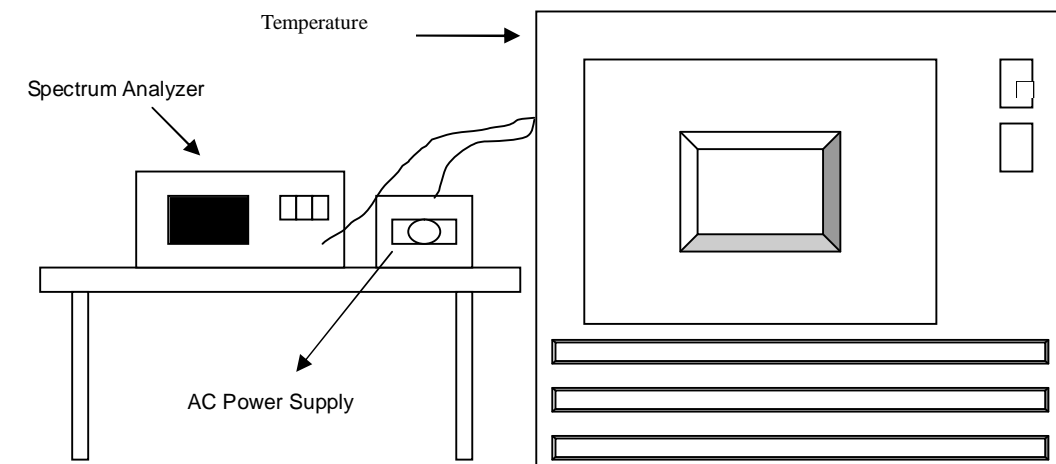

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5240.0151	2.8817	5240.0161	3.0725	5240.0189	3.6069	5240.0174	3.3206
40	120	5240.0123	2.3473	5240.0105	2.0038	5240.0146	2.7863	5240.015	2.8626
30	120	5239.9903	-1.8511	5239.9908	-1.7557	5239.988	-2.2901	5239.9884	-2.2137
20	120	5240.0209	3.9885	5240.0167	3.1870	5240.019	3.6260	5240.0155	2.9580
10	120	5239.9984	-0.3053	5239.9933	-1.2786	5239.9916	-1.6031	5239.9881	-2.2710
0	120	5240.0157	2.9962	5240.0201	3.8359	5240.0189	3.6069	5240.0189	3.6069
-10	120	5239.9855	-2.7672	5239.985	-2.8626	5239.9826	-3.3206	5239.9834	-3.1679
-20	120	5239.9965	-0.6679	5239.9927	-1.3931	5239.994	-1.1450	5239.9956	-0.8397
-30	120	5240.0151	2.8817	5240.0125	2.3855	5240.0126	2.4046	5240.0078	1.4885

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5240.0211	4.0267	5240.0178	3.3969	5240.0184	3.5115	5240.014	2.6718
	120	5240.0209	3.9885	5240.0167	3.1870	5240.019	3.6260	5240.0155	2.9580
	102	5240.0211	4.0267	5240.0175	3.3397	5240.0188	3.5878	5240.0144	2.7481



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---