



FCC TEST REPORT

REPORT NO.: RF120622E06B

MODEL NO.: DCS-931L

FCC ID: KA2CS931LA1

RECEIVED: June 22, 2012

TESTED: June 25, 2012 to Jan. 25, 2013

ISSUED: Jan. 30, 2013

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114,
Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DESCRIPTION OF SUPPORT UNITS.....	15
3.5 CONFIGURATION OF SYSTEM UNDER TEST	15
4. TEST TYPES AND RESULTS.....	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	16
4.1.2 TEST INSTRUMENTS	16
4.1.3 TEST PROCEDURES.....	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS.....	19
4.1.7 TEST RESULTS (Mode 1).....	20
4.1.8 TEST RESULTS (Mode 2).....	22
4.1.9 TEST RESULTS (Mode 3).....	24
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	26
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	26
4.2.2 TEST INSTRUMENTS	27
4.2.3 TEST PROCEDURES.....	28
4.2.4 DEVIATION FROM TEST STANDARD	28
4.2.5 TEST SETUP	29
4.2.6 EUT OPERATING CONDITIONS.....	29
4.2.7 TEST RESULTS.....	30
4.3 6dB BANDWIDTH MEASUREMENT	43
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	43
4.3.2 TEST INSTRUMENTS	43
4.3.3 TEST PROCEDURE	43
4.3.4 DEVIATION FROM TEST STANDARD	43
4.3.5 TEST SETUP	43
4.3.6 EUT OPERATING CONDITIONS.....	43



A D T

4.3.7	TEST RESULTS.....	44
4.4	CONDUCTED OUTPUT POWER MEASUREMENT	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.4.2	INSTRUMENTS	45
4.4.3	TEST PROCEDURES.....	45
4.4.4	DEVIATION FROM TEST STANDARD	45
4.4.5	TEST SETUP	45
4.4.6	EUT OPERATING CONDITIONS.....	46
4.4.7	TEST RESULTS.....	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.2	TEST INSTRUMENTS	48
4.5.3	TEST PROCEDURE	48
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITION	48
4.5.7	TEST RESULTS.....	49
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	50
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	50
4.6.2	TEST INSTRUMENTS	50
4.6.3	TEST PROCEDURE	50
4.6.4	DEVIATION FROM TEST STANDARD	51
4.6.5	TEST SETUP	51
4.6.6	EUT OPERATING CONDITION	51
4.6.7	TEST RESULTS.....	51
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	56
6.	INFORMATION ON THE TESTING LABORATORIES	57
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	58



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120622E06B	Original release	Jan. 30, 2013



A D T

1. CERTIFICATION

PRODUCT: Wireless N H.264 Network Camera
BRAND NAME: D-Link
MODEL NO.: DCS-931L
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: D-Link Corporation
TESTED: June 25, 2012 to Jan. 25, 2013
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: DCS-931L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, **DATE:** Jan. 30, 2013
(Midoli Peng, Specialist)

APPROVED BY : May Chen, **DATE:** Jan. 30, 2013
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.00dB at 2.39453MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 2390.00MHz & 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -18GHz)	3.56 dB
Radiated emissions (18GHz -40GHz)	4.10 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless N H.264 Network Camera
MODEL NO.	DCS-931L
POWER SUPPLY	DC 5V from Power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: Up to 11Mbps 802.11g: Up to 54Mbps 802.11n (HT20, 800ns GI): Up to 65Mbps 802.11n (HT20, 400ns GI): Up to 72.2Mbps 802.11n (HT40, 800ns GI): Up to 135Mbps 802.11n (HT40, 400ns GI): Up to 150Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	802.11b: 74.131mW 802.11g: 234.423mW 802.11n (HT20): 229.087mW 802.11n (HT40): 173.780mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	LAN Cable (unshielded, 1.5m)
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. There is one antenna provided to this EUT, please refer to the following table:

Brand	Model	Antenna Type	Gain (dBi)	Connector Type
ACX	AT7020-E3R0HBAT/LF	CHIP Antenna	1.3	NA

2. The EUT must be supplied with a power adapter and following three different model names could be chosen as below table:

No.	Brand	Model No.	Spec.
Adapter 1	D-Link	AMS47-0501000FU	AC Input: 100-240V, 50-60Hz, 0.2A DC Output: 5V, 1A DC Output cable (1.5m, unshielded)
Adapter 2	D-Link	SAI005B US	AC Input: 100-240V, 47-63Hz, 0.2A DC Output: 5V, 1A DC Output cable (1.5m, unshielded)
Adapter 3	D-Link	AMS1-0501000FU	AC Input: 100-240V, 50-60Hz, 0.2A DC Output: 5V, 1A DC Output cable (1.5m, unshielded)

From the adapters, for radiated test the worst case was found in adapter 1. Therefore only the test data of the mode was recorded in this report.

3. The EUT is 1 * 1 spatial SISO (1Tx & 1Rx) without beam forming function.
4. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	With adapter 1
2	√	-	-	-	-	With adapter 2
3	√	-	-	-	-	With adapter 3

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: "-" means no effect.

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The radiated emission worst case was found when positioned on **Y-plane**

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 13	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 13	6	OFDM	BPSK	6

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25deg. C, 65%RH	120Vac, 60Hz	Kyle Huang
RE<1G	21deg. C, 63%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	20deg. C, 62%RH	120Vac, 60Hz	Amos Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Nelson Teng
OB	25deg. C, 60%RH	120Vac, 60Hz	Nelson Teng



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance

662911 D01 Multiple Transmitter Output

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

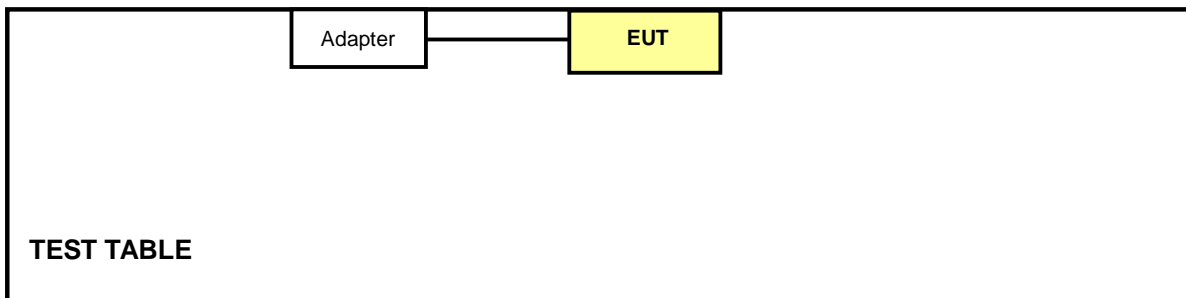



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

For test mode 1 ~ 2:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	4	Nov. 12, 2011	Nov. 11, 2012
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: June 25, 2012



A D T

For test mode 3:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 05, 2012	Aug. 04, 2013
50 ohms Terminator	50	4	Nov. 12, 2011	Nov. 11, 2012
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
- 3 The VCCI Con A Registration No. is C-817.
4. Tested Date: Aug. 22, 2012

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

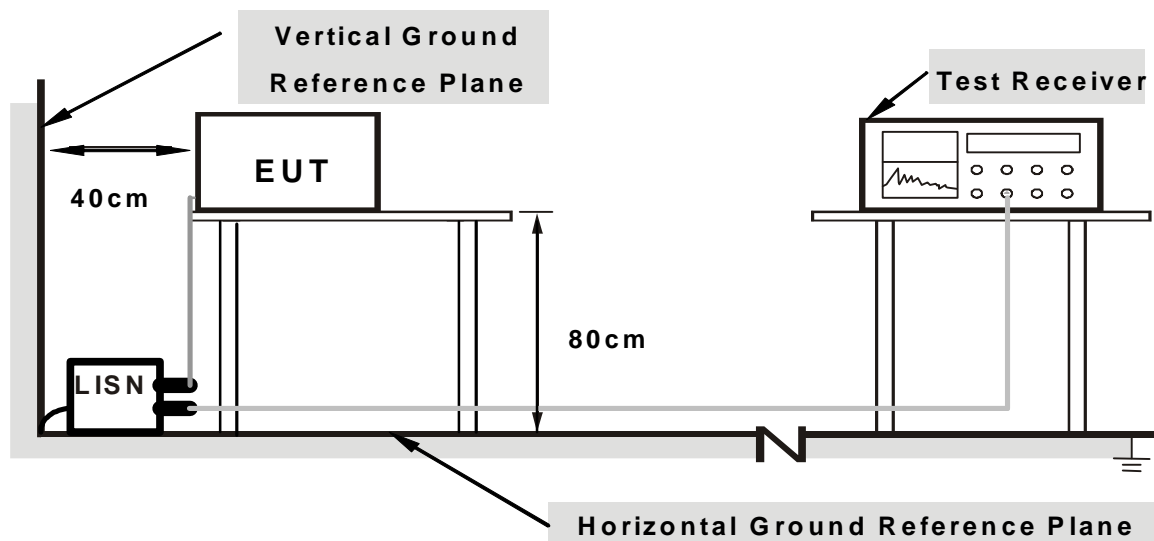

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Controlling software (RT3352QA.exe) has been activated to set the EUT under transmission/receiving condition continuously.


4.1.7 TEST RESULTS (Mode 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.06	45.02	39.24	45.08	39.30	65.38	55.38	-20.30	-16.08
2	0.43906	0.08	45.24	35.78	45.32	35.86	57.08	47.08	-11.76	-11.22
3	0.94688	0.13	39.78	31.51	39.91	31.64	56.00	46.00	-16.09	-14.36
4	1.58984	0.18	40.03	30.78	40.21	30.96	56.00	46.00	-15.79	-15.04
5	2.36719	0.24	39.76	30.24	40.00	30.48	56.00	46.00	-16.00	-15.52
6	6.69141	0.45	39.31	30.08	39.76	30.53	60.00	50.00	-20.24	-19.47

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

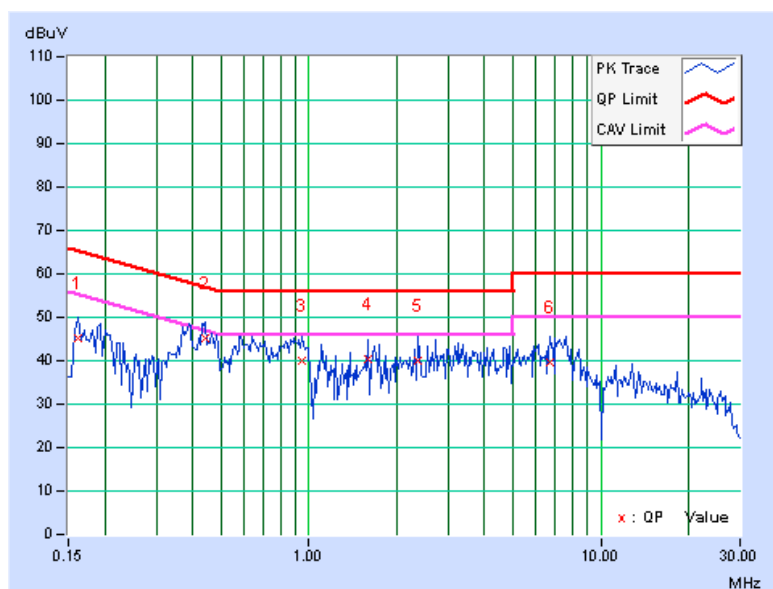




A D T

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.08	44.03	32.80	44.11	32.88	63.91	53.91	-19.80	-21.03
2	0.44297	0.09	42.92	33.77	43.01	33.86	57.01	47.01	-13.99	-13.14
3	0.64609	0.11	39.53	30.20	39.64	30.31	56.00	46.00	-16.36	-15.69
4	0.97422	0.14	38.55	28.96	38.69	29.10	56.00	46.00	-17.31	-16.90
5	7.21484	0.46	37.05	28.44	37.51	28.90	60.00	50.00	-22.49	-21.10
6	21.66016	1.03	29.67	21.76	30.70	22.79	60.00	50.00	-29.30	-27.21

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

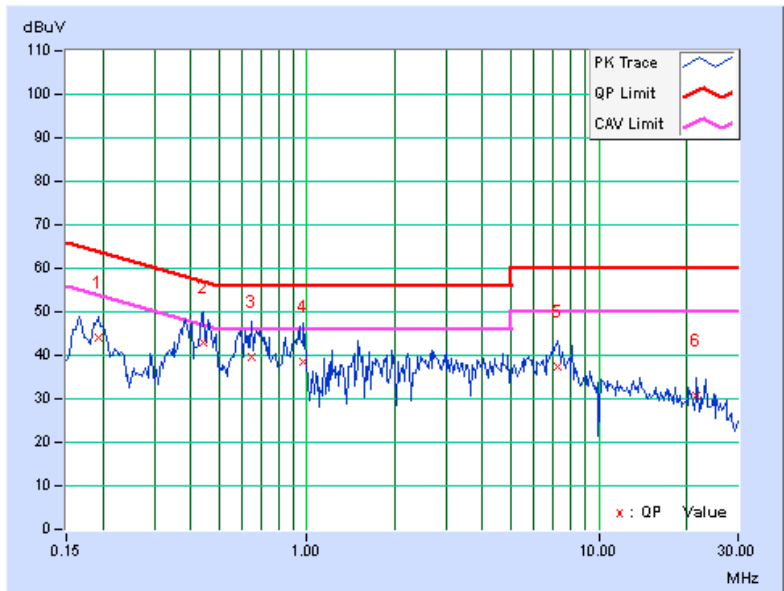


4.1.8 TEST RESULTS (Mode 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.06	43.40	38.84	43.46	38.90	65.18	55.18	-21.72	-16.28
2	0.51328	0.09	44.19	30.39	44.28	30.48	56.00	46.00	-11.72	-15.52
3	2.58594	0.25	43.34	35.08	43.59	35.33	56.00	46.00	-12.41	-10.67
4	3.32031	0.29	41.09	32.51	41.38	32.80	56.00	46.00	-14.62	-13.20
5	9.06641	0.55	46.39	42.07	46.94	42.62	60.00	50.00	-13.06	-7.38
6	12.63281	0.70	40.10	35.95	40.80	36.65	60.00	50.00	-19.20	-13.35

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

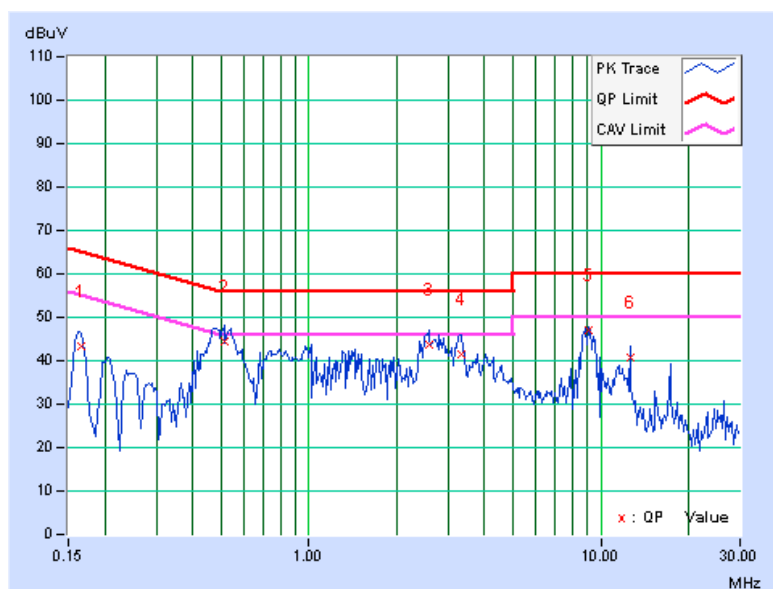


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.07	44.33	39.36	44.40	39.43	65.38	55.38	-20.97	-15.94
2	0.52891	0.10	40.95	25.43	41.05	25.53	56.00	46.00	-14.95	-20.47
3	2.57337	0.25	42.67	29.79	42.92	30.04	56.00	46.00	-13.08	-15.96
4	3.24219	0.29	41.56	26.83	41.85	27.12	56.00	46.00	-14.15	-18.88
5	8.94141	0.53	43.89	39.42	44.42	39.95	60.00	50.00	-15.58	-10.05
6	12.62500	0.69	38.55	33.53	39.24	34.22	60.00	50.00	-20.76	-15.78

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

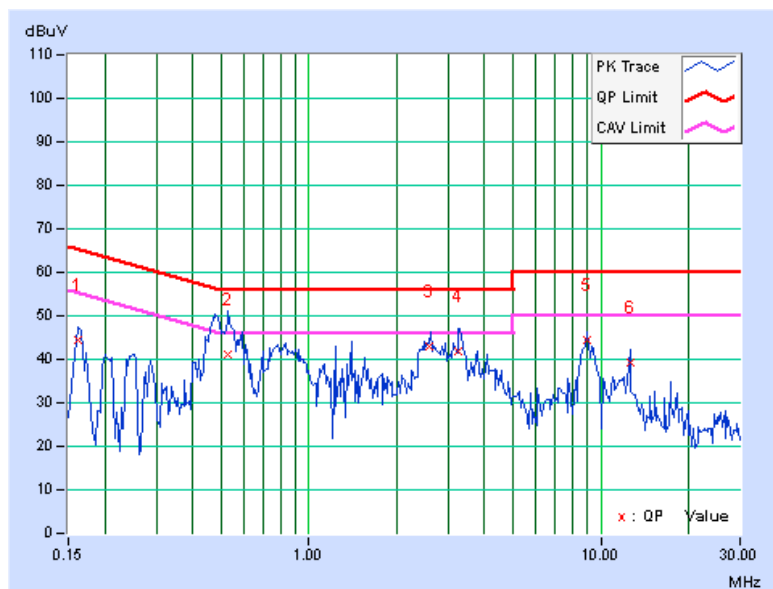



A D T


4.1.9 TEST RESULTS (Mode 3)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.09	47.05	38.58	47.14	38.67	65.18	55.18	-18.03	-16.50
2	0.22812	0.12	44.65	33.53	44.77	33.65	62.52	52.52	-17.75	-18.87
3	0.50547	0.18	45.88	31.10	46.06	31.28	56.00	46.00	-9.94	-14.72
4	1.60547	0.27	44.54	35.17	44.81	35.44	56.00	46.00	-11.19	-10.56
5	2.39453	0.32	50.45	40.68	50.77	41.00	56.00	46.00	-5.23	-5.00
6	3.17578	0.37	43.19	33.25	43.56	33.62	56.00	46.00	-12.44	-12.38

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

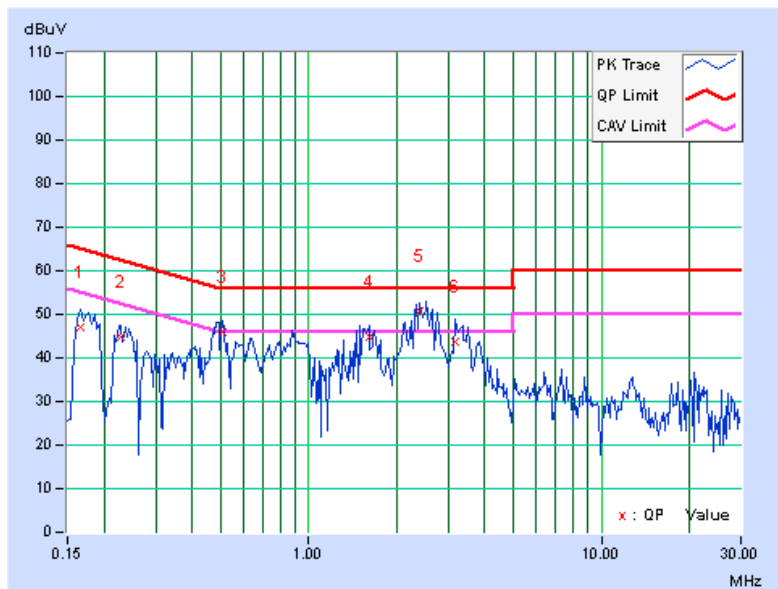


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.12	45.26	23.37	45.38	23.49	64.08	54.08	-18.69	-30.58
2	0.23203	0.14	43.99	31.07	44.13	31.21	62.38	52.38	-18.25	-21.17
3	1.44922	0.27	35.41	22.50	35.68	22.77	56.00	46.00	-20.32	-23.23
4	2.58984	0.32	46.51	34.31	46.83	34.63	56.00	46.00	-9.17	-11.37
5	3.36328	0.38	43.01	30.93	43.39	31.31	56.00	46.00	-12.61	-14.69
6	12.30078	0.80	25.41	16.46	26.21	17.26	60.00	50.00	-33.79	-32.74

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

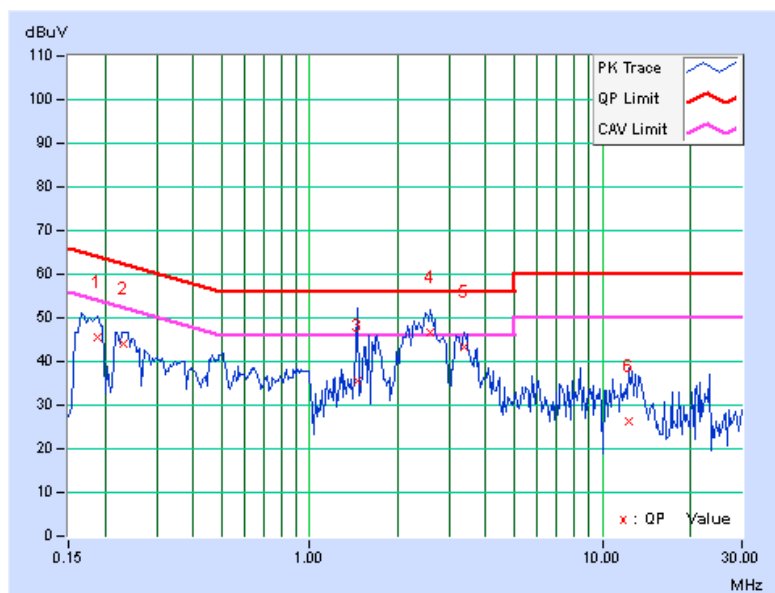

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 12, 2011	July 11, 2012
Pre-Selector Agilent	N9039A	MY46520311	July 12, 2011	July 11, 2012
Signal Generator Agilent	N5181A	MY49060517	July 12, 2011	July 11, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02578	July 04, 2011	July 03, 2012
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
Loop Antenna ^(*) R&S	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in 966 Chamber No. G.
5. The FCC Site Registration No. is 966073.
6. The VCCI Site Registration No. is G-137.
7. The CANADA Site Registration No. is IC 7450H-2.
8. Tested Date: July 02, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

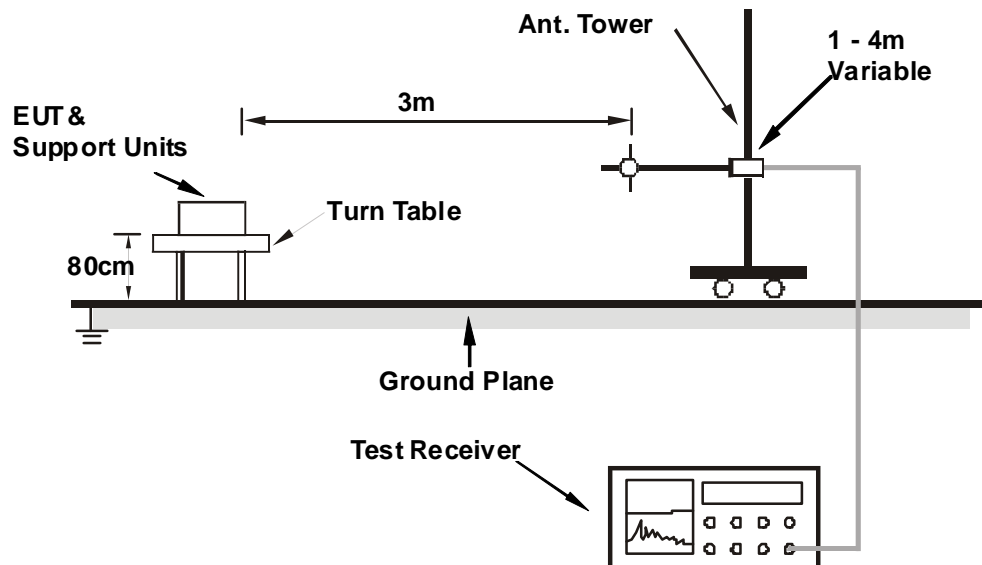

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.66	25.8 QP	40.0	-14.2	1.50 H	311	11.94	13.89
2	120.00	30.2 QP	43.5	-13.3	2.00 H	293	17.60	12.57
3	163.11	32.5 QP	43.5	-11.0	2.00 H	273	18.33	14.14
4	199.70	26.2 QP	43.5	-17.4	1.00 H	325	14.96	11.19
5	399.95	30.0 QP	46.0	-16.0	2.00 H	118	12.14	17.86
6	466.74	28.1 QP	46.0	-17.9	2.00 H	0	8.55	19.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.21	35.5 QP	40.0	-4.5	1.00 V	246	21.91	13.56
2	120.00	32.2 QP	43.5	-11.3	1.00 V	360	19.65	12.57
3	394.74	24.2 QP	46.0	-21.8	1.00 V	339	6.45	17.73
4	479.89	28.2 QP	46.0	-17.8	1.00 V	197	8.34	19.89
5	533.30	25.4 QP	46.0	-20.6	1.00 V	61	4.24	21.17
6	666.64	30.3 QP	46.0	-15.7	1.00 V	286	6.74	23.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.00 H	21	24.91	32.19
2	2390.00	46.2 AV	54.0	-7.8	1.00 H	21	14.01	32.19
3	*2412.00	101.8 PK			1.00 H	21	69.55	32.25
4	*2412.00	98.8 AV			1.00 H	21	66.55	32.25
5	4824.00	55.8 PK	74.0	-18.2	1.11 H	6	14.23	41.57
6	4824.00	52.9 AV	54.0	-1.1	1.11 H	6	11.33	41.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.11 V	95	27.91	32.19
2	2390.00	47.6 AV	54.0	-6.4	1.11 V	95	15.41	32.19
3	*2412.00	101.7 PK			1.11 V	95	69.45	32.25
4	*2412.00	98.7 AV			1.11 V	95	66.45	32.25
5	4824.00	54.3 PK	74.0	-19.7	1.34 V	324	12.73	41.57
6	4824.00	51.2 AV	54.0	-2.8	1.34 V	324	9.63	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	57.3 PK	74.0	-16.7	1.02 H	19	25.38	31.92
2	2310.00	45.1 AV	54.0	-8.9	1.02 H	19	13.18	31.92
3	*2437.00	102.5 PK			1.02 H	19	70.19	32.31
4	*2437.00	99.7 AV			1.02 H	19	67.39	32.31
5	2483.50	57.2 PK	74.0	-16.8	1.02 H	19	24.77	32.43
6	2483.50	45.8 AV	54.0	-8.2	1.02 H	19	13.37	32.43
7	4874.00	56.2 PK	74.0	-17.8	1.10 H	8	14.54	41.66
8	4874.00	53.4 AV	54.0	-0.6	1.10 H	8	11.74	41.66
9	7311.00	54.8 PK	74.0	-19.2	1.10 H	40	8.66	46.14
10	7311.00	43.4 AV	54.0	-10.6	1.10 H	40	-2.74	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	57.2 PK	74.0	-16.8	1.10 V	94	25.28	31.92
2	2310.00	45.7 AV	54.0	-8.3	1.10 V	94	13.78	31.92
3	*2437.00	103.1 PK			1.10 V	94	70.79	32.31
4	*2437.00	100.2 AV			1.10 V	94	67.89	32.31
5	2483.50	58.1 PK	74.0	-15.9	1.10 V	94	25.67	32.43
6	2483.50	45.1 AV	54.0	-8.9	1.10 V	94	12.67	32.43
7	4874.00	56.1 PK	74.0	-17.9	1.32 V	325	14.44	41.66
8	4874.00	52.9 AV	54.0	-1.1	1.32 V	325	11.24	41.66
9	7311.00	55.4 PK	74.0	-18.6	1.00 V	162	9.26	46.14
10	7311.00	43.1 AV	54.0	-10.9	1.00 V	162	-3.04	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.3 PK			1.00 H	21	69.93	32.37
2	*2462.00	99.6 AV			1.00 H	21	67.23	32.37
3	2483.50	57.7 PK	74.0	-16.3	1.00 H	21	25.27	32.43
4	2483.50	46.5 AV	54.0	-7.5	1.00 H	21	14.07	32.43
5	4924.00	56.2 PK	74.0	-17.8	1.35 H	317	14.50	41.70
6	4924.00	53.3 AV	54.0	-0.7	1.35 H	317	11.60	41.70
7	7386.00	54.6 PK	74.0	-19.4	1.15 H	25	8.27	46.33
8	7386.00	43.2 AV	54.0	-10.8	1.15 H	25	-3.13	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.6 PK			1.08 V	94	71.23	32.37
2	*2462.00	100.7 AV			1.08 V	94	68.33	32.37
3	2483.50	57.6 PK	74.0	-16.4	1.08 V	94	25.17	32.43
4	2483.50	46.2 AV	54.0	-7.8	1.08 V	94	13.77	32.43
5	4924.00	56.1 PK	74.0	-17.9	1.30 V	323	14.40	41.70
6	4924.00	52.9 AV	54.0	-1.1	1.30 V	323	11.20	41.70
7	7386.00	55.1 PK	74.0	-18.9	1.00 V	153	8.77	46.33
8	7386.00	42.9 AV	54.0	-11.1	1.00 V	153	-3.43	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.02 H	20	34.71	32.19
2	2390.00	52.8 AV	54.0	-1.2	1.02 H	20	20.61	32.19
3	*2412.00	105.6 PK			1.02 H	20	73.35	32.25
4	*2412.00	92.0 AV			1.02 H	20	59.75	32.25
5	4824.00	61.8 PK	74.0	-12.2	1.10 H	10	20.23	41.57
6	4824.00	47.5 AV	54.0	-6.5	1.10 H	10	5.93	41.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.09 V	94	35.61	32.19
2	2390.00	53.1 AV	54.0	-0.9	1.09 V	94	20.91	32.19
3	*2412.00	106.1 PK			1.09 V	94	73.85	32.25
4	*2412.00	92.1 AV			1.09 V	94	59.85	32.25
5	4824.00	61.5 PK	74.0	-12.5	1.00 V	60	19.93	41.57
6	4824.00	47.3 AV	54.0	-6.7	1.00 V	60	5.73	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2384.00	60.8 PK	74.0	-13.2	1.02 H	21	28.63	32.17
2	2384.00	49.2 AV	54.0	-4.8	1.02 H	21	17.03	32.17
3	2389.00	62.9 PK	74.0	-11.1	1.02 H	21	30.72	32.18
4	2389.00	49.6 AV	54.0	-4.4	1.02 H	21	17.42	32.18
5	*2437.00	109.8 PK			1.02 H	21	77.49	32.31
6	*2437.00	95.9 AV			1.02 H	21	63.59	32.31
7	4874.00	62.1 PK	74.0	-11.9	1.10 H	8	20.44	41.66
8	4874.00	47.7 AV	54.0	-6.3	1.10 H	8	6.04	41.66
9	7311.00	56.3 PK	74.0	-17.7	1.10 H	44	10.16	46.14
10	7311.00	43.3 AV	54.0	-10.7	1.10 H	44	-2.84	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2384.00	62.5 PK	74.0	-11.5	1.09 V	94	30.33	32.17
2	2384.00	46.3 AV	54.0	-7.7	1.09 V	94	14.13	32.17
3	2389.00	61.4 PK	74.0	-12.6	1.09 V	94	29.22	32.18
4	2389.00	49.7 AV	54.0	-4.3	1.09 V	94	17.52	32.18
5	*2437.00	109.8 PK			1.09 V	94	77.49	32.31
6	*2437.00	95.9 AV			1.09 V	94	63.59	32.31
7	4874.00	61.8 PK	74.0	-12.2	1.00 V	54	20.14	41.66
8	4874.00	47.5 AV	54.0	-6.5	1.00 V	54	5.84	41.66
9	7311.00	56.1 PK	74.0	-17.9	1.00 V	215	9.96	46.14
10	7311.00	43.1 AV	54.0	-10.9	1.00 V	215	-3.04	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.7 PK			1.01 H	20	73.33	32.37
2	*2462.00	91.5 AV			1.01 H	20	59.13	32.37
3	2483.50	70.5 PK	74.0	-3.5	1.01 H	20	38.07	32.43
4	2483.50	52.9 AV	54.0	-1.1	1.01 H	20	20.47	32.43
5	4924.00	62.1 PK	74.0	-11.9	1.10 H	8	20.40	41.70
6	4924.00	47.7 AV	54.0	-6.3	1.10 H	8	6.00	41.70
7	7386.00	56.3 PK	74.0	-17.7	1.09 H	43	9.97	46.33
8	7386.00	43.1 AV	54.0	-10.9	1.09 H	43	-3.23	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.5 PK			1.09 V	95	74.13	32.37
2	*2462.00	92.4 AV			1.09 V	95	60.03	32.37
3	2483.50	70.9 PK	74.0	-3.1	1.08 V	94	38.47	32.43
4	2483.50	53.4 AV	54.0	-0.6	1.08 V	94	20.97	32.43
5	4924.00	61.9 PK	74.0	-12.1	1.00 V	58	20.20	41.70
6	4924.00	47.6 AV	54.0	-6.4	1.00 V	58	5.90	41.70
7	7386.00	55.9 PK	74.0	-18.1	1.00 V	216	9.57	46.33
8	7386.00	42.9 AV	54.0	-11.1	1.00 V	216	-3.43	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.02 H	21	35.71	32.19
2	2390.00	53.3 AV	54.0	-0.7	1.02 H	21	21.11	32.19
3	*2412.00	105.3 PK			1.02 H	21	73.05	32.25
4	*2412.00	91.7 AV			1.02 H	21	59.45	32.25
5	4824.00	61.9 PK	74.0	-12.1	1.08 H	15	20.33	41.57
6	4824.00	47.5 AV	54.0	-6.5	1.08 H	15	5.93	41.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.10 V	96	36.11	32.19
2	2390.00	53.5 AV	54.0	-0.5	1.10 V	96	21.31	32.19
3	*2412.00	105.0 PK			1.10 V	96	72.75	32.25
4	*2412.00	91.4 AV			1.10 V	96	59.15	32.25
5	4824.00	61.7 PK	74.0	-12.3	1.00 V	52	20.13	41.57
6	4824.00	47.4 AV	54.0	-6.6	1.00 V	52	5.83	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2384.00	62.8 PK	74.0	-11.2	1.02 H	20	30.63	32.17
2	2384.00	49.3 AV	54.0	-4.7	1.02 H	20	17.13	32.17
3	*2437.00	109.6 PK			1.02 H	20	77.29	32.31
4	*2437.00	92.7 AV			1.02 H	20	60.39	32.31
5	2488.00	62.2 PK	74.0	-11.8	1.02 H	20	29.76	32.44
6	2488.00	50.2 AV	54.0	-3.8	1.02 H	20	17.76	32.44
7	4874.00	61.9 PK	74.0	-12.1	1.08 H	34	20.24	41.66
8	4874.00	47.8 AV	54.0	-6.2	1.08 H	34	6.14	41.66
9	7311.00	56.4 PK	74.0	-17.6	1.10 H	45	10.26	46.14
10	7311.00	43.2 AV	54.0	-10.8	1.10 H	45	-2.94	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2384.00	63.9 PK	74.0	-10.1	1.09 V	94	31.73	32.17
2	2384.00	49.9 AV	54.0	-4.1	1.09 V	94	17.73	32.17
3	*2437.00	109.5 PK			1.09 V	94	77.19	32.31
4	*2437.00	95.4 AV			1.09 V	94	63.09	32.31
5	2488.00	64.3 PK	74.0	-9.7	1.09 V	94	31.86	32.44
6	2488.00	50.0 AV	54.0	-4.0	1.09 V	94	17.56	32.44
7	4874.00	61.9 PK	74.0	-12.1	1.00 V	58	20.24	41.66
8	4874.00	47.6 AV	54.0	-6.4	1.00 V	58	5.94	41.66
9	7311.00	56.2 PK	74.0	-17.8	1.00 V	213	10.06	46.14
10	7311.00	43.3 AV	54.0	-10.7	1.00 V	213	-2.84	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.7 PK			1.00 H	21	71.33	32.37
2	*2462.00	90.5 AV			1.00 H	21	58.13	32.37
3	2483.50	71.8 PK	74.0	-2.2	1.00 H	21	39.37	32.43
4	2483.50	53.4 AV	54.0	-0.6	1.00 H	21	20.97	32.43
5	4924.00	61.9 PK	74.0	-12.1	1.08 H	34	20.20	41.70
6	4924.00	47.8 AV	54.0	-6.2	1.08 H	34	6.10	41.70
7	7386.00	56.4 PK	74.0	-17.6	1.10 H	45	10.07	46.33
8	7386.00	43.2 AV	54.0	-10.8	1.10 H	45	-3.13	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.6 PK			1.08 V	92	72.23	32.37
2	*2462.00	91.2 AV			1.08 V	92	58.83	32.37
3	2483.50	72.1 PK	74.0	-1.9	1.08 V	92	39.67	32.43
4	2483.50	53.5 AV	54.0	-0.5	1.08 V	92	21.07	32.43
5	4924.00	61.9 PK	74.0	-12.1	1.00 V	58	20.20	41.70
6	4924.00	47.6 AV	54.0	-6.4	1.00 V	58	5.90	41.70
7	7386.00	56.2 PK	74.0	-17.8	1.00 V	213	9.87	46.33
8	7386.00	43.3 AV	54.0	-10.7	1.00 V	213	-3.03	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.01 H	22	36.51	32.19
2	2390.00	53.1 AV	54.0	-0.9	1.01 H	22	20.91	32.19
3	*2422.00	99.7 PK			1.01 H	22	67.43	32.27
4	*2422.00	84.3 AV			1.01 H	22	52.03	32.27
5	4844.00	62.1 PK	74.0	-11.9	1.10 H	45	20.49	41.61
6	4844.00	47.6 AV	54.0	-6.4	1.10 H	45	5.99	41.61
7	7266.00	56.3 PK	74.0	-17.7	1.09 H	54	10.28	46.02
8	7266.00	43.4 AV	54.0	-10.6	1.09 H	54	-2.62	46.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.09 V	94	37.71	32.19
2	2390.00	53.1 AV	54.0	-0.9	1.09 V	94	20.91	32.19
3	*2422.00	100.1 PK			1.09 V	94	67.83	32.27
4	*2422.00	84.6 AV			1.09 V	94	52.33	32.27
5	4844.00	62.1 PK	74.0	-11.9	1.00 V	58	20.49	41.61
6	4844.00	47.8 AV	54.0	-6.2	1.00 V	58	6.19	41.61
7	7266.00	56.3 PK	74.0	-17.7	1.00 V	211	10.28	46.02
8	7266.00	43.5 AV	54.0	-10.5	1.00 V	211	-2.52	46.02

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.00 H	22	35.61	32.19
2	2390.00	51.6 AV	54.0	-2.4	1.00 H	22	19.41	32.19
3	*2437.00	103.1 PK			1.00 H	25	70.79	32.31
4	*2437.00	86.6 AV			1.00 H	25	54.29	32.31
5	2483.50	68.7 PK	74.0	-5.3	1.05 H	85	36.27	32.43
6	2483.50	52.7 AV	54.0	-1.3	1.05 H	85	20.27	32.43
7	4874.00	62.1 PK	74.0	-11.9	1.10 H	45	20.44	41.66
8	4874.00	47.6 AV	54.0	-6.4	1.10 H	45	5.94	41.66
9	7311.00	56.3 PK	74.0	-17.7	1.09 H	54	10.16	46.14
10	7311.00	43.4 AV	54.0	-10.6	1.09 H	54	-2.74	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.09 V	94	36.11	32.19
2	2390.00	52.0 AV	54.0	-2.0	1.09 V	94	19.81	32.19
3	*2437.00	103.7 PK			1.09 V	94	71.39	32.31
4	*2437.00	87.2 AV			1.09 V	94	54.89	32.31
5	2483.50	70.6 PK	74.0	-3.4	1.09 V	94	38.17	32.43
6	2483.50	53.2 AV	54.0	-0.8	1.09 V	94	20.77	32.43
7	4874.00	62.5 PK	74.0	-11.5	1.00 V	58	20.84	41.66
8	4874.00	48.1 AV	54.0	-5.9	1.00 V	58	6.44	41.66
9	7311.00	56.7 PK	74.0	-17.3	1.00 V	200	10.56	46.14
10	7311.00	43.7 AV	54.0	-10.3	1.00 V	200	-2.44	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.8 PK			1.01 H	19	66.45	32.35
2	*2452.00	83.5 AV			1.01 H	19	51.15	32.35
3	2483.50	70.2 PK	74.0	-3.8	1.01 H	19	37.77	32.43
4	2483.50	52.7 AV	54.0	-1.3	1.01 H	19	20.27	32.43
5	4904.00	61.8 PK	74.0	-12.2	1.10 H	58	20.09	41.71
6	4904.00	47.1 AV	54.0	-6.9	1.10 H	58	5.39	41.71
7	7356.00	56.3 PK	74.0	-17.7	1.09 H	46	10.04	46.26
8	7356.00	43.4 AV	54.0	-10.6	1.09 H	46	-2.86	46.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.3 PK			1.08 V	94	66.95	32.35
2	*2452.00	83.9 AV			1.08 V	94	51.55	32.35
3	2483.50	70.6 PK	74.0	-3.4	1.08 V	94	38.17	32.43
4	2483.50	52.5 AV	54.0	-1.5	1.08 V	94	20.07	32.43
5	4904.00	62.1 PK	74.0	-11.9	1.00 V	48	20.39	41.71
6	4904.00	47.8 AV	54.0	-6.2	1.00 V	48	6.09	41.71
7	7356.00	56.4 PK	74.0	-17.6	1.00 V	195	10.14	46.26
8	7356.00	43.2 AV	54.0	-10.8	1.00 V	195	-3.06	46.26

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date :Jan. 25, 2013


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	11.29	0.5	PASS
6	2437	11.25	0.5	PASS
11	2462	11.28	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.72	0.5	PASS
6	2437	16.08	0.5	PASS
11	2462	16.31	0.5	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.81	0.5	PASS
6	2437	15.82	0.5	PASS
11	2462	15.80	0.5	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.23	0.5	PASS
6	2437	35.31	0.5	PASS
9	2452	35.31	0.5	PASS



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Peak Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date :Jan. 25, 2013


4.4.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

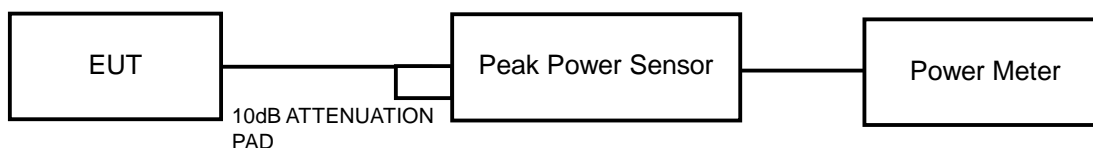



A D T

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	60.256	17.8	30	PASS
6	2437	64.565	18.1	30	PASS
11	2462	74.131	18.7	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	186.209	22.7	30	PASS
6	2437	234.423	23.7	30	PASS
11	2462	165.959	22.2	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	173.780	22.4	30	PASS
6	2437	229.087	23.6	30	PASS
11	2462	144.544	21.6	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	104.713	20.2	30	PASS
6	2437	173.780	22.4	30	PASS
9	2452	95.499	19.8	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date :Jan. 25, 2013


4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-10.70	8	PASS
6	2437	-10.02	8	PASS
11	2462	-10.45	8	PASS

802.11g

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.30	8	PASS
6	2437	-8.40	8	PASS
11	2462	-11.10	8	PASS

802.11n (HT20)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-10.50	8	PASS
6	2437	-8.17	8	PASS
11	2462	-10.43	8	PASS

802.11n (HT40)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-14.75	8	PASS
6	2437	-10.97	8	PASS
9	2452	-15.15	8	PASS



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date :Jan. 25, 2013

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

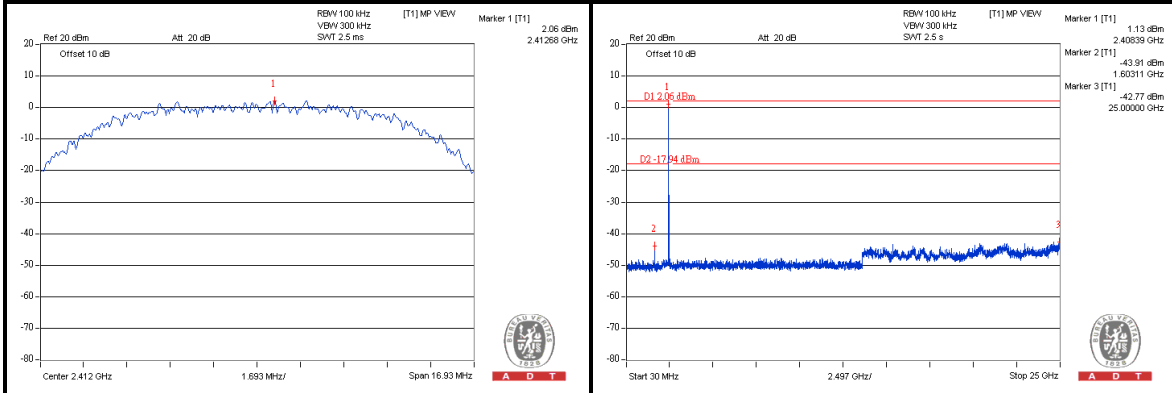

CH 6

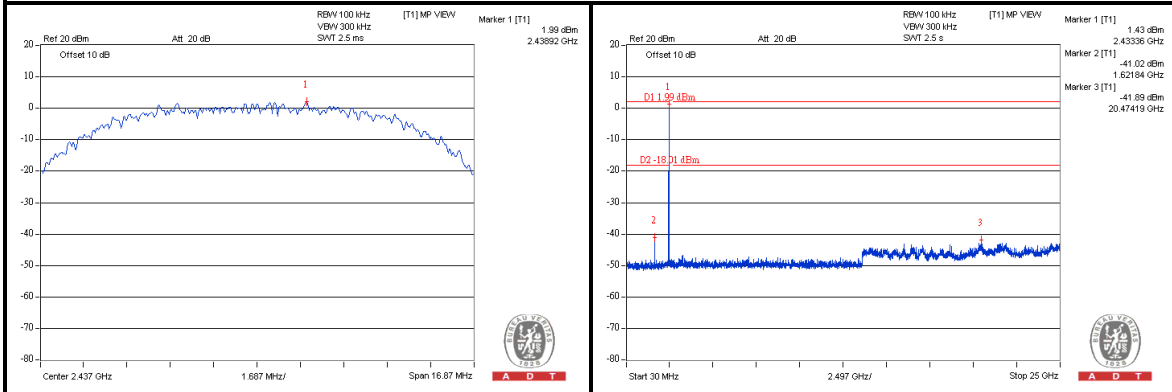

CH 11


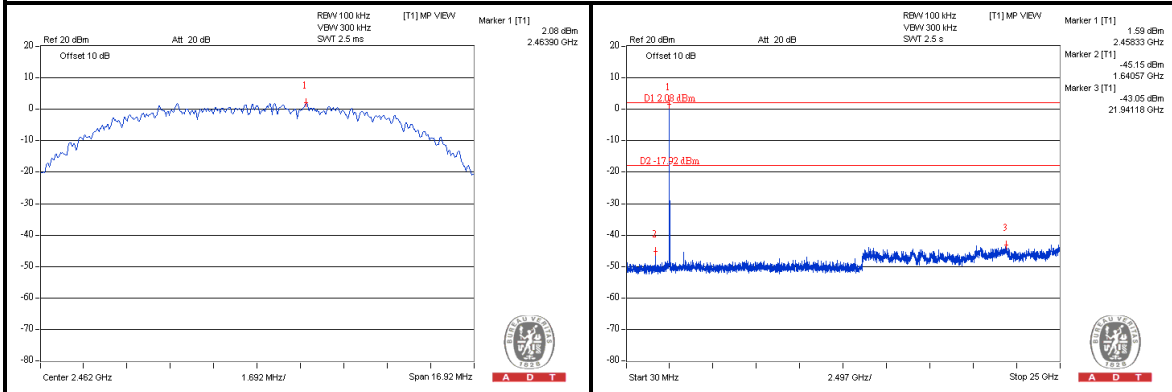






A D T

802.11g



CH 1

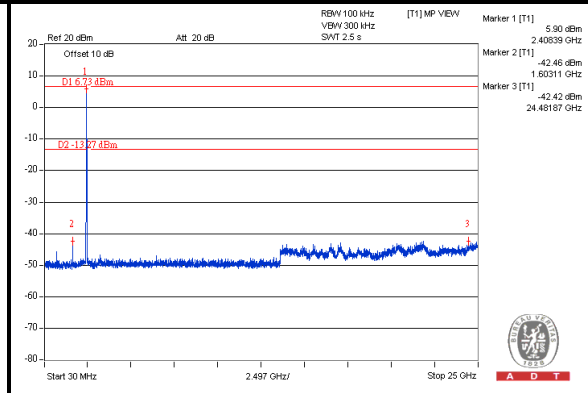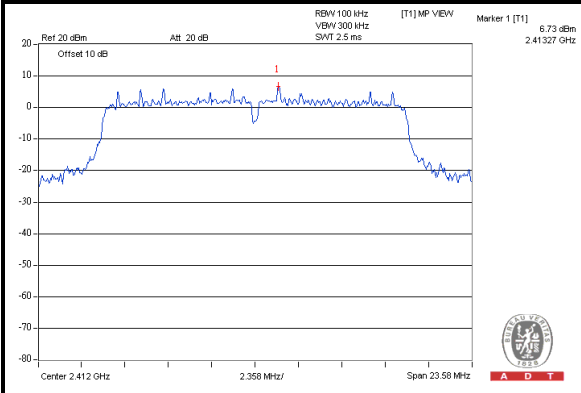

CH 6

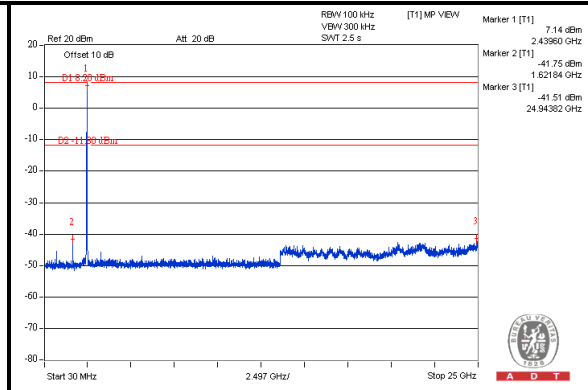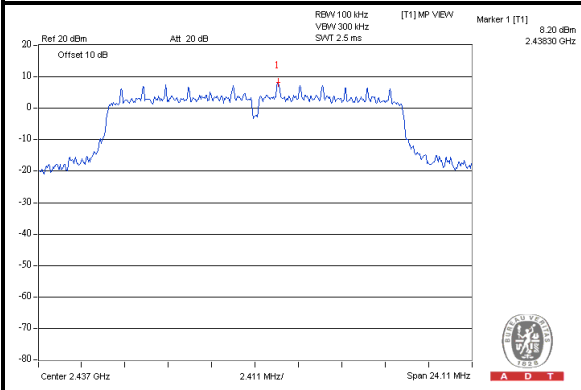

CH 11

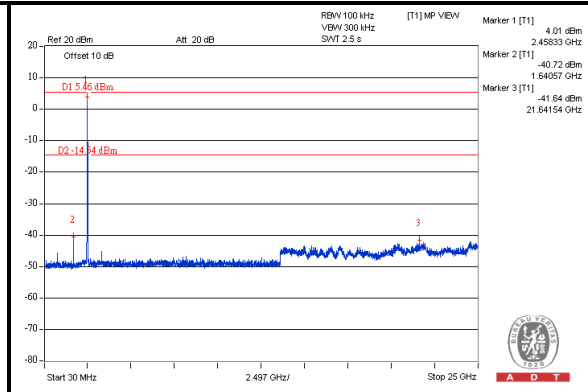
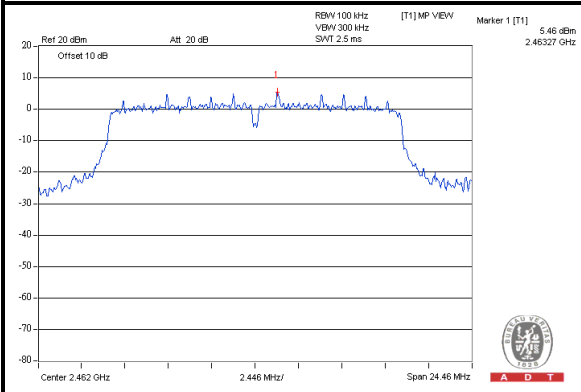






A D T

802.11n (HT20)



CH 1

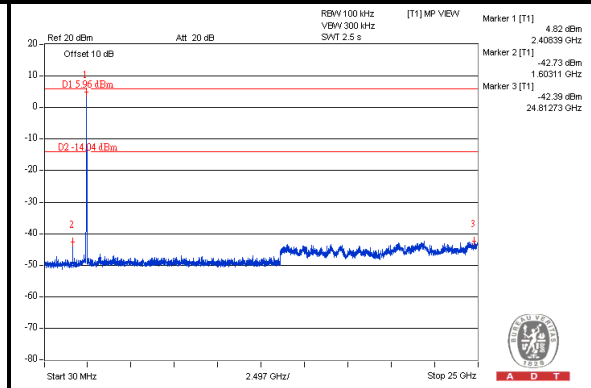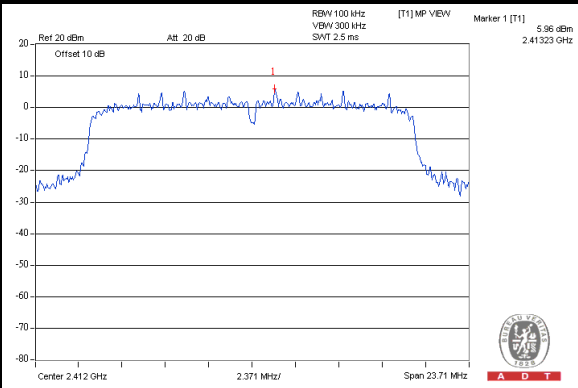

CH 6

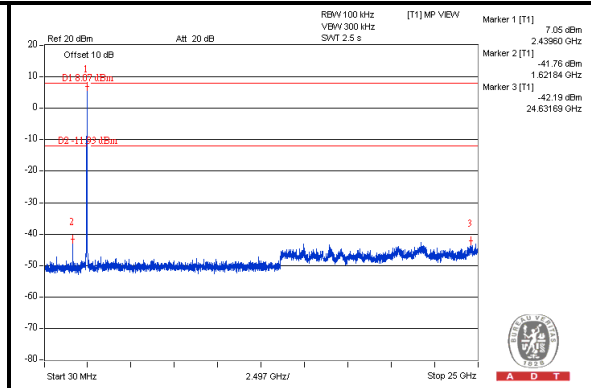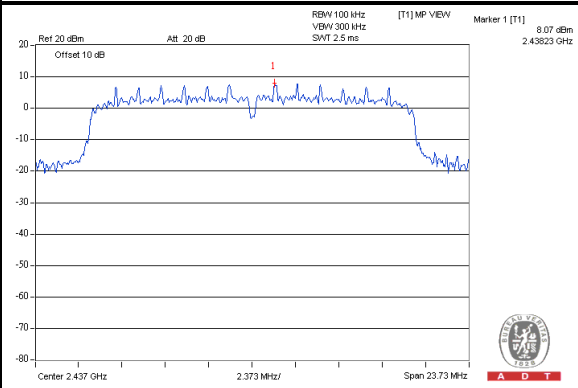

CH 11

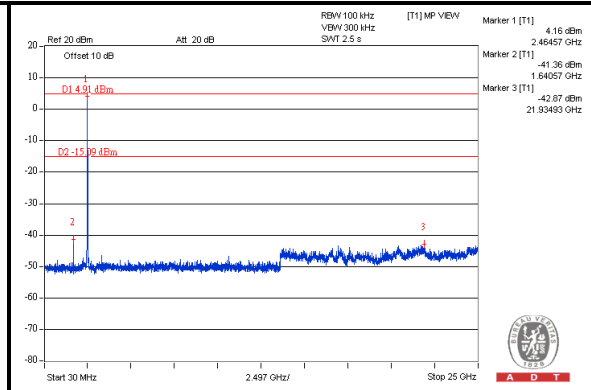
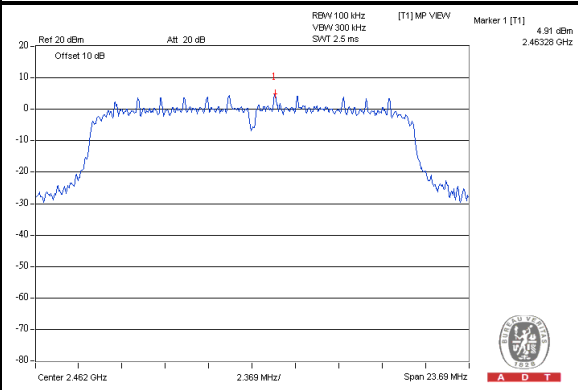






A D T

802.11n (HT40)



CH 3

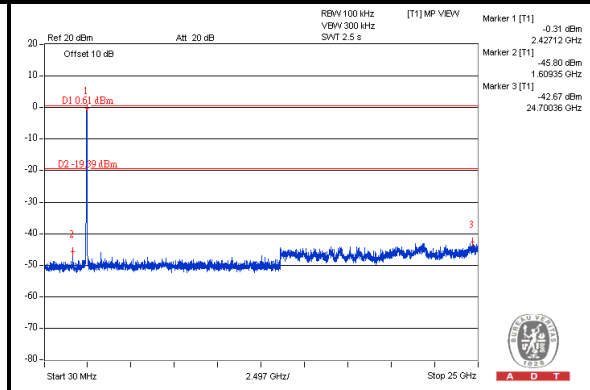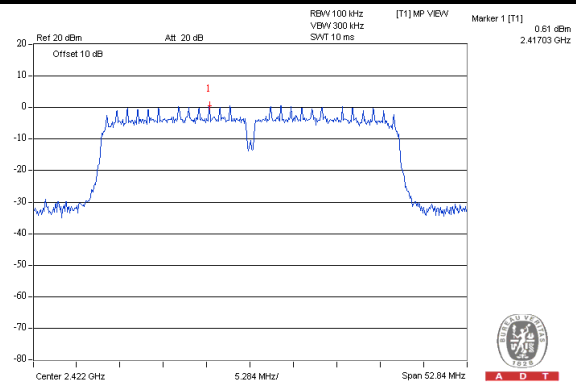

CH 6

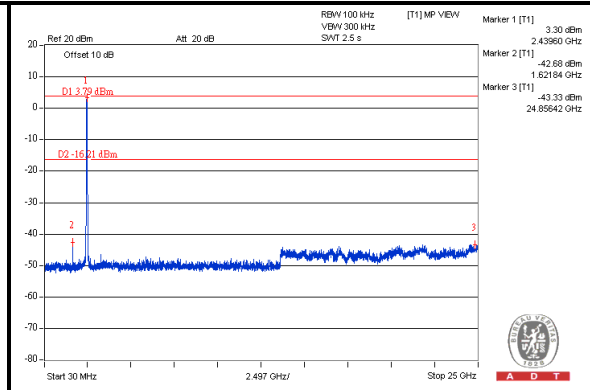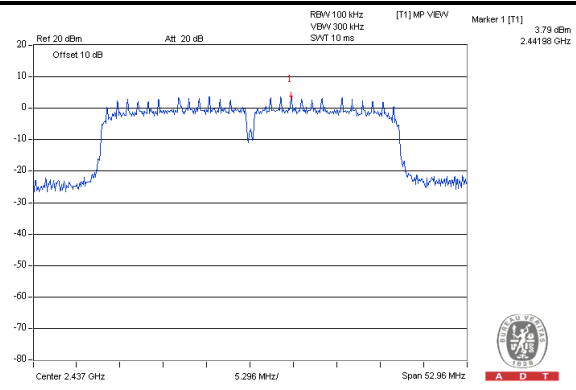

CH 9

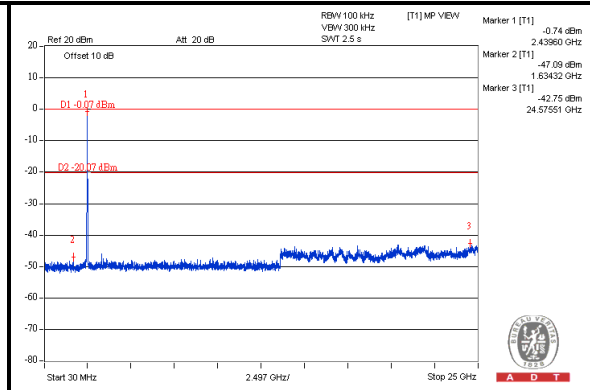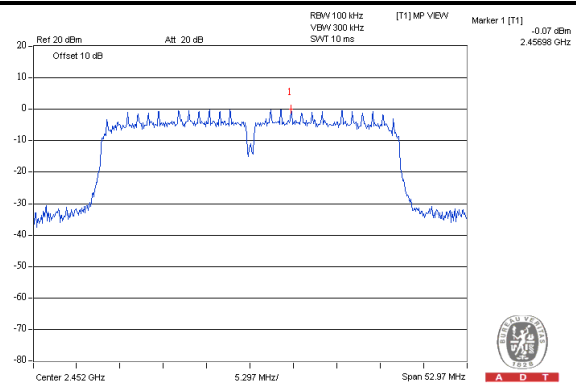



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---