



FCC TEST REPORT (15.247)

REPORT NO.: RF970630L13

MODEL NO.: DIR-825

RECEIVED: Jun. 03, 2008

TESTED: Jul. 03 ~ Jul. 15, 2008

ISSUED: Jul. 21, 2008

APPLICANT: D-Link Corporation

ADDRESS: 17595 Mt. Herrmann, Fountain Valley, CA
92708, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Linko Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 171 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

| | | |
|-------|---|----|
| 1. | CERTIFICATION..... | 6 |
| 2. | SUMMARY OF TEST RESULTS | 7 |
| 2.1 | MEASUREMENT UNCERTAINTY | 7 |
| 3. | GENERAL INFORMATION..... | 8 |
| 3.1 | GENERAL DESCRIPTION OF EUT | 8 |
| 3.2 | DESCRIPTION OF TEST MODES | 10 |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST | 11 |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 12 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 16 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS | 16 |
| 4. | TEST TYPES AND RESULTS (FOR 2.4GHz BAND)..... | 17 |
| 4.1 | RADIATED EMISSION MEASUREMENT | 17 |
| 4.1.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 17 |
| 4.1.2 | TEST INSTRUMENTS..... | 18 |
| 4.1.3 | TEST PROCEDURES | 19 |
| 4.1.4 | DEVIATION FROM TEST STANDARD..... | 19 |
| 4.1.5 | TEST SETUP | 20 |
| 4.1.6 | EUT OPERATING CONDITIONS | 20 |
| 4.1.7 | TEST RESULTS | 21 |
| 4.2 | CONDUCTED EMISSION MEASUREMENT | 34 |
| 4.2.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT | 34 |
| 4.2.2 | TEST INSTRUMENTS..... | 34 |
| 4.2.3 | TEST PROCEDURES | 35 |
| 4.2.4 | DEVIATION FROM TEST STANDARD..... | 35 |
| 4.2.5 | TEST SETUP | 36 |
| 4.2.6 | EUT OPERATING CONDITIONS | 36 |
| 4.2.7 | TEST RESULTS | 37 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT..... | 39 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 39 |
| 4.3.2 | TEST INSTRUMENTS..... | 39 |
| 4.3.3 | TEST PROCEDURE..... | 39 |
| 4.3.4 | DEVIATION FROM TEST STANDARD..... | 39 |
| 4.3.5 | TEST SETUP | 40 |
| 4.3.6 | EUT OPERATING CONDITIONS | 40 |
| 4.3.7 | TEST RESULTS | 41 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER..... | 53 |



| | | |
|-------|---|-----|
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 53 |
| 4.4.2 | INSTRUMENTS | 53 |
| 4.4.3 | TEST PROCEDURES | 53 |
| 4.4.4 | DEVIATION FROM TEST STANDARD..... | 54 |
| 4.4.5 | TEST SETUP | 54 |
| 4.4.6 | EUT OPERATING CONDITIONS | 54 |
| 4.4.7 | TEST RESULTS | 55 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT | 57 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 57 |
| 4.5.2 | TEST INSTRUMENTS..... | 57 |
| 4.5.3 | TEST PROCEDURE..... | 57 |
| 4.5.4 | DEVIATION FROM TEST STANDARD..... | 58 |
| 4.5.5 | TEST SETUP..... | 58 |
| 4.5.6 | EUT OPERATING CONDITION..... | 58 |
| 4.5.7 | TEST RESULTS | 59 |
| 4.6 | BAND EDGES MEASUREMENT | 71 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 71 |
| 4.6.2 | TEST INSTRUMENTS..... | 71 |
| 4.6.3 | TEST PROCEDURE..... | 72 |
| 4.6.4 | DEVIATION FROM TEST STANDARD..... | 73 |
| 4.6.5 | EUT OPERATING CONDITION..... | 73 |
| 4.6.6 | TEST RESULTS | 74 |
| 4.7 | ANTENNA REQUIREMENT | 90 |
| 4.7.1 | STANDARD APPLICABLE | 90 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION | 90 |
| 5. | TEST TYPES AND RESULTS (FOR 5.0GHz BAND) | 91 |
| 5.1 | RADIATED EMISSION MEASUREMENT | 91 |
| 5.1.1 | LIMITS OF RADIATED EMISSION MEASUREMENT..... | 91 |
| 5.1.2 | TEST INSTRUMENTS..... | 92 |
| 5.1.3 | TEST PROCEDURES | 93 |
| 5.1.4 | DEVIATION FROM TEST STANDARD..... | 93 |
| 5.1.5 | TEST SETUP | 94 |
| 5.1.6 | EUT OPERATING CONDITIONS | 94 |
| 5.1.7 | TEST RESULTS | 95 |
| 5.2 | CONDUCTED EMISSION MEASUREMENT | 104 |
| 5.2.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT | 104 |
| 5.2.2 | TEST INSTRUMENTS..... | 104 |
| 5.2.3 | TEST PROCEDURES | 105 |
| 5.2.4 | DEVIATION FROM TEST STANDARD..... | 105 |



| | | |
|-------|---|-----|
| 5.2.5 | TEST SETUP | 106 |
| 5.2.6 | EUT OPERATING CONDITIONS | 106 |
| 5.2.7 | TEST RESULTS | 107 |
| 5.3 | 6dB BANDWIDTH MEASUREMENT | 109 |
| 5.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 109 |
| 5.3.2 | TEST INSTRUMENTS..... | 109 |
| 5.3.3 | TEST PROCEDURE..... | 109 |
| 5.3.4 | DEVIATION FROM TEST STANDARD..... | 110 |
| 5.3.5 | TEST SETUP | 110 |
| 5.3.6 | EUT OPERATING CONDITIONS | 110 |
| 5.3.7 | TEST RESULTS | 111 |
| 5.4 | MAXIMUM PEAK OUTPUT POWER..... | 120 |
| 5.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 120 |
| 5.4.2 | INSTRUMENTS..... | 120 |
| 5.4.3 | TEST PROCEDURES | 120 |
| 5.4.4 | DEVIATION FROM TEST STANDARD..... | 121 |
| 5.4.5 | TEST SETUP | 121 |
| 5.4.6 | EUT OPERATING CONDITIONS | 121 |
| 5.4.7 | TEST RESULTS | 122 |
| 5.5 | POWER SPECTRAL DENSITY MEASUREMENT | 124 |
| 5.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 124 |
| 5.5.2 | TEST INSTRUMENTS..... | 124 |
| 5.5.3 | TEST PROCEDURE..... | 124 |
| 5.5.4 | DEVIATION FROM TEST STANDARD..... | 125 |
| 5.5.5 | TEST SETUP | 125 |
| 5.5.6 | EUT OPERATING CONDITION..... | 125 |
| 5.5.7 | TEST RESULTS | 126 |
| 5.6 | BAND EDGES MEASUREMENT | 135 |
| 5.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 135 |
| 5.6.2 | TEST INSTRUMENTS..... | 135 |
| 5.6.3 | TEST PROCEDURE..... | 136 |
| 5.6.4 | DEVIATION FROM TEST STANDARD..... | 137 |
| 5.6.5 | EUT OPERATING CONDITION..... | 137 |
| 5.6.6 | TEST RESULTS | 137 |
| 5.7 | ANTENNA REQUIREMENT | 147 |
| 5.7.1 | STANDARD APPLICABLE | 147 |
| 5.7.2 | ANTENNA CONNECTED CONSTRUCTION | 147 |
| 6. | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 148 |
| 7. | INFORMATION ON THE TESTING LABORATORIES | 149 |



| | | |
|-------|---|-----|
| 8. | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 150 |
| 9. | APPENDIX B - CO-LOCATED..... | 151 |
| 9.1 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 151 |
| 9.2 | TEST RESULTS | 154 |
| 9.2.1 | RADIATED EMISSION MEASUREMENT (ABOVE 1GHz) | 154 |
| 9.2.2 | RADIATED EMISSION MEASUREMENT (BELOW 1GHz)..... | 158 |
| 9.2.3 | CONDUCTED EMISSION MEASUREMENT | 162 |
| 9.2.4 | OUT BAND EMISSION..... | 170 |



1. CERTIFICATION

PRODUCT: Xtreme N Dual Band Router

MODEL: DIR-825

BRAND: D-Link

APPLICANT: D-Link Corporation


TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Jul. 03 ~ Jul. 15, 2008

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: DIR-825) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Jul. 21, 2008
Joanna Wang / Senior Specialist

TECHNICAL ACCEPTANCE :  , **DATE** : Jul. 21, 2008
Responsible for RF Long Chen / Senior Engineer

APPROVED BY :  , **DATE** : Jul. 21, 2008
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) | | | |
|---|--|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -10.40dB at 0.390MHz |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -1.06dB at 2483.500MHz |
| 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.44dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.34 dB |
| | 200MHz ~1000MHz | 3.35 dB |
| | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|--|
| EUT | Xtreme N Dual Band Router |
| MODEL NO. | DIR-825 |
| FCC ID | KA2DIR825A1 |
| POWER SUPPLY | 12Vdc from AC adapter |
| MODULATION TYPE | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM |
| MODULATION TECHNOLOGY | DSSS, OFDM |
| TRANSFER RATE | 802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps |
| FREQUENCY RANGE | 2.4GHz: 2400.0 ~ 2483.5MHz 5.0GHz: 5150.0 ~ 5250.0MHz, 5725.0 ~ 5825.0MHz |
| NUMBER OF CHANNEL | 2.4GHz: 11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz) 5.0GHz: 9 for 802.11a, draft 802.11n (20MHz) 4 for draft 802.11n (40MHz) |
| OUTPUT POWER | 113.778mW for 2400.0 ~ 2483.5MHz 32.399mW for 5150.0 ~ 5250.0MHz 87.046mW for 5725.0 ~ 5825.0MHz |
| ANTENNA TYPE | 2.4GHz: Dipole antenna with 2.0dBi gain 5.0GHz: Dipole antenna with 2.0dBi gain |
| DATA CABLE | NA |
| I/O PORTS | RJ45, USB |
| ASSOCIATED DEVICES | Adapter |

NOTE:

- The EUT is a Xtreme N Dual Band Router. The functions of EUT listed as below:

| | TEST STANDARD | REFERENCE REPORT |
|--|--|------------------|
| WLAN 802.11b/g, draft 802.11n | FCC Part 15, Subpart C (Section 15.247) | RF970630L13 |
| WLAN 802.11a, draft 802.11n (5725~5825 MHz) | | |
| WLAN 802.11a, draft 802.11n (5150~ 5250MHz) | FCC Part 15, Subpart E (Section 15.407) | RF970630L13-1 |

2. The frequency bands used in this EUT are listed as follows:

| Frequency Band (MHz) | 2400~2483.5 | 5150~5250 | 5725~5825 |
|-----------------------|-------------|-----------|-----------|
| 802.11b | √ | | |
| 802.11g | √ | | |
| 802.11a | | √ | √ |
| Draft 802.11n (20MHz) | √ | √ | √ |
| Draft 802.11n (40MHz) | √ | √ | √ |

3. The EUT was powered by the following adapter:

| | |
|--------------------|--------------------------------------|
| BRAND: | D-Link |
| MODEL: | AG2412-B |
| INPUT: | 100-240Vac, 50-60Hz, 0.5A |
| OUTPUT: | 12Vdc, 2A |
| POWER LINE: | 1.8m non-shielded cable without core |

4. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

| MODULATION MODE | TX FUNCTION |
|-----------------------|-------------|
| 802.11b | 1TX |
| 802.11g | 1TX |
| 802.11a | 1TX |
| Draft 802.11n (20MHz) | 2TX |
| Draft 802.11n (40MHz) | 2TX |

5. The EUT with following module cards:

| ITEM | MODULE CARDS |
|------|---|
| A | With 802.11b, 802.11g, and 802.11n function |
| B | With 802.11a, 802.11b, 802.11g and 802.11n function |

**For the module cards B, all the function of 2.4GHz will be closed by software.

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

7 channels are provided for draft 802.11n (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2422MHz | 5 | 2442MHz |
| 2 | 2427MHz | 6 | 2447MHz |
| 3 | 2432MHz | 7 | 2452MHz |
| 4 | 2437MHz | | |

FOR 5.0GHz (5725 ~ 5825MHz):


5 channels are provided for 802.11a, draft 802.11n (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 149 | 5745MHz | 161 | 5805MHz |
| 153 | 5765MHz | 165 | 5825MHz |
| 157 | 5785MHz | | |

2 channels are provided for draft 802.11n (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 151 | 5755MHz | 159 | 5795MHz |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

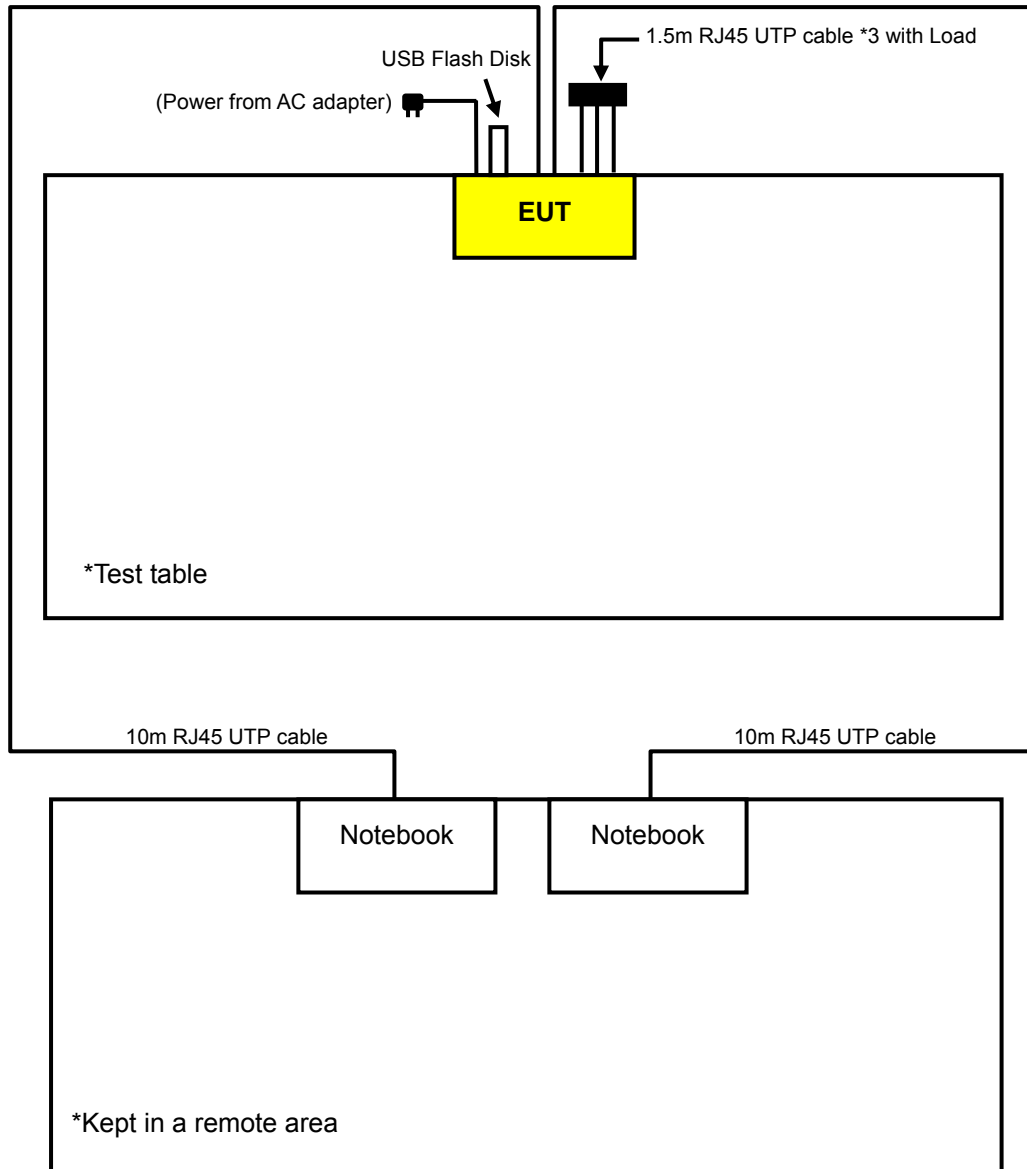

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.400 ~ 2.4835GHz:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|------|-------------|
| | RE≥1G | RE<1G | PLC | APCM | |
| - | √ | √ | √ | √ | - |

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 15.0 |

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11g | 1 to 11 | 6 | OFDM | BPSK | 6.0 |

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11g | 1 to 11 | 6 | OFDM | BPSK | 6.0 |

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 11 | DSSS | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 11 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 11 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 7 | OFDM | BPSK | 15.0 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 15.0 |

FOR 5.725 ~ 5.825GHz:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-------|------|-------------|
| | PLC | RE<1G | RE≥1G | APCM | |
| - | √ | √ | √ | √ | - |

Where **PLC:** Power Line Conducted Emission **RE<1G:** Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM:** Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 149 to 165 | 149, 157, 165 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 149 to 165 | 149, 157, 165 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 151 to 159 | 151, 159 | OFDM | BPSK | 15.0 |

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 149 to 165 | 165 | OFDM | BPSK | 6.0 |

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 149 to 165 | 165 | OFDM | BPSK | 6.0 |

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 149 to 165 | 149, 165 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 149 to 165 | 149, 165 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 151 to 159 | 151, 159 | OFDM | BPSK | 15.0 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11a | 149 to 165 | 149, 157, 165 | OFDM | BPSK | 6.0 |
| Draft 802.11n (20MHz) | 149 to 165 | 149, 157, 165 | OFDM | BPSK | 7.2 |
| Draft 802.11n (40MHz) | 151 to 159 | 151, 159 | OFDM | BPSK | 15.0 |

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|-------|-----------|--------------------------|------------------|
| 1 | NOTEBOOK COMPUTER | DELL | PP05L | 12130898320 | E2K24CLNS |
| 2 | NOTEBOOK COMPUTER | DELL | D600 | CN-0G5152-48643-47H-7666 | FCC DoC Approved |
| 3 | USB FLASH DISK | NA | NA | NA | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | 10m RJ45 UTP cable |
| 2 | 10m RJ45 UTP cable |
| 3 | NA |

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1~2 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS (FOR 2.4GHZ BAND)

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-------------------|-------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 100033 | Jun. 29, 2009 |
| Spectrum Analyzer Agilent | FSP | 100041 | Apr. 21, 2009 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | May 01, 2009 |
| HORN Antenna SCHWARZBECK | 9120D | 9120D-209 | Jun. 23, 2009 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Dec. 24, 2008 |
| Preamplifier Agilent | 8447D | 2944A10633 | Oct. 28, 2008 |
| Preamplifier Agilent | 8449B | 3008A01964 | Oct. 23, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 283402/4 | Dec. 06, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 251644/4 | Dec. 06, 2008 |
| Software ADT. | ADT_Radiated_V7.6 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC3789B-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

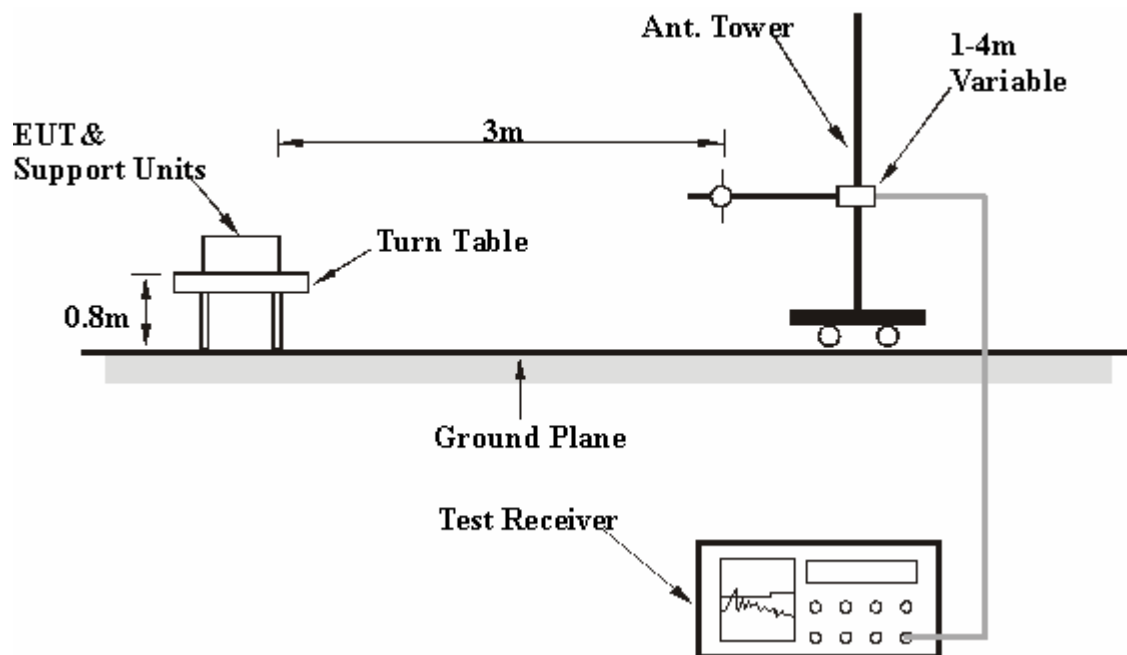

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared two notebook systems outside of testing area to act as a communication partners.
- c. The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.14 PK | 74.00 | -18.86 | 1.31 H | 83 | 25.64 | 29.50 |
| 2 | 1125.00 | 47.95 AV | 54.00 | -6.05 | 1.31 H | 83 | 18.45 | 29.50 |
| 3 | 2390.00 | 57.01 PK | 74.00 | -16.99 | 1.52 H | 313 | 24.57 | 32.44 |
| 4 | 2390.00 | 45.81 AV | 54.00 | -8.19 | 1.52 H | 313 | 13.37 | 32.44 |
| 5 | *2412.00 | 101.46 PK | | | 1.52 H | 313 | 68.94 | 32.52 |
| 6 | *2412.00 | 96.78 AV | | | 1.52 H | 313 | 64.26 | 32.52 |
| 7 | 4824.00 | 51.48 PK | 74.00 | -22.52 | 1.08 H | 262 | 13.18 | 38.30 |
| 8 | 4824.00 | 37.59 AV | 54.00 | -16.41 | 1.08 H | 262 | -0.71 | 38.30 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 54.26 PK | 74.00 | -19.74 | 1.15 V | 14 | 24.76 | 29.50 |
| 2 | 1125.00 | 48.69 AV | 54.00 | -5.31 | 1.15 V | 14 | 19.19 | 29.50 |
| 3 | 2390.00 | 59.13 PK | 74.00 | -14.87 | 1.11 V | 147 | 26.69 | 32.44 |
| 4 | 2390.00 | 47.48 AV | 54.00 | -6.52 | 1.11 V | 147 | 15.04 | 32.44 |
| 5 | *2412.00 | 111.52 PK | | | 1.40 V | 147 | 79.00 | 32.52 |
| 6 | *2412.00 | 106.70 AV | | | 1.40 V | 147 | 74.18 | 32.52 |
| 7 | 4824.00 | 53.57 PK | 74.00 | -20.43 | 1.26 V | 205 | 15.27 | 38.30 |
| 8 | 4824.00 | 40.89 AV | 54.00 | -13.11 | 1.26 V | 205 | 2.59 | 38.30 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 51.75 PK | 74.00 | -22.25 | 1.18 H | 170 | 22.25 | 29.50 |
| 2 | 1125.00 | 44.92 AV | 54.00 | -9.08 | 1.18 H | 170 | 15.42 | 29.50 |
| 3 | *2437.00 | 100.54 PK | | | 1.11 H | 232 | 67.94 | 32.60 |
| 4 | *2437.00 | 95.83 AV | | | 1.11 H | 232 | 63.23 | 32.60 |
| 5 | 4874.00 | 50.98 PK | 74.00 | -23.02 | 1.06 H | 285 | 12.48 | 38.50 |
| 6 | 4874.00 | 36.81 AV | 54.00 | -17.19 | 1.06 H | 285 | -1.69 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.00 PK | 74.00 | -19.00 | 1.20 V | 16 | 25.50 | 29.50 |
| 2 | 1125.00 | 49.17 AV | 54.00 | -4.83 | 1.20 V | 16 | 19.67 | 29.50 |
| 3 | *2437.00 | 111.93 PK | | | 1.36 V | 205 | 79.33 | 32.60 |
| 4 | *2437.00 | 107.14 AV | | | 1.36 V | 205 | 74.54 | 32.60 |
| 5 | 4874.00 | 52.48 PK | 74.00 | -21.52 | 1.26 V | 51 | 13.98 | 38.50 |
| 6 | 4874.00 | 39.25 AV | 54.00 | -14.75 | 1.26 V | 51 | 0.75 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.40 PK | 74.00 | -18.60 | 1.33 H | 85 | 25.90 | 29.50 |
| 2 | 1125.00 | 48.03 AV | 54.00 | -5.97 | 1.33 H | 85 | 18.53 | 29.50 |
| 3 | *2462.00 | 100.15 PK | | | 1.34 H | 77 | 67.47 | 32.68 |
| 4 | *2462.00 | 95.41 AV | | | 1.34 H | 77 | 62.73 | 32.68 |
| 5 | 2483.50 | 58.09 PK | 74.00 | -15.91 | 1.34 H | 77 | 25.33 | 32.76 |
| 6 | 2483.50 | 46.36 AV | 54.00 | -7.64 | 1.34 H | 77 | 13.60 | 32.76 |
| 7 | 4924.00 | 51.36 PK | 74.00 | -22.64 | 1.27 H | 236 | 12.72 | 38.64 |
| 8 | 4924.00 | 36.45 AV | 54.00 | -17.55 | 1.27 H | 236 | -2.19 | 38.64 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 56.30 PK | 74.00 | -17.70 | 1.50 V | 145 | 26.80 | 29.50 |
| 2 | 1125.00 | 49.71 AV | 54.00 | -4.29 | 1.50 V | 145 | 20.21 | 29.50 |
| 3 | *2462.00 | 112.21 PK | | | 1.09 V | 150 | 79.53 | 32.68 |
| 4 | *2462.00 | 107.42 AV | | | 1.09 V | 150 | 74.74 | 32.68 |
| 5 | 2483.50 | 58.85 PK | 74.00 | -15.15 | 1.08 V | 149 | 26.09 | 32.76 |
| 6 | 2483.50 | 49.30 AV | 54.00 | -4.70 | 1.08 V | 149 | 16.54 | 32.76 |
| 7 | 4924.00 | 52.47 PK | 74.00 | -21.53 | 1.05 V | 95 | 13.83 | 38.64 |
| 8 | 4924.00 | 39.48 AV | 54.00 | -14.52 | 1.05 V | 95 | 0.84 | 38.64 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 53.66 PK | 74.00 | -20.34 | 1.38 H | 307 | 24.16 | 29.50 |
| 2 | 1125.00 | 48.91 AV | 54.00 | -5.09 | 1.38 H | 307 | 19.41 | 29.50 |
| 3 | 2390.00 | 57.82 PK | 74.00 | -16.18 | 1.17 H | 329 | 25.38 | 32.44 |
| 4 | 2390.00 | 46.99 AV | 54.00 | -7.01 | 1.17 H | 329 | 14.55 | 32.44 |
| 5 | *2412.00 | 101.66 PK | | | 1.51 H | 330 | 69.14 | 32.52 |
| 6 | *2412.00 | 91.75 AV | | | 1.51 H | 330 | 59.23 | 32.52 |
| 7 | 4824.00 | 54.06 PK | 74.00 | -19.94 | 1.36 H | 254 | 15.76 | 38.30 |
| 8 | 4824.00 | 40.52 AV | 54.00 | -13.48 | 1.36 H | 254 | 2.22 | 38.30 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.69 PK | 74.00 | -18.31 | 1.26 V | 12 | 26.19 | 29.50 |
| 2 | 1125.00 | 50.24 AV | 54.00 | -3.76 | 1.26 V | 12 | 20.74 | 29.50 |
| 3 | 2390.00 | 68.16 PK | 74.00 | -5.84 | 1.40 V | 208 | 35.72 | 32.44 |
| 4 | 2390.00 | 51.14 AV | 54.00 | -2.86 | 1.40 V | 208 | 18.70 | 32.44 |
| 5 | *2412.00 | 112.17 PK | | | 1.08 V | 197 | 79.65 | 32.52 |
| 6 | *2412.00 | 101.20 AV | | | 1.08 V | 197 | 68.68 | 32.52 |
| 7 | 4824.00 | 56.48 PK | 74.00 | -17.52 | 1.31 V | 285 | 18.18 | 38.30 |
| 8 | 4824.00 | 43.79 AV | 54.00 | -10.21 | 1.31 V | 285 | 5.49 | 38.30 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 54.16 PK | 74.00 | -19.84 | 1.36 H | 309 | 24.66 | 29.50 |
| 2 | 1125.00 | 48.68 AV | 54.00 | -5.32 | 1.36 H | 309 | 19.18 | 29.50 |
| 3 | *2437.00 | 101.77 PK | | | 1.50 H | 327 | 69.17 | 32.60 |
| 4 | *2437.00 | 91.42 AV | | | 1.50 H | 327 | 58.82 | 32.60 |
| 5 | 4874.00 | 53.84 PK | 74.00 | -20.16 | 1.16 H | 263 | 15.34 | 38.50 |
| 6 | 4874.00 | 40.62 AV | 54.00 | -13.38 | 1.16 H | 263 | 2.12 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.09 PK | 74.00 | -18.91 | 1.00 V | 192 | 25.59 | 29.50 |
| 2 | 1125.00 | 49.76 AV | 54.00 | -4.24 | 1.00 V | 192 | 20.26 | 29.50 |
| 3 | *2437.00 | 112.16 PK | | | 1.10 V | 154 | 79.56 | 32.60 |
| 4 | *2437.00 | 101.00 AV | | | 1.10 V | 154 | 68.40 | 32.60 |
| 5 | 4874.00 | 55.69 PK | 74.00 | -18.31 | 1.32 V | 69 | 17.19 | 38.50 |
| 6 | 4874.00 | 42.87 AV | 54.00 | -11.13 | 1.32 V | 69 | 4.37 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 53.87 PK | 74.00 | -20.12 | 1.40 H | 308 | 24.38 | 29.50 |
| 2 | 1125.00 | 48.87 AV | 54.00 | -5.13 | 1.40 H | 308 | 19.37 | 29.50 |
| 3 | *2462.00 | 102.10 PK | | | 1.48 H | 328 | 69.42 | 32.68 |
| 4 | *2462.00 | 91.90 AV | | | 1.48 H | 328 | 59.22 | 32.68 |
| 5 | 2483.50 | 63.10 PK | 74.00 | -10.90 | 1.44 H | 327 | 30.34 | 32.76 |
| 6 | 2483.50 | 48.40 AV | 54.00 | -5.60 | 1.44 H | 327 | 15.64 | 32.76 |
| 7 | 4924.00 | 54.75 PK | 74.00 | -19.25 | 1.20 H | 219 | 16.11 | 38.64 |
| 8 | 4924.00 | 39.78 AV | 54.00 | -14.22 | 1.20 H | 219 | 1.14 | 38.64 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.23 PK | 74.00 | -18.77 | 1.00 V | 186 | 25.73 | 29.50 |
| 2 | 1125.00 | 49.94 AV | 54.00 | -4.06 | 1.00 V | 186 | 20.44 | 29.50 |
| 3 | *2462.00 | 112.00 PK | | | 1.34 V | 145 | 79.32 | 32.68 |
| 4 | *2462.00 | 100.37 AV | | | 1.34 V | 145 | 67.69 | 32.68 |
| 5 | 2483.50 | 72.01 PK | 74.00 | -1.99 | 1.08 V | 154 | 39.25 | 32.76 |
| 6 | 2483.50 | 52.94 AV | 54.00 | -1.06 | 1.08 V | 154 | 20.18 | 32.76 |
| 7 | 4924.00 | 55.84 PK | 74.00 | -18.16 | 1.10 V | 108 | 17.20 | 38.64 |
| 8 | 4924.00 | 42.56 AV | 54.00 | -11.44 | 1.10 V | 108 | 3.92 | 38.64 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 54.87 PK | 74.00 | -19.12 | 1.35 H | 307 | 25.38 | 29.50 |
| 2 | 1125.00 | 49.67 AV | 54.00 | -4.33 | 1.35 H | 307 | 20.17 | 29.50 |
| 3 | 2390.00 | 57.89 PK | 74.00 | -16.11 | 1.51 H | 318 | 25.45 | 32.44 |
| 4 | 2390.00 | 47.88 AV | 54.00 | -6.12 | 1.51 H | 318 | 15.44 | 32.44 |
| 5 | *2412.00 | 101.94 PK | | | 1.51 H | 318 | 69.42 | 32.52 |
| 6 | *2412.00 | 91.88 AV | | | 1.51 H | 318 | 59.36 | 32.52 |
| 7 | 4824.00 | 53.87 PK | 74.00 | -20.13 | 1.38 H | 266 | 15.57 | 38.30 |
| 8 | 4824.00 | 39.66 AV | 54.00 | -14.34 | 1.38 H | 266 | 1.36 | 38.30 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 56.18 PK | 74.00 | -17.82 | 1.00 V | 183 | 26.68 | 29.50 |
| 2 | 1125.00 | 50.27 AV | 54.00 | -3.73 | 1.00 V | 183 | 20.77 | 29.50 |
| 3 | 2390.00 | 72.88 PK | 74.00 | -1.12 | 1.11 V | 149 | 40.44 | 32.44 |
| 4 | 2390.00 | 52.03 AV | 54.00 | -1.97 | 1.11 V | 149 | 19.59 | 32.44 |
| 5 | *2412.00 | 113.84 PK | | | 1.09 V | 151 | 81.32 | 32.52 |
| 6 | *2412.00 | 103.53 AV | | | 1.09 V | 151 | 71.01 | 32.52 |
| 7 | 4824.00 | 56.23 PK | 74.00 | -17.77 | 1.29 V | 263 | 17.93 | 38.30 |
| 8 | 4824.00 | 42.89 AV | 54.00 | -11.11 | 1.29 V | 263 | 4.59 | 38.30 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 54.85 PK | 74.00 | -19.15 | 1.36 H | 308 | 25.35 | 29.50 |
| 2 | 1125.00 | 49.60 AV | 54.00 | -4.40 | 1.36 H | 308 | 20.10 | 29.50 |
| 3 | *2437.00 | 104.82 PK | | | 1.49 H | 324 | 72.22 | 32.60 |
| 4 | *2437.00 | 94.32 AV | | | 1.49 H | 324 | 61.72 | 32.60 |
| 5 | 4874.00 | 52.46 PK | 74.00 | -21.54 | 1.23 H | 264 | 13.96 | 38.50 |
| 6 | 4874.00 | 40.39 AV | 54.00 | -13.61 | 1.23 H | 264 | 1.89 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.86 PK | 74.00 | -18.14 | 1.00 V | 181 | 26.36 | 29.50 |
| 2 | 1125.00 | 50.08 AV | 54.00 | -3.92 | 1.00 V | 181 | 20.58 | 29.50 |
| 3 | *2437.00 | 115.16 PK | | | 1.07 V | 152 | 82.56 | 32.60 |
| 4 | *2437.00 | 104.92 AV | | | 1.07 V | 152 | 72.32 | 32.60 |
| 5 | 4874.00 | 54.59 PK | 74.00 | -19.41 | 1.26 V | 74 | 16.09 | 38.50 |
| 6 | 4874.00 | 41.95 AV | 54.00 | -12.05 | 1.26 V | 74 | 3.45 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 54.12 PK | 74.00 | -19.88 | 1.36 H | 307 | 24.62 | 29.50 |
| 2 | 1125.00 | 49.69 AV | 54.00 | -4.31 | 1.36 H | 307 | 20.19 | 29.50 |
| 3 | *2462.00 | 102.88 PK | | | 1.48 H | 326 | 70.20 | 32.68 |
| 4 | *2462.00 | 92.51 AV | | | 1.48 H | 326 | 59.83 | 32.68 |
| 5 | 2483.50 | 58.06 PK | 74.00 | -15.94 | 1.48 H | 326 | 25.30 | 32.76 |
| 6 | 2483.50 | 47.55 AV | 54.00 | -6.45 | 1.48 H | 326 | 14.79 | 32.76 |
| 7 | 4924.00 | 54.06 PK | 74.00 | -19.94 | 1.15 H | 236 | 15.42 | 38.64 |
| 8 | 4924.00 | 38.87 AV | 54.00 | -15.13 | 1.15 H | 236 | 0.23 | 38.64 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 57.61 PK | 74.00 | -16.39 | 1.55 V | 140 | 28.11 | 29.50 |
| 2 | 1125.00 | 51.32 AV | 54.00 | -2.68 | 1.55 V | 140 | 21.82 | 29.50 |
| 3 | *2462.00 | 113.25 PK | | | 1.07 V | 151 | 80.57 | 32.68 |
| 4 | *2462.00 | 102.59 AV | | | 1.07 V | 151 | 69.91 | 32.68 |
| 5 | 2483.50 | 66.60 PK | 74.00 | -7.40 | 1.06 V | 159 | 33.84 | 32.76 |
| 6 | 2483.50 | 52.42 AV | 54.00 | -1.58 | 1.06 V | 159 | 19.66 | 32.76 |
| 7 | 4924.00 | 54.98 PK | 74.00 | -19.02 | 1.25 V | 113 | 16.34 | 38.64 |
| 8 | 4924.00 | 41.24 AV | 54.00 | -12.76 | 1.25 V | 113 | 2.60 | 38.64 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.58 PK | 74.00 | -19.42 | 1.37 H | 309 | 25.08 | 29.50 |
| 2 | 1125.00 | 49.59 AV | 54.00 | -4.41 | 1.37 H | 309 | 20.09 | 29.50 |
| 3 | 2382.00 | 56.84 PK | 74.00 | -17.16 | 1.16 H | 334 | 24.43 | 32.41 |
| 4 | 2382.00 | 47.06 AV | 54.00 | -6.94 | 1.16 H | 334 | 14.65 | 32.41 |
| 5 | 2390.00 | 59.14 PK | 74.00 | -14.86 | 1.51 H | 325 | 26.70 | 32.44 |
| 6 | 2390.00 | 46.69 AV | 54.00 | -7.31 | 1.51 H | 325 | 14.25 | 32.44 |
| 7 | *2422.00 | 97.30 PK | | | 1.51 H | 325 | 64.75 | 32.55 |
| 8 | *2422.00 | 86.60 AV | | | 1.51 H | 325 | 54.05 | 32.55 |
| 9 | 4844.00 | 53.84 PK | 74.00 | -20.16 | 1.00 H | 264 | 15.46 | 38.38 |
| 10 | 4844.00 | 39.26 AV | 54.00 | -14.74 | 1.00 H | 264 | 0.88 | 38.38 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 55.78 PK | 74.00 | -18.22 | 1.24 V | 13 | 26.28 | 29.50 |
| 2 | 1125.00 | 49.58 AV | 54.00 | -4.42 | 1.24 V | 13 | 20.08 | 29.50 |
| 3 | 2382.00 | 65.74 PK | 74.00 | -8.26 | 1.12 V | 150 | 33.33 | 32.41 |
| 4 | 2382.00 | 52.74 AV | 54.00 | -1.26 | 1.12 V | 150 | 20.33 | 32.41 |
| 5 | 2390.00 | 64.93 PK | 74.00 | -9.07 | 1.11 V | 151 | 32.49 | 32.44 |
| 6 | 2390.00 | 50.44 AV | 54.00 | -3.56 | 1.11 V | 151 | 18.00 | 32.44 |
| 7 | *2422.00 | 108.01 PK | | | 1.10 V | 151 | 75.46 | 32.55 |
| 8 | *2422.00 | 97.99 AV | | | 1.10 V | 151 | 65.44 | 32.55 |
| 9 | 4844.00 | 54.89 PK | 74.00 | -19.11 | 1.65 V | 269 | 16.51 | 38.38 |
| 10 | 4844.00 | 42.08 AV | 54.00 | -11.92 | 1.65 V | 269 | 3.70 | 38.38 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 4 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.40 PK | 74.00 | -19.60 | 1.39 H | 309 | 24.90 | 29.50 |
| 2 | 1125.00 | 49.45 AV | 54.00 | -4.55 | 1.39 H | 309 | 19.95 | 29.50 |
| 3 | *2437.00 | 100.47 PK | | | 1.50 H | 326 | 67.87 | 32.60 |
| 4 | *2437.00 | 90.08 AV | | | 1.50 H | 326 | 57.48 | 32.60 |
| 5 | 2483.50 | 59.30 PK | 74.00 | -14.70 | 1.50 H | 318 | 26.54 | 32.76 |
| 6 | 2483.50 | 47.38 AV | 54.00 | -6.62 | 1.50 H | 318 | 14.62 | 32.76 |
| 7 | 4874.00 | 51.84 PK | 74.00 | -22.16 | 1.18 H | 26 | 13.34 | 38.50 |
| 8 | 4874.00 | 39.62 AV | 54.00 | -14.38 | 1.18 H | 26 | 1.12 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 55.87 PK | 74.00 | -18.13 | 1.22 V | 15 | 26.37 | 29.50 |
| 2 | 1125.00 | 49.62 AV | 54.00 | -4.38 | 1.22 V | 15 | 20.12 | 29.50 |
| 3 | 2390.00 | 64.87 PK | 74.00 | -9.13 | 1.11 V | 198 | 32.43 | 32.44 |
| 4 | 2390.00 | 50.61 AV | 54.00 | -3.39 | 1.11 V | 198 | 18.17 | 32.44 |
| 5 | *2437.00 | 110.99 PK | | | 1.08 V | 154 | 78.39 | 32.60 |
| 6 | *2437.00 | 100.66 AV | | | 1.08 V | 154 | 68.06 | 32.60 |
| 7 | 2483.50 | 67.45 PK | 74.00 | -6.55 | 1.06 V | 151 | 34.69 | 32.76 |
| 8 | 2483.50 | 52.09 AV | 54.00 | -1.91 | 1.07 V | 143 | 19.33 | 32.76 |
| 9 | 4874.00 | 54.87 PK | 74.00 | -19.13 | 1.45 V | 85 | 16.37 | 38.50 |
| 10 | 4874.00 | 41.59 AV | 54.00 | -12.41 | 1.45 V | 85 | 3.09 | 38.50 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 7 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH 1010hPa | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.03 PK | 74.00 | -19.97 | 1.30 H | 82 | 24.53 | 29.50 |
| 2 | 1125.00 | 46.87 AV | 54.00 | -7.13 | 1.30 H | 82 | 17.37 | 29.50 |
| 3 | *2452.00 | 95.84 PK | | | 1.07 H | 211 | 63.19 | 32.65 |
| 4 | *2452.00 | 86.34 AV | | | 1.07 H | 211 | 53.69 | 32.65 |
| 5 | 2483.50 | 56.01 PK | 74.00 | -17.99 | 1.07 H | 211 | 23.25 | 32.76 |
| 6 | 2483.50 | 46.50 AV | 54.00 | -7.50 | 1.07 H | 211 | 13.74 | 32.76 |
| 7 | 4904.00 | 53.48 PK | 74.00 | -20.52 | 1.29 H | 268 | 14.87 | 38.61 |
| 8 | 4904.00 | 41.26 AV | 54.00 | -12.74 | 1.29 H | 268 | 2.65 | 38.61 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.32 PK | 74.00 | -19.68 | 1.00 V | 189 | 24.82 | 29.50 |
| 2 | 1125.00 | 49.32 AV | 54.00 | -4.68 | 1.00 V | 189 | 19.82 | 29.50 |
| 3 | *2452.00 | 106.91 PK | | | 1.09 V | 155 | 74.26 | 32.65 |
| 4 | *2452.00 | 96.18 AV | | | 1.09 V | 155 | 63.53 | 32.65 |
| 5 | 2483.50 | 67.22 PK | 74.00 | -6.78 | 1.06 V | 161 | 34.46 | 32.76 |
| 6 | 2483.50 | 52.34 AV | 54.00 | -1.66 | 1.06 V | 161 | 19.58 | 32.76 |
| 7 | 2492.00 | 63.22 PK | 74.00 | -10.78 | 1.05 V | 145 | 30.44 | 32.78 |
| 8 | 2492.00 | 52.90 AV | 54.00 | -1.10 | 1.05 V | 145 | 20.12 | 32.78 |
| 9 | 4904.00 | 55.46 PK | 74.00 | -18.54 | 1.29 V | 263 | 16.85 | 38.61 |
| 10 | 4904.00 | 42.15 AV | 54.00 | -11.85 | 1.29 V | 263 | 3.54 | 38.61 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA :

802.11g OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | TESTED BY | Mark Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.17 | 37.52 QP | 43.50 | -5.98 | 2.00 H | 307 | 25.12 | 12.40 |
| 2 | 249.96 | 44.75 QP | 46.00 | -1.25 | 1.11 H | 294 | 31.05 | 13.70 |
| 3 | 499.97 | 44.25 QP | 46.00 | -1.75 | 1.66 H | 305 | 23.76 | 20.49 |
| 4 | 624.85 | 39.17 QP | 46.00 | -6.83 | 1.25 H | 184 | 15.53 | 23.64 |
| 5 | 751.23 | 40.36 QP | 46.00 | -5.64 | 1.25 H | 19 | 14.49 | 25.87 |
| 6 | 799.84 | 42.93 QP | 46.00 | -3.07 | 1.00 H | 181 | 16.54 | 26.38 |
| 7 | 875.67 | 41.26 QP | 46.00 | -4.74 | 1.00 H | 118 | 13.56 | 27.71 |
| 8 | 900.94 | 41.30 QP | 46.00 | -4.70 | 1.50 H | 217 | 13.20 | 28.10 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 41.71 | 34.45 QP | 40.00 | -5.55 | 1.00 V | 116 | 21.80 | 12.65 |
| 2 | 249.96 | 44.12 QP | 46.00 | -1.88 | 1.00 V | 233 | 30.43 | 13.70 |
| 3 | 500.42 | 43.57 QP | 46.00 | -2.43 | 1.00 V | 10 | 23.07 | 20.50 |
| 4 | 799.84 | 40.45 QP | 46.00 | -5.55 | 1.25 V | 112 | 14.07 | 26.38 |
| 5 | 875.67 | 42.68 QP | 46.00 | -3.32 | 1.00 V | 127 | 14.98 | 27.71 |
| 6 | 1000.00 | 42.70 QP | 54.00 | -11.30 | 1.00 V | 256 | 13.18 | 29.52 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100291 | Nov. 21, 2008 |
| RF signal cable Woken | 5D-FB | Cable-HYC01-01 | Jan. 03, 2009 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100312 | Jun. 12, 2009 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100104 | Sep. 11, 2008 |
| Software ADT | ADT_Cond_V3 | NA | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

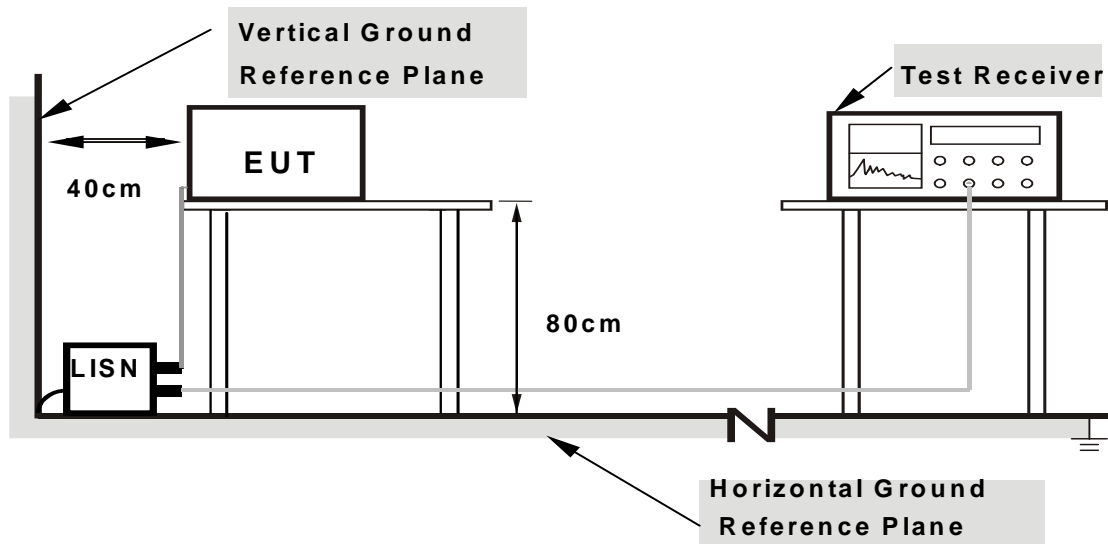

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| CHANNEL | Channel 6 | PHASE | Line 1 |
| MODULATION TYPE | BPSK | INPUT POWER | 120Vac, 60Hz |
| TRANSFER RATE | 6.0Mbps | 6dB BANDWIDTH | 9kHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | TESTED BY | Kevin Liang |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.194 | 0.20 | 52.17 | - | 52.37 | - | 63.85 | 53.85 | -11.48 | - |
| 2 | 0.259 | 0.20 | 44.68 | - | 44.88 | - | 61.45 | 51.45 | -16.57 | - |
| 3 | 0.388 | 0.20 | 44.28 | - | 44.48 | - | 58.10 | 48.10 | -13.62 | - |
| 4 | 0.455 | 0.20 | 37.02 | - | 37.22 | - | 56.79 | 46.79 | -19.57 | - |
| 5 | 0.845 | 0.20 | 31.52 | - | 31.72 | - | 56.00 | 46.00 | -24.28 | - |
| 6 | 3.891 | 0.39 | 27.44 | - | 27.83 | - | 56.00 | 46.00 | -28.17 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

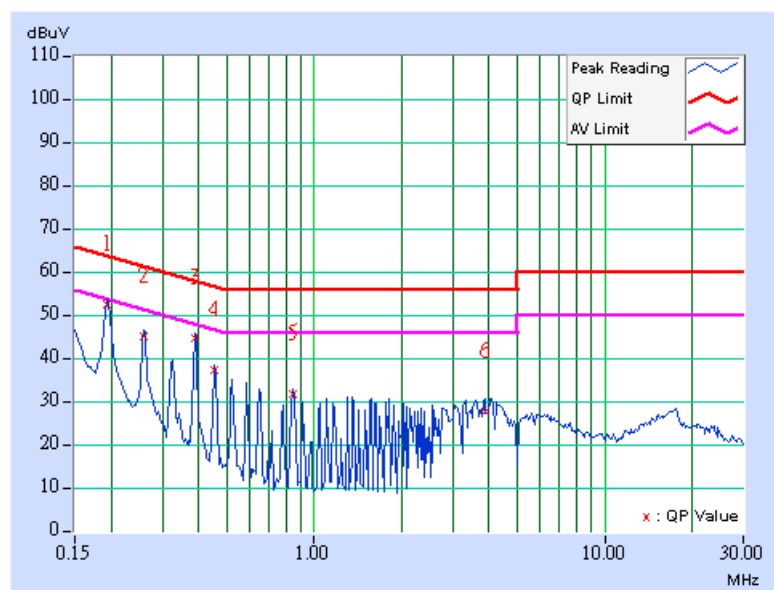

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| CHANNEL | Channel 6 | PHASE | Line 2 |
| MODULATION TYPE | BPSK | INPUT POWER | 120Vac, 60Hz |
| TRANSFER RATE | 6.0Mbps | 6dB BANDWIDTH | 9kHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | TESTED BY | Kevin Liang |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.194 | 0.20 | 52.29 | - | 52.49 | - | 63.85 | 53.85 | -11.36 | - |
| 2 | 0.259 | 0.20 | 46.66 | - | 46.86 | - | 61.45 | 51.45 | -14.59 | - |
| 3 | 0.390 | 0.20 | 47.41 | - | 47.61 | - | 58.07 | 48.07 | -10.46 | - |
| 4 | 0.455 | 0.20 | 39.34 | - | 39.54 | - | 56.79 | 46.79 | -17.25 | - |
| 5 | 1.563 | 0.20 | 33.63 | - | 33.83 | - | 56.00 | 46.00 | -22.17 | - |
| 6 | 4.039 | 0.40 | 30.40 | - | 30.80 | - | 56.00 | 46.00 | -25.20 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

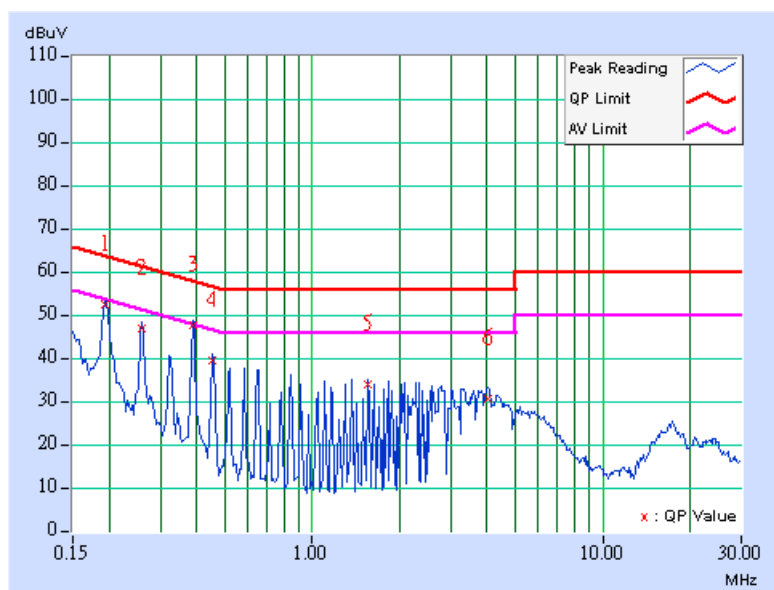



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

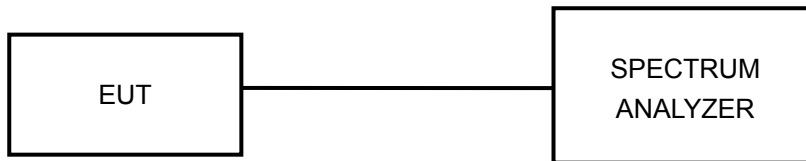

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

802.11b DSSS MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | DBPSK | TRANSFER RATE | 1.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 10.13 | 0.5 | PASS |
| 6 | 2437 | 10.14 | 0.5 | PASS |
| 11 | 2462 | 12.07 | 0.5 | PASS |


CH 1

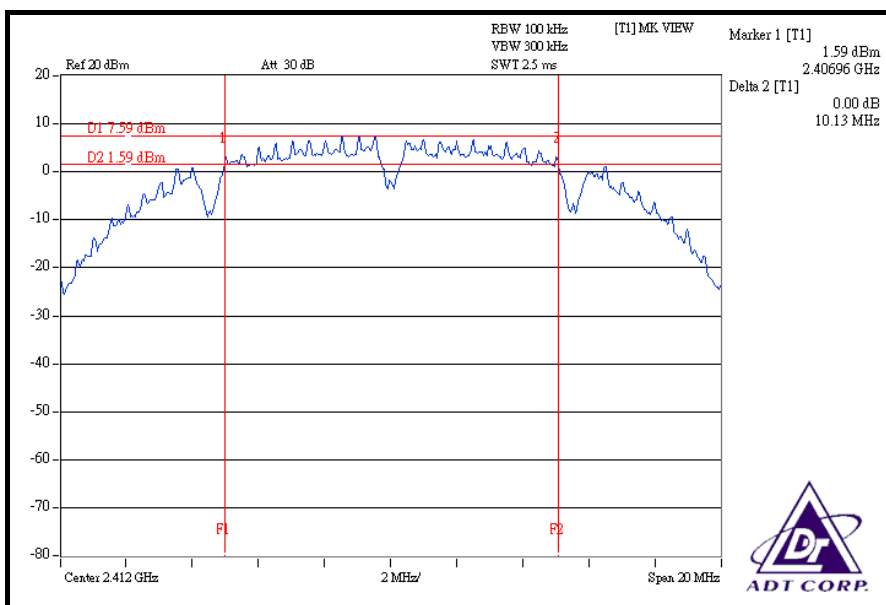

CH 6

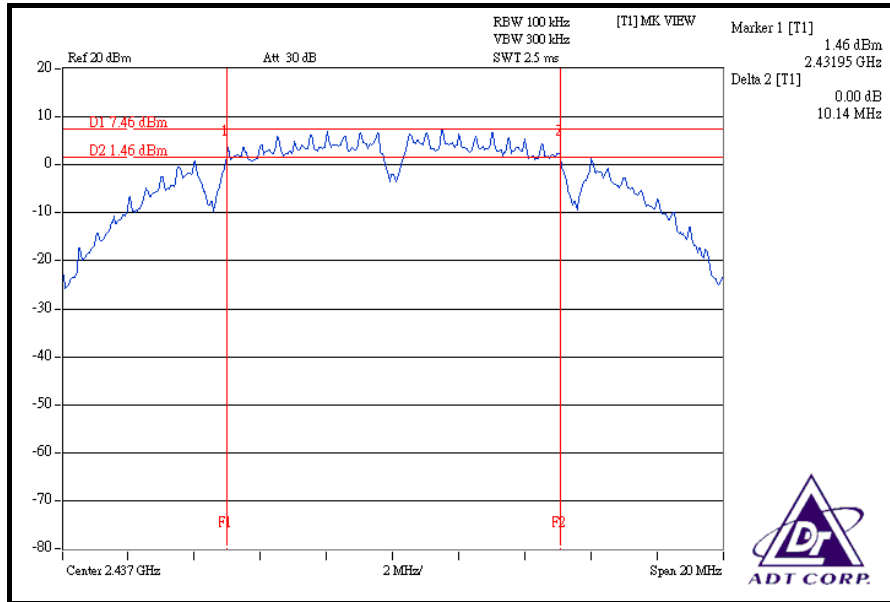

CH 11

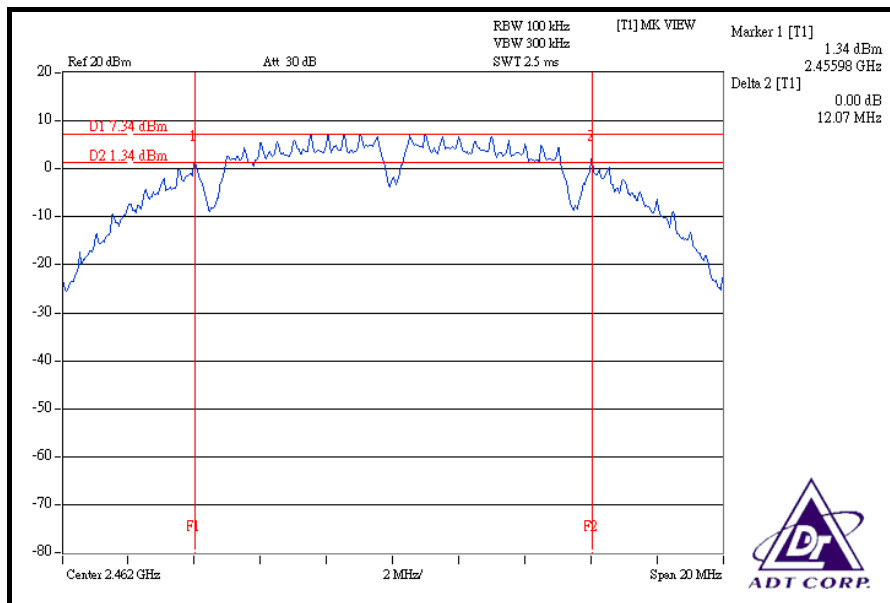




802.11g OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 16.53 | 0.5 | PASS |
| 6 | 2437 | 16.50 | 0.5 | PASS |
| 11 | 2462 | 16.45 | 0.5 | PASS |


CH 1

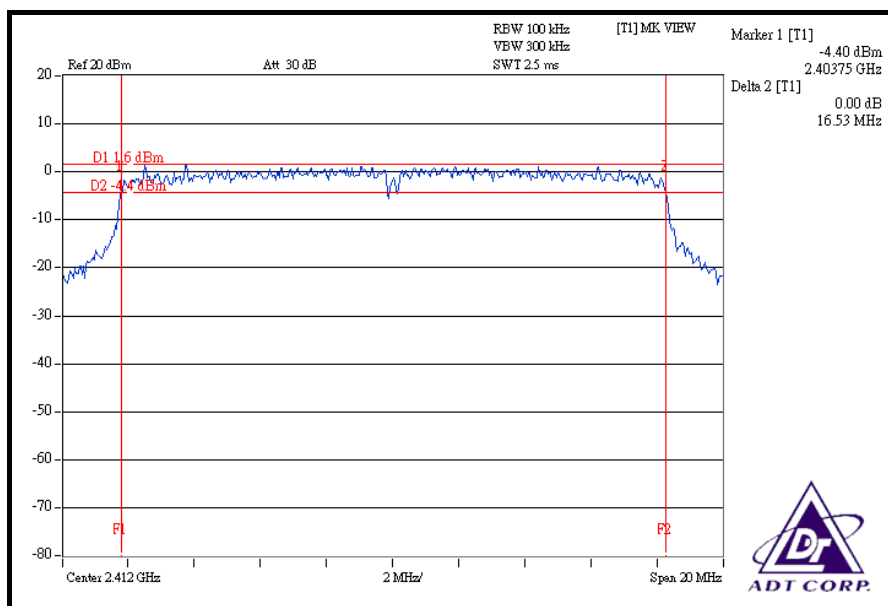

CH 6

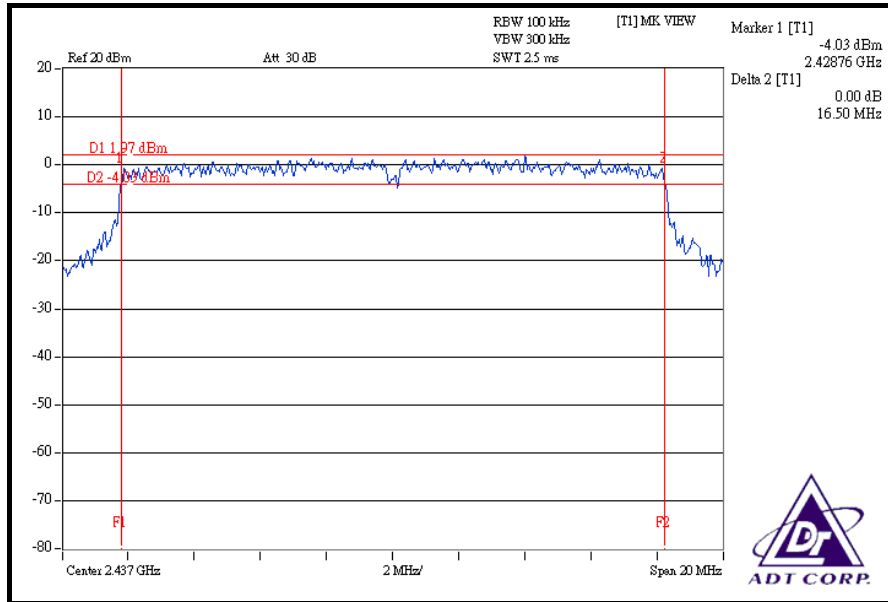

CH 11

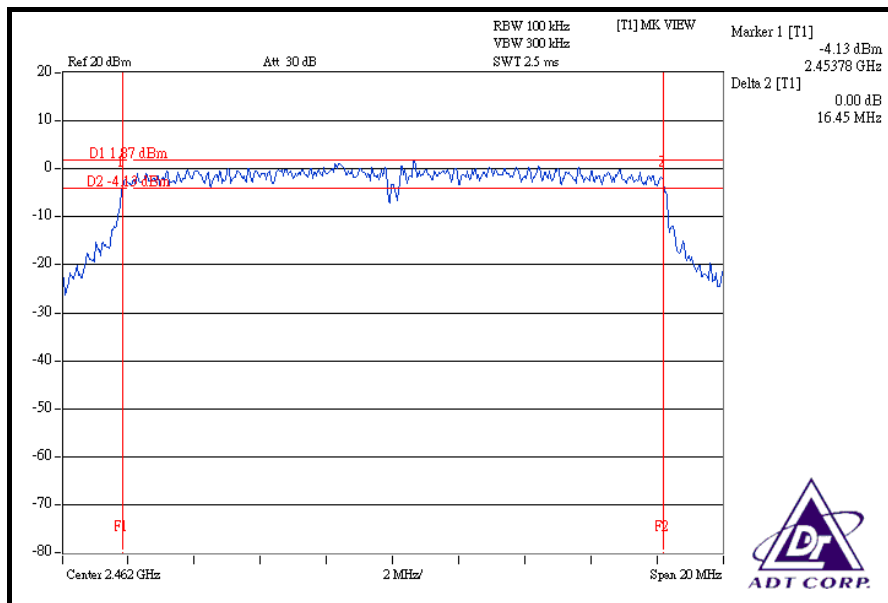




DRAFT 802.11n (20MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2412 | 17.60 | 17.60 | 0.5 | PASS |
| 6 | 2437 | 17.62 | 17.60 | 0.5 | PASS |
| 11 | 2462 | 17.66 | 17.63 | 0.5 | PASS |


FOR CHAIN 0: CH 1

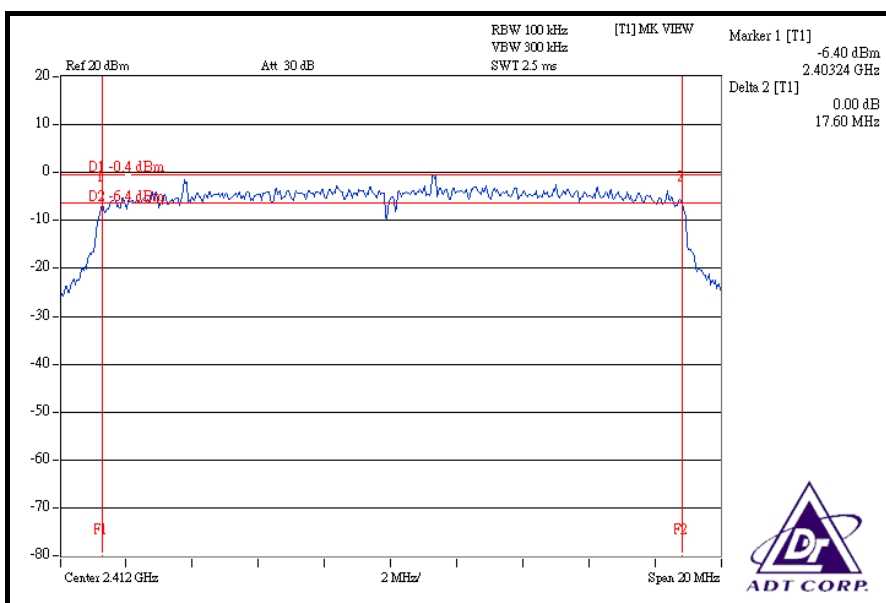


CH 6

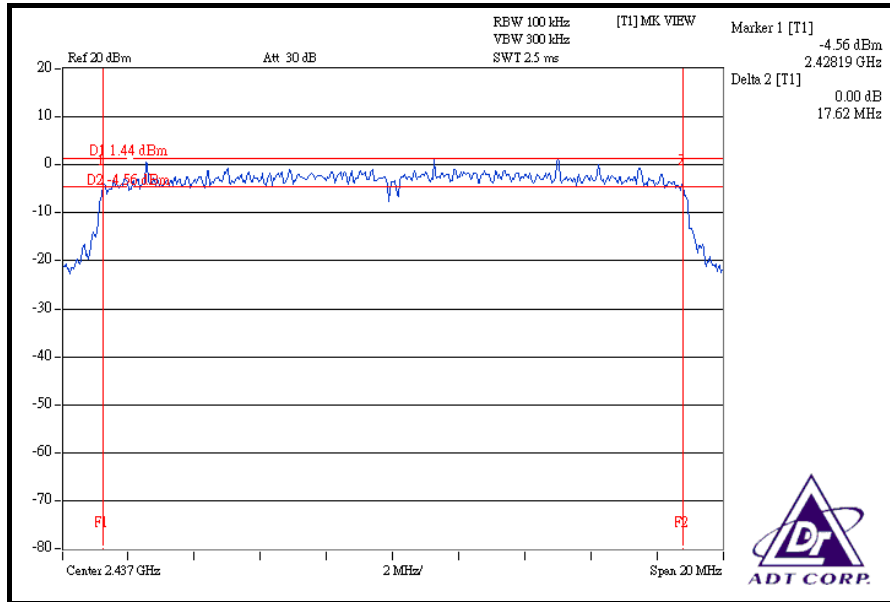


CH 11

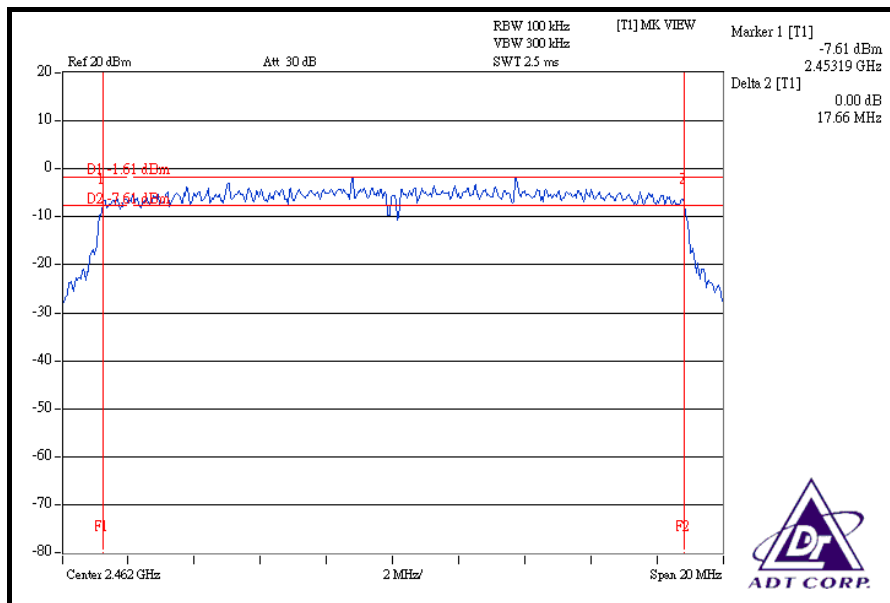


FOR CHAIN 1: CH 1

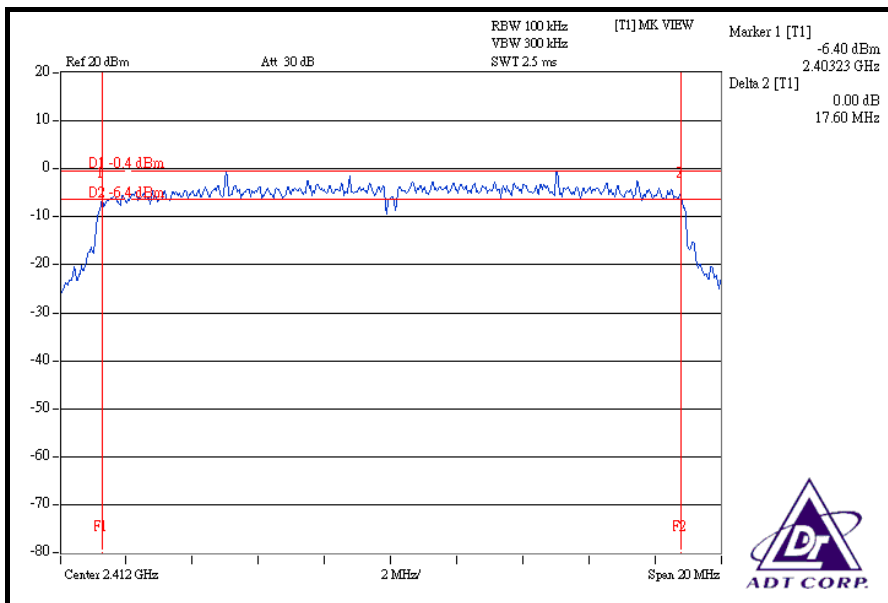

CH 6

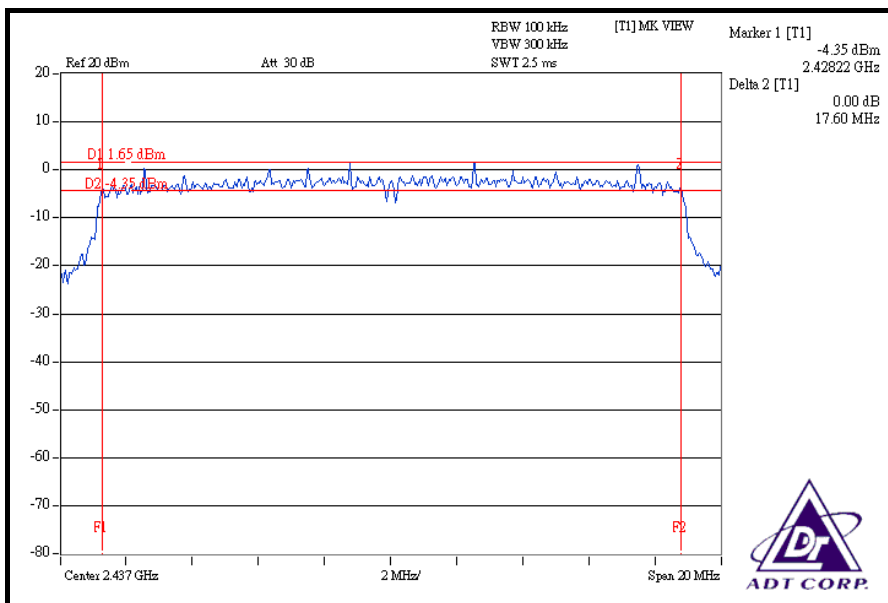

CH 11

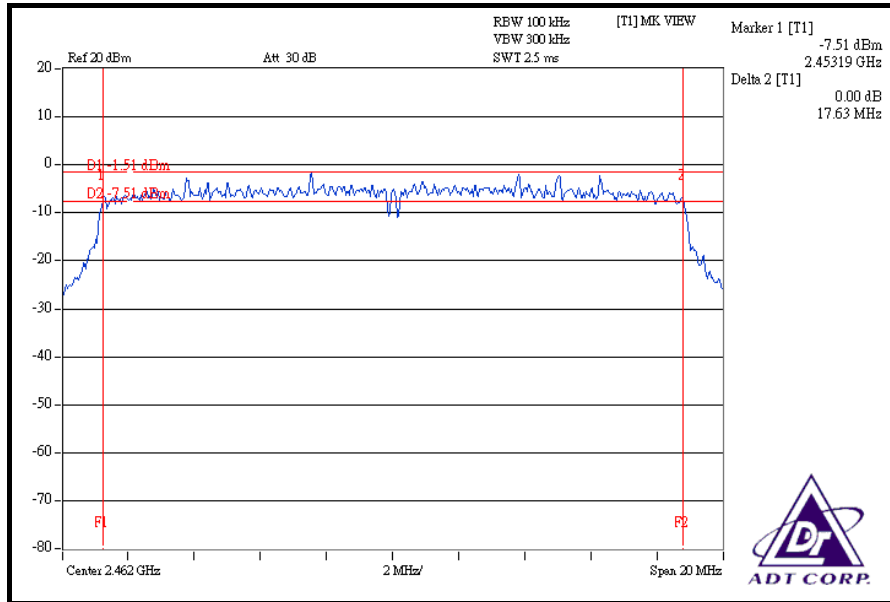




DRAFT 802.11n (40MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2422 | 36.41 | 36.44 | 0.5 | PASS |
| 4 | 2437 | 36.46 | 36.48 | 0.5 | PASS |
| 7 | 2452 | 36.47 | 36.52 | 0.5 | PASS |


FOR CHAIN 0: CH 1

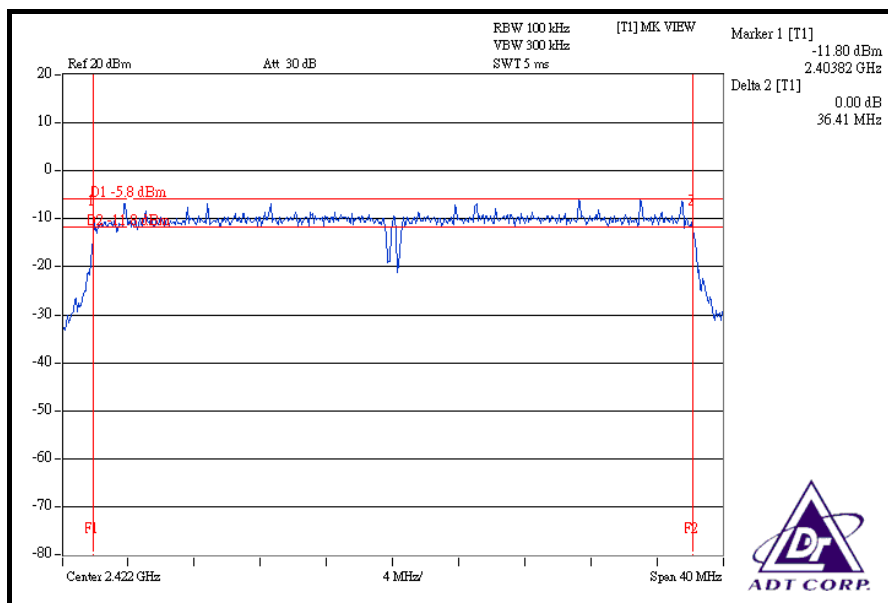


CH 4

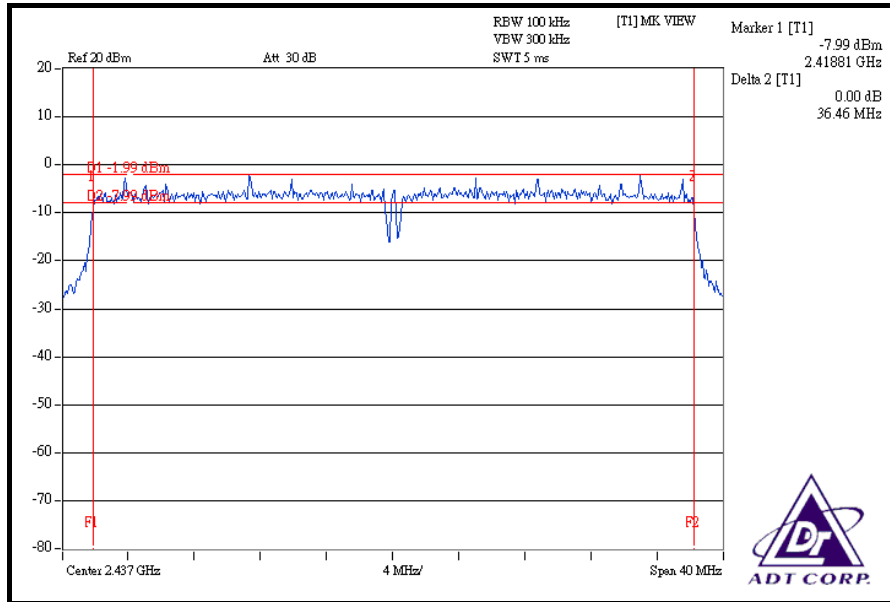


CH 7

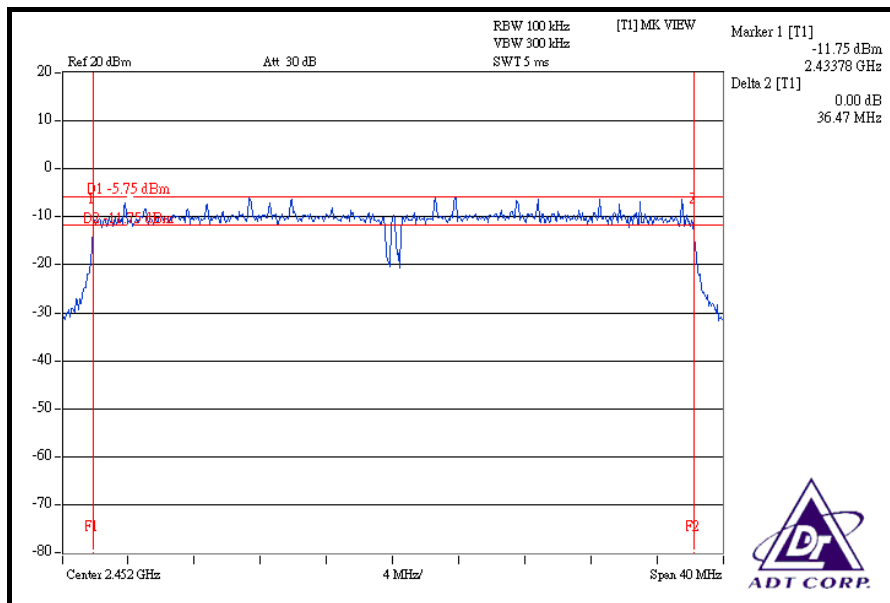


FOR CHAIN 1: CH 1

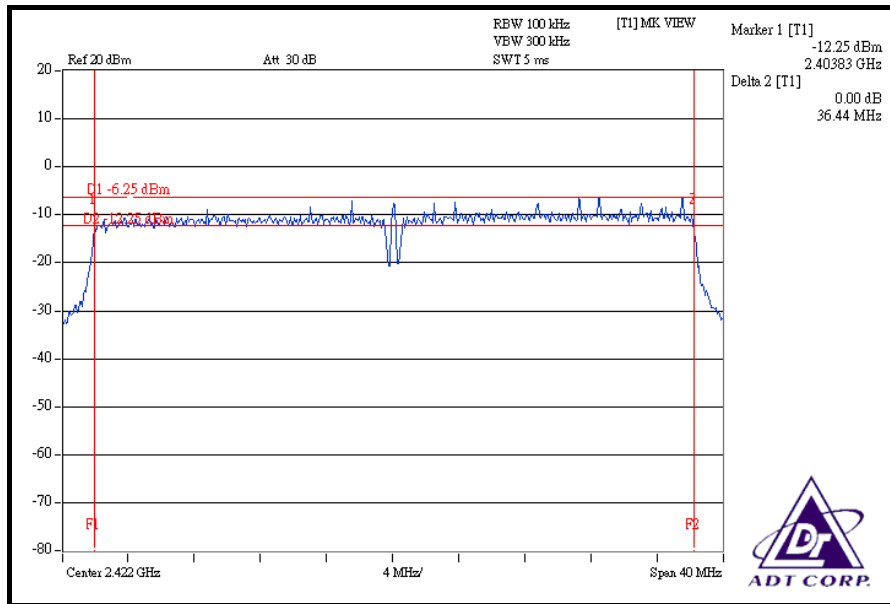

CH 4

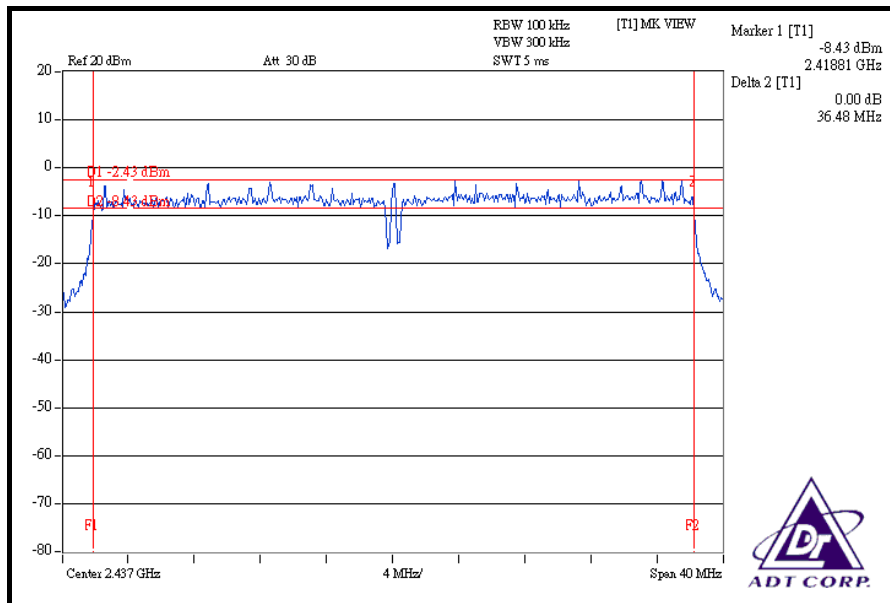

CH 7

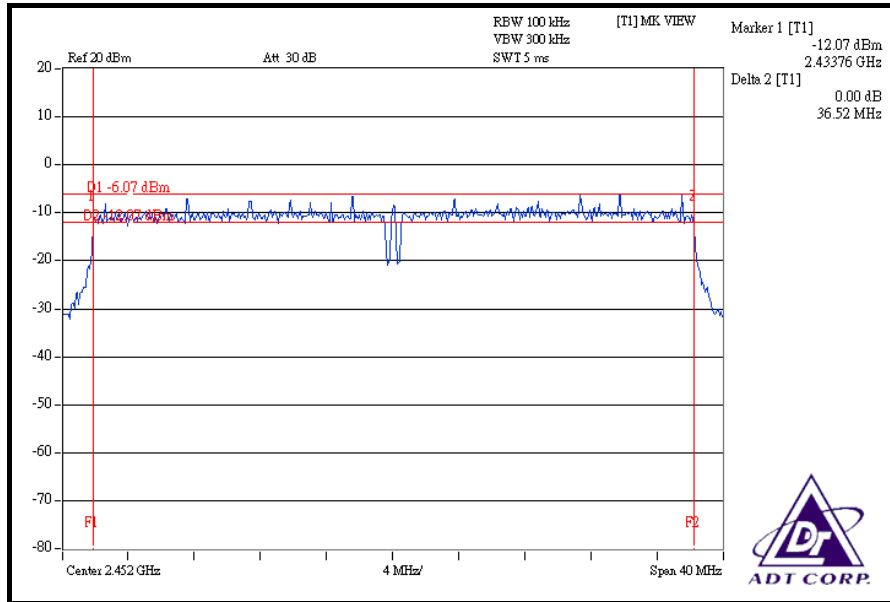



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |
| AGILENT SYNTHESIZED SIGNAL GENERATOR | E8257C | MY43320668 | Dec. 25, 2008 |
| DIGITAL RT OSCILLOSCOPE | TDS1012 | C037299 | Nov. 21, 2008 |
| NARDA DETECTOR | 4503A | FSCM99899 | NA |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- a. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
- b. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- c. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | DBPSK | TRANSFER RATE | 1.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1 | 2412 | 89.536 | 19.52 | 30 | PASS |
| 6 | 2437 | 89.536 | 19.52 | 30 | PASS |
| 11 | 2462 | 90.782 | 19.58 | 30 | PASS |

802.11g OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1 | 2412 | 90.991 | 19.59 | 30 | PASS |
| 6 | 2437 | 102.094 | 20.09 | 30 | PASS |
| 11 | 2462 | 89.743 | 19.53 | 30 | PASS |



DRAFT 802.11n (20MHz) OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | PEAK POWER OUTPUT (dBm) | | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|-------------------------|---------|-----------------------|------------------------|------------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2412 | 15.52 | 15.53 | 71.372 | 18.54 | 30 | PASS |
| 6 | 2437 | 17.60 | 17.50 | 113.778 | 20.56 | 30 | PASS |
| 11 | 2462 | 14.56 | 14.56 | 57.152 | 17.57 | 30 | PASS |

DRAFT 802.11n (40MHz) OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | PEAK POWER OUTPUT (dBm) | | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|-------------------------|---------|-----------------------|------------------------|------------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2422 | 12.51 | 11.59 | 32.245 | 15.08 | 30 | PASS |
| 4 | 2437 | 16.04 | 15.56 | 76.154 | 18.82 | 30 | PASS |
| 7 | 2452 | 12.08 | 11.53 | 30.367 | 14.82 | 30 | PASS |



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

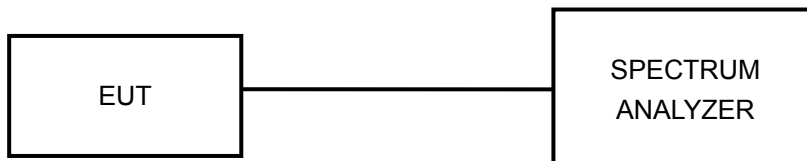

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


| | | | |
|-----------------|--------------|--------------------------|--------------------------|
| MODULATION TYPE | DBPSK | TRANSFER RATE | 1.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|---------------------------------|---------------------|-------------|
| 1 | 2412 | -6.63 | 8 | PASS |
| 6 | 2437 | -6.46 | 8 | PASS |
| 11 | 2462 | -6.80 | 8 | PASS |


CH 1

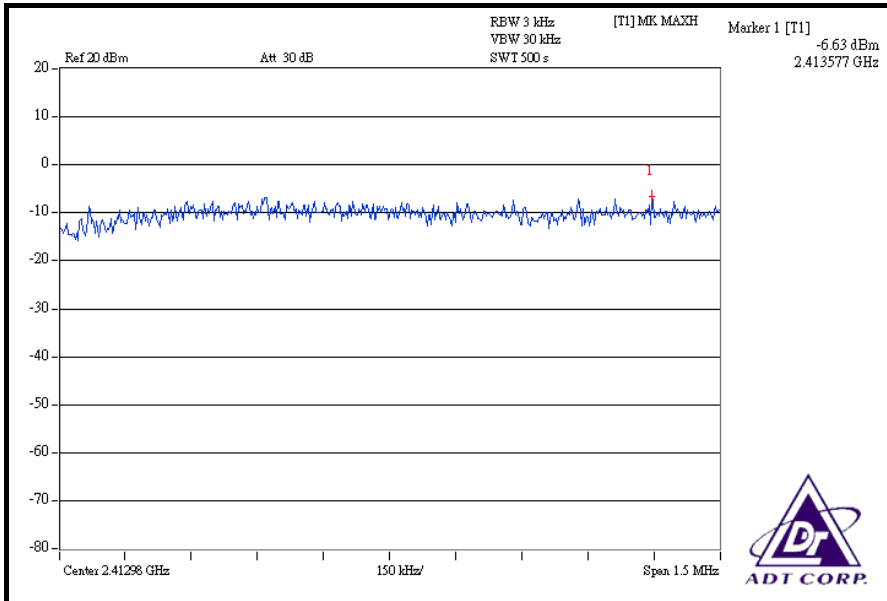

CH 6

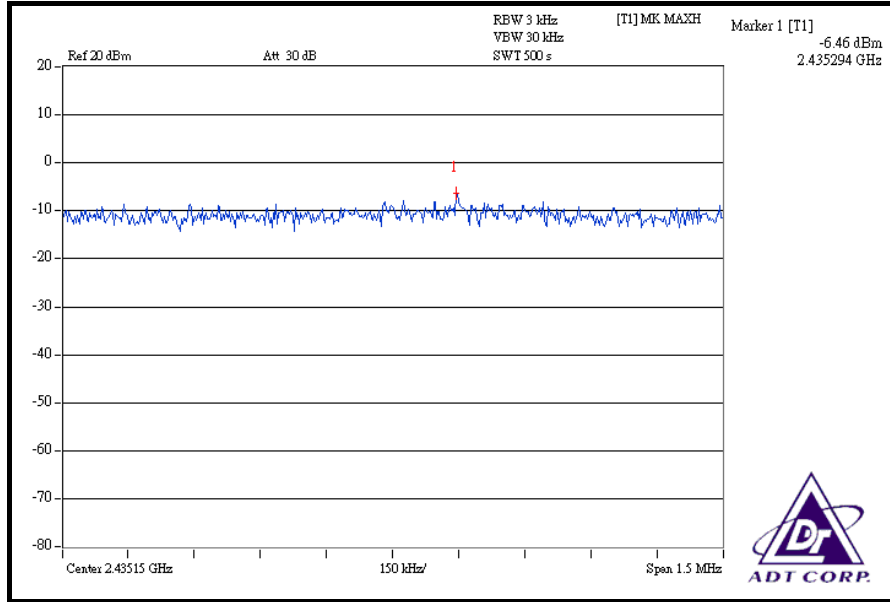

CH 11

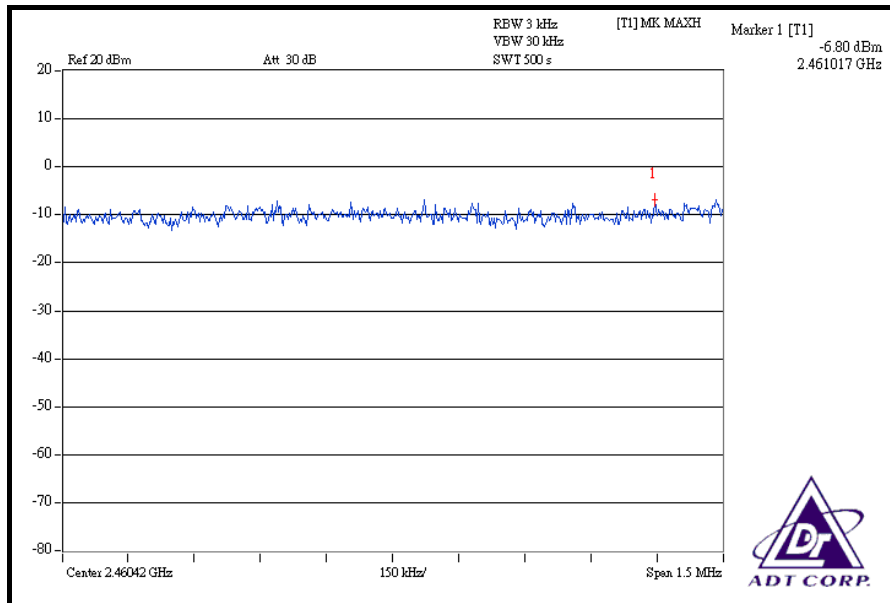




802.11g OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| TESTED BY | Long Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|---------------------------------|---------------------|-------------|
| 1 | 2412 | -5.79 | 8 | PASS |
| 6 | 2437 | -5.10 | 8 | PASS |
| 11 | 2462 | -5.94 | 8 | PASS |


CH 1

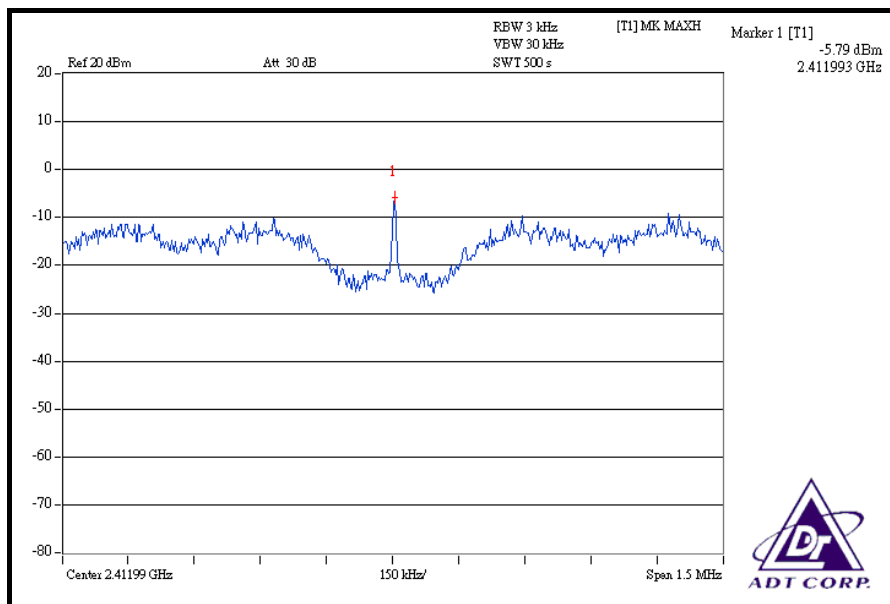

CH 6

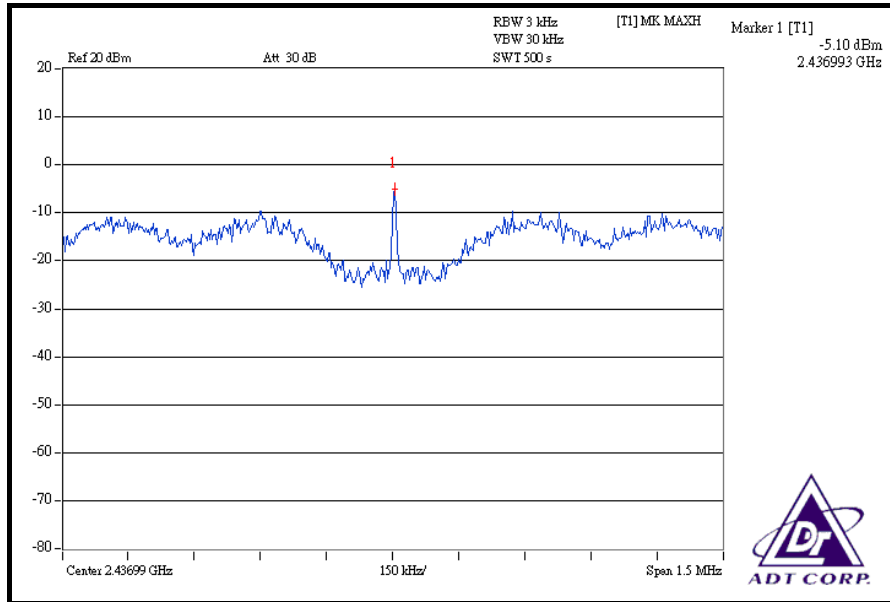

CH 11

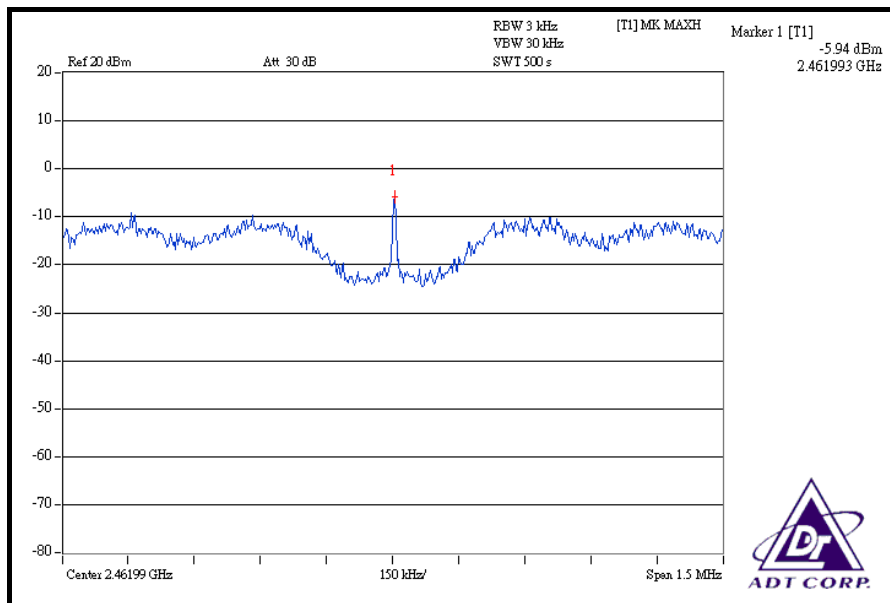




DRAFT 802.11n (20MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | | TOTAL POWER DENSITY (mW) | TOTAL POWER DENSITY (dBm) | MAX. LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|---------------------------------|---------|--------------------------|---------------------------|------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2412 | -8.10 | -7.36 | 0.339 | -4.70 | 30 | PASS |
| 6 | 2437 | -6.32 | -6.68 | 0.448 | -3.49 | 30 | PASS |
| 11 | 2462 | -7.42 | -8.86 | 0.311 | -5.07 | 30 | PASS |


FOR CHAIN 0: CH 1

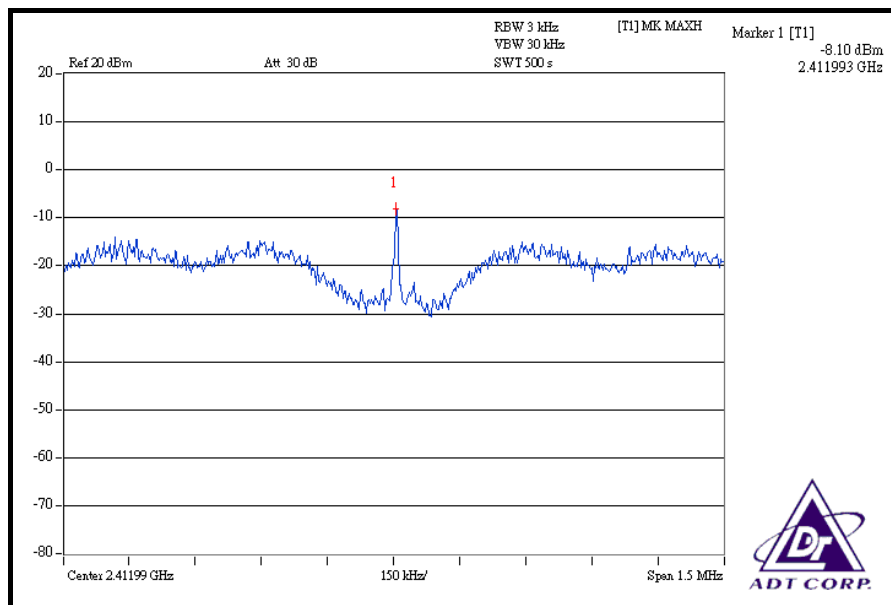


CH 6

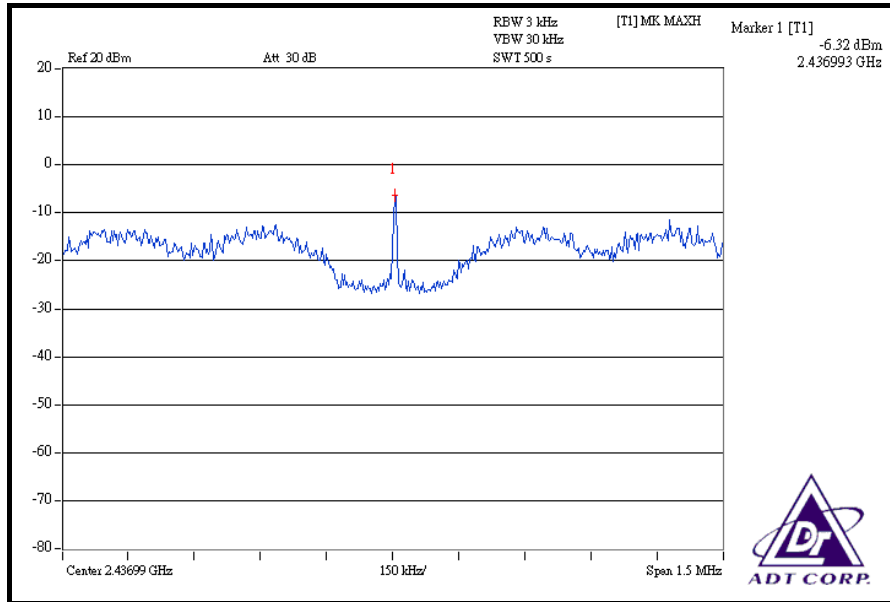


CH 11

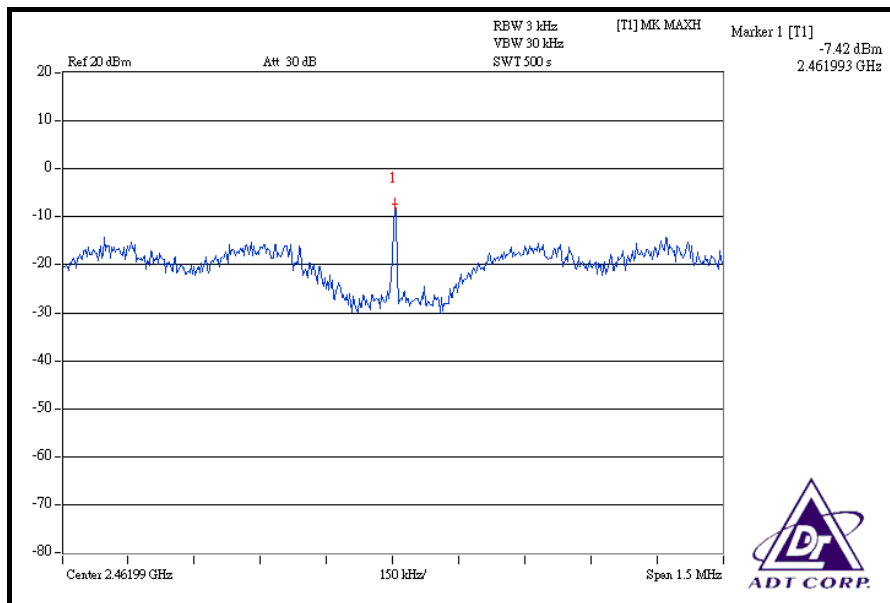

FOR CHAIN 1: CH 1

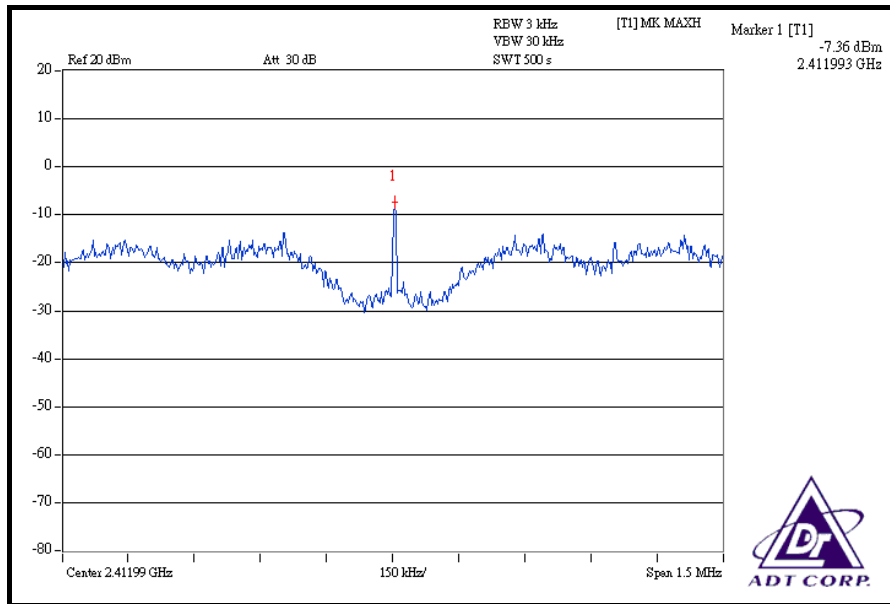

CH 6

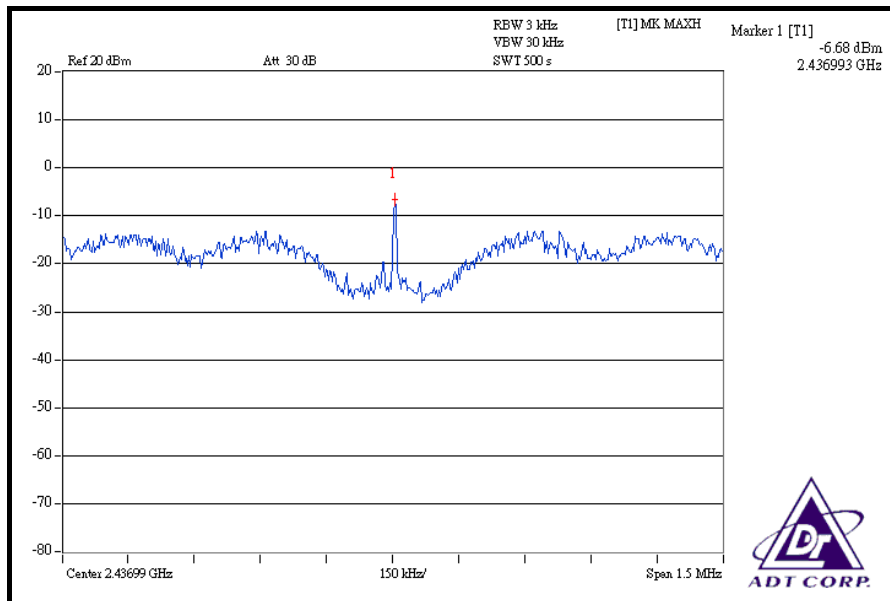




DRAFT 802.11n (40MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | | TOTAL POWER DENSITY (mW) | TOTAL POWER DENSITY (dBm) | MAX. LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|---------------------------------|---------|--------------------------|---------------------------|------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2422 | -10.99 | -9.41 | 0.194 | -7.12 | 30 | PASS |
| 4 | 2437 | -7.26 | -5.59 | 0.464 | -3.33 | 30 | PASS |
| 7 | 2452 | -10.32 | -8.28 | 0.241 | -6.17 | 30 | PASS |


FOR CHAIN 0: CH 1

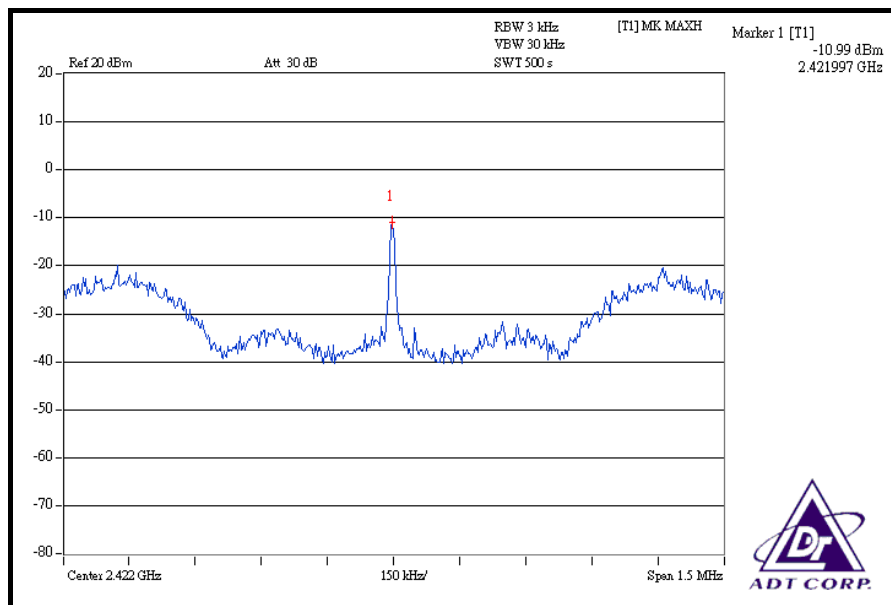


CH 6

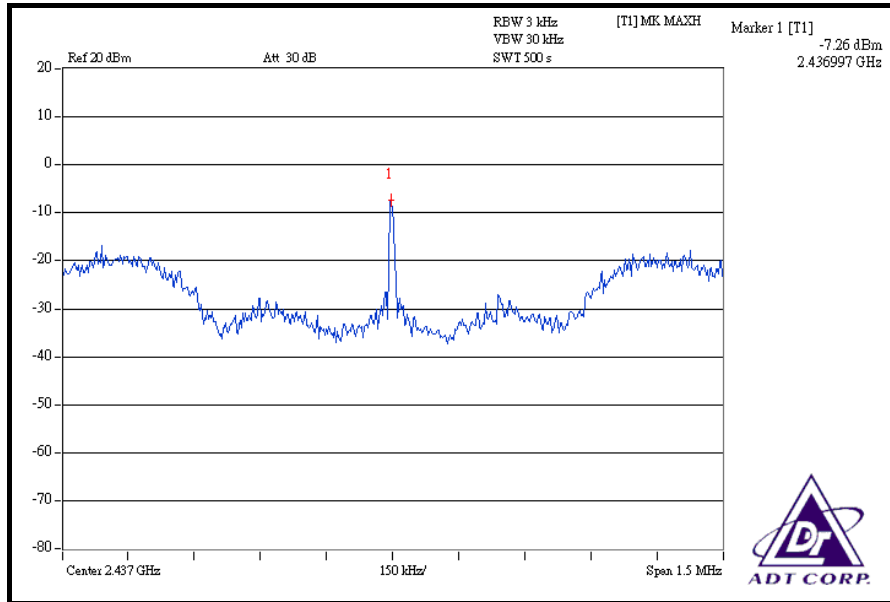


CH 11

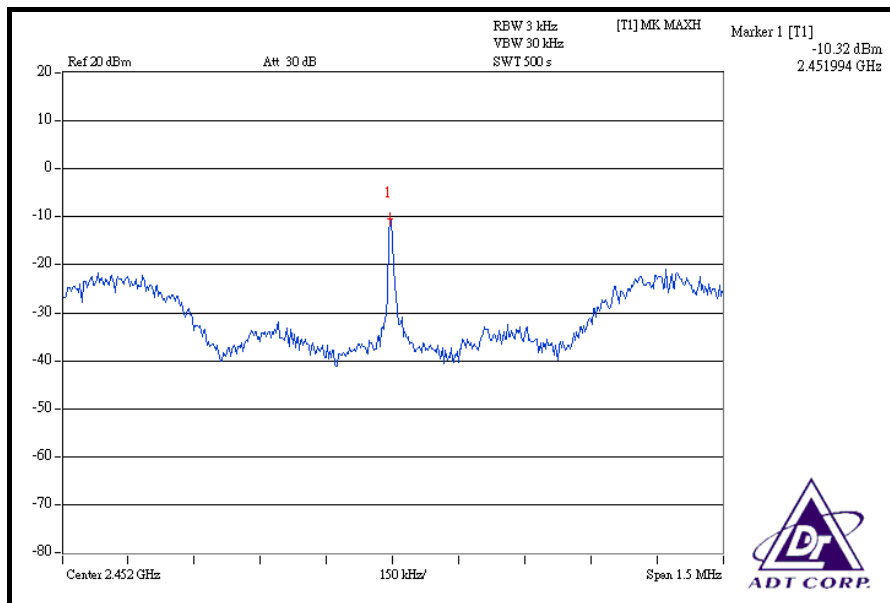


FOR CHAIN 1: CH 1

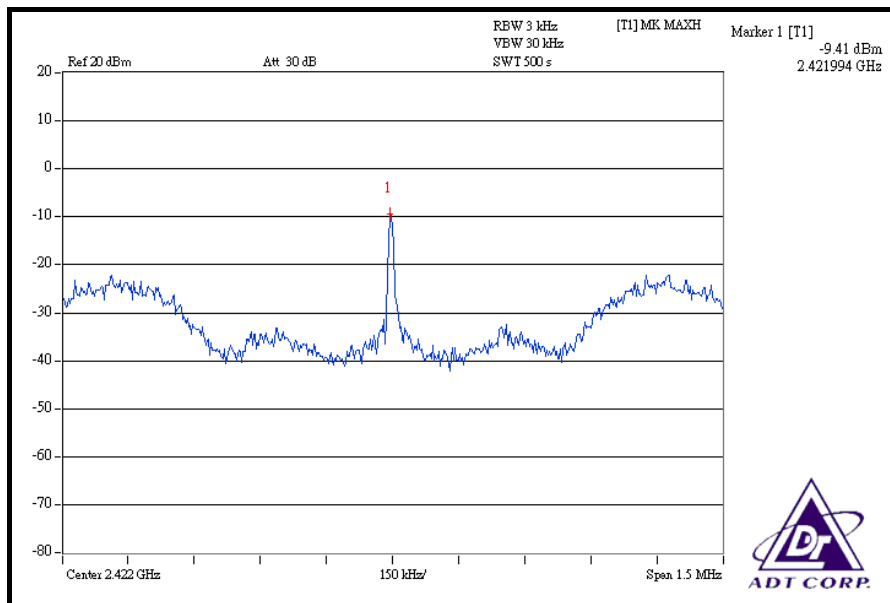

CH 6

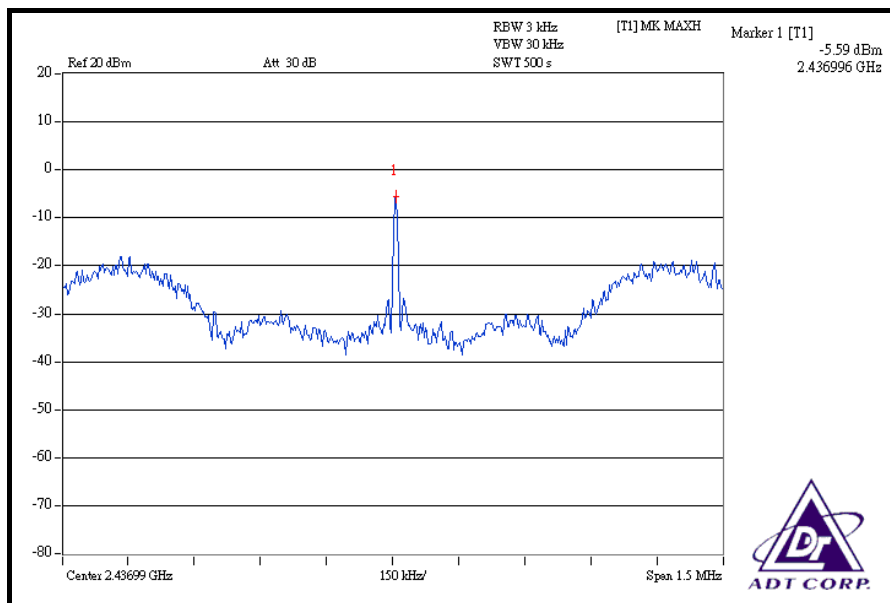

CH 11

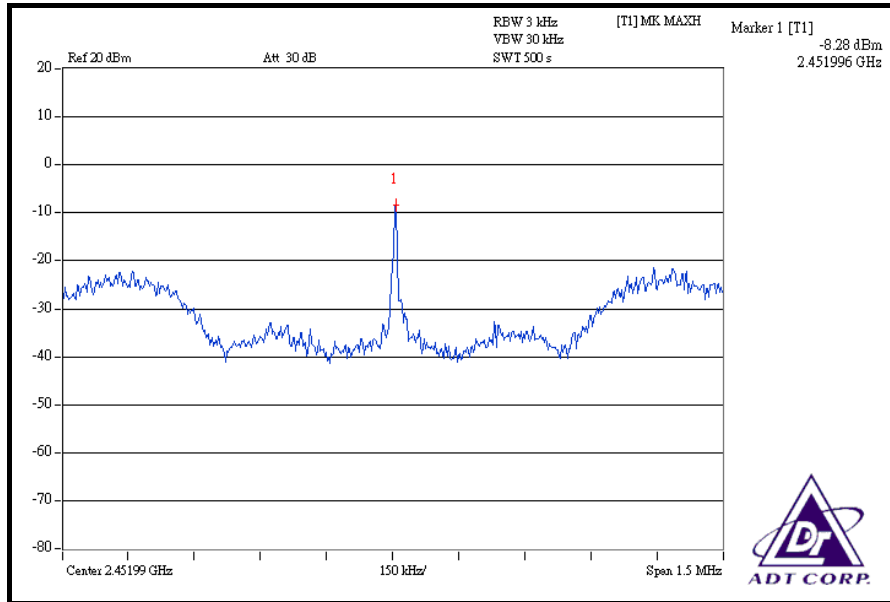



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-------------------|-------------|------------------|
| FOR CONDUCTED MEASUREMENT: | | | |
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |
| FOR RADIATED MEASUREMENT: | | | |
| Spectrum Analyzer Agilent | FSP | 100041 | Apr. 21, 2009 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | May, 01, 2009 |
| HORN Antenna SCHWARZBECK | 9120D | 9120D-209 | Jun. 23, 2009 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Dec. 24, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 283402/4 | Dec. 06, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 251644/4 | Dec. 06, 2008 |
| Software ADT. | ADT_Radiated_V7.6 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

FOR RADIATED MEASUREMENT:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION



NOTE 1: The band edge emission plot on the next page shows 55.94dBc between carrier maximum power and local maximum emission in restrict band (2.38920GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.52dBuV/m (Peak), so the maximum field strength in restrict band is $111.52 - 55.94 = 55.58$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 61.18dBc between carrier maximum power and local maximum emission in restrict band (2.38940GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.70dBuV/m (Average), so the maximum field strength in restrict band is $106.70 - 61.18 = 45.52$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 55.28dBc between carrier maximum power and local maximum emission in restrict band (2.48500GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.21dBuV/m (Peak), so the maximum field strength in restrict band is $112.21 - 55.28 = 56.93$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 62.07dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.42dBuV/m (Average), so the maximum field strength in restrict band is $107.42 - 62.07 = 45.35$ dBuV/m which is under 54dBuV/m limit.

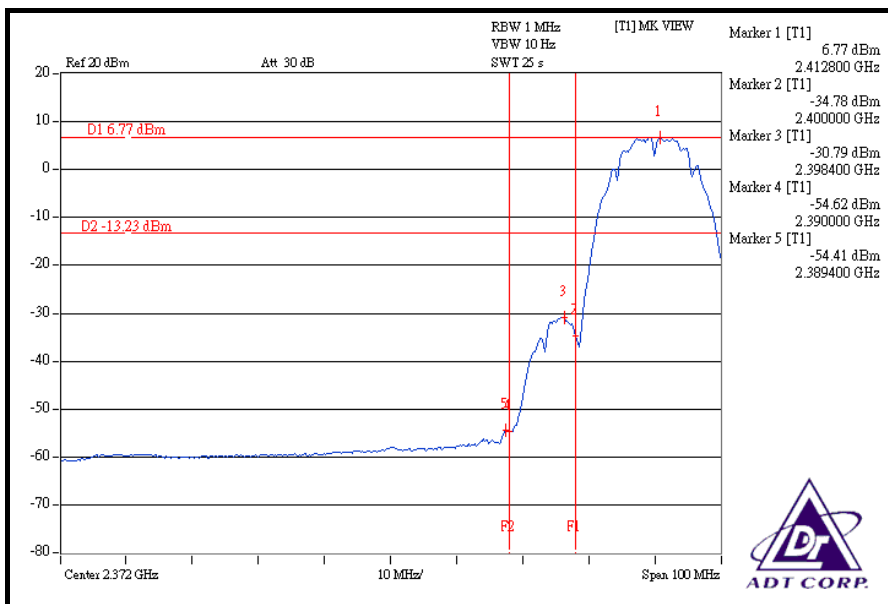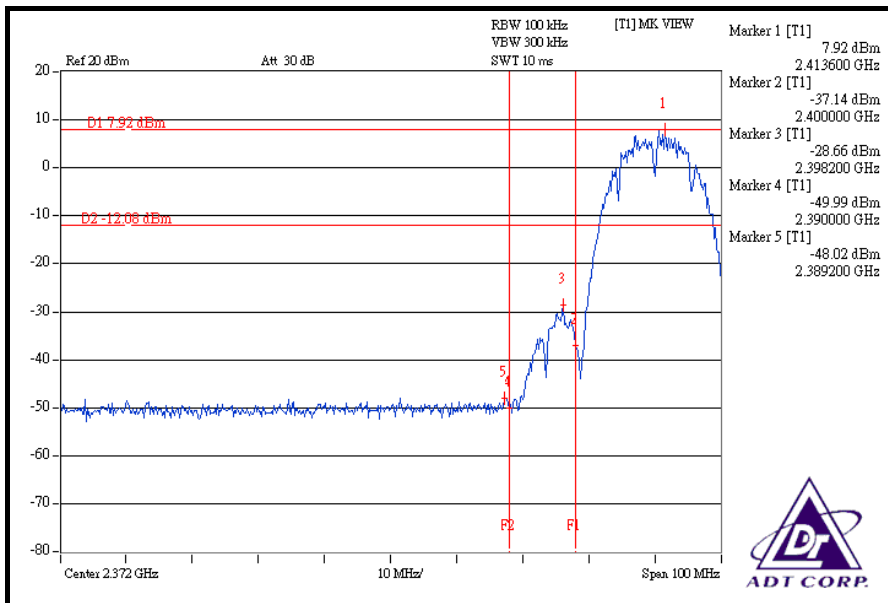

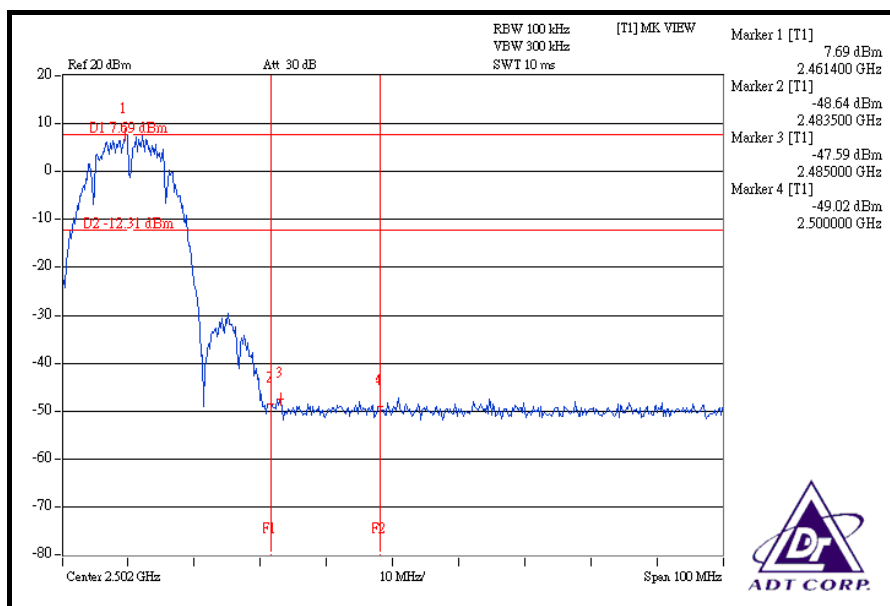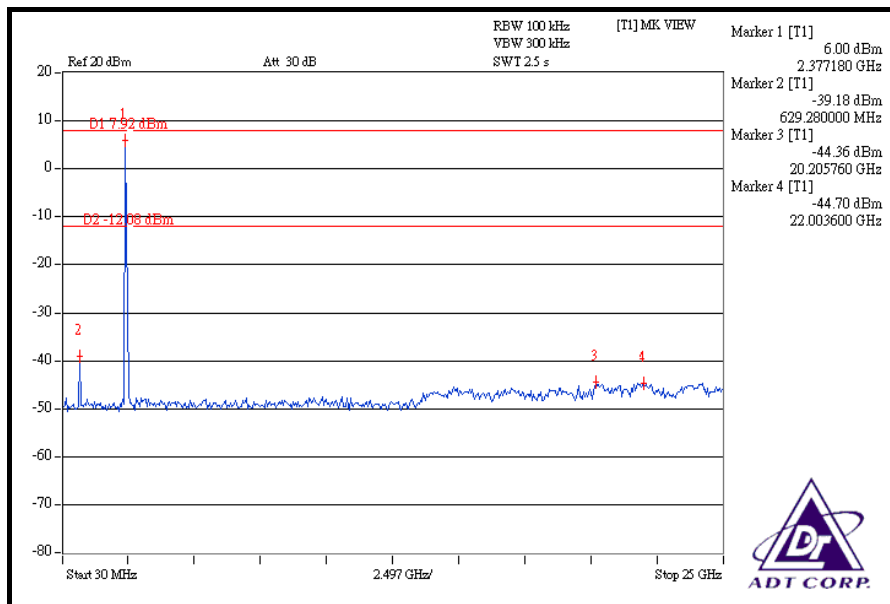

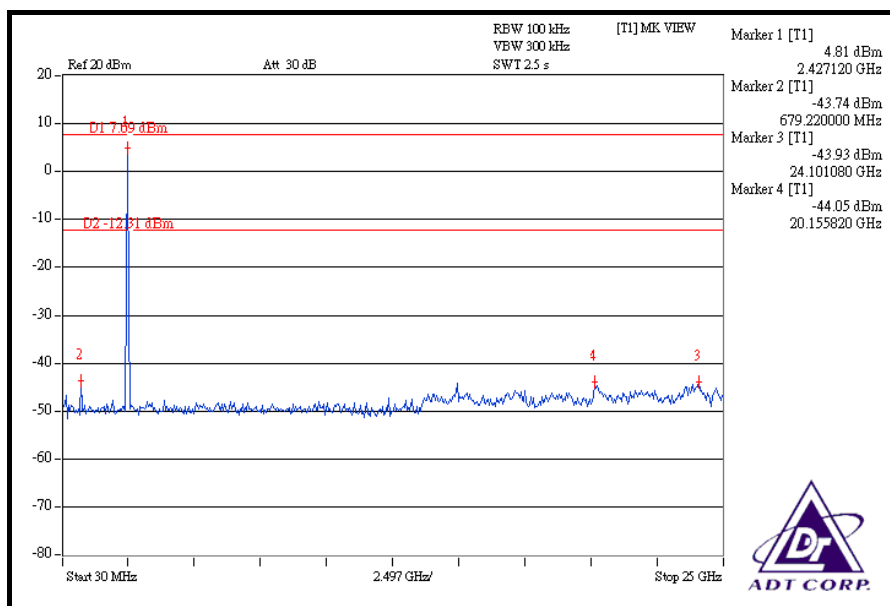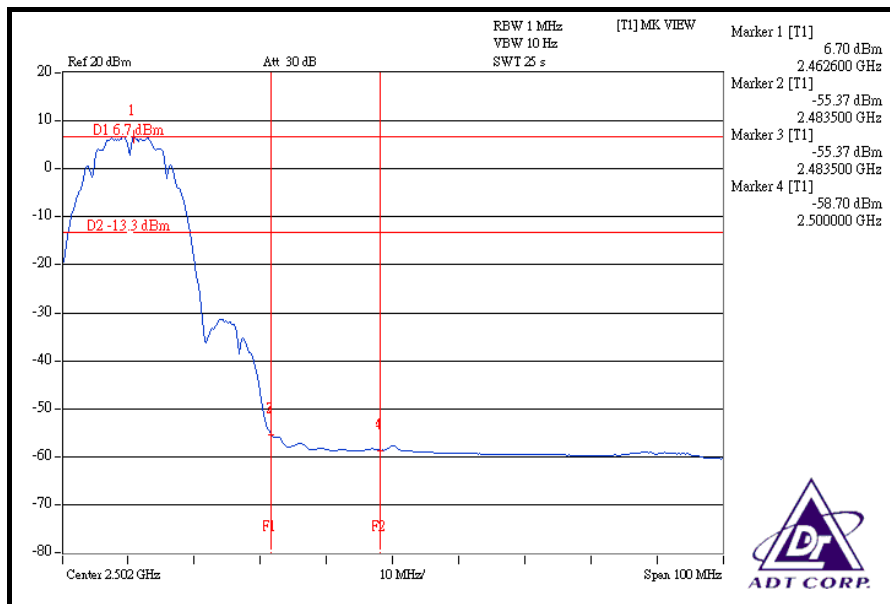



802.11g OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 45.37dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.17dBuV/m (Peak), so the maximum field strength in restrict band is $112.17 - 45.37 = 66.80$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 48.07dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.20dBuV/m (Average), so the maximum field strength in restrict band is $101.20 - 48.07 = 53.13$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 44.16dBc between carrier maximum power and local maximum emission in restrict band (2.48360GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.00dBuV/m (Peak), so the maximum field strength in restrict band is $112.00 - 44.16 = 67.84$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 47.63dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.37dBuV/m (Average), so the maximum field strength in restrict band is $100.37 - 47.63 = 52.74$ dBuV/m which is under 54dBuV/m limit.

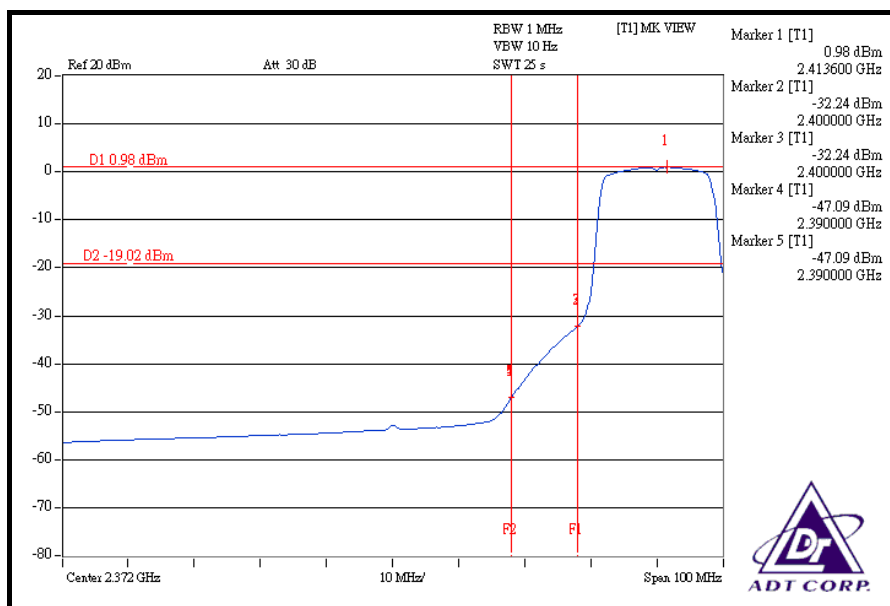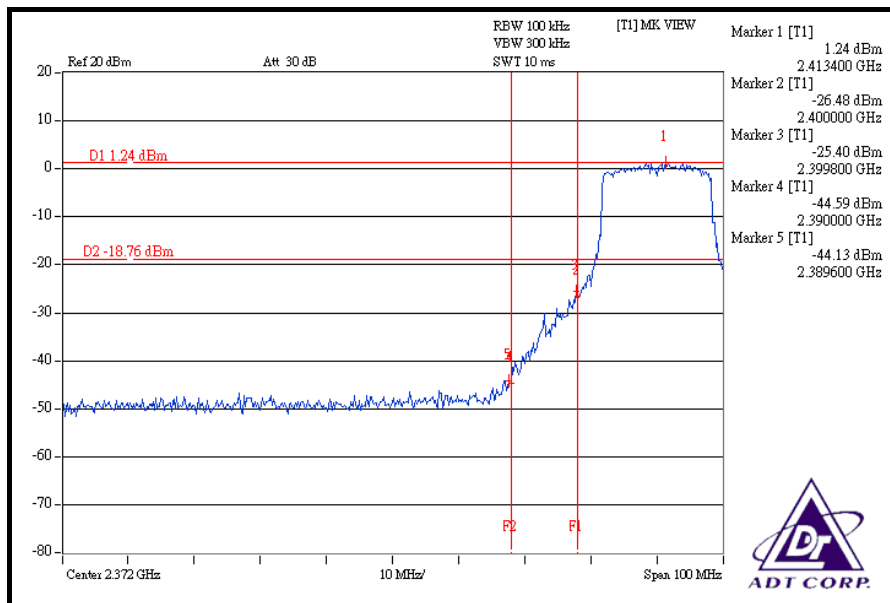

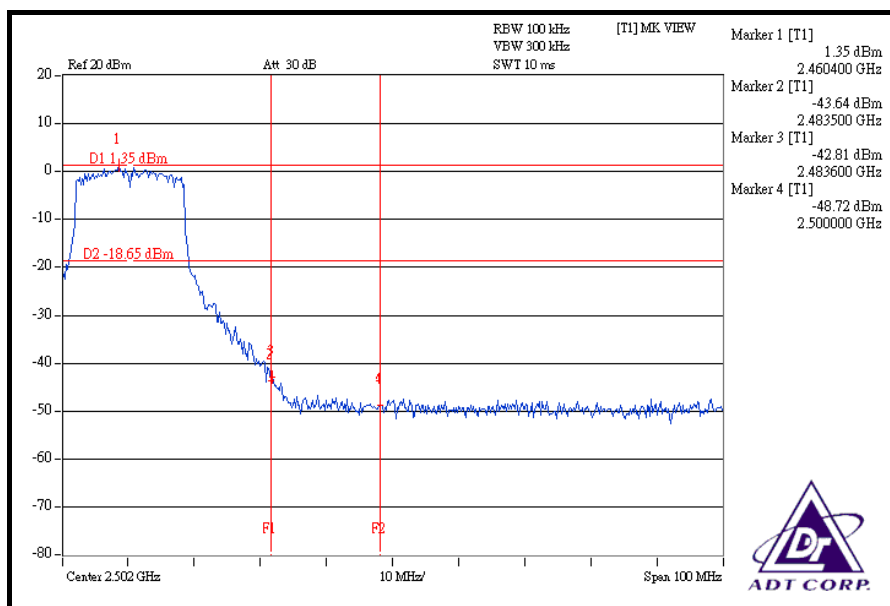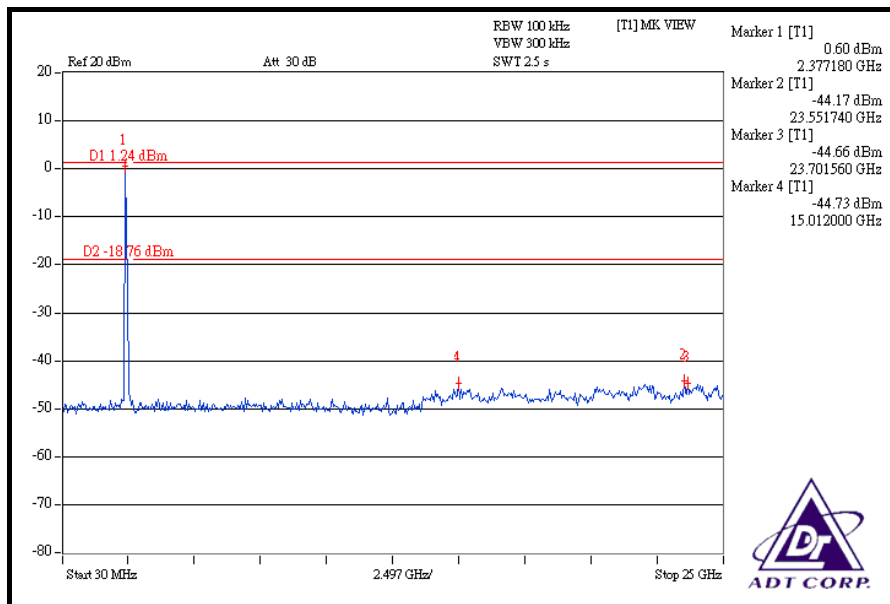

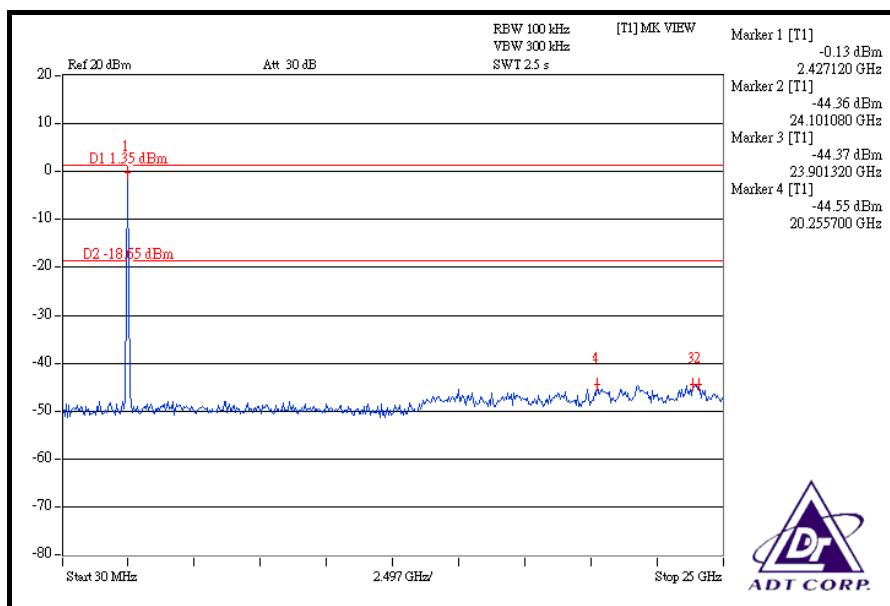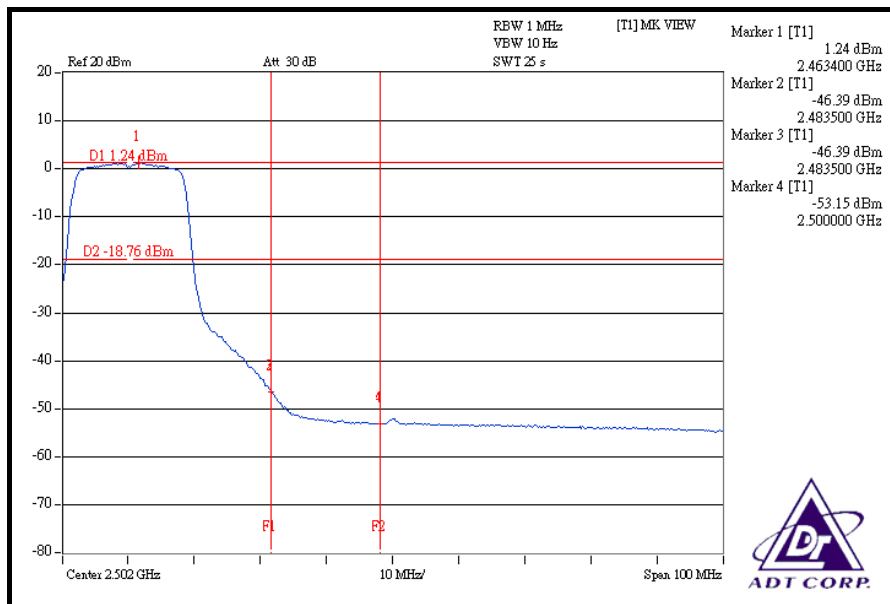



DRAFT 802.11n (20MHz) OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 48.13dBc between carrier maximum power and local maximum emission in restrict band (2.38980GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 113.84dBuV/m (Peak), so the maximum field strength in restrict band is $113.84 - 48.13 = 65.71$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 50.84dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.53dBuV/m (Average), so the maximum field strength in restrict band is $103.53 - 50.84 = 52.69$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 48.74dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 113.25dBuV/m (Peak), so the maximum field strength in restrict band is $113.25 - 48.74 = 64.51$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 51.68dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.59dBuV/m (Average), so the maximum field strength in restrict band is $102.59 - 51.68 = 50.91$ dBuV/m which is under 54dBuV/m limit.

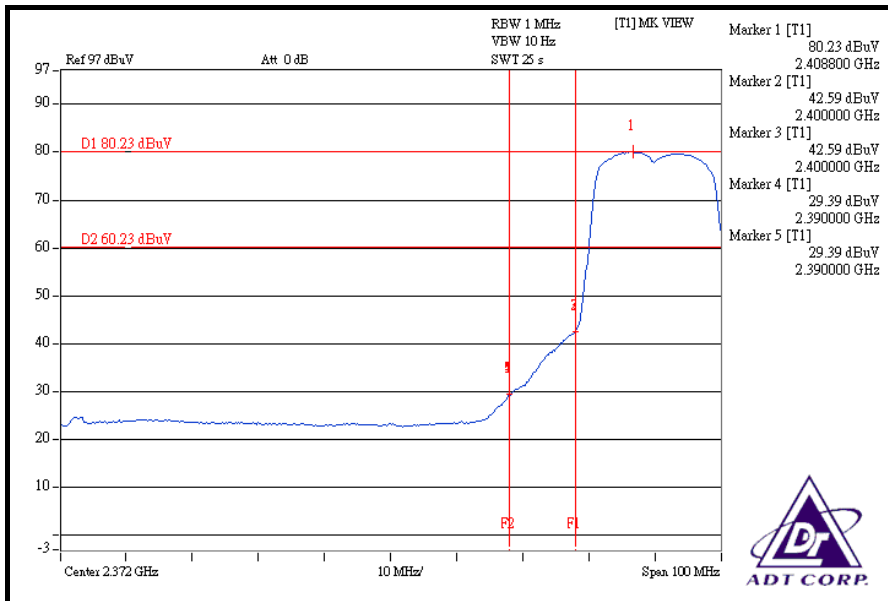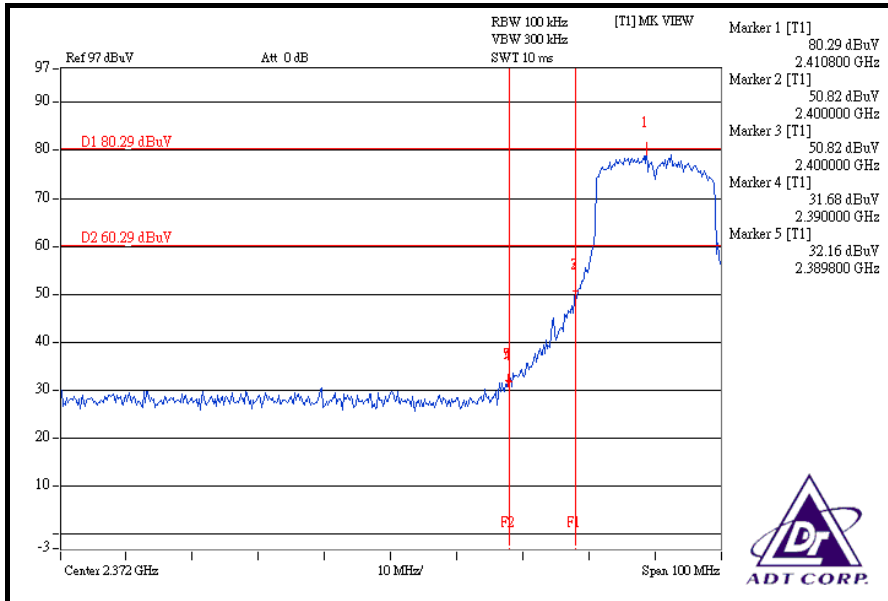

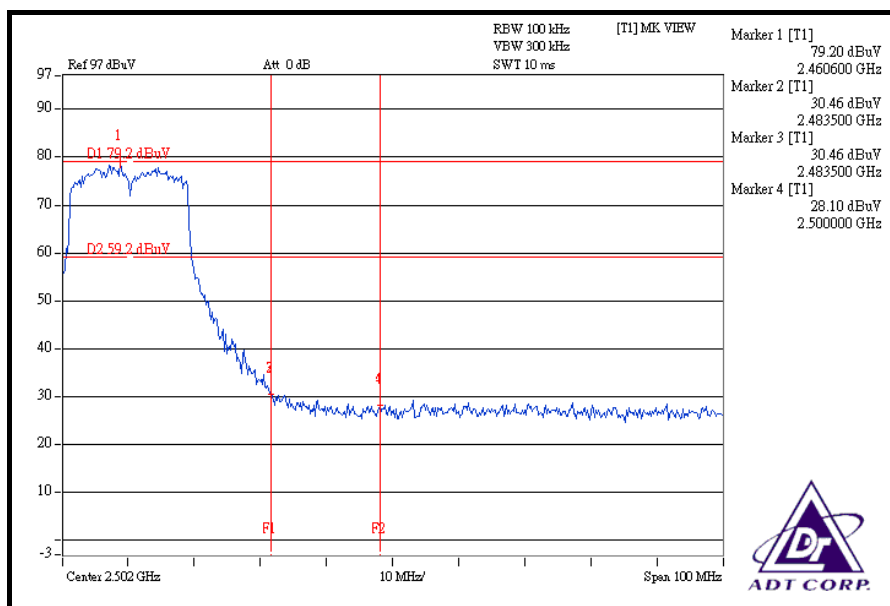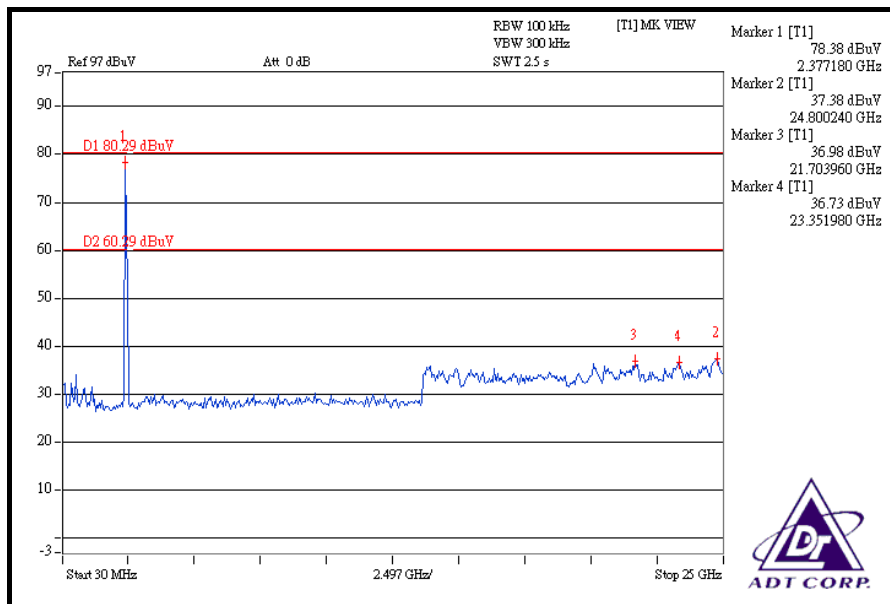

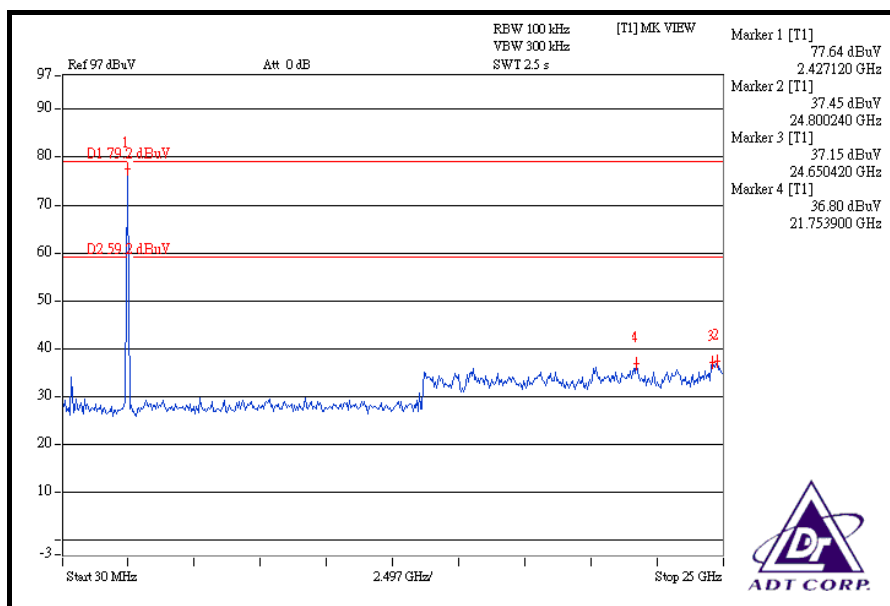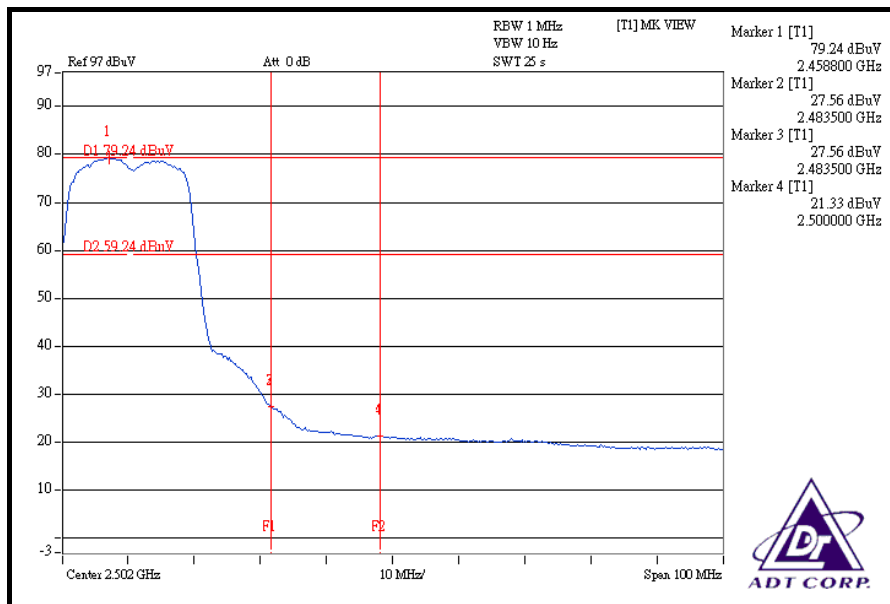



DRAFT 802.11n (40MHz) OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 40.97dBc between carrier maximum power and local maximum emission in restrict band (2.38240GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.01dBuV/m (Peak), so the maximum field strength in restrict band is $108.01 - 40.97 = 67.04$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 46.28dBc between carrier maximum power and local maximum emission in restrict band (2.38200GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.99dBuV/m (Average), so the maximum field strength in restrict band is $97.99 - 46.28 = 51.71$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 41.20dBc between carrier maximum power and local maximum emission in restrict band (2.48560GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 106.91dBuV/m (Peak), so the maximum field strength in restrict band is $106.91 - 41.20 = 65.71$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 46.90dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 96.18dBuV/m (Average), so the maximum field strength in restrict band is $96.18 - 46.90 = 49.28$ dBuV/m which is under 54dBuV/m limit.

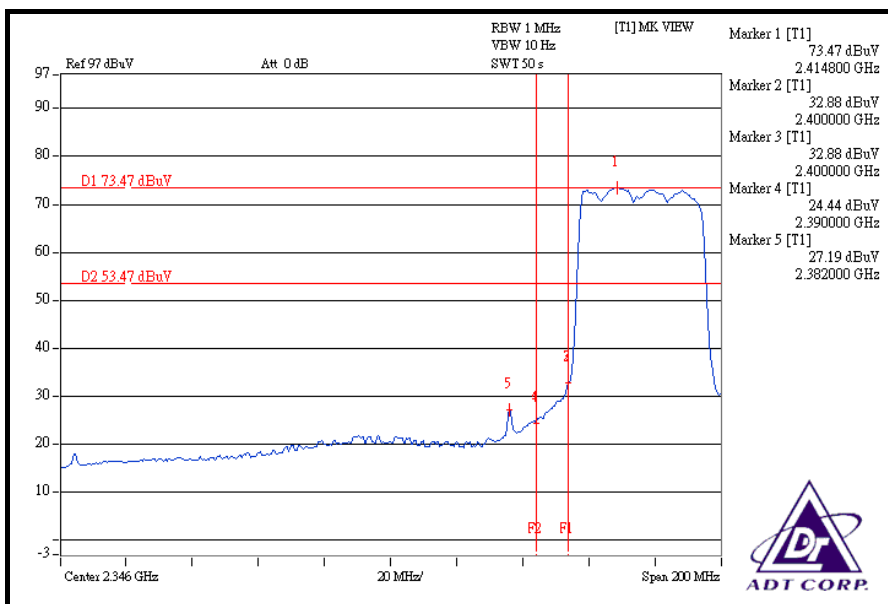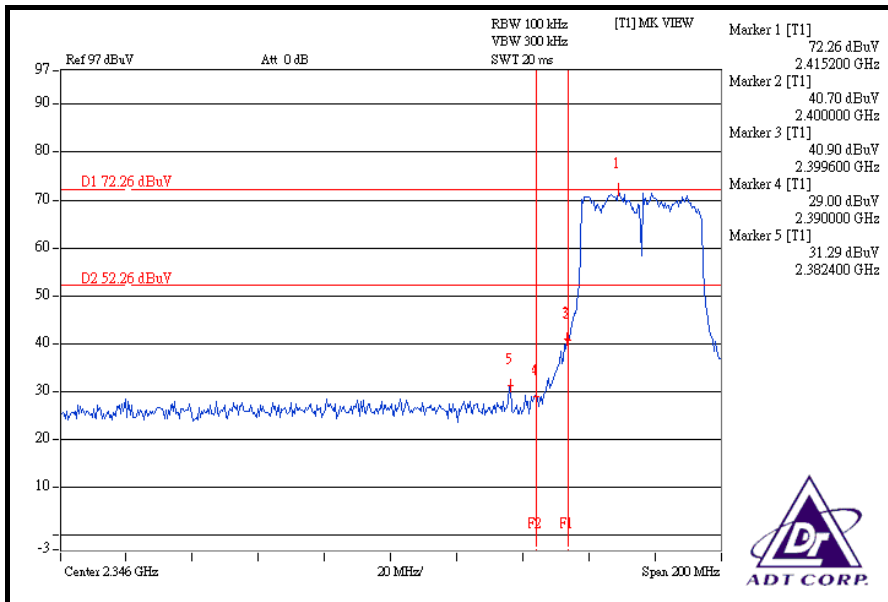

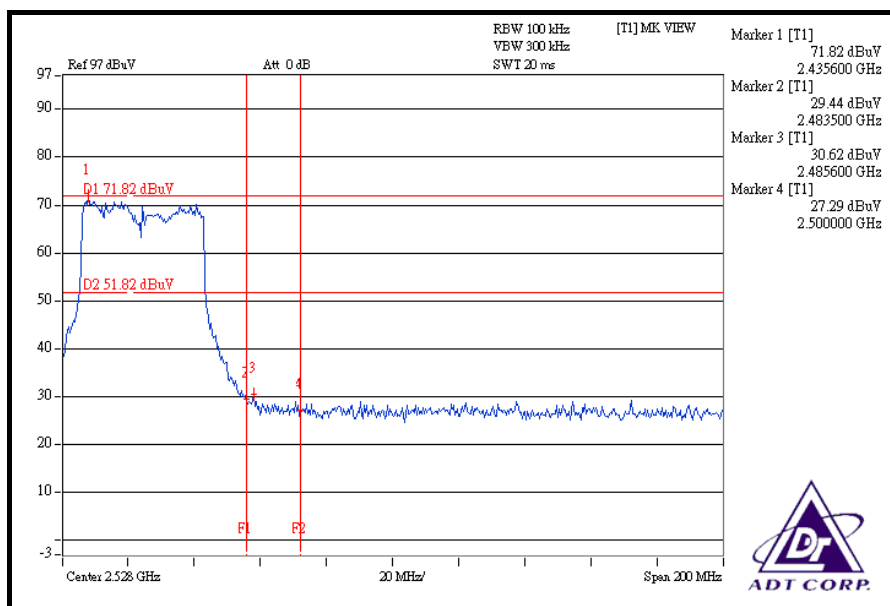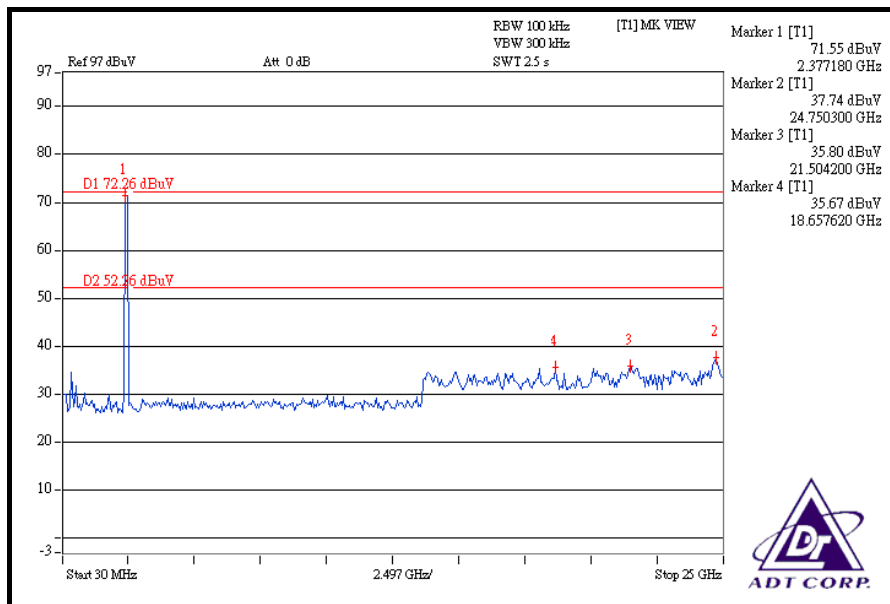

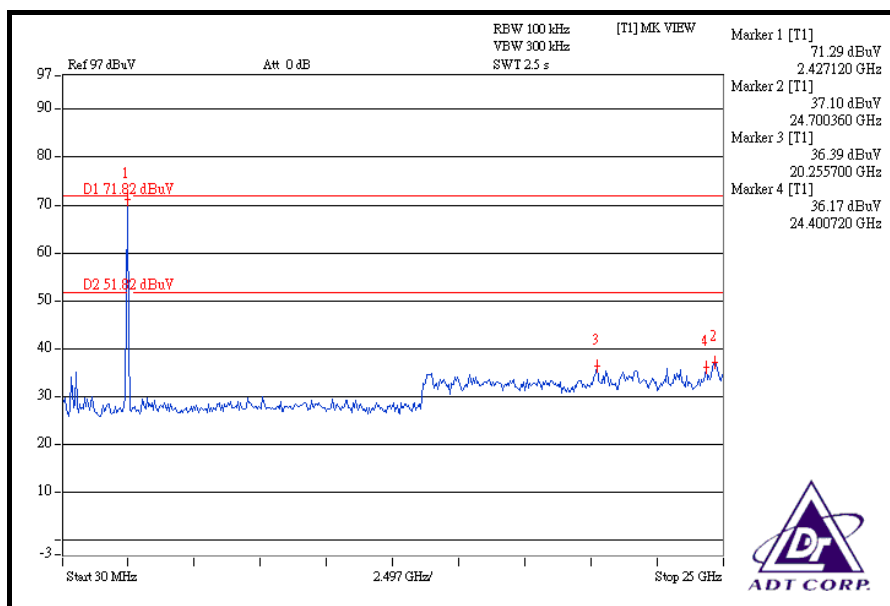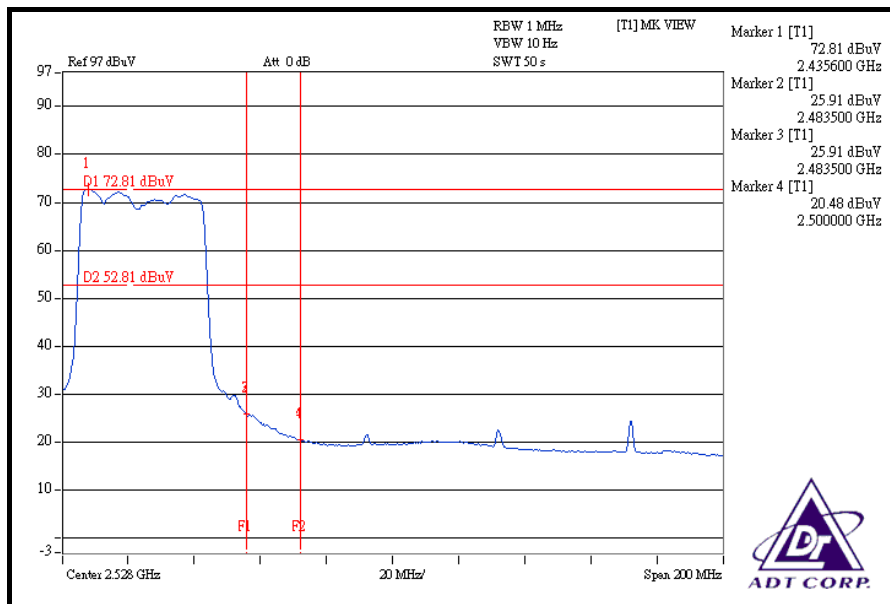



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA connector. The maximum gain of the antenna is 2dBi.

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-------------------|-------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 100033 | Jun. 29, 2009 |
| Spectrum Analyzer Agilent | FSP | 100041 | Apr. 21, 2009 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | May 01, 2009 |
| HORN Antenna SCHWARZBECK | 9120D | 9120D-209 | Jun. 23, 2009 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Dec. 24, 2008 |
| Preamplifier Agilent | 8447D | 2944A10633 | Oct. 28, 2008 |
| Preamplifier Agilent | 8449B | 3008A01964 | Oct. 23, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 283402/4 | Dec. 06, 2008 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 251644/4 | Dec. 06, 2008 |
| Software ADT. | ADT_Radiated_V7.6 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC3789B-3.

5.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

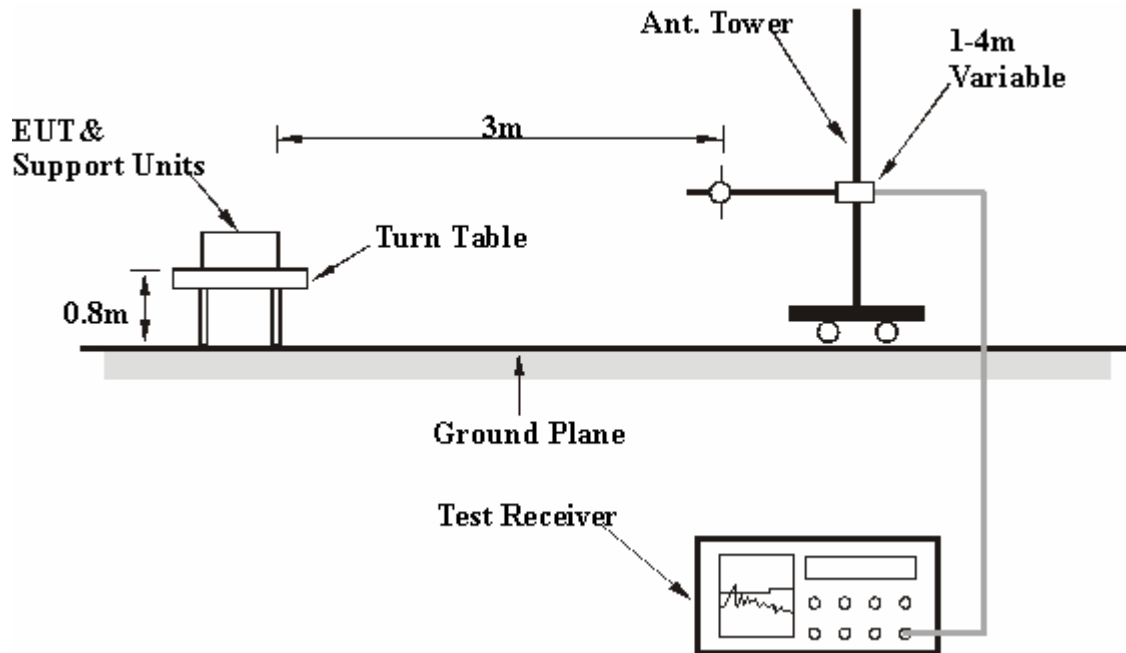

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

5.1.7 TEST RESULTS

802.11a OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 149 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.68 PK | 74.00 | -21.32 | 1.38 H | 338 | 24.57 | 28.11 |
| 2 | 1125.00 | 48.14 AV | 54.00 | -5.86 | 1.38 H | 338 | 20.03 | 28.11 |
| 3 | #5725.00 | 61.28 PK | 79.22 | -17.94 | 1.11 H | 145 | 20.21 | 41.07 |
| 4 | #5725.00 | 40.38 AV | 68.56 | -28.18 | 1.11 H | 145 | -0.69 | 41.07 |
| 5 | *5745.00 | 99.22 PK | | | 1.11 H | 145 | 58.10 | 41.12 |
| 6 | *5745.00 | 88.56 AV | | | 1.11 H | 145 | 47.44 | 41.12 |
| 7 | 11490.00 | 60.07 PK | 74.00 | -13.93 | 1.00 H | 11 | 8.14 | 51.93 |
| 8 | 11490.00 | 47.18 AV | 54.00 | -6.82 | 1.00 H | 11 | -4.75 | 51.93 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.01 PK | 74.00 | -18.99 | 1.03 V | 211 | 26.90 | 28.11 |
| 2 | 1125.00 | 49.31 AV | 54.00 | -4.69 | 1.03 V | 211 | 21.20 | 28.11 |
| 3 | #5725.00 | 70.18 PK | 86.01 | -15.83 | 1.00 V | 93 | 29.11 | 41.07 |
| 4 | #5725.00 | 44.20 AV | 75.76 | -31.56 | 1.00 V | 93 | 3.13 | 41.07 |
| 5 | *5745.00 | 106.01 PK | | | 1.00 V | 93 | 64.89 | 41.12 |
| 6 | *5745.00 | 95.76 AV | | | 1.00 V | 93 | 54.64 | 41.12 |
| 7 | 11490.00 | 60.41 PK | 74.00 | -13.59 | 1.00 V | 15 | 8.48 | 51.93 |
| 8 | 11490.00 | 47.36 AV | 54.00 | -6.64 | 1.00 V | 15 | -4.57 | 51.93 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 157 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.85 PK | 74.00 | -21.15 | 1.33 H | 38 | 24.74 | 28.11 |
| 2 | 1125.00 | 48.36 AV | 54.00 | -5.64 | 1.33 H | 38 | 20.25 | 28.11 |
| 3 | *5785.00 | 98.96 PK | | | 1.10 H | 144 | 57.75 | 41.21 |
| 4 | *5785.00 | 88.24 AV | | | 1.10 H | 144 | 47.03 | 41.21 |
| 5 | 11570.00 | 60.13 PK | 74.00 | -13.87 | 1.03 H | 24 | 8.31 | 51.82 |
| 6 | 11570.00 | 47.24 AV | 54.00 | -6.76 | 1.03 H | 24 | -4.58 | 51.82 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.26 PK | 74.00 | -18.74 | 1.06 V | 216 | 27.15 | 28.11 |
| 2 | 1125.00 | 49.58 AV | 54.00 | -4.42 | 1.06 V | 216 | 21.47 | 28.11 |
| 3 | *5785.00 | 105.93 PK | | | 1.00 V | 84 | 64.72 | 41.21 |
| 4 | *5785.00 | 95.25 AV | | | 1.00 V | 84 | 54.04 | 41.21 |
| 5 | 11570.00 | 59.66 PK | 74.00 | -14.34 | 1.00 V | 2 | 7.85 | 51.82 |
| 6 | 11570.00 | 46.89 AV | 54.00 | -7.11 | 1.00 V | 2 | -4.92 | 51.82 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 165 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.85 PK | 74.00 | -21.15 | 1.34 H | 342 | 24.74 | 28.11 |
| 2 | 1125.00 | 48.32 AV | 54.00 | -5.68 | 1.34 H | 342 | 20.21 | 28.11 |
| 3 | *5825.00 | 99.02 PK | | | 1.09 H | 142 | 57.69 | 41.33 |
| 4 | *5825.00 | 88.11 AV | | | 1.09 H | 142 | 46.78 | 41.33 |
| 5 | #5850.00 | 59.24 PK | 79.02 | -19.78 | 1.09 H | 142 | 17.83 | 41.41 |
| 6 | #5850.00 | 39.55 AV | 68.11 | -28.56 | 1.09 H | 142 | -1.86 | 41.41 |
| 7 | 11650.00 | 60.24 PK | 74.00 | -13.76 | 1.06 H | 218 | 8.48 | 51.76 |
| 8 | 11650.00 | 46.89 AV | 54.00 | -7.11 | 1.06 H | 218 | -4.87 | 51.76 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.22 PK | 74.00 | -18.78 | 1.05 V | 208 | 27.11 | 28.11 |
| 2 | 1125.00 | 49.56 AV | 54.00 | -4.44 | 1.05 V | 208 | 21.45 | 28.11 |
| 3 | *5825.00 | 105.60 PK | | | 1.01 V | 38 | 64.27 | 41.33 |
| 4 | *5825.00 | 95.10 AV | | | 1.01 V | 38 | 53.77 | 41.33 |
| 5 | #5850.00 | 65.40 PK | 85.60 | -20.20 | 1.01 V | 38 | 23.99 | 41.41 |
| 6 | #5850.00 | 43.24 AV | 75.10 | -31.86 | 1.01 V | 38 | 1.83 | 41.41 |
| 7 | 11650.00 | 60.55 PK | 74.00 | -13.45 | 1.01 V | 15 | 8.79 | 51.76 |
| 8 | 11650.00 | 47.13 AV | 54.00 | -6.87 | 1.01 V | 15 | -4.63 | 51.76 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”:The radiated frequency is out the restricted band.



DRAFT 802.11n (20MHz) OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 149 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.51 PK | 74.00 | -21.49 | 1.34 H | 345 | 24.40 | 28.11 |
| 2 | 1125.00 | 48.03 AV | 54.00 | -5.97 | 1.34 H | 345 | 19.92 | 28.11 |
| 3 | #5725.00 | 70.12 PK | 83.09 | -12.97 | 1.45 H | 142 | 29.05 | 41.07 |
| 4 | #5725.00 | 48.21 AV | 72.99 | -24.78 | 1.45 H | 142 | 7.14 | 41.07 |
| 5 | *5745.00 | 103.09 PK | | | 1.45 H | 142 | 61.97 | 41.12 |
| 6 | *5745.00 | 92.99 AV | | | 1.45 H | 142 | 51.87 | 41.12 |
| 7 | 11490.00 | 60.47 PK | 74.00 | -13.53 | 1.04 H | 18 | 8.54 | 51.93 |
| 8 | 11490.00 | 47.14 AV | 54.00 | -6.86 | 1.04 H | 18 | -4.79 | 51.93 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.43 PK | 74.00 | -18.57 | 1.04 V | 211 | 27.32 | 28.11 |
| 2 | 1125.00 | 49.77 AV | 54.00 | -4.23 | 1.04 V | 211 | 21.66 | 28.11 |
| 3 | #5725.00 | 76.52 PK | 90.74 | -14.22 | 1.32 V | 100 | 35.45 | 41.07 |
| 4 | #5725.00 | 54.75 AV | 80.47 | -25.72 | 1.32 V | 100 | 13.68 | 41.07 |
| 5 | *5745.00 | 110.74 PK | | | 1.32 V | 100 | 69.62 | 41.12 |
| 6 | *5745.00 | 100.47 AV | | | 1.32 V | 100 | 59.35 | 41.12 |
| 7 | 11490.00 | 60.46 PK | 74.00 | -13.54 | 1.04 V | 26 | 8.53 | 51.93 |
| 8 | 11490.00 | 47.46 AV | 54.00 | -6.54 | 1.04 V | 26 | -4.47 | 51.93 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 157 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.96 PK | 74.00 | -21.04 | 1.31 H | 42 | 24.85 | 28.11 |
| 2 | 1125.00 | 48.48 AV | 54.00 | -5.52 | 1.31 H | 42 | 20.37 | 28.11 |
| 3 | *5785.00 | 102.65 PK | | | 1.43 H | 146 | 61.44 | 41.21 |
| 4 | *5785.00 | 92.58 AV | | | 1.43 H | 146 | 51.37 | 41.21 |
| 5 | 11570.00 | 60.56 PK | 74.00 | -13.44 | 1.06 H | 29 | 8.74 | 51.82 |
| 6 | 11570.00 | 47.25 AV | 54.00 | -6.75 | 1.06 H | 29 | -4.57 | 51.82 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.34 PK | 74.00 | -18.66 | 1.05 V | 212 | 27.23 | 28.11 |
| 2 | 1125.00 | 49.69 AV | 54.00 | -4.31 | 1.05 V | 212 | 21.58 | 28.11 |
| 3 | *5785.00 | 110.42 PK | | | 1.31 V | 102 | 69.21 | 41.21 |
| 4 | *5785.00 | 100.13 AV | | | 1.31 V | 102 | 58.92 | 41.21 |
| 5 | 11570.00 | 59.86 PK | 74.00 | -14.14 | 1.01 V | 13 | 8.04 | 51.82 |
| 6 | 11570.00 | 47.03 AV | 54.00 | -6.97 | 1.01 V | 13 | -4.79 | 51.82 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 165 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.74 PK | 74.00 | -21.26 | 1.31 H | 326 | 24.63 | 28.11 |
| 2 | 1125.00 | 48.21 AV | 54.00 | -5.79 | 1.31 H | 326 | 20.10 | 28.11 |
| 3 | *5825.00 | 97.02 PK | | | 1.45 H | 130 | 55.69 | 41.33 |
| 4 | *5825.00 | 86.91 AV | | | 1.45 H | 130 | 45.58 | 41.33 |
| 5 | #5850.00 | 48.86 PK | 77.02 | -28.16 | 1.45 H | 130 | 7.45 | 41.41 |
| 6 | #5850.00 | 36.48 AV | 66.91 | -30.43 | 1.45 H | 130 | -4.93 | 41.41 |
| 7 | 11650.00 | 60.36 PK | 74.00 | -13.64 | 1.13 H | 214 | 8.60 | 51.76 |
| 8 | 11650.00 | 46.92 AV | 54.00 | -7.08 | 1.13 H | 214 | -4.84 | 51.76 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.36 PK | 74.00 | -18.64 | 1.06 V | 212 | 27.25 | 28.11 |
| 2 | 1125.00 | 49.74 AV | 54.00 | -4.26 | 1.06 V | 212 | 21.63 | 28.11 |
| 3 | *5825.00 | 105.95 PK | | | 1.31 V | 105 | 64.62 | 41.33 |
| 4 | *5825.00 | 95.61 AV | | | 1.31 V | 105 | 54.28 | 41.33 |
| 5 | #5850.00 | 54.53 PK | 85.95 | -31.42 | 1.31 V | 105 | 13.12 | 41.41 |
| 6 | #5850.00 | 41.29 AV | 75.61 | -34.32 | 1.31 V | 105 | -0.12 | 41.41 |
| 7 | 11650.00 | 60.43 PK | 74.00 | -13.57 | 1.04 V | 26 | 8.67 | 51.76 |
| 8 | 11650.00 | 47.02 AV | 54.00 | -6.98 | 1.04 V | 26 | -4.74 | 51.76 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”:The radiated frequency is out the restricted band.

DRAFT 802.11n (40MHz) OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 151 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 52.84 PK | 74.00 | -21.16 | 1.31 H | 349 | 24.73 | 28.11 |
| 2 | 1125.00 | 48.32 AV | 54.00 | -5.68 | 1.31 H | 349 | 20.21 | 28.11 |
| 3 | #5725.00 | 66.09 PK | 78.72 | -12.63 | 1.29 H | 143 | 25.02 | 41.07 |
| 4 | #5725.00 | 45.48 AV | 68.31 | -22.83 | 1.29 H | 143 | 4.41 | 41.07 |
| 5 | *5755.00 | 98.72 PK | | | 1.29 H | 143 | 57.58 | 41.14 |
| 6 | *5755.00 | 88.31 AV | | | 1.29 H | 143 | 47.17 | 41.14 |
| 7 | 11510.00 | 60.60 PK | 74.00 | -13.40 | 1.01 H | 16 | 8.67 | 51.92 |
| 8 | 11510.00 | 47.32 AV | 54.00 | -6.68 | 1.01 H | 16 | -4.61 | 51.92 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 1125.00 | 55.23 PK | 74.00 | -18.77 | 1.05 V | 216 | 27.12 | 28.11 |
| 2 | 1125.00 | 49.46 AV | 54.00 | -4.54 | 1.05 V | 216 | 21.35 | 28.11 |
| 3 | #5725.00 | 75.84 PK | 87.48 | -11.64 | 1.40 V | 204 | 34.77 | 41.07 |
| 4 | #5725.00 | 53.40 AV | 77.21 | -23.81 | 1.40 V | 204 | 12.33 | 41.07 |
| 5 | *5755.00 | 107.48 PK | | | 1.40 V | 204 | 66.34 | 41.14 |
| 6 | *5755.00 | 97.21 AV | | | 1.40 V | 204 | 56.07 | 41.14 |
| 7 | 11510.00 | 60.74 PK | 74.00 | -13.26 | 1.01 V | 246 | 8.81 | 51.92 |
| 8 | 11510.00 | 47.54 AV | 54.00 | -6.46 | 1.01 V | 246 | -4.39 | 51.92 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”:The radiated frequency is out the restricted band.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 159 | FREQUENCY RANGE | 1 ~ 40GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH 1010hPa | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1125.00 | 52.98 PK | 74.00 | -21.02 | 1.06 H | 219 | 24.87 | 28.11 |
| 2 | 1125.00 | 48.46 AV | 54.00 | -5.54 | 1.06 H | 219 | 20.35 | 28.11 |
| 3 | *5795.00 | 98.88 PK | | | 1.24 H | 146 | 57.64 | 41.24 |
| 4 | *5795.00 | 88.35 AV | | | 1.24 H | 146 | 47.11 | 41.24 |
| 5 | #5850.00 | 52.03 PK | 78.88 | -26.85 | 1.24 H | 146 | 10.62 | 41.41 |
| 6 | #5850.00 | 37.07 AV | 68.35 | -31.28 | 1.24 H | 146 | -4.34 | 41.41 |
| 7 | 11590.00 | 60.84 PK | 74.00 | -13.16 | 1.03 H | 19 | 9.06 | 51.78 |
| 8 | 11590.00 | 47.56 AV | 54.00 | -6.44 | 1.03 H | 19 | -4.22 | 51.78 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1125.00 | 55.36 PK | 74.00 | -18.64 | 1.24 V | 69 | 27.25 | 28.11 |
| 2 | 1125.00 | 49.58 AV | 54.00 | -4.42 | 1.24 V | 69 | 21.47 | 28.11 |
| 3 | *5795.00 | 106.87 PK | | | 1.39 V | 205 | 65.63 | 41.24 |
| 4 | *5795.00 | 96.40 AV | | | 1.39 V | 205 | 55.16 | 41.24 |
| 5 | #5850.00 | 57.99 PK | 86.87 | -28.88 | 1.39 V | 205 | 16.58 | 41.41 |
| 6 | #5850.00 | 42.29 AV | 76.40 | -34.11 | 1.39 V | 205 | 0.88 | 41.41 |
| 7 | 11590.00 | 60.86 PK | 74.00 | -13.14 | 1.06 V | 29 | 9.08 | 51.78 |
| 8 | 11590.00 | 47.65 AV | 54.00 | -6.35 | 1.06 V | 29 | -4.13 | 51.78 |

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - " * ": Fundamental frequency.
 - The limit value is defined as per 15.247.
 - "#":The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA : 802.11a OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| CHANNEL | Channel 165 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | TESTED BY | Mark Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 249.60 | 44.53 QP | 46.00 | -1.47 | 1.25 H | 271 | 30.85 | 13.68 |
| 2 | 500.42 | 44.64 QP | 46.00 | -1.36 | 1.50 H | 307 | 24.14 | 20.50 |
| 3 | 624.85 | 40.65 QP | 46.00 | -5.35 | 1.25 H | 52 | 17.01 | 23.64 |
| 4 | 700.68 | 41.18 QP | 46.00 | -4.82 | 1.25 H | 196 | 15.94 | 25.24 |
| 5 | 751.23 | 40.96 QP | 46.00 | -5.04 | 1.00 H | 178 | 15.09 | 25.87 |
| 6 | 799.84 | 42.93 QP | 46.00 | -3.07 | 1.00 H | 136 | 16.55 | 26.38 |
| 7 | 875.67 | 41.88 QP | 46.00 | -4.12 | 1.00 H | 112 | 14.17 | 27.71 |
| 8 | 900.94 | 41.15 QP | 46.00 | -4.85 | 1.00 H | 7 | 13.05 | 28.10 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 53.23 | 35.88 QP | 40.00 | -4.12 | 1.00 V | 193 | 21.83 | 14.05 |
| 2 | 125.17 | 37.61 QP | 43.50 | -5.89 | 1.00 V | 307 | 25.21 | 12.40 |
| 3 | 249.60 | 44.18 QP | 46.00 | -1.82 | 1.00 V | 16 | 30.50 | 13.68 |
| 4 | 500.42 | 43.04 QP | 46.00 | -2.96 | 1.00 V | 268 | 22.54 | 20.50 |
| 5 | 875.67 | 41.42 QP | 46.00 | -4.58 | 1.00 V | 121 | 13.71 | 27.71 |
| 6 | 900.94 | 40.59 QP | 46.00 | -5.41 | 1.25 V | 169 | 12.49 | 28.10 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100291 | Nov. 21, 2008 |
| RF signal cable Woken | 5D-FB | Cable-HYC01-01 | Jan. 03, 2009 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100312 | Jun. 12, 2009 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100104 | Sep. 11, 2008 |
| Software ADT | ADT_Cond_V3 | NA | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.


5.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

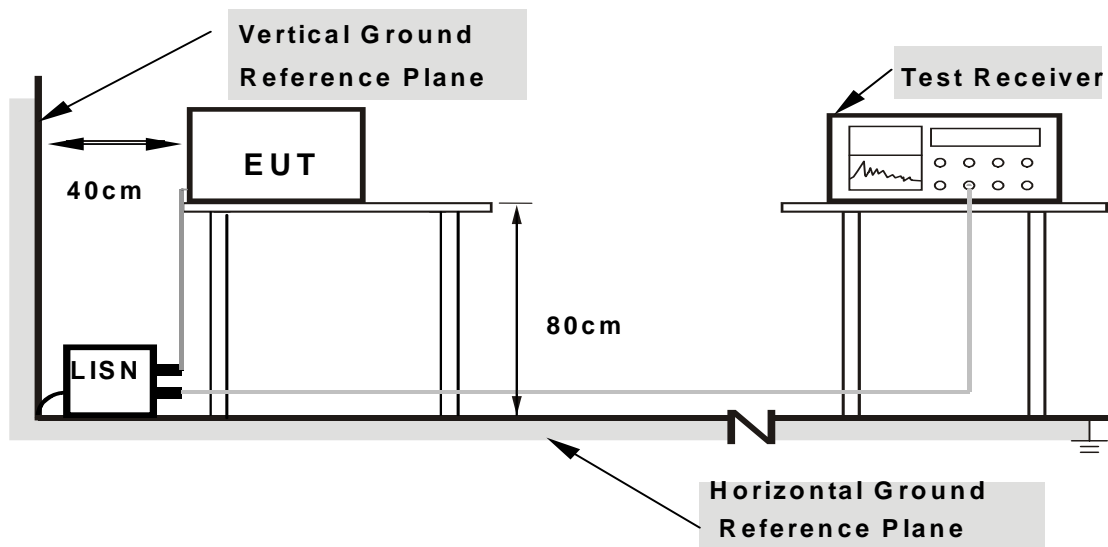

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11a OFDM MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| CHANNEL | Channel 165 | PHASE | Line 1 |
| MODULATION TYPE | BPSK | INPUT POWER | 120Vac, 60Hz |
| TRANSFER RATE | 6.0Mbps | 6dB BANDWIDTH | 9kHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | TESTED BY | Kevin Liang |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.197 | 0.20 | 50.83 | - | 51.03 | - | 63.74 | 53.74 | -12.71 | - |
| 2 | 0.260 | 0.20 | 44.37 | - | 44.57 | - | 61.42 | 51.42 | -16.85 | - |
| 3 | 0.388 | 0.20 | 44.50 | - | 44.70 | - | 58.10 | 48.10 | -13.40 | - |
| 4 | 0.455 | 0.20 | 36.98 | - | 37.18 | - | 56.79 | 46.79 | -19.61 | - |
| 5 | 0.650 | 0.20 | 31.75 | - | 31.95 | - | 56.00 | 46.00 | -24.05 | - |
| 6 | 3.887 | 0.39 | 27.40 | - | 27.79 | - | 56.00 | 46.00 | -28.21 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

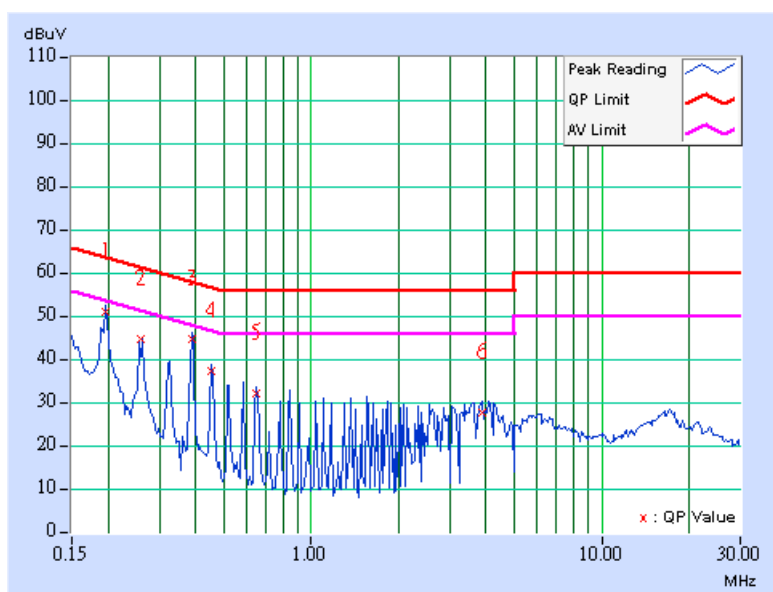

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| CHANNEL | Channel 165 | PHASE | Line 2 |
| MODULATION TYPE | BPSK | INPUT POWER | 120Vac, 60Hz |
| TRANSFER RATE | 6.0Mbps | 6dB BANDWIDTH | 9kHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | TESTED BY | Kevin Liang |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----------|--------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|--------------|---------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.194 | 0.20 | 51.73 | - | 51.93 | - | 63.85 | 53.85 | -11.92 | - |
| 2 | 0.259 | 0.20 | 46.35 | - | 46.55 | - | 61.45 | 51.45 | -14.90 | - |
| 3 | 0.390 | 0.20 | 47.47 | - | 47.67 | - | 58.07 | 48.07 | -10.40 | - |
| 4 | 0.455 | 0.20 | 39.38 | - | 39.58 | - | 56.79 | 46.79 | -17.21 | - |
| 5 | 1.359 | 0.20 | 33.68 | - | 33.88 | - | 56.00 | 46.00 | -22.12 | - |
| 6 | 3.828 | 0.38 | 29.62 | - | 30.00 | - | 56.00 | 46.00 | -26.00 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

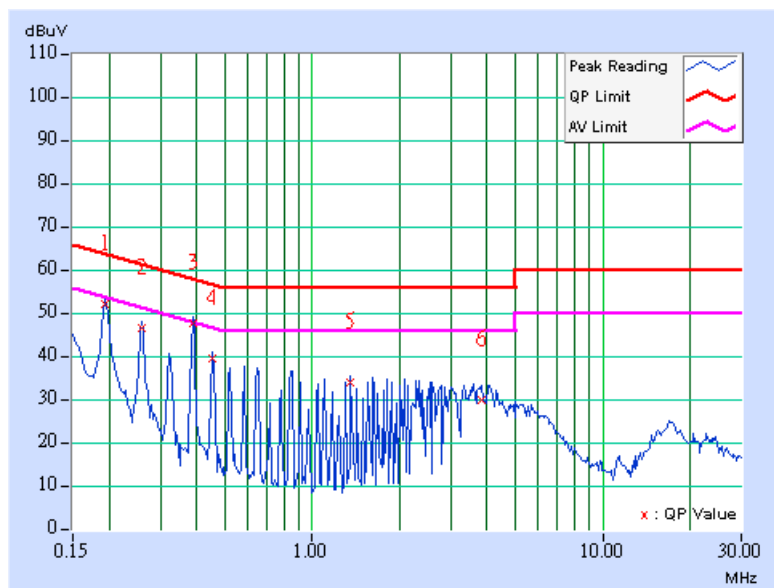



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

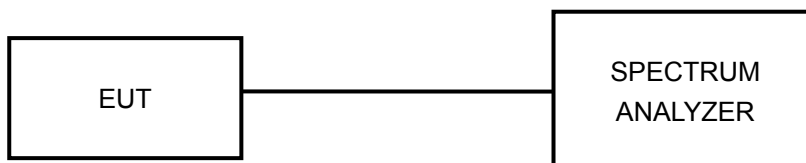

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


5.3.7 TEST RESULTS

802.11a OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 149 | 5745 | 16.37 | 0.5 | PASS |
| 157 | 5785 | 16.39 | 0.5 | PASS |
| 165 | 5825 | 16.39 | 0.5 | PASS |


CH 149

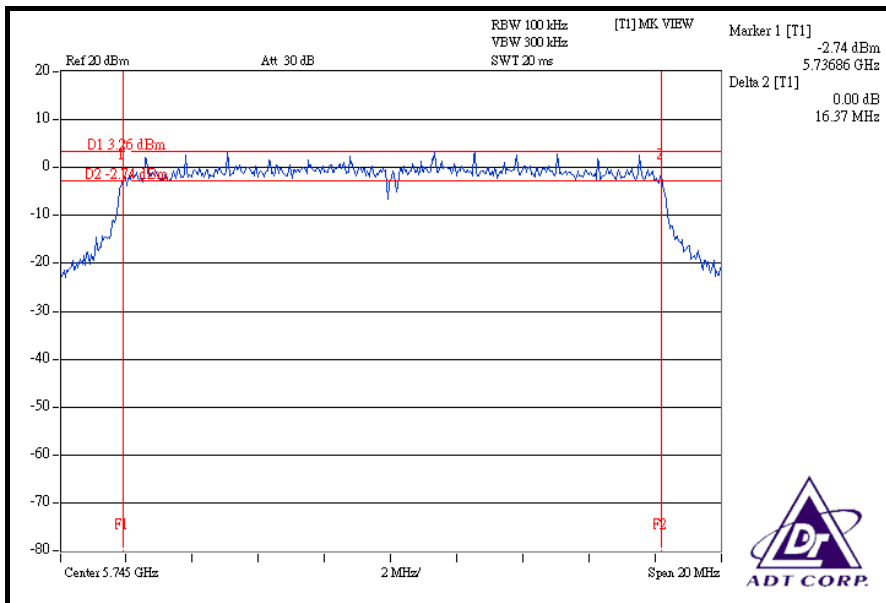

CH 157

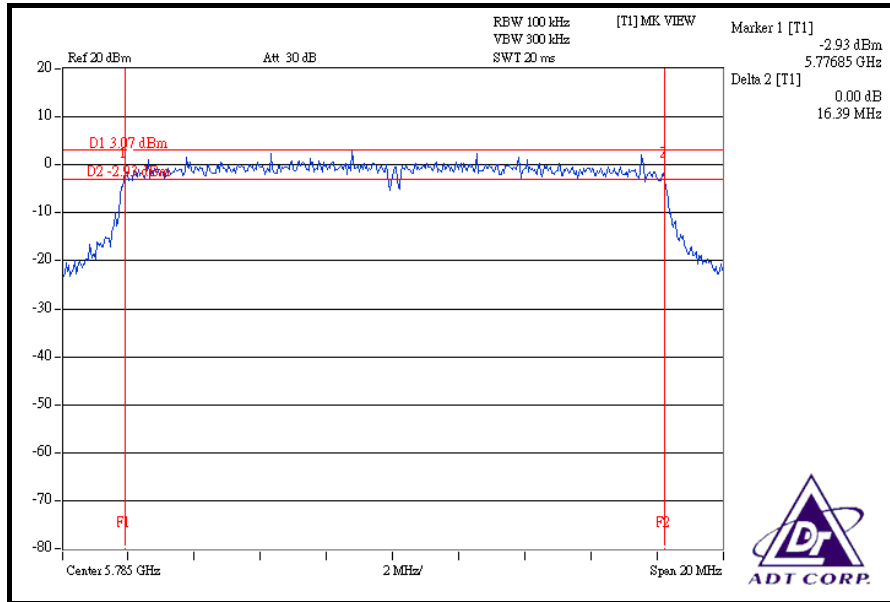

CH 165

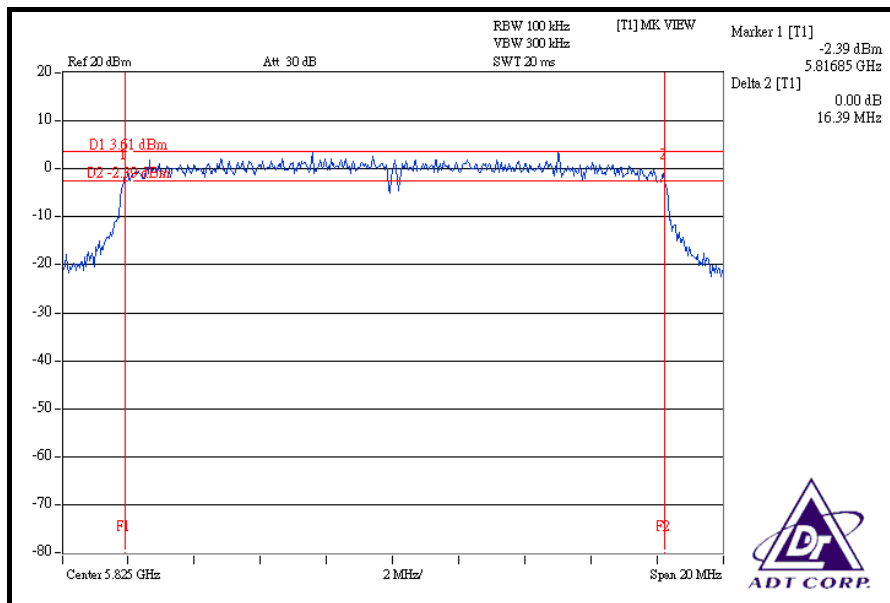




DRAFT 802.11n (20MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 149 | 5745 | 17.58 | 17.57 | 0.5 | PASS |
| 157 | 5785 | 17.58 | 17.59 | 0.5 | PASS |
| 165 | 5825 | 17.59 | 17.58 | 0.5 | PASS |


FOR CHAIN 0: CH 149

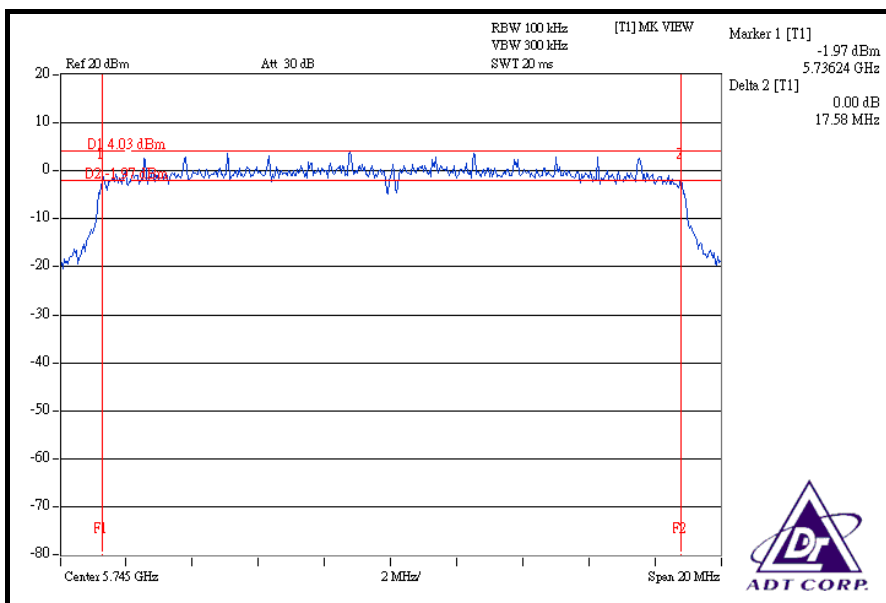


CH 157

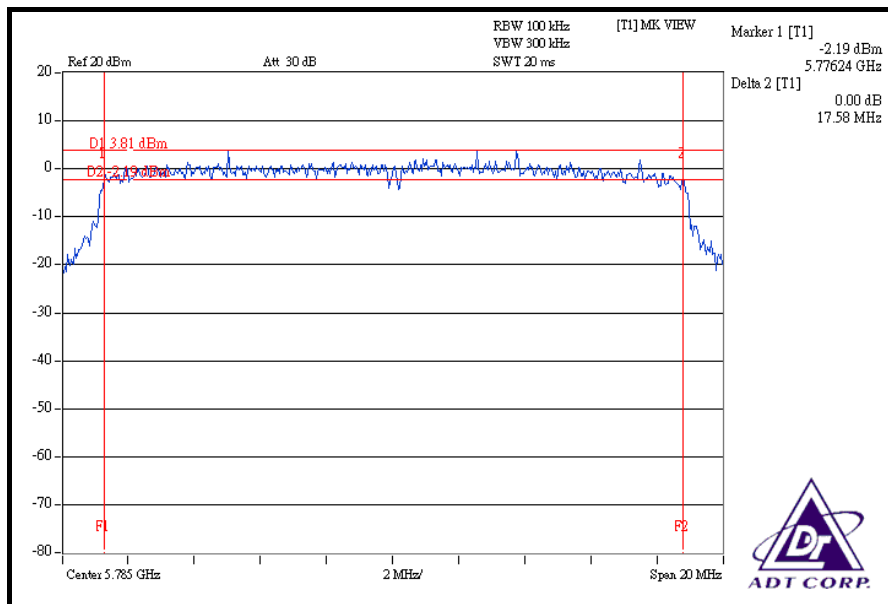


CH 165

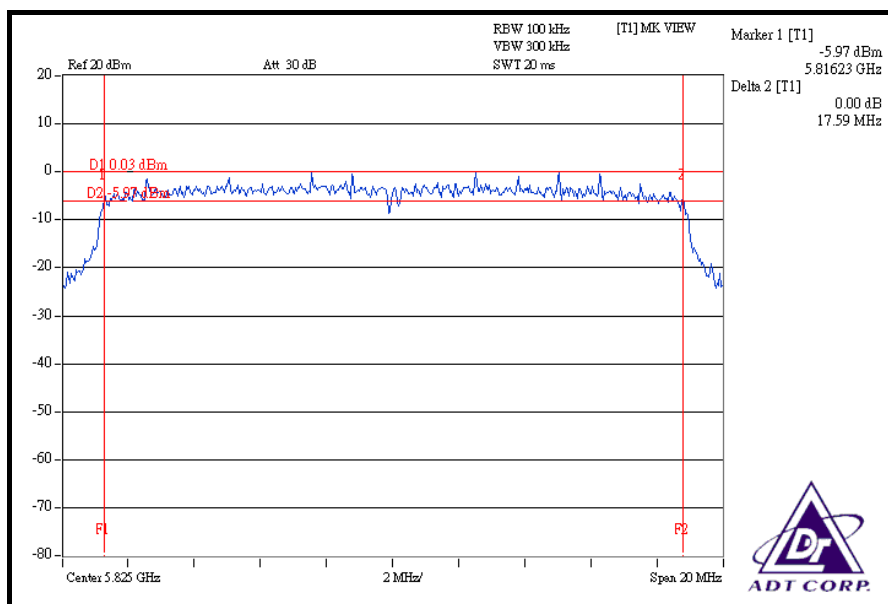

FOR CHAIN 1: CH 149

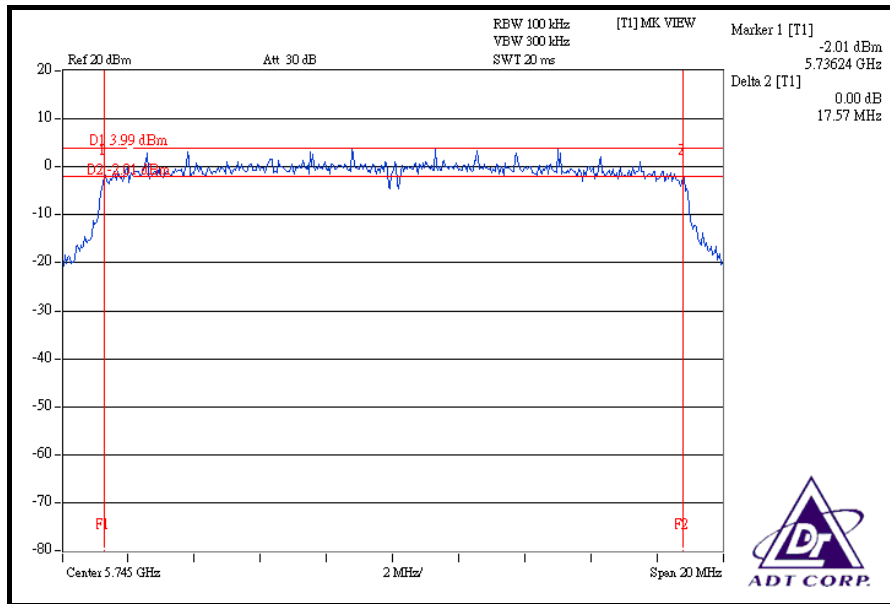


CH 157

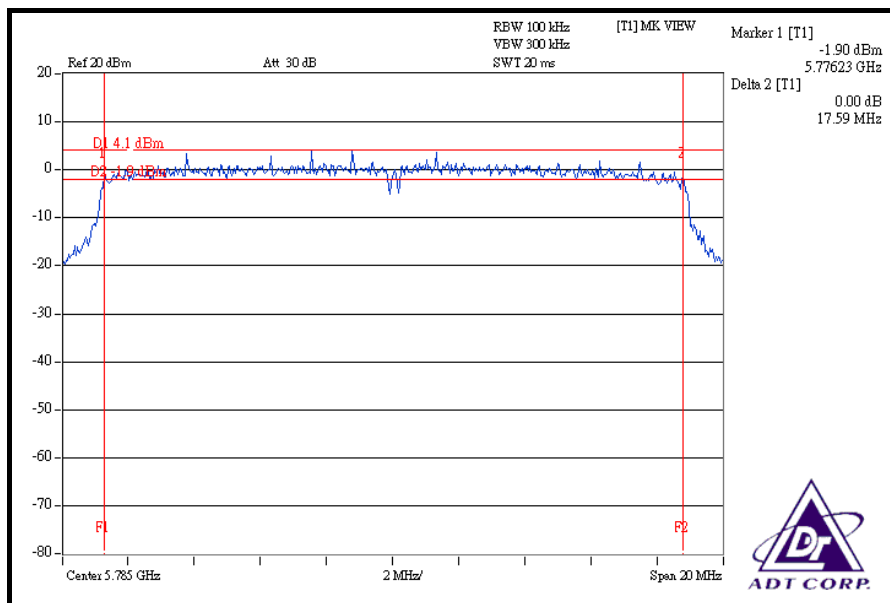



CH 165

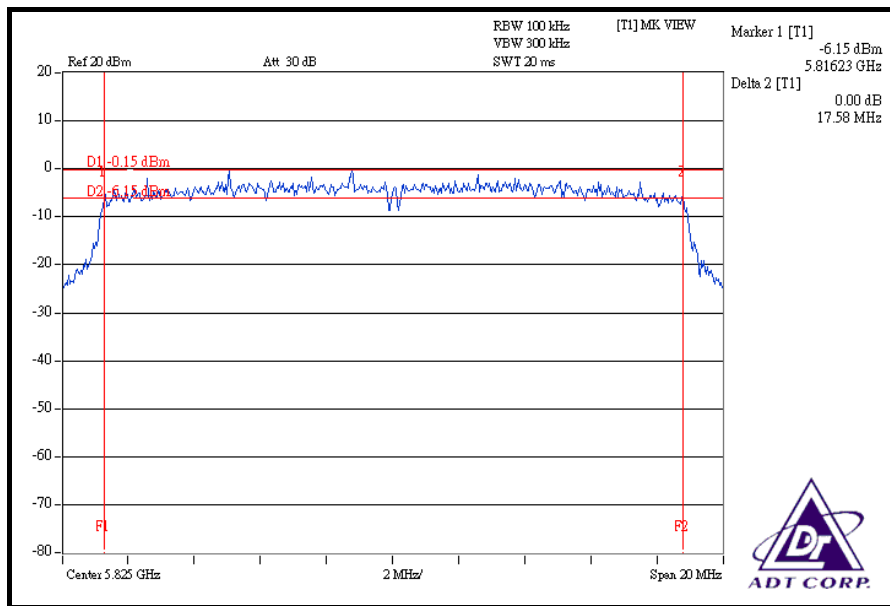




DRAFT 802.11n (40MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 151 | 5755 | 36.46 | 36.46 | 0.5 | PASS |
| 159 | 5795 | 36.46 | 36.48 | 0.5 | PASS |


FOR CHAIN 0: CH 151

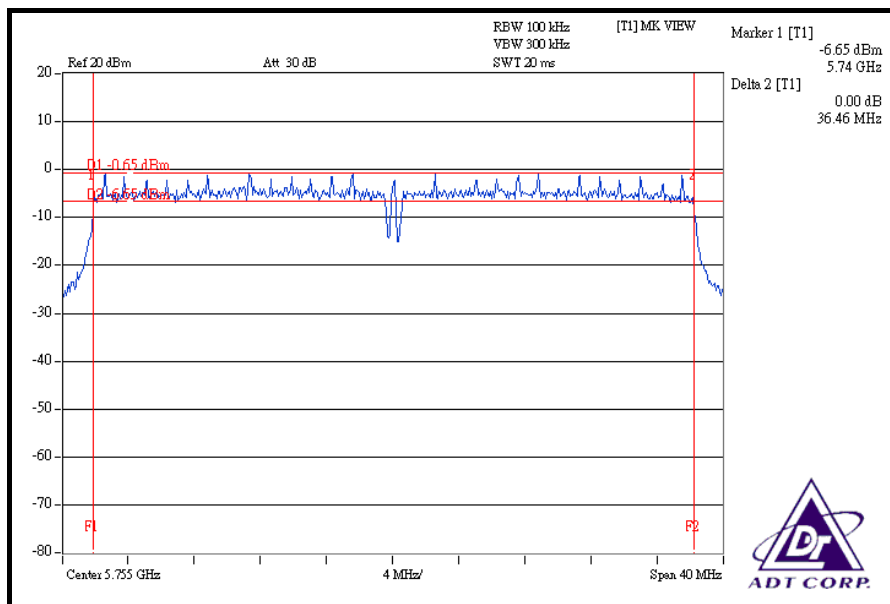


CH 159

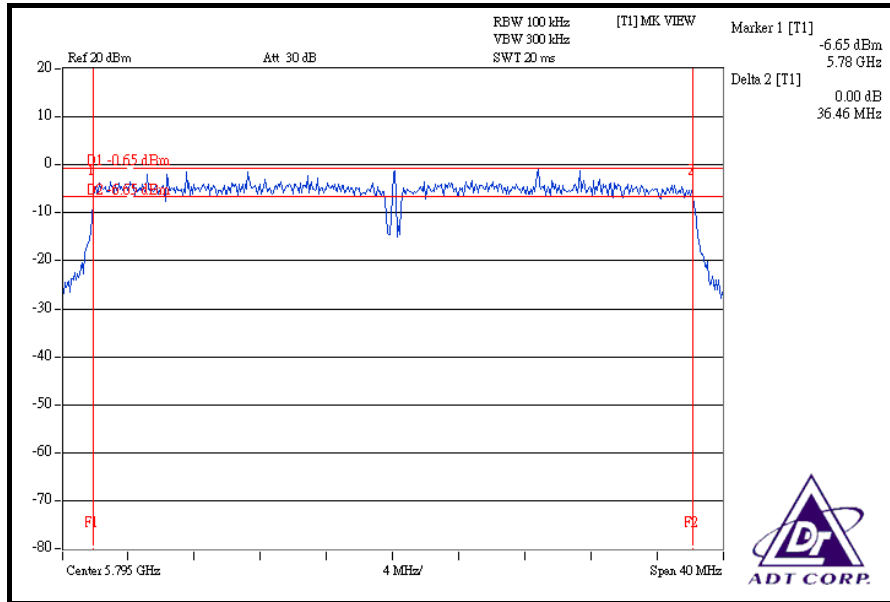

FOR CHAIN 1: CH 151

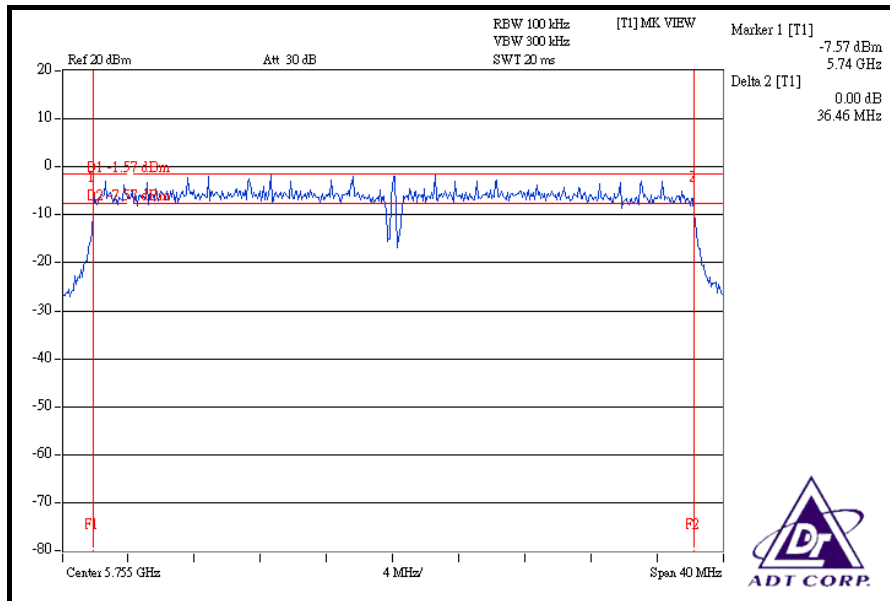

CH 159

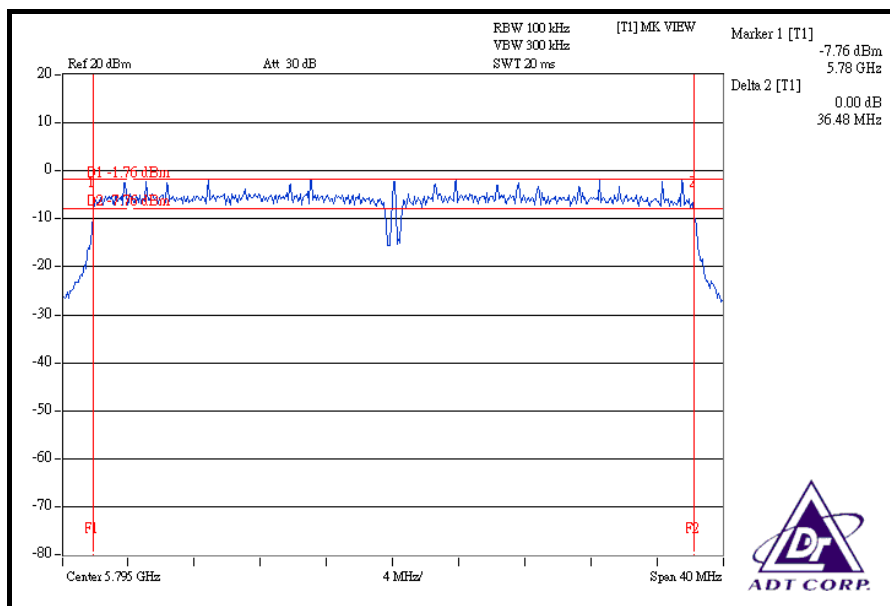



5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |
| AGILENT SYNTHESIZED SIGNAL GENERATOR | E8257C | MY43320668 | Dec. 25, 2008 |
| DIGITAL RT OSCILLOSCOPE | TDS1012 | C037299 | Nov. 21, 2008 |
| NARDA DETECTOR | 4503A | FSCM99899 | NA |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.4.3 TEST PROCEDURES

- a. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
- b. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- c. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



5.4.7 TEST RESULTS

802.11a OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 149 | 5745 | 50.816 | 17.06 | 30 | PASS |
| 157 | 5785 | 51.050 | 17.08 | 30 | PASS |
| 165 | 5825 | 56.754 | 17.54 | 30 | PASS |

DRAFT 802.11n (20MHz) OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | PEAK POWER OUTPUT (dBm) | | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|-------------------------|---------|-----------------------|------------------------|------------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 149 | 5745 | 16.60 | 16.07 | 86.166 | 19.35 | 30 | PASS |
| 157 | 5785 | 16.63 | 16.13 | 87.046 | 19.40 | 30 | PASS |
| 165 | 5825 | 12.52 | 12.07 | 33.971 | 15.31 | 30 | PASS |



DRAFT 802.11n (40MHz) OFDM MODULATION

| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | PEAK POWER OUTPUT (dBm) | | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|-------------------------|---------|-----------------------|------------------------|------------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 151 | 5755 | 15.56 | 15.05 | 67.964 | 18.32 | 30 | PASS |
| 159 | 5795 | 15.50 | 15.02 | 67.250 | 18.28 | 30 | PASS |



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation.

5.5.5 TEST SETUP

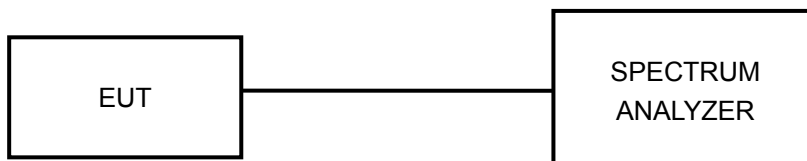

5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6.




5.5.7 TEST RESULTS

802.11a OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|---------------------------------|---------------------|-------------|
| 149 | 5745 | -4.13 | 8 | PASS |
| 157 | 5785 | -4.15 | 8 | PASS |
| 165 | 5825 | -2.18 | 8 | PASS |


CH 149

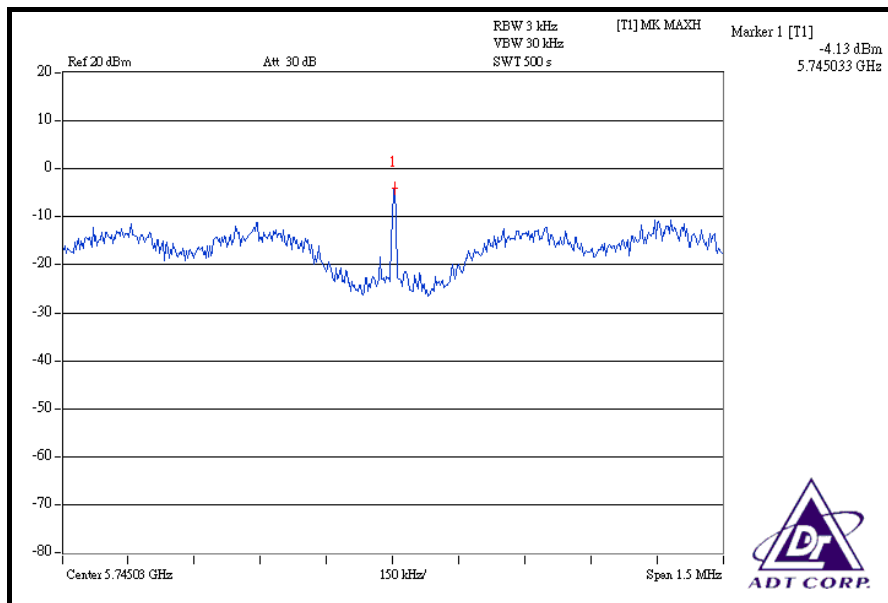

CH 157

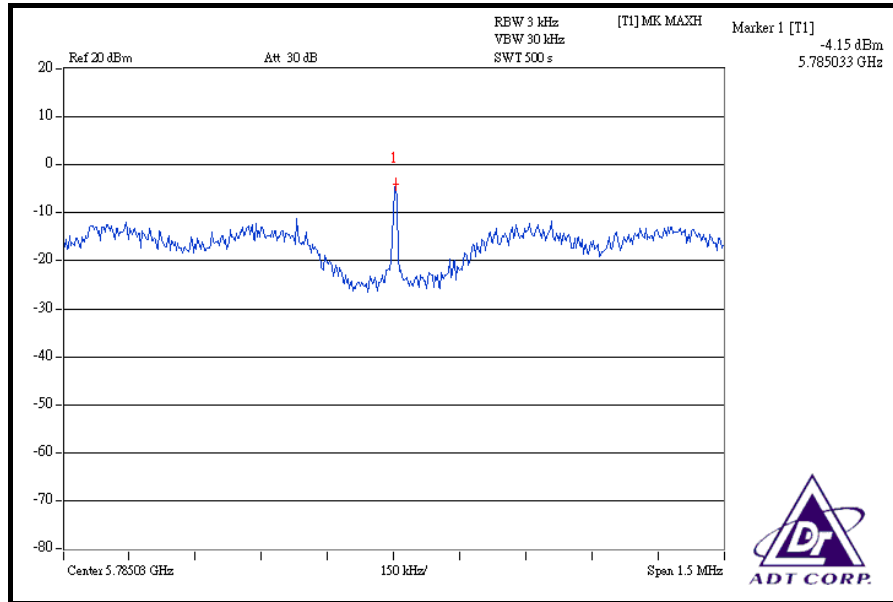

CH 165

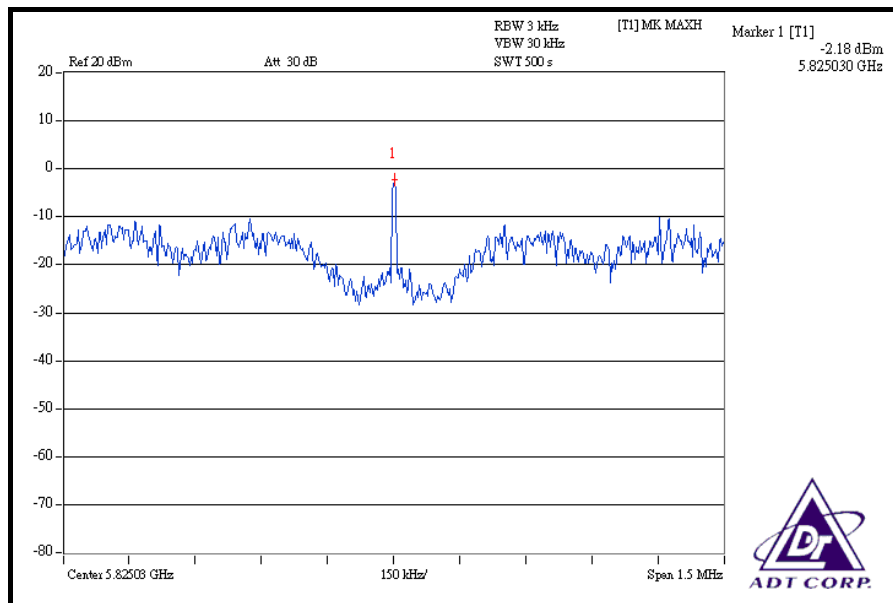




DRAFT 802.11n (20MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 7.2Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | | TOTAL POWER DENSITY (mW) | TOTAL POWER DENSITY (dBm) | MAX. LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|---------------------------------|---------|--------------------------|---------------------------|------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 149 | 5745 | -2.92 | -3.00 | 1.012 | 0.05 | 8 | PASS |
| 157 | 5785 | -3.52 | -3.49 | 0.892 | -0.49 | 8 | PASS |
| 165 | 5825 | -6.80 | -6.64 | 0.426 | -3.71 | 8 | PASS |


FOR CHAIN 0: CH 149

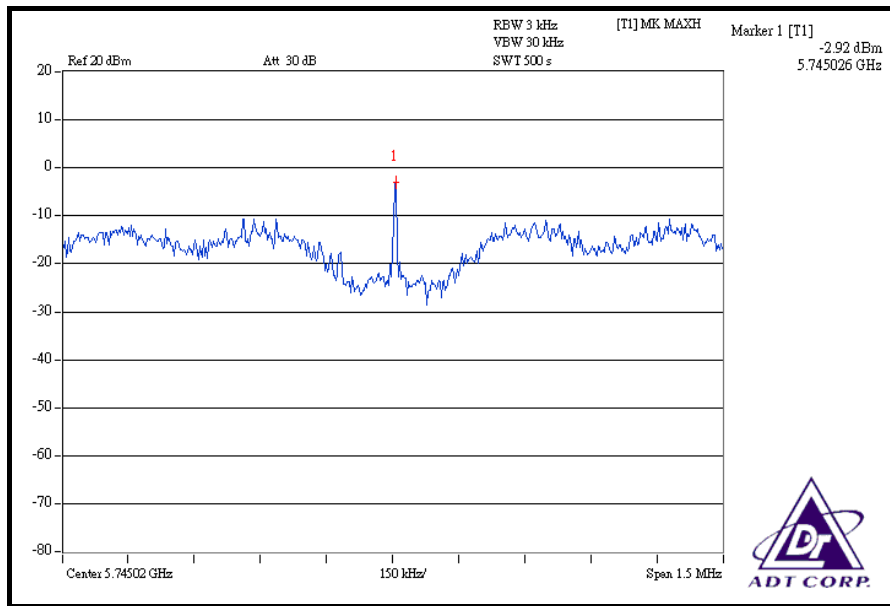


CH 157

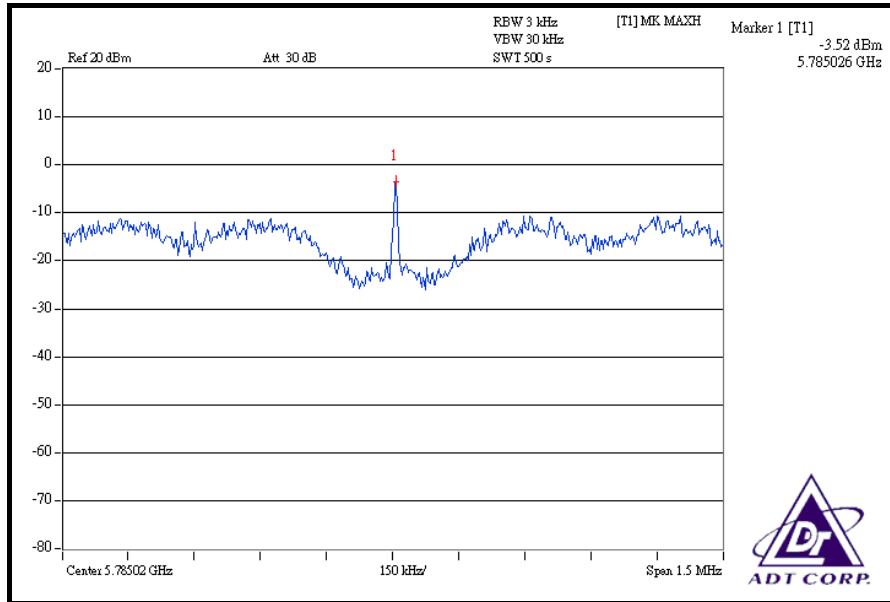


CH 165

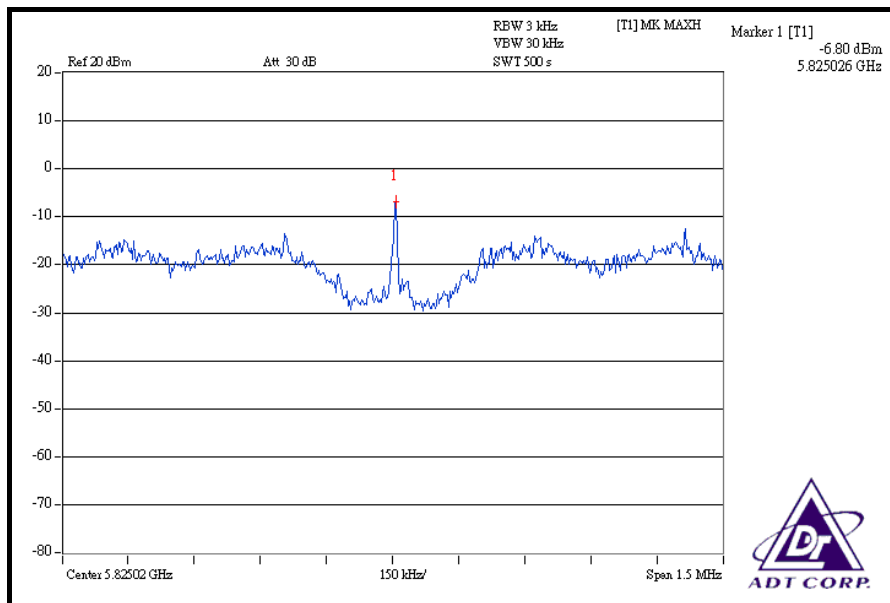


FOR CHAIN 1: CH 149

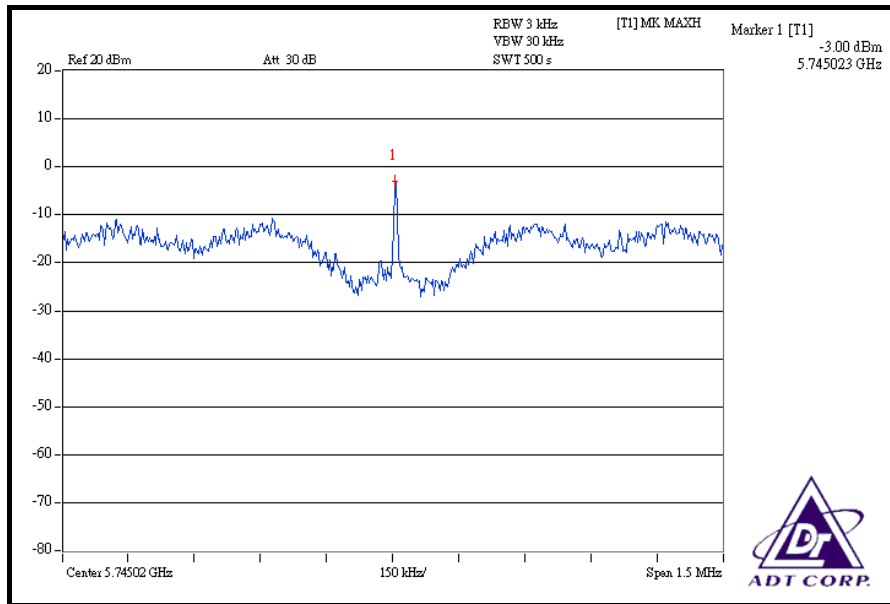

CH 157

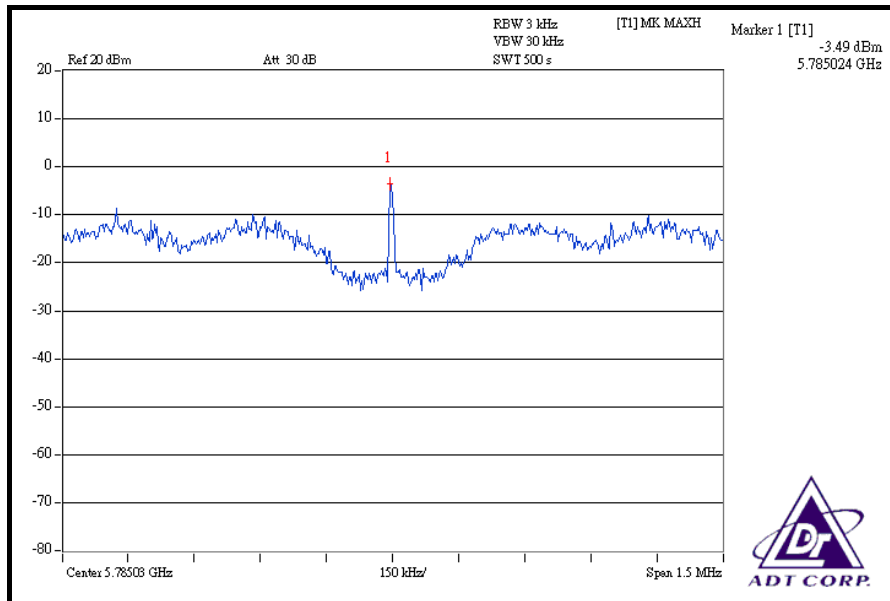

CH 165

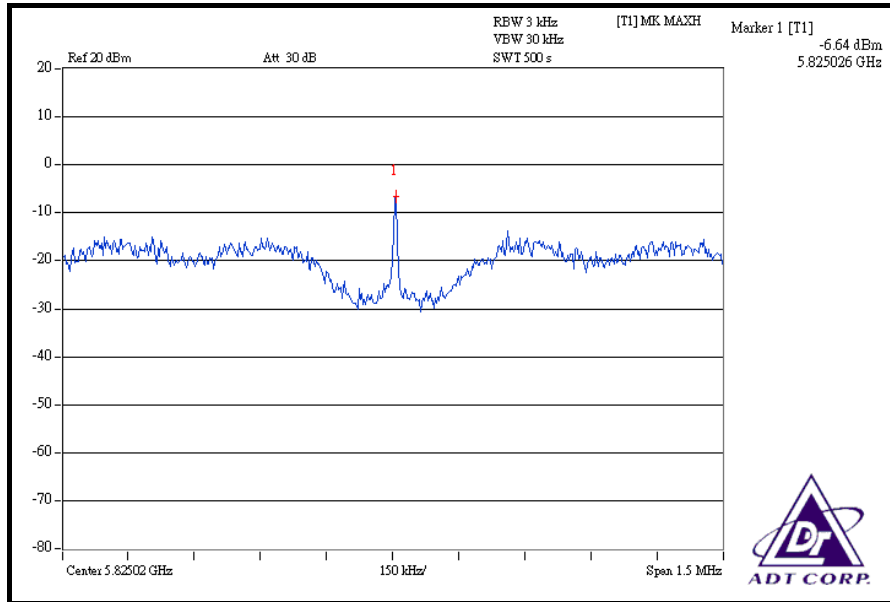




DRAFT 802.11n (40MHz) OFDM MODULATION


| | | | |
|------------------------|--------------|---------------------------------|--------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 15.0Mbps |
| INPUT POWER | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 25 deg.C, 65 %RH, 991hPa |
| TESTED BY | Brad Wu | | |

| CHAN. | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | | TOTAL POWER DENSITY (mW) | TOTAL POWER DENSITY (dBm) | MAX. LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|---------------------------------|---------|--------------------------|---------------------------|------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 151 | 5755 | -3.03 | -3.19 | 0.977 | -0.10 | 8 | PASS |
| 159 | 5795 | -2.51 | -3.84 | 0.974 | -0.11 | 8 | PASS |


FOR CHAIN 0: CH 151

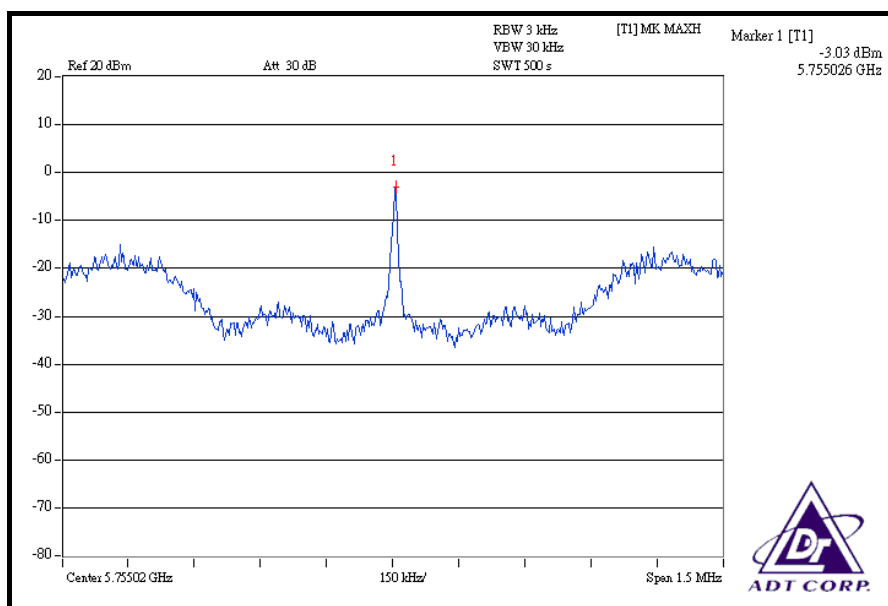


CH 159

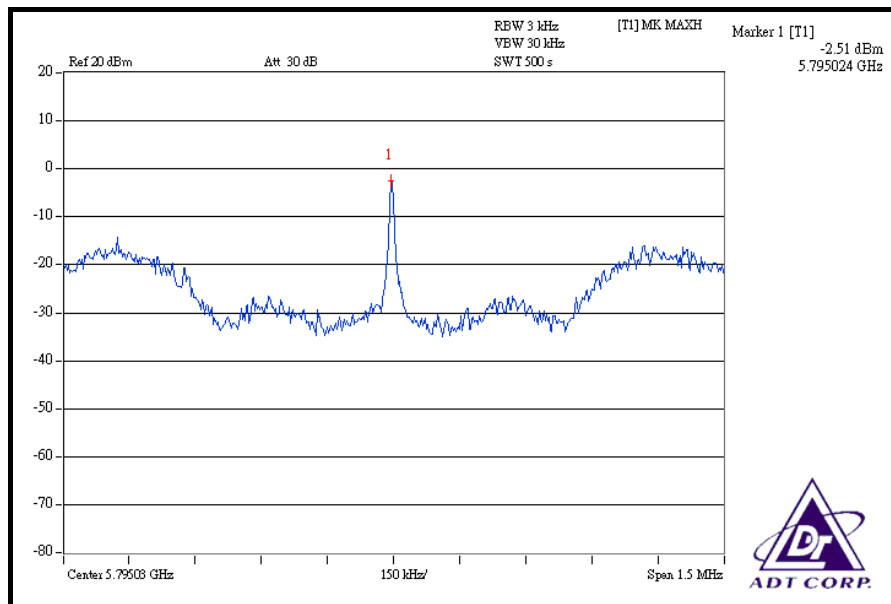

FOR CHAIN 1: CH 151

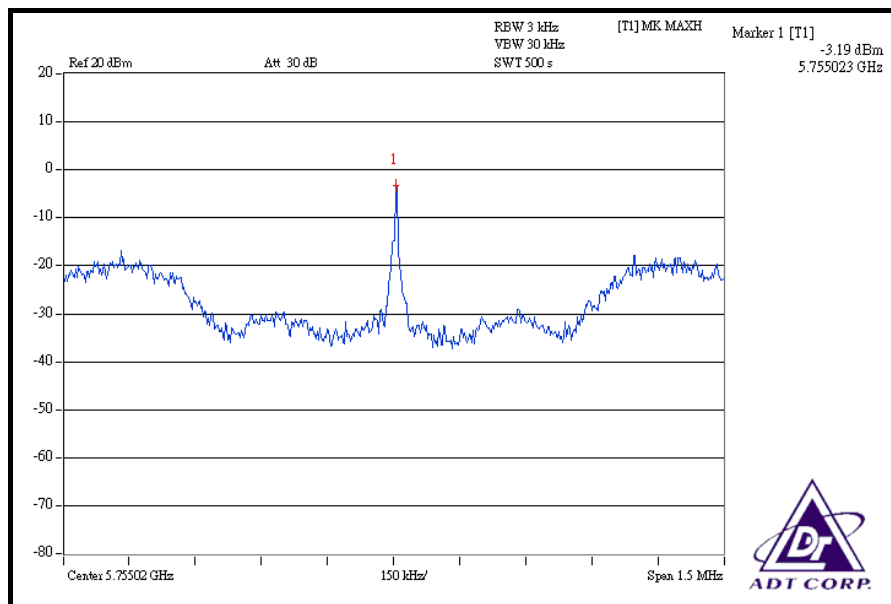

CH 159

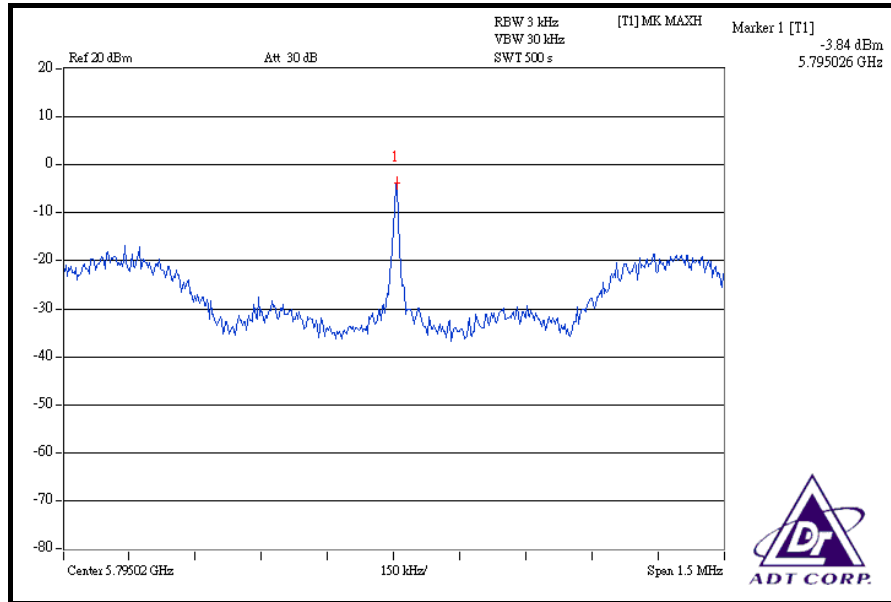



5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-------------------|----------------|------------------|
| FOR CONDUCTED MEASUREMENT: | | | |
| R&S SPECTRUM ANALYZER | FSP40 | 100041 | Apr. 21, 2009 |
| FOR RADIATED MEASUREMENT: | | | |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100269 | Aug. 05, 2008 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-156 | Apr. 24, 2009 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-563 | Jul. 30, 2008 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170242 | Jan. 06, 2009 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 274039/223650 | Nov. 07, 2008 |
| RF signal cable Worken | 8D-FB | Cable-HYCH9-01 | Aug. 09, 2008 |
| Software | ADT_Radiated_V7.6 | NA | NA |
| Antenna Tower EMCO | 2070/2080 | 512.835.4684 | NA |
| Turn Table EMCO | 2087-2.03 | NA | NA |
| Antenna Tower & Turn Table Controller EMCO | 2090 | NA | NA |
| 26GHz ~ 40GHz Amplifier | EM26400 | 07026401 | May 05, 2009 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

FOR RADIATED MEASUREMENT:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation.



5.6.5 EUT OPERATING CONDITION



Same as Item 5.3.6.



5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11a OFDM MODULATION

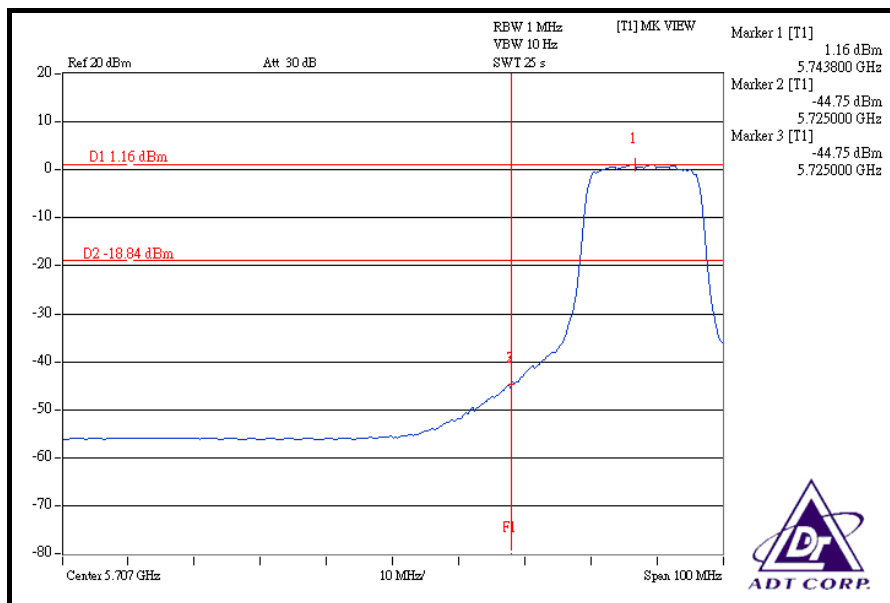
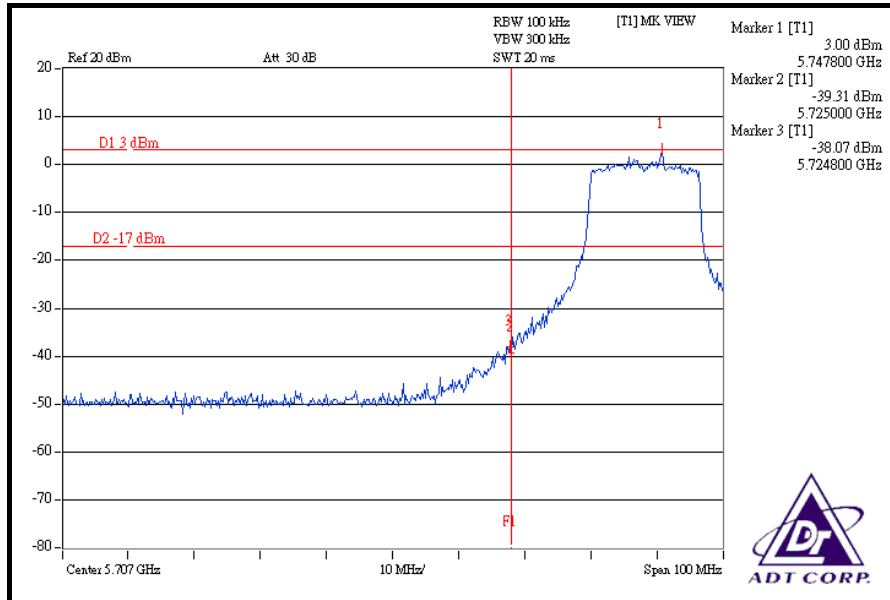


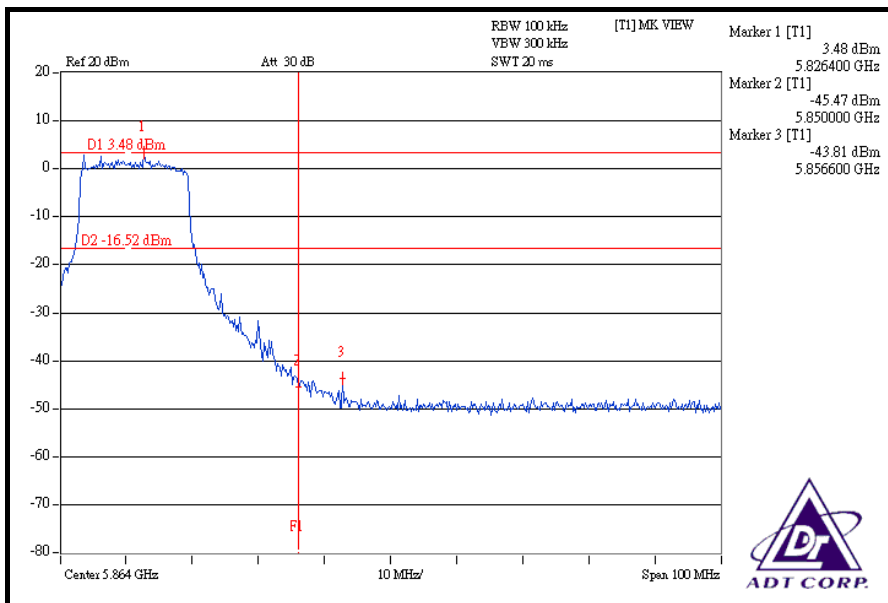
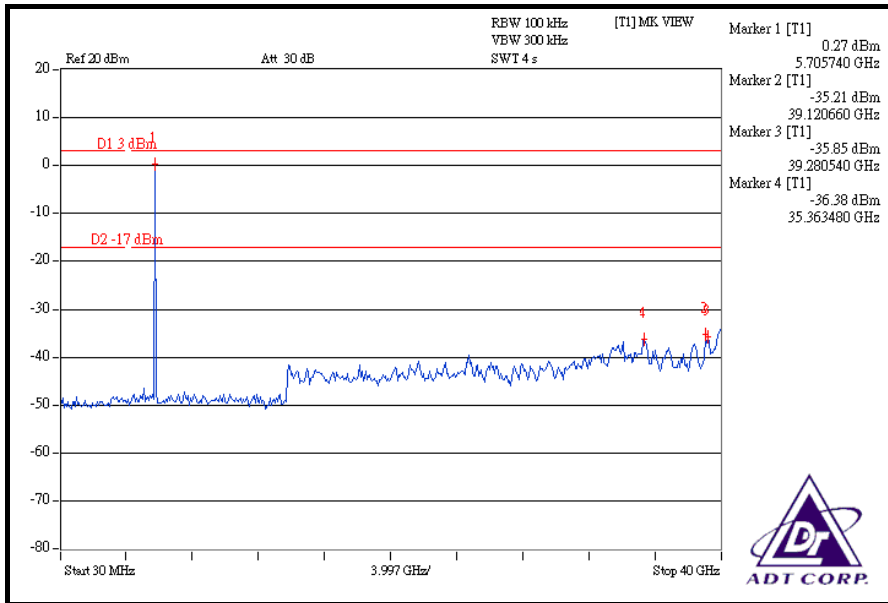


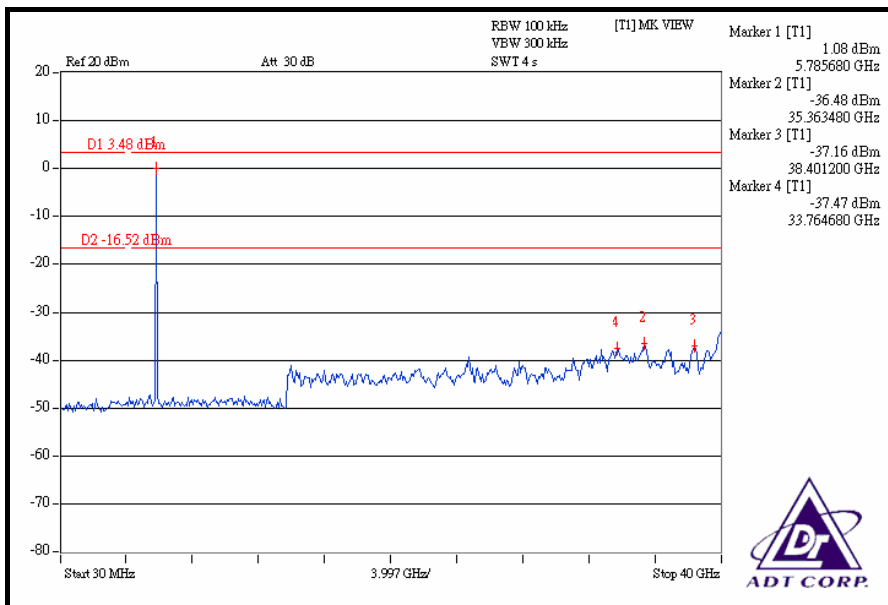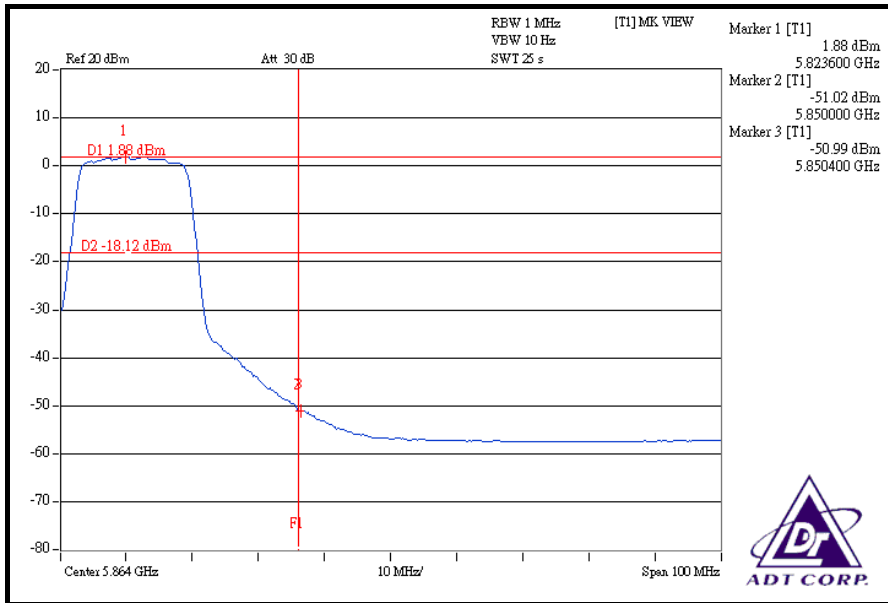



DRAFT 802.11n (20MHz) OFDM MODULATION

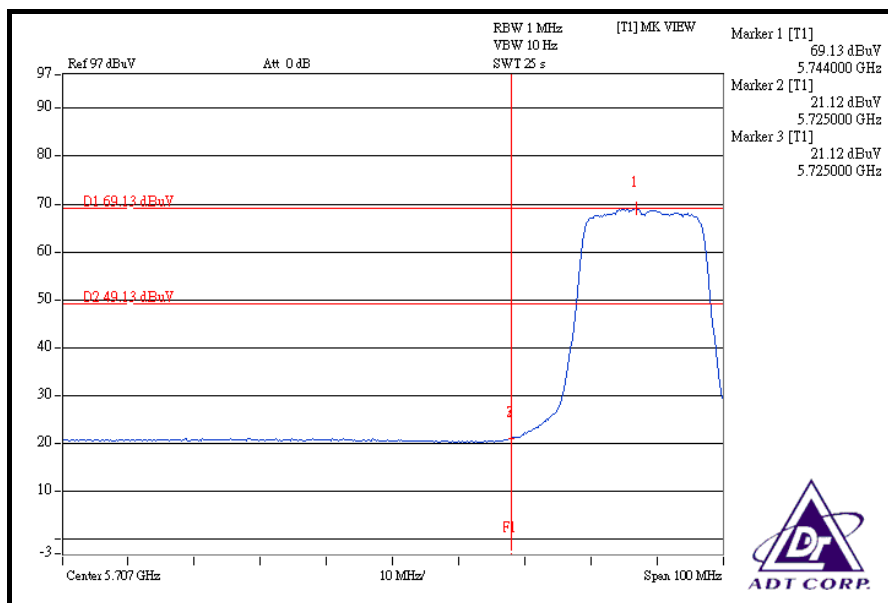
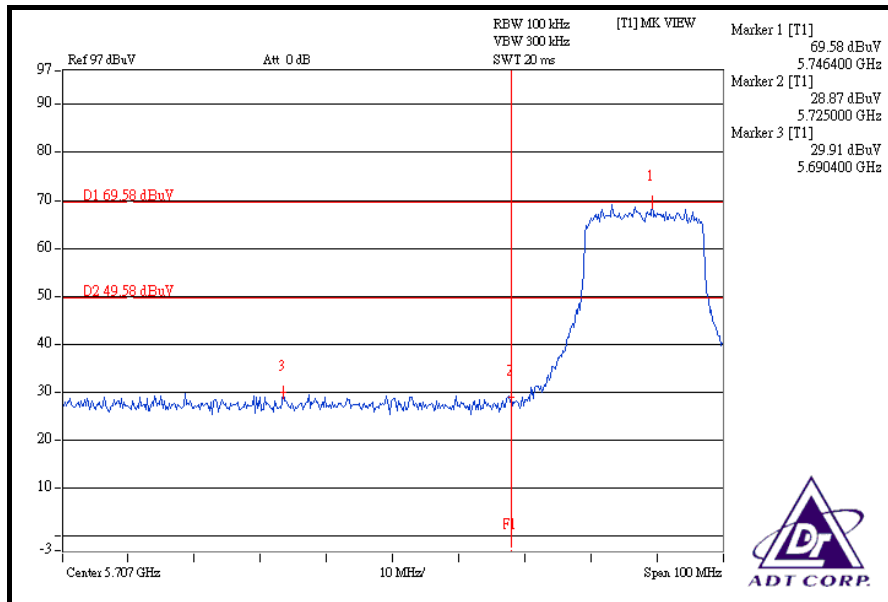


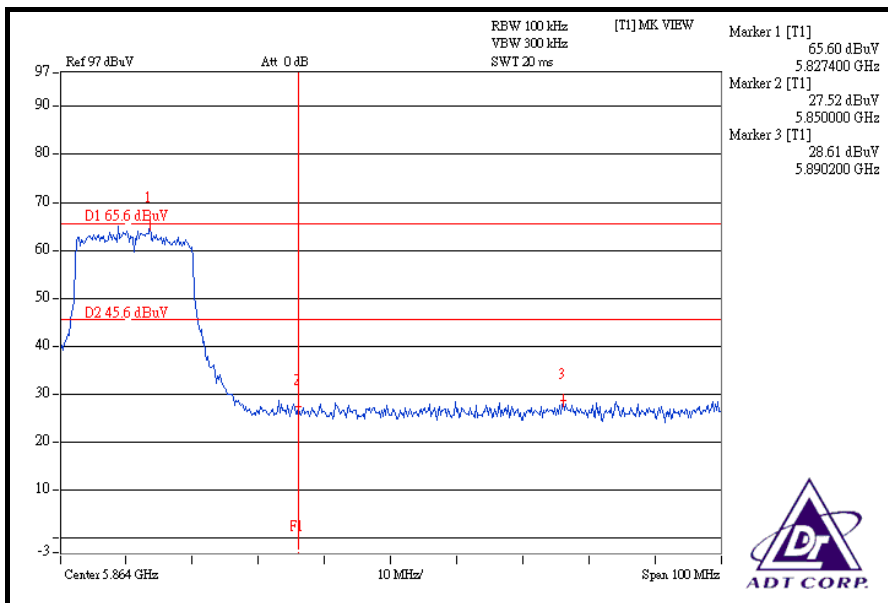
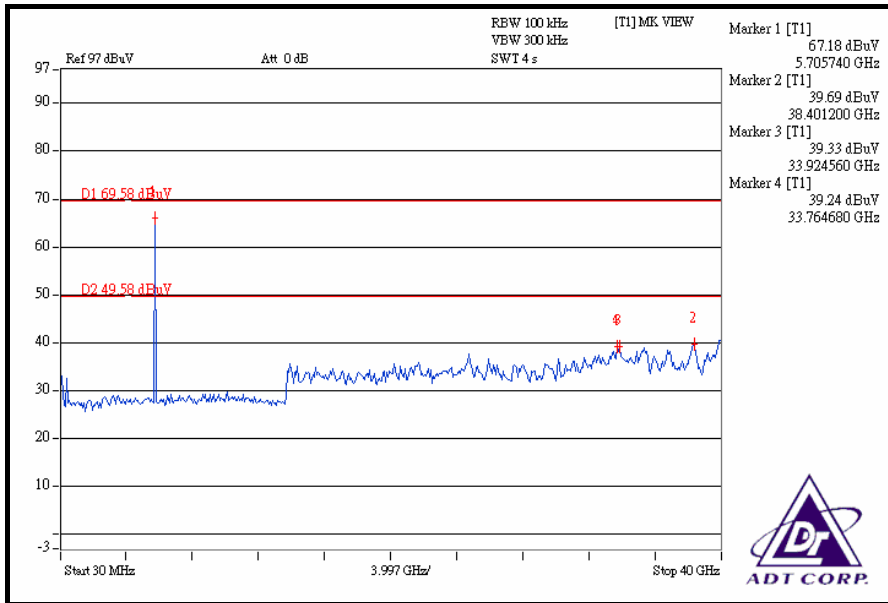


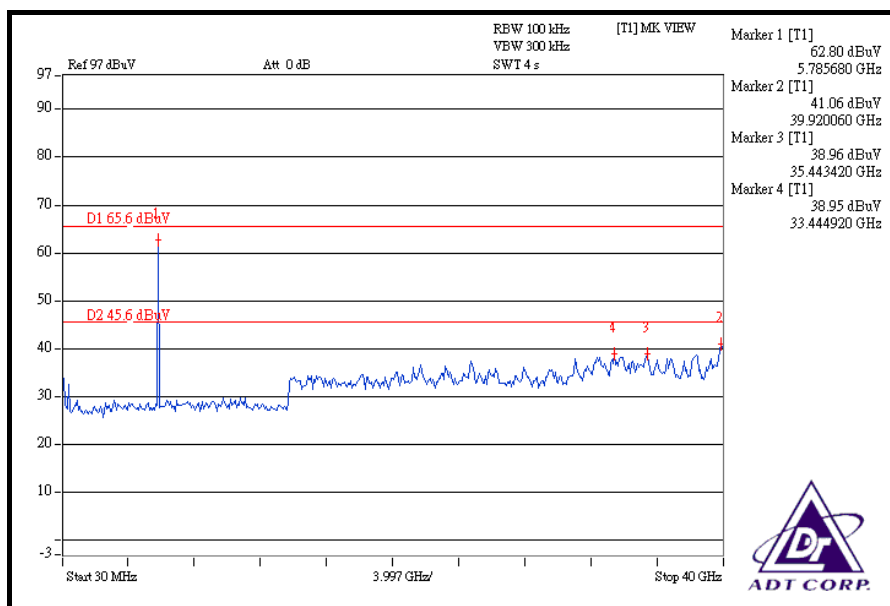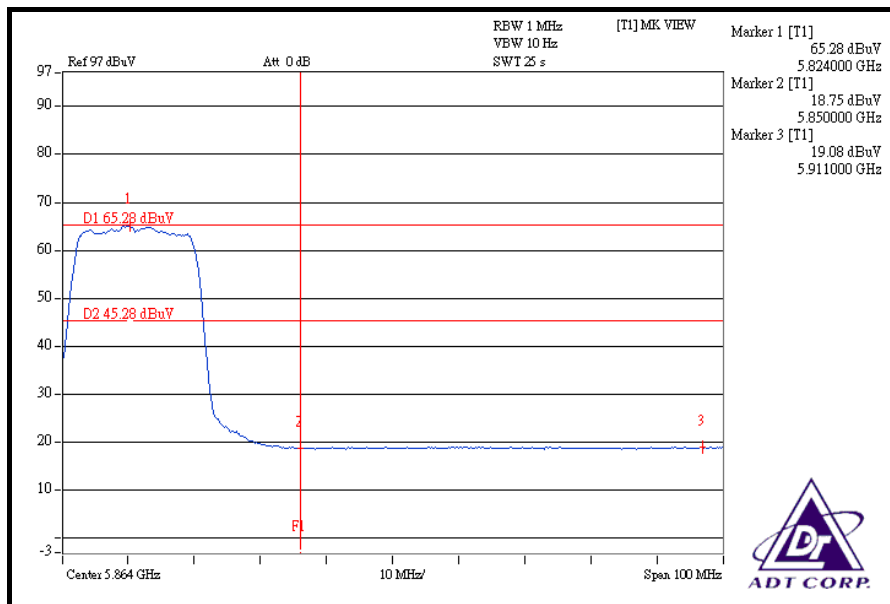

DRAFT 802.11n (40MHz) OFDM MODULATION

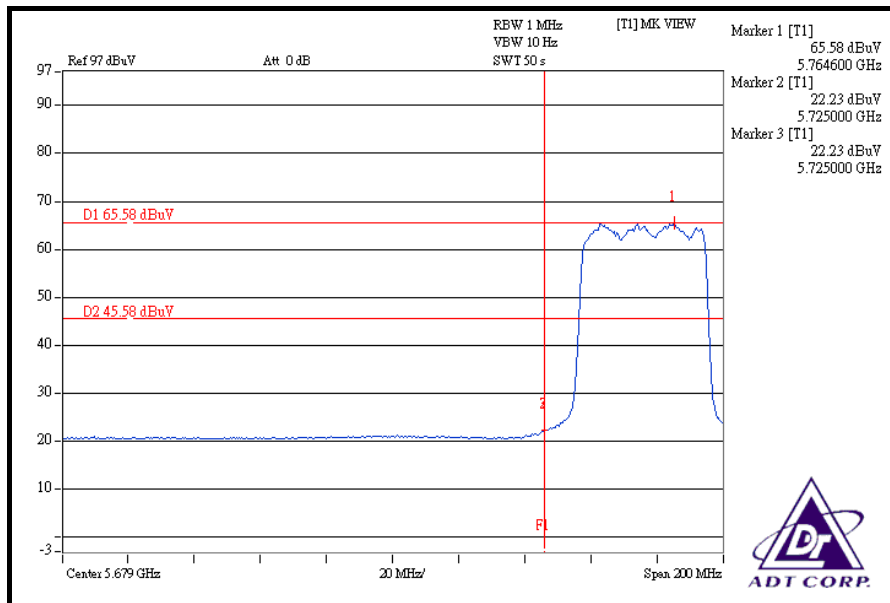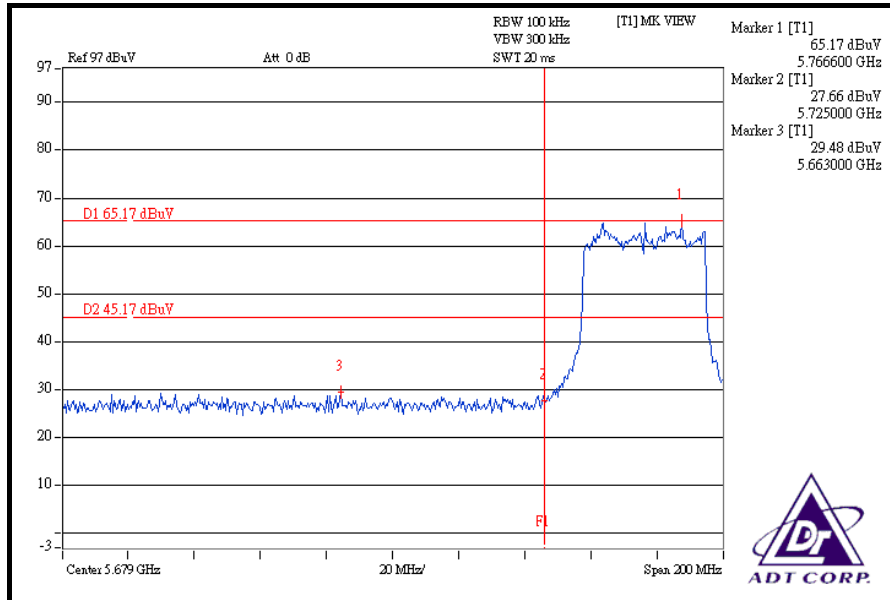

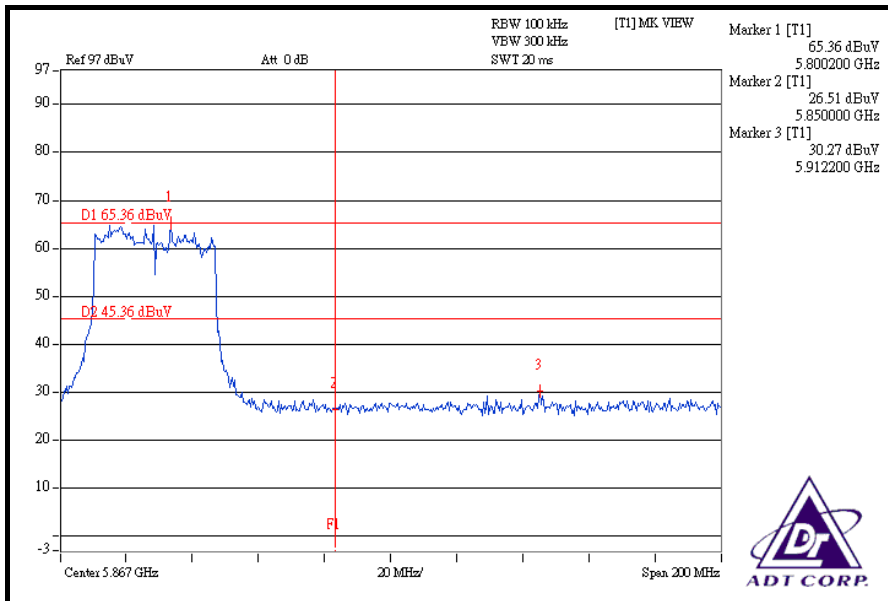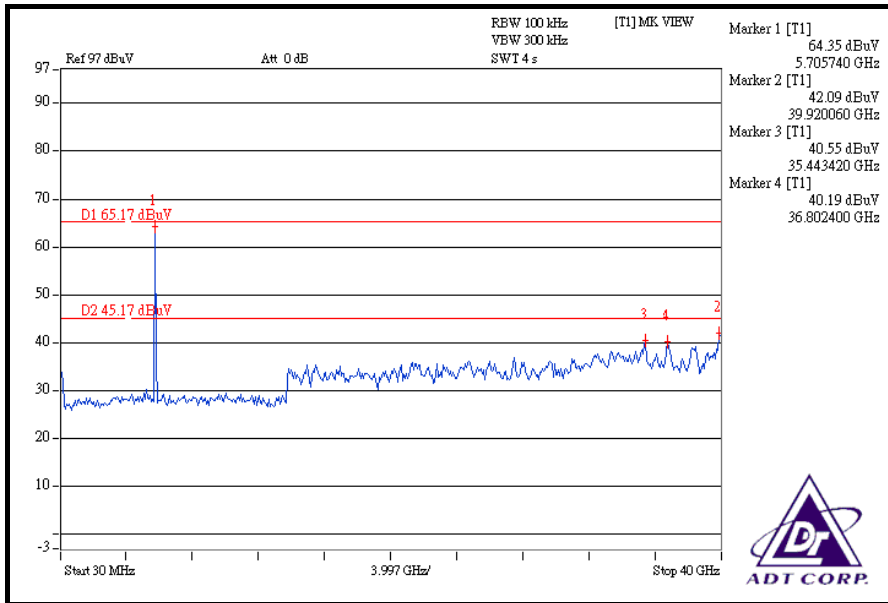

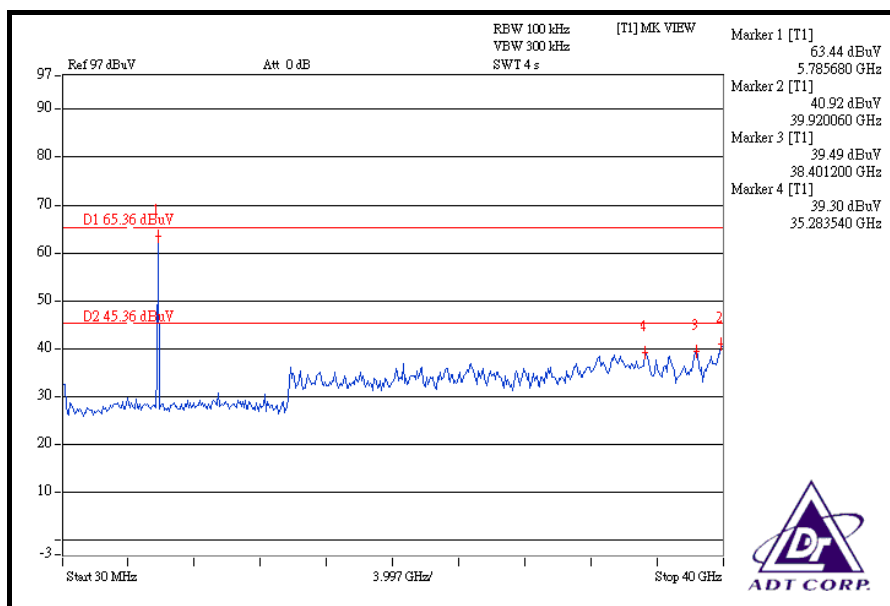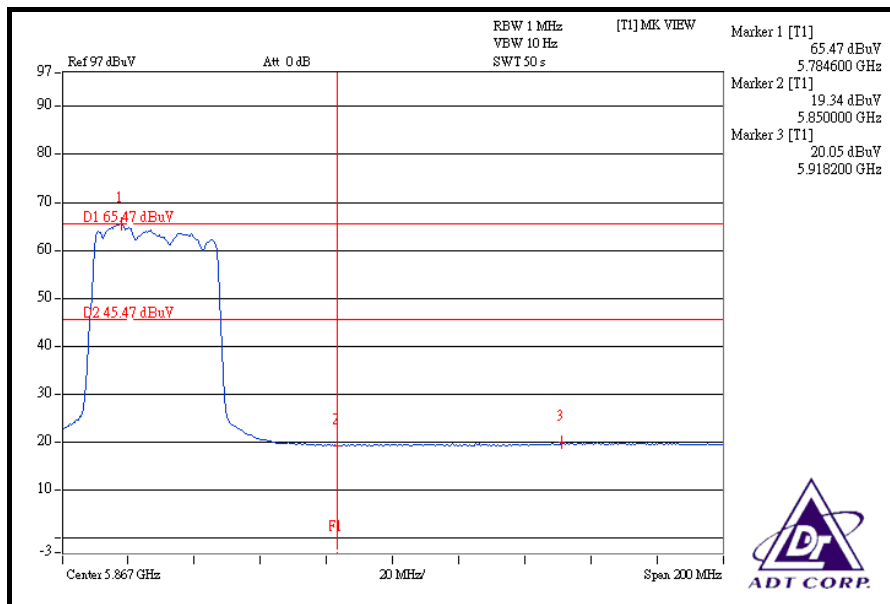



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA connector. The maximum gain of the antenna is 2dBi.



6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

| | |
|--------------------|-----------------------|
| USA | FCC, UL, A2LA |
| Germany | TUV Rheinland |
| Japan | VCCI |
| Norway | NEMKO |
| Canada | INDUSTRY CANADA , CSA |
| R.O.C. | TAF, BSMI, NCC |
| Netherlands | Telefication |
| Singapore | GOST-ASIA(MOU) |
| Russia | CERTIS(MOU) |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

9. APPENDIX B - CO-LOCATED

9.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-----------|-----|-----|---|
| | RE \geq 1G | RE $<$ 1G | PLC | OBE | |
| A | √ | √ | √ | √ | 802.11g CH6 + 802.11a CH157 |
| B | √ | √ | √ | √ | 802.11g CH6 + 802.11a Draft 802.11n (20MHz) CH157 |
| C | √ | √ | √ | √ | Draft 802.11n (20MHz) CH6 + 802.11a CH157 |
| D | √ | √ | √ | √ | Draft 802.11n (20MHz) CH6 + 802.11a Draft 802.11n (20MHz) CH157 |

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **OBE**: Out Band Emission

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|---|----------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11g & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 |
| B | 802.11g & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 & 7.2 |
| C | Draft 802.11n (20MHz) & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 & 6.0 |
| D | Draft 802.11n (20MHz) & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 |

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|---|----------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11g & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 |
| B | 802.11g & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 & 7.2 |
| C | Draft 802.11n (20MHz) & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 & 6.0 |
| D | Draft 802.11n (20MHz) & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 |

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|---|----------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11g & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 |
| B | 802.11g & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 & 7.2 |
| C | Draft 802.11n (20MHz) & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 & 6.0 |
| D | Draft 802.11n (20MHz) & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 |

OUT BAND EMISSION:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|---|----------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11g & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 |
| B | 802.11g & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 6.0 & 7.2 |
| C | Draft 802.11n (20MHz) & 802.11a | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 & 6.0 |
| D | Draft 802.11n (20MHz) & 802.11a Draft 802.11n (20MHz) | 1 to 11 & 149 to 165 | 6 & 157 | OFDM | BPSK | 7.2 |

9.2 TEST RESULTS

9.2.1 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

TEST MODE A: 802.11g CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | 1 ~ 25GHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 60%RH 1010hPa | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TESTED BY | Antony Lee | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 51.59 PK | 74.00 | -22.41 | 1.25 H | 203 | 23.48 | 28.11 |
| 2 | 1125.00 | 47.96 AV | 54.00 | -6.04 | 1.25 H | 203 | 19.85 | 28.11 |
| 3 | *2437.00 | 101.48 PK | | | 1.54 H | 301 | 68.01 | 33.47 |
| 4 | *2437.00 | 90.49 AV | | | 1.54 H | 301 | 57.02 | 33.47 |
| 5 | 4874.00 | 44.78 PK | 74.00 | -29.22 | 1.00 H | 230 | 5.33 | 39.45 |
| 6 | 4874.00 | 31.92 AV | 54.00 | -22.08 | 1.00 H | 230 | -7.53 | 39.45 |
| 7 | *5785.00 | 97.63 PK | | | 1.12 H | 201 | 56.42 | 41.21 |
| 8 | *5785.00 | 87.57 AV | | | 1.12 H | 201 | 46.36 | 41.21 |
| 9 | 11570.00 | 59.48 PK | 74.00 | -14.52 | 1.20 H | 36 | 7.66 | 51.82 |
| 10 | 11570.00 | 46.12 AV | 54.00 | -7.88 | 1.20 H | 36 | -5.70 | 51.82 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 51.89 PK | 74.00 | -22.11 | 1.26 V | 65 | 23.78 | 28.11 |
| 2 | 1125.00 | 47.62 AV | 54.00 | -6.38 | 1.26 V | 65 | 19.51 | 28.11 |
| 3 | *2437.00 | 111.84 PK | | | 1.15 V | 236 | 78.37 | 33.47 |
| 4 | *2437.00 | 100.87 AV | | | 1.15 V | 236 | 67.40 | 33.47 |
| 5 | 4874.00 | 42.48 PK | 74.00 | -31.52 | 1.45 V | 241 | 3.03 | 39.45 |
| 6 | 4874.00 | 30.52 AV | 54.00 | -23.48 | 1.45 V | 241 | -8.93 | 39.45 |
| 7 | *5785.00 | 104.78 PK | | | 1.00 V | 64 | 63.57 | 41.21 |
| 8 | *5785.00 | 94.63 AV | | | 1.00 V | 64 | 53.42 | 41.21 |
| 9 | 11570.00 | 58.47 PK | 74.00 | -15.53 | 1.00 V | 15 | 6.65 | 51.82 |
| 10 | 11570.00 | 45.96 AV | 54.00 | -8.04 | 1.00 V | 15 | -5.86 | 51.82 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

TEST MODE B: 802.11g CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | 1 ~ 25GHz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 60%RH 1010hPa | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TESTED BY | Antony Lee | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 51.84 PK | 74.00 | -22.16 | 1.25 H | 63 | 23.73 | 28.11 |
| 2 | 1125.00 | 47.65 AV | 54.00 | -6.35 | 1.25 H | 63 | 19.54 | 28.11 |
| 3 | *2437.00 | 100.55 PK | | | 1.28 H | 330 | 67.08 | 33.47 |
| 4 | *2437.00 | 90.29 AV | | | 1.28 H | 330 | 56.82 | 33.47 |
| 5 | 4874.00 | 45.12 PK | 74.00 | -28.88 | 1.00 H | 231 | 5.67 | 39.45 |
| 6 | 4874.00 | 31.97 AV | 54.00 | -22.03 | 1.00 H | 231 | -7.48 | 39.45 |
| 7 | *5785.00 | 101.63 PK | | | 1.56 H | 102 | 60.42 | 41.21 |
| 8 | *5785.00 | 91.88 AV | | | 1.56 H | 102 | 50.67 | 41.21 |
| 9 | 11570.00 | 59.88 PK | 74.00 | -14.12 | 1.25 H | 32 | 8.06 | 51.82 |
| 10 | 11570.00 | 46.23 AV | 54.00 | -7.77 | 1.25 H | 32 | -5.59 | 51.82 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.86 PK | 74.00 | -19.14 | 1.25 V | 62 | 26.75 | 28.11 |
| 2 | 1125.00 | 48.59 AV | 54.00 | -5.41 | 1.25 V | 62 | 20.48 | 28.11 |
| 3 | *2437.00 | 110.25 PK | | | 1.09 V | 226 | 76.78 | 33.47 |
| 4 | *2437.00 | 99.87 AV | | | 1.09 V | 226 | 66.40 | 33.47 |
| 5 | 4874.00 | 41.96 PK | 74.00 | -32.04 | 1.33 V | 208 | 2.51 | 39.45 |
| 6 | 4874.00 | 29.77 AV | 54.00 | -24.23 | 1.33 V | 208 | -9.68 | 39.45 |
| 7 | *5785.00 | 109.48 PK | | | 1.28 V | 99 | 68.27 | 41.21 |
| 8 | *5785.00 | 99.86 AV | | | 1.28 V | 99 | 58.65 | 41.21 |
| 9 | 11570.00 | 58.96 PK | 74.00 | -15.04 | 1.25 V | 26 | 7.14 | 51.82 |
| 10 | 11570.00 | 46.51 AV | 54.00 | -7.49 | 1.25 V | 26 | -5.31 | 51.82 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

TEST MODE C: Draft 802.11n (20MHz) CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | 1 ~ 25GHz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 67%RH 1010hPa | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TESTED BY | Antony Lee | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 53.59 PK | 74.00 | -20.41 | 1.26 H | 331 | 25.48 | 28.11 |
| 2 | 1125.00 | 48.65 AV | 54.00 | -5.35 | 1.26 H | 331 | 20.54 | 28.11 |
| 3 | *2437.00 | 103.59 PK | | | 1.35 H | 306 | 70.12 | 33.47 |
| 4 | *2437.00 | 93.88 AV | | | 1.35 H | 306 | 60.41 | 33.47 |
| 5 | 4874.00 | 52.03 PK | 74.00 | -21.97 | 1.22 H | 360 | 12.58 | 39.45 |
| 6 | 4874.00 | 39.26 AV | 54.00 | -14.74 | 1.22 H | 360 | -0.19 | 39.45 |
| 7 | *5785.00 | 97.56 PK | | | 1.02 H | 62 | 56.35 | 41.21 |
| 8 | *5785.00 | 87.65 AV | | | 1.02 H | 62 | 46.44 | 41.21 |
| 9 | 11570.00 | 59.62 PK | 74.00 | -14.38 | 1.12 H | 62 | 7.80 | 51.82 |
| 10 | 11570.00 | 46.52 AV | 54.00 | -7.48 | 1.12 H | 62 | -5.30 | 51.82 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.26 PK | 74.00 | -19.74 | 1.00 V | 162 | 26.15 | 28.11 |
| 2 | 1125.00 | 49.56 AV | 54.00 | -4.44 | 1.00 V | 162 | 21.45 | 28.11 |
| 3 | *2437.00 | 114.26 PK | | | 1.05 V | 260 | 80.79 | 33.47 |
| 4 | *2437.00 | 103.59 AV | | | 1.05 V | 260 | 70.12 | 33.47 |
| 5 | 4874.00 | 53.62 PK | 74.00 | -20.38 | 1.21 V | 62 | 14.17 | 39.45 |
| 6 | 4874.00 | 41.56 AV | 54.00 | -12.44 | 1.21 V | 62 | 2.11 | 39.45 |
| 7 | *5785.00 | 104.89 PK | | | 1.00 V | 65 | 63.68 | 41.21 |
| 8 | *5785.00 | 94.63 AV | | | 1.00 V | 65 | 53.42 | 41.21 |
| 9 | 11570.00 | 58.49 PK | 74.00 | -15.51 | 1.00 V | 36 | 6.67 | 51.82 |
| 10 | 11570.00 | 45.95 AV | 54.00 | -8.05 | 1.00 V | 36 | -5.87 | 51.82 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

TEST MODE D: Draft 802.11n (20MHz) CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | 1 ~ 25GHz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 67%RH 1010hPa | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TESTED BY | Antony Lee | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 53.86 PK | 74.00 | -20.14 | 1.22 H | 302 | 25.75 | 28.11 |
| 2 | 1125.00 | 48.95 AV | 54.00 | -5.05 | 1.22 H | 302 | 20.84 | 28.11 |
| 3 | *2437.00 | 103.59 PK | | | 1.35 H | 327 | 70.12 | 33.47 |
| 4 | *2437.00 | 93.59 AV | | | 1.35 H | 327 | 60.12 | 33.47 |
| 5 | 4874.00 | 52.06 PK | 74.00 | -21.94 | 1.20 H | 267 | 12.61 | 39.45 |
| 6 | 4874.00 | 39.59 AV | 54.00 | -14.41 | 1.20 H | 267 | 0.14 | 39.45 |
| 7 | *5785.00 | 101.65 PK | | | 1.35 H | 26 | 60.44 | 41.21 |
| 8 | *5785.00 | 91.85 AV | | | 1.35 H | 26 | 50.64 | 41.21 |
| 9 | 11570.00 | 59.89 PK | 74.00 | -14.11 | 1.52 H | 38 | 8.07 | 51.82 |
| 10 | 11570.00 | 46.87 AV | 54.00 | -7.13 | 1.52 H | 38 | -4.95 | 51.82 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1125.00 | 54.89 PK | 74.00 | -19.11 | 1.20 V | 231 | 26.78 | 28.11 |
| 2 | 1125.00 | 49.56 AV | 54.00 | -4.44 | 1.20 V | 231 | 21.45 | 28.11 |
| 3 | *2437.00 | 114.65 PK | | | 1.06 V | 231 | 81.18 | 33.47 |
| 4 | *2437.00 | 103.89 AV | | | 1.06 V | 231 | 70.42 | 33.47 |
| 5 | 4874.00 | 53.88 PK | 74.00 | -20.12 | 1.16 V | 48 | 14.43 | 39.45 |
| 6 | 4874.00 | 41.62 AV | 54.00 | -12.38 | 1.16 V | 48 | 2.17 | 39.45 |
| 7 | *5785.00 | 109.68 PK | | | 1.26 V | 122 | 68.47 | 41.21 |
| 8 | *5785.00 | 99.52 AV | | | 1.26 V | 122 | 58.31 | 41.21 |
| 9 | 11570.00 | 58.67 PK | 74.00 | -15.33 | 1.02 V | 62 | 6.85 | 51.82 |
| 10 | 11570.00 | 46.59 AV | 54.00 | -7.41 | 1.02 V | 62 | -5.23 | 51.82 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



9.2.2 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

TEST MODE A: 802.11g CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | DETECTOR FUNCTION | Quasi-Peak |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.36 | 37.59 QP | 43.50 | -5.91 | 1.50 H | 263 | 25.18 | 12.41 |
| 2 | 250.26 | 43.98 QP | 46.00 | -2.02 | 1.20 H | 126 | 30.28 | 13.70 |
| 3 | 500.56 | 44.06 QP | 46.00 | -1.94 | 1.26 H | 360 | 23.56 | 20.50 |
| 4 | 751.83 | 40.02 QP | 46.00 | -5.98 | 1.26 H | 180 | 14.14 | 25.88 |
| 5 | 800.63 | 39.59 QP | 46.00 | -6.41 | 1.25 H | 62 | 13.20 | 26.39 |
| 6 | 875.65 | 41.26 QP | 46.00 | -4.74 | 1.50 H | 62 | 13.55 | 27.71 |
| 7 | 900.62 | 42.46 QP | 46.00 | -3.54 | 1.50 H | 230 | 14.36 | 28.10 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 42.63 | 35.26 QP | 40.00 | -4.74 | 1.25 V | 165 | 22.52 | 12.74 |
| 2 | 250.66 | 43.23 QP | 46.00 | -2.77 | 1.50 V | 262 | 29.52 | 13.71 |
| 3 | 500.56 | 42.89 QP | 46.00 | -3.11 | 1.25 V | 262 | 22.39 | 20.50 |
| 4 | 875.65 | 39.64 QP | 46.00 | -6.36 | 1.25 V | 260 | 11.93 | 27.71 |
| 5 | 900.62 | 41.02 QP | 46.00 | -4.98 | 1.84 V | 144 | 12.92 | 28.10 |
| 6 | 1000.00 | 42.23 QP | 54.00 | -11.77 | 1.25 V | 264 | 12.71 | 29.52 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE B: 802.11g CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | DETECTOR FUNCTION | Quasi-Peak |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.69 | 37.63 QP | 43.50 | -5.87 | 1.90 H | 263 | 25.20 | 12.43 |
| 2 | 250.83 | 44.06 QP | 46.00 | -1.94 | 1.20 H | 65 | 30.34 | 13.72 |
| 3 | 500.62 | 44.01 QP | 46.00 | -1.99 | 1.50 H | 162 | 23.50 | 20.51 |
| 4 | 750.86 | 39.82 QP | 46.00 | -6.18 | 1.62 H | 320 | 13.95 | 25.87 |
| 5 | 800.65 | 39.45 QP | 46.00 | -6.55 | 1.25 H | 65 | 13.06 | 26.39 |
| 6 | 875.69 | 41.26 QP | 46.00 | -4.74 | 1.75 H | 169 | 13.55 | 27.71 |
| 7 | 900.63 | 41.68 QP | 46.00 | -4.32 | 1.25 H | 62 | 13.58 | 28.10 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 43.25 | 35.61 QP | 40.00 | -4.39 | 1.50 V | 162 | 22.80 | 12.81 |
| 2 | 250.26 | 43.26 QP | 46.00 | -2.74 | 1.56 V | 325 | 29.56 | 13.70 |
| 3 | 500.02 | 42.89 QP | 46.00 | -3.11 | 1.25 V | 36 | 22.40 | 20.49 |
| 4 | 875.16 | 39.78 QP | 46.00 | -6.22 | 1.36 V | 260 | 12.08 | 27.70 |
| 5 | 900.36 | 40.98 QP | 46.00 | -5.02 | 1.50 V | 262 | 12.89 | 28.09 |
| 6 | 1000.00 | 41.78 QP | 54.00 | -12.22 | 1.25 V | 305 | 12.26 | 29.52 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



TEST MODE C: Draft 802.11n (20MHz) CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | DETECTOR FUNCTION | Quasi-Peak |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.36 | 37.26 QP | 43.50 | -6.24 | 1.50 H | 221 | 24.85 | 12.41 |
| 2 | 250.15 | 44.06 QP | 46.00 | -1.94 | 1.20 H | 100 | 30.36 | 13.70 |
| 3 | 500.15 | 43.98 QP | 46.00 | -2.02 | 1.62 H | 321 | 23.49 | 20.49 |
| 4 | 751.46 | 39.86 QP | 46.00 | -6.14 | 1.56 H | 236 | 13.98 | 25.88 |
| 5 | 800.49 | 39.49 QP | 46.00 | -6.51 | 1.25 H | 63 | 13.10 | 26.39 |
| 6 | 875.63 | 41.06 QP | 46.00 | -4.94 | 1.85 H | 260 | 13.36 | 27.70 |
| 7 | 900.26 | 41.67 QP | 46.00 | -4.33 | 1.25 H | 260 | 13.58 | 28.09 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 42.15 | 34.88 QP | 40.00 | -5.12 | 1.00 V | 210 | 22.18 | 12.70 |
| 2 | 250.48 | 43.26 QP | 46.00 | -2.74 | 1.26 V | 230 | 29.55 | 13.71 |
| 3 | 500.26 | 42.98 QP | 46.00 | -3.02 | 1.45 V | 266 | 22.48 | 20.50 |
| 4 | 875.69 | 40.65 QP | 46.00 | -5.35 | 1.23 V | 321 | 12.94 | 27.71 |
| 5 | 900.15 | 40.89 QP | 46.00 | -5.11 | 1.54 V | 296 | 12.80 | 28.09 |
| 6 | 1000.00 | 41.78 QP | 54.00 | -12.22 | 1.00 V | 345 | 12.26 | 29.52 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



TEST MODE D: Draft 802.11n (20MHz) CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|--------------------|---------------|
| INPUT POWER | 120Vac, 60 Hz | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH 1010hPa | DETECTOR FUNCTION | Quasi-Peak |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.06 | 37.26 QP | 43.50 | -6.24 | 1.59 H | 265 | 24.87 | 12.39 |
| 2 | 250.62 | 44.16 QP | 46.00 | -1.84 | 1.32 H | 262 | 30.45 | 13.71 |
| 3 | 500.26 | 43.95 QP | 46.00 | -2.05 | 1.65 H | 260 | 23.45 | 20.50 |
| 4 | 750.89 | 39.78 QP | 46.00 | -6.22 | 1.65 H | 265 | 13.91 | 25.87 |
| 5 | 799.95 | 39.78 QP | 46.00 | -6.22 | 1.52 H | 62 | 13.40 | 26.38 |
| 6 | 876.95 | 41.16 QP | 46.00 | -4.84 | 1.65 H | 230 | 13.43 | 27.73 |
| 7 | 900.79 | 41.79 QP | 46.00 | -4.21 | 1.26 H | 320 | 13.69 | 28.10 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 42.88 | 35.26 QP | 40.00 | -4.74 | 1.54 V | 265 | 22.49 | 12.77 |
| 2 | 250.15 | 42.98 QP | 46.00 | -3.02 | 1.26 V | 262 | 29.28 | 13.70 |
| 3 | 500.36 | 42.79 QP | 46.00 | -3.21 | 1.45 V | 265 | 22.29 | 20.50 |
| 4 | 875.66 | 39.59 QP | 46.00 | -6.41 | 1.45 V | 236 | 11.88 | 27.71 |
| 5 | 900.63 | 40.98 QP | 46.00 | -5.02 | 1.59 V | 349 | 12.88 | 28.10 |
| 6 | 1000.00 | 41.88 QP | 54.00 | -12.12 | 1.50 V | 320 | 12.36 | 29.52 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.


9.2.3 CONDUCTED EMISSION MEASUREMENT

TEST MODE A: 802.11g CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 1 |
| TRANSFER RATE | 6.0Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-------|--------------------------|-------|-----------------|-------|-------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.195 | 0.20 | 54.37 | 45.01 | 54.57 | 45.21 | 63.80 |
| 2 | 0.259 | 0.20 | 45.64 | - | 45.84 | - | 61.45 | 51.45 | -15.61 | - |
| 3 | 0.391 | 0.20 | 43.22 | - | 43.42 | - | 58.04 | 48.04 | -14.62 | - |
| 4 | 0.457 | 0.20 | 36.52 | - | 36.72 | - | 56.74 | 46.74 | -20.02 | - |
| 5 | 0.849 | 0.20 | 30.86 | - | 31.06 | - | 56.00 | 46.00 | -24.94 | - |
| 6 | 4.245 | 0.41 | 27.23 | - | 27.64 | - | 56.00 | 46.00 | -28.36 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

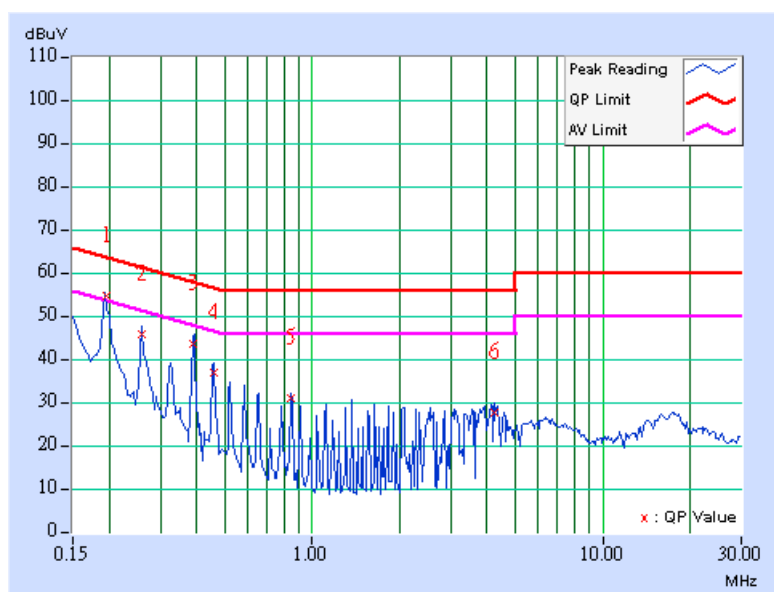

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 2 |
| TRANSFER RATE | 6.0Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.194 | 0.20 | 53.52 | - | 53.72 | - | 63.85 | 53.85 | -10.13 | - |
| 2 | 0.259 | 0.20 | 47.24 | - | 47.44 | - | 61.45 | 51.45 | -14.01 | - |
| 3 | 0.392 | 0.20 | 46.71 | - | 46.91 | - | 58.02 | 48.02 | -11.11 | - |
| 4 | 0.457 | 0.20 | 39.24 | - | 39.44 | - | 56.74 | 46.74 | -17.30 | - |
| 5 | 0.849 | 0.20 | 34.58 | - | 34.78 | - | 56.00 | 46.00 | -21.22 | - |
| 6 | 3.781 | 0.38 | 31.10 | - | 31.48 | - | 56.00 | 46.00 | -24.52 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

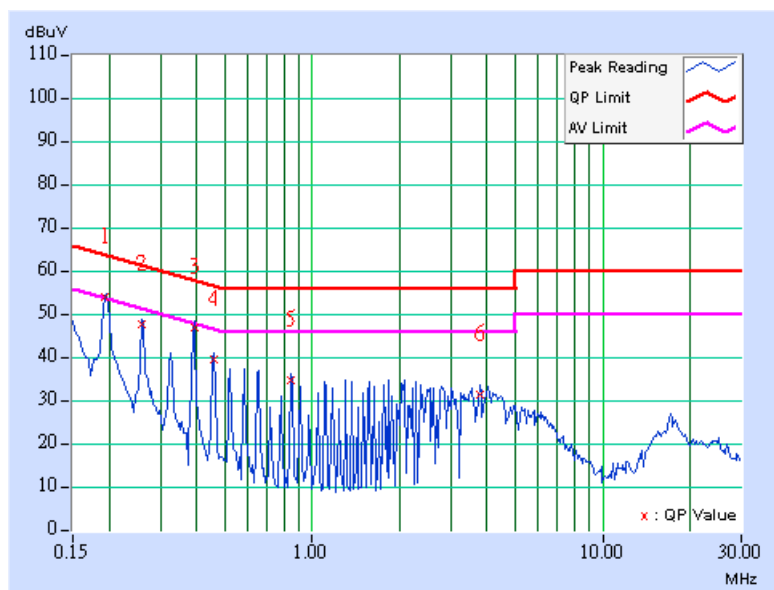


TEST MODE B: 802.11g CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 1 |
| TRANSFER RATE | 6.0Mbps & 7.2Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.194 | 0.20 | 52.95 | - | 53.15 | - | 63.85 | 53.85 | -10.70 | - |
| 2 | 0.259 | 0.20 | 45.25 | - | 45.45 | - | 61.45 | 51.45 | -16.00 | - |
| 3 | 0.392 | 0.20 | 43.42 | - | 43.62 | - | 58.02 | 48.02 | -14.40 | - |
| 4 | 0.453 | 0.20 | 36.52 | - | 36.72 | - | 56.81 | 46.81 | -20.09 | - |
| 5 | 0.650 | 0.20 | 30.97 | - | 31.17 | - | 56.00 | 46.00 | -24.83 | - |
| 6 | 3.262 | 0.33 | 25.64 | - | 25.97 | - | 56.00 | 46.00 | -30.03 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

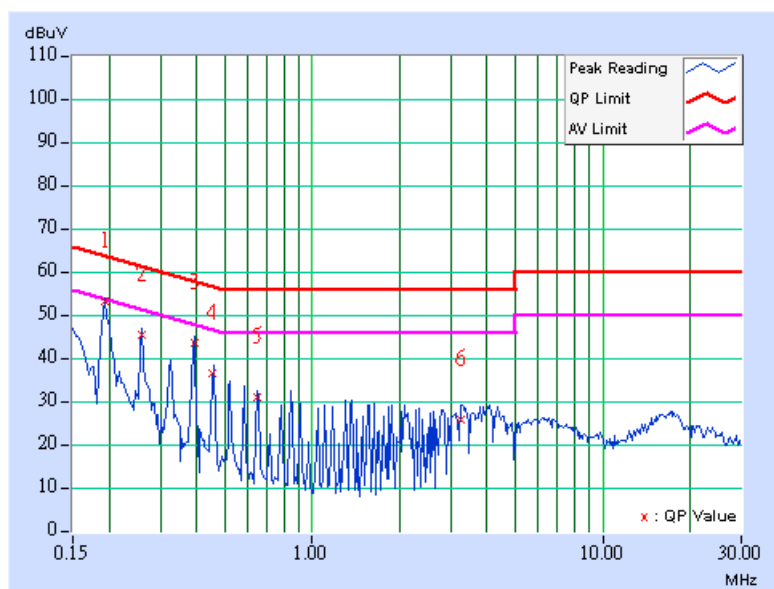

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 2 |
| TRANSFER RATE | 6.0Mbps & 7.2Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.197 | 0.20 | 52.37 | - | 52.57 | - | 63.72 | 53.72 | -11.15 | - |
| 2 | 0.259 | 0.20 | 47.10 | - | 47.30 | - | 61.45 | 51.45 | -14.15 | - |
| 3 | 0.392 | 0.20 | 46.67 | - | 46.87 | - | 58.02 | 48.02 | -11.15 | - |
| 4 | 0.457 | 0.20 | 39.18 | - | 39.38 | - | 56.74 | 46.74 | -17.36 | - |
| 5 | 0.849 | 0.20 | 34.56 | - | 34.76 | - | 56.00 | 46.00 | -21.24 | - |
| 6 | 3.777 | 0.38 | 31.28 | - | 31.66 | - | 56.00 | 46.00 | -24.34 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

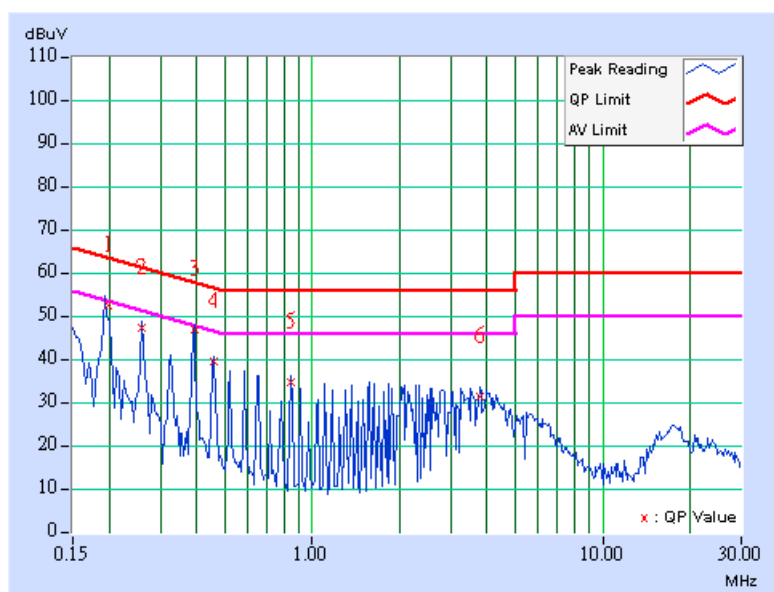


TEST MODE C: Draft 802.11n (20MHz) CH6 + 802.11a CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 1 |
| TRANSFER RATE | 7.2Mbps & 6.0Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.196 | 0.20 | 51.57 | - | 51.77 | - | 63.80 | 53.80 | -12.03 | - |
| 2 | 0.259 | 0.20 | 44.39 | - | 44.59 | - | 61.45 | 51.45 | -16.86 | - |
| 3 | 0.390 | 0.20 | 44.18 | - | 44.38 | - | 58.07 | 48.07 | -13.69 | - |
| 4 | 0.584 | 0.20 | 32.60 | - | 32.80 | - | 56.00 | 46.00 | -23.20 | - |
| 5 | 0.847 | 0.20 | 31.32 | - | 31.52 | - | 56.00 | 46.00 | -24.48 | - |
| 6 | 4.094 | 0.40 | 26.62 | - | 27.02 | - | 56.00 | 46.00 | -28.98 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

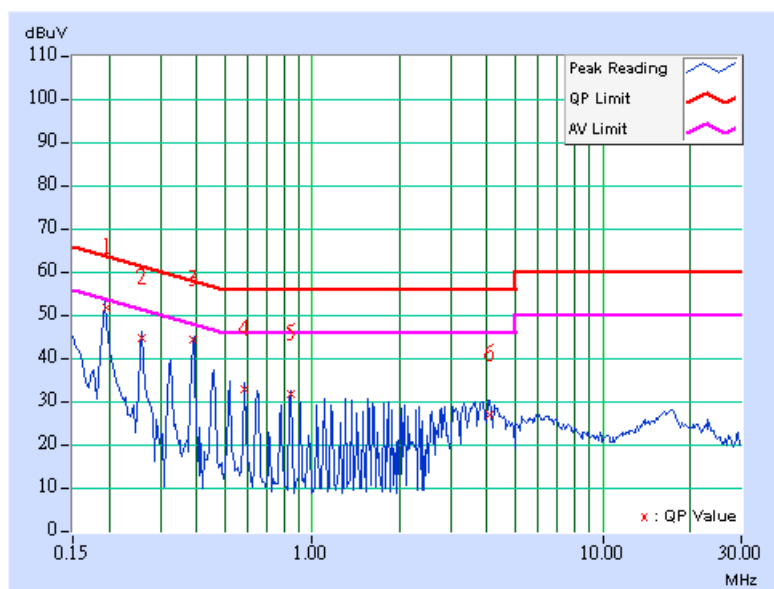

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 2 |
| TRANSFER RATE | 7.2Mbps & 6.0Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.197 | 0.20 | 51.13 | - | 51.33 | - | 63.74 | 53.74 | -12.41 | - |
| 2 | 0.259 | 0.20 | 46.54 | - | 46.74 | - | 61.45 | 51.45 | -14.71 | - |
| 3 | 0.390 | 0.20 | 47.23 | - | 47.43 | - | 58.07 | 48.07 | -10.64 | - |
| 4 | 0.459 | 0.20 | 37.70 | - | 37.90 | - | 56.72 | 46.72 | -18.82 | - |
| 5 | 0.845 | 0.20 | 34.86 | - | 35.06 | - | 56.00 | 46.00 | -20.94 | - |
| 6 | 2.539 | 0.25 | 32.31 | - | 32.56 | - | 56.00 | 46.00 | -23.44 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

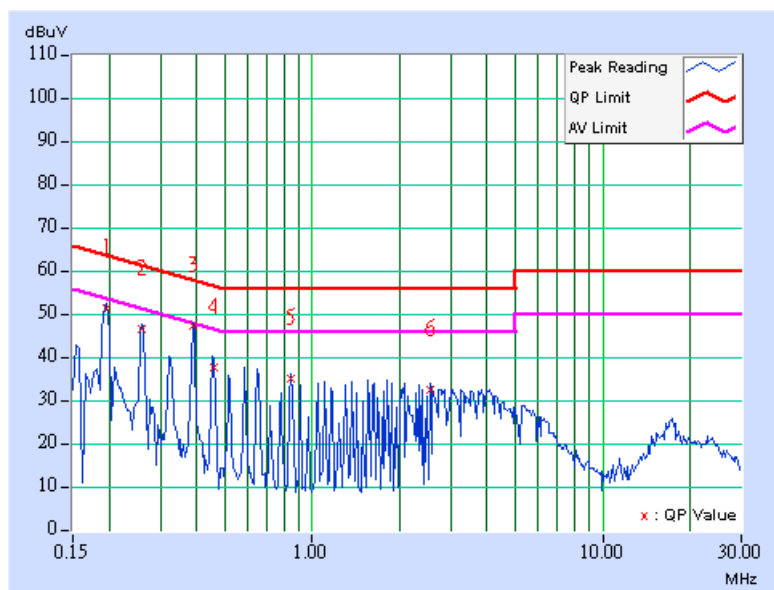


TEST MODE D: Draft 802.11n (20MHz) CH6 + 802.11a Draft 802.11n (20MHz) CH157

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 1 |
| TRANSFER RATE | 7.2Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.198 | 0.20 | 51.11 | - | 51.31 | - | 63.69 | 53.69 | -12.38 | - |
| 2 | 0.264 | 0.20 | 44.99 | - | 45.19 | - | 61.31 | 51.31 | -16.12 | - |
| 3 | 0.392 | 0.20 | 43.09 | - | 43.29 | - | 58.02 | 48.02 | -14.73 | - |
| 4 | 0.459 | 0.20 | 37.82 | - | 38.02 | - | 56.72 | 46.72 | -18.70 | - |
| 5 | 0.853 | 0.20 | 31.52 | - | 31.72 | - | 56.00 | 46.00 | -24.28 | - |
| 6 | 4.125 | 0.40 | 28.09 | - | 28.49 | - | 56.00 | 46.00 | -27.51 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

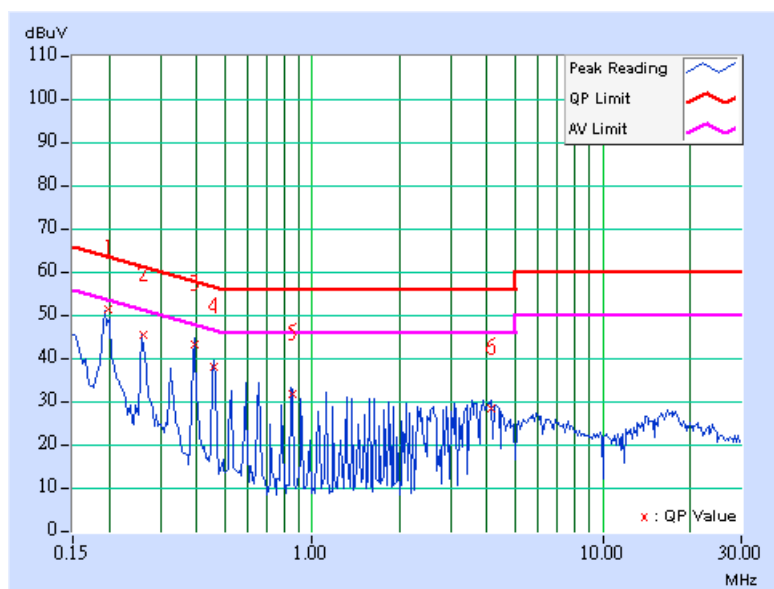

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------|--------------------|--------------|
| MODULATION TYPE | BPSK | PHASE | Line 2 |
| TRANSFER RATE | 7.2Mbps | INPUT POWER | 120Vac, 60Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 62%RH, 1010hPa | 6dB BANDWIDTH | 9kHz |
| TESTED BY | Kevin Liang | | |


| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.193 | 0.20 | 51.31 | - | 51.51 | - | 63.91 | 53.91 | -12.40 | - |
| 2 | 0.259 | 0.20 | 46.29 | - | 46.49 | - | 61.45 | 51.45 | -14.96 | - |
| 3 | 0.388 | 0.20 | 46.23 | - | 46.43 | - | 58.10 | 48.10 | -11.67 | - |
| 4 | 0.455 | 0.20 | 39.18 | - | 39.38 | - | 56.79 | 46.79 | -17.41 | - |
| 5 | 0.845 | 0.20 | 34.93 | - | 35.13 | - | 56.00 | 46.00 | -20.87 | - |
| 6 | 3.512 | 0.35 | 31.26 | - | 31.61 | - | 56.00 | 46.00 | -24.39 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

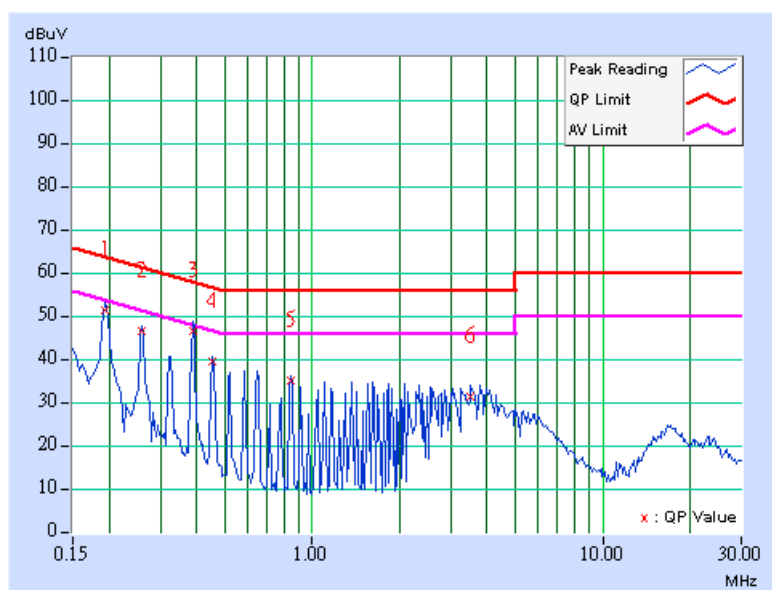


9.2.4 OUT BAND EMISSION


TEST MODE A: 802.11g CH6 + 802.11a CH157

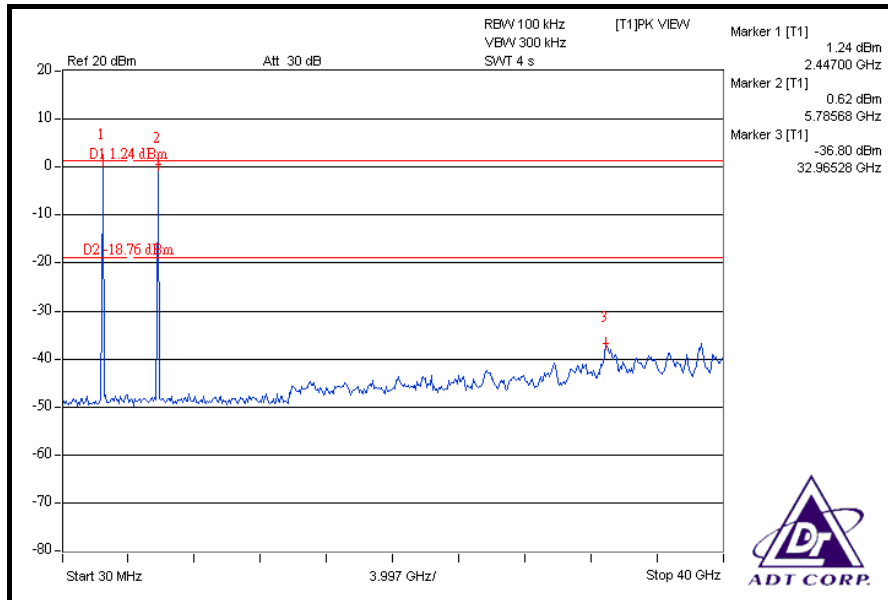


TEST MODE B: 802.11g CH6 + 802.11a Draft 802.11n (20MHz) CH157

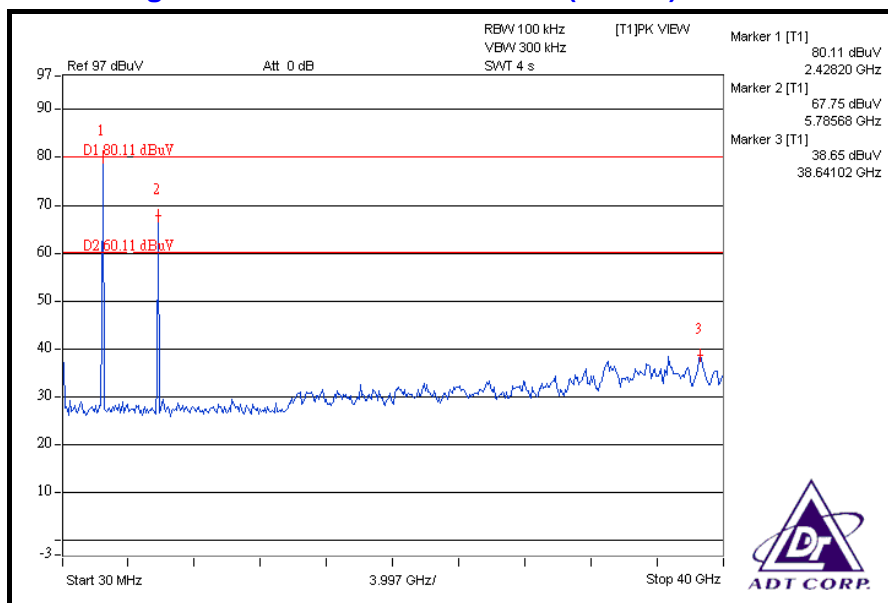

TEST MODE C: Draft 802.11n (20MHz) CH6 + 802.11a CH157

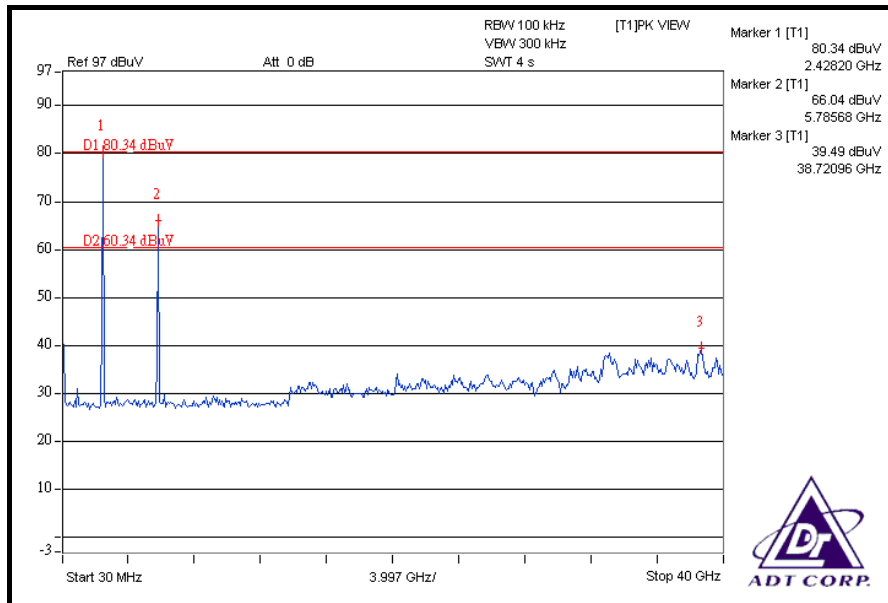

TEST MODE D: Draft 802.11n (20MHz) CH6 + 802.11a Draft 802.11n (20MHz) CH157

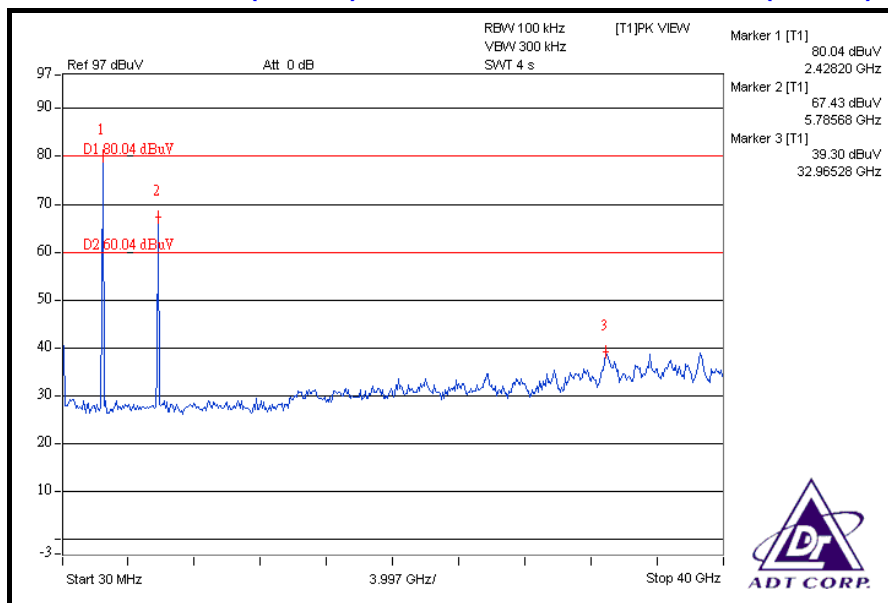

---END---