

FCC Test Report

Equipment : PowerLine AV 500 Wireless AC600 Extender
Brand Name : D-Link
Model No. : DHP-W312AV
FCC ID : KA2HPW312AVA1
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
FCC Classification : NII
Applicant : D-Link Corporation
17595 Mt. Herrmann, Fountain Valley, CA 92708 U.S.A.

The product sample received on May 07, 2014 and completely tested on Jun. 05, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



James Fan / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	Emission Bandwidth	15
3.3	RF Output Power.....	17
3.4	Peak Power Spectral Density.....	20
3.5	Transmitter Radiated Unwanted Emissions and Band Edge	23
3.6	Frequency Stability.....	46
4	TEST EQUIPMENT AND CALIBRATION DATA	48
	APPENDIX A. TEST PHOTOS	A1-A3

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1805720MHz 59.00 (Margin 5.46dB) - QP 51.42 (Margin 3.04dB) - AV	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	Bandwidth [MHz] 20M: 22.20 / 40M: 45.10 80M: 83.48	Information only	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm] 5150-5250MHz: 15.24	Power [dBm] 5150-5250MHz: 30	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5150-5250MHz: 2.33	PPSD [dBm/MHz] 5150-5250MHz: 17	Complied
3.5	15.407(b)	Transmitter Unwanted Emissions and Band Edge	Restricted Bands [dBuV/m at 3m]: 10480.00MHz 53.00 (Margin 1.00dB) – AV	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.6	15.407(g)	Frequency Stability	4.8423 ppm	Signal shall remain in-band	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5150-5250	a	5180-5240	36-48 [4]	1	15.24	Yes
5150-5250	n(HT20)	5180-5240	36-48 [4]	1	15.16	Yes
5150-5250	n(HT40)	5190-5230	38-46 [2]	1	15.11	Yes
5150-5250	ac(VHT20)	5180-5240	36-48 [4]	1	15.21	Yes
5150-5250	ac(VHT40)	5190-5230	38-46 [2]	1	15.16	Yes
5150-5250	ac(VHT80)	5210	42 [1]	1	15.13	Yes

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Connector	Gain (dBi)
1	Integral	PCB	I-PEX	4.63

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 91.59% - IEEE 802.11a	0.38
<input checked="" type="checkbox"/> 90.64% - IEEE 802.11ac (VHT20)	0.43
<input checked="" type="checkbox"/> 79.38% - IEEE 802.11ac (VHT40)	1.00
<input checked="" type="checkbox"/> 70.14% - IEEE 802.11ac (VHT80)	1.54

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> 100-240Vac, 50/60Hz, 0.15A		
Test Voltage	<input checked="" type="checkbox"/> Vnom (110 V)	<input checked="" type="checkbox"/> Vmax (126.5 V)	<input checked="" type="checkbox"/> Vmin (93.5 V)
Test Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (50°C)	<input checked="" type="checkbox"/> Tmin (-30°C)

1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E6430	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 662911 v02r01

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Mark Liao	22°C / 61%	Jun. 02, 2014
AC Conduction	CO04-HY	Skys Huang	22°C / 64%	Jun. 05, 2014
Radiated Emission	03CH03-HY	Jack Li	23-24°C / 64-65%	May 25 ~ May 28, 2014
Test site registered number [643075] with FCC				
Test site registered number [4086B-1] with IC				

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing (5150-5250MHz)			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a	1	6-54Mbps	6 Mbps
HT20	1	MCS 0-7	MCS 0
HT40	1	MCS 0-7	MCS 0
VHT20	1	MCS 0-8	MCS 0
VHT40	1	MCS 0-9	MCS 0
VHT80	1	MCS 0-9	MCS 0

2.2 The Worst Case Power Setting Parameter




The Worst Case Power Setting Parameter (5150-5250MHz band)							
Test Software	RTL819x						
Test Software Version	2.3						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5180	5200	5240	5190	5230	5210
11a,6-54Mbps	1	30	30	29	--	--	--
HT20,M0-7	1	31	30	29	--	--	--
HT40,M0-7	1	--	--	--	31	31	--
VHT20,M0-8	1	31	30	29	--	--	--
VHT40,M0-9	1	--	--	--	31	31	--
VHT80,M0-9	1	--	--	--	--	--	30

2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density, Emission Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
Operating Mode	<input checked="" type="checkbox"/> 1. AC Power & Radio link (WLAN)		
Modulation Mode	11a, VHT20, VHT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

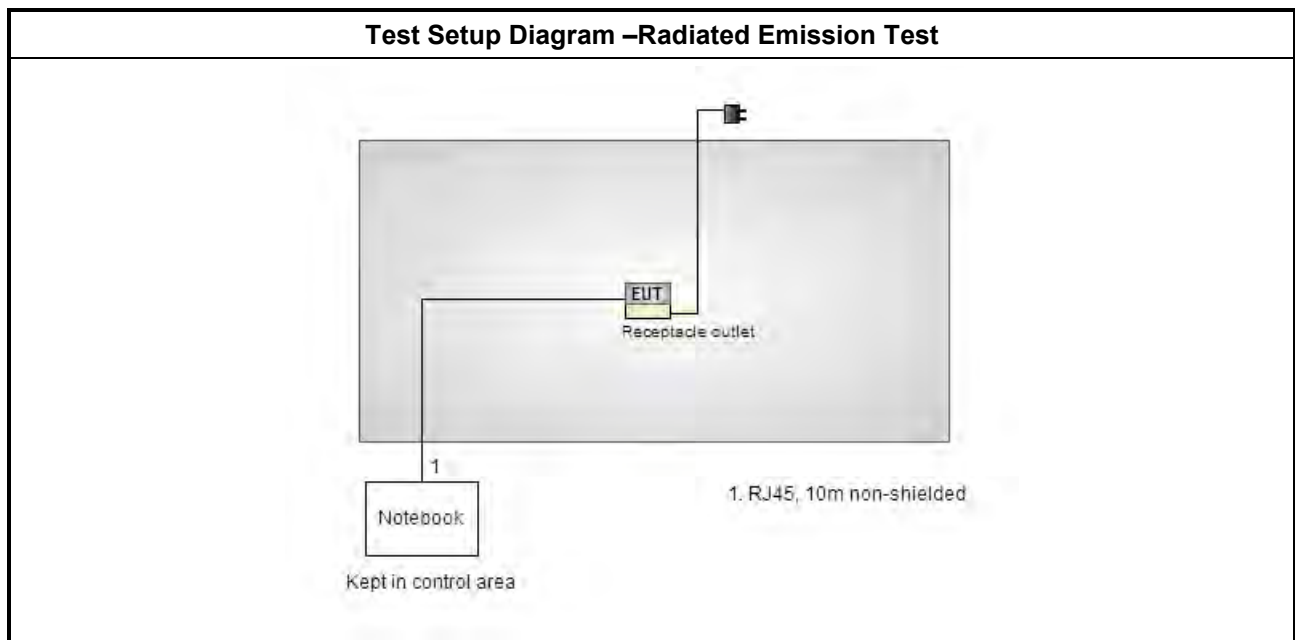

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

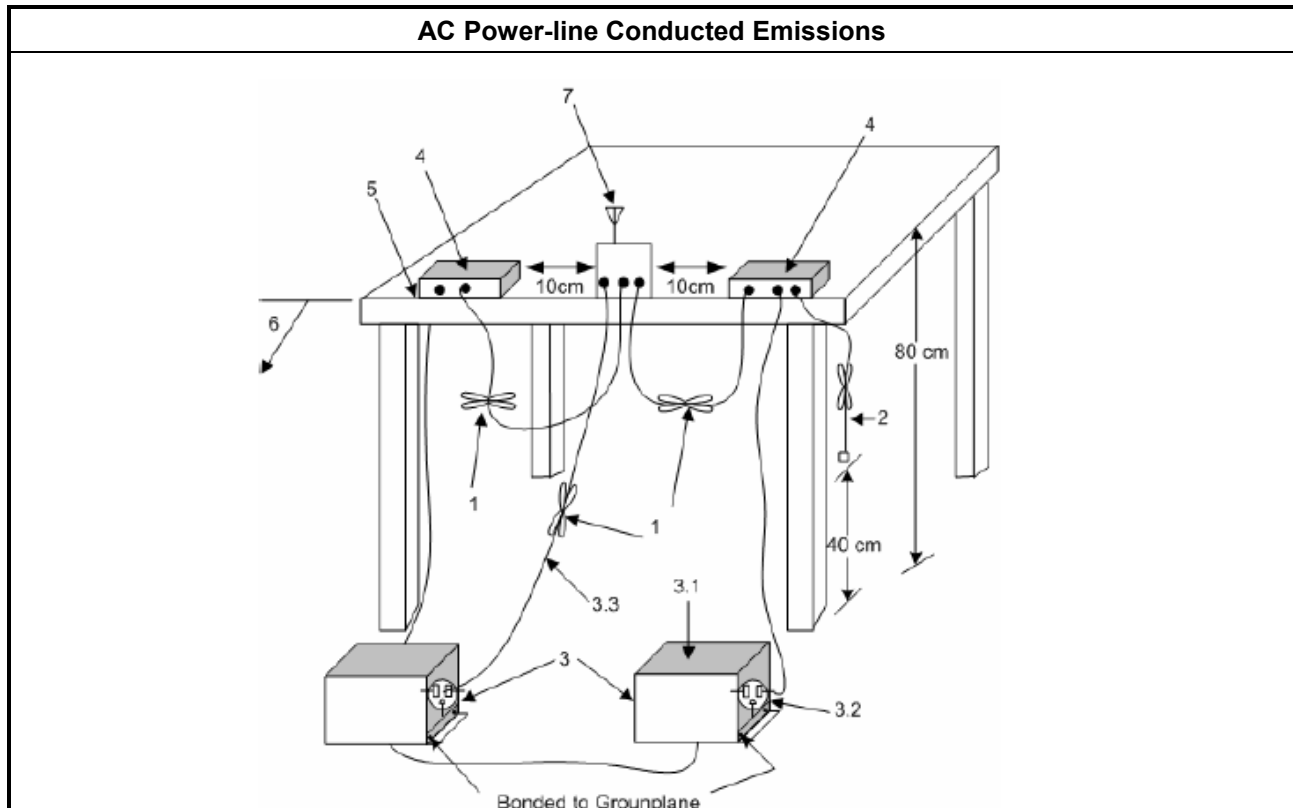


3.1.5 Test Result of AC Power-line Conducted Emissions

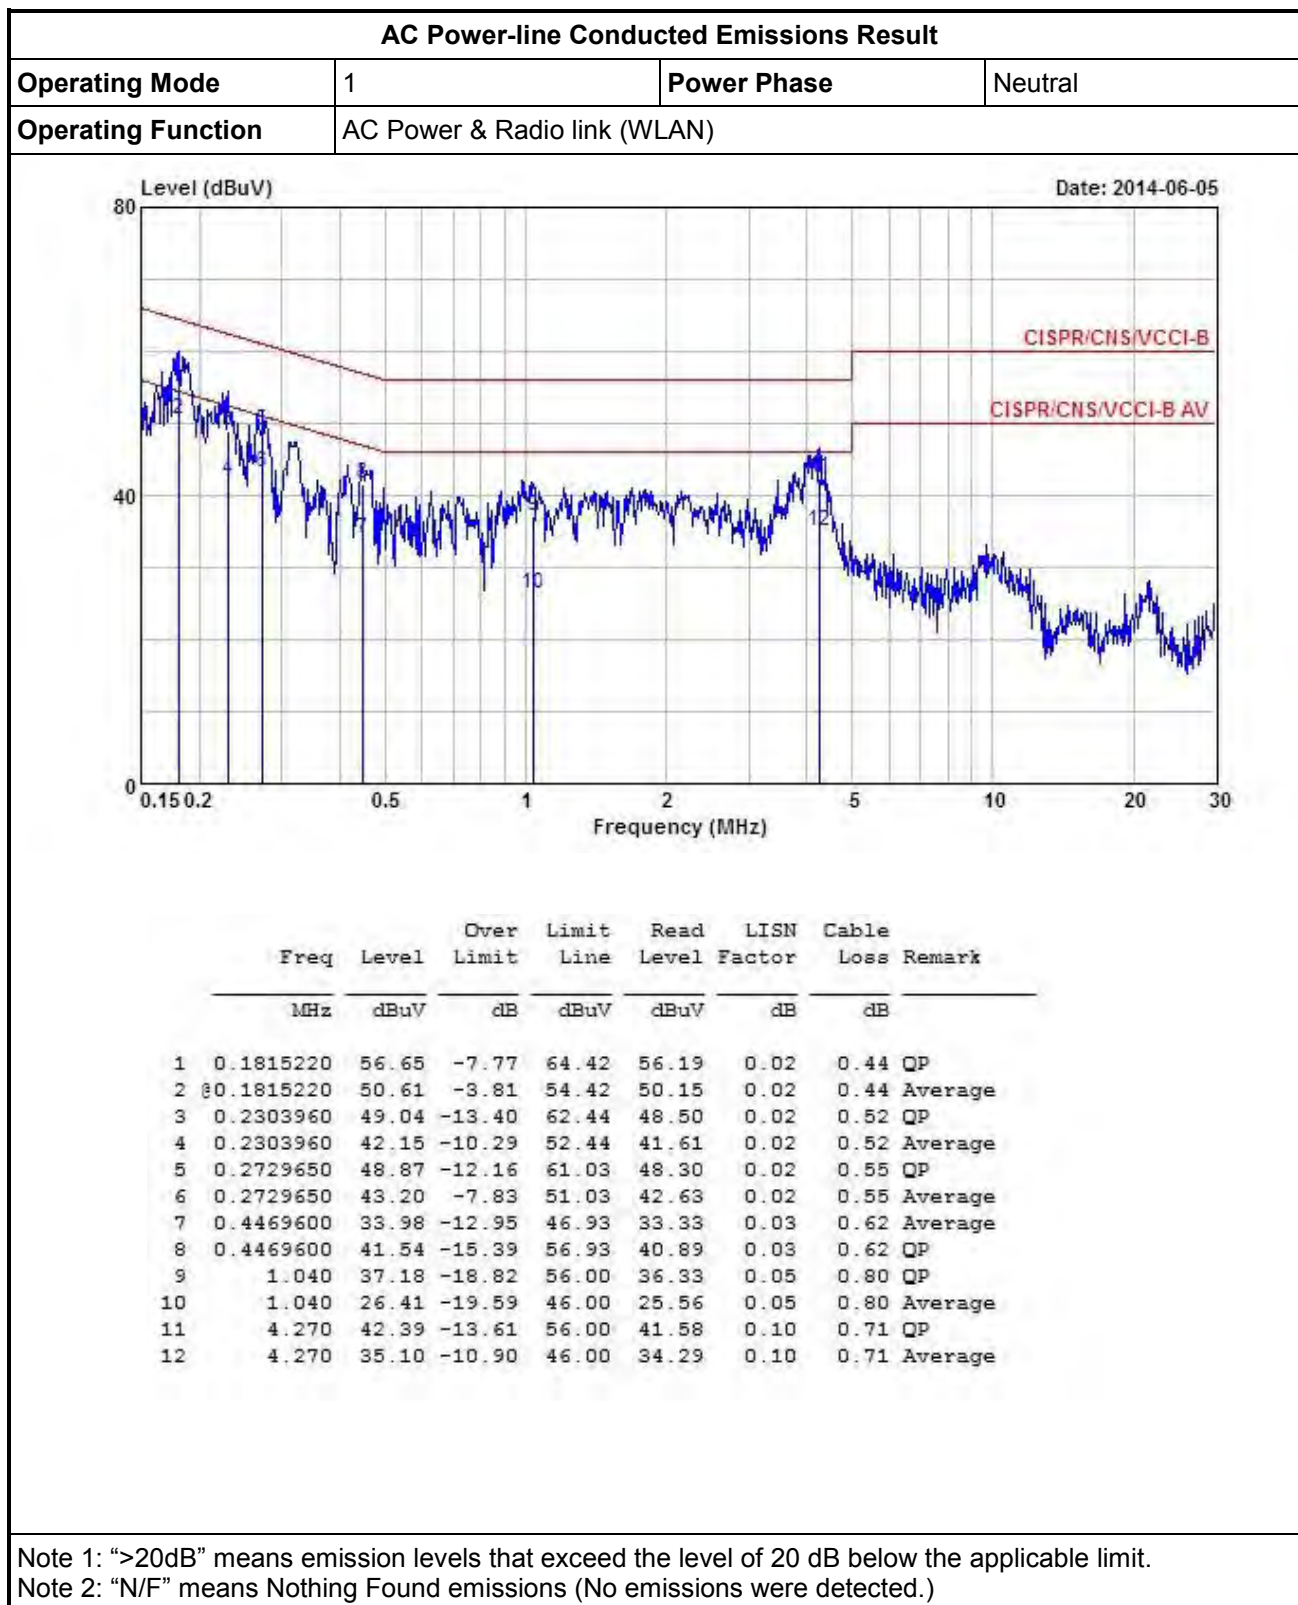

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link (WLAN)		

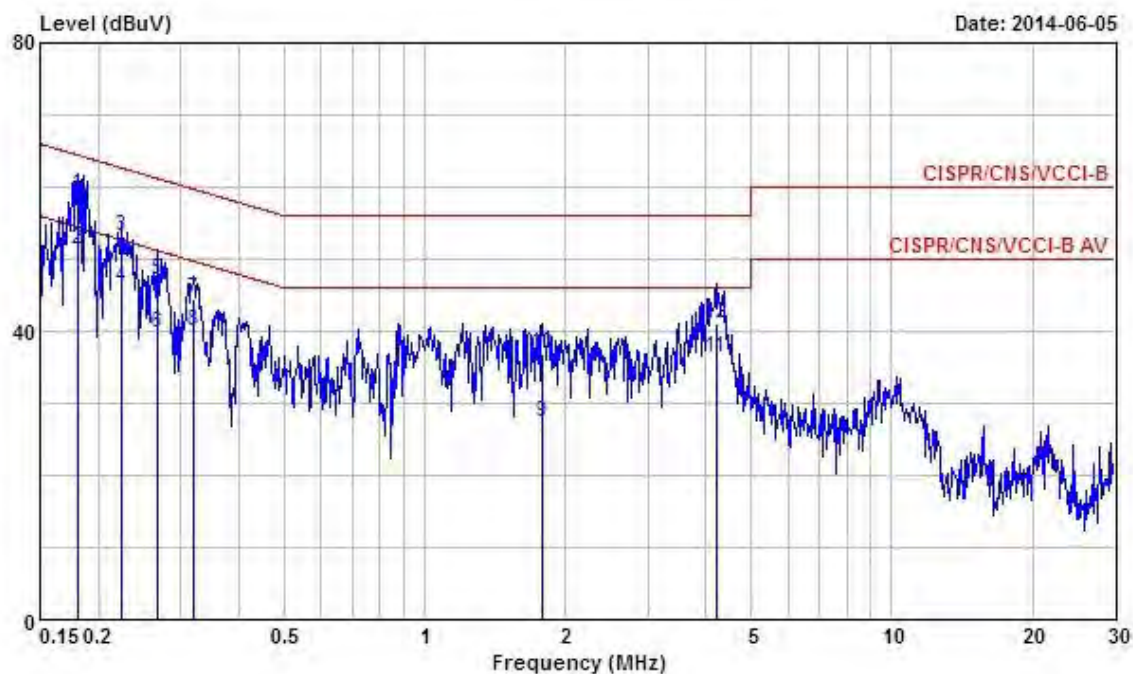

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1805720	59.00	-5.46	64.46	58.53	0.03	0.44	QP
2	0.1805720	51.42	-3.04	54.46	50.95	0.03	0.44	Average
3	0.2231870	53.08	-9.62	62.70	52.53	0.03	0.52	QP
4	0.2231870	46.00	-6.70	52.70	45.45	0.03	0.52	Average
5	0.2686610	47.07	-14.09	61.16	46.50	0.03	0.54	QP
6	0.2686610	39.69	-11.47	51.16	39.12	0.03	0.54	Average
7	0.3199920	44.59	-15.12	59.71	43.99	0.03	0.57	QP
8	0.3199920	40.10	-9.61	49.71	39.50	0.03	0.57	Average
9	1.780	27.33	-18.67	46.00	26.46	0.07	0.80	Average
10	1.780	36.91	-19.09	56.00	36.04	0.07	0.80	QP
11	4.200	36.21	-9.79	46.00	35.40	0.10	0.71	Average
12	4.200	41.09	-14.91	56.00	40.28	0.10	0.71	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth


3.2.1 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.2 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.3 Test Setup

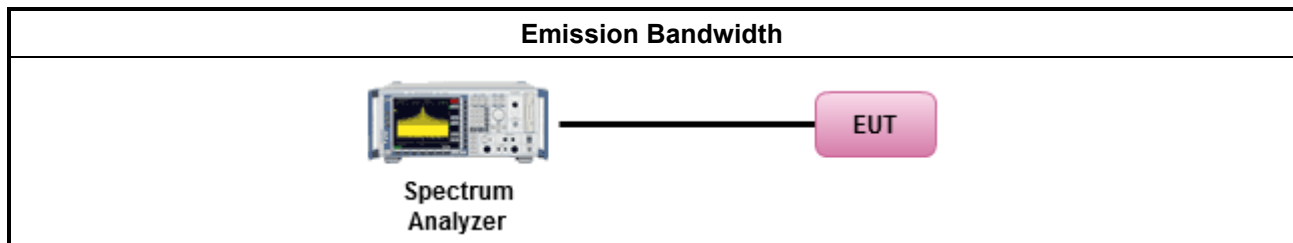

3.2.4 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				26dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11a	1	5180	16.82	--	--	--	21.16	--	--	--
11a	1	5200	16.82	--	--	--	21.28	--	--	--
11a	1	5240	16.79	--	--	--	21.10	--	--	--
VHT20	1	5180	17.95	--	--	--	22.03	--	--	--
VHT20	1	5200	17.95	--	--	--	22.14	--	--	--
VHT20	1	5240	17.95	--	--	--	22.20	--	--	--
VHT40	1	5190	36.86	--	--	--	44.87	--	--	--
VHT40	1	5230	36.86	--	--	--	45.10	--	--	--
VHT80	1	5210	75.65	--	--	--	83.48	--	--	--
Result			Complied							

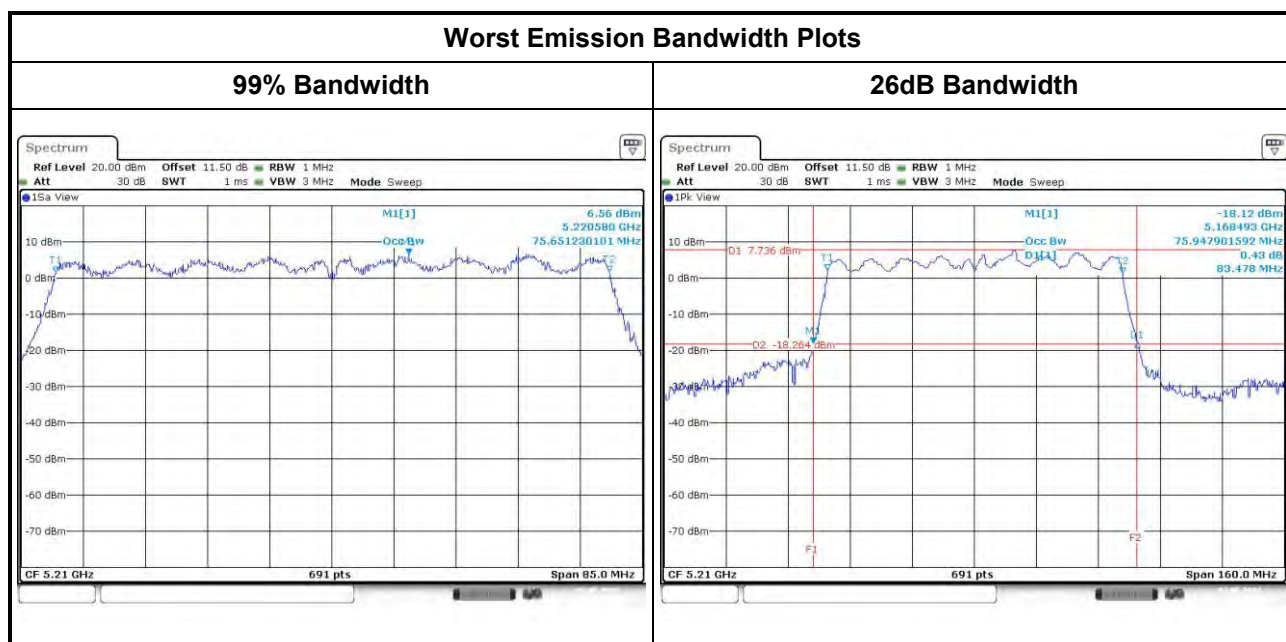

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit
<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Maximum Conducted Output Power
<input type="checkbox"/> Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/> Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
<input type="checkbox"/> Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/> Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor
<input checked="" type="checkbox"/> Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method PM-G (using a gated RF average power meter).
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

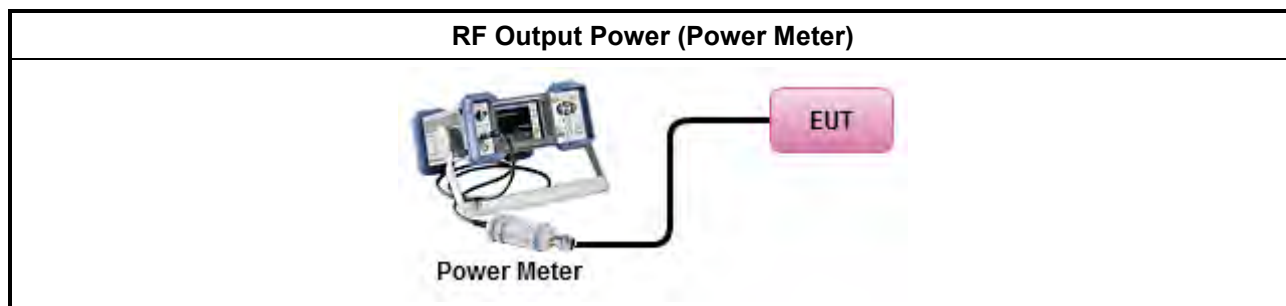

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	-	-	-
Maximum G_{ANT} (dBi)		4.63	-	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	4.63	1	1	-	-
HT20,M0-7	4.63	1	1	-	-
HT40,M0-7	4.63	1	1	-	-
VHT20,M0-8	4.63	1	1	-	-
VHT40,M0-9	4.63	1	1	-	-
VHT80,M0-9	4.63	1	1		-

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted (Average) Output Power (5150-5250MHz band)											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5180	15.18	--	--	--	15.18	30.00	4.63	19.81	36.00
11a	1	5200	15.24	--	--	--	15.24	30.00	4.63	19.87	36.00
11a	1	5240	15.23	--	--	--	15.23	30.00	4.63	19.86	36.00
HT20	1	5180	15.16	--	--	--	15.16	30.00	4.63	19.79	36.00
HT20	1	5200	15.14	--	--	--	15.14	30.00	4.63	19.77	36.00
HT20	1	5240	15.02	--	--	--	15.02	30.00	4.63	19.65	36.00
HT40	1	5190	15.06	--	--	--	15.06	30.00	4.63	19.69	36.00
HT40	1	5230	15.11	--	--	--	15.11	30.00	4.63	19.74	36.00
VHT20	1	5180	15.21	--	--	--	15.21	30.00	4.63	19.84	36.00
VHT20	1	5200	15.17	--	--	--	15.17	30.00	4.63	19.80	36.00
VHT20	1	5240	15.05	--	--	--	15.05	30.00	4.63	19.68	36.00
VHT40	1	5190	15.12	--	--	--	15.12	30.00	4.63	19.75	36.00
VHT40	1	5230	15.16	--	--	--	15.16	30.00	4.63	19.79	36.00
VHT80	1	5210	15.13	--	--	--	15.13	30.00	4.63	19.76	36.00
Result			Complied								

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit
The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 (spectral trace averaging).
<input checked="" type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

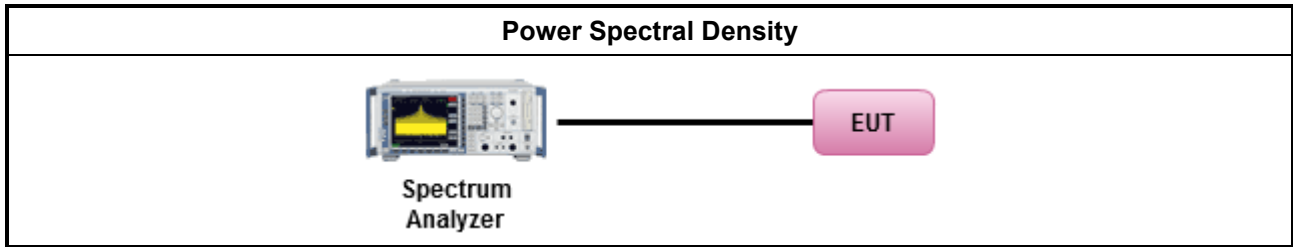

3.4.5 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result (5150-5250MHz band)							
Condition			Peak Power Spectral Density (dBm/MHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5180	2.31	17.00	4.63	6.94	23
11a	1	5200	2.09	17.00	4.63	6.72	23
11a	1	5240	2.32	17.00	4.63	6.95	23
VHT20	1	5180	2.33	17.00	4.63	6.96	23
VHT20	1	5200	2.10	17.00	4.63	6.73	23
VHT20	1	5240	2.21	17.00	4.63	6.84	23
VHT40	1	5190	-0.78	17.00	4.63	3.85	23
VHT40	1	5230	-0.77	17.00	4.63	3.86	23
VHT80	1	5210	-2.57	17.00	4.63	2.06	23
Result			Complied				

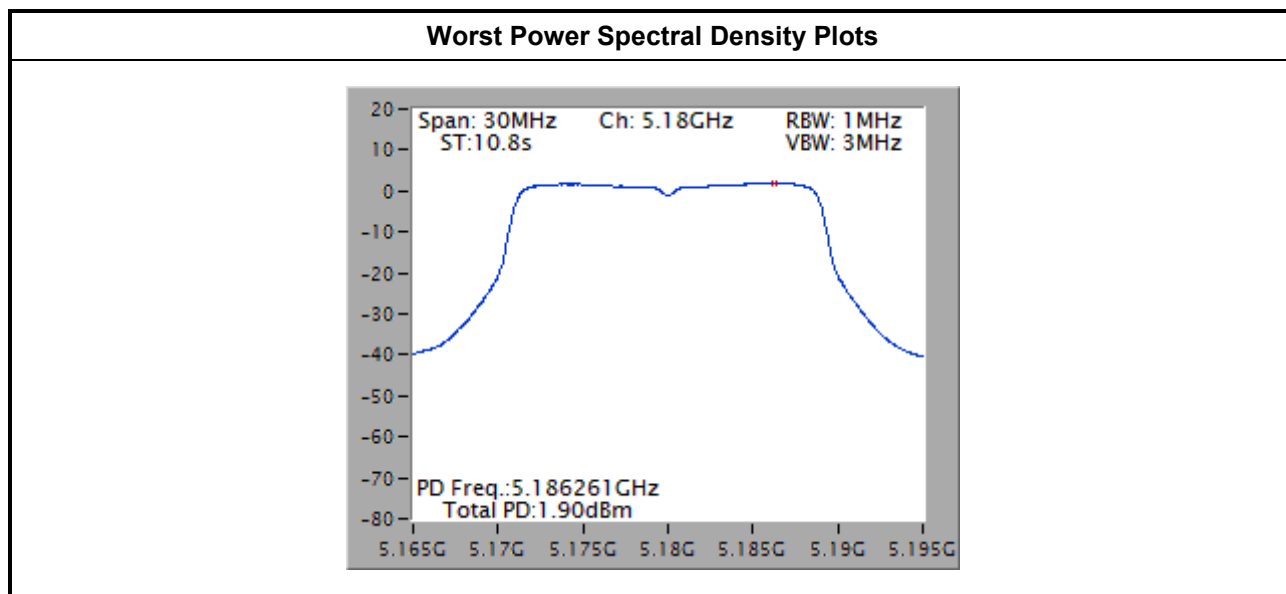

Note 1: Peak Power Spectral Density w/o Duty Factor.

3.5 Transmitter Radiated Unwanted Emissions and Band Edge

3.5.1 Transmitter Radiated Unwanted Emissions and Band Edge Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)3).
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
<input type="checkbox"/>	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

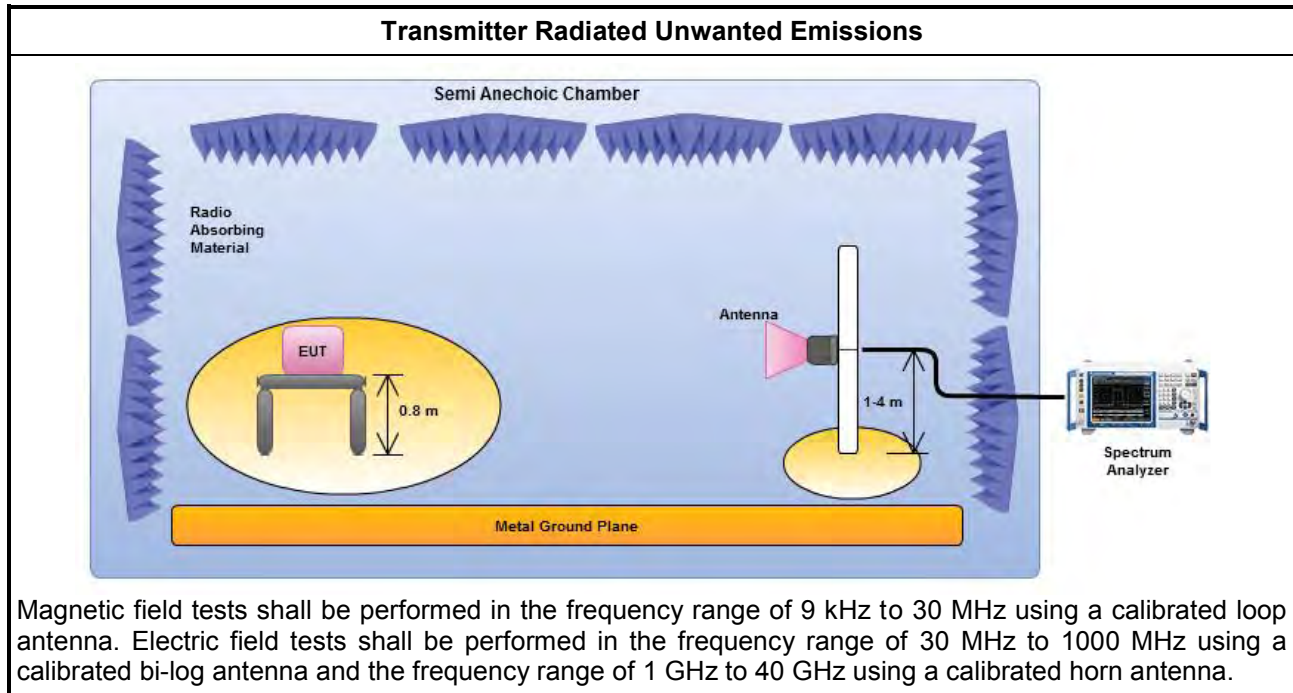


Note: Test distance is 3m.

3.5.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

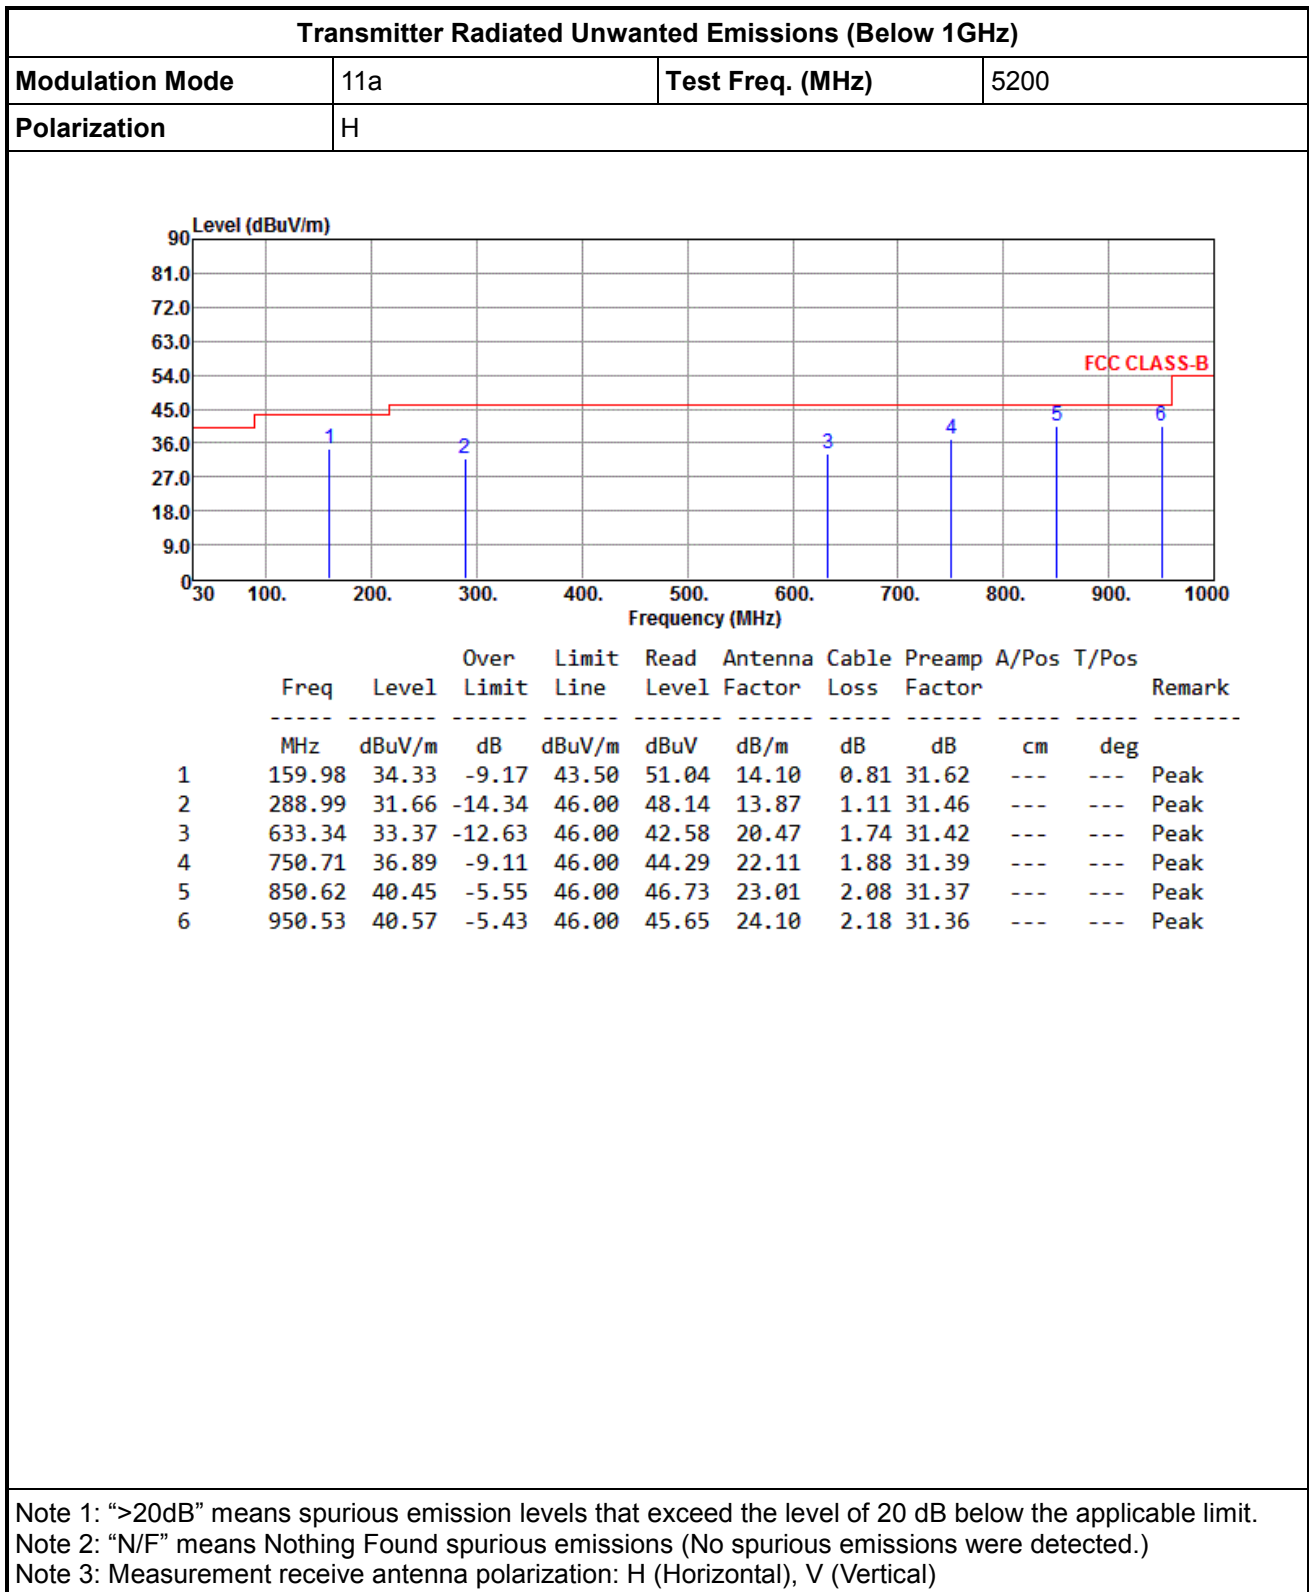

Transmitter Radiated Unwanted Emissions (Below 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5200
Polarization	V		

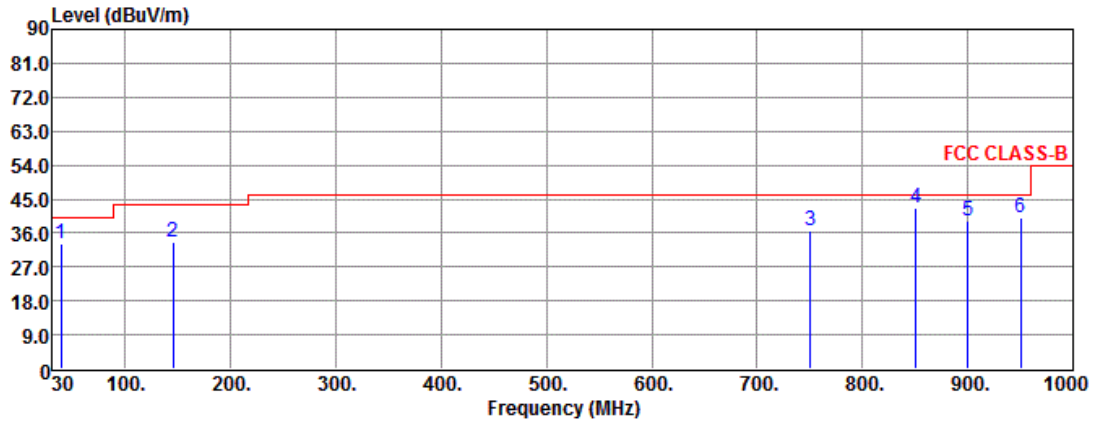

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	38.73	33.20	-6.80	40.00	50.34	14.20	0.47	31.81	---	---	Peak
2	145.43	33.64	-9.86	43.50	50.64	13.87	0.77	31.64	---	---	Peak
3	750.71	36.77	-9.23	46.00	44.17	22.11	1.88	31.39	---	---	Peak
4	850.62	42.70	-3.30	46.00	48.98	23.01	2.08	31.37	100	134	QP
5	900.09	39.20	-6.80	46.00	44.73	23.70	2.14	31.37	---	---	Peak
6	950.53	40.11	-5.89	46.00	45.19	24.10	2.18	31.36	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

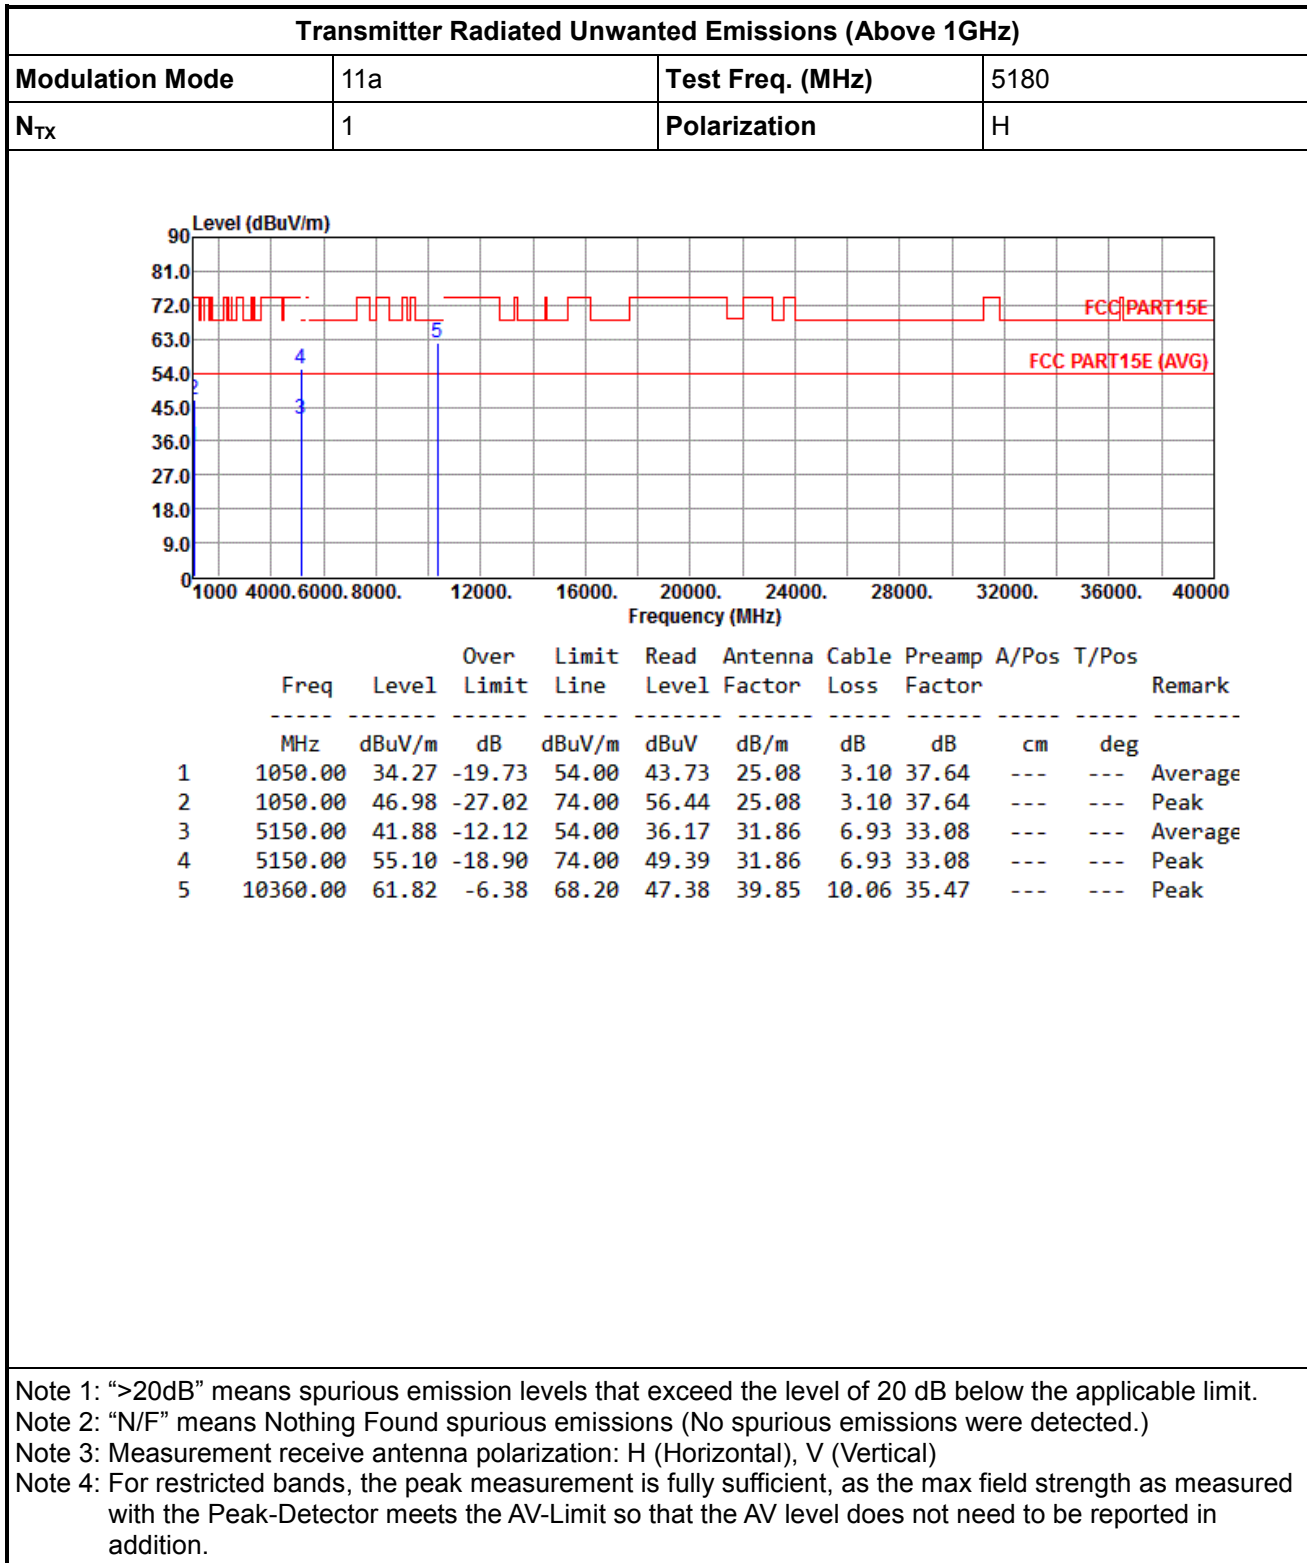

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

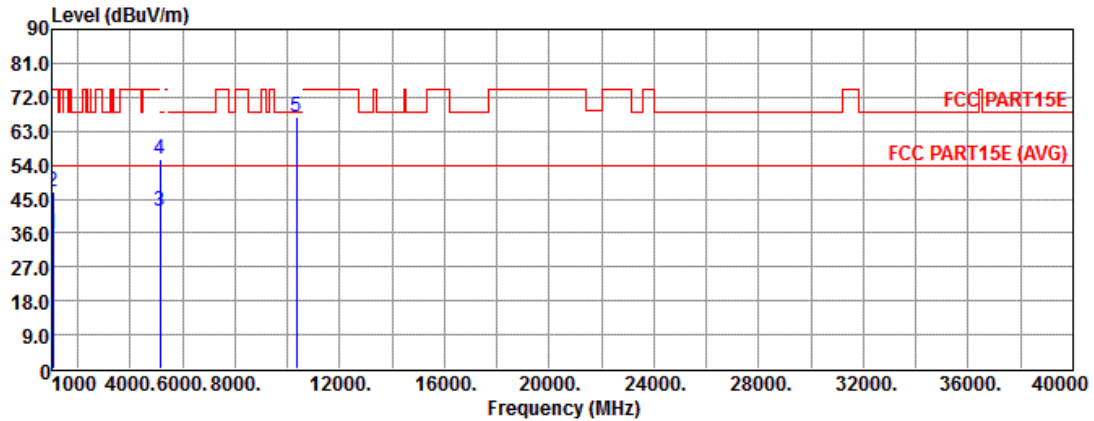

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.62	-18.38	54.00	45.08	25.08	3.10	37.64	---	---	Average
2	1050.00	46.85	-27.15	74.00	56.31	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.92	-12.08	54.00	36.21	31.86	6.93	33.08	---	---	Average
4	5150.00	55.42	-18.58	74.00	49.71	31.86	6.93	33.08	---	---	Peak
5	10360.00	66.84	-1.36	68.20	52.40	39.85	10.06	35.47	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	H

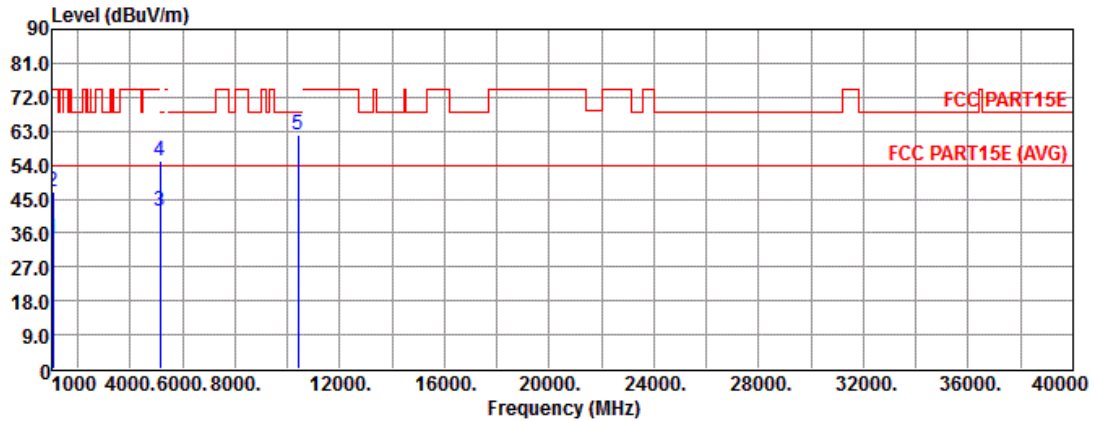

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	34.27	-19.73	54.00	43.73	25.08	3.10	37.64	---	---	Average
2	1050.00	46.98	-27.02	74.00	56.44	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.60	-12.40	54.00	35.89	31.86	6.93	33.08	---	---	Average
4	5150.00	55.32	-18.68	74.00	49.61	31.86	6.93	33.08	---	---	Peak
5	10400.00	62.22	-5.98	68.20	47.72	39.92	10.06	35.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

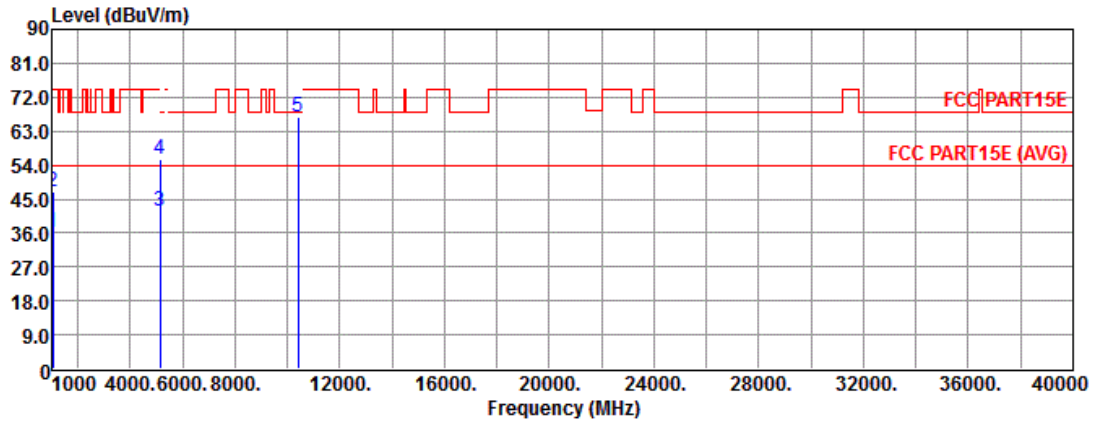

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.99	-18.01	54.00	45.45	25.08	3.10	37.64	---	---	Average
2	1050.00	47.12	-26.88	74.00	56.58	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.57	-12.43	54.00	35.86	31.86	6.93	33.08	---	---	Average
4	5150.00	55.37	-18.63	74.00	49.66	31.86	6.93	33.08	---	---	Peak
5	10400.00	66.59	-1.61	68.20	52.09	39.92	10.06	35.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	H

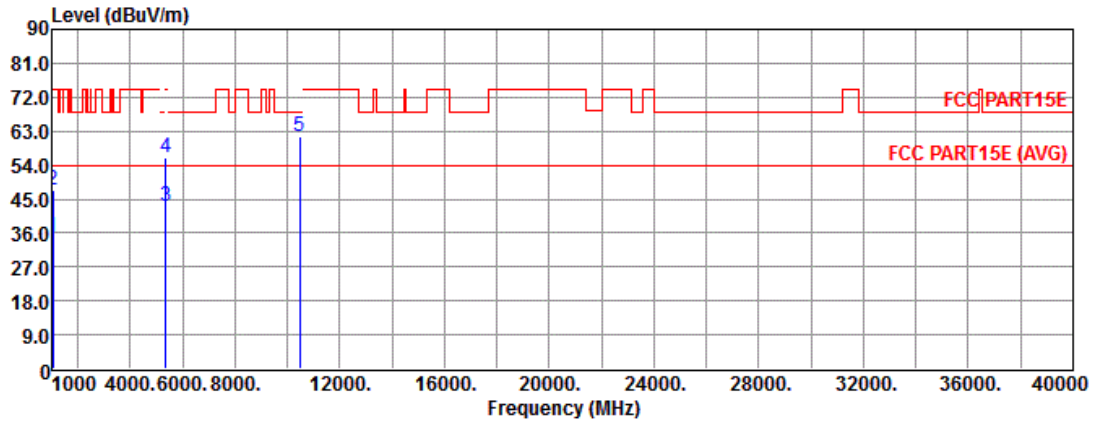

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	34.88	-19.12	54.00	44.34	25.08	3.10	37.64	---	---	Average
2	1050.00	47.19	-26.81	74.00	56.65	25.08	3.10	37.64	---	---	Peak
3	5360.00	43.20	-10.80	54.00	37.20	31.94	7.12	33.06	---	---	Average
4	5360.00	55.97	-18.03	74.00	49.97	31.94	7.12	33.06	---	---	Peak
5	10480.00	61.73	-6.47	68.20	47.10	40.06	10.07	35.50	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

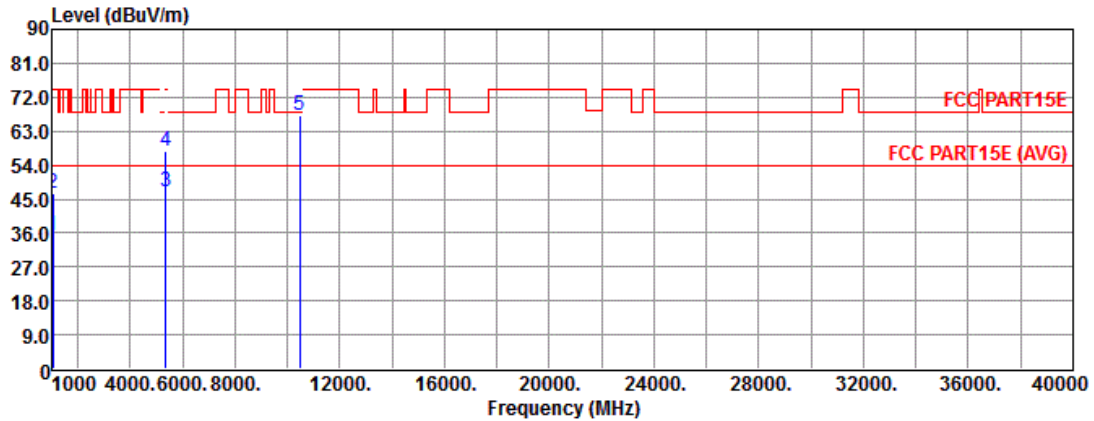

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.26	-18.74	54.00	44.72	25.08	3.10	37.64	---	---	Average
2	1050.00	46.39	-27.61	74.00	55.85	25.08	3.10	37.64	---	---	Peak
3	5360.00	46.96	-7.04	54.00	40.96	31.94	7.12	33.06	---	---	Average
4	5360.00	57.84	-16.16	74.00	51.84	31.94	7.12	33.06	---	---	Peak
5	10480.00	67.14	-1.06	68.20	52.51	40.06	10.07	35.50	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																															
Modulation Mode	VHT20				Test Freq. (MHz)	5180																																																																																									
N _{TX}	1				Polarization	H																																																																																									
<div><div><div>Level (dBuV/m)</div><div><div><div><div><div><div>90</div><div>81.0</div><div>72.0</div><div>63.0</div><div>54.0</div><div>45.0</div><div>36.0</div><div>27.0</div><div>18.0</div><div>9.0</div><div>0</div></div></div><div><div><div><div><div>1000</div><div>4000</div><div>6000</div><div>8000</div><div>12000</div><div>16000</div><div>20000</div><div>24000</div><div>28000</div><div>32000</div><div>36000</div><div>40000</div></div></div><div>Frequency (MHz)</div></div></div><div><div><div><div><div>4</div><div>5</div></div></div><div><div><div><div><div>FCC PART15E</div><div>FCC PART15E (AVG)</div></div></div></div></div></div></div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preampl Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>1050.00</td><td>34.40</td><td>-19.60</td><td>54.00</td><td>43.86</td><td>25.08</td><td>3.10</td><td>37.64</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>2</td><td>1050.00</td><td>46.75</td><td>-27.25</td><td>74.00</td><td>56.21</td><td>25.08</td><td>3.10</td><td>37.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>5150.00</td><td>41.74</td><td>-12.26</td><td>54.00</td><td>36.03</td><td>31.86</td><td>6.93</td><td>33.08</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>4</td><td>5150.00</td><td>54.99</td><td>-19.01</td><td>74.00</td><td>49.28</td><td>31.86</td><td>6.93</td><td>33.08</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>10360.00</td><td>62.57</td><td>-5.63</td><td>68.20</td><td>48.13</td><td>39.85</td><td>10.06</td><td>35.47</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table></div></div></div></div></div>													Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	1050.00	34.40	-19.60	54.00	43.86	25.08	3.10	37.64	---	---	Average	2	1050.00	46.75	-27.25	74.00	56.21	25.08	3.10	37.64	---	---	Peak	3	5150.00	41.74	-12.26	54.00	36.03	31.86	6.93	33.08	---	---	Average	4	5150.00	54.99	-19.01	74.00	49.28	31.86	6.93	33.08	---	---	Peak	5	10360.00	62.57	-5.63	68.20	48.13	39.85	10.06	35.47	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	1050.00	34.40	-19.60	54.00	43.86	25.08	3.10	37.64	---	---	Average																																																																																				
2	1050.00	46.75	-27.25	74.00	56.21	25.08	3.10	37.64	---	---	Peak																																																																																				
3	5150.00	41.74	-12.26	54.00	36.03	31.86	6.93	33.08	---	---	Average																																																																																				
4	5150.00	54.99	-19.01	74.00	49.28	31.86	6.93	33.08	---	---	Peak																																																																																				
5	10360.00	62.57	-5.63	68.20	48.13	39.85	10.06	35.47	---	---	Peak																																																																																				
<div>Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div>																																																																																															

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

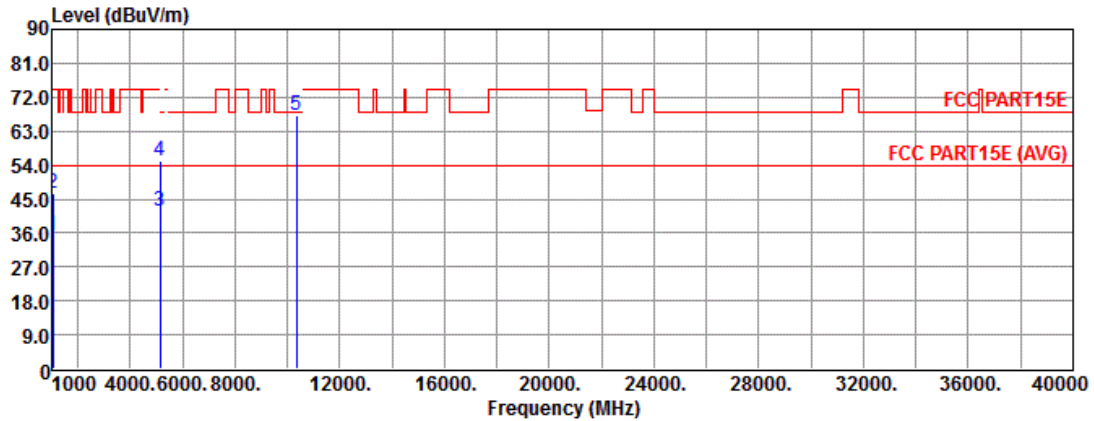

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.39	-18.61	54.00	44.85	25.08	3.10	37.64	---	---	Average
2	1050.00	46.53	-27.47	74.00	55.99	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.99	-12.01	54.00	36.28	31.86	6.93	33.08	---	---	Average
4	5150.00	55.07	-18.93	74.00	49.36	31.86	6.93	33.08	---	---	Peak
5	10360.00	66.99	-1.21	68.20	52.55	39.85	10.06	35.47	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

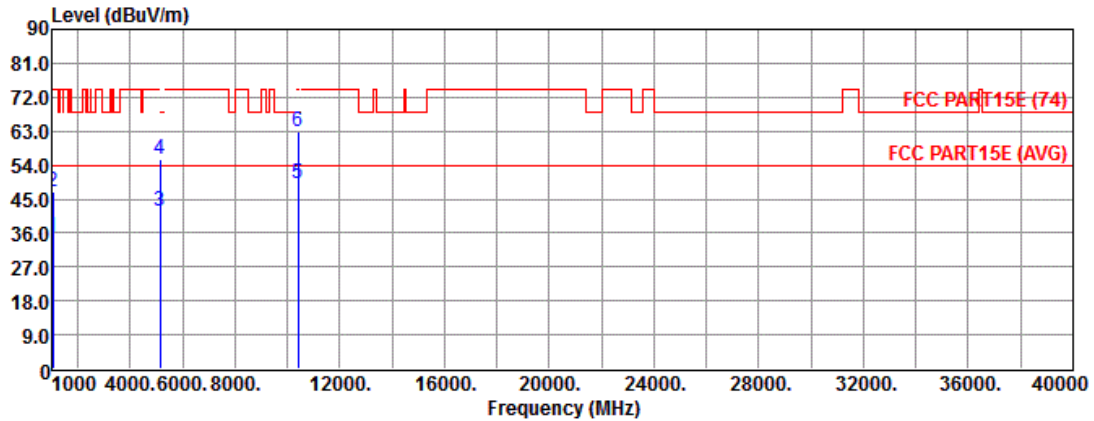

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	34.87	-19.13	54.00	44.33	25.08	3.10	37.64	---	---	Average
2	1050.00	47.11	-26.89	74.00	56.57	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.83	-12.17	54.00	36.12	31.86	6.93	33.08	---	---	Average
4	5150.00	55.45	-18.55	74.00	49.74	31.86	6.93	33.08	---	---	Peak
5	10400.00	48.93	-5.07	54.00	34.43	39.92	10.06	35.48	---	---	Average
6	10400.00	62.87	-11.13	74.00	48.37	39.92	10.06	35.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

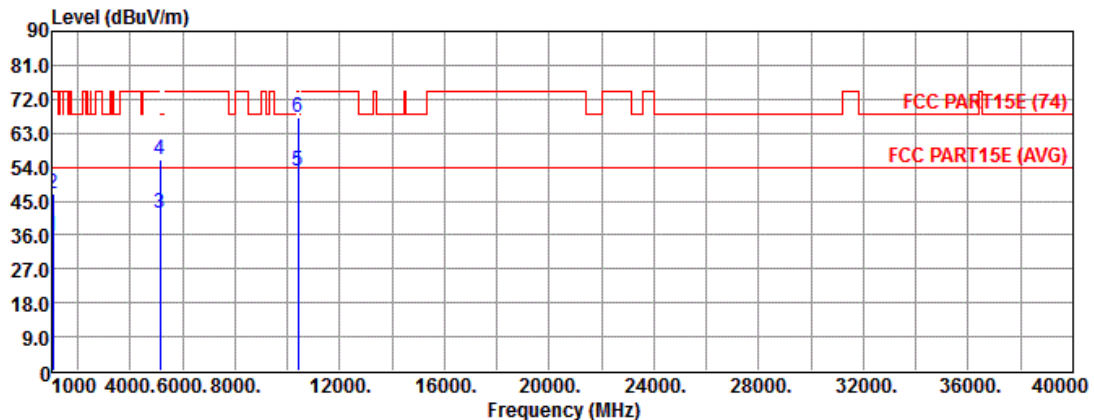

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.65	-18.35	54.00	45.11	25.08	3.10	37.64	---	---	Average
2	1050.00	46.88	-27.12	74.00	56.34	25.08	3.10	37.64	---	---	Peak
3	5150.00	41.97	-12.03	54.00	36.26	31.86	6.93	33.08	---	---	Average
4	5150.00	55.94	-18.06	74.00	50.23	31.86	6.93	33.08	---	---	Peak
5	10400.00	52.78	-1.22	54.00	38.28	39.92	10.06	35.48	---	---	Average
6	10400.00	67.32	-6.68	74.00	52.82	39.92	10.06	35.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

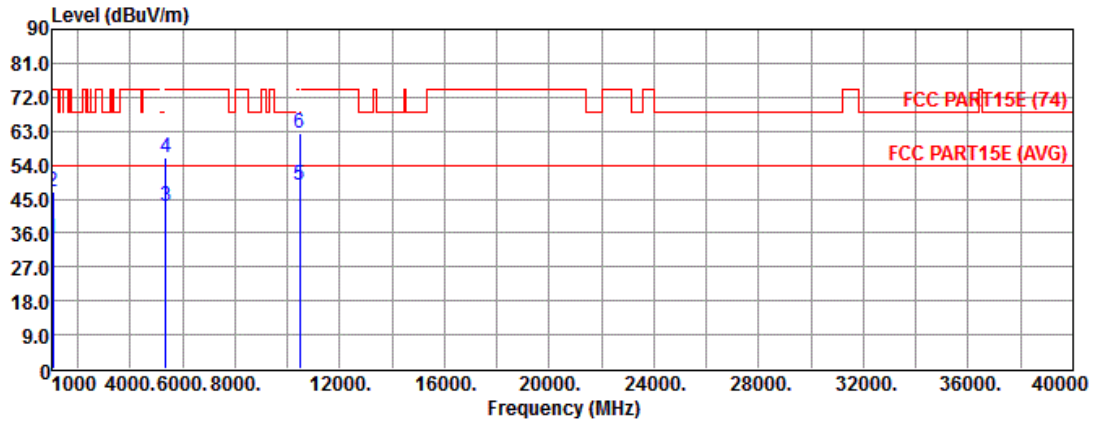

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	34.29	-19.71	54.00	43.75	25.08	3.10	37.64	---	---	Average
2	1050.00	46.77	-27.23	74.00	56.23	25.08	3.10	37.64	---	---	Peak
3	5360.00	43.01	-10.99	54.00	37.01	31.94	7.12	33.06	---	---	Average
4	5360.00	56.03	-17.97	74.00	50.03	31.94	7.12	33.06	---	---	Peak
5	10480.00	48.55	-5.45	54.00	33.92	40.06	10.07	35.50	---	---	Average
6	10480.00	62.36	-11.64	74.00	47.73	40.06	10.07	35.50	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

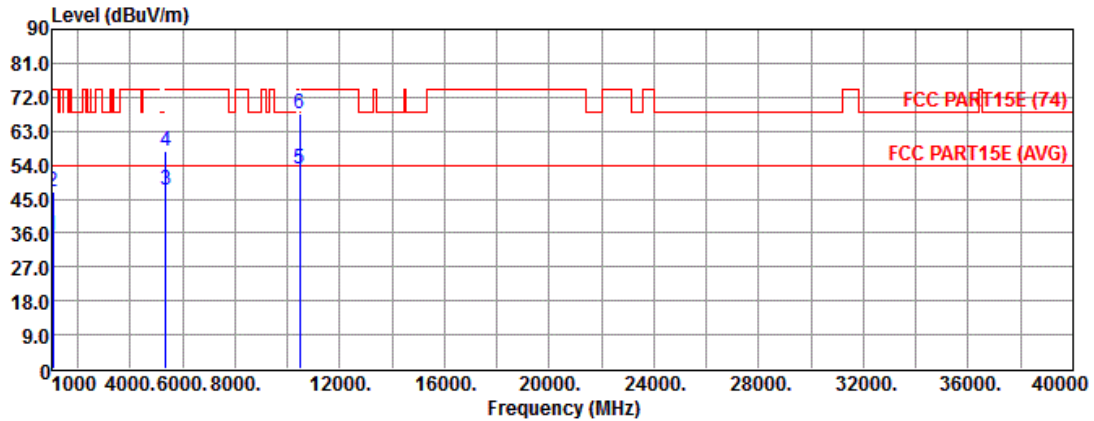

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.34	-18.66	54.00	44.80	25.08	3.10	37.64	---	---	Average
2	1050.00	46.73	-27.27	74.00	56.19	25.08	3.10	37.64	---	---	Peak
3	5360.00	47.16	-6.84	54.00	41.16	31.94	7.12	33.06	---	---	Average
4	5360.00	57.55	-16.45	74.00	51.55	31.94	7.12	33.06	---	---	Peak
5	10480.00	53.00	-1.00	54.00	38.37	40.06	10.07	35.50	---	---	Average
6	10480.00	67.52	-6.48	74.00	52.89	40.06	10.07	35.50	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.5.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

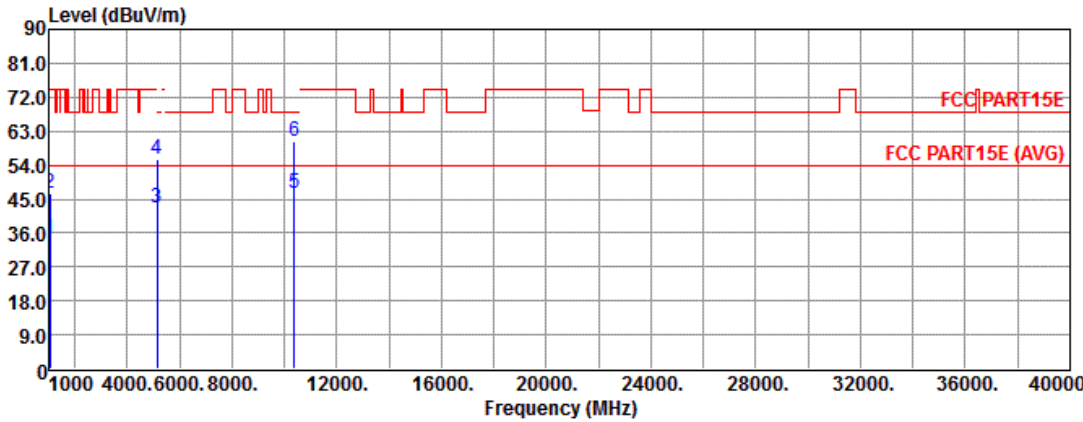Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																											
Modulation Mode	VHT40				Test Freq. (MHz)	5190																																																																																																					
N _{TX}	1				Polarization	H																																																																																																					
<div><div><div>Level (dBuV/m)</div><div></div><div>Frequency (MHz)</div></div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preampl Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>1050.00</td><td>34.55</td><td>-19.45</td><td>54.00</td><td>44.01</td><td>25.08</td><td>3.10</td><td>37.64</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>2</td><td>1050.00</td><td>46.37</td><td>-27.63</td><td>74.00</td><td>55.83</td><td>25.08</td><td>3.10</td><td>37.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>5150.00</td><td>42.85</td><td>-11.15</td><td>54.00</td><td>37.14</td><td>31.86</td><td>6.93</td><td>33.08</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>4</td><td>5150.00</td><td>55.74</td><td>-18.26</td><td>74.00</td><td>50.03</td><td>31.86</td><td>6.93</td><td>33.08</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>10380.00</td><td>46.68</td><td>-7.32</td><td>54.00</td><td>32.22</td><td>39.88</td><td>10.06</td><td>35.48</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>6</td><td>10380.00</td><td>60.13</td><td>-8.07</td><td>68.20</td><td>45.67</td><td>39.88</td><td>10.06</td><td>35.48</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table></div>													Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	1050.00	34.55	-19.45	54.00	44.01	25.08	3.10	37.64	---	---	Average	2	1050.00	46.37	-27.63	74.00	55.83	25.08	3.10	37.64	---	---	Peak	3	5150.00	42.85	-11.15	54.00	37.14	31.86	6.93	33.08	---	---	Average	4	5150.00	55.74	-18.26	74.00	50.03	31.86	6.93	33.08	---	---	Peak	5	10380.00	46.68	-7.32	54.00	32.22	39.88	10.06	35.48	---	---	Average	6	10380.00	60.13	-8.07	68.20	45.67	39.88	10.06	35.48	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	1050.00	34.55	-19.45	54.00	44.01	25.08	3.10	37.64	---	---	Average																																																																																																
2	1050.00	46.37	-27.63	74.00	55.83	25.08	3.10	37.64	---	---	Peak																																																																																																
3	5150.00	42.85	-11.15	54.00	37.14	31.86	6.93	33.08	---	---	Average																																																																																																
4	5150.00	55.74	-18.26	74.00	50.03	31.86	6.93	33.08	---	---	Peak																																																																																																
5	10380.00	46.68	-7.32	54.00	32.22	39.88	10.06	35.48	---	---	Average																																																																																																
6	10380.00	60.13	-8.07	68.20	45.67	39.88	10.06	35.48	---	---	Peak																																																																																																
<div>Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div>																																																																																																											

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N_{TX}	1	Polarization	V

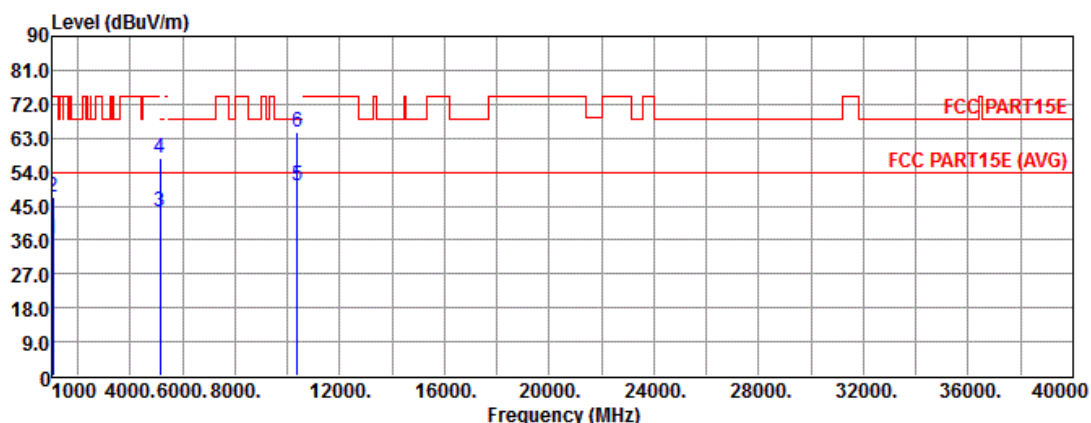

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.12	-17.88	54.00	45.58	25.08	3.10	37.64	---	---	Average
2	1050.00	47.43	-26.57	74.00	56.89	25.08	3.10	37.64	---	---	Peak
3	5150.00	43.42	-10.58	54.00	37.71	31.86	6.93	33.08	---	---	Average
4	5150.00	57.83	-16.17	74.00	52.12	31.86	6.93	33.08	---	---	Peak
5	10380.00	50.44	-3.56	54.00	35.98	39.88	10.06	35.48	---	---	Average
6	10380.00	64.65	-3.55	68.20	50.19	39.88	10.06	35.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	H

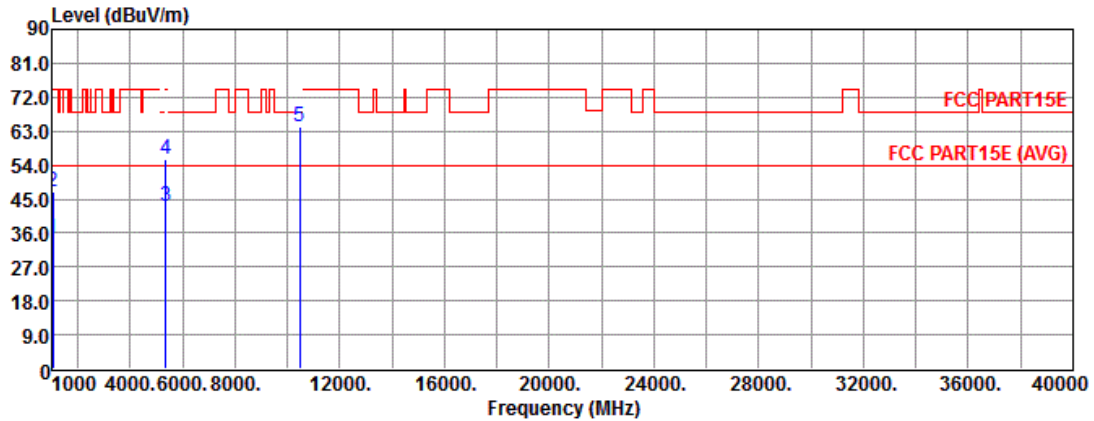

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	34.45	-19.55	54.00	43.91	25.08	3.10	37.64	---	---	Average
2	1050.00	46.88	-27.12	74.00	56.34	25.08	3.10	37.64	---	---	Peak
3	5350.00	42.94	-11.06	54.00	36.95	31.94	7.11	33.06	---	---	Average
4	5350.00	55.43	-18.57	74.00	49.44	31.94	7.11	33.06	---	---	Peak
5	10460.00	64.23	-3.97	68.20	49.63	40.03	10.07	35.50	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	V

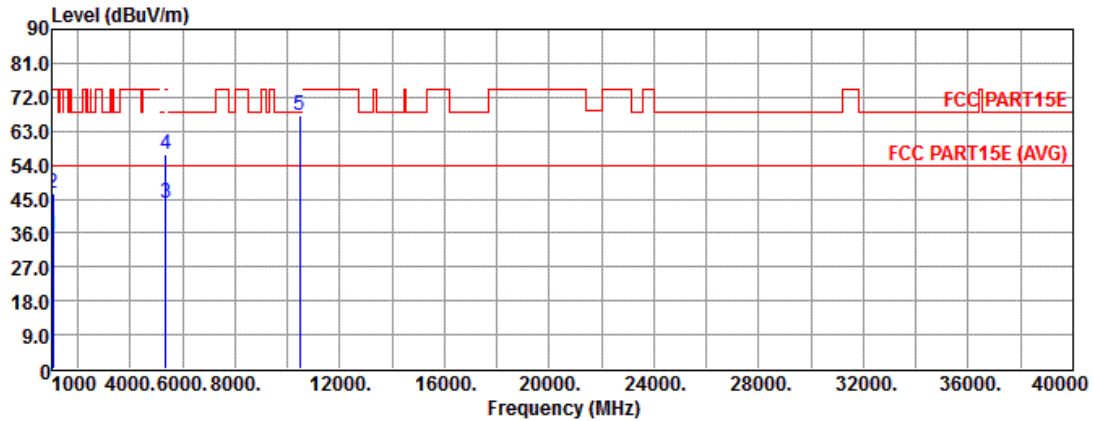

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.33	-18.67	54.00	44.79	25.08	3.10	37.64	---	---	Average
2	1050.00	46.59	-27.41	74.00	56.05	25.08	3.10	37.64	---	---	Peak
3	5350.00	44.08	-9.92	54.00	38.09	31.94	7.11	33.06	---	---	Average
4	5350.00	56.74	-17.26	74.00	50.75	31.94	7.11	33.06	---	---	Peak
5	10460.00	67.00	-1.20	68.20	52.40	40.03	10.07	35.50	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N_{TX}	1	Polarization	V

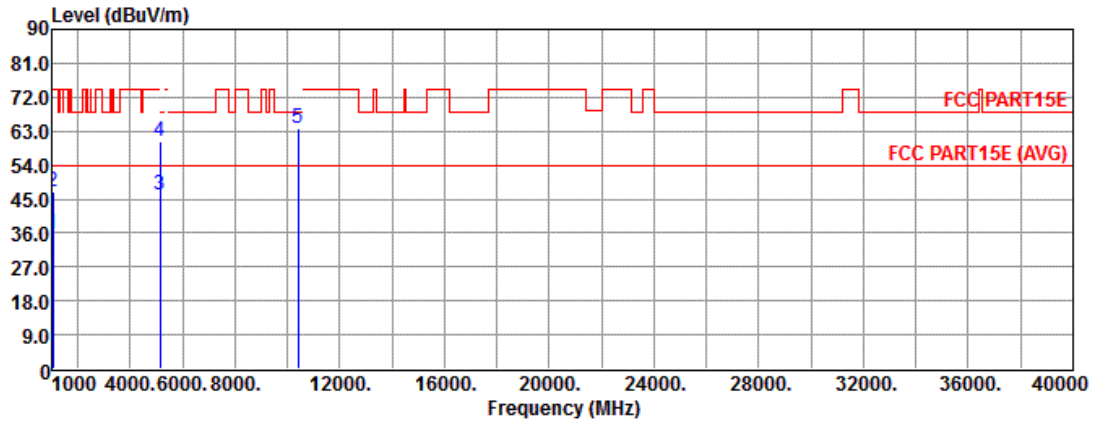

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	35.72	-18.28	54.00	45.18	25.08	3.10	37.64	---	---	Average
2	1050.00	47.08	-26.92	74.00	56.54	25.08	3.10	37.64	---	---	Peak
3	5150.00	46.24	-7.76	54.00	40.53	31.86	6.93	33.08	---	---	Average
4	5150.00	60.19	-13.81	74.00	54.48	31.86	6.93	33.08	---	---	Peak
5	10420.00	63.81	-4.39	68.20	49.27	39.96	10.07	35.49	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.6 Frequency Stability

3.6.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices	
<input checked="" type="checkbox"/>	N/A
IEEE Std. 802.11n-2009	
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.6.4 Test Setup

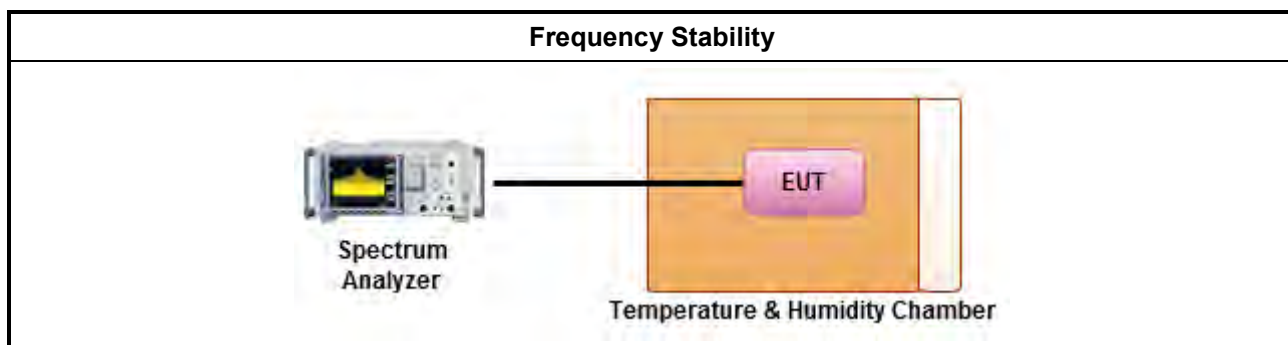

3.6.5 Test Result of Frequency Stability

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T _{20°C} Vmax	5200	5200.00372	0.7154
T _{20°C} Vmin	5200	5200.02328	4.4769
T _{50°C} Vnom	5200	5200.02518	4.8423
T _{40°C} Vnom	5200	5199.98584	-2.7231
T _{30°C} Vnom	5200	5200.00414	0.7962
T _{20°C} Vnom	5200	5200.00500	0.9615
T _{10°C} Vnom	5200	5199.99897	-0.1981
T _{0°C} Vnom	5200	5199.99736	-0.5077
T _{-10°C} Vnom	5200	5199.99728	-0.5231
T _{-20°C} Vnom	5200	5199.99569	-0.8288
T _{-30°C} Vnom	5200	5199.99576	-0.8154
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].			
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.			

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation (03CH03-HY)
Receiver	R&S	ESR3	101657	9KHz ~ 3GHz	Jan. 18, 2014	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 25, 2014	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 17, 2014	Conducted (TH01-HY)
Spectrum Analyzer	Agilent	N9010A	MY53400091	9KHz~44GHz	Oct. 07, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMB100A	175727	10MHz ~ 40GHz	Jan. 07, 2014	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1207366	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1241002	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.