



FCC Test Report

Equipment : Wireless AC1000 Dual Band Cloud Router
Brand Name : D-Link
Model No. : DIR-820L
FCC ID : KA2IR820LB1
Standard : 47 CFR FCC Part 15.247
Operating Band : 5725 MHz – 5850 MHz
FCC Classification : DTS
Applicant : D-Link Corporation
17595 Mt. Herrmann, Fountain Valley, CA 92708 U.S.A.

The product sample received on Mar. 10, 2014 and completely tested on Mar. 28, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


James Fan / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power.....	17
3.4	Power Spectral Density	22
3.5	Emissions in non-restricted frequency bands	25
3.6	Transmitter Radiated Unwanted Emissions	35
4	TEST EQUIPMENT AND CALIBRATION DATA	58
	APPENDIX A. TEST PHOTOS	A1-A3

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:28.685MHz 49.18 (Margin 10.82dB) – QP 45.40 (Margin 4.60dB) – AV	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 20M:15.13/ 40M:35.13 80M:75.13	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm]:25.85	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/10kHz]:0.59	PSD [dBm/3kHz]:5.99	Complied
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 30dB below the highest power	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:500.45MHz 42.98 (Margin 3.02dB) - QP	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied



Revision History

Report No.	Version	Description	Issued Date
FR430734AI	Rev. 01	Initial issue of report	Apr. 14, 2014



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5725-5850	a	5745-5825	149-165 [5]	2	25.72	Yes
5725-5850	n(HT20)	5745-5825	149-165 [5]	2	25.69	Yes
5725-5850	n(HT40)	5755-5795	151-159 [2]	2	25.73	Yes
5725-5850	ac(VHT20)	5745-5825	149-165 [5]	2	25.72	Yes
5725-5850	ac(VHT40)	5755-5795	151-159 [2]	2	25.85	Yes
5725-5850	ac(VHT80)	5775	155 [1]	2	21.77	Yes

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Connector	Gain (dBi)
1	Integral	PCB	I-PEX	0
2	Integral	PCB	I-PEX	0

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 94.20% - IEEE 802.11a	0.26
<input checked="" type="checkbox"/> 91.87% - IEEE 802.11ac (VHT20)	0.37
<input checked="" type="checkbox"/> 80.20% - IEEE 802.11ac (VHT40)	0.96
<input checked="" type="checkbox"/> 65.30% - IEEE 802.11ac (VHT80)	1.85

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery

1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Spec.
1	Adapter 1	D-Link	AMS9-120100FU2	I/P: 100-240Vac, 50-60Hz, 0.5A, O/P: 12Vdc, 1.0A 1.22m non-shielded without core.
2	Adapter 2	D-Link	F12W-120100SPAU	I/P: 100-240Vac, 50-60Hz, 0.3A, O/P: 12Vdc, 1.0A 1.22m non-shielded without core.
3	Adapter 3	D-Link	F12W3-120100SPAU	I/P: 100-240Vac, 50-60Hz, 0.3A, O/P: 12Vdc, 1.0A 1.20m non-shielded without core.

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E6430	DoC
2	Notebook	DELL	E6410	DoC
3	USB Dongle	Transcend	4G	---

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074 v03r01
- ◆ FCC KDB 662911 v02r01
- ◆ FCC KDB 412172 v01

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Mark Liao	21°C / 64%	Mar. 28, 2014
AC Conduction	CO04-HY	Skys Huang	20°C / 67%	Mar. 27, 2014
Radiated Emission	03CH08-HY	Jack Li	18-20°C / 66-68%	Mar. 10 ~ Mar. 24, 2014
Test site registered number [636805] with FCC Test site registered number [4086B-2] with IC				

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a	2	6-54Mbps	6 Mbps
HT20	2	M0-15	M0
HT40	2	M0-15	M0
VHT20	2	M0-8	M0
VHT40	2	M0-9	M0
VHT80	2	M0-9	M0

2.2 The Worst Case Power Setting Parameter




The Worst Case Power Setting Parameter (5725-5850MHz band)							
Test Software	MTool						
Test Software Version	RTL819x 2.3						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5745	5785	5825	5755	5795	5775
11a,6-54Mbps	2	57/55	63/61	63/61	--	--	--
HT20,M0-15	2	57/55	63/61	63/61	--	--	--
HT40,M0-15	2	--	--	--	46/44	63/61	-
VHT20,M0-8	2	57/55	63/61	63/61		-	-
VHT40,M0-9	2		-	-	46/44	63/61	-
VHT80,M0-9	2		-	-		-	48/46

2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN), Adapter 1
Note: Adapter 1, Adapter 2, and Adapter 3 had been pretested and found that the Adapter 1 was the worst case and was selected for final test.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN), Adapter 1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN), Adapter 1

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
Operating Mode	<input checked="" type="checkbox"/> 1. AC Power & Radio link (WLAN), Adapter 1		
Modulation Mode	11a, VHT20,VHT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Note: Adapter 1, Adapter 2, and Adapter 3 had been pretested and found that the Adapter 1 was the worst case and was selected for final test.			

2.4 Test Setup Diagram

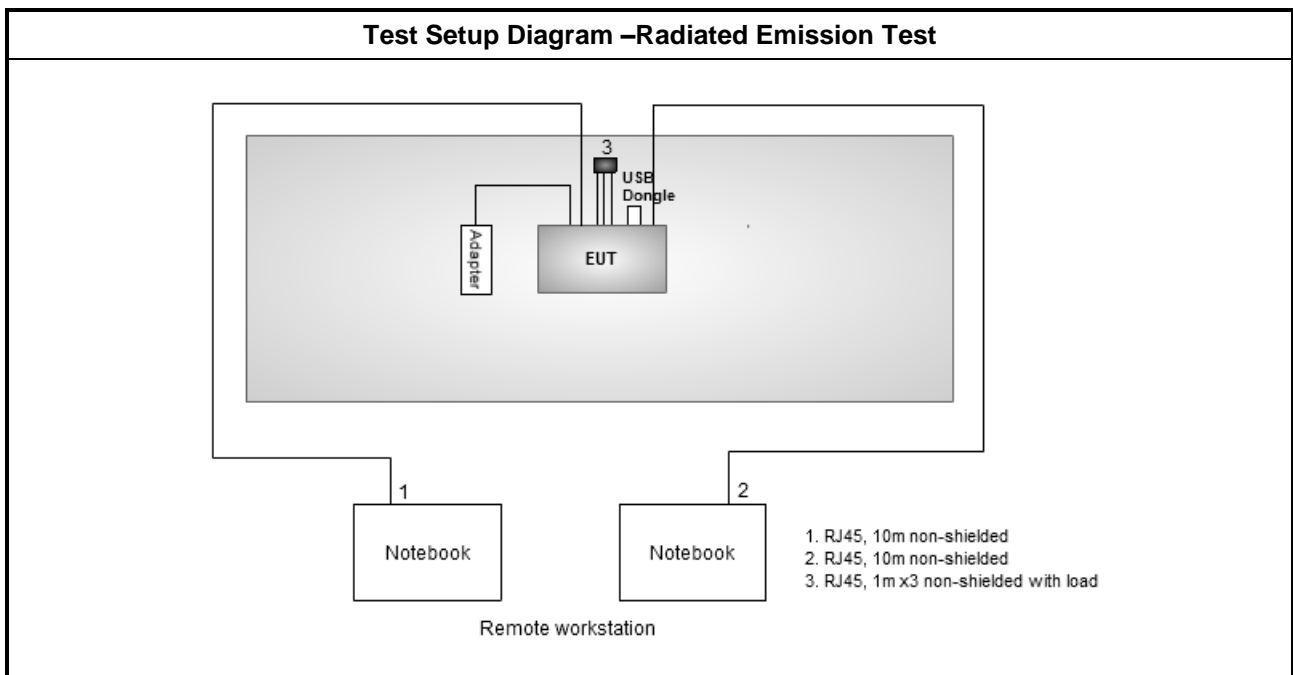

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 – 56 *	56 – 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

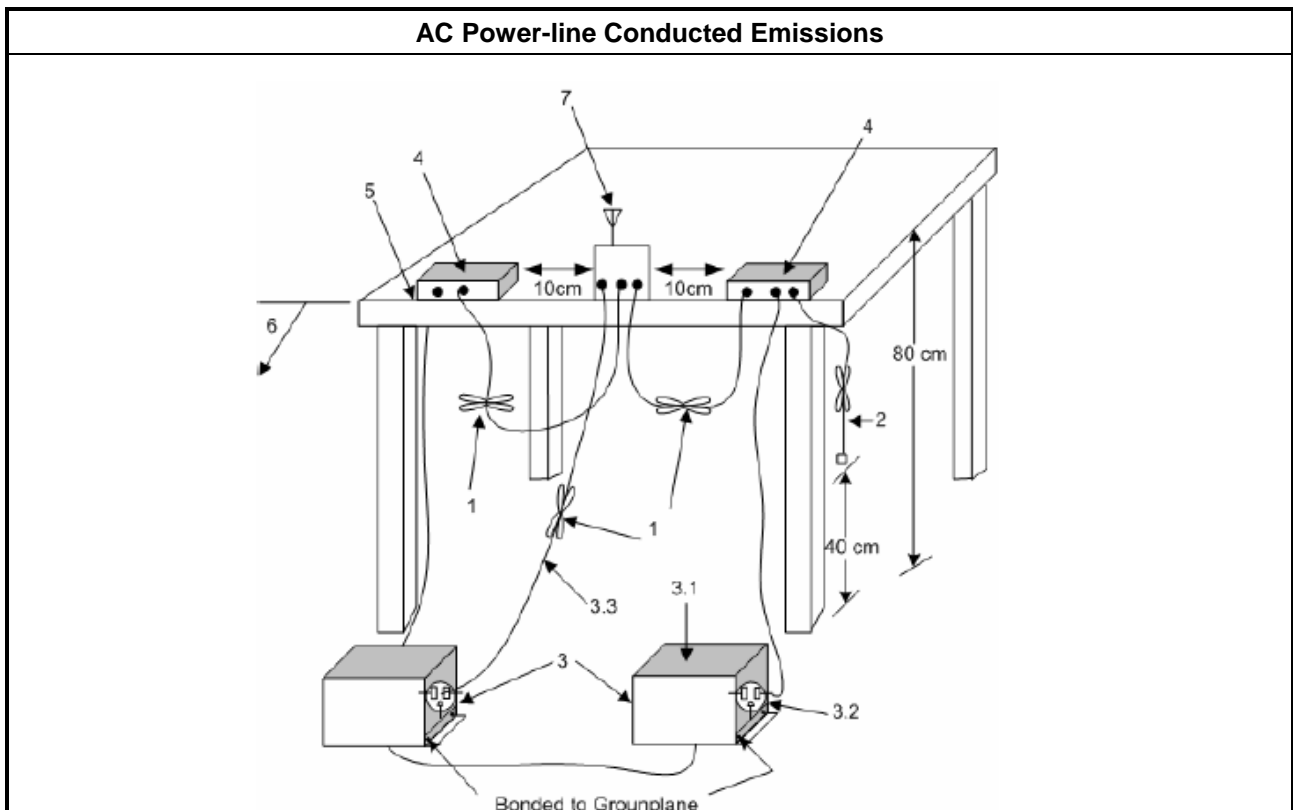


3.1.5 Test Result of AC Power-line Conducted Emissions

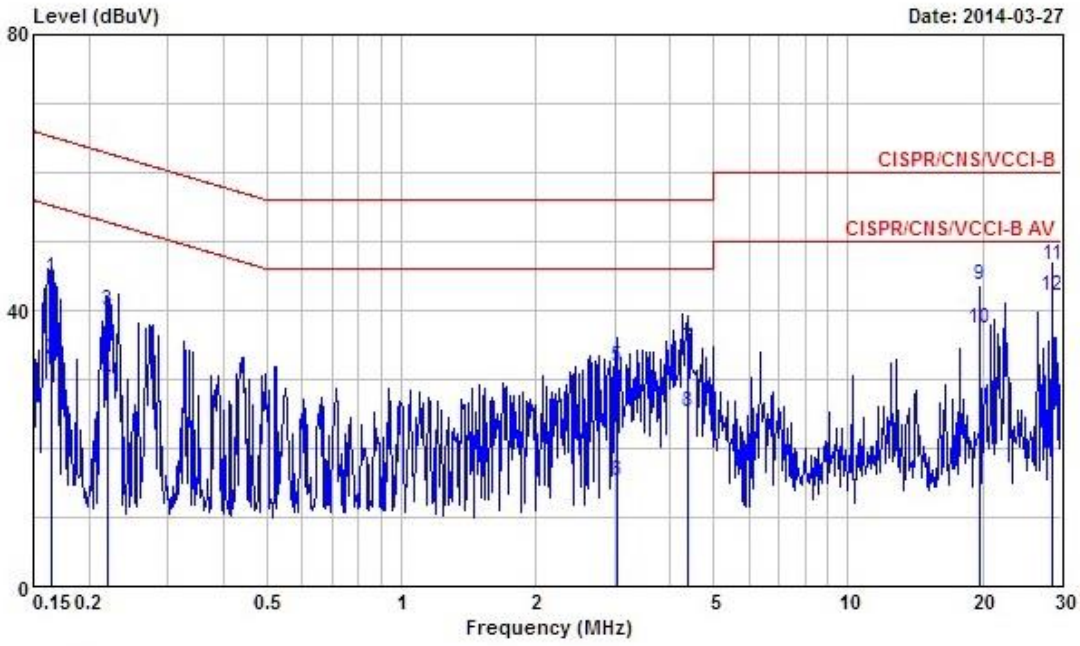AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Neutral																																																																																																																														
Operating Function	AC Power & Radio link (WLAN), Adapter 1																																																																																																																																
 <p style="text-align: right; font-size: small;">Date: 2014-03-27</p>																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1650100</td><td>44.70</td><td>-20.51</td><td>65.21</td><td>44.29</td><td>0.02</td><td>0.39</td><td>QP</td></tr> <tr><td>2</td><td>0.1650100</td><td>32.98</td><td>-22.23</td><td>55.21</td><td>32.57</td><td>0.02</td><td>0.39</td><td>Average</td></tr> <tr><td>3</td><td>0.2207270</td><td>40.03</td><td>-22.76</td><td>62.79</td><td>39.50</td><td>0.02</td><td>0.51</td><td>QP</td></tr> <tr><td>4</td><td>0.2207270</td><td>29.71</td><td>-23.08</td><td>52.79</td><td>29.18</td><td>0.02</td><td>0.51</td><td>Average</td></tr> <tr><td>5</td><td>3.040</td><td>31.84</td><td>-24.16</td><td>56.00</td><td>31.02</td><td>0.08</td><td>0.74</td><td>QP</td></tr> <tr><td>6</td><td>3.040</td><td>15.39</td><td>-30.61</td><td>46.00</td><td>14.57</td><td>0.08</td><td>0.74</td><td>Average</td></tr> <tr><td>7</td><td>4.380</td><td>34.43</td><td>-21.57</td><td>56.00</td><td>33.62</td><td>0.10</td><td>0.71</td><td>QP</td></tr> <tr><td>8</td><td>4.380</td><td>25.30</td><td>-20.70</td><td>46.00</td><td>24.49</td><td>0.10</td><td>0.71</td><td>Average</td></tr> <tr><td>9</td><td>19.708</td><td>43.81</td><td>-16.19</td><td>60.00</td><td>42.78</td><td>0.32</td><td>0.71</td><td>QP</td></tr> <tr><td>10</td><td>19.708</td><td>37.49</td><td>-12.51</td><td>50.00</td><td>36.46</td><td>0.32</td><td>0.71</td><td>Average</td></tr> <tr><td>11</td><td>28.685</td><td>46.49</td><td>-13.51</td><td>60.00</td><td>45.53</td><td>0.43</td><td>0.53</td><td>QP</td></tr> <tr><td>12</td><td>28.685</td><td>42.07</td><td>-7.93</td><td>50.00</td><td>41.11</td><td>0.43</td><td>0.53</td><td>Average</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1650100	44.70	-20.51	65.21	44.29	0.02	0.39	QP	2	0.1650100	32.98	-22.23	55.21	32.57	0.02	0.39	Average	3	0.2207270	40.03	-22.76	62.79	39.50	0.02	0.51	QP	4	0.2207270	29.71	-23.08	52.79	29.18	0.02	0.51	Average	5	3.040	31.84	-24.16	56.00	31.02	0.08	0.74	QP	6	3.040	15.39	-30.61	46.00	14.57	0.08	0.74	Average	7	4.380	34.43	-21.57	56.00	33.62	0.10	0.71	QP	8	4.380	25.30	-20.70	46.00	24.49	0.10	0.71	Average	9	19.708	43.81	-16.19	60.00	42.78	0.32	0.71	QP	10	19.708	37.49	-12.51	50.00	36.46	0.32	0.71	Average	11	28.685	46.49	-13.51	60.00	45.53	0.43	0.53	QP	12	28.685	42.07	-7.93	50.00	41.11	0.43	0.53	Average
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.1650100	44.70	-20.51	65.21	44.29	0.02	0.39	QP																																																																																																																									
2	0.1650100	32.98	-22.23	55.21	32.57	0.02	0.39	Average																																																																																																																									
3	0.2207270	40.03	-22.76	62.79	39.50	0.02	0.51	QP																																																																																																																									
4	0.2207270	29.71	-23.08	52.79	29.18	0.02	0.51	Average																																																																																																																									
5	3.040	31.84	-24.16	56.00	31.02	0.08	0.74	QP																																																																																																																									
6	3.040	15.39	-30.61	46.00	14.57	0.08	0.74	Average																																																																																																																									
7	4.380	34.43	-21.57	56.00	33.62	0.10	0.71	QP																																																																																																																									
8	4.380	25.30	-20.70	46.00	24.49	0.10	0.71	Average																																																																																																																									
9	19.708	43.81	-16.19	60.00	42.78	0.32	0.71	QP																																																																																																																									
10	19.708	37.49	-12.51	50.00	36.46	0.32	0.71	Average																																																																																																																									
11	28.685	46.49	-13.51	60.00	45.53	0.43	0.53	QP																																																																																																																									
12	28.685	42.07	-7.93	50.00	41.11	0.43	0.53	Average																																																																																																																									
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																	

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link (WLAN), Adapter 1		

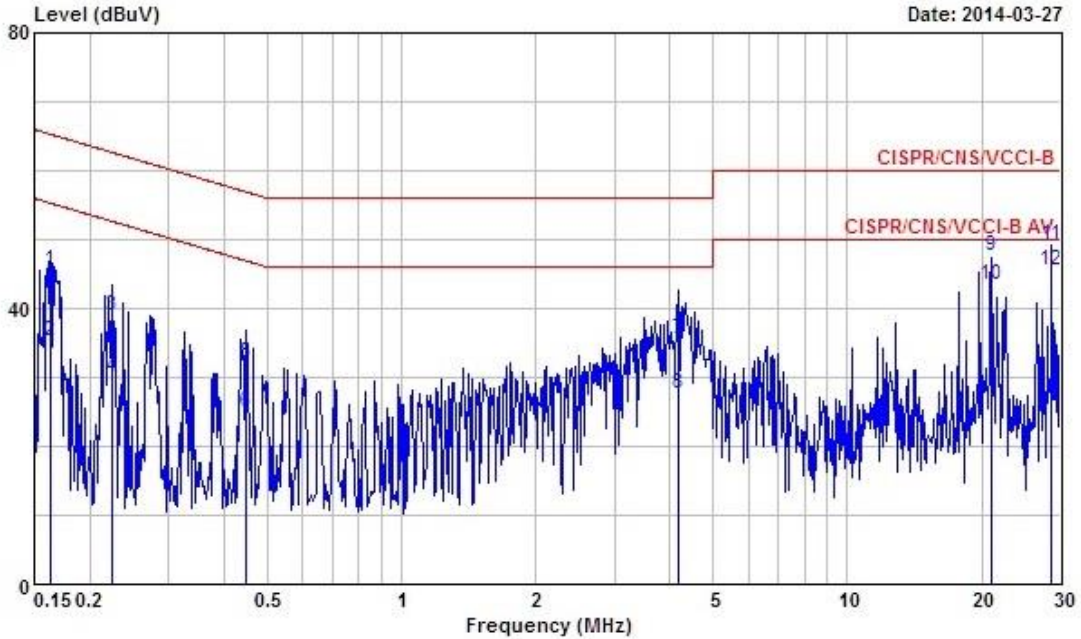

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1632710	45.60	-19.70	65.30	45.19	0.03	0.38	QP
2	0.1632710	35.19	-20.11	55.30	34.78	0.03	0.38	Average
3	0.2231870	39.04	-23.66	62.70	38.49	0.03	0.52	QP
4	0.2231870	30.03	-22.67	52.70	29.48	0.03	0.52	Average
5	0.4491640	32.04	-24.85	56.89	31.39	0.03	0.62	QP
6	0.4491640	25.11	-21.78	46.89	24.46	0.03	0.62	Average
7	4.180	35.65	-20.35	56.00	34.85	0.10	0.70	QP
8	4.180	27.56	-18.44	46.00	26.76	0.10	0.70	Average
9	20.990	47.76	-12.24	60.00	46.76	0.32	0.68	QP
10	20.990	43.30	-6.70	50.00	42.30	0.32	0.68	Average
11	28.685	49.18	-10.82	60.00	48.23	0.42	0.53	QP
12	28.685	45.40	-4.60	50.00	44.45	0.42	0.53	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


3.2.4 Test Setup

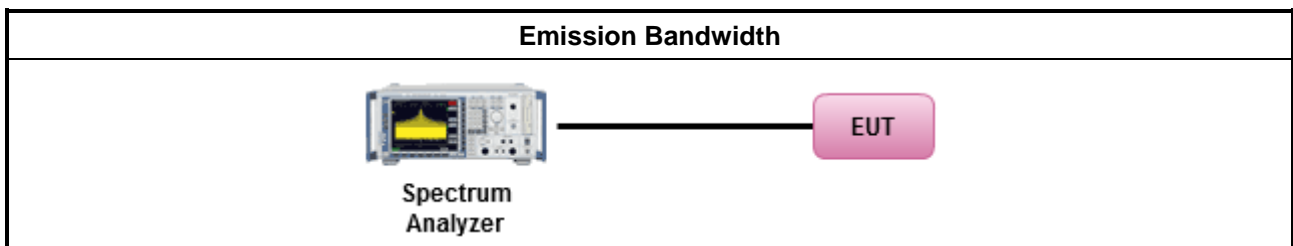

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11a	2	5745	17.33	17.40	-	-	15.71	15.88	-	-
11a	2	5785	18.56	18.56	-	-	15.30	15.13	-	-
11a	2	5825	18.89	18.34	-	-	15.36	15.71	-	-
VHT20	2	5745	18.13	18.09	-	-	16.93	16.23	-	-
VHT20	2	5785	18.67	18.56	-	-	16.12	15.36	-	-
VHT20	2	5825	19.21	18.63	-	-	15.77	15.30	-	-
VHT40	2	5755	36.79	36.79	-	-	35.36	35.13	-	-
VHT40	2	5795	37.25	37.32	-	-	35.36	35.13	-	-
VHT80	2	5775	75.77	75.77	-	-	75.13	75.13	-	-
Limit			N/A				≥500 kHz			
Result			Complied							

Note 1: N_{TX} = Number of Transmit Chains

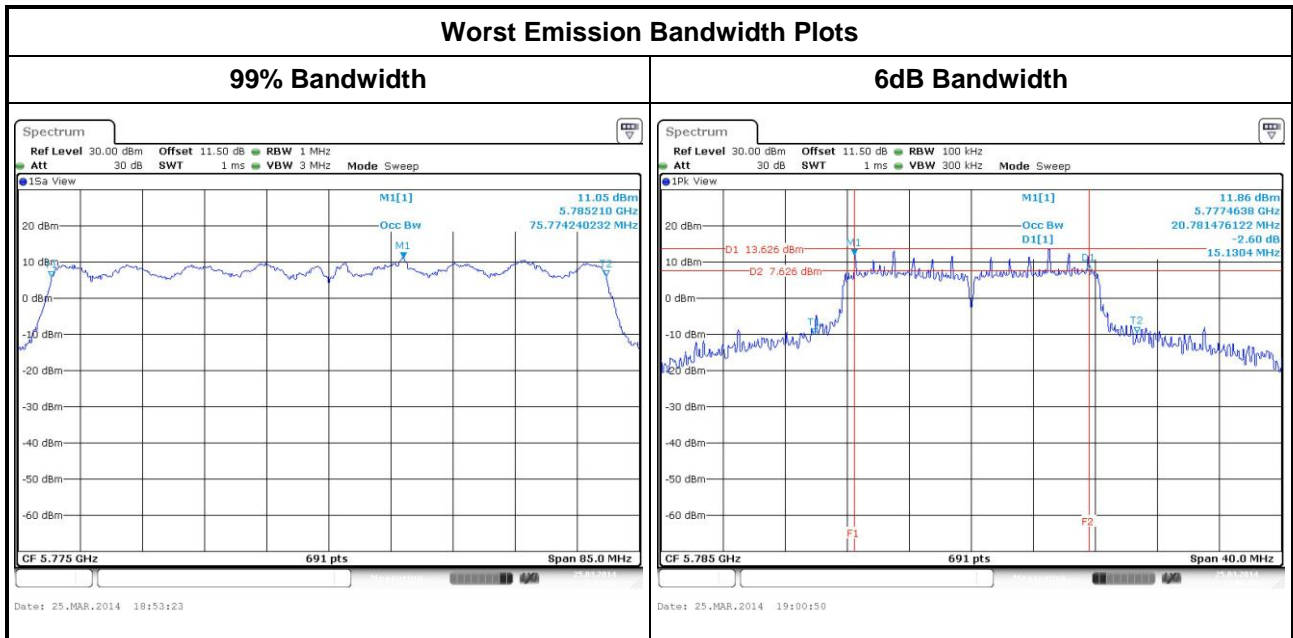



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit (for ac(VHT80) only)	
<input checked="" type="checkbox"/>	5725-5850 MHz Band:
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30$ dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/>	5725-5850 MHz Band
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): N/A
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.1 (RBW ≥ DTS BW).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.2 (Integrated band power method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.3 (Peak power meter)
<input checked="" type="checkbox"/>	Maximum Conducted Output Power (Reference only)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.1.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.1.3 Method AVGSA-1 Alt. (slow sweep speed)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.1.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.1.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.3 Method AVGPM-G (using a gated RF average power meter)
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

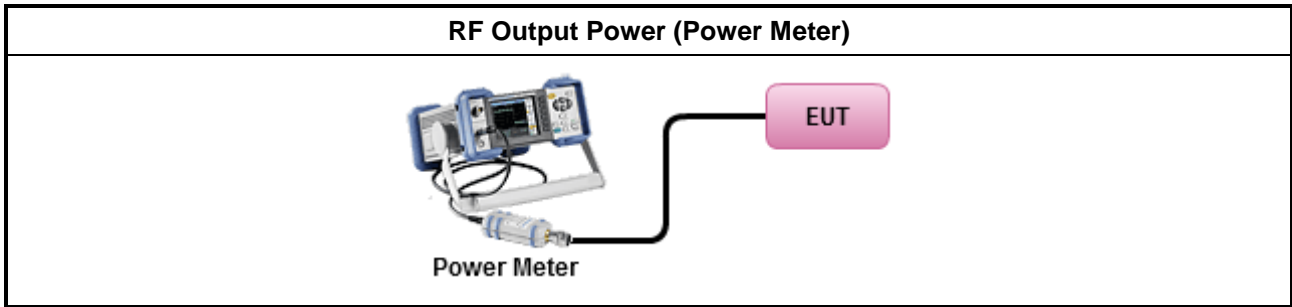

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2		-
Maximum G_{ANT} (dBi)		0	0		-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	0	2	1	-	-
HT20,M0-15	0	2	1	-	-
HT40,M0-15	0	2	1	-	-
VHT20,M0-8	0	2	1	-	-
VHT40,M0-9	0	2	1	-	-
VHT80,M0-9	0	2	1	-	-

Note 1: For CDD transmissions, directional gain is calculated as power measurements:
 Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
 Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$;
 Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX} ;



3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	2	5745	21.58	21.62	--	--	24.61	30.00	0	24.61	36.00
11a	2	5785	22.64	22.75	--	--	25.71	30.00	0	25.71	36.00
11a	2	5825	22.65	22.77	--	--	25.72	30.00	0	25.72	36.00
HT20	2	5745	21.49	21.52	--	--	24.52	30.00	0	24.52	36.00
HT20	2	5785	22.54	22.80	--	--	25.68	30.00	0	25.68	36.00
HT20	2	5825	22.56	22.79	--	--	25.69	30.00	0	25.69	36.00
HT40	2	5755	18.45	18.76	--	--	21.62	30.00	0	21.62	36.00
HT40	2	5795	22.61	22.83	--	--	25.73	30.00	0	25.73	36.00
VHT20	2	5745	21.56	21.57	--	--	24.58	30.00	0	24.58	36.00
VHT20	2	5785	22.57	22.83	--	--	25.71	30.00	0	25.71	36.00
VHT20	2	5825	22.59	22.83	--	--	25.72	30.00	0	25.72	36.00
VHT40	2	5755	18.72	19.04	--	--	21.89	30.00	0	21.89	36.00
VHT40	2	5795	22.72	22.96	--	--	25.85	30.00	0	25.85	36.00
VHT80	2	5775	18.67	18.85	--	--	21.77	30.00	0	21.77	36.00
Result			Complied								

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 v03r01, clause 10.2 Method PKPSD (RBW=30kHz; detector=peak)..
<input type="checkbox"/> Refer as FCC KDB 558074 v03r01, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 v03r01, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 558074 v03r01, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 v03r01, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

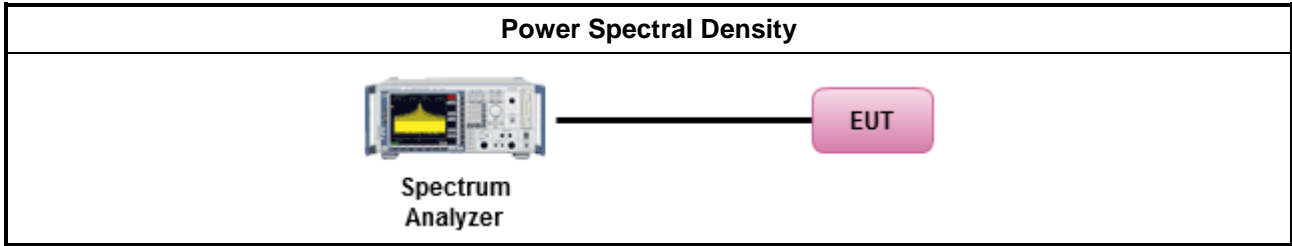

3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density (dBm/30kHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	Power Limit
11a	2	5745	-1.07	8.00
11a	2	5785	0.26	8.00
11a	2	5825	0.59	8.00
VHT20	2	5745	-0.83	8.00
VHT20	2	5785	0.43	8.00
VHT20	2	5825	0.50	8.00
VHT40	2	5755	-5.09	8.00
VHT40	2	5795	-1.27	8.00
VHT80	2	5775	-5.68	8.00
Result			Complied	

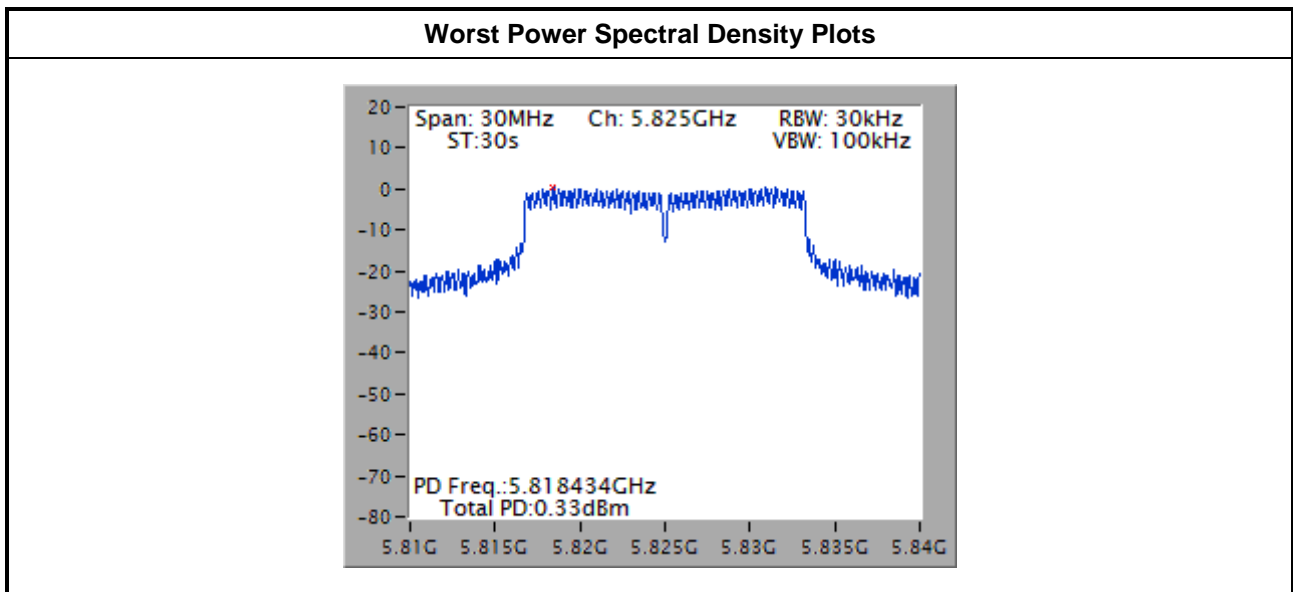

Note: The worst plot is w/o duty factor.

3.5 Emissions in non-restricted frequency bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 40GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.4 Test Setup

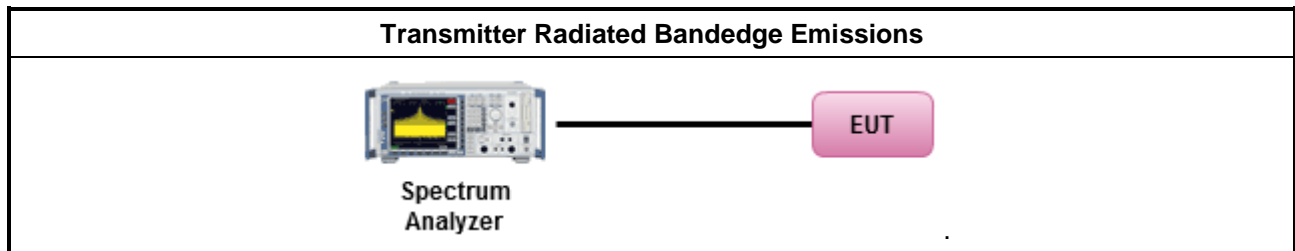


3.5.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding $10 \log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.




3.5.6 Unwanted Emissions into Non-Restricted Frequency Bands

802.11a

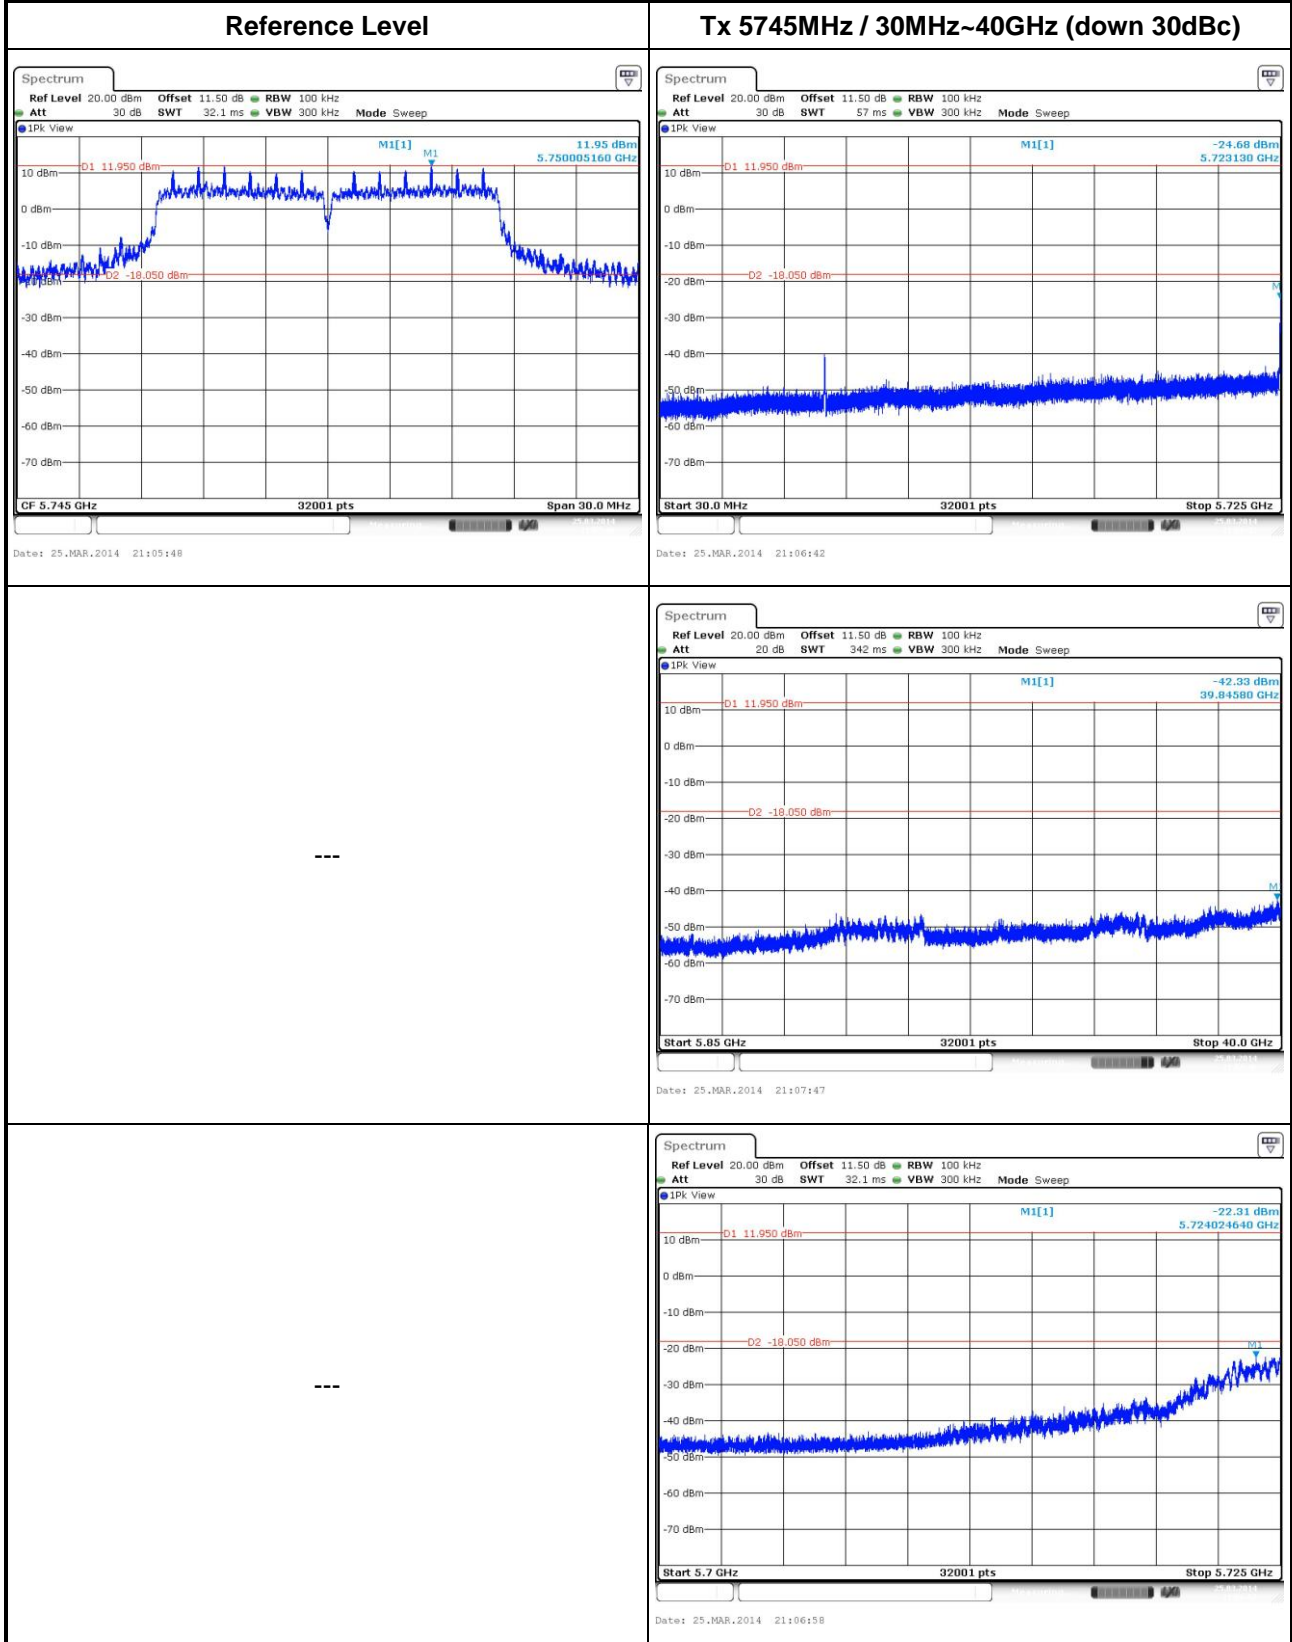


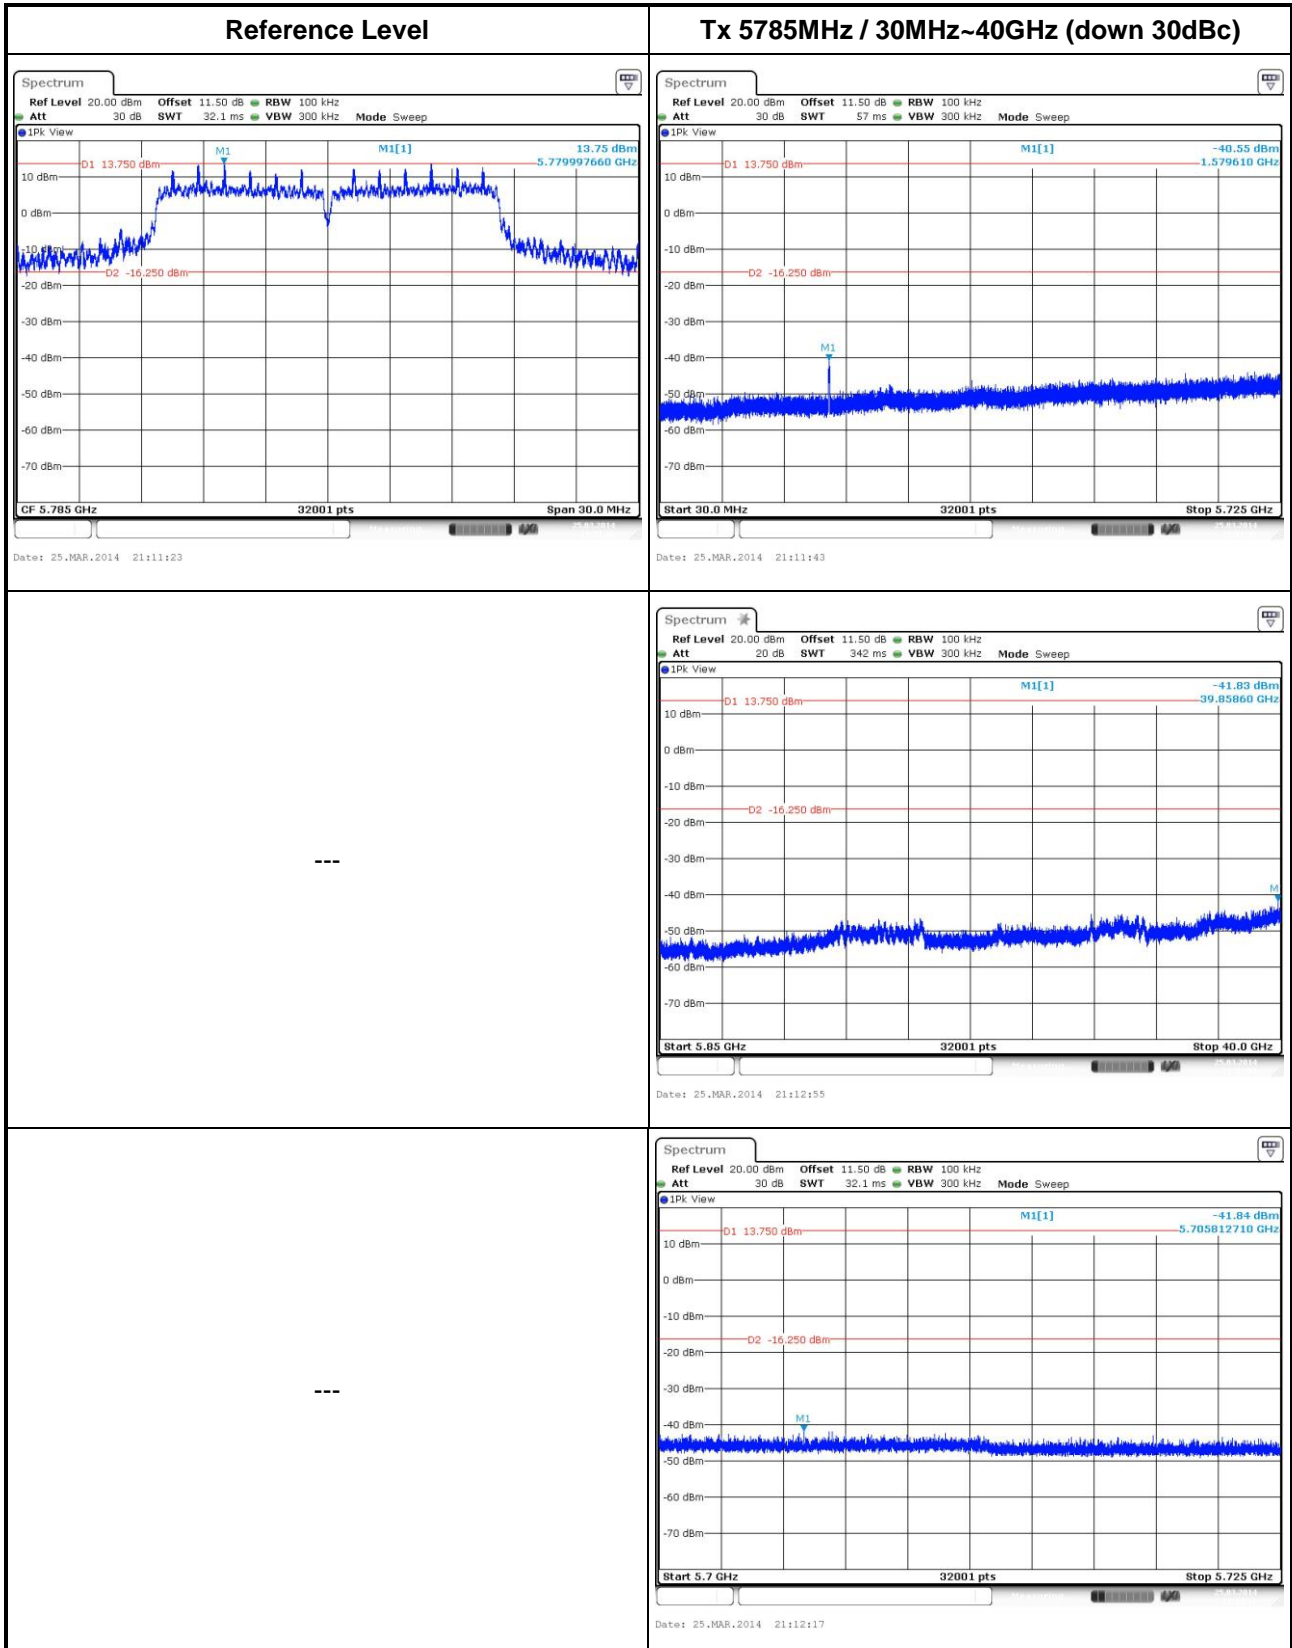


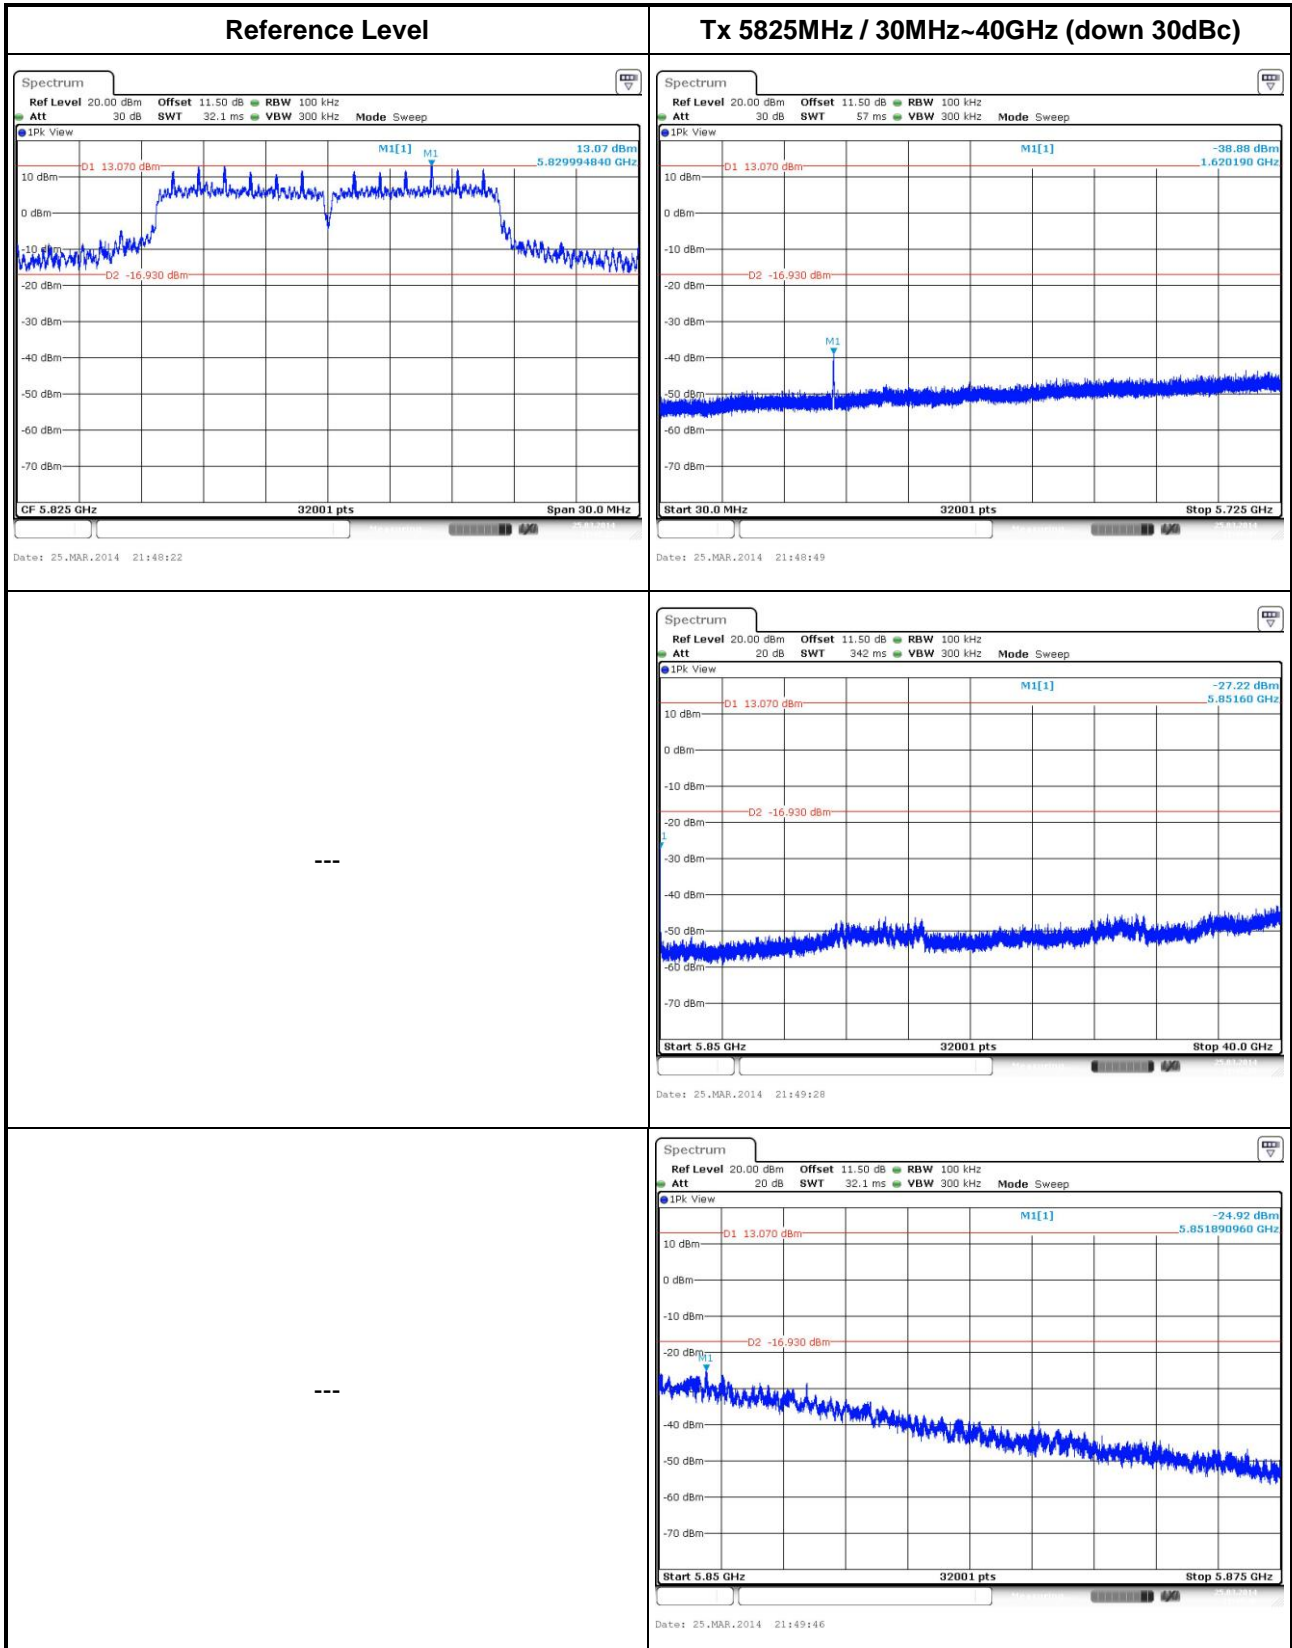




802.11n VHT20

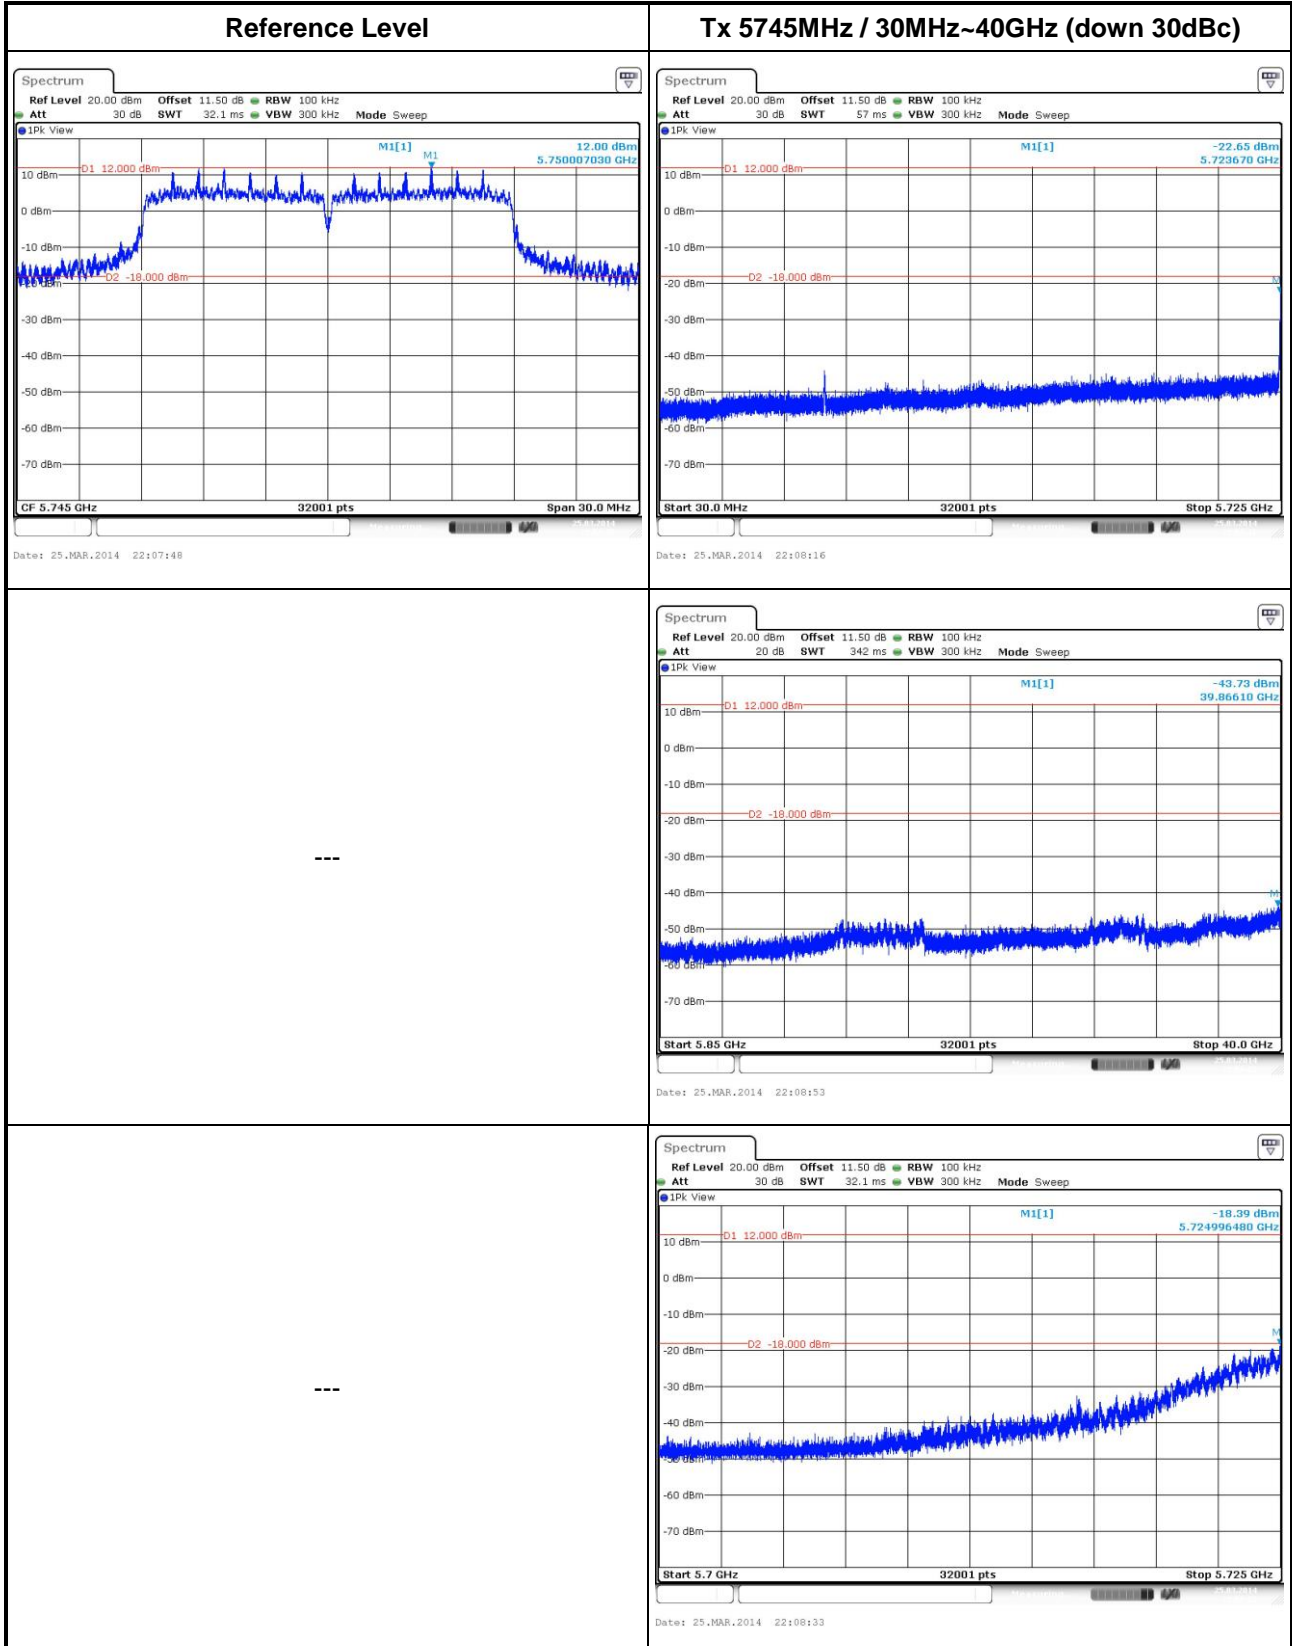


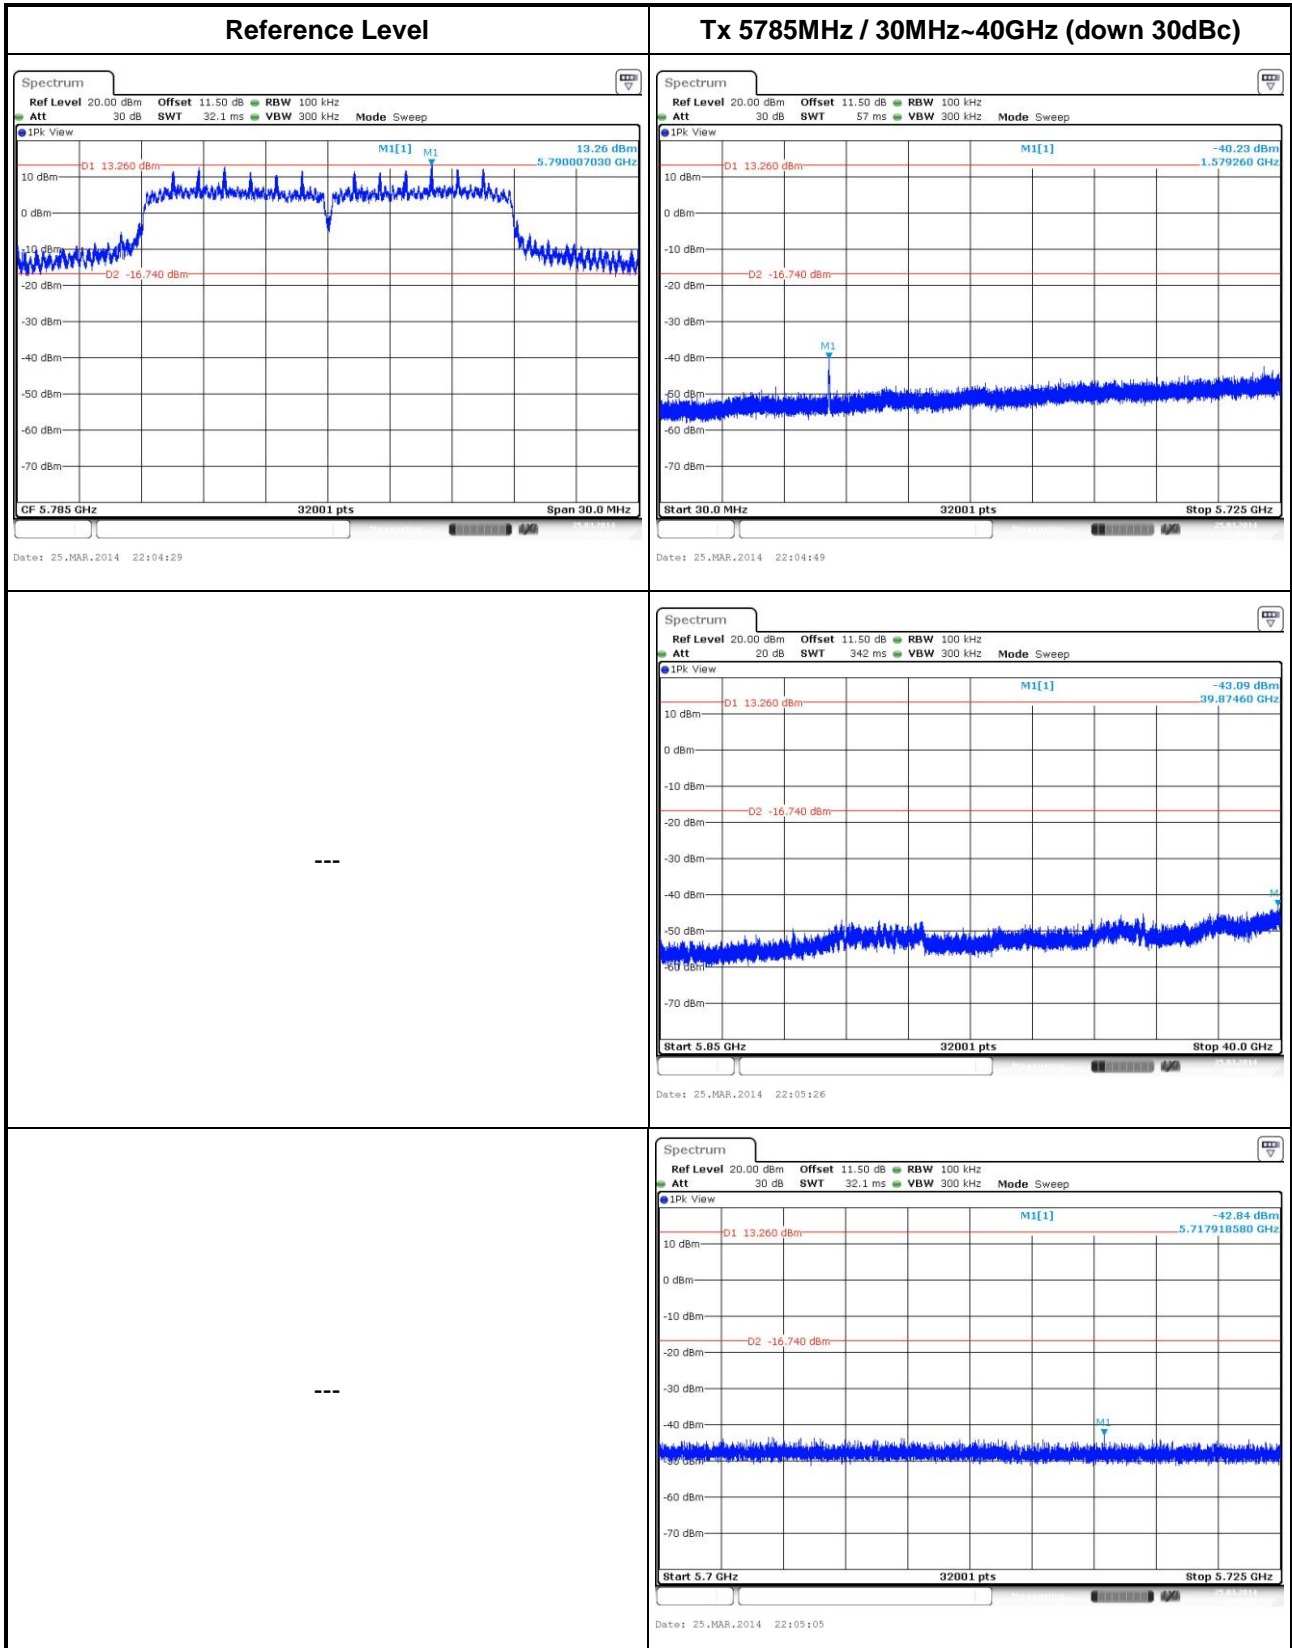

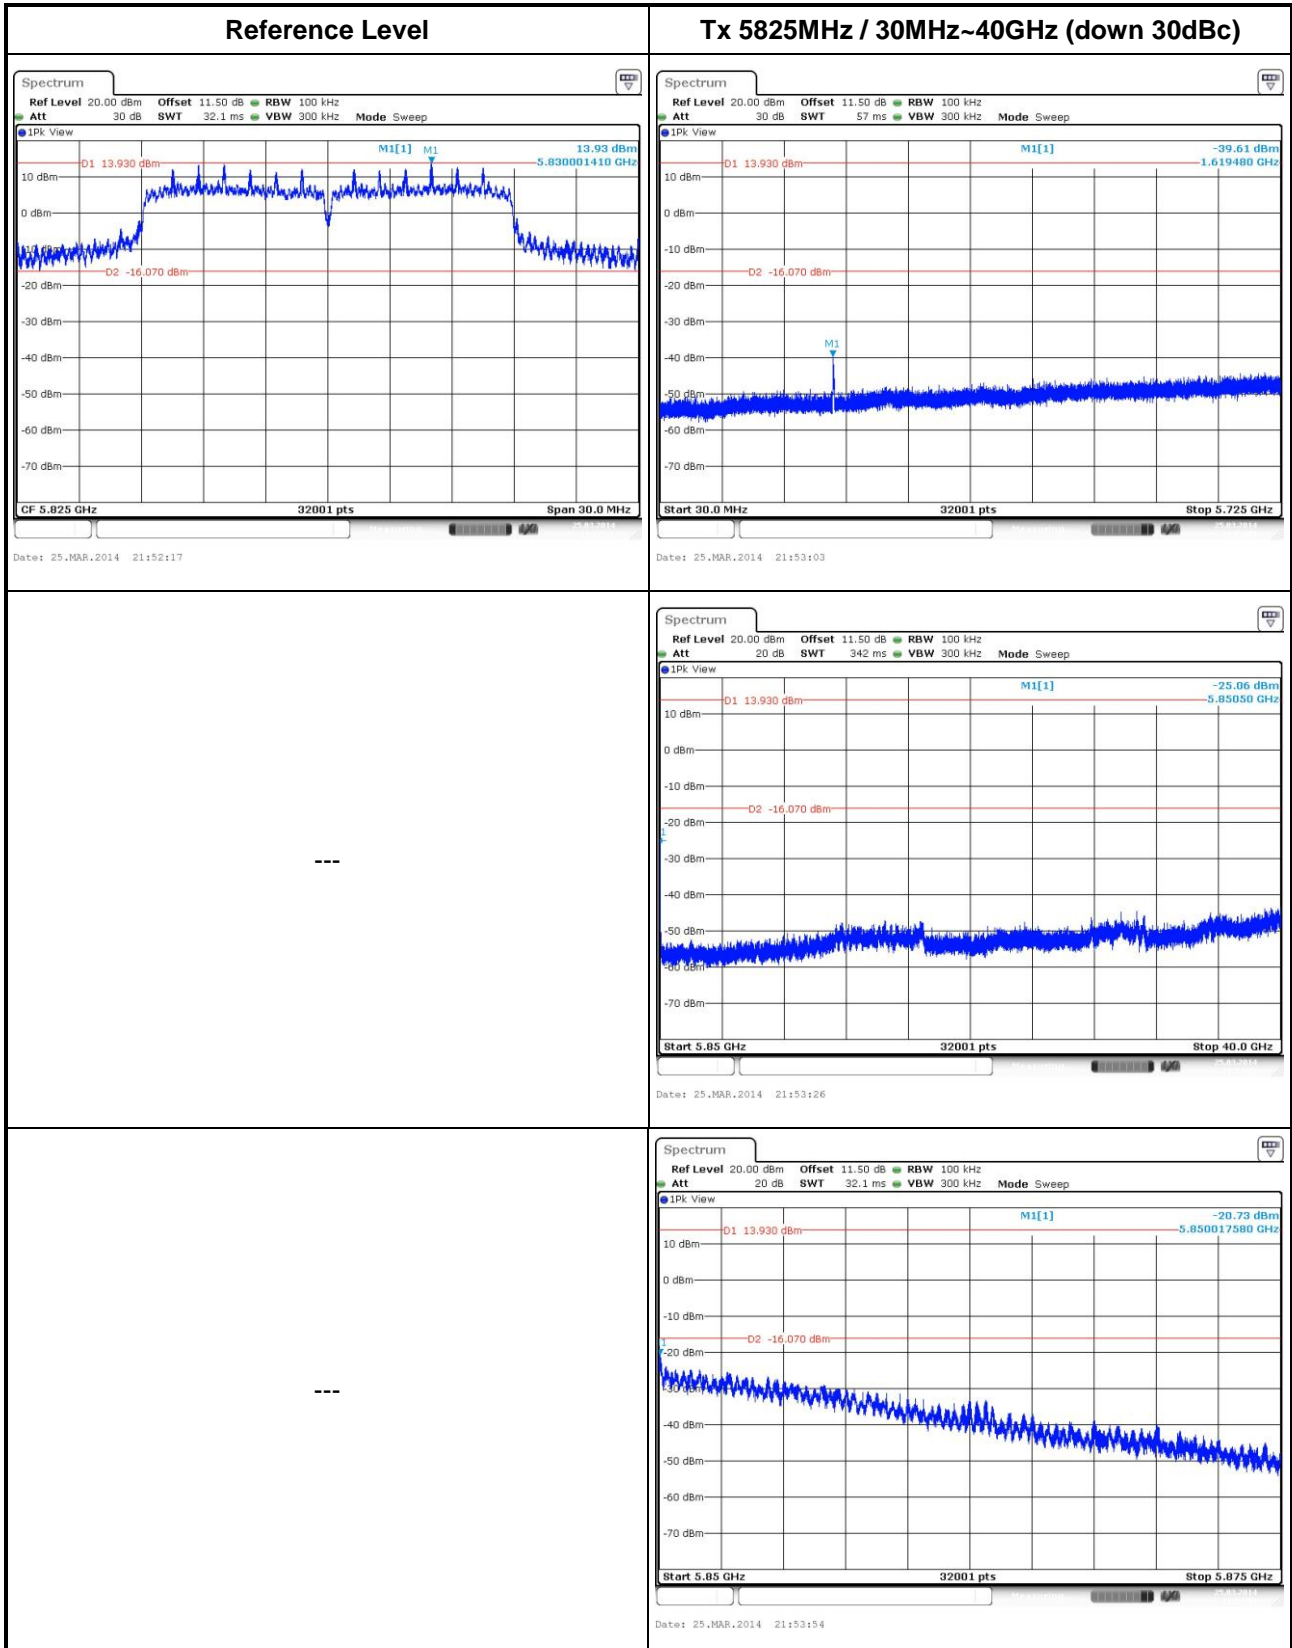




802.11n VHT40

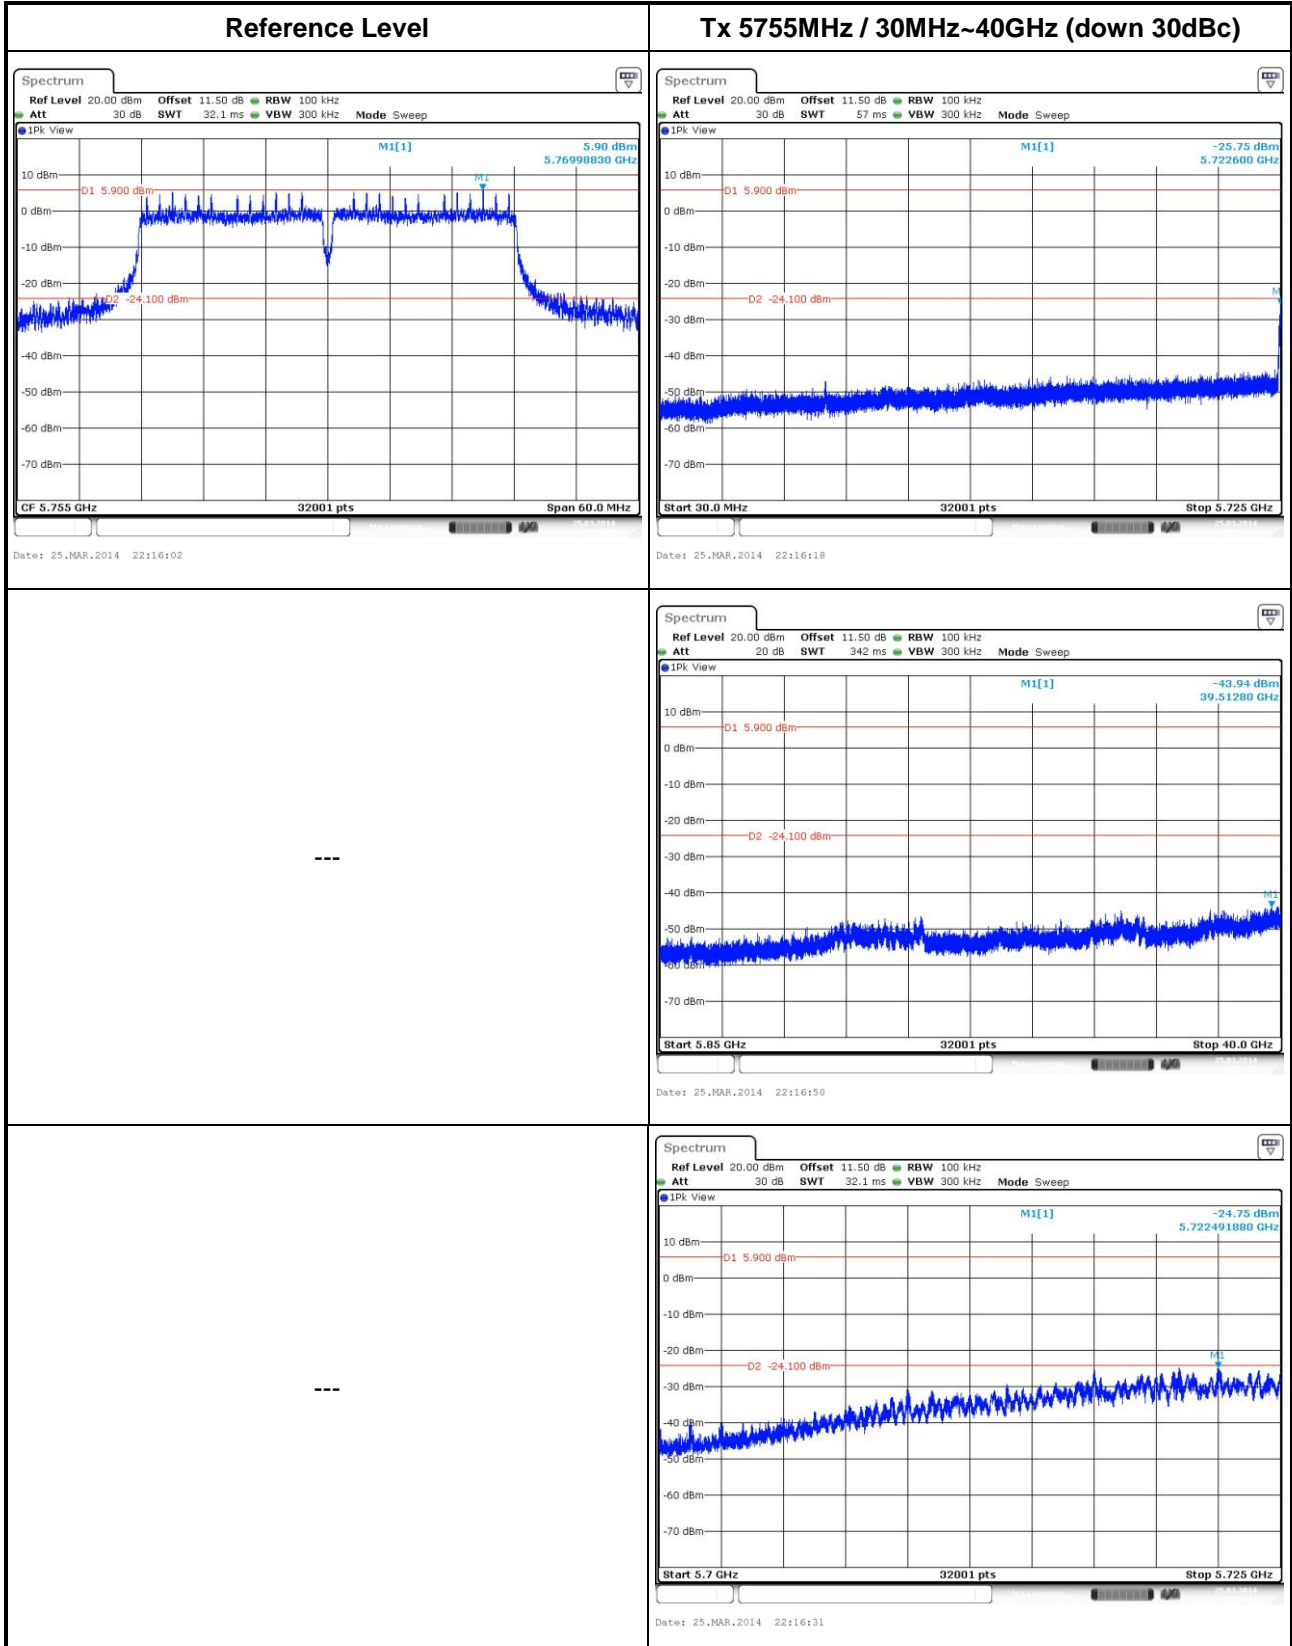



802.11n VHT80

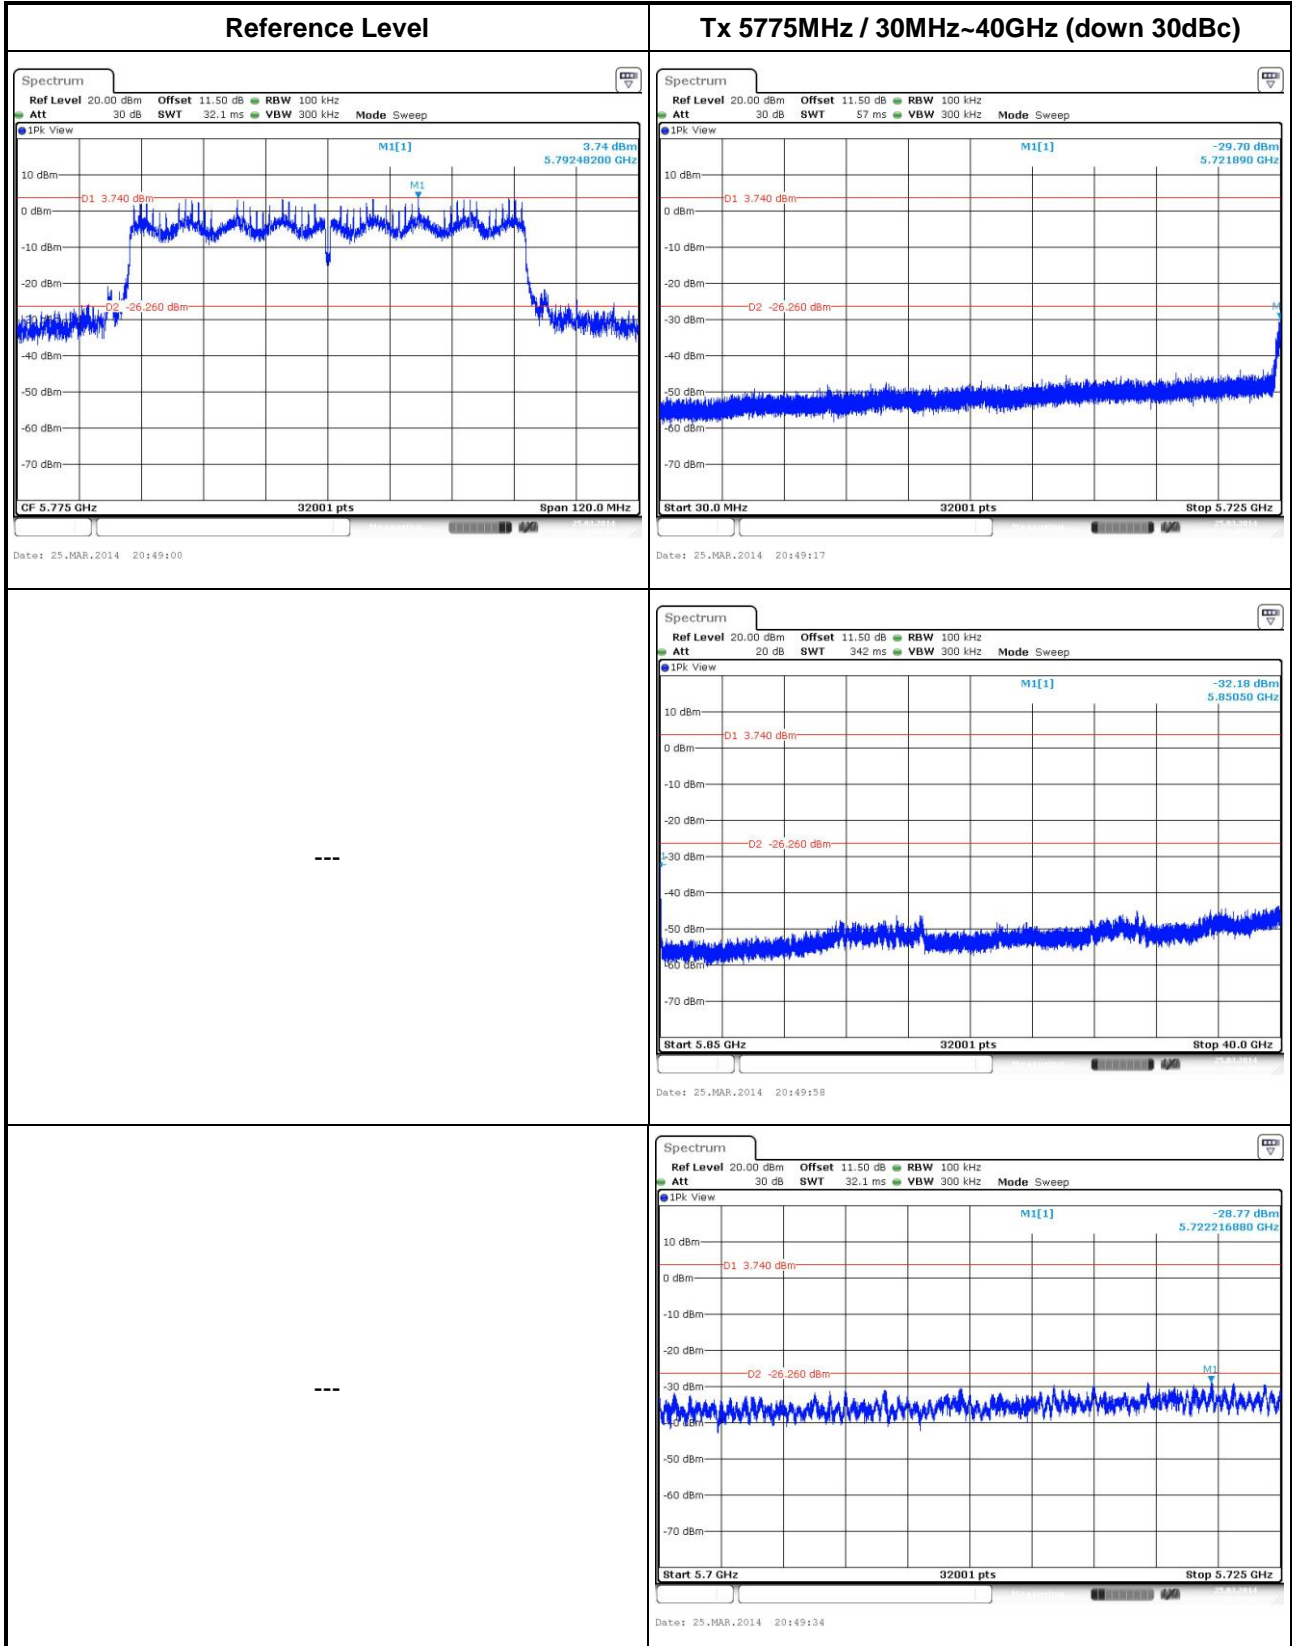

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074 v03r01, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method	
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074 v03r01, clause 10.2.2
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

3.6.4 Test Setup

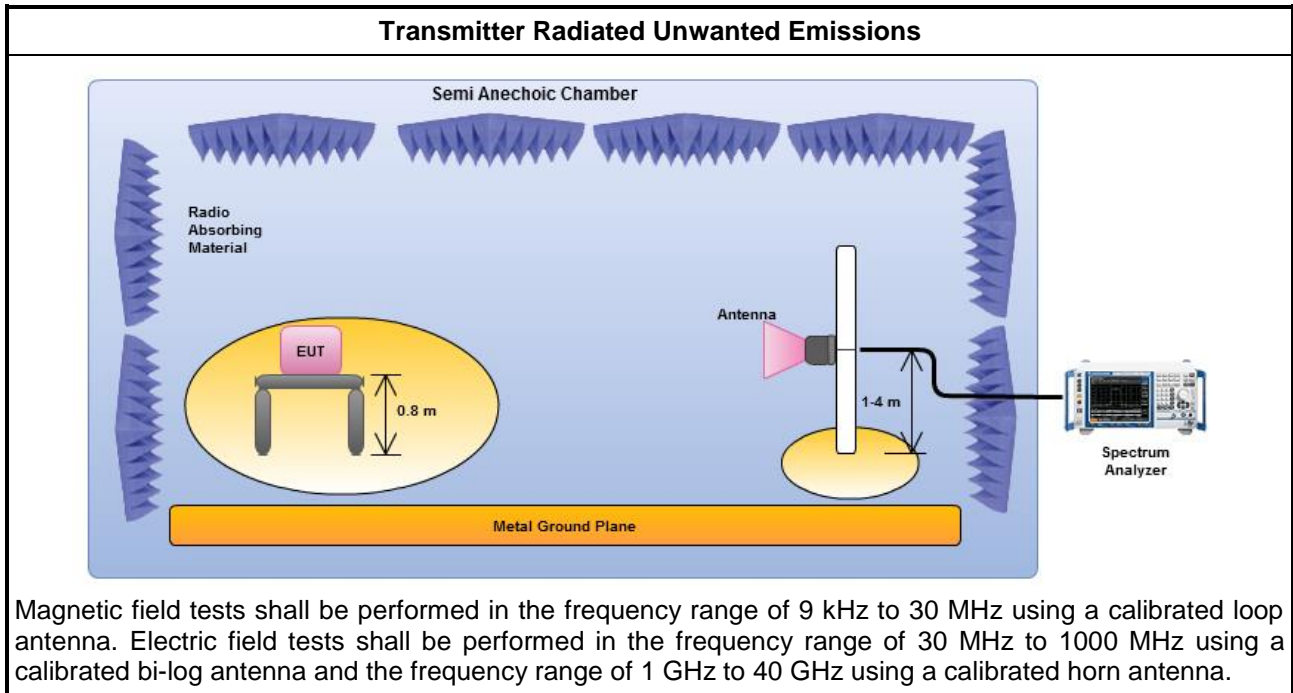

Note: The test distance is 3m.


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Modulation Mode	VHT40	Test Freq. (MHz)	5795
Operating Mode	1	Polarization	H

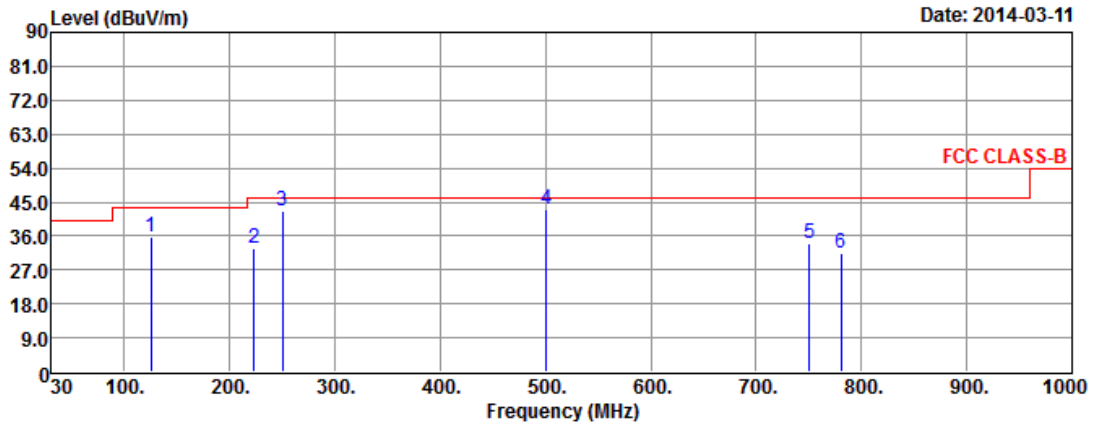


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	125.06	35.87	-7.63	43.50	54.54	12.26	0.73	31.66	---	---	Peak
2	223.03	32.70	-13.30	46.00	52.05	11.24	0.96	31.55	---	---	Peak
3	250.19	42.43	-3.57	46.00	60.40	12.51	1.03	31.51	---	---	Peak
4	500.45	42.98	-3.02	46.00	54.67	18.21	1.51	31.41	143	188	QP
5	750.71	34.19	-11.81	46.00	41.59	22.11	1.88	31.39	---	---	Peak
6	780.78	31.29	-14.71	46.00	38.25	22.47	1.94	31.37	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
Operating Mode	1	Polarization	V

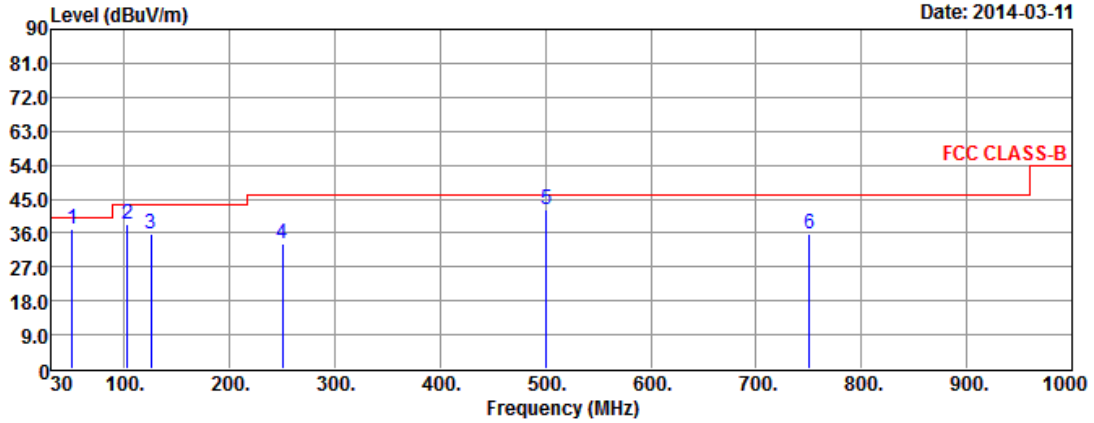


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	50.37	36.86	-3.14	40.00	53.18	14.96	0.50	31.78	110	14	QP
2	102.75	38.53	-4.97	43.50	59.75	9.81	0.66	31.69	---	---	Peak
3	125.06	35.57	-7.93	43.50	54.24	12.26	0.73	31.66	---	---	Peak
4	250.19	33.27	-12.73	46.00	51.24	12.51	1.03	31.51	---	---	Peak
5	500.45	42.26	-3.74	46.00	53.95	18.21	1.51	31.41	---	---	Peak
6	750.71	35.76	-10.24	46.00	43.16	22.11	1.88	31.39	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
Operating Mode	1	Polarization	H

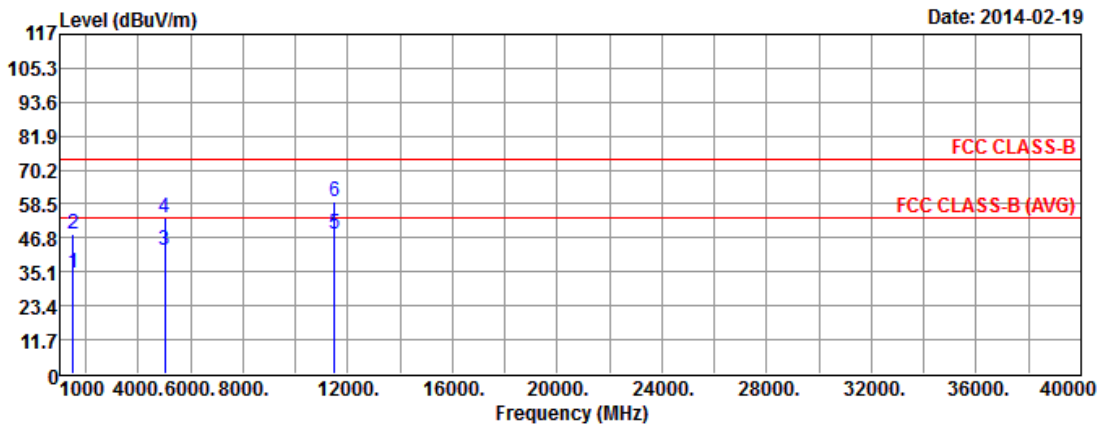


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.88	-19.12	54.00	41.35	25.80	3.45	35.72	---	---	Average
2	1500.00	47.87	-26.13	74.00	54.34	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.73	-11.27	54.00	37.31	31.80	6.72	33.10	---	---	Average
4	5000.00	53.82	-20.18	74.00	48.40	31.80	6.72	33.10	---	---	Peak
5	11490.00	48.03	-5.97	54.00	32.83	40.31	10.35	35.46	---	---	Average
6	11490.00	59.42	-14.58	74.00	44.22	40.31	10.35	35.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
Operating Mode	1	Polarization	V

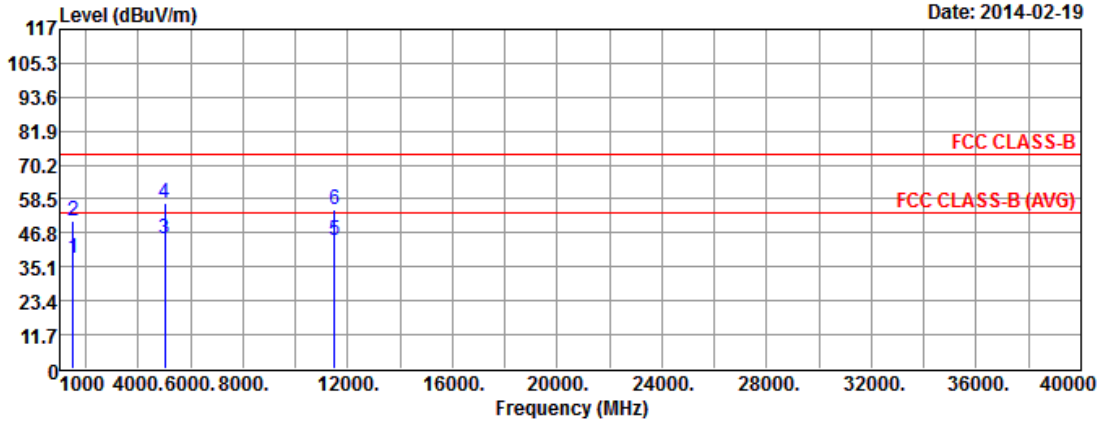


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.94	-16.06	54.00	44.41	25.80	3.45	35.72	---	---	Average
2	1500.00	51.18	-22.82	74.00	57.65	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.76	-9.24	54.00	39.34	31.80	6.72	33.10	---	---	Average
4	5000.00	56.83	-17.17	74.00	51.41	31.80	6.72	33.10	---	---	Peak
5	11490.00	44.15	-9.85	54.00	28.95	40.31	10.35	35.46	---	---	Average
6	11490.00	54.88	-19.12	74.00	39.68	40.31	10.35	35.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
Operating Mode	1	Polarization	H

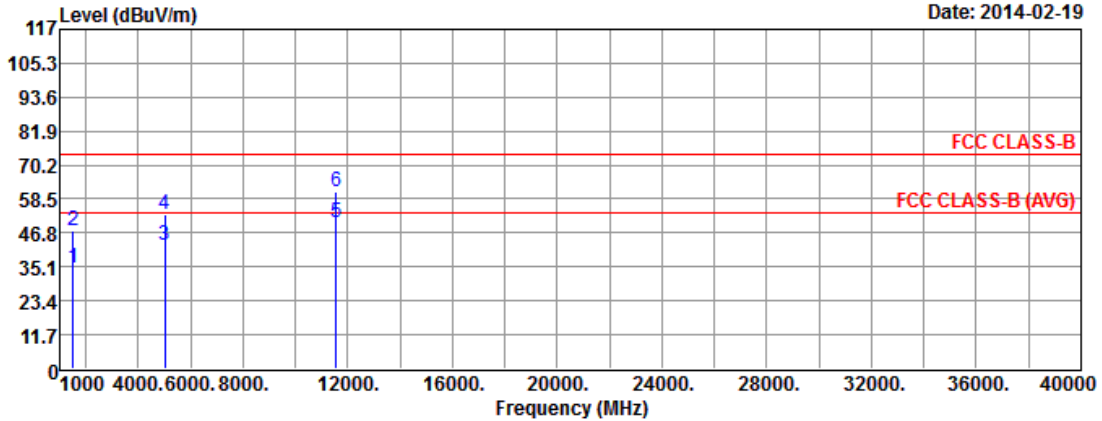

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.56	-19.44	54.00	41.03	25.80	3.45	35.72	---	---	Average
2	1500.00	47.36	-26.64	74.00	53.83	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.44	-11.56	54.00	37.02	31.80	6.72	33.10	---	---	Average
4	5000.00	53.46	-20.54	74.00	48.04	31.80	6.72	33.10	---	---	Peak
5	11570.00	50.23	-3.77	54.00	35.08	40.15	10.45	35.45	---	---	Average
6	11570.00	61.25	-12.75	74.00	46.10	40.15	10.45	35.45	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode	11a			Test Freq. (MHz)	5785						
Operating Mode	1			Polarization	V						
<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2014-02-19</div> </div>											
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.48	-16.52	54.00	43.95	25.80	3.45	35.72	---	---	Average
2	1500.00	50.63	-23.37	74.00	57.10	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.34	-9.66	54.00	38.92	31.80	6.72	33.10	---	---	Average
4	5000.00	56.45	-17.55	74.00	51.03	31.80	6.72	33.10	---	---	Peak
5	11570.00	46.31	-7.69	54.00	31.16	40.15	10.45	35.45	---	---	Average
6	11570.00	57.15	-16.85	74.00	42.00	40.15	10.45	35.45	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5825
Operating Mode	1	Polarization	H

Date: 2014-02-19

FCC CLASS-B

FCC CLASS-B (AVG)

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.84	-19.16	54.00	41.31	25.80	3.45	35.72	---	---	Average
2	1500.00	47.71	-26.29	74.00	54.18	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.64	-11.36	54.00	37.22	31.80	6.72	33.10	---	---	Average
4	5000.00	53.79	-20.21	74.00	48.37	31.80	6.72	33.10	---	---	Peak
5	11650.00	49.89	-4.11	54.00	34.78	39.97	10.57	35.43	---	---	Average
6	11650.00	61.00	-13.00	74.00	45.89	39.97	10.57	35.43	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
Operating Mode	1	Polarization	V

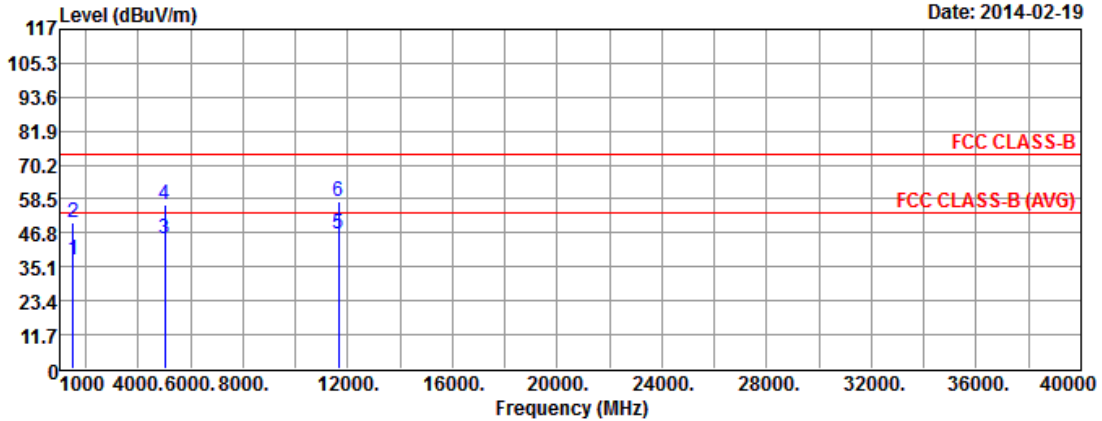


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.24	-16.76	54.00	43.71	25.80	3.45	35.72	---	---	Average
2	1500.00	50.38	-23.62	74.00	56.85	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.63	-9.37	54.00	39.21	31.80	6.72	33.10	---	---	Average
4	5000.00	56.77	-17.23	74.00	51.35	31.80	6.72	33.10	---	---	Peak
5	11650.00	46.70	-7.30	54.00	31.59	39.97	10.57	35.43	---	---	Average
6	11650.00	57.53	-16.47	74.00	42.42	39.97	10.57	35.43	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5745
Operating Mode	1	Polarization	H

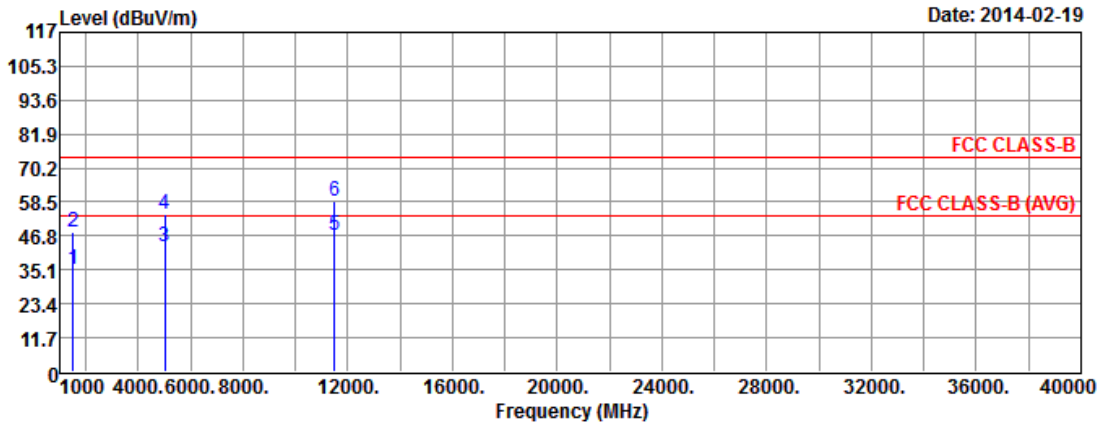


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.19	-18.81	54.00	41.66	25.80	3.45	35.72	---	---	Average
2	1500.00	48.06	-25.94	74.00	54.53	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.90	-11.10	54.00	37.48	31.80	6.72	33.10	---	---	Average
4	5000.00	54.22	-19.78	74.00	48.80	31.80	6.72	33.10	---	---	Peak
5	11490.00	47.15	-6.85	54.00	31.95	40.31	10.35	35.46	---	---	Average
6	11490.00	58.97	-15.03	74.00	43.77	40.31	10.35	35.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
Operating Mode	1	Polarization	V

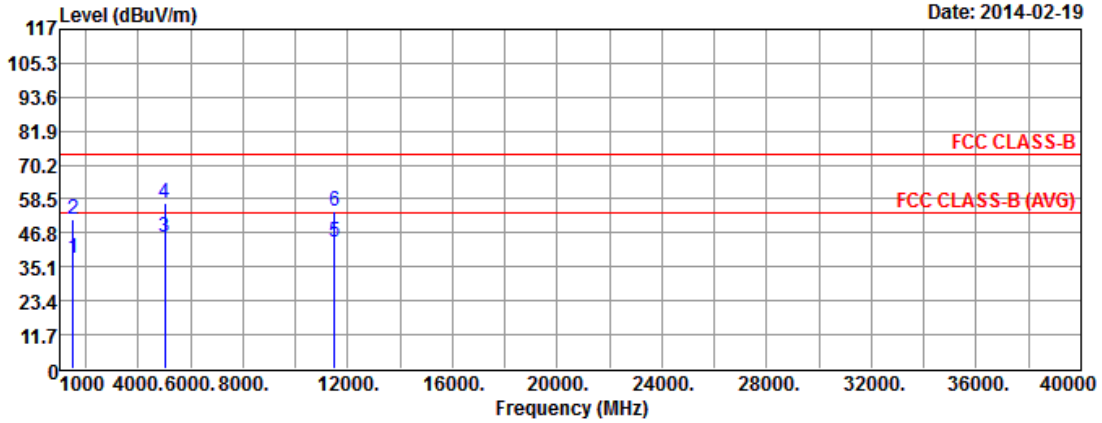


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	38.14	-15.86	54.00	44.61	25.80	3.45	35.72	---	---	Average
2	1500.00	51.60	-22.40	74.00	58.07	25.80	3.45	35.72	---	---	Peak
3	5000.00	45.08	-8.92	54.00	39.66	31.80	6.72	33.10	---	---	Average
4	5000.00	57.33	-16.67	74.00	51.91	31.80	6.72	33.10	---	---	Peak
5	11490.00	43.76	-10.24	54.00	28.56	40.31	10.35	35.46	---	---	Average
6	11490.00	54.42	-19.58	74.00	39.22	40.31	10.35	35.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Operating Mode	1	Polarization	H

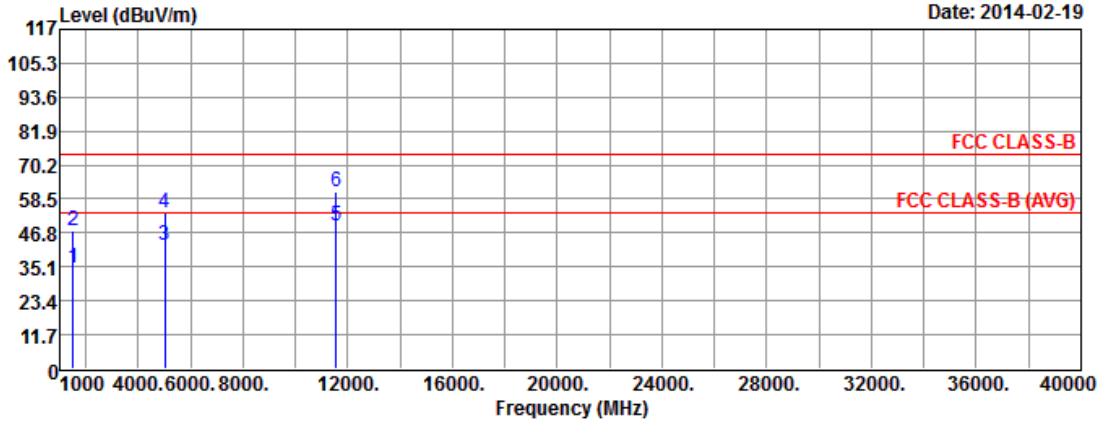


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.88	-19.12	54.00	41.35	25.80	3.45	35.72	---	---	Average
2	1500.00	47.71	-26.29	74.00	54.18	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.79	-11.21	54.00	37.37	31.80	6.72	33.10	---	---	Average
4	5000.00	53.67	-20.33	74.00	48.25	31.80	6.72	33.10	---	---	Peak
5	11570.00	49.28	-4.72	54.00	34.13	40.15	10.45	35.45	---	---	Average
6	11570.00	60.76	-13.24	74.00	45.61	40.15	10.45	35.45	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Operating Mode	1	Polarization	V

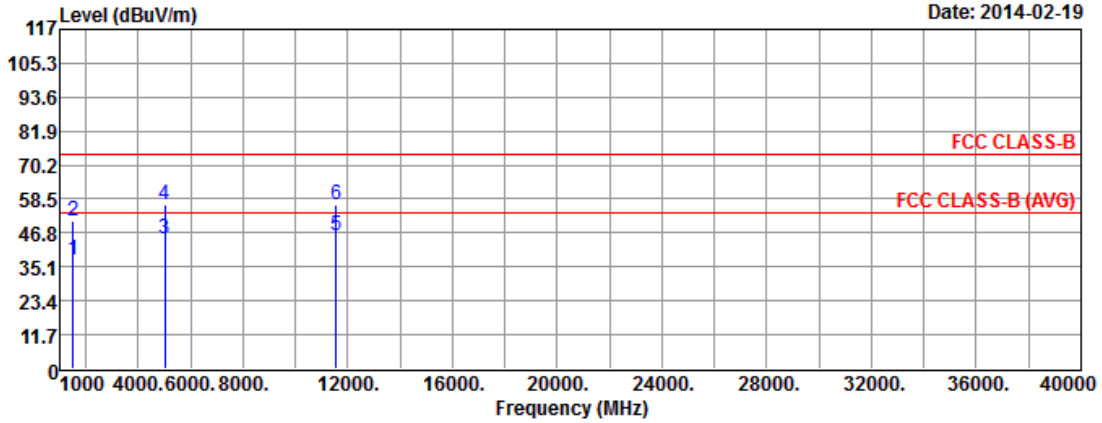

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.76	-16.24	54.00	44.23	25.80	3.45	35.72	---	---	Average
2	1500.00	50.96	-23.04	74.00	57.43	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.62	-9.38	54.00	39.20	31.80	6.72	33.10	---	---	Average
4	5000.00	56.77	-17.23	74.00	51.35	31.80	6.72	33.10	---	---	Peak
5	11570.00	45.68	-8.32	54.00	30.53	40.15	10.45	35.45	---	---	Average
6	11570.00	56.73	-17.27	74.00	41.58	40.15	10.45	35.45	---	---	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																			
Modulation Mode	VHT20	Test Freq. (MHz)	5825																																																																																																
Operating Mode	1	Polarization	H																																																																																																
<div style="display: flex; justify-content: space-between;"> <div> <p style="text-align: right;">Date: 2014-02-19</p> </div> </div> <table border="1" style="width:100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1500.00</td> <td>34.66</td> <td>-19.34</td> <td>54.00</td> <td>41.13</td> <td>25.80</td> <td>3.45</td> <td>35.72</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>2</td> <td>1500.00</td> <td>47.48</td> <td>-26.52</td> <td>74.00</td> <td>53.95</td> <td>25.80</td> <td>3.45</td> <td>35.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5000.00</td> <td>42.36</td> <td>-11.64</td> <td>54.00</td> <td>36.94</td> <td>31.80</td> <td>6.72</td> <td>33.10</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5000.00</td> <td>53.46</td> <td>-20.54</td> <td>74.00</td> <td>48.04</td> <td>31.80</td> <td>6.72</td> <td>33.10</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>11650.00</td> <td>48.58</td> <td>-5.42</td> <td>54.00</td> <td>33.47</td> <td>39.97</td> <td>10.57</td> <td>35.43</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>6</td> <td>11650.00</td> <td>60.10</td> <td>-13.90</td> <td>74.00</td> <td>44.99</td> <td>39.97</td> <td>10.57</td> <td>35.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	1500.00	34.66	-19.34	54.00	41.13	25.80	3.45	35.72	---	---	Average	2	1500.00	47.48	-26.52	74.00	53.95	25.80	3.45	35.72	---	---	Peak	3	5000.00	42.36	-11.64	54.00	36.94	31.80	6.72	33.10	---	---	Average	4	5000.00	53.46	-20.54	74.00	48.04	31.80	6.72	33.10	---	---	Peak	5	11650.00	48.58	-5.42	54.00	33.47	39.97	10.57	35.43	---	---	Average	6	11650.00	60.10	-13.90	74.00	44.99	39.97	10.57	35.43	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	1500.00	34.66	-19.34	54.00	41.13	25.80	3.45	35.72	---	---	Average																																																																																								
2	1500.00	47.48	-26.52	74.00	53.95	25.80	3.45	35.72	---	---	Peak																																																																																								
3	5000.00	42.36	-11.64	54.00	36.94	31.80	6.72	33.10	---	---	Average																																																																																								
4	5000.00	53.46	-20.54	74.00	48.04	31.80	6.72	33.10	---	---	Peak																																																																																								
5	11650.00	48.58	-5.42	54.00	33.47	39.97	10.57	35.43	---	---	Average																																																																																								
6	11650.00	60.10	-13.90	74.00	44.99	39.97	10.57	35.43	---	---	Peak																																																																																								
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.</p>																																																																																																			



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
Operating Mode	1	Polarization	V

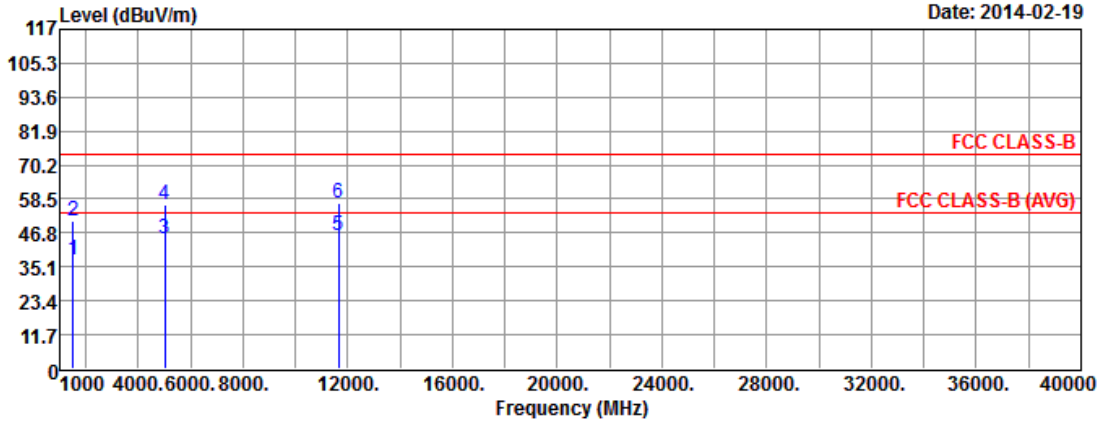


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.48	-16.52	54.00	43.95	25.80	3.45	35.72	---	---	Average
2	1500.00	50.72	-23.28	74.00	57.19	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.92	-9.08	54.00	39.50	31.80	6.72	33.10	---	---	Average
4	5000.00	56.49	-17.51	74.00	51.07	31.80	6.72	33.10	---	---	Peak
5	11650.00	45.93	-8.07	54.00	30.82	39.97	10.57	35.43	---	---	Average
6	11650.00	57.05	-16.95	74.00	41.94	39.97	10.57	35.43	---	---	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT40	Test Freq. (MHz)	5755
Operating Mode	1	Polarization	H

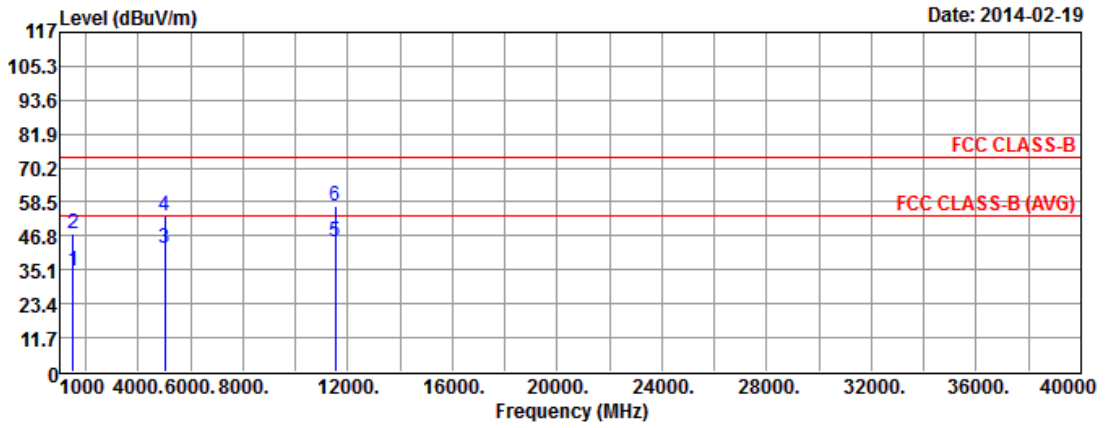


	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	
Freq	Level	Limit	Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.87	-19.13	54.00	41.34	25.80	3.45	35.72	---	Average
2	1500.00	47.83	-26.17	74.00	54.30	25.80	3.45	35.72	---	Peak
3	5000.00	42.55	-11.45	54.00	37.13	31.80	6.72	33.10	---	Average
4	5000.00	53.92	-20.08	74.00	48.50	31.80	6.72	33.10	---	Peak
5	11510.00	45.05	-8.95	54.00	29.87	40.28	10.36	35.46	---	Average
6	11510.00	57.12	-16.88	74.00	41.94	40.28	10.36	35.46	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
Operating Mode	1	Polarization	V

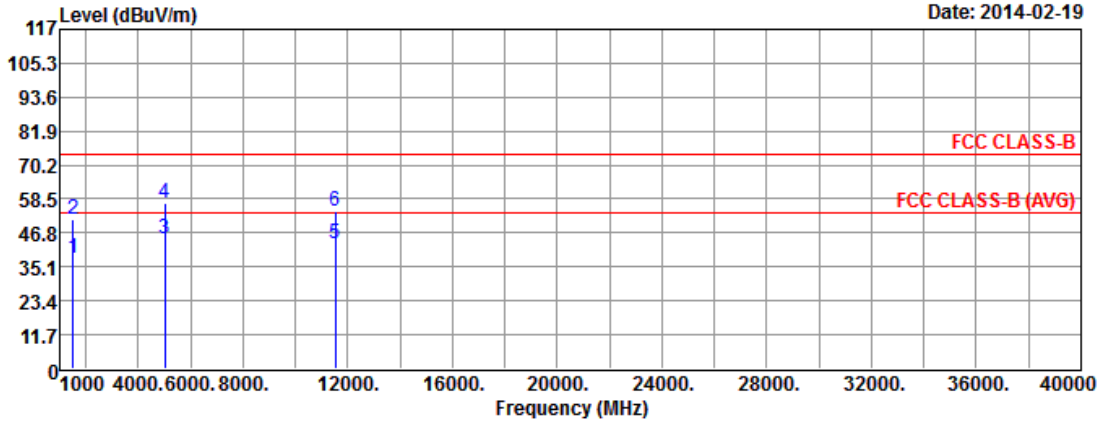


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.87	-16.13	54.00	44.34	25.80	3.45	35.72	---	---	Average
2	1500.00	51.32	-22.68	74.00	57.79	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.84	-9.16	54.00	39.42	31.80	6.72	33.10	---	---	Average
4	5000.00	57.12	-16.88	74.00	51.70	31.80	6.72	33.10	---	---	Peak
5	11510.00	43.23	-10.77	54.00	28.05	40.28	10.36	35.46	---	---	Average
6	11510.00	54.21	-19.79	74.00	39.03	40.28	10.36	35.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
Operating Mode	1	Polarization	H

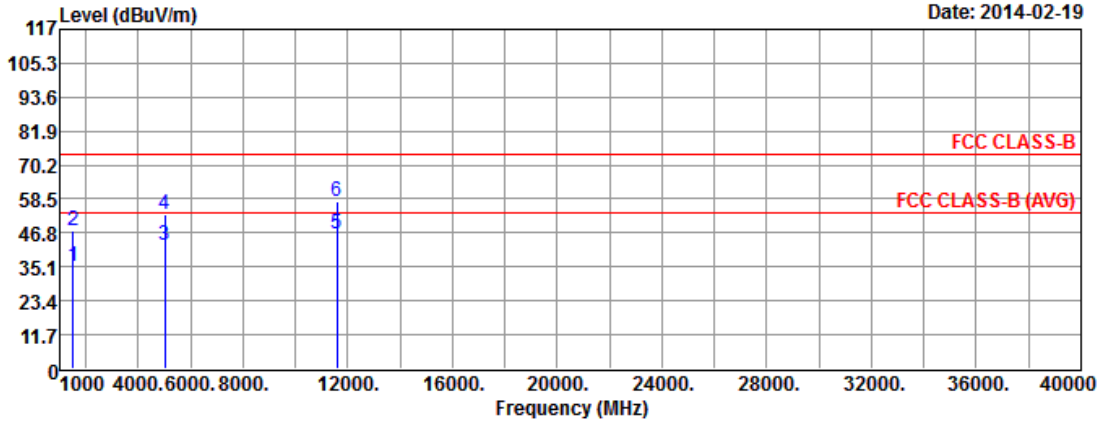


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.10	-18.90	54.00	41.57	25.80	3.45	35.72	---	---	Average
2	1500.00	47.54	-26.46	74.00	54.01	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.62	-11.38	54.00	37.20	31.80	6.72	33.10	---	---	Average
4	5000.00	53.27	-20.73	74.00	47.85	31.80	6.72	33.10	---	---	Peak
5	11590.00	46.30	-7.70	54.00	31.16	40.10	10.48	35.44	---	---	Average
6	11590.00	57.58	-16.42	74.00	42.44	40.10	10.48	35.44	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
Operating Mode	1	Polarization	V

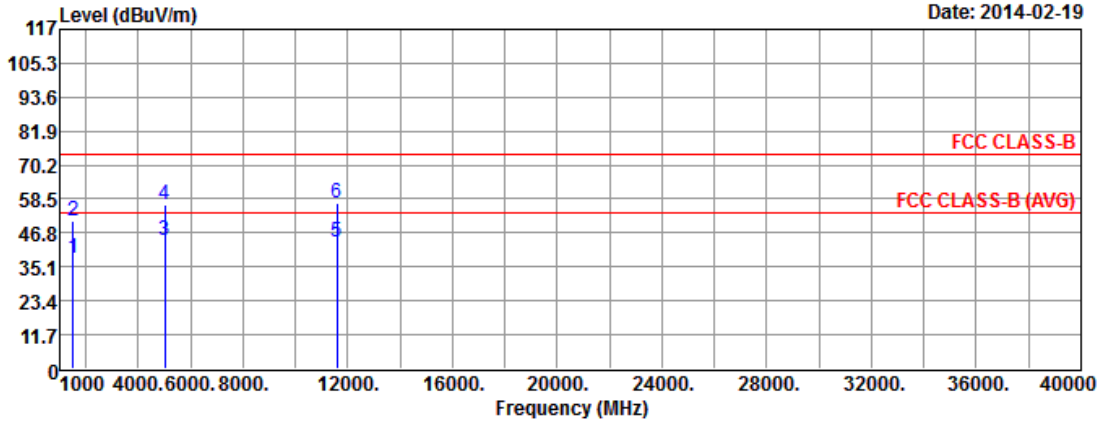


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.84	-16.16	54.00	44.31	25.80	3.45	35.72	---	---	Average
2	1500.00	50.75	-23.25	74.00	57.22	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.33	-9.67	54.00	38.91	31.80	6.72	33.10	---	---	Average
4	5000.00	56.27	-17.73	74.00	50.85	31.80	6.72	33.10	---	---	Peak
5	11590.00	43.81	-10.19	54.00	28.67	40.10	10.48	35.44	---	---	Average
6	11590.00	56.86	-17.14	74.00	41.72	40.10	10.48	35.44	---	---	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT80	Test Freq. (MHz)	5775
Operating Mode	1	Polarization	H

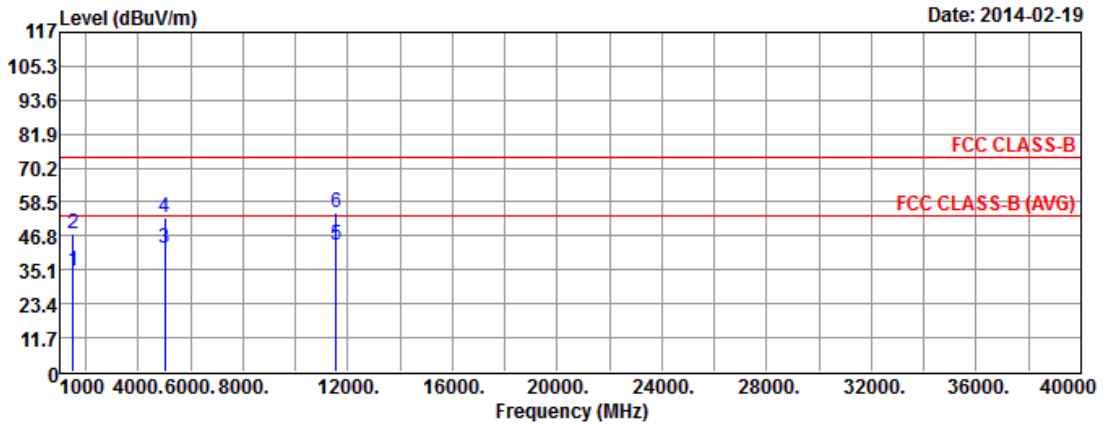


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.43	-19.57	54.00	40.90	25.80	3.45	35.72	---	---	Average
2	1500.00	47.51	-26.49	74.00	53.98	25.80	3.45	35.72	---	---	Peak
3	5000.00	42.31	-11.69	54.00	36.89	31.80	6.72	33.10	---	---	Average
4	5000.00	53.42	-20.58	74.00	48.00	31.80	6.72	33.10	---	---	Peak
5	11550.00	43.62	-10.38	54.00	28.46	40.19	10.42	35.45	---	---	Average
6	11550.00	55.02	-18.98	74.00	39.86	40.19	10.42	35.45	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
Operating Mode	1	Polarization	V

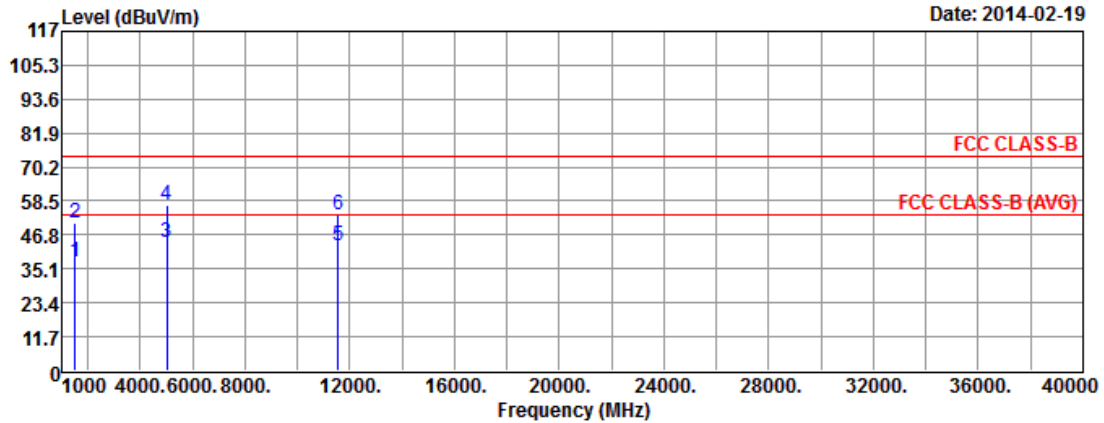

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	37.56	-16.44	54.00	44.03	25.80	3.45	35.72	---	---	Average
2	1500.00	51.02	-22.98	74.00	57.49	25.80	3.45	35.72	---	---	Peak
3	5000.00	44.42	-9.58	54.00	39.00	31.80	6.72	33.10	---	---	Average
4	5000.00	56.86	-17.14	74.00	51.44	31.80	6.72	33.10	---	---	Peak
5	11550.00	42.93	-11.07	54.00	27.77	40.19	10.42	35.45	---	---	Average
6	11550.00	53.90	-20.10	74.00	38.74	40.19	10.42	35.45	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz ~ 2.75GHz	Nov. 14, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNE R	RG213/U	07611832010001	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 25, 2014	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV40	101499	9Kz – 40GHz	Feb. 08, 2014	Radiation (03CH08-HY)
Receiver	R&S	ESR3	101657	9KHz – 3GHz	Jan. 18, 2014	Radiation (03CH08-HY)
Amplifier	Burgeon	BPA-530	100218	30MHz ~ 1000MHz	Dec. 09, 2013	Radiation (03CH08-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Sep. 04, 2013	Radiation (03CH08-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 07, 2013	Radiation (03CH08-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170517	15GHz~40GHz	Dec. 27, 2013	Radiation (03CH08-HY)
Bilog Antenna	Teseq GmbH	CBL6112D	35379	30 MHz - 1 GHz	Oct. 10, 2013	Radiation (03CH08-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060572	26.5GHz ~ 40GHz	Jun. 20, 2013	Radiation (03CH08-HY)
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH08-HY)

Note: Calibration Interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 17, 2014	Conducted (TH01-HY)
Spectrum Analyzer	Agilent	N9010A	MY53400091	9KHz~44GHz	Oct. 07, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMB100A	175727	10MHz ~ 40GHz	Jan. 07, 2014	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1207366	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1241002	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 21, 2013	Conducted (TH01-HY)
AC Power Source	G.W.	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.