



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR850LB1

Product Name	Wireless AC1200 Dual Band Gigabit Cloud Router
Brand Name	D-Link
Model No.	DIR-850L
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Mar. 27, 2014
Final Test Date	Jun. 14, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.




Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	12
3.10. Duty Cycle.....	13
3.11. Test Configurations	17
4. TEST RESULT	20
4.1. AC Power Line Conducted Emissions Measurement.....	20
4.2. Maximum Conducted Output Power Measurement.....	24
4.3. Power Spectral Density Measurement	27
4.4. 6dB Spectrum Bandwidth Measurement	39
4.5. Radiated Emissions Measurement	48
4.6. Emissions Measurement	76
4.7. Antenna Requirements	105
5. LIST OF MEASURING EQUIPMENTS	106
6. MEASUREMENT UNCERTAINTY.....	108
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1200 Dual Band Gigabit Cloud Router
Brand Name : D-Link
Model No. : DIR-850L
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 27, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

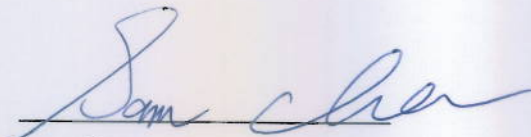

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.30 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	3.10 dB
4.3	15.247(e)	Power Spectral Density	Complies	10.55 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.53 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.10 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> MCS0 (HT20): 17.84 MHz ; MCS0 (HT40): 36.32MHz <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 27.92 MHz ; 802.11ac MCS0/Nss1 (VHT40): 56.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.52 MHz
Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> MCS0 (HT20): 24.17 dBm ; MCS0 (HT40): 19.30 dBm <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 25.95 dBm ; 802.11ac MCS0/Nss1 (VHT40): 25.88 dBm ; 802.11ac MCS0/Nss1 (VHT80): 18.56 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.60 MHz ; 11g: 16.40 MHz ; 11a: 26.64 MHz
Maximum Conducted Output Power	11b: 26.90 dBm ; 11g: 24.29 dBm ; 11a: 25.98 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Two (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	v	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS0-15
802.11n (HT40)	2	MCS0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	D-Link	AMS3-1201500FU	Input: 100-240V~50/60Hz, 0.5A/45VA Output: 12V, 1.5A


3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	HL	DIR-850L B1	PCB Antenna	I-PEX	3.13	4.47
2	HL	DIR-850L B1	Printed Antenna	Murata	3.20	2.13

Note: The EUT has two antennas.

Ant. 1 and Ant. 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

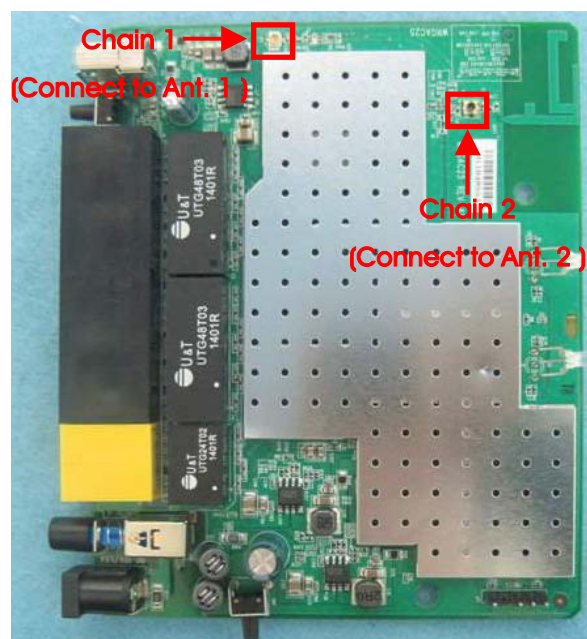

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
6dB Spectrum Bandwidth	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

For 5GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Power Spectral Density	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Band Edge Emissions	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2

Note: VHT20/VHT40 covers HT20 / HT40, due to same modulation.

For Co-location MPE and Radiated Emission Co-location test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
Flash Disk	Transcend	604108 8255	DoC

For Test Site No: 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	D420	DoC
NB	Apple	Mac Book	DoC
NB	DELL	E6220	DoC
Flash Disk	Silicon	D33B01	DoC

For Test Site No: 03CH01-CB <Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 HT20

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	51/44	63/56	48/43

Power Parameters of IEEE 802.11n MCS0 HT40

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	46/39	50/45	50/45

Power Parameters of IEEE 802.11b/g

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	54/49	63/56	53/48
IEEE 802.11g	50/43	63/58	50/45

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	59/59	63/63	63/63

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	5755 MHz	5795 MHz	
MCS0/Nss1 VHT40	57/57	63/63	

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	5775 MHz		
MCS0/Nss1 VHT80	47/43		

Power Parameters of IEEE 802.11a

Test Software Version	RTL819x 2.3 - 13/11/21		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	60/60	63/63	63/63


3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle


For 2.4GHz Band:

IEEE 802.11n MCS0 HT20

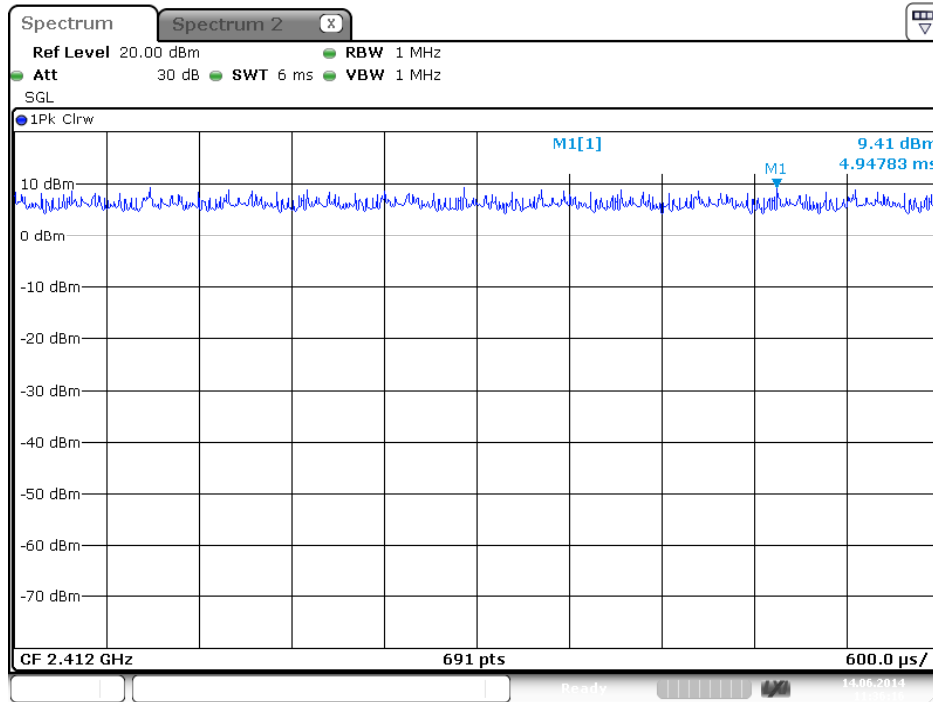


Date: 14.JUN.2014 11:36:17

IEEE 802.11n MCS0 HT40

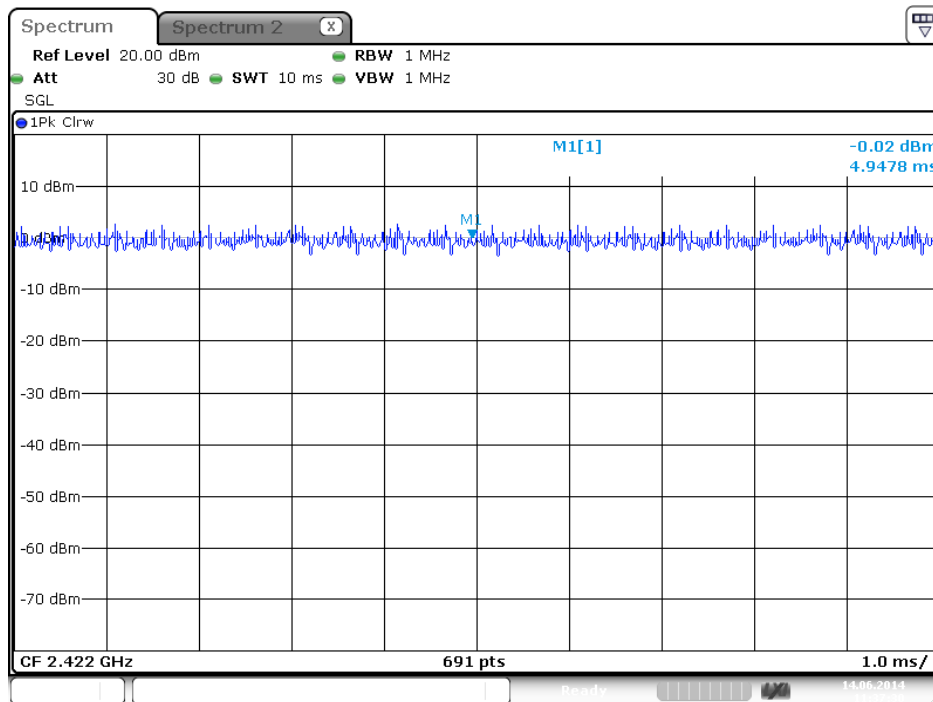


Date: 14.JUN.2014 11:37:30

IEEE 802.11b

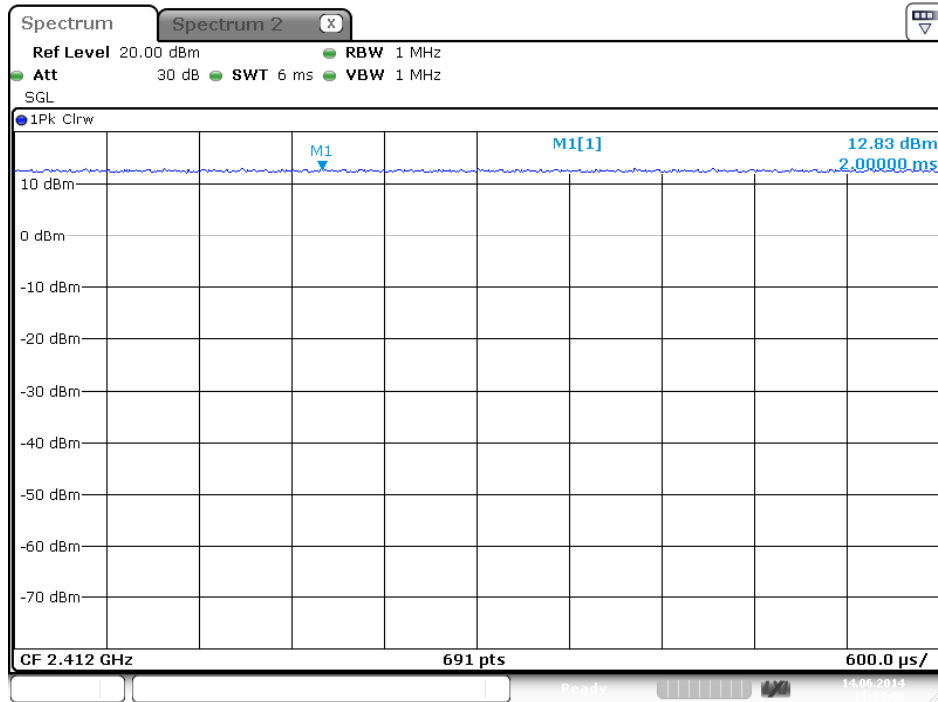

Date: 14.JUN.2014 11:34:40


IEEE 802.11g

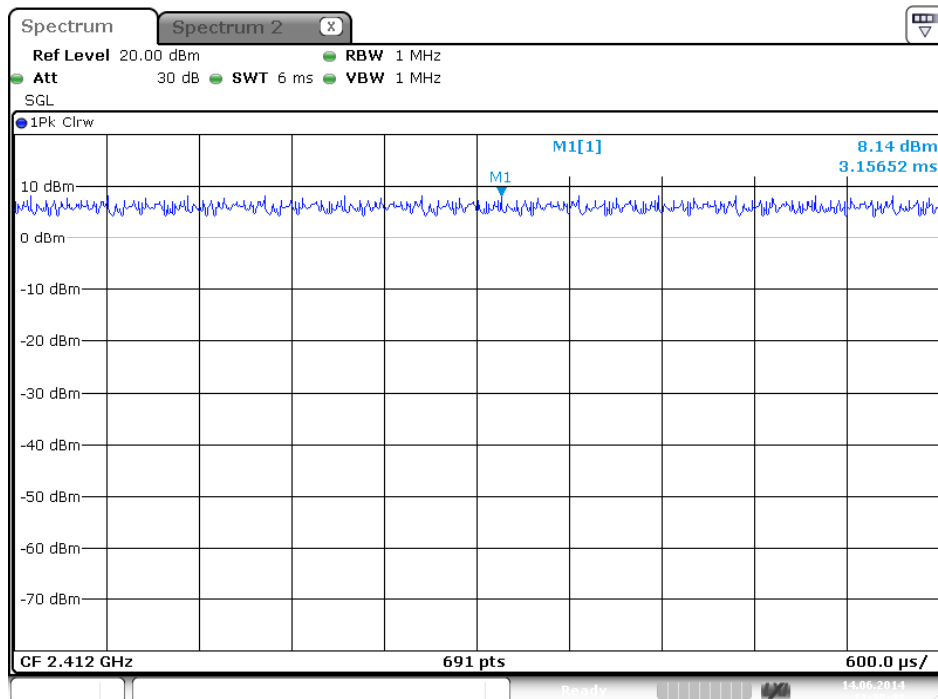

Date: 14.JUN.2014 11:35:44


For 5GHz Band:

IEEE 802.11ac MCS0/Nss1 VHT20

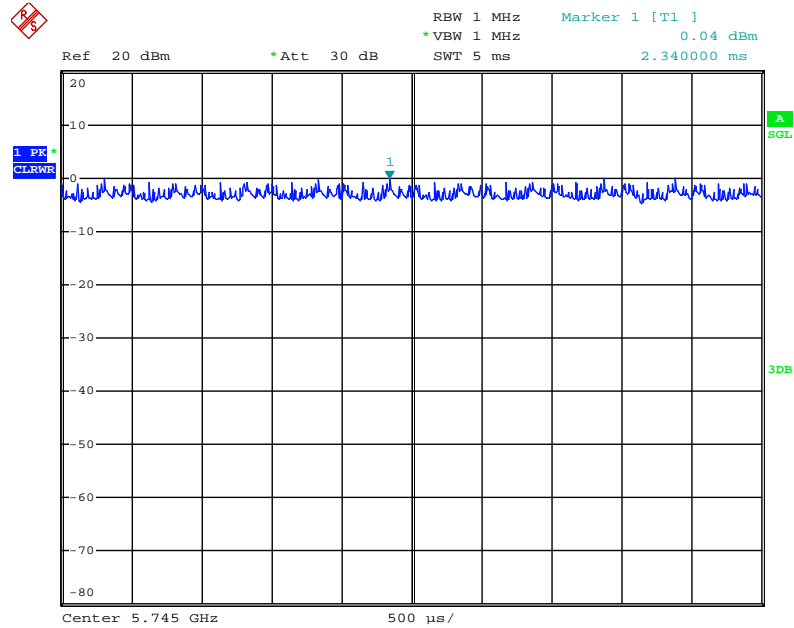


Date: 23.MAY.2014 19:31:45

IEEE 802.11ac MCS0/Nss1 VHT40

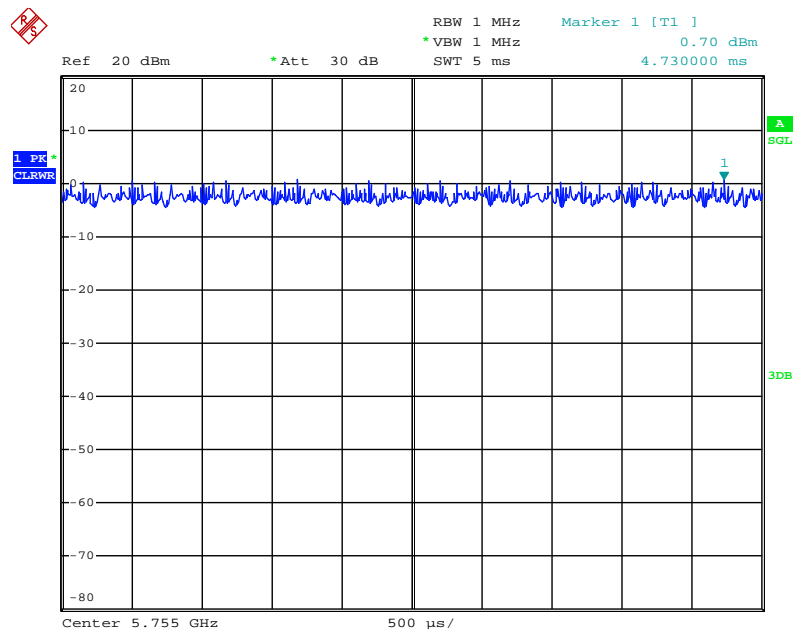


Date: 23.MAY.2014 19:33:06

IEEE 802.11ac MCS0/Nss1 VHT80

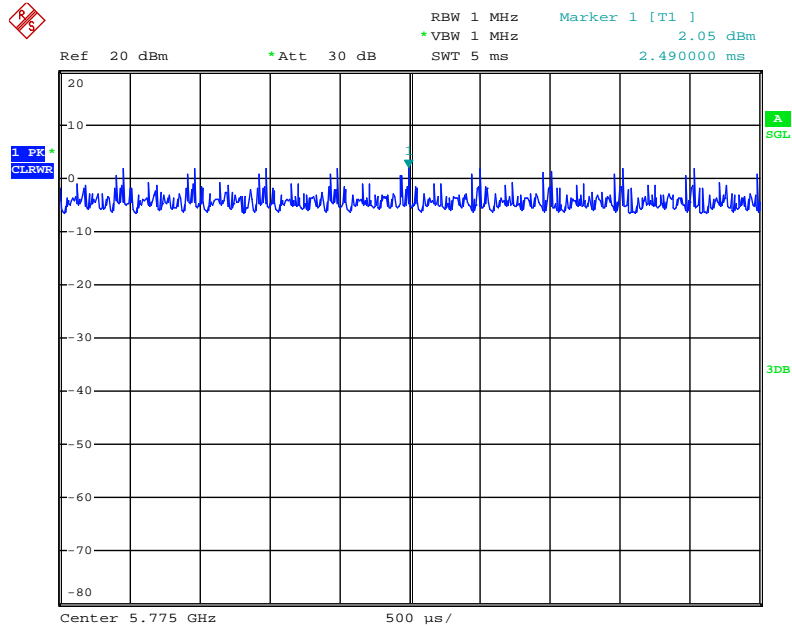

Date: 23.MAY.2014 19:33:47


IEEE 802.11a

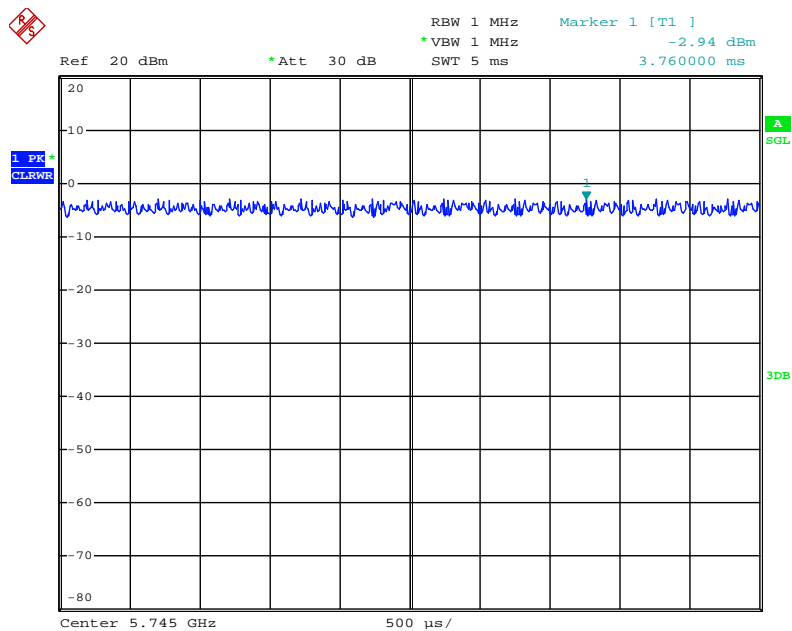

Date: 23.MAY.2014 19:31:24

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

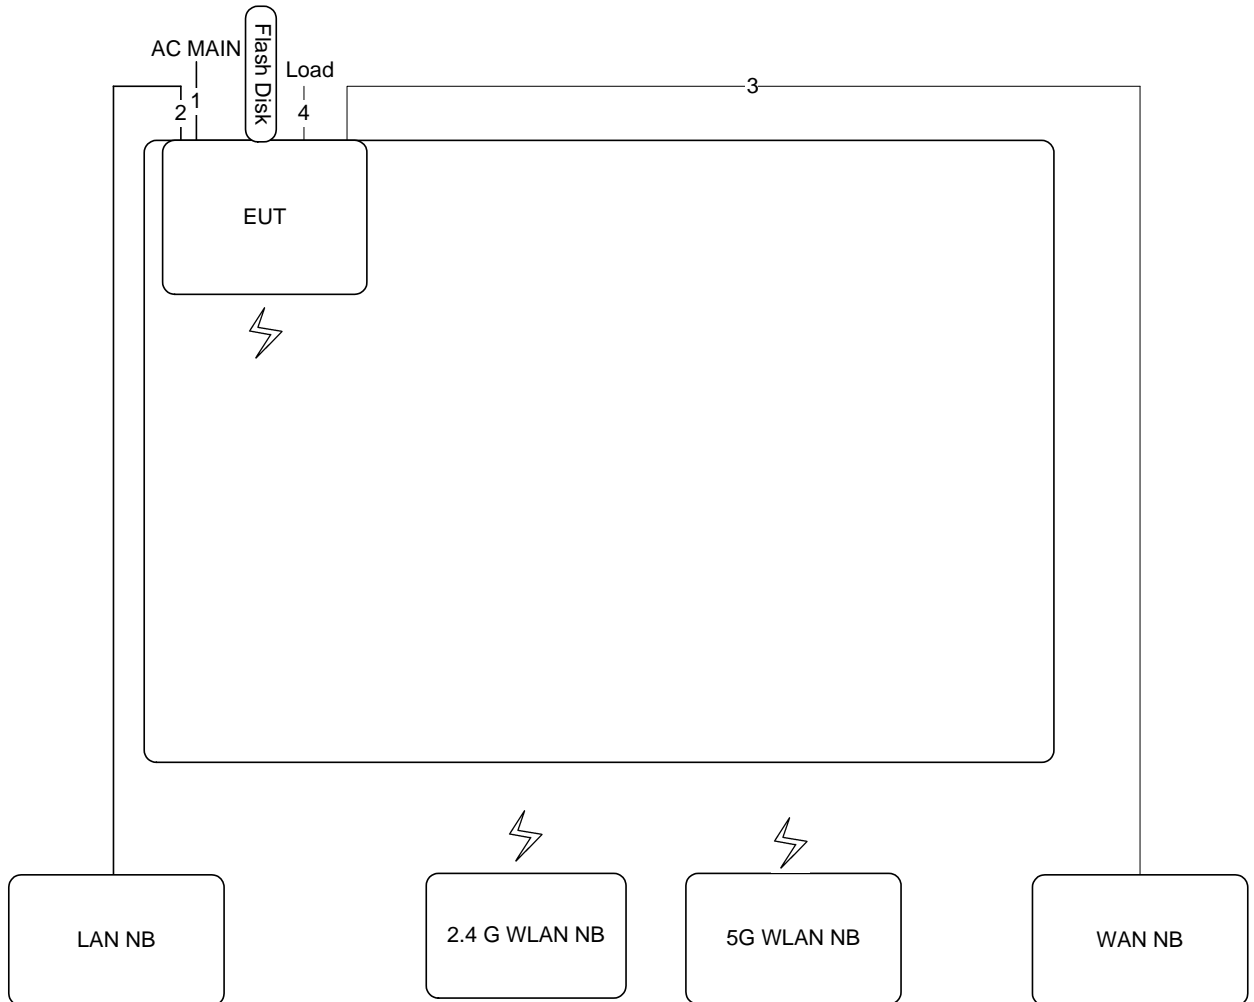

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.2m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable*3	No	3m	Load


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

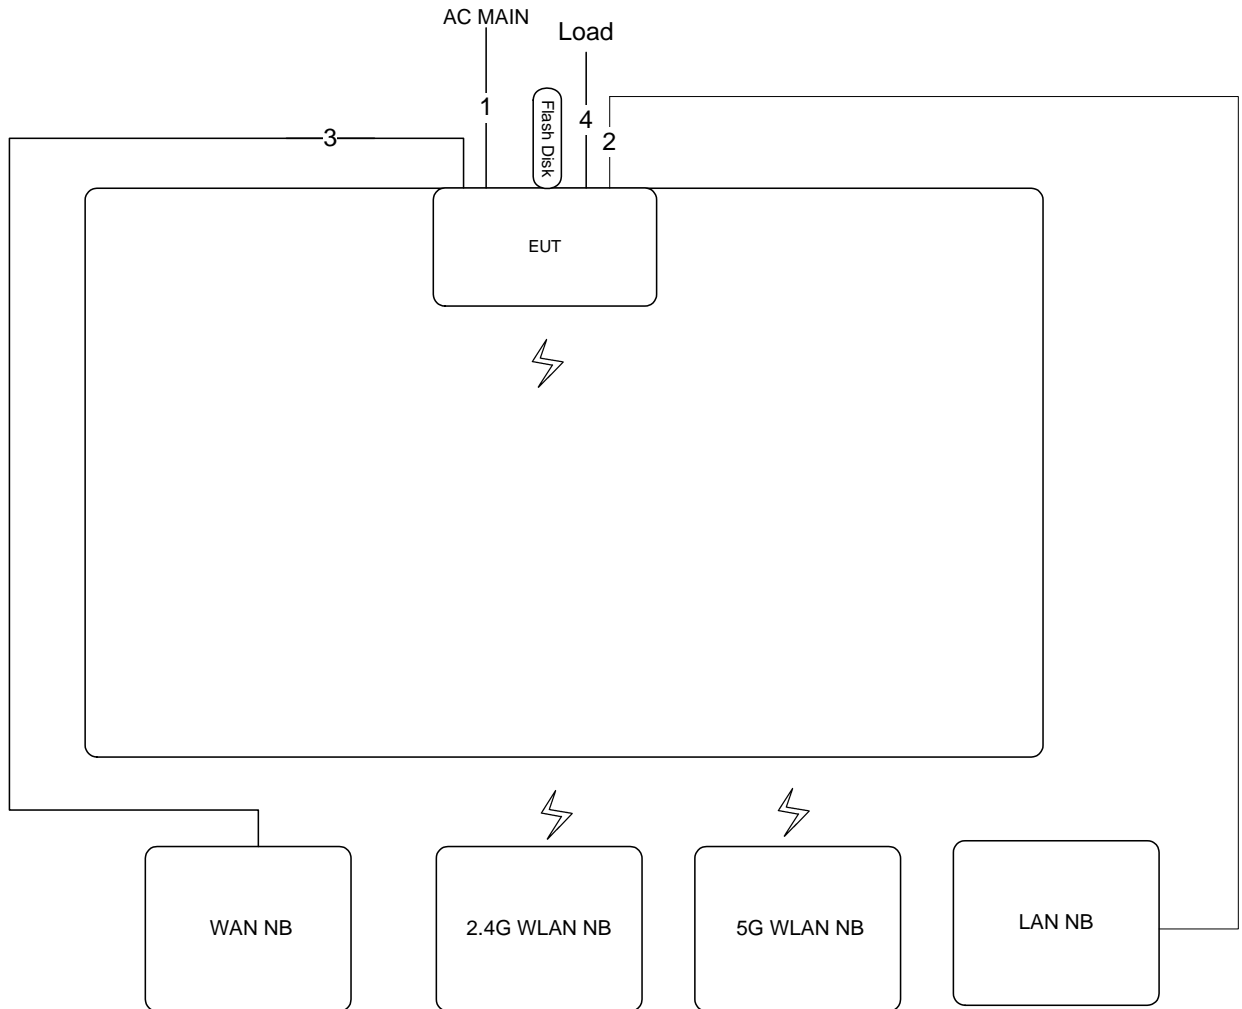

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.2m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable*3	No	3m	Load

Test Configuration: above 1GHz

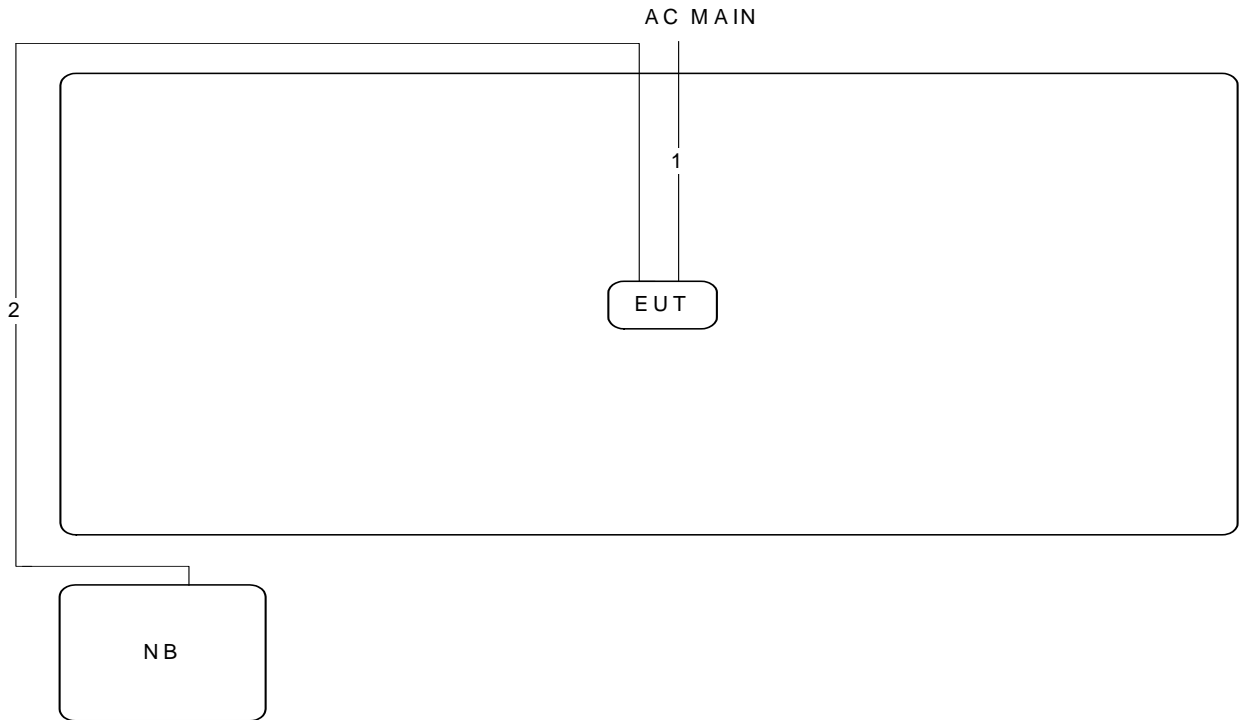

Item	Connection	Shielded	Length
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

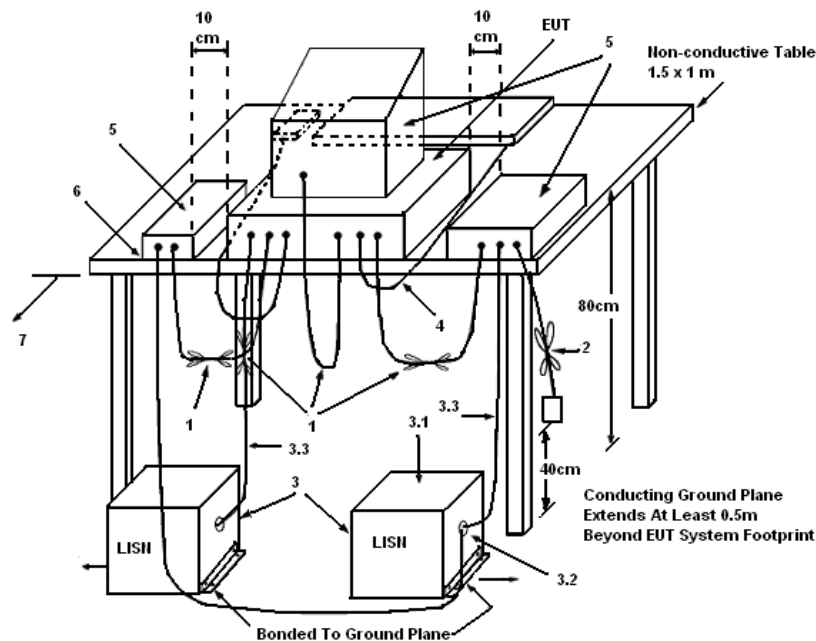

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

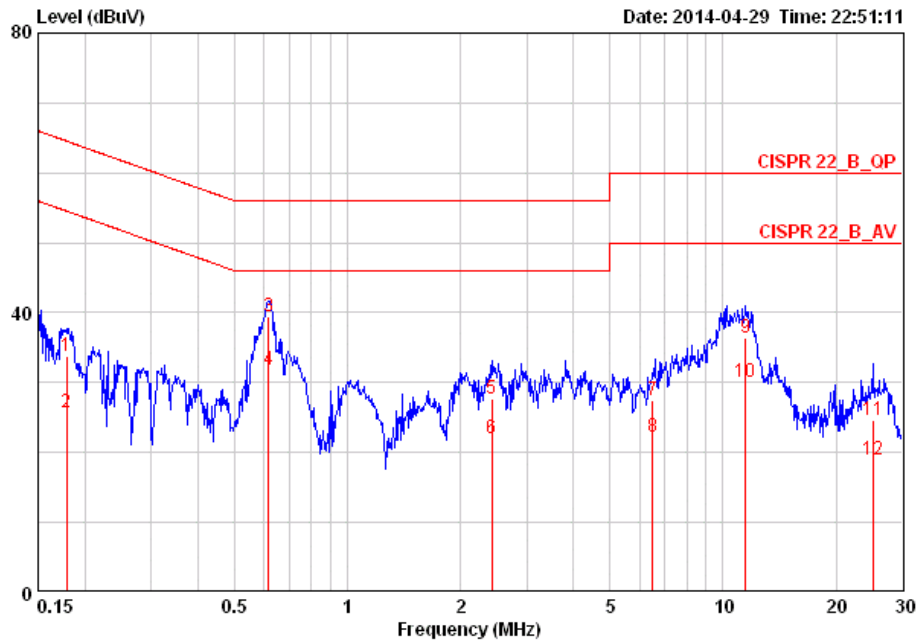

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.17866	33.77	-30.78	64.55	0.08	33.53	0.16	LINE	QP
2	0.17866	25.71	-28.84	54.55	0.08	25.47	0.16	LINE	AVERAGE
3	0.61726	39.39	-16.61	56.00	0.08	39.12	0.19	LINE	QP
4	0.61726	31.73	-14.27	46.00	0.08	31.46	0.19	LINE	AVERAGE
5	2.422	27.58	-28.42	56.00	0.13	27.19	0.26	LINE	QP
6	2.422	21.91	-24.09	46.00	0.13	21.52	0.26	LINE	AVERAGE
7	6.488	27.48	-32.52	60.00	0.20	26.94	0.34	LINE	QP
8	6.488	22.27	-27.73	50.00	0.20	21.73	0.34	LINE	AVERAGE
9	11.498	36.31	-23.69	60.00	0.27	35.64	0.40	LINE	QP
10	11.498	30.16	-19.84	50.00	0.27	29.49	0.40	LINE	AVERAGE
11	25.055	24.71	-35.29	60.00	0.42	23.72	0.57	LINE	QP
12	25.055	18.97	-31.03	50.00	0.42	17.98	0.57	LINE	AVERAGE

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

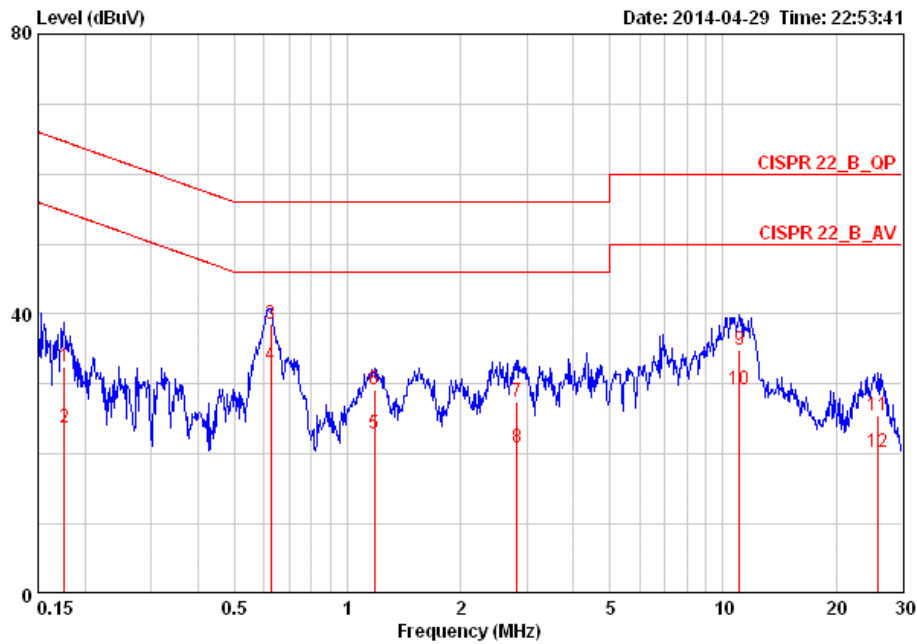

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.17584	32.46	-32.22	64.68	0.08	32.22	0.16	NEUTRAL	QP
2	0.17584	23.84	-30.84	54.68	0.08	23.60	0.16	NEUTRAL	AVERAGE
3	0.62383	38.54	-17.46	56.00	0.09	38.26	0.19	NEUTRAL	QP
4	0.62383	32.70	-13.30	46.00	0.09	32.42	0.19	NEUTRAL	AVERAGE
5	1.178	23.00	-23.00	46.00	0.10	22.69	0.21	NEUTRAL	AVERAGE
6	1.178	29.18	-26.82	56.00	0.10	28.87	0.21	NEUTRAL	QP
7	2.824	27.42	-28.58	56.00	0.14	27.01	0.27	NEUTRAL	QP
8	2.824	20.82	-25.18	46.00	0.14	20.41	0.27	NEUTRAL	AVERAGE
9	11.080	34.85	-25.15	60.00	0.27	34.19	0.39	NEUTRAL	QP
10	11.080	29.19	-20.81	50.00	0.27	28.53	0.39	NEUTRAL	AVERAGE
11	25.864	25.55	-34.45	60.00	0.40	24.57	0.58	NEUTRAL	QP
12	25.864	20.32	-29.68	50.00	0.40	19.34	0.58	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 9.2.3.2 Method AVGPM-G (Measurement using a gated RF average power meter).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

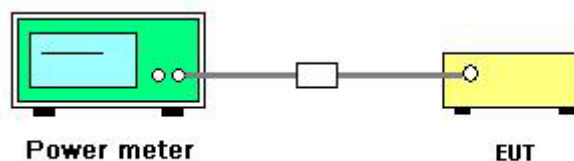

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n/ac
Test Date	Jun. 14, 2014		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	16.16	15.81	19.00	30.00	Complies
6	2437 MHz	21.32	20.99	24.17	30.00	Complies
11	2462 MHz	14.68	15.07	17.89	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
3	2422 MHz	12.95	12.51	15.75	30.00	Complies
6	2437 MHz	16.38	16.20	19.30	30.00	Complies
9	2452 MHz	15.68	15.54	18.62	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
149	5745 MHz	21.02	21.76	24.42	30.00	Complies
157	5785 MHz	23.02	22.73	25.89	30.00	Complies
165	5825 MHz	23.06	22.81	25.95	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
151	5755 MHz	20.72	20.85	23.80	30.00	Complies
159	5795 MHz	23.01	22.73	25.88	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
155	5775 MHz	15.53	15.57	18.56	30.00	Complies

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a/b/g
Test Date	Jun. 14, 2014		

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	22.21	22.61	25.42	30.00	Complies
6	2437 MHz	23.38	24.34	26.90	30.00	Complies
11	2462 MHz	20.43	20.93	23.70	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	15.68	15.02	18.37	30.00	Complies
6	2437 MHz	21.07	21.48	24.29	30.00	Complies
11	2462 MHz	15.57	15.87	18.73	30.00	Complies

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
149	5745 MHz	21.85	21.56	24.72	30.00	Complies
157	5785 MHz	23.01	22.81	25.92	30.00	Complies
165	5825 MHz	23.08	22.86	25.98	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

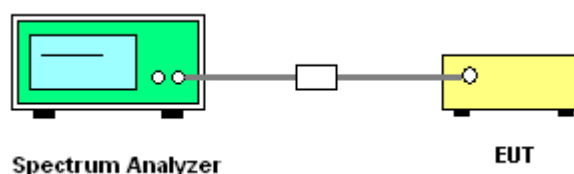

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-15.02	-12.99	-10.88	8.00	Complies
6	2437 MHz	-8.01	-8.15	-5.07	8.00	Complies
11	2462 MHz	-13.23	-14.22	-10.69	8.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
3	2422 MHz	-16.52	-16.49	-13.49	8.00	Complies
6	2437 MHz	-14.14	-14.23	-11.17	8.00	Complies
9	2452 MHz	-16.60	-15.96	-13.26	8.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
149	5745 MHz	-5.72	-5.40	-2.55	8.00	Complies
157	5785 MHz	-5.11	-6.60	-2.78	8.00	Complies
165	5825 MHz	-5.42	-5.91	-2.65	8.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
151	5755 MHz	-11.00	-10.89	-7.93	8.00	Complies
159	5795 MHz	-7.76	-7.24	-4.48	8.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
155	5775 MHz	-17.04	-17.89	-14.43	8.00	Complies

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-8.95	-8.96	-5.94	8.00	Complies
6	2437 MHz	-7.63	-6.98	-4.28	8.00	Complies
11	2462 MHz	-10.62	-10.49	-7.54	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-13.67	-14.41	-11.01	8.00	Complies
6	2437 MHz	-7.91	-8.50	-5.18	8.00	Complies
11	2462 MHz	-13.37	-13.91	-10.62	8.00	Complies


Configuration IEEE 802.11a

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
149	5745 MHz	-7.09	-6.27	-3.65	8.00	Complies
157	5785 MHz	-5.96	-5.62	-2.78	8.00	Complies
165	5825 MHz	-6.81	-7.04	-3.91	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

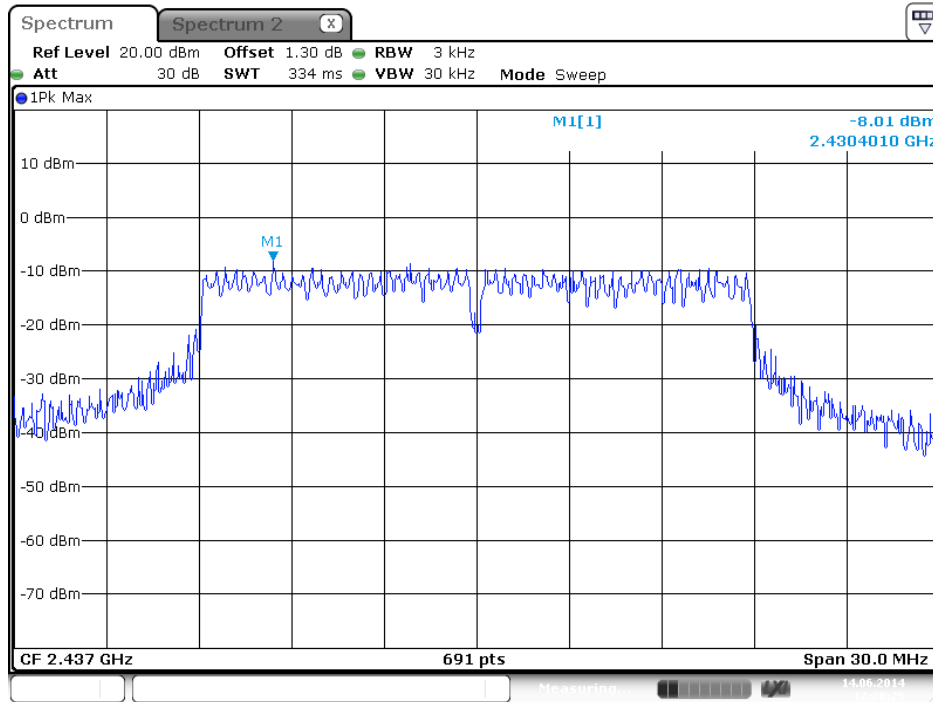


Date: 14.JUN.2014 12:20:25

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

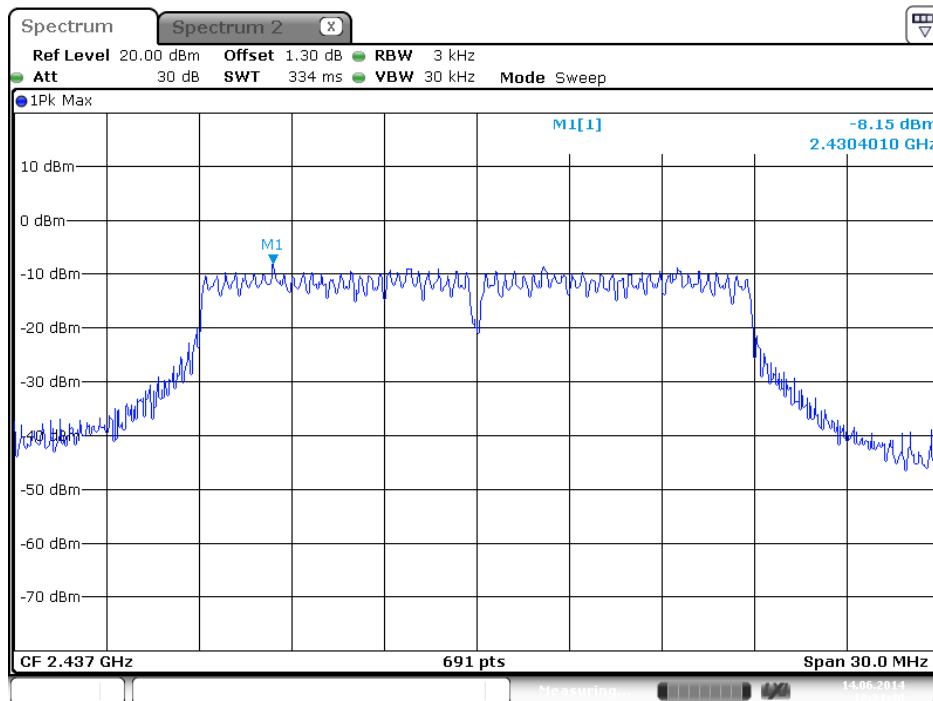


Date: 14.JUN.2014 12:21:40


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

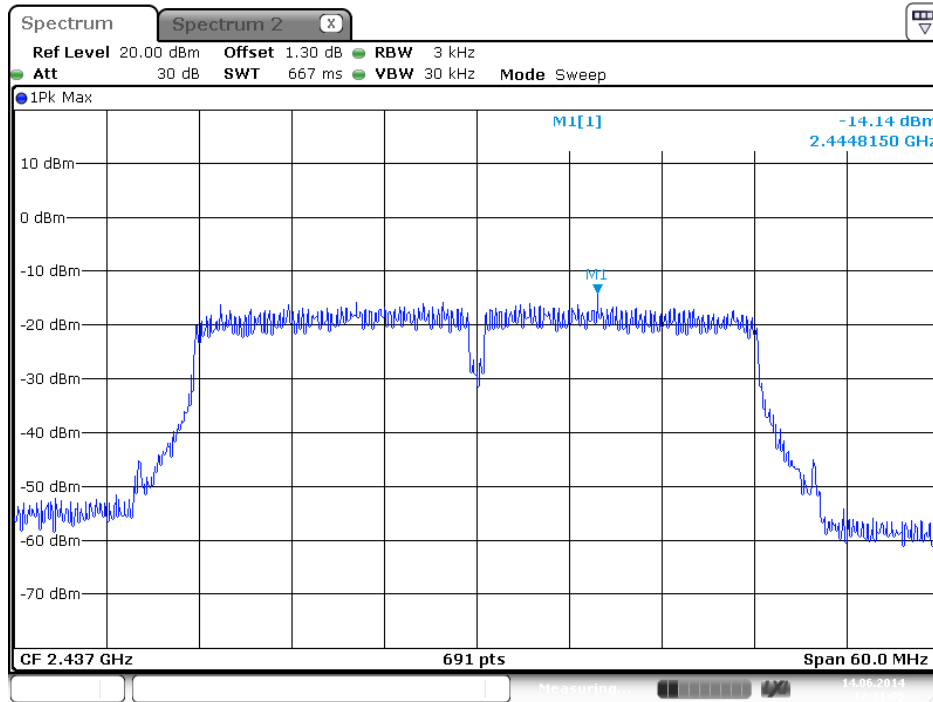


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

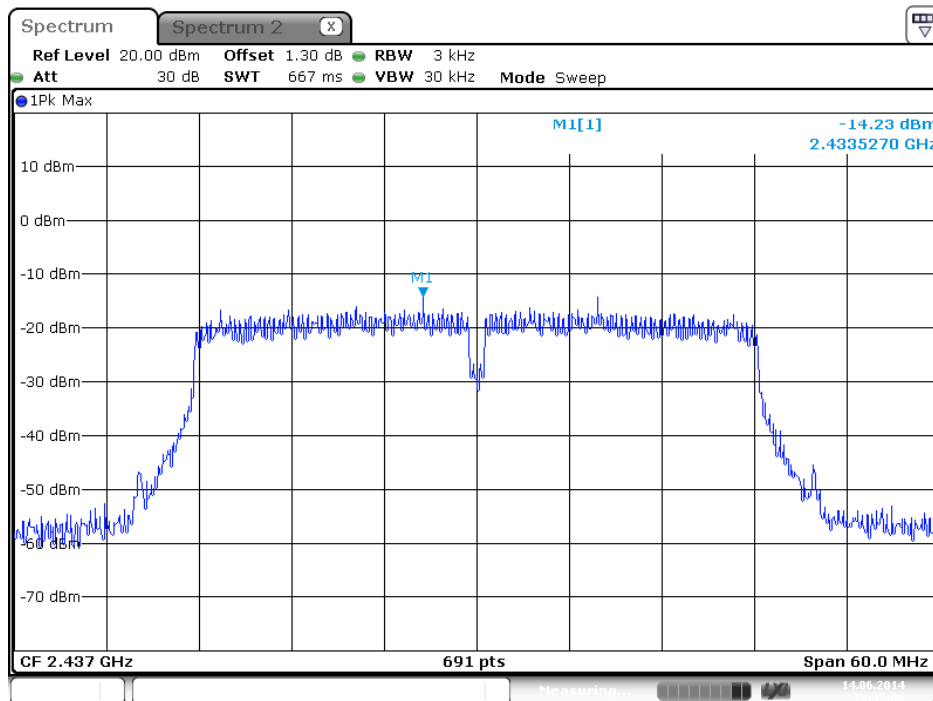


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1

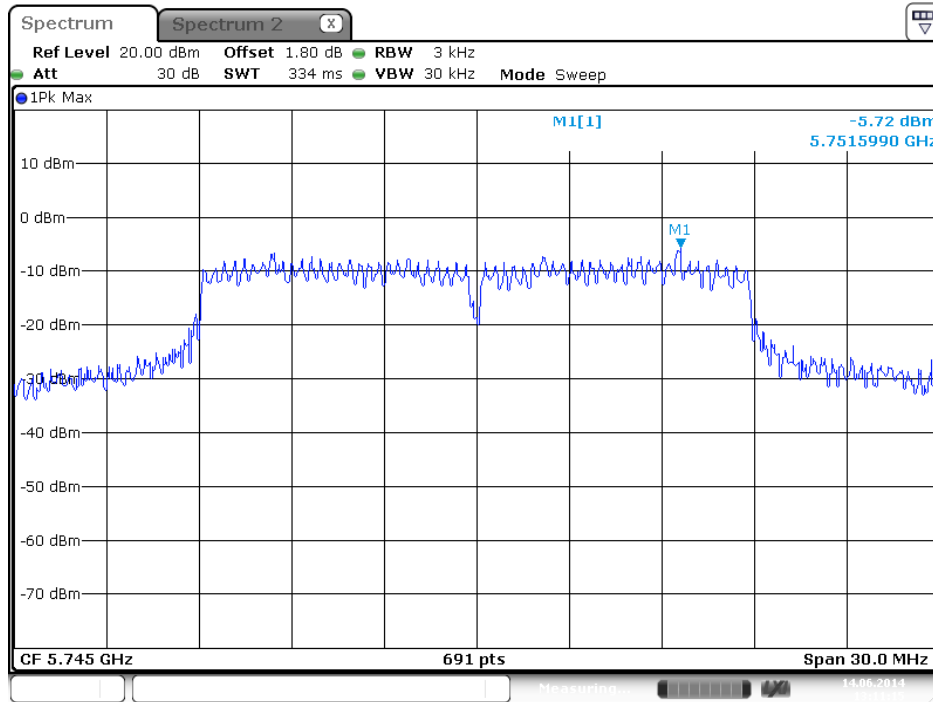


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 2

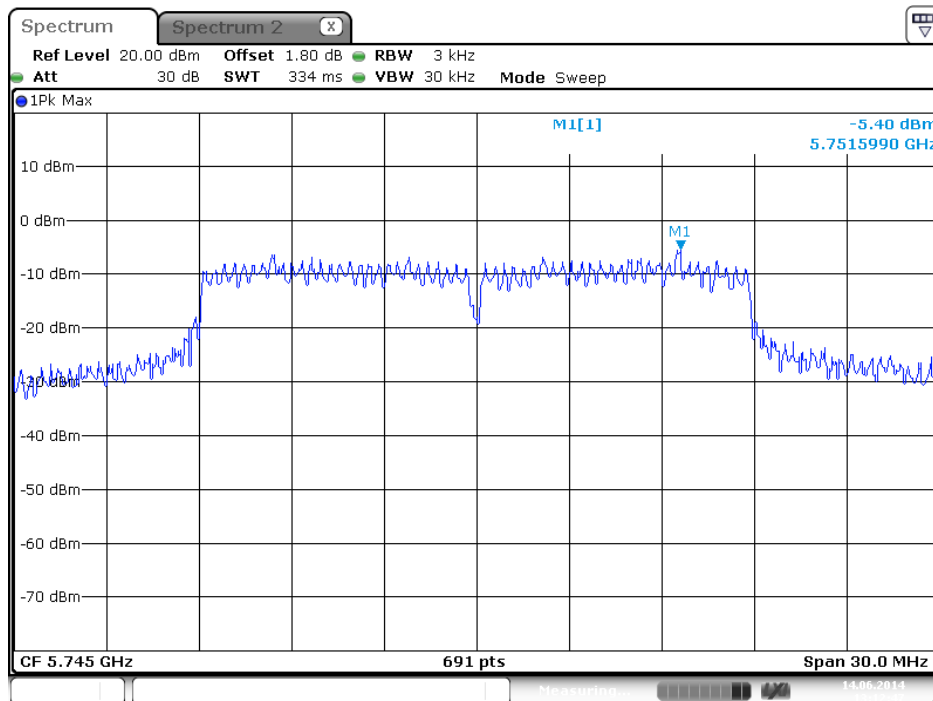


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 1

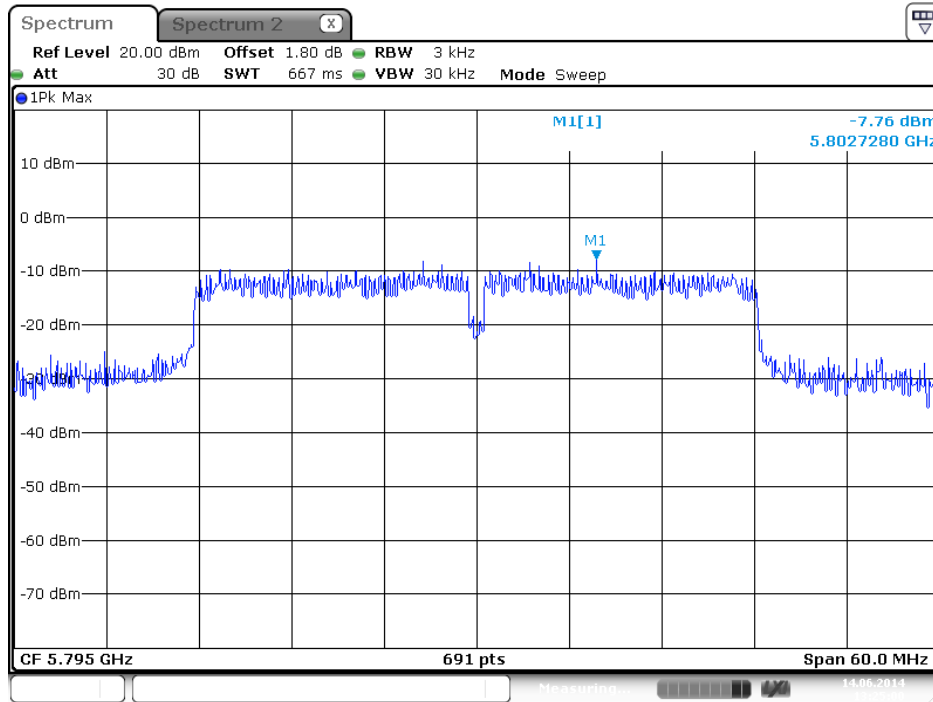


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 2

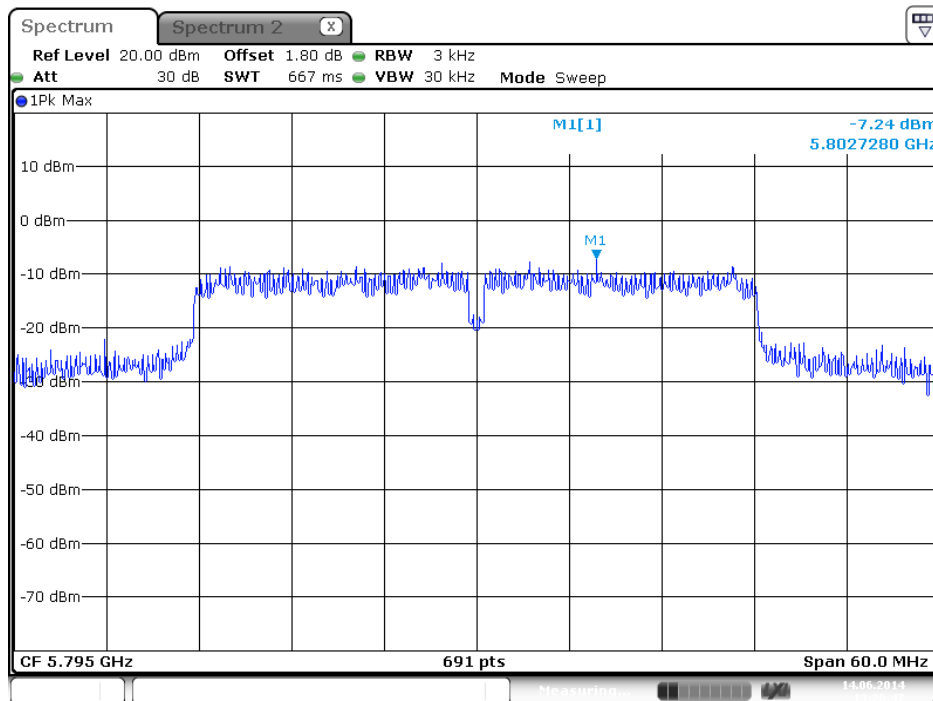


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

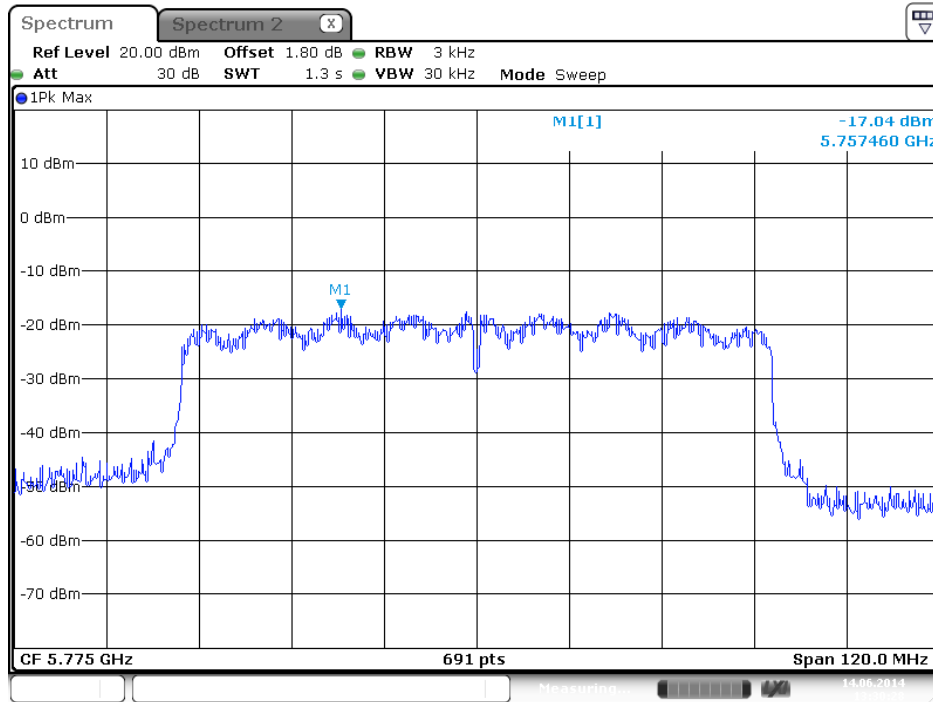


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

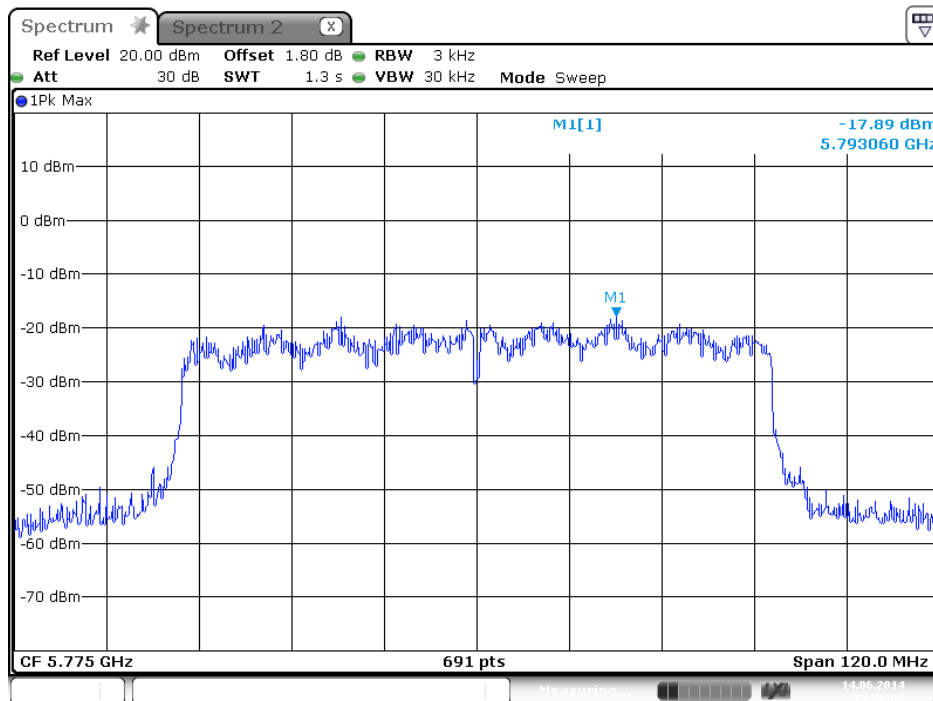


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

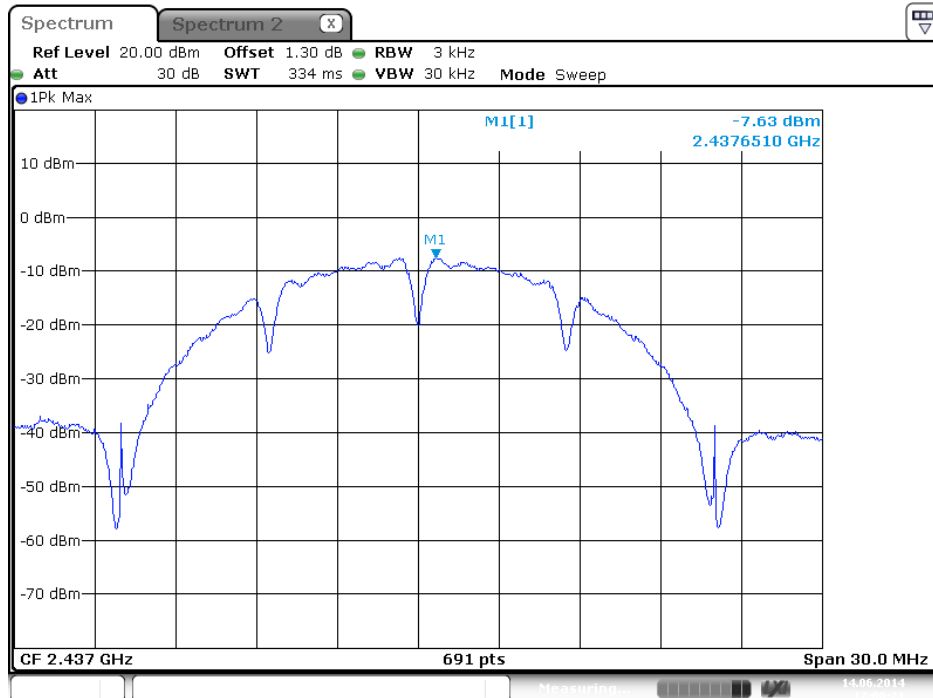


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

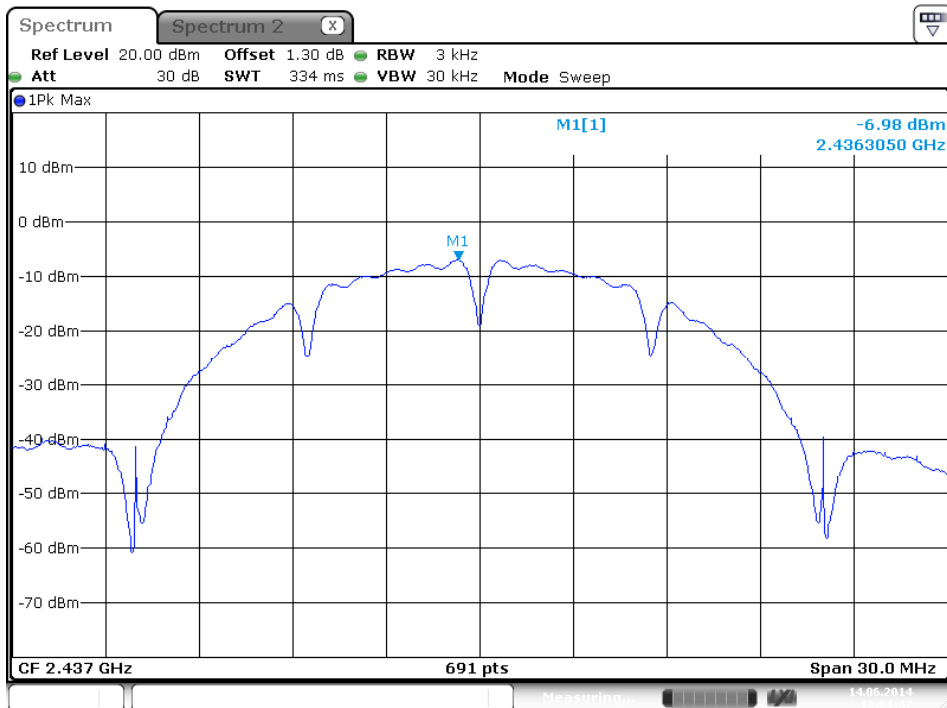


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

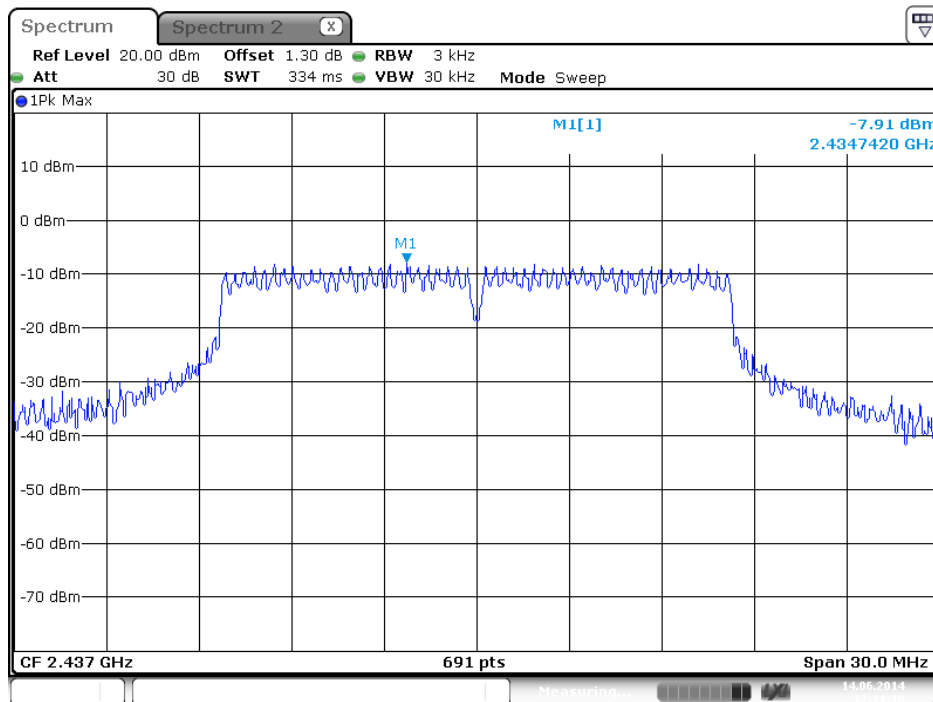


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

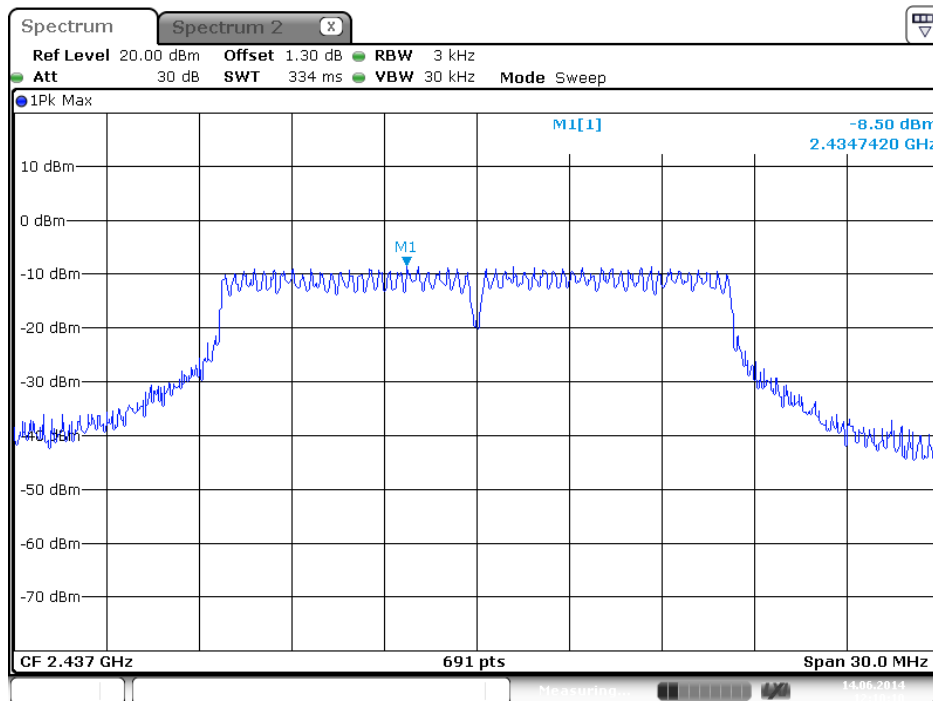

Power Density Plot on Configuration IEEE 802.11 a / 5785 MHz / Chain 1

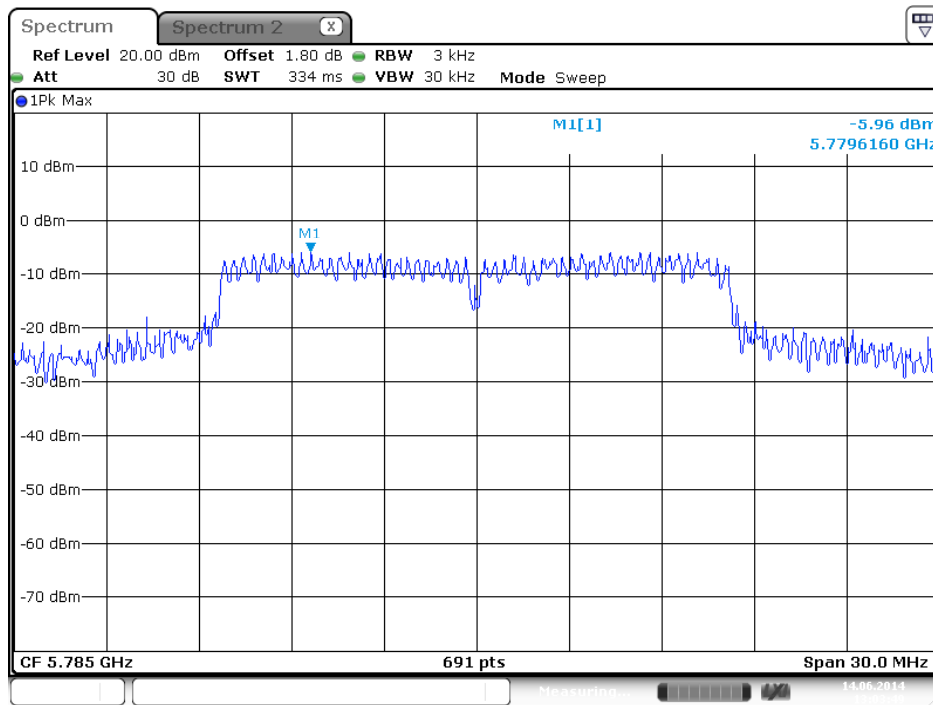

Power Density Plot on Configuration IEEE 802.11 a / 5785 MHz / Chain 2

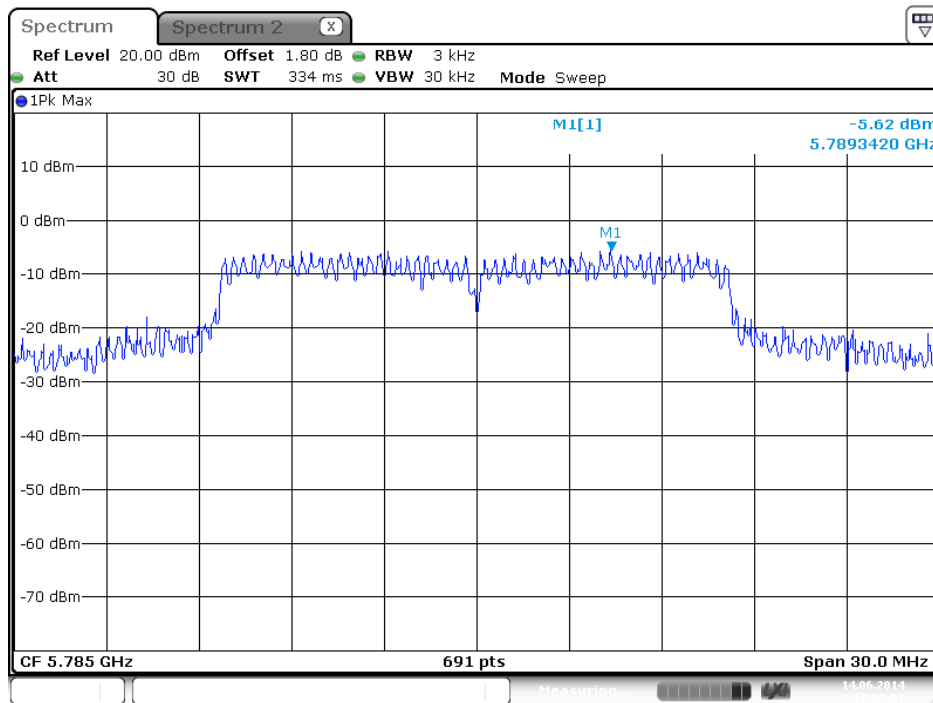

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.84	17.76	500	Complies
6	2437 MHz	17.84	17.84	500	Complies
11	2462 MHz	17.76	17.84	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.32	500	Complies
6	2437 MHz	36.48	36.16	500	Complies
9	2452 MHz	36.48	36.16	500	Complies

For 5GHz Band
Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.76	21.28	500	Complies
157	5785 MHz	17.76	27.92	500	Complies
165	5825 MHz	17.68	23.68	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.48	43.36	500	Complies
159	5795 MHz	36.48	56.48	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	75.52	75.52	500	Complies

Temperature	22°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11 a/b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.00	15.12	500	Complies
6	2437 MHz	10.08	15.60	500	Complies
11	2462 MHz	10.08	15.28	500	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.28	16.32	500	Complies
6	2437 MHz	11.60	16.40	500	Complies
11	2462 MHz	11.12	15.92	500	Complies


Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.40	22.56	500	Complies
157	5785 MHz	16.40	26.64	500	Complies
165	5825 MHz	16.48	24.72	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2

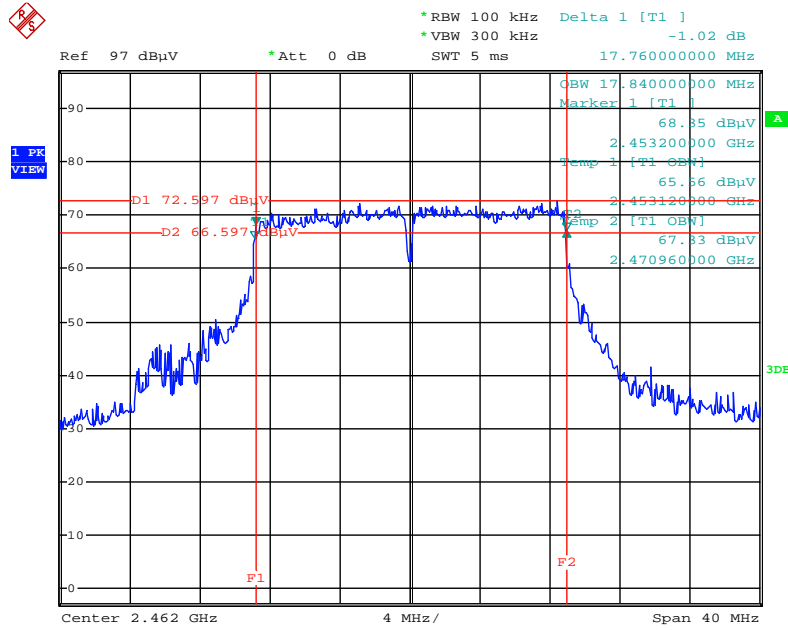


Date: 14.JUN.2014 15:36:19

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2

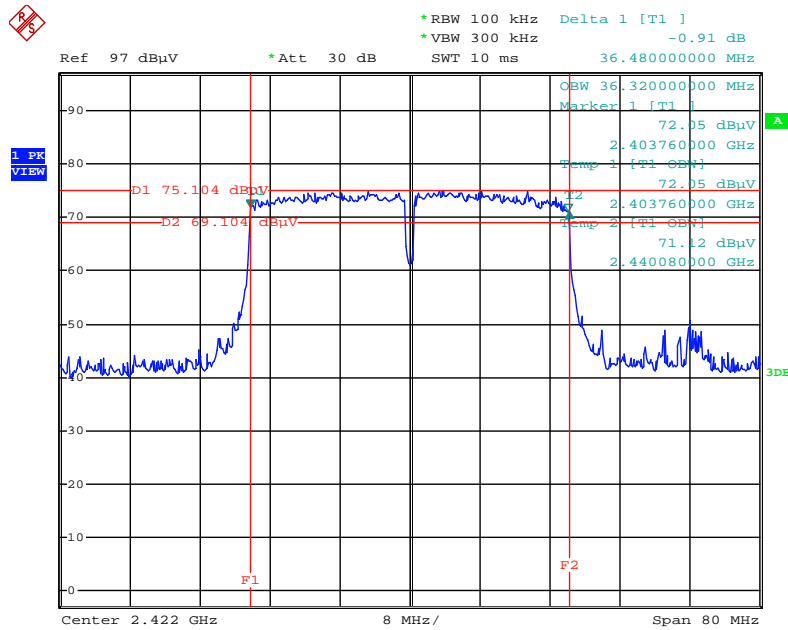


Date: 14.JUN.2014 15:40:48

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 1 + Chain 2

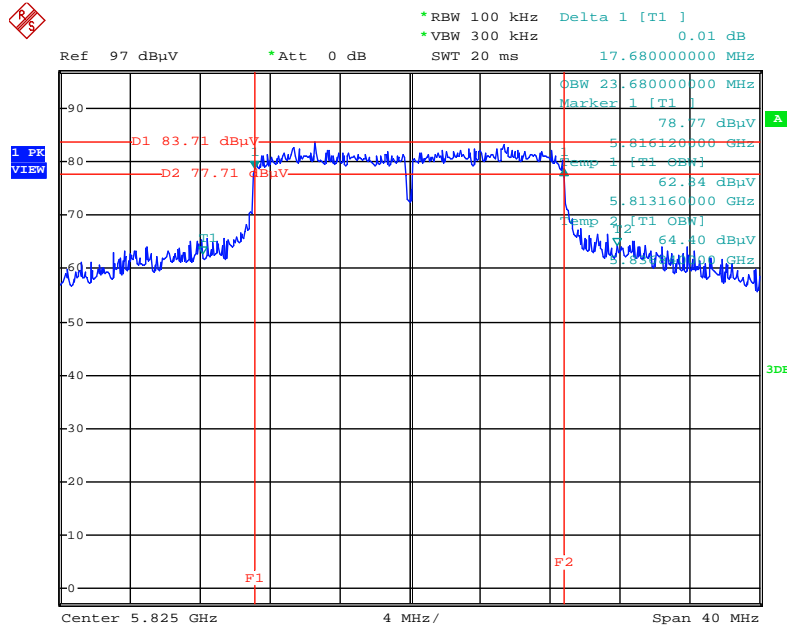


Date: 14.JUN.2014 15:07:38

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755MHz / Chain 1 + Chain 2

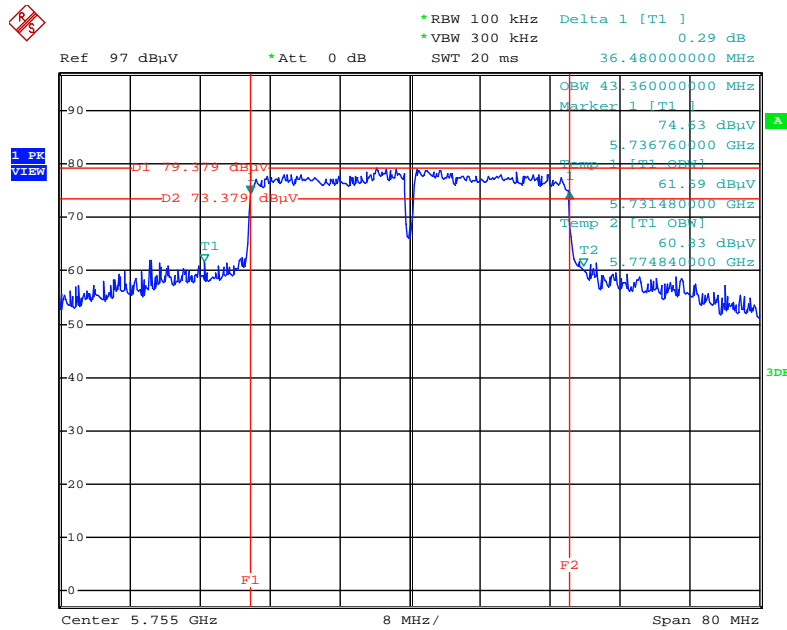


Date: 14.JUN.2014 15:01:44

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2

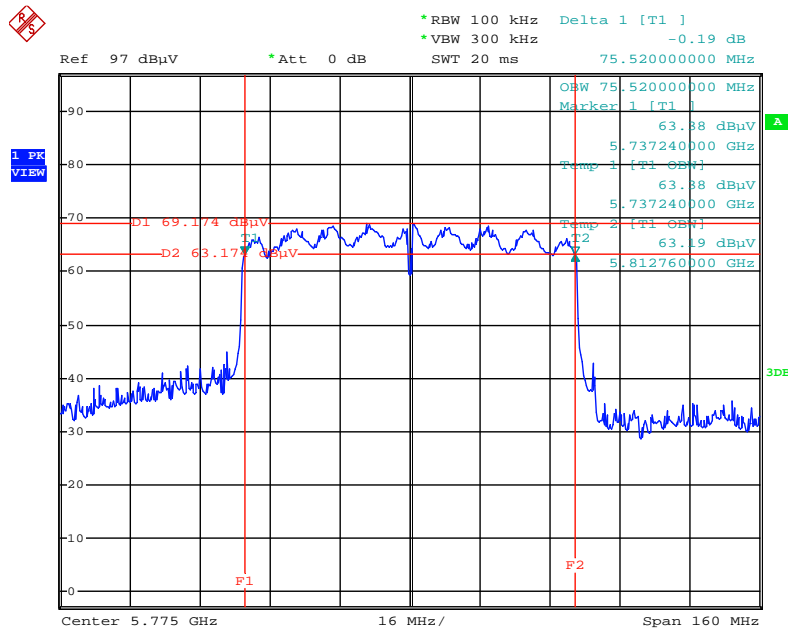


Date: 14.JUN.2014 14:59:58

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2

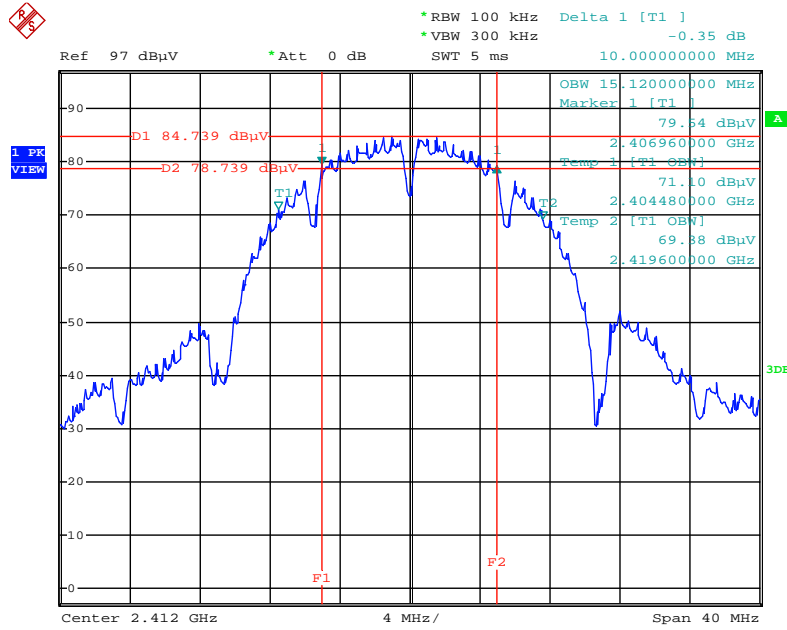


Date: 14.JUN.2014 15:25:18

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2

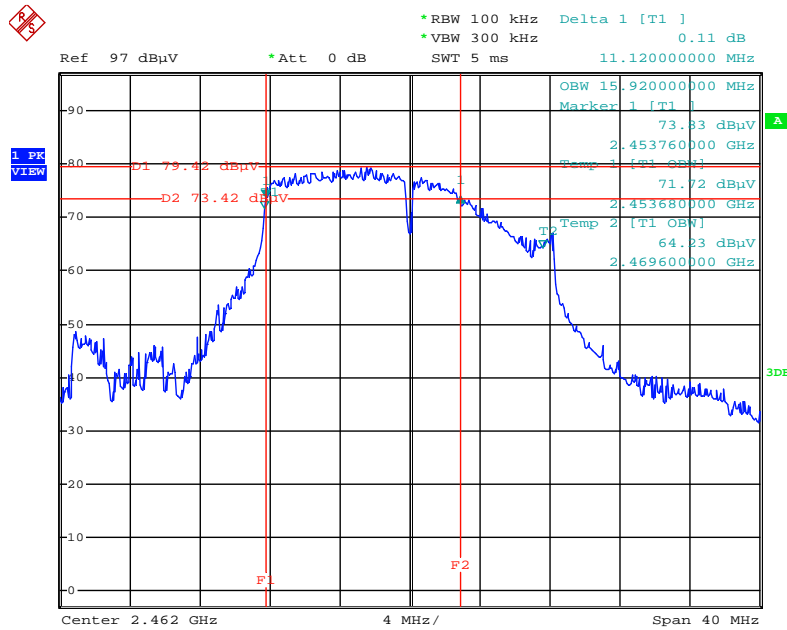

Date: 14.JUN.2014 15:29:07

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 1 + Chain 2

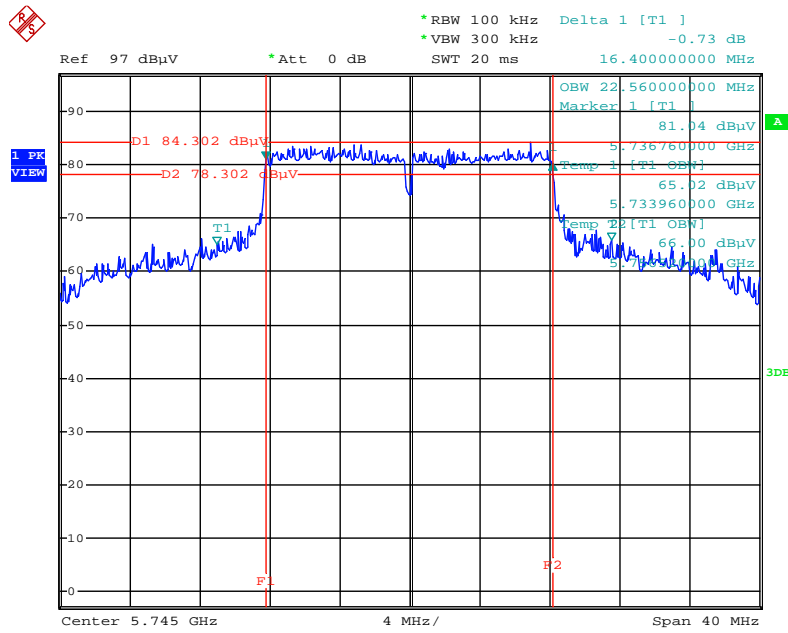

Date: 14.JUN.2014 15:09:52

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

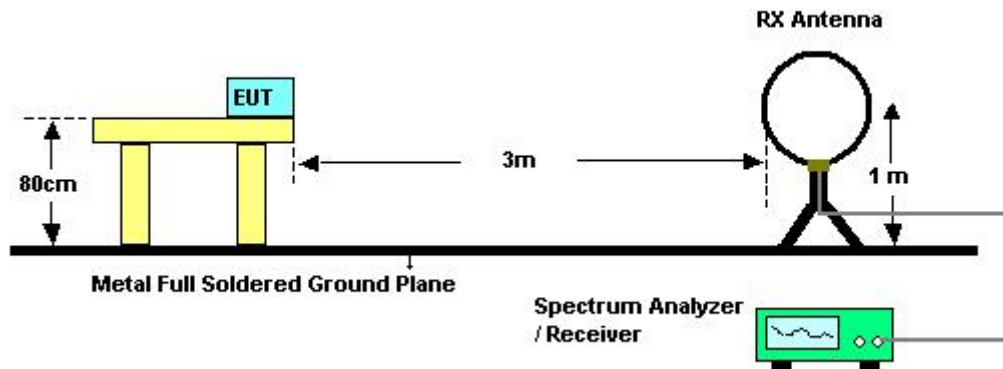

For Radiated Emissions: 30MHz~1GHz

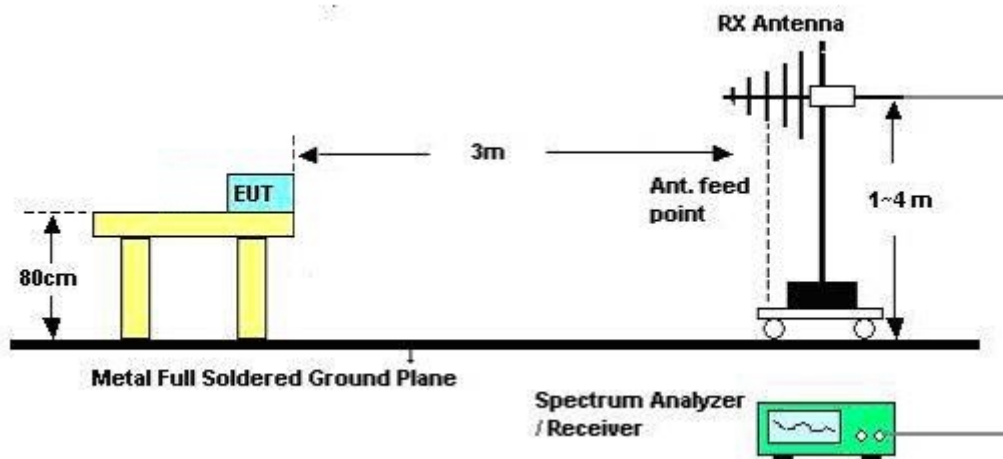

For Radiated Emissions: Above 1GHz

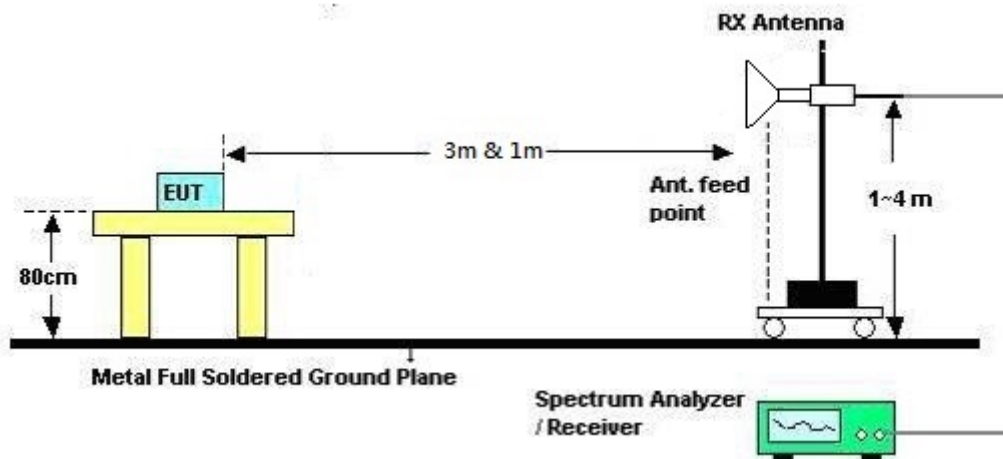

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Normal Link
Test Date	May 16, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Normal Link

Horizontal

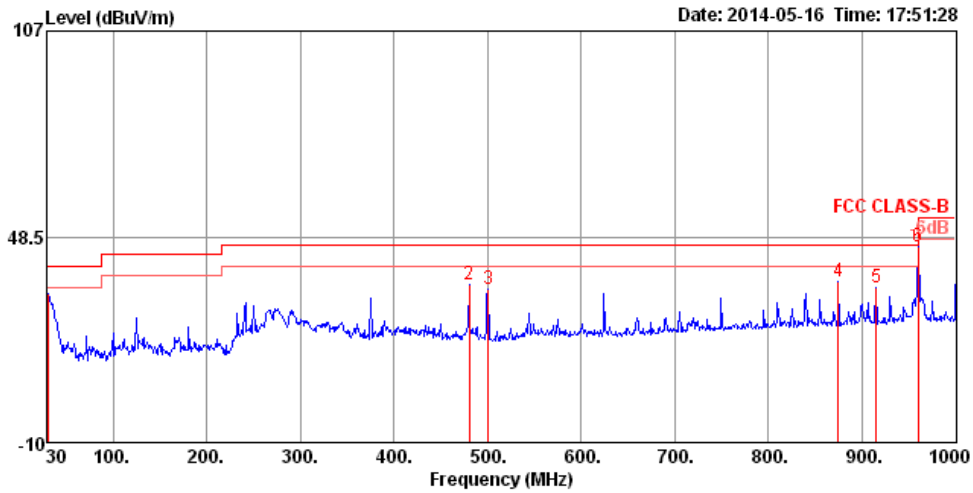

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	32.40	40.00	-7.60	45.59	0.64	17.98	31.81	150	301	HORIZONTAL Peak
2	480.08	34.75	46.00	-11.25	46.42	2.72	16.81	31.20	200	242	HORIZONTAL Peak
3	500.45	33.71	46.00	-12.29	45.38	2.82	16.92	31.41	100	122	HORIZONTAL Peak
4	874.87	35.63	46.00	-10.37	42.65	3.89	20.24	31.15	100	89	HORIZONTAL Peak
5	915.61	34.20	46.00	-11.80	40.71	3.99	20.68	31.18	100	278	HORIZONTAL Peak
6	960.23	45.66	54.00	-8.34	51.60	4.10	21.05	31.09	150	260	HORIZONTAL Peak

Vertical

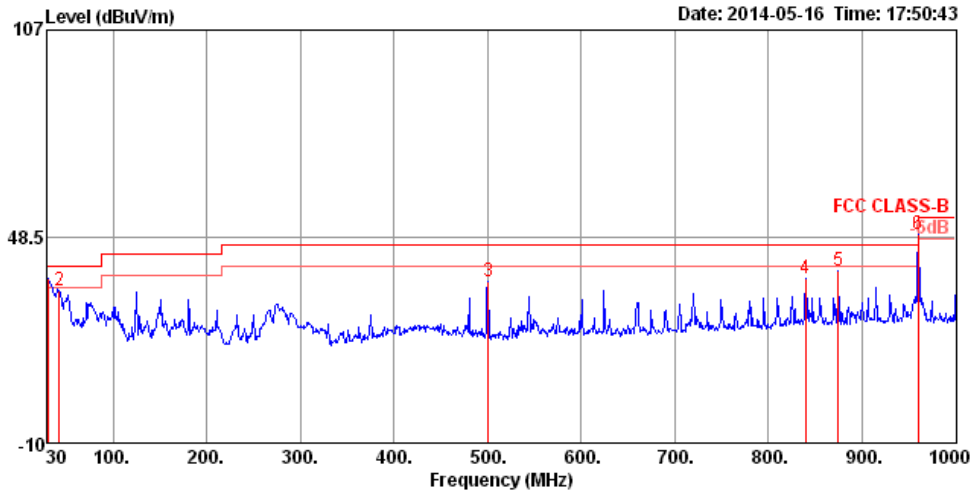

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	36.63	40.00	-3.37	49.82	0.64	17.98	31.81	100	359 VERTICAL	Peak
2	42.61	33.35	40.00	-6.65	53.67	0.77	10.76	31.85	100	162 VERTICAL	Peak
3	500.45	35.92	46.00	-10.08	47.59	2.82	16.92	31.41	100	174 VERTICAL	Peak
4	839.95	36.75	46.00	-9.25	43.95	3.77	20.25	31.22	125	140 VERTICAL	Peak
5	874.87	38.83	46.00	-7.17	45.85	3.89	20.24	31.15	125	103 VERTICAL	Peak
6	960.23	48.96	54.00	-5.04	54.90	4.10	21.05	31.09	125	255 VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4822.16	35.41	54.00	-18.59	32.27	5.68	32.76	35.30	100	117	HORIZONTAL	Average
2	4826.12	45.89	74.00	-28.11	42.73	5.69	32.77	35.30	100	117	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4828.72	36.29	54.00	-17.71	33.13	5.69	32.77	35.30	100	278	VERTICAL	Average
2	4829.00	46.41	74.00	-27.59	43.25	5.69	32.77	35.30	100	278	VERTICAL	Peak

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4870.96	47.95	74.00	-26.05	44.72	5.74	32.80	35.31	100	129 HORIZONTAL	Peak
2	4872.66	35.52	54.00	-18.48	32.28	5.75	32.80	35.31	100	129 HORIZONTAL	Average
3	7304.42	40.54	54.00	-13.46	31.73	7.05	37.12	35.36	100	256 HORIZONTAL	Average
4	7317.64	51.68	74.00	-22.32	42.85	7.06	37.13	35.36	100	256 HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.34	35.49	54.00	-18.51	32.26	5.75	32.80	35.32	100	270 VERTICAL	Average
2	4878.76	47.36	74.00	-26.64	44.13	5.75	32.80	35.32	100	270 VERTICAL	Peak
3	7302.52	52.41	74.00	-21.59	43.60	7.05	37.12	35.36	100	318 VERTICAL	Peak
4	7303.14	40.39	54.00	-13.61	31.58	7.05	37.12	35.36	100	318 VERTICAL	Average

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4917.44	47.33	74.00	-26.67	44.03	5.80	32.83	35.33	101	276	HORIZONTAL	Peak
2	4917.54	35.58	54.00	-18.42	32.28	5.80	32.83	35.33	101	276	HORIZONTAL	Average
3	7381.40	40.17	54.00	-13.83	31.25	7.08	37.16	35.32	100	168	HORIZONTAL	Average
4	7386.54	51.18	74.00	-22.82	42.25	7.09	37.16	35.32	100	168	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4914.44	35.43	54.00	-18.57	32.13	5.80	32.83	35.33	100	201	VERTICAL	Average
2	4930.52	46.20	74.00	-27.80	42.87	5.82	32.84	35.33	100	201	VERTICAL	Peak
3	7385.22	40.22	54.00	-13.78	31.29	7.09	37.16	35.32	100	93	VERTICAL	Average
4	7394.84	51.60	74.00	-22.40	42.66	7.09	37.16	35.31	100	93	VERTICAL	Peak

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4840.76	35.61	54.00	-18.39	32.42	5.71	32.78	35.30	100	215	HORIZONTAL	Average
2	4843.88	46.45	74.00	-27.55	43.26	5.71	32.78	35.30	100	215	HORIZONTAL	Peak
3	7260.44	40.59	54.00	-13.41	31.83	7.04	37.11	35.39	100	160	HORIZONTAL	Average
4	7272.42	51.08	74.00	-22.92	42.31	7.04	37.11	35.38	100	160	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4841.64	46.79	74.00	-27.21	43.60	5.71	32.78	35.30	100	273	VERTICAL	Peak
2	4842.62	35.30	54.00	-18.70	32.11	5.71	32.78	35.30	100	273	VERTICAL	Average
3	7260.68	52.59	74.00	-21.41	43.83	7.04	37.11	35.39	100	205	VERTICAL	Peak
4	7271.10	40.69	54.00	-13.31	31.92	7.04	37.11	35.38	100	205	VERTICAL	Average



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4867.82	35.25	54.00	-18.75	32.02	5.74	32.80	35.31	100	214	HORIZONTAL	Average
2	4877.46	47.54	74.00	-26.46	44.31	5.75	32.80	35.32	100	214	HORIZONTAL	Peak
3	7302.50	40.16	54.00	-13.84	31.35	7.05	37.12	35.36	100	134	HORIZONTAL	Average
4	7320.12	50.94	74.00	-23.06	42.10	7.06	37.13	35.35	100	134	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4865.56	35.46	54.00	-18.54	32.24	5.74	32.79	35.31	100	137	VERTICAL	Average
2	4874.28	47.25	74.00	-26.75	44.01	5.75	32.80	35.31	100	137	VERTICAL	Peak
3	7307.98	51.32	74.00	-22.68	42.51	7.05	37.12	35.36	100	82	VERTICAL	Peak
4	7315.16	40.15	54.00	-13.85	31.33	7.06	37.12	35.36	100	82	VERTICAL	Average

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4896.78	35.39	54.00	-18.61	32.11	5.78	32.82	35.32	100	165	HORIZONTAL Average
2	4902.82	46.56	74.00	-27.44	43.29	5.78	32.82	35.33	100	165	HORIZONTAL Peak
3	7354.02	40.37	54.00	-13.63	31.49	7.07	37.14	35.33	100	94	HORIZONTAL Average
4	7359.76	51.71	74.00	-22.29	42.81	7.08	37.15	35.33	100	94	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4899.90	35.26	54.00	-18.74	31.98	5.78	32.82	35.32	100	313	VERTICAL Average
2	4902.32	46.02	74.00	-27.98	42.74	5.78	32.82	35.32	100	313	VERTICAL Peak
3	7349.32	51.32	74.00	-22.68	42.45	7.07	37.14	35.34	100	169	VERTICAL Peak
4	7349.36	40.34	54.00	-13.66	31.47	7.07	37.14	35.34	100	169	VERTICAL Average



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11488.10	68.48	74.00	-5.52	59.03	5.11	39.39	35.05	Peak	166	248	HORIZONTAL
2	11489.70	53.41	54.00	-0.59	43.96	5.11	39.39	35.05	Average	166	248	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11488.80	63.53	74.00	-10.47	54.08	5.11	39.39	35.05	Peak	100	242	VERTICAL
2	11489.50	50.76	54.00	-3.24	41.31	5.11	39.39	35.05	Average	100	242	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11568.30	65.60	74.00	-8.40	56.09	5.13	39.44	35.06	Peak	100	37	HORIZONTAL
2	11569.50	52.11	54.00	-1.89	42.60	5.13	39.44	35.06	Average	100	37	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11568.10	61.67	74.00	-12.33	52.16	5.13	39.44	35.06	Peak	109	243	VERTICAL
2	11569.50	48.28	54.00	-5.72	38.77	5.13	39.44	35.06	Average	109	243	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.50	51.89	54.00	-2.11	42.33	5.16	39.48	35.08	Average	158	245	HORIZONTAL
2	11652.70	64.89	74.00	-9.11	55.32	5.16	39.49	35.08	Peak	158	245	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.60	48.35	54.00	-5.65	38.79	5.16	39.48	35.08	Average	105	241	VERTICAL
2	11652.60	62.12	74.00	-11.88	52.55	5.16	39.49	35.08	Peak	105	241	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11509.60	49.01	54.00	-4.99	39.54	5.12	39.40	35.05	Average	100	314	HORIZONTAL
2	11510.10	60.14	74.00	-13.86	50.67	5.12	39.40	35.05	Peak	100	314	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11509.90	45.02	54.00	-8.98	35.55	5.12	39.40	35.05	Average	105	239	VERTICAL
2	11510.50	56.69	74.00	-17.31	47.22	5.12	39.40	35.05	Peak	105	239	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11589.70	49.74	54.00	-4.26	40.21	5.14	39.45	35.06	Average	100	35	HORIZONTAL
2	11595.40	59.31	74.00	-14.69	49.78	5.15	39.45	35.07	Peak	100	35	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11589.70	47.29	54.00	-6.71	37.76	5.14	39.45	35.06	Average	100	243	VERTICAL
2	11591.10	58.99	74.00	-15.01	49.46	5.14	39.45	35.06	Peak	100	243	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11549.94	43.40	54.00	-10.60	33.90	5.13	39.43	35.06	Average	131	110 HORIZONTAL
2	11549.98	54.16	74.00	-19.84	44.66	5.13	39.43	35.06	Peak	131	110 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11549.90	37.45	54.00	-16.55	27.95	5.13	39.43	35.06	Average	114	71 VERTICAL
2	11550.11	50.43	74.00	-23.57	40.93	5.13	39.43	35.06	Peak	114	71 VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2
Test Date	Mar. 29, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	4823.98	50.98	54.00	-3.02	49.03	3.31	33.56	34.92	Average	131	25	HORIZONTAL
2	4823.99	52.96	74.00	-21.04	51.01	3.31	33.56	34.92	Peak	131	25	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	4823.98	49.11	54.00	-4.89	47.16	3.31	33.56	34.92	Average	111	139	VERTICAL
2	4824.06	51.37	74.00	-22.63	49.42	3.31	33.56	34.92	Peak	111	139	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2
Test Date	Mar. 29, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.97	50.48	54.00	-3.52	48.41	3.33	33.66	34.92	Average	117	48	HORIZONTAL
2	4874.06	52.98	74.00	-21.02	50.91	3.33	33.66	34.92	Peak	117	48	HORIZONTAL
3	7311.67	53.08	54.00	-0.92	47.57	4.06	36.64	35.19	Average	142	318	HORIZONTAL
4	7311.88	58.43	74.00	-15.57	52.92	4.06	36.64	35.19	Peak	142	318	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.91	52.95	74.00	-21.05	50.88	3.33	33.66	34.92	Peak	126	47	VERTICAL
2	4873.96	50.54	54.00	-3.46	48.47	3.33	33.66	34.92	Average	126	47	VERTICAL
3	7311.68	45.57	54.00	-8.43	40.06	4.06	36.64	35.19	Average	100	106	VERTICAL
4	7311.92	52.49	74.00	-21.51	46.98	4.06	36.64	35.19	Peak	100	106	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2
Test Date	Apr. 01, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.85	50.32	74.00	-23.68	45.97	5.97	33.58	35.20	Peak	100	138	HORIZONTAL
2	4923.97	46.15	54.00	-7.85	41.80	5.97	33.58	35.20	Average	100	138	HORIZONTAL
3	7385.21	52.80	54.00	-1.20	44.48	7.17	36.61	35.46	Average	139	260	HORIZONTAL
4	7386.99	57.44	74.00	-16.56	49.12	7.17	36.61	35.46	Peak	139	260	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.95	45.57	54.00	-8.43	41.22	5.97	33.58	35.20	Average	100	140	VERTICAL
2	4924.01	50.20	74.00	-23.80	45.85	5.97	33.58	35.20	Peak	100	140	VERTICAL
3	7384.68	43.12	54.00	-10.88	34.80	7.17	36.61	35.46	Average	124	72	VERTICAL
4	7386.77	53.15	74.00	-20.85	44.83	7.17	36.61	35.46	Peak	124	72	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4821.42	47.01	74.00	-26.99	43.87	5.68	32.76	35.30	100	134	HORIZONTAL Peak
2	4824.44	36.13	54.00	-17.87	32.98	5.69	32.76	35.30	100	134	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4824.14	35.76	54.00	-18.24	32.61	5.69	32.76	35.30	100	287	VERTICAL Average
2	4827.77	46.97	74.00	-27.03	43.81	5.69	32.77	35.30	100	287	VERTICAL Peak



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.58	36.16	54.00	-17.84	32.93	5.74	32.80	35.31	100	49 HORIZONTAL	Average
2	4880.76	47.29	74.00	-26.71	44.05	5.76	32.80	35.32	100	49 HORIZONTAL	Peak
3	7304.92	51.75	74.00	-22.25	42.94	7.05	37.12	35.36	100	225 HORIZONTAL	Peak
4	7308.56	40.55	54.00	-13.45	31.73	7.06	37.12	35.36	100	225 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.32	35.78	54.00	-18.22	32.54	5.75	32.80	35.31	100	323 VERTICAL	Average
2	4880.38	47.01	74.00	-26.99	43.77	5.76	32.80	35.32	100	323 VERTICAL	Peak
3	7303.48	40.51	54.00	-13.49	31.70	7.05	37.12	35.36	100	196 VERTICAL	Average
4	7320.34	51.67	74.00	-22.33	42.83	7.06	37.13	35.35	100	196 VERTICAL	Peak

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4916.72	47.74	74.00	-26.26	44.44	5.80	32.83	35.33	100	272	HORIZONTAL	Peak
2	4919.02	35.67	54.00	-18.33	32.37	5.80	32.83	35.33	100	272	HORIZONTAL	Average
3	7376.56	40.19	54.00	-13.81	31.28	7.08	37.15	35.32	100	144	HORIZONTAL	Average
4	7388.48	52.08	74.00	-21.92	43.14	7.09	37.16	35.31	100	144	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4916.52	35.58	54.00	-18.42	32.28	5.80	32.83	35.33	100	314	VERTICAL	Average
2	4919.60	47.13	74.00	-26.87	43.83	5.80	32.83	35.33	100	314	VERTICAL	Peak
3	7378.56	40.35	54.00	-13.65	31.44	7.08	37.15	35.32	100	226	VERTICAL	Average
4	7389.32	51.66	74.00	-22.34	42.72	7.09	37.16	35.31	100	226	VERTICAL	Peak



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11489.90	53.47	54.00	-0.53	44.02	5.11	39.39	35.05	Average	100	317	HORIZONTAL
2	11492.00	66.89	74.00	-7.11	57.44	5.11	39.39	35.05	Peak	100	317	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11492.00	63.26	74.00	-10.74	53.81	5.11	39.39	35.05	Peak	100	242	VERTICAL
2	11492.20	51.38	54.00	-2.62	41.93	5.11	39.39	35.05	Average	100	242	VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11569.80	52.63	54.00	-1.37	43.11	5.14	39.44	35.06	Average	100	37 HORIZONTAL
2	11571.70	63.23	74.00	-10.77	53.71	5.14	39.44	35.06	Peak	100	37 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11566.20	60.78	74.00	-13.22	51.27	5.13	39.44	35.06	Peak	100	242 VERTICAL
2	11569.90	48.78	54.00	-5.22	39.26	5.14	39.44	35.06	Average	100	242 VERTICAL



Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11650.00	51.08	54.00	-2.92	41.52	5.16	39.48	35.08	Average	121	104	HORIZONTAL
2	11651.90	63.20	74.00	-10.80	53.63	5.16	39.49	35.08	Peak	121	104	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11649.90	50.16	54.00	-3.84	40.60	5.16	39.48	35.08	Average	176	89	VERTICAL
2	11652.10	62.31	74.00	-11.69	52.74	5.16	39.49	35.08	Peak	176	89	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2
Test date	Mar. 29, 2014 ~ Apr. 01, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.44	54.00	-0.56	22.73	2.22	28.49	0.00	Average	100	122	HORIZONTAL
2	2390.00	69.56	74.00	-4.44	38.85	2.22	28.49	0.00	Peak	100	122	HORIZONTAL
3	2408.80	112.00			81.25	2.22	28.53	0.00	Peak	100	122	HORIZONTAL
4	2410.40	102.09			71.34	2.22	28.53	0.00	Average	100	122	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	70.95	74.00	-3.05	40.25	2.21	28.49	0.00	Peak	179	176	HORIZONTAL
2	2389.40	50.52	54.00	-3.48	19.82	2.21	28.49	0.00	Average	179	176	HORIZONTAL
3	2434.20	103.98			73.19	2.23	28.56	0.00	Average	179	176	HORIZONTAL
4	2436.20	113.85			83.06	2.23	28.56	0.00	Peak	179	176	HORIZONTAL
5	2483.50	50.62	54.00	-3.38	19.69	2.26	28.67	0.00	Average	179	176	HORIZONTAL
6	2485.50	70.72	74.00	-3.28	39.79	2.26	28.67	0.00	Peak	179	176	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2469.00	100.67			68.27	4.14	28.26	0.00	Average	181	314	HORIZONTAL
2	2469.20	110.68			78.28	4.14	28.26	0.00	Peak	181	314	HORIZONTAL
3	2483.50	53.45	54.00	-0.55	21.03	4.16	28.26	0.00	Average	181	314	HORIZONTAL
4	2485.90	66.60	74.00	-7.40	34.14	4.16	28.30	0.00	Peak	181	314	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2
Test date	Mar. 28, 2014 ~ Apr. 01, 2014		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2388.80	65.88	74.00	-8.12	33.74	4.09	28.05	0.00 Peak	161	246	HORIZONTAL
2	2390.00	53.90	54.00	-0.10	21.76	4.09	28.05	0.00 Average	161	246	HORIZONTAL
3	2427.20	95.68			63.43	4.12	28.13	0.00 Average	161	246	HORIZONTAL
4	2428.80	105.78			73.53	4.12	28.13	0.00 Peak	161	246	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2388.80	67.91	74.00	-6.09	37.21	2.21	28.49	0.00 Peak	124	117	HORIZONTAL
2	2390.00	53.60	54.00	-0.40	22.89	2.22	28.49	0.00 Average	124	117	HORIZONTAL
3	2435.00	99.93			69.14	2.23	28.56	0.00 Average	124	117	HORIZONTAL
4	2435.00	109.65			78.86	2.23	28.56	0.00 Peak	124	117	HORIZONTAL
5	2483.50	51.19	54.00	-2.81	20.26	2.26	28.67	0.00 Average	124	117	HORIZONTAL
6	2484.30	63.89	74.00	-10.11	32.96	2.26	28.67	0.00 Peak	124	117	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2458.80	95.90			65.03	2.24	28.63	0.00 Average	148	172	HORIZONTAL
2	2462.40	106.00			75.13	2.24	28.63	0.00 Peak	148	172	HORIZONTAL
3	2483.50	53.79	54.00	-0.21	22.86	2.26	28.67	0.00 Average	148	172	HORIZONTAL
4	2487.50	66.03	74.00	-7.97	35.07	2.26	28.70	0.00 Peak	148	172	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Apr. 28, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2385.20	53.79	54.00	-0.21	22.21	3.68	27.90	0.00	158	320	HORIZONTAL	Average
2	2385.20	61.74	74.00	-12.26	30.16	3.68	27.90	0.00	158	320	HORIZONTAL	Peak
3	2411.20	104.03			72.44	3.69	27.90	0.00	158	320	HORIZONTAL	Average
4	2411.20	106.64			75.05	3.69	27.90	0.00	158	320	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2359.20	44.21	54.00	-9.79	12.65	3.66	27.90	0.00	187	150	HORIZONTAL	Average
2	2360.00	58.87	74.00	-15.13	27.31	3.66	27.90	0.00	187	150	HORIZONTAL	Peak
3	2436.20	113.07			81.46	3.71	27.90	0.00	187	150	HORIZONTAL	Average
4	2436.20	115.39			83.78	3.71	27.90	0.00	187	150	HORIZONTAL	Peak
5	2484.50	57.75	74.00	-16.25	26.12	3.73	27.90	0.00	187	150	HORIZONTAL	Peak
6	2485.10	43.71	54.00	-10.29	12.08	3.73	27.90	0.00	187	150	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2461.20	112.49			80.87	3.72	27.90	0.00	152	325	HORIZONTAL	Average
2	2461.70	114.47			82.85	3.72	27.90	0.00	152	325	HORIZONTAL	Peak
3	2487.60	61.24	74.00	-12.76	29.61	3.73	27.90	0.00	152	325	HORIZONTAL	Peak
4	2488.30	53.52	54.00	-0.48	21.89	3.73	27.90	0.00	152	325	HORIZONTAL	Average

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Mar. 29, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.00	67.47	74.00	-6.53	36.77	2.21	28.49	0.00	Peak	149	122	HORIZONTAL
2	2390.00	53.63	54.00	-0.37	22.92	2.22	28.49	0.00	Average	149	122	HORIZONTAL
3	2406.60	113.88			83.13	2.22	28.53	0.00	Peak	149	122	HORIZONTAL
4	2407.00	104.38			73.63	2.22	28.53	0.00	Average	149	122	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	51.34	54.00	-2.66	20.63	2.22	28.49	0.00	Average	150	121	HORIZONTAL
2	2390.00	68.21	74.00	-5.79	37.50	2.22	28.49	0.00	Peak	150	121	HORIZONTAL
3	2431.80	109.13			78.34	2.23	28.56	0.00	Average	150	121	HORIZONTAL
4	2431.80	118.62			87.83	2.23	28.56	0.00	Peak	150	121	HORIZONTAL
5	2483.50	48.29	54.00	-5.71	17.36	2.26	28.67	0.00	Average	150	121	HORIZONTAL
6	2489.10	61.87	74.00	-12.13	30.91	2.26	28.70	0.00	Peak	150	121	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2468.20	112.95			82.06	2.26	28.63	0.00	Peak	144	232	HORIZONTAL
2	2469.20	103.47			72.58	2.26	28.63	0.00	Average	144	232	HORIZONTAL
3	2483.50	53.55	54.00	-0.45	22.62	2.26	28.67	0.00	Average	144	232	HORIZONTAL
4	2486.30	69.29	74.00	-4.71	38.36	2.26	28.67	0.00	Peak	144	232	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

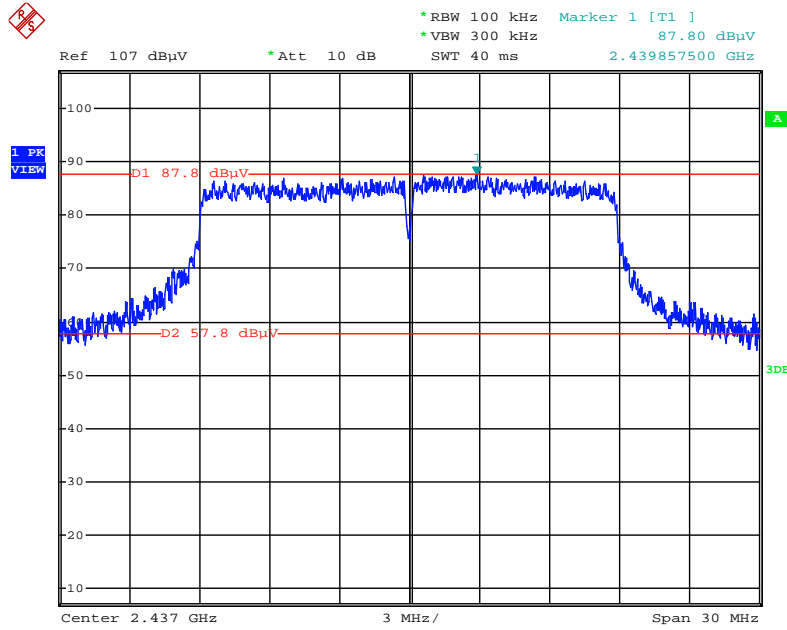


Date: 29.APR.2014 07:55:06

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

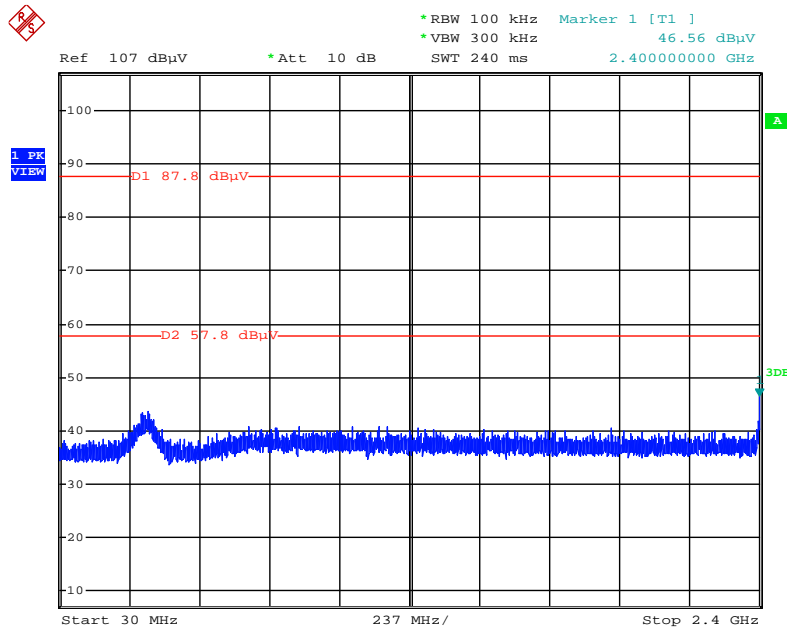


Date: 29.APR.2014 07:56:27

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

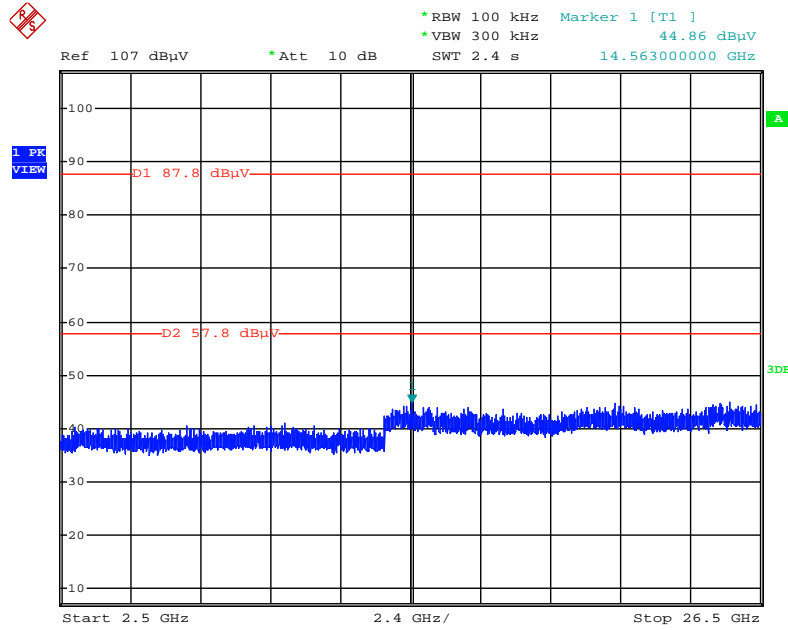


Date: 29.APR.2014 07:57:19

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

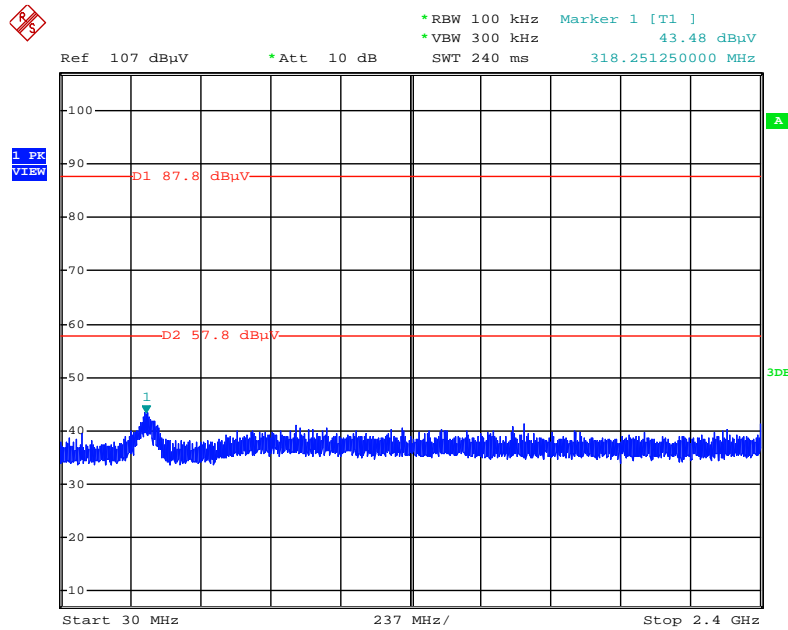


Date: 29.APR.2014 08:02:09

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

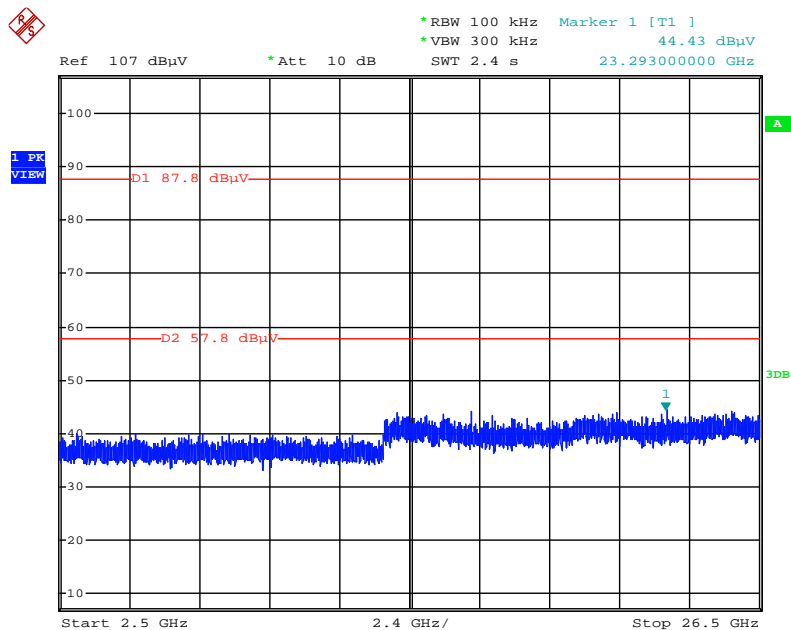


Date: 29.APR.2014 08:02:30

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

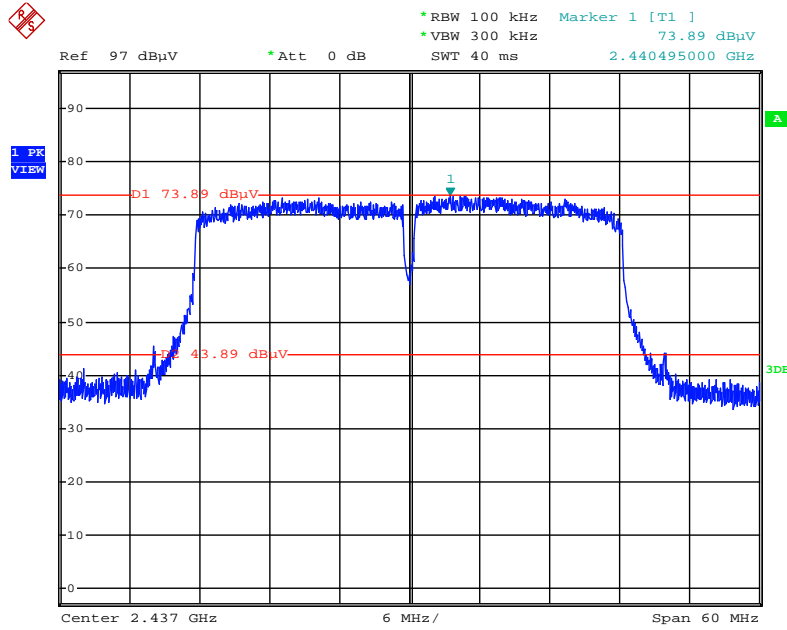


Date: 29.APR.2014 08:03:45

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

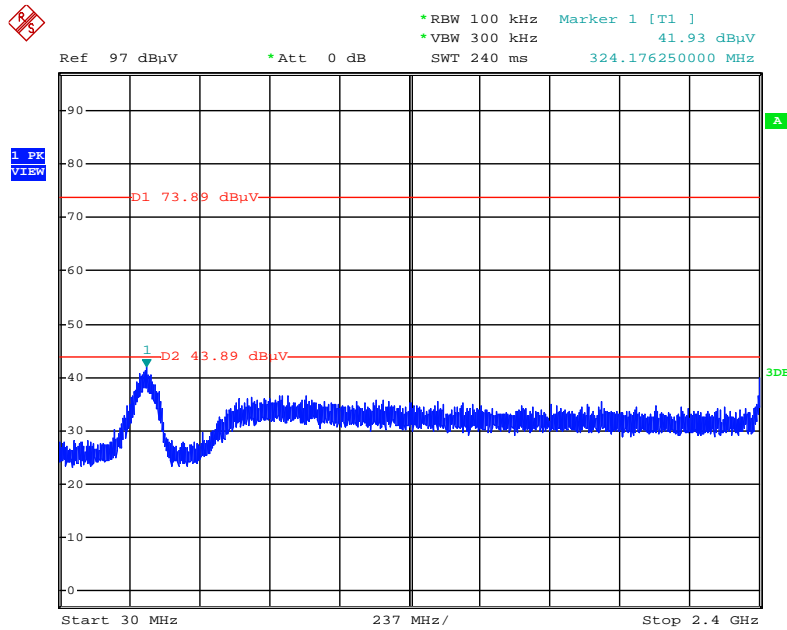


Date: 29.APR.2014 08:05:21

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

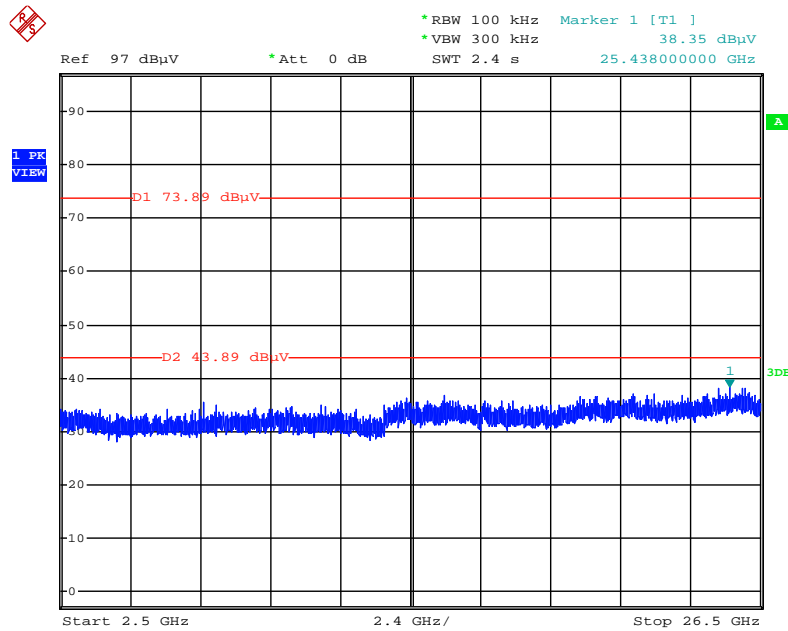


Date: 29.APR.2014 08:05:56

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

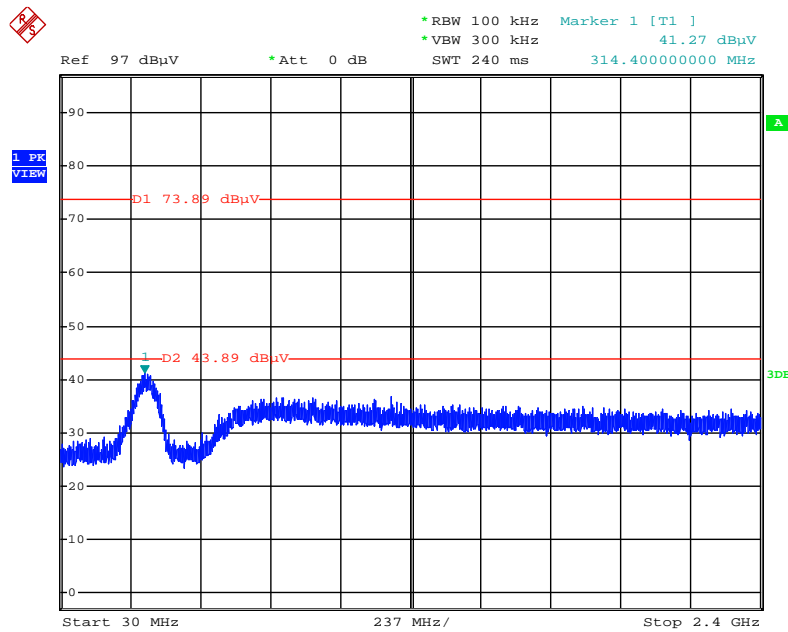


Date: 29.APR.2014 08:07:06

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

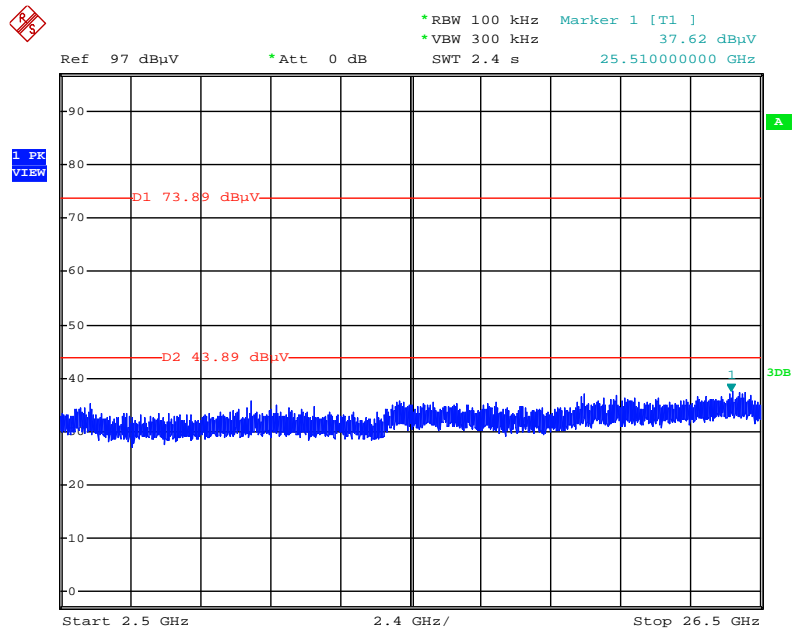


Date: 29.APR.2014 08:07:32

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

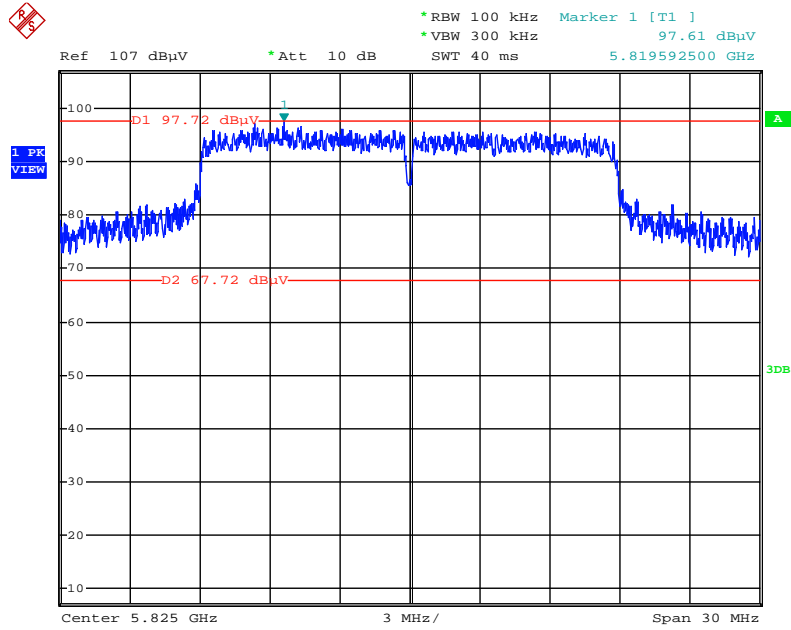


Date: 4.APR.2014 19:11:14

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

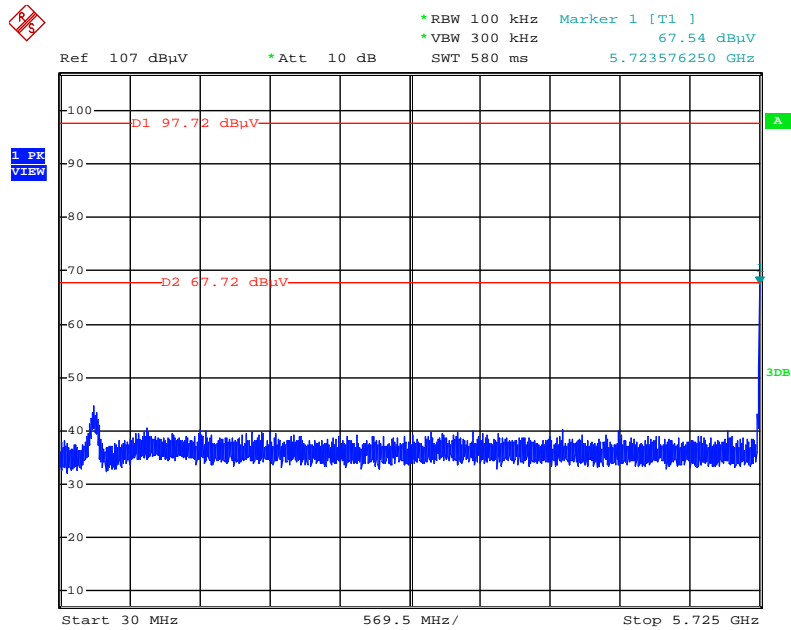


Date: 4.APR.2014 19:15:33

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

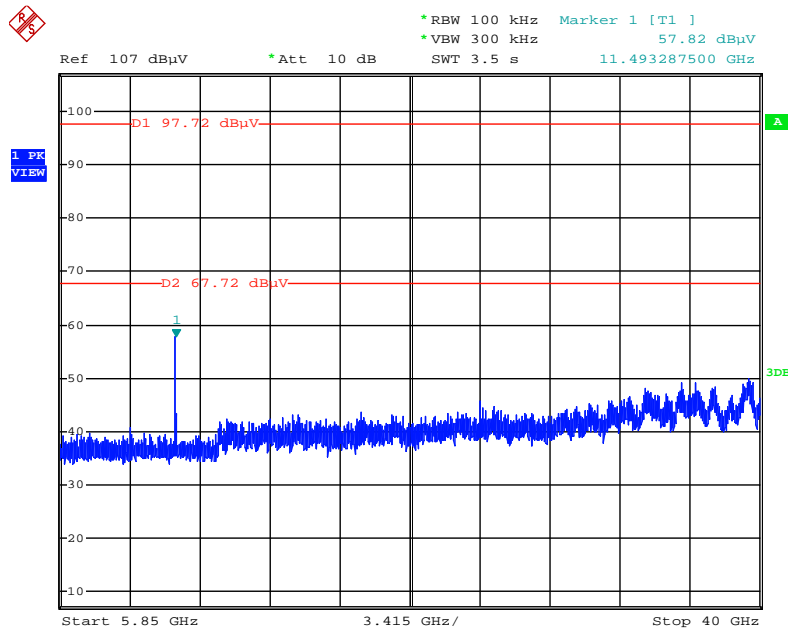


Date: 4.APR.2014 19:18:16

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

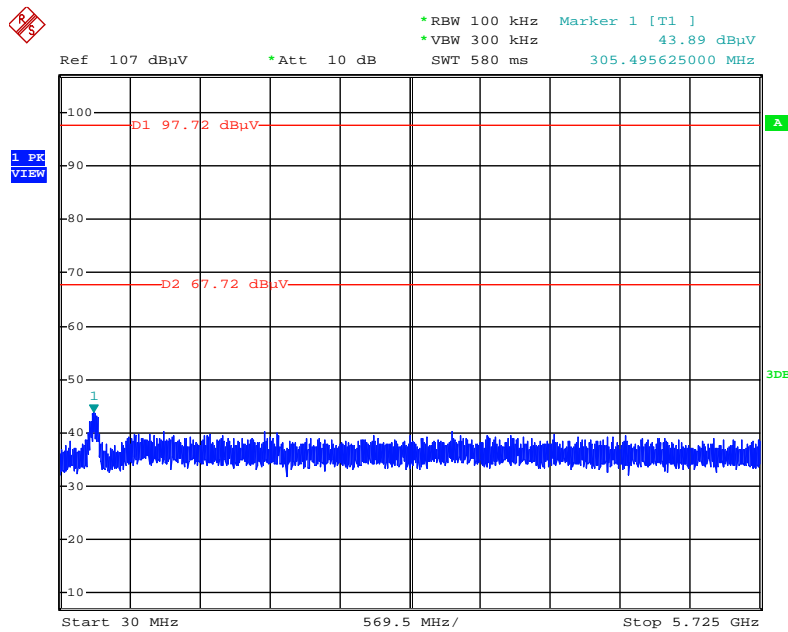


Date: 4.APR.2014 19:11:45

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

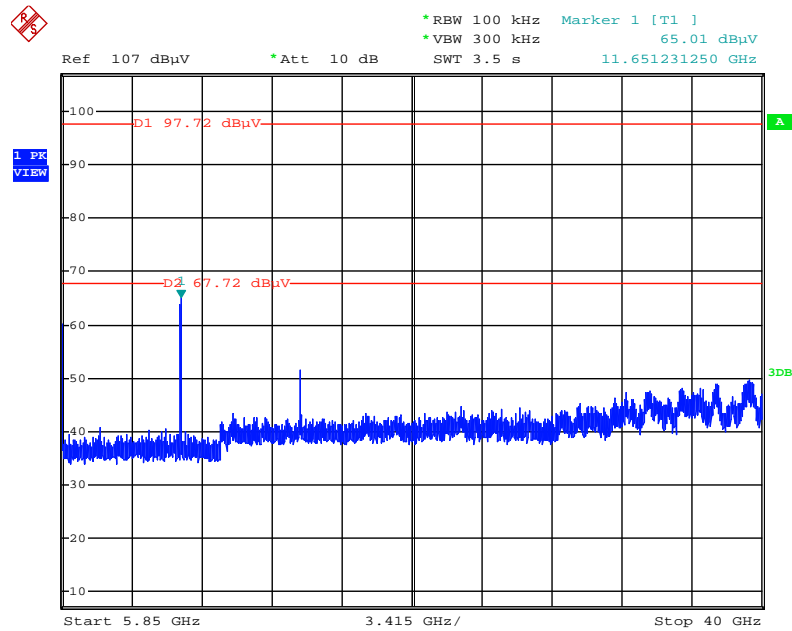


Date: 4.APR.2014 19:12:29

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

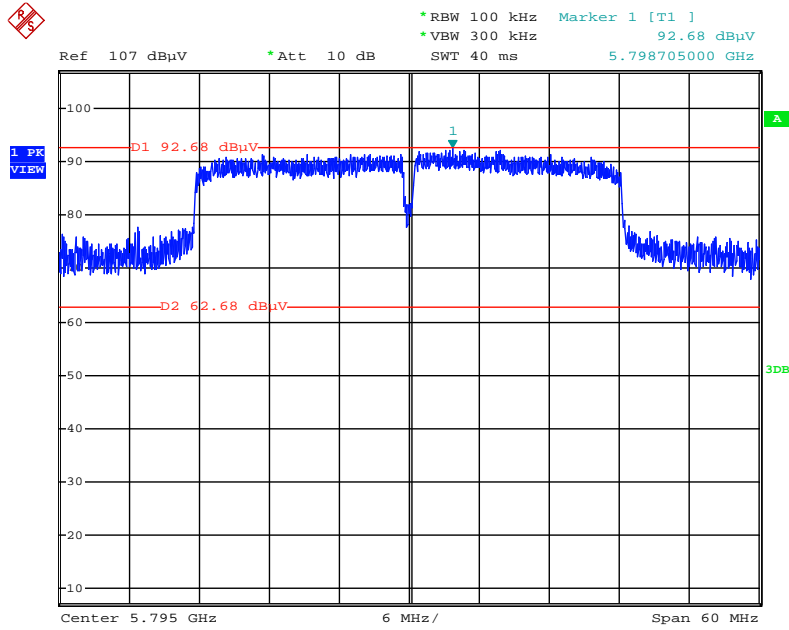


Date: 4.APR.2014 18:41:59

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

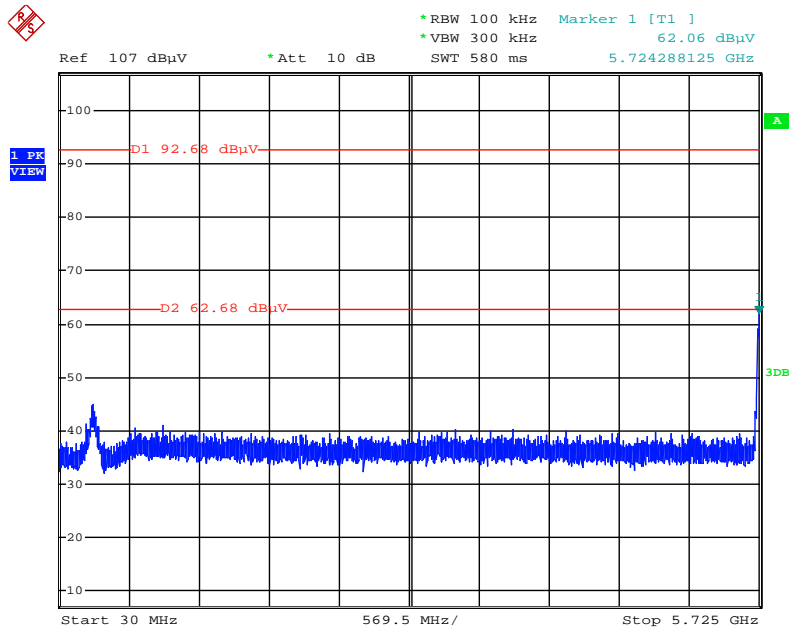


Date: 4.APR.2014 18:44:38

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

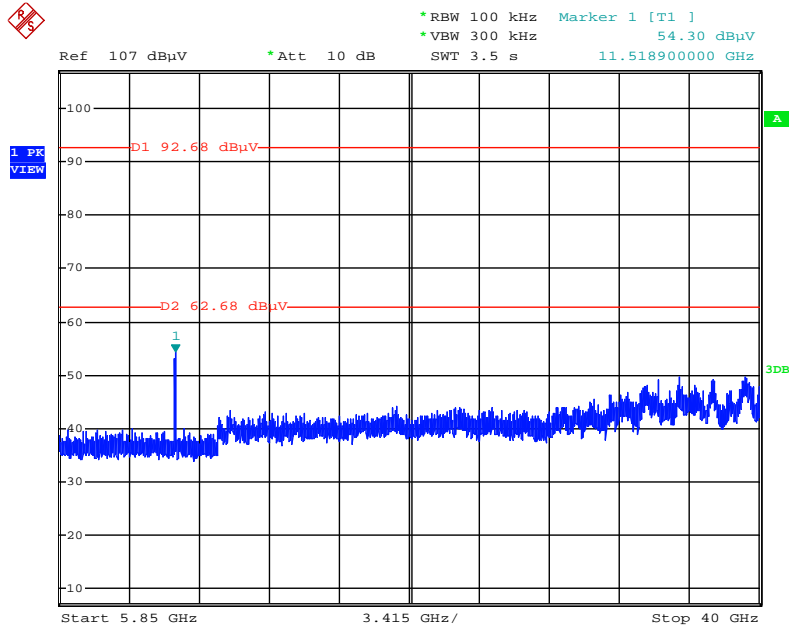


Date: 4.APR.2014 18:45:30

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

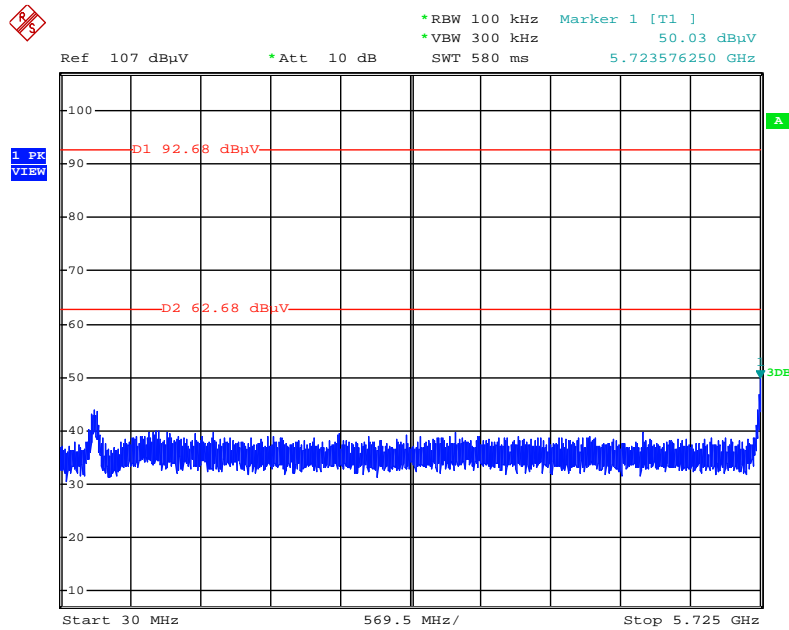


Date: 4.APR.2014 18:42:24

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

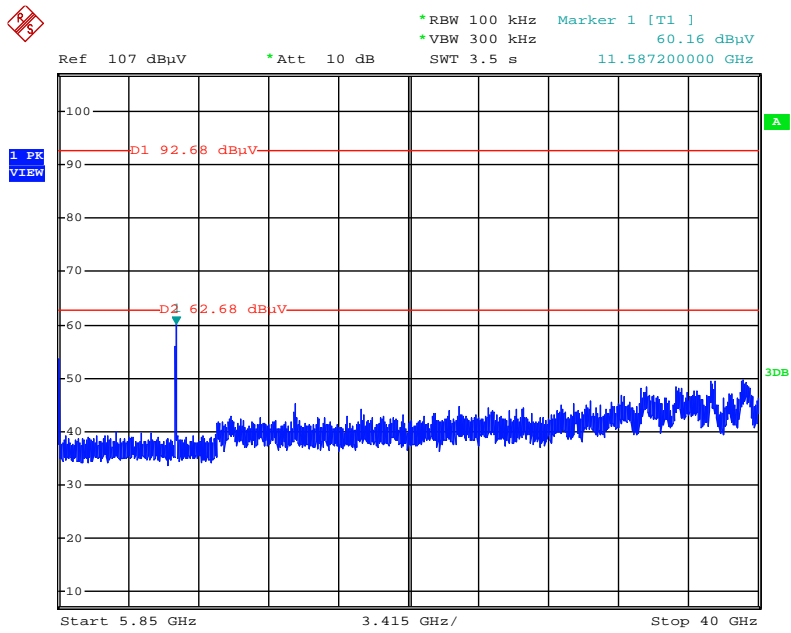


Date: 4.APR.2014 18:43:05

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

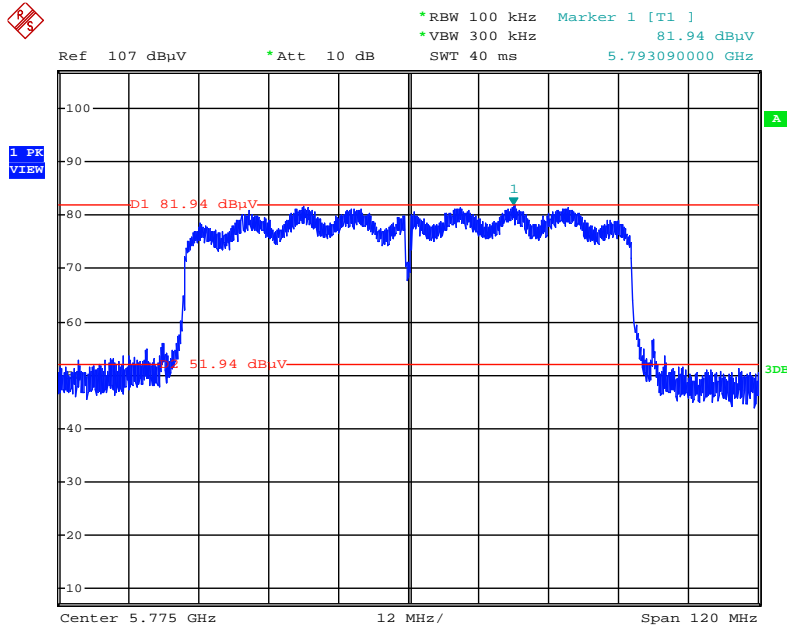


Date: 4.APR.2014 18:50:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

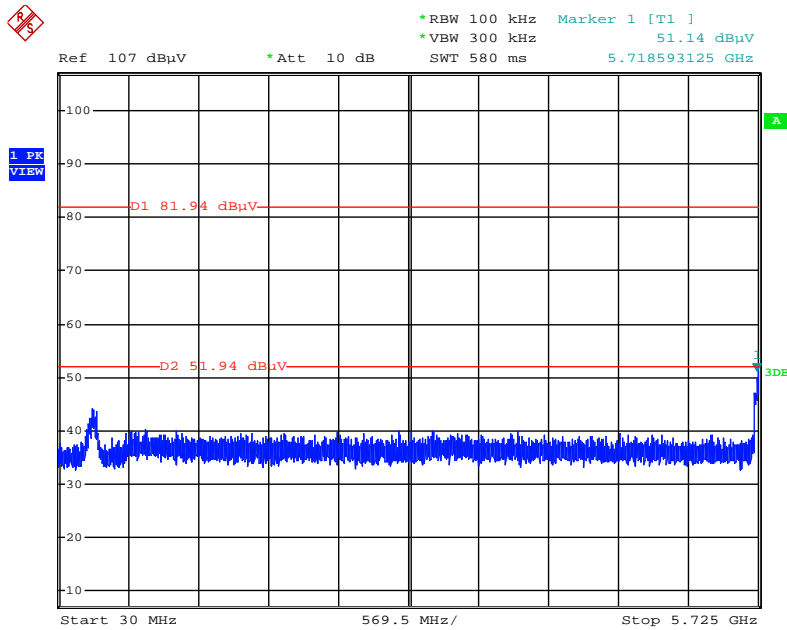


Date: 4.APR.2014 18:51:25

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

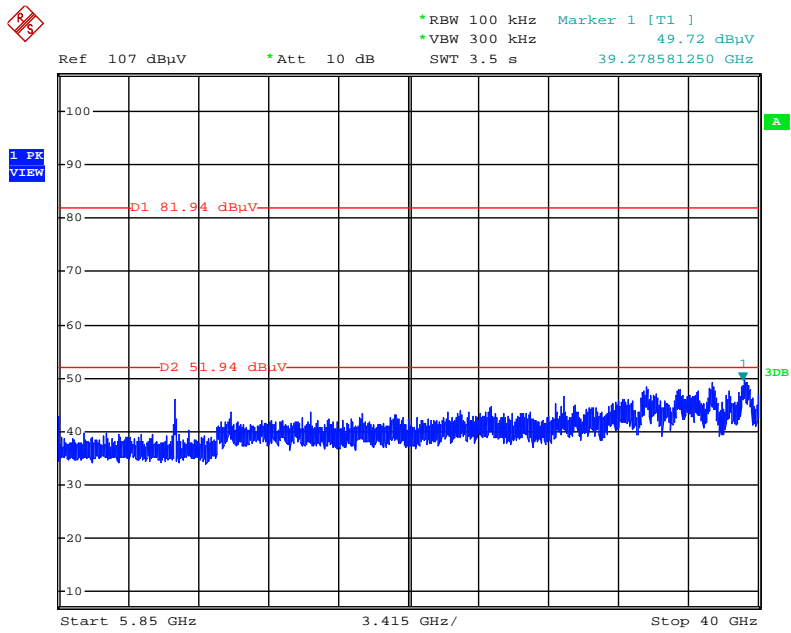


Date: 4.APR.2014 18:52:27

Plot on Configuration IEEE 802.11b / Reference Level

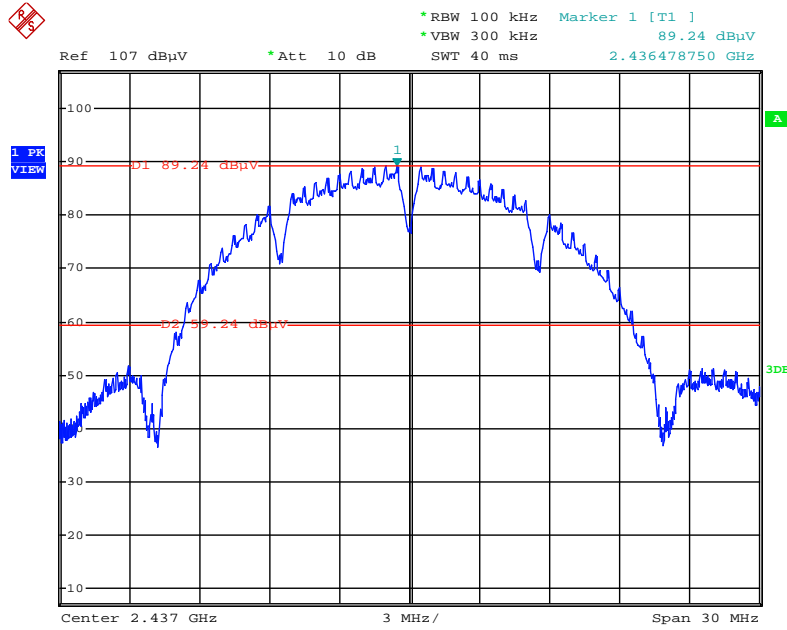


Date: 29.APR.2014 08:14:50

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

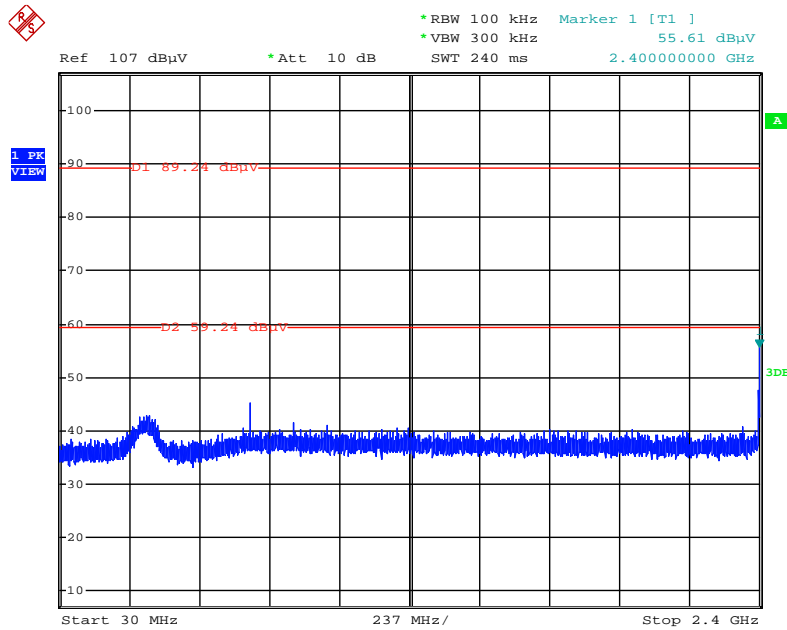


Date: 29.APR.2014 08:17:07

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

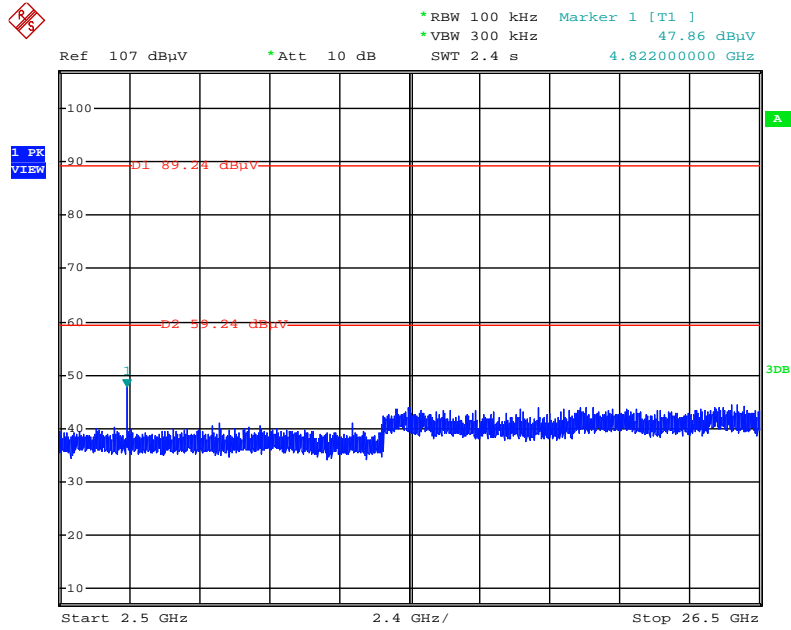


Date: 29.APR.2014 08:17:40

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

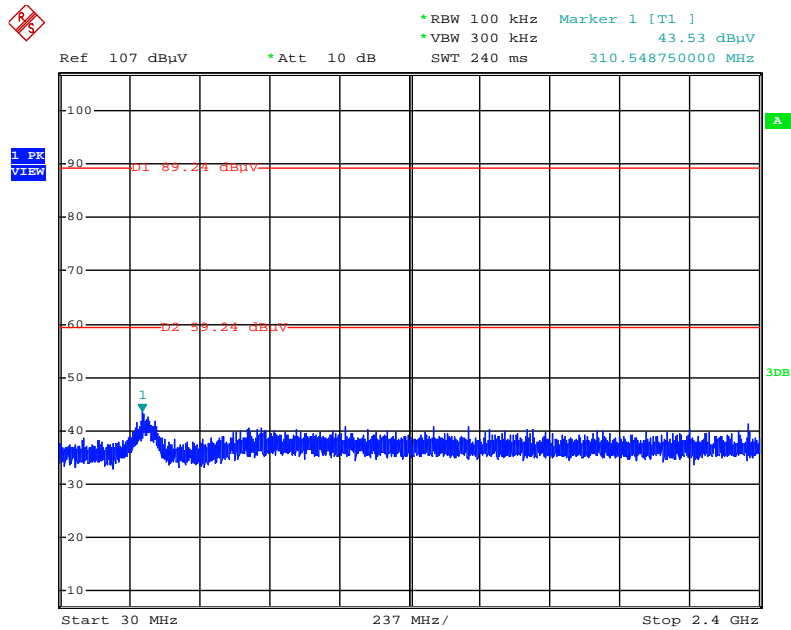


Date: 29.APR.2014 08:15:20

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

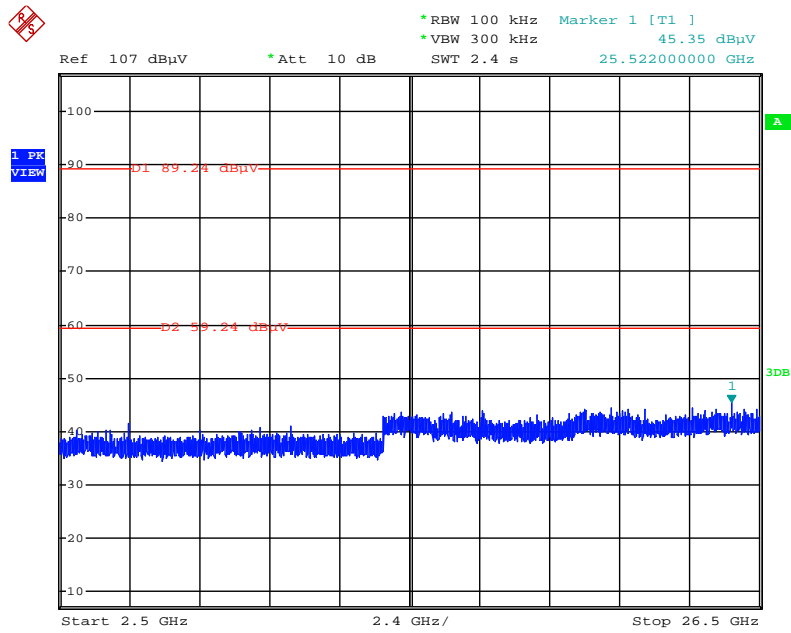


Date: 29.APR.2014 08:15:50

Plot on Configuration IEEE 802.11g / Reference Level

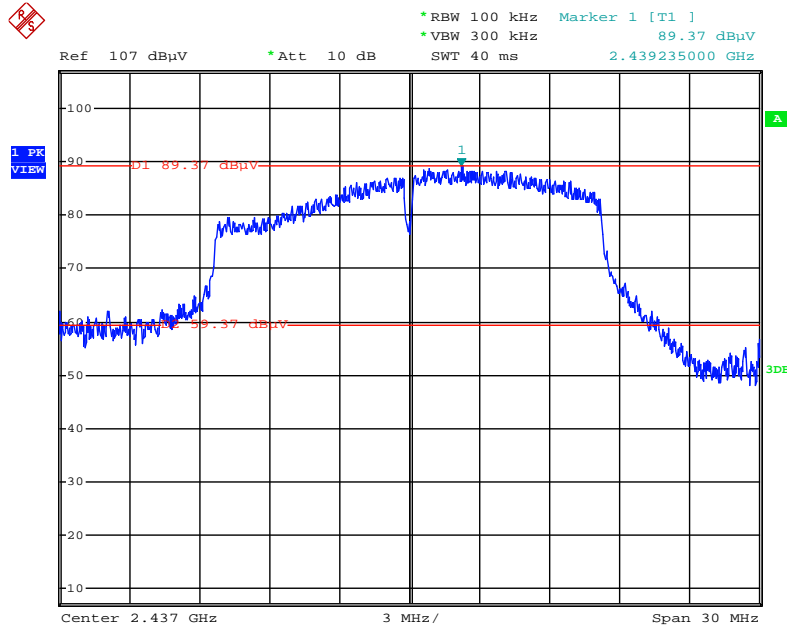


Date: 29.APR.2014 07:44:43

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

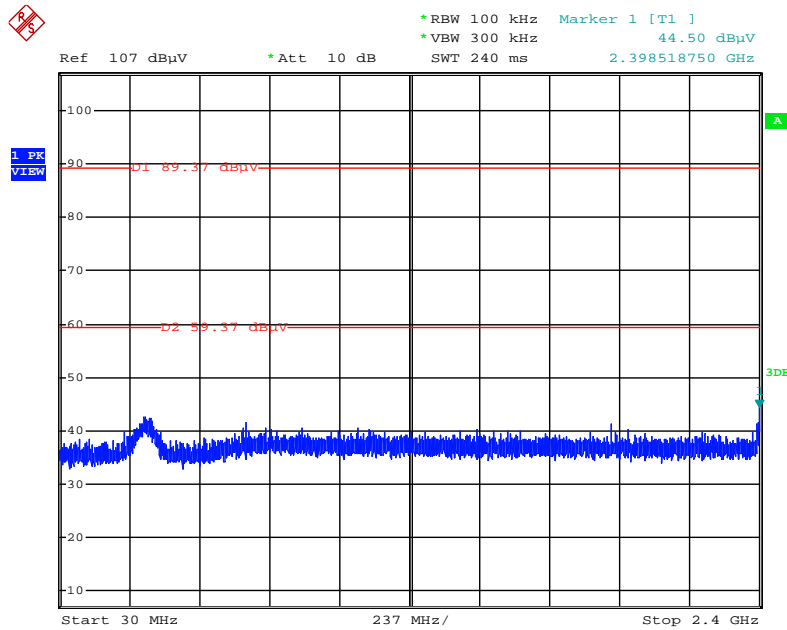


Date: 29.APR.2014 07:45:49

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

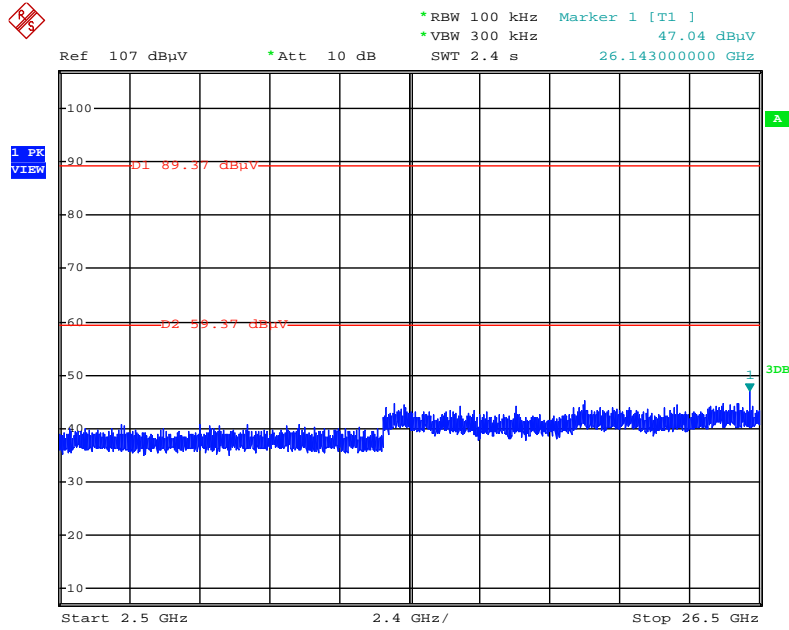


Date: 29.APR.2014 07:46:32

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

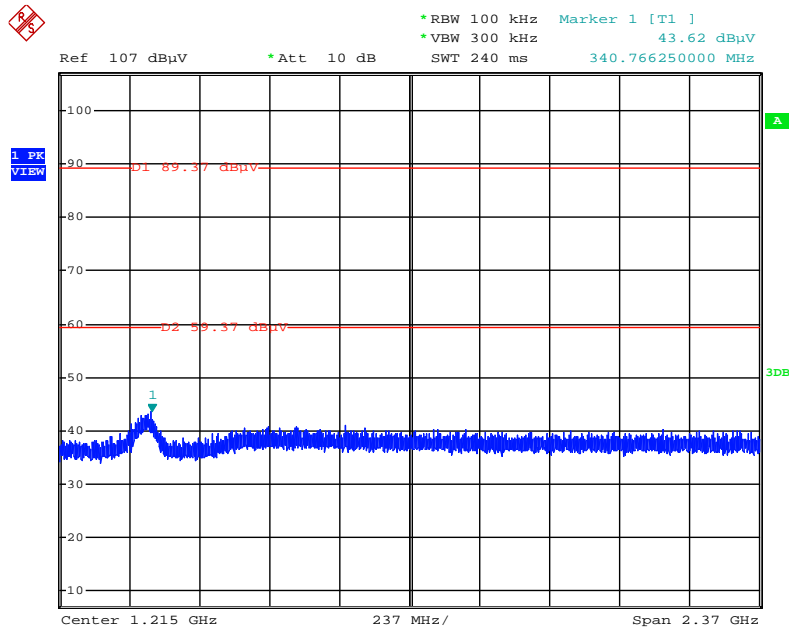


Date: 29.APR.2014 07:48:09

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

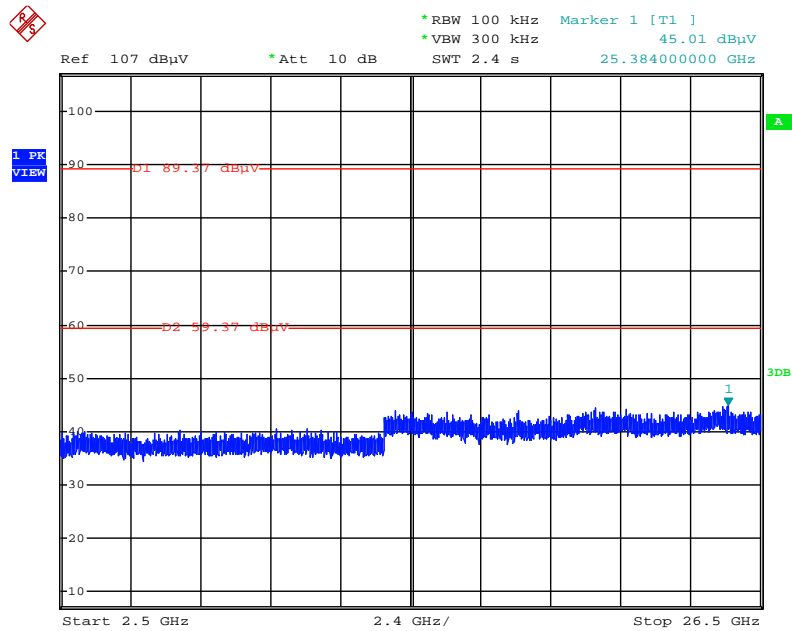


Date: 29.APR.2014 07:48:53

Plot on Configuration IEEE 802.11a / Reference Level

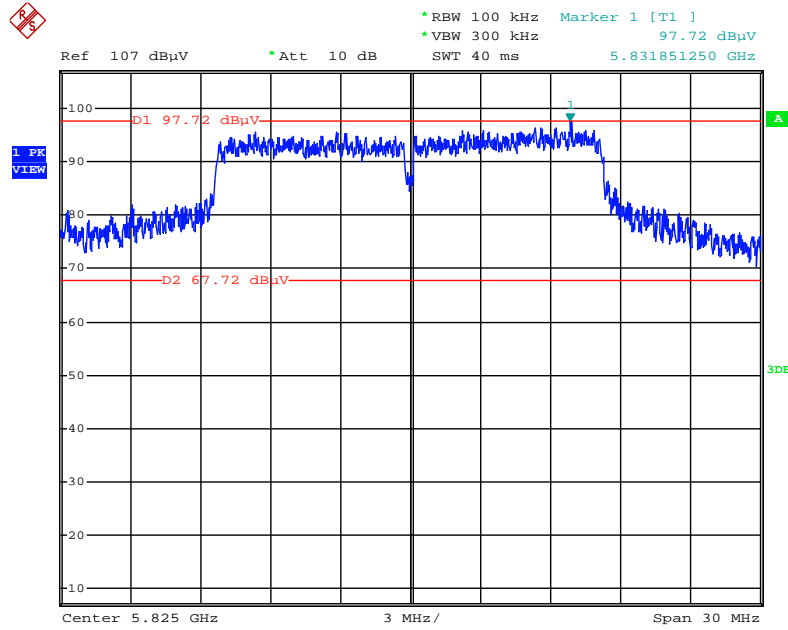


Date: 4.APR.2014 18:57:19

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

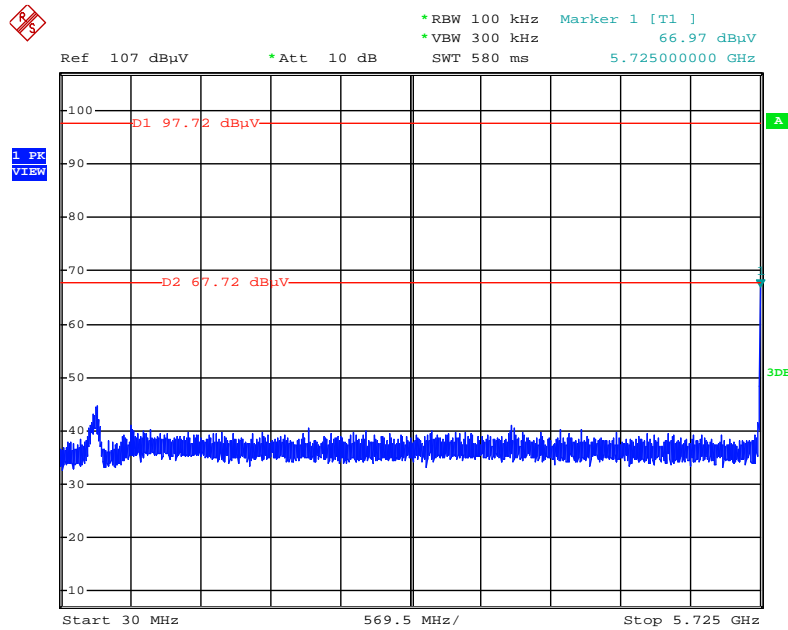


Date: 4.APR.2014 19:05:49

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

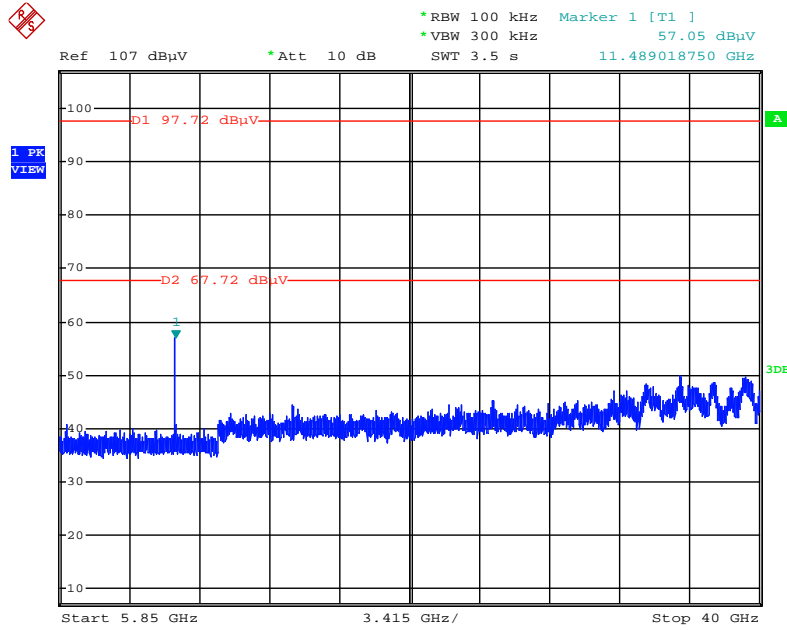


Date: 4.APR.2014 19:06:36

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

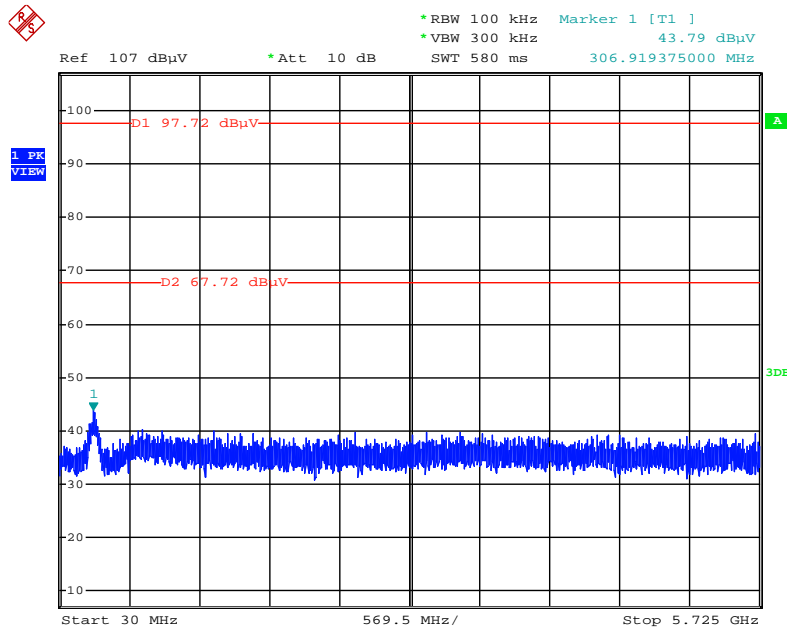

Date: 4.APR.2014 18:58:29

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~4000MHz (down 30dBc)

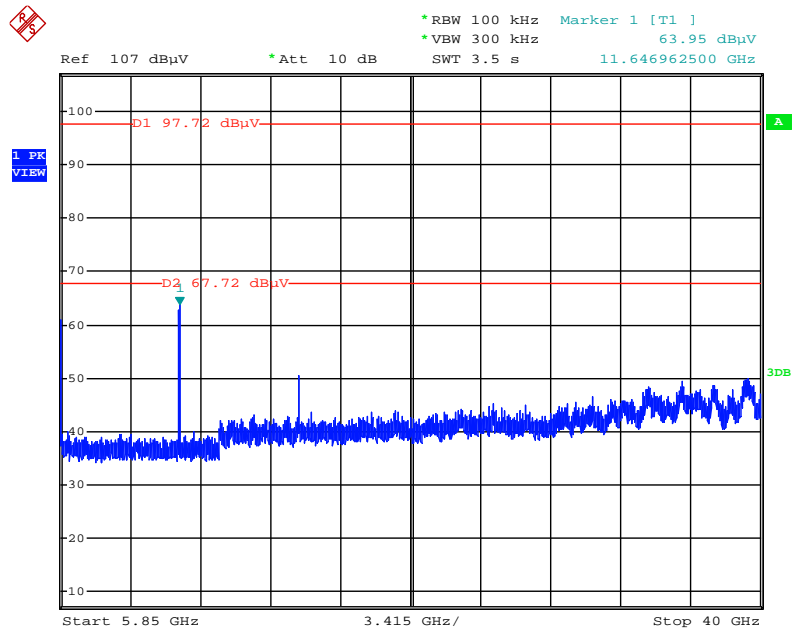

Date: 4.APR.2014 18:59:14

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Signal analyzer	Agilent	N9010A	MY52220519	10Hz~44GHz	Dec. 11, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%