



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

| | |
|---------------------|--|
| Applicant's company | D-Link Corporation |
| Applicant Address | No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C. |
| FCC ID | KA2IR860LB1 |

| | |
|-------------------|--|
| Product Name | Wireless AC1200 Dual Band Gigabit Cloud Router USB 3.0 |
| Brand Name | D-Link |
| Model No. | DIR-860L |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Received Date | Jun. 16, 2014 |
| Final Test Date | Aug. 20, 2014 |
| Submission Type | Original Equipment |

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

| | |
|---|----------------|
| 1. CERTIFICATE OF COMPLIANCE | 1 |
| 2. SUMMARY OF THE TEST RESULT | 2 |
| 3. GENERAL INFORMATION | 3 |
| 3.1. Product Details..... | 3 |
| 3.2. Accessories..... | 5 |
| 3.3. Table for Filed Antenna..... | 6 |
| 3.4. Table for Carrier Frequencies | 7 |
| 3.5. Table for Test Modes..... | 8 |
| 3.6. Table for Testing Locations..... | 10 |
| 3.7. Table for Supporting Units | 10 |
| 3.8. Table for Parameters of Test Software Setting | 11 |
| 3.9. EUT Operation during Test | 12 |
| 3.10. Duty Cycle..... | 12 |
| 3.11. Test Configurations | 13 |
| 4. TEST RESULT | 15 |
| 4.1. AC Power Line Conducted Emissions Measurement..... | 15 |
| 4.2. Maximum Conducted Output Power Measurement..... | 19 |
| 4.3. Power Spectral Density Measurement | 24 |
| 4.4. 6dB Spectrum Bandwidth Measurement | 37 |
| 4.5. Radiated Emissions Measurement | 46 |
| 4.6. Emissions Measurement | 73 |
| 4.7. Antenna Requirements | 102 |
| 5. LIST OF MEASURING EQUIPMENTS | 103 |
| 6. MEASUREMENT UNCERTAINTY..... | 105 |
| APPENDIX A. TEST PHOTOS | A1 ~ A5 |
| APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE | B1 ~ B3 |
| APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT | C1 ~ C3 |



History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|---------------|---------|-------------------------|---------------|
| FR310926-04AA | Rev. 01 | Initial issue of report | Aug. 28, 2014 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1200 Dual Band Gigabit Cloud Router USB 3.0
Brand Name : D-Link
Model No. : DIR-860L
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 16, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style with a large initial 'S'.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | | |
|--|--------------|-----------------------------------|----------|-------------|
| Part | Rule Section | Description of Test | Result | Under Limit |
| 4.1 | 15.207 | AC Power Line Conducted Emissions | Complies | 16.86 dB |
| 4.2 | 15.247(b)(3) | Maximum Conducted Output Power | Complies | 4.06 dB |
| 4.3 | 15.247(e) | Power Spectral Density | Complies | 8.30 dB |
| 4.4 | 15.247(a)(2) | 6dB Spectrum Bandwidth | Complies | - |
| 4.5 | 15.247(d) | Radiated Emissions | Complies | 3.05 dB |
| 4.6 | 15.247(d) | Band Edge Emissions | Complies | 0.09 dB |
| 4.7 | 15.203 | Antenna Requirements | Complies | - |

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

| Items | Description |
|--------------------------------|--|
| Product Type | WLAN (2TX, 2RX) |
| Radio Type | Intentional Transceiver |
| Power Type | From power adapter |
| Modulation | see the below table for IEEE 802.11n/ac |
| Data Modulation | For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) |
| Data Rate (Mbps) | see the below table for IEEE 802.11n/ac |
| Frequency Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Channel Number | <u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth |
| Channel Band Width (99%) | <u>For 2.4GHz Band:</u> MCS0 (HT20): 23.07 MHz ; MCS0 (HT40): 36.02 MHz <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 31.02 MHz ; 802.11ac MCS0/Nss1 (VHT40): 64.23 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.89 MHz |
| Maximum Conducted Output Power | <u>For 2.4GHz Band:</u> MCS0 (HT20): 24.96 dBm ; MCS0 (HT40): 19.23 dBm <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 25.12 dBm ; 802.11ac MCS0/Nss1 (VHT40): 25.15 dBm ; 802.11ac MCS0/Nss1 (VHT80): 24.76 dBm |
| Carrier Frequencies | Please refer to section 3.4 |
| Antenna | Please refer to section 3.3 |

IEEE 802.11a/b/g

| Items | Description |
|--------------------------------|---|
| Product Type | WLAN (2TX, 2RX) |
| Radio Type | Intentional Transceiver |
| Power Type | From power adapter |
| Modulation | DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g |
| Data Modulation | DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Data Rate (Mbps) | DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54) |
| Frequency Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Channel Number | 11b/g: 11 ; 11a: 5 |
| Channel Band Width (99%) | 11b: 14.16 MHz ; 11g: 22.30 MHz ; 11a: 31.34MHz |
| Maximum Conducted Output Power | 11b: 25.94 dBm ; 11g: 24.35 dBm ; 11a: 25.10 dBm |
| Carrier Frequencies | Please refer to section 3.4 |
| Antenna | Please refer to section 3.3 |

| Items | Description | |
|----------------------|---|---|
| Beamforming Function | <input type="checkbox"/> With beamforming | <input checked="" type="checkbox"/> Without beamforming |

Antenna and Band width

| Antenna | Two (TX) | | |
|---------------|----------|--------|--------|
| | 20 MHz | 40 MHz | 80 MHz |
| IEEE 802.11a | V | X | X |
| IEEE 802.11b | V | X | X |
| IEEE 802.11g | V | X | X |
| IEEE 802.11n | V | V | X |
| IEEE 802.11ac | V | V | V |

IEEE 11n/ac Spec.

| Protocol | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20) | 2 | MCS0-15 |
| 802.11n (HT40) | 2 | MCS0-15 |
| 802.11ac (VHT20) | 2 | MCS 0-9/Nss1-2 |
| 802.11ac (VHT40) | 2 | MCS 0-9/Nss1-2 |
| 802.11ac (VHT80) | 2 | MCS 0-9/Nss1-2 |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

| Power | Brand | Model | Rating |
|---------------------------------|--------|----------------|---|
| Adapter 1 | D-Link | PSAC24A-120 | Input: 100-240V ~ 0.6A 50/60Hz 40-60VA Output: 12V, 2A |
| Adapter 2 | D-Link | AMS3-1202000FU | Input: 100-240V ~ 0.8A 50/60Hz 65VA Output: 12V, 2A |
| Other | | | |
| RJ-45 cable*1, Non-Shielded, 1m | | | |

3.3. Table for Filed Antenna

| Ant. | Brand Holder | Model Name | Antenna Type | Connector | Gain (dBi) | | |
|------|-----------------------------|------------|----------------|-----------|------------|------|------|
| | | | | | 2.4GHz | 5GHz | |
| | | | | | | B1 | B4 |
| 1 | HL TECHNOLOGY GROUP LIMITED | 290-20080 | Dipole Antenna | I-PEX | 3.07 | 4.67 | 4.04 |
| 2 | HL TECHNOLOGY GROUP LIMITED | 290-20088 | Dipole Antenna | I-PEX | 4.36 | 3.74 | 4.28 |

Note: The EUT has two antennas.

<For 2.4GHz Band>

For IEEE 802.11b/g/n/ mode (2TX / 2RX):

Chain 1 and Chain 2 will transmit/receive the same signal simultaneously.


Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

<For 5GHz Band>

For IEEE 802.11a/n/ac mode (2TX / 2RX):

Chain 1 and Chain 2 will transmit/receive the same signal simultaneously.

Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

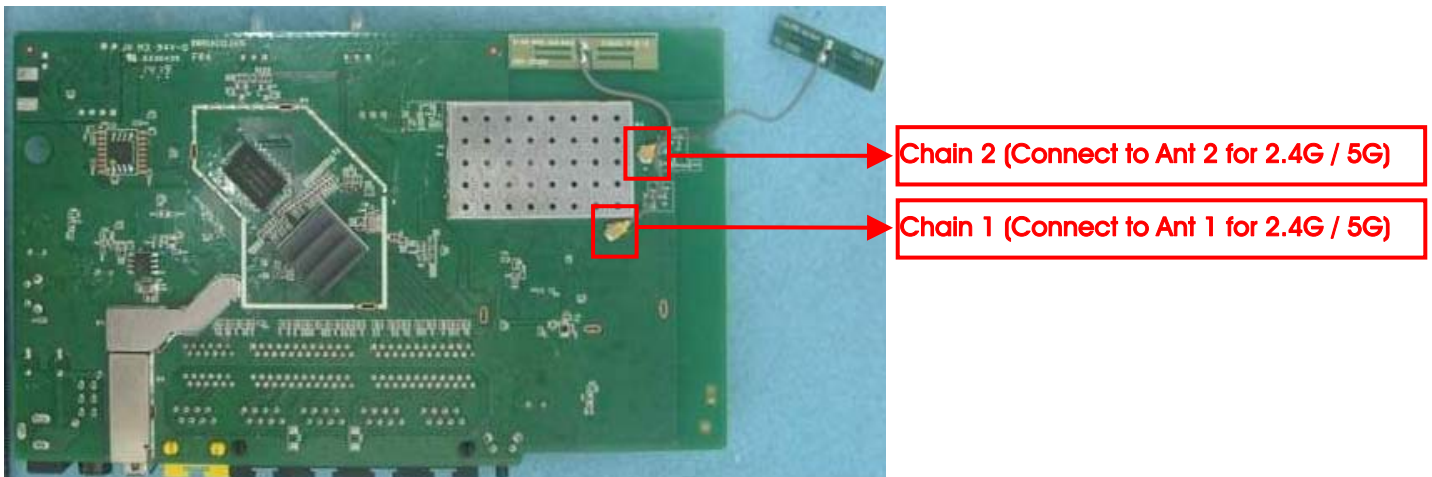

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1 | 2412 MHz | 7 | 2442 MHz |
| | 2 | 2417 MHz | 8 | 2447 MHz |
| | 3 | 2422 MHz | 9 | 2452 MHz |
| | 4 | 2427 MHz | 10 | 2457 MHz |
| | 5 | 2432 MHz | 11 | 2462 MHz |
| | 6 | 2437 MHz | - | - |

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz Band 4 | 149 | 5745 MHz | 157 | 5785 MHz |
| | 151 | 5755 MHz | 159 | 5795 MHz |
| | 153 | 5765 MHz | 161 | 5805 MHz |
| | 155 | 5775 MHz | 165 | 5825 MHz |

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

| Test Items | Mode | Data Rate | Channel | Chain |
|-----------------------------------|----------|-----------|---------|-------|
| AC Power Line Conducted Emissions | CTX | - | - | - |
| Maximum Conducted Output Power | 11n HT20 | MCS0 | 1/6/11 | 1+2 |
| | 11n HT40 | MCS0 | 3/6/9 | 1+2 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 1+2 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 1+2 |
| Power Spectral Density | 11n HT20 | MCS0 | 1/6/11 | 1+2 |
| | 11n HT40 | MCS0 | 3/6/9 | 1+2 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 1+2 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 1+2 |
| 6dB Spectrum Bandwidth | 11n HT20 | MCS0 | 1/6/11 | 1+2 |
| | 11n HT40 | MCS0 | 3/6/9 | 1+2 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 1+2 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 1+2 |
| Radiated Emissions Below 1GHz | CTX | - | - | - |
| Radiated Emissions Above 1GHz | 11n HT20 | MCS0 | 1/6/11 | 1+2 |
| | 11n HT40 | MCS0 | 3/6/9 | 1+2 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 1+2 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 1+2 |
| Band Edge Emissions | 11n HT20 | MCS0 | 1/6/11 | 1+2 |
| | 11n HT40 | MCS0 | 3/6/9 | 1+2 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 1+2 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 1+2 |

For 5GHz Band:

| Test Items | Mode | Data Rate | Channel | Chain |
|-----------------------------------|------------|-----------|-------------|-------|
| AC Power Line Conducted Emissions | CTX | - | - | - |
| Maximum Conducted Output Power | 11ac VHT20 | MCS0/Nss1 | 149/157/165 | 1+2 |
| | 11ac VHT40 | MCS0/Nss1 | 151/159 | 1+2 |
| | 11ac VHT80 | MCS0/Nss1 | 155 | 1+2 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 1+2 |
| Power Spectral Density | 11ac VHT20 | MCS0/Nss1 | 149/157/165 | 1+2 |
| | 11ac VHT40 | MCS0/Nss1 | 151/159 | 1+2 |
| | 11ac VHT80 | MCS0/Nss1 | 155 | 1+2 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 1+2 |
| 6dB Spectrum Bandwidth | 11ac VHT20 | MCS0/Nss1 | 149/157/165 | 1+2 |
| | 11ac VHT40 | MCS0/Nss1 | 151/159 | 1+2 |
| | 11ac VHT80 | MCS0/Nss1 | 155 | 1+2 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 1+2 |
| Radiated Emissions Below 1GHz | CTX | - | - | - |
| Radiated Emissions Above 1GHz | 11ac VHT20 | MCS0/Nss1 | 149/157/165 | 1+2 |
| | 11ac VHT40 | MCS0/Nss1 | 151/159 | 1+2 |
| | 11ac VHT80 | MCS0/Nss1 | 155 | 1+2 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 1+2 |
| Band Edge Emissions | 11ac VHT20 | MCS0/Nss1 | 149/157/165 | 1+2 |
| | 11ac VHT40 | MCS0/Nss1 | 151/159 | 1+2 |
| | 11ac VHT80 | MCS0/Nss1 | 155 | 1+2 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 1+2 |

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. CTX EUT with Adapter 1

Mode 2. CTX EUT with Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Below 1G):

Mode 1. CTX EUT 2.4GHz Function with Adapter 1

Mode 2. CTX EUT 5GHz Function with Adapter 1

Mode 1 has been evaluated to be the worst case, thus measurement will follow this same test mode for Mode 3.

Mode 3. CTX EUT 2.4GHz Function with Adapter 2

Mode 3 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Above 1G):

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

| Test Site Location | | | | |
|--------------------|--|----------|--------------|-------------|
| Address: | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. | | | |
| TEL: | 886-3-656-9065 | | | |
| FAX: | 886-3-656-9085 | | | |
| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. |
| 03CH01-CB | SAC | Hsin Chu | 262045 | IC 4086D |
| CO01-CB | Conduction | Hsin Chu | 262045 | IC 4086D |
| TH01-CB | OVEN Room | Hsin Chu | - | - |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB and CO01-CB

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| Notebook | DELL | E6430 | DoC |

For Test Site No: TH01-CB

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| Notebook | DELL | E6220 | DoC |

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 HT20

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| MCS0 HT20 | 10/11 | 24/25 | 10/11 |

Power Parameters of IEEE 802.11n MCS0 HT40

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|----------|
| Frequency | 2422 MHz | 2437 MHz | 2452 MHz |
| MCS0 HT40 | 0A/0B | 15/16 | 0B/0C |

Power Parameters of IEEE 802.11b/g

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11b | 10/11 | 20/21 | 13/14 |
| IEEE 802.11g | 07/08 | 1D/1E | 09/0A |

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| MCS0/Nss1 VHT20 | 2B/2E | 2C/2E | 2B/2E |

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|--|
| Frequency | 5755 MHz | 5795 MHz | |
| MCS0/Nss1 VHT40 | 2B/2E | 2B/2F | |

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|--|--|
| Frequency | 5775 MHz | | |
| MCS0/Nss1 VHT80 | 20/20 | | |

Power Parameters of IEEE 802.11a

| Test Software Version | MT7662 QA V1.0.3.2 | | |
|-----------------------|--------------------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11a | 2B/2E | 2B/2E | 2B/2E |

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

| Band | Mode | On Time (ms) | On+Off Time (ms) | Duty Cycle (%) | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|------|--------------------------|--------------|------------------|----------------|------------------|-----------------------|
| 2.4G | 802.11n MCS0 HT20 | 1.000 | 1.000 | 100.00% | 0.00 | 0.01 |
| | 802.11n MCS0 HT40 | 1.000 | 1.000 | 100.00% | 0.00 | 0.01 |
| | 802.11b | 1.000 | 1.000 | 100.00% | 0.00 | 0.01 |
| | 802.11g | 1.000 | 1.000 | 100.00% | 0.00 | 0.01 |
| 5G | 802.11ac MCS0/Nss1 VHT20 | 1.360 | 1.420 | 95.77% | 0.19 | 0.74 |
| | 802.11ac MCS0/Nss1 VHT40 | 0.640 | 0.710 | 90.14% | 0.45 | 1.56 |
| | 802.11ac MCS0/Nss1 VHT80 | 0.308 | 0.376 | 81.91% | 0.87 | 3.25 |
| | 802.11a | 1.440 | 1.500 | 96.00% | 0.18 | 0.69 |


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

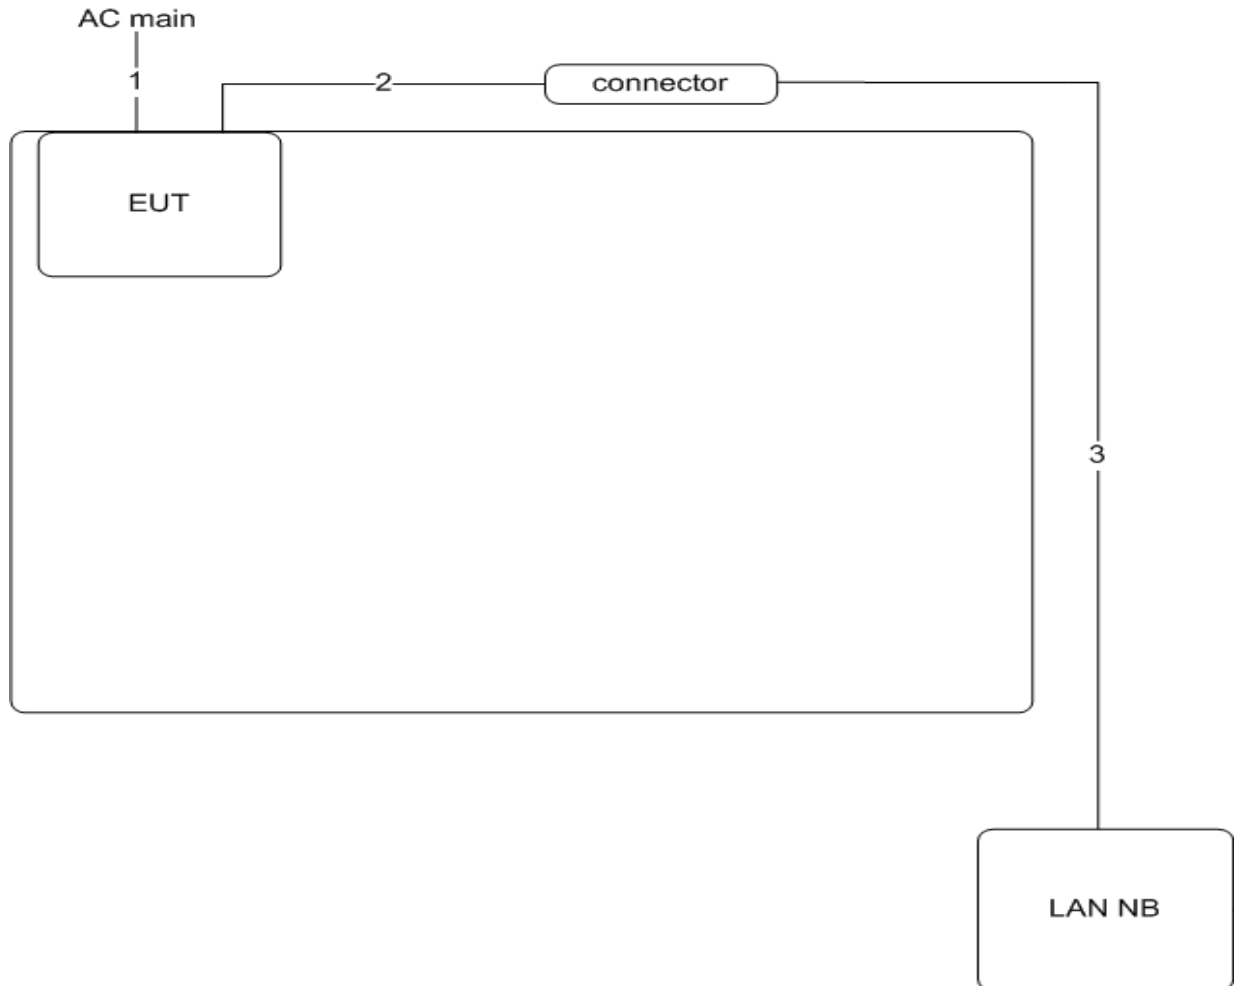

| Item | Connection | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1 | Power cable | No | 1.5m |
| 2 | RJ-45 cable | No | 1m |
| 3 | RJ-45 cable | No | 10m |

3.11.2. Radiation Emissions Test Configuration

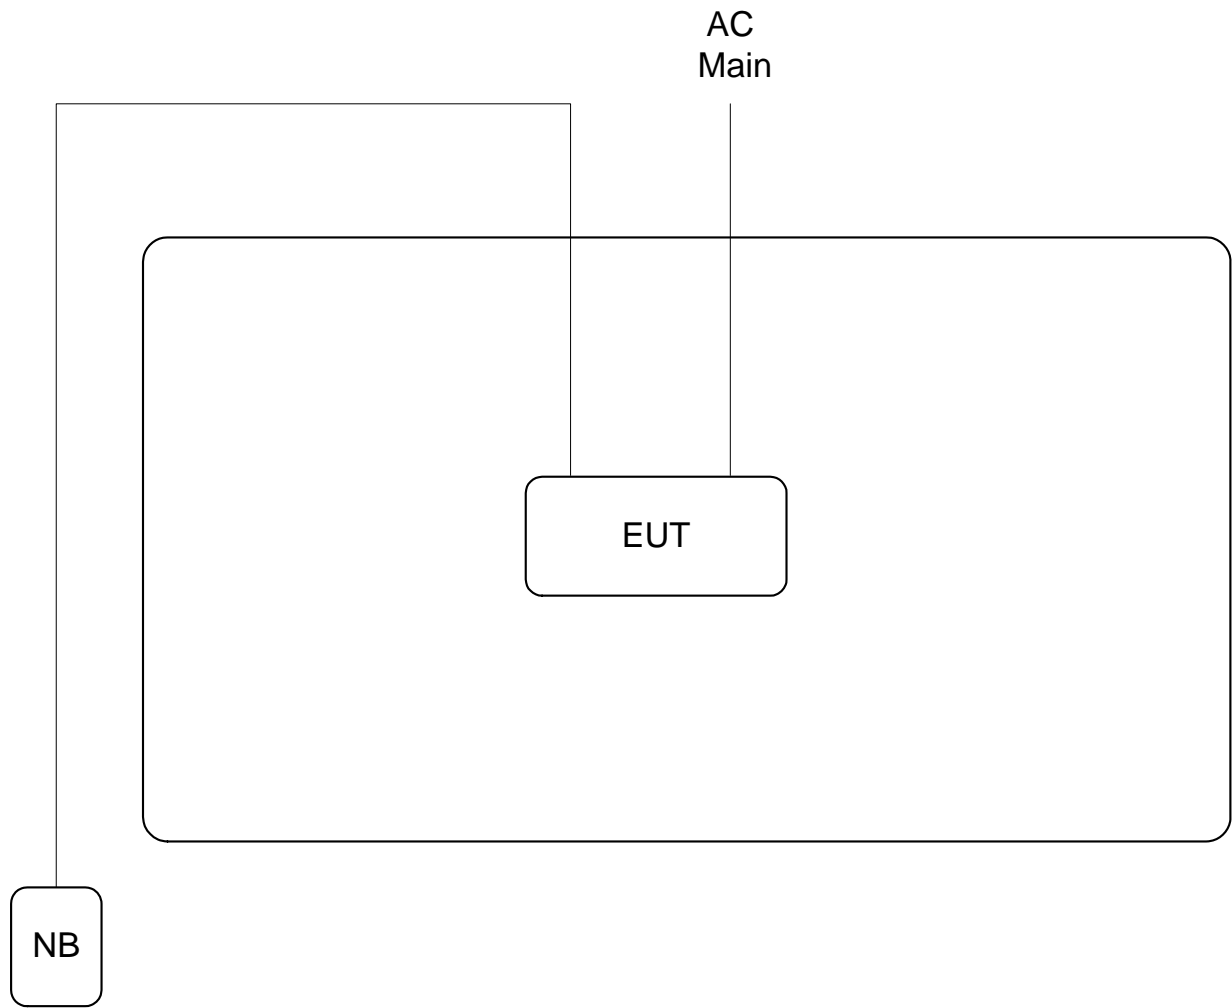

| Item | Connection | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1 | Power cable | No | 1.2m |
| 2 | RJ-45 cable | No | 10m |

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

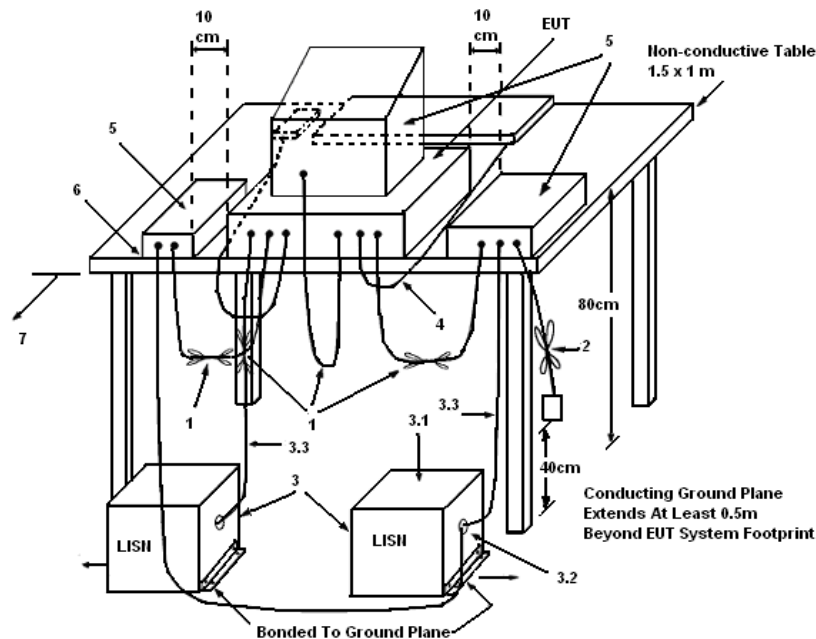

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

| | | | |
|---------------|---------|-----------|--------|
| Temperature | 25°C | Humidity | 53% |
| Test Engineer | Da Deng | Phase | Line |
| Configuration | CTX | Test Mode | Mode 2 |

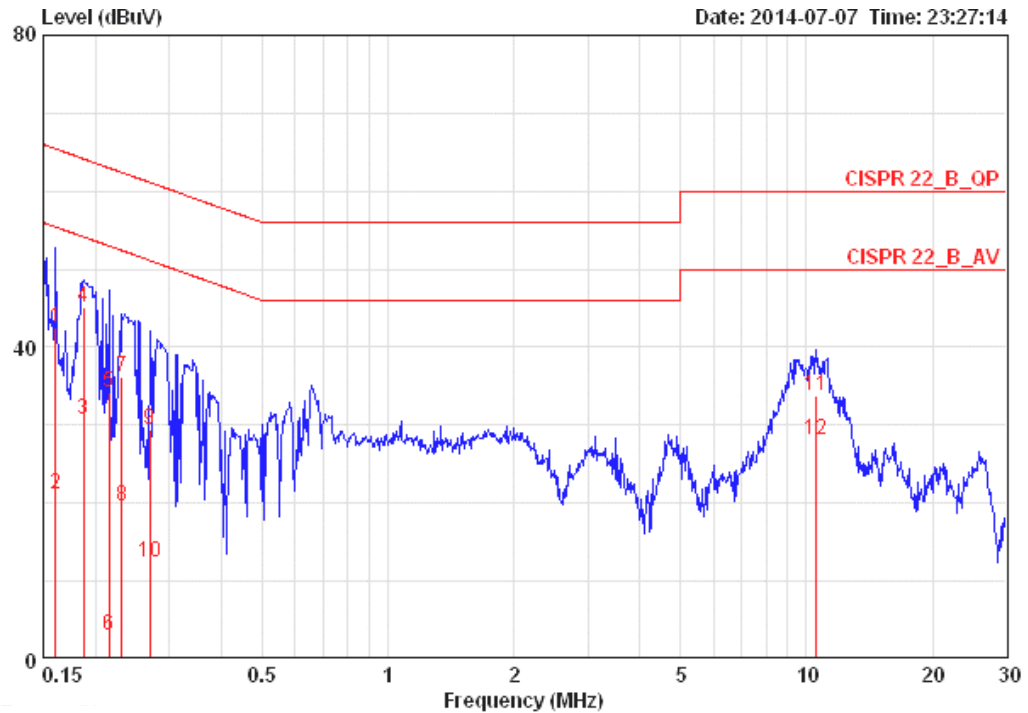

| | Freq | Level | Over Limit | Limit Line | LISN Factor | Read Level | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|-------------|------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dB | dBuV | dB | | |
| 1 | 0.16070 | 42.53 | -22.90 | 65.43 | 0.10 | 42.27 | 0.16 | LINE | QP |
| 2 | 0.16070 | 21.13 | -34.30 | 55.43 | 0.10 | 20.87 | 0.16 | LINE | AVERAGE |
| 3 | 0.18739 | 30.79 | -23.36 | 54.15 | 0.10 | 30.53 | 0.16 | LINE | AVERAGE |
| 4 | 0.18739 | 45.17 | -18.98 | 64.15 | 0.10 | 44.91 | 0.16 | LINE | QP |
| 5 | 0.21506 | 34.27 | -28.74 | 63.01 | 0.10 | 34.00 | 0.17 | LINE | QP |
| 6 | 0.21506 | 3.11 | -49.90 | 53.01 | 0.10 | 2.84 | 0.17 | LINE | AVERAGE |
| 7 | 0.23162 | 36.23 | -26.16 | 62.39 | 0.10 | 35.96 | 0.17 | LINE | QP |
| 8 | 0.23162 | 19.54 | -32.85 | 52.39 | 0.10 | 19.27 | 0.17 | LINE | AVERAGE |
| 9 | 0.27009 | 29.44 | -31.67 | 61.12 | 0.10 | 29.17 | 0.17 | LINE | QP |
| 10 | 0.27009 | 12.41 | -38.70 | 51.12 | 0.10 | 12.14 | 0.17 | LINE | AVERAGE |
| 11 | 10.508 | 33.76 | -26.24 | 60.00 | 0.35 | 33.02 | 0.39 | LINE | QP |
| 12 | 10.508 | 28.13 | -21.87 | 50.00 | 0.35 | 27.39 | 0.39 | LINE | AVERAGE |

| | | | |
|---------------|---------|-----------|---------|
| Temperature | 25°C | Humidity | 53% |
| Test Engineer | Da Deng | Phase | Neutral |
| Configuration | CTX | Test Mode | Mode 2 |

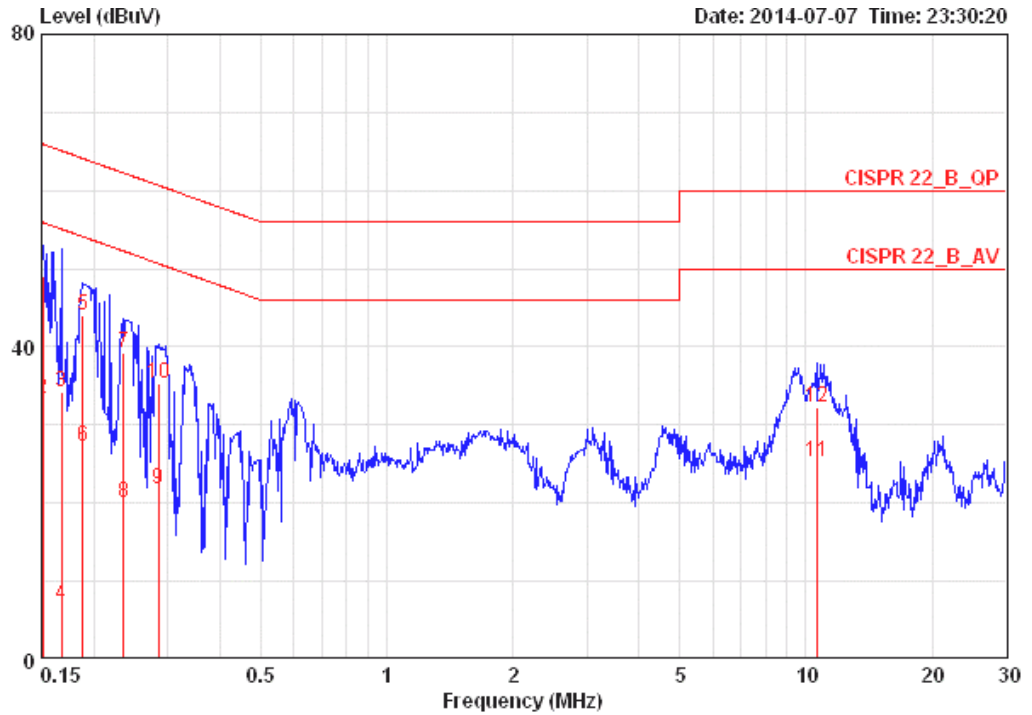

| | Freq | Level | Over Limit | Limit | LISN | Read | Cable | Pol/Phase | Remark |
|----|---------|-------|------------|-------|------|-------|-------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dB | dBuV | dB | | |
| 1 | 0.15080 | 49.10 | -16.86 | 65.96 | 0.09 | 48.85 | 0.16 | NEUTRAL | QP |
| 2 | 0.15080 | 33.42 | -22.54 | 55.96 | 0.09 | 33.17 | 0.16 | NEUTRAL | AVERAGE |
| 3 | 0.16765 | 34.24 | -30.83 | 65.08 | 0.09 | 33.99 | 0.16 | NEUTRAL | QP |
| 4 | 0.16765 | 7.03 | -48.04 | 55.08 | 0.09 | 6.78 | 0.16 | NEUTRAL | AVERAGE |
| 5 | 0.18838 | 43.96 | -20.14 | 64.11 | 0.09 | 43.71 | 0.16 | NEUTRAL | QP |
| 6 | 0.18838 | 27.31 | -26.79 | 54.11 | 0.09 | 27.06 | 0.16 | NEUTRAL | AVERAGE |
| 7 | 0.23533 | 39.32 | -22.94 | 62.26 | 0.09 | 39.06 | 0.17 | NEUTRAL | QP |
| 8 | 0.23533 | 20.16 | -32.10 | 52.26 | 0.09 | 19.90 | 0.17 | NEUTRAL | AVERAGE |
| 9 | 0.28478 | 21.89 | -28.78 | 50.68 | 0.09 | 21.63 | 0.17 | NEUTRAL | AVERAGE |
| 10 | 0.28478 | 35.26 | -25.41 | 60.68 | 0.09 | 35.00 | 0.17 | NEUTRAL | QP |
| 11 | 10.676 | 25.36 | -24.64 | 50.00 | 0.33 | 24.64 | 0.39 | NEUTRAL | AVERAGE |
| 12 | 10.676 | 32.33 | -27.67 | 60.00 | 0.33 | 31.61 | 0.39 | NEUTRAL | QP |

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|-------------------------------------|
| Detector | Average for 2.4GHz Peak for 5GHz |

4.2.3. Test Procedures


For 2.4GHz

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

For 5GHz

1. Test procedures refer KDB 558074 D01 v03r02 section 9.1.3 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
4. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.2.4. Test Setup Layout

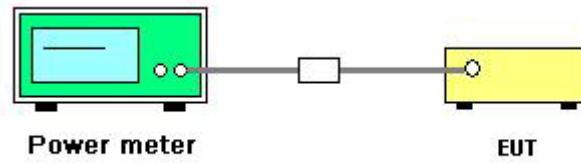

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

| | | | |
|---------------|---------------|----------------|-----------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11n/ac |
| Test Date | Aug. 15, 2014 | | |

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

| Channel | Frequency | Conducted Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | 14.46 | 14.32 | 17.40 | 30.00 | Complies |
| 6 | 2437 MHz | 21.87 | 22.02 | 24.96 | 30.00 | Complies |
| 11 | 2462 MHz | 13.02 | 13.29 | 16.17 | 30.00 | Complies |

Configuration IEEE 802.11n MCS0 HT40

| Channel | Frequency | Conducted Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 3 | 2422 MHz | 11.62 | 11.52 | 14.58 | 30.00 | Complies |
| 6 | 2437 MHz | 16.21 | 16.23 | 19.23 | 30.00 | Complies |
| 9 | 2452 MHz | 11.33 | 11.31 | 14.33 | 30.00 | Complies |

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

| Channel | Frequency | Conducted peak power | | | Max. Limit (dBm) | Result |
|---------|-----------|----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | 22.24 | 21.75 | 25.01 | 30.00 | Complies |
| 157 | 5785 MHz | 22.35 | 21.85 | 25.12 | 30.00 | Complies |
| 165 | 5825 MHz | 22.33 | 21.80 | 25.08 | 30.00 | Complies |

| Channel | Frequency | Conducted Average power | | | Max. Limit (dBm) | Result |
|---------|-----------|-------------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | 19.94 | 20.27 | 23.12 | 30.00 | Complies |
| 157 | 5785 MHz | 19.92 | 20.09 | 23.02 | 30.00 | Complies |
| 165 | 5825 MHz | 19.94 | 19.98 | 22.97 | 30.00 | Complies |

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

| Channel | Frequency | Conducted peak power | | | Max. Limit (dBm) | Result |
|---------|-----------|----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 151 | 5755 MHz | 22.42 | 21.83 | 25.15 | 30.00 | Complies |
| 159 | 5795 MHz | 22.25 | 21.68 | 24.98 | 30.00 | Complies |

| Channel | Frequency | Conducted Average power | | | Max. Limit (dBm) | Result |
|---------|-----------|-------------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 151 | 5755 MHz | 19.88 | 20.40 | 23.16 | 30.00 | Complies |
| 159 | 5795 MHz | 19.77 | 20.11 | 22.95 | 30.00 | Complies |

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

| Channel | Frequency | Conducted peak power | | | Max. Limit (dBm) | Result |
|---------|-----------|----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 155 | 5775 MHz | 21.72 | 21.77 | 24.76 | 30.00 | Complies |

| Channel | Frequency | Conducted Average power | | | Max. Limit (dBm) | Result |
|---------|-----------|-------------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 155 | 5775 MHz | 15.55 | 15.93 | 18.75 | 30.00 | Complies |

Note: 5GHz Average output power is only for Maximum Permissible Exposure use.

| | | | |
|---------------|---------------|----------------|------------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11a/b/g |
| Test Date | Aug. 15, 2014 | | |

Configuration IEEE 802.11b

| Channel | Frequency | Conducted Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | 18.12 | 17.91 | 21.03 | 30.00 | Complies |
| 6 | 2437 MHz | 22.87 | 22.98 | 25.94 | 30.00 | Complies |
| 11 | 2462 MHz | 18.04 | 18.06 | 21.06 | 30.00 | Complies |

Configuration IEEE 802.11g

| Channel | Frequency | Conducted Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | 14.08 | 13.86 | 16.98 | 30.00 | Complies |
| 6 | 2437 MHz | 21.19 | 21.48 | 24.35 | 30.00 | Complies |
| 11 | 2462 MHz | 13.62 | 13.75 | 16.70 | 30.00 | Complies |

Configuration IEEE 802.11a

| Channel | Frequency | Conducted peak power | | | Max. Limit (dBm) | Result |
|---------|-----------|----------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | 22.15 | 21.78 | 24.98 | 30.00 | Complies |
| 157 | 5785 MHz | 22.47 | 21.68 | 25.10 | 30.00 | Complies |
| 165 | 5825 MHz | 22.33 | 21.75 | 25.06 | 30.00 | Complies |

| Channel | Frequency | Conducted Average power | | | Max. Limit (dBm) | Result |
|---------|-----------|-------------------------|---------|-------|------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | 19.88 | 20.25 | 23.08 | 30.00 | Complies |
| 157 | 5785 MHz | 19.96 | 20.13 | 23.06 | 30.00 | Complies |
| 165 | 5825 MHz | 20.01 | 20.04 | 23.04 | 30.00 | Complies |

Note: 5GHz Average output power is only for Maximum Permissible Exposure use.

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Set the span to 1.5 times the DTS channel bandwidth. |
| RBW | $3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$ |
| VBW | $\geq 3 \times \text{RBW}$ |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto couple |

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

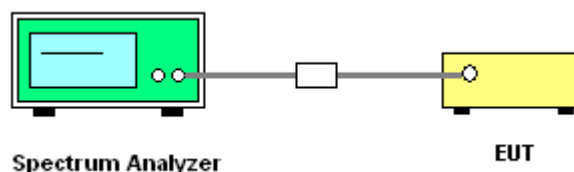

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

| | | | |
|---------------|-----------|----------------|-----------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11n/ac |

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|--------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | -13.17 | -13.19 | -10.17 | 7.23 | Complies |
| 6 | 2437 MHz | -5.22 | -5.67 | -2.43 | 7.23 | Complies |
| 11 | 2462 MHz | -13.77 | -14.14 | -10.94 | 7.23 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (6.77 - 6) = 7.23 \text{dBm/3kHz}$

Configuration IEEE 802.11n MCS0 HT40

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|--------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 3 | 2422 MHz | -17.40 | -17.10 | -14.24 | 7.23 | Complies |
| 6 | 2437 MHz | -14.13 | -13.44 | -10.76 | 7.23 | Complies |
| 9 | 2452 MHz | -16.62 | -16.51 | -13.55 | 7.23 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (6.77 - 6) = 7.23 \text{dBm/3kHz}$

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | -3.96 | -5.08 | -1.47 | 6.83 | Complies |
| 157 | 5785 MHz | -5.15 | -5.28 | -2.20 | 6.83 | Complies |
| 165 | 5825 MHz | -3.67 | -5.72 | -1.56 | 6.83 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.17 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (7.17 - 6) = 6.83 \text{dBm/3kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 151 | 5755 MHz | -6.13 | -8.73 | -4.23 | 6.83 | Complies |
| 159 | 5795 MHz | -8.06 | -6.83 | -4.39 | 6.83 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.17 \text{ dBi} > 6 \text{ dBi}$, So Power Density Limit = $8 - (7.17 - 6) = 6.83 \text{ dBm/3kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|--------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 155 | 5775 MHz | -14.30 | -12.52 | -10.31 | 6.83 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.17 \text{ dBi} > 6 \text{ dBi}$, So Power Density Limit = $8 - (7.17 - 6) = 6.83 \text{ dBm/3kHz}$

| | | | |
|---------------|-----------|----------------|------------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11a/b/g |

Configuration IEEE 802.11b

| Channel | Frequency | Power Density(dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|-------------------------|---------|-------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | -11.25 | -10.79 | -8.00 | 7.23 | Complies |
| 6 | 2437 MHz | -5.84 | -6.17 | -2.99 | 7.23 | Complies |
| 11 | 2462 MHz | -11.02 | -10.79 | -7.89 | 7.23 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (6.77 - 6) = 7.23 \text{dBm/3kHz}$

Configuration IEEE 802.11g

| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|--------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 1 | 2412 MHz | -13.56 | -13.63 | -10.58 | 7.23 | Complies |
| 6 | 2437 MHz | -4.98 | -4.97 | -1.96 | 7.23 | Complies |
| 11 | 2462 MHz | -13.97 | -13.90 | -10.92 | 7.23 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (6.77 - 6) = 7.23 \text{dBm/3kHz}$

Configuration IEEE 802.11a


| Channel | Frequency | Power Density (dBm/3kHz) | | | Power Density Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
| | | Chain 1 | Chain 2 | Total | | |
| 149 | 5745 MHz | -4.61 | -5.02 | -1.80 | 6.83 | Complies |
| 157 | 5785 MHz | -5.55 | -5.11 | -2.31 | 6.83 | Complies |
| 165 | 5825 MHz | -4.45 | -5.25 | -1.82 | 6.83 | Complies |

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.17 \text{dBi} > 6 \text{dBi}$, So Power Density Limit = $8 - (7.17 - 6) = 6.83 \text{dBm/3kHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

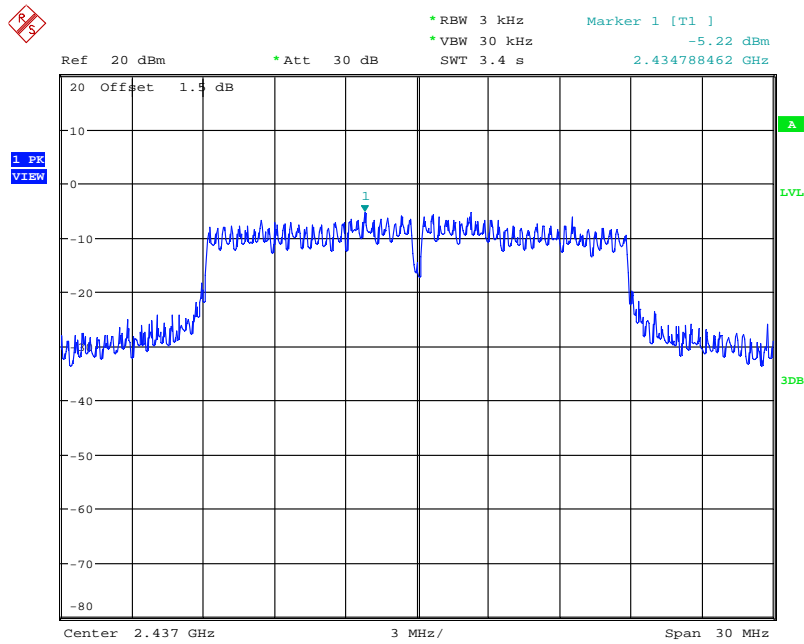


Date: 15.AUG.2014 18:25:20

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

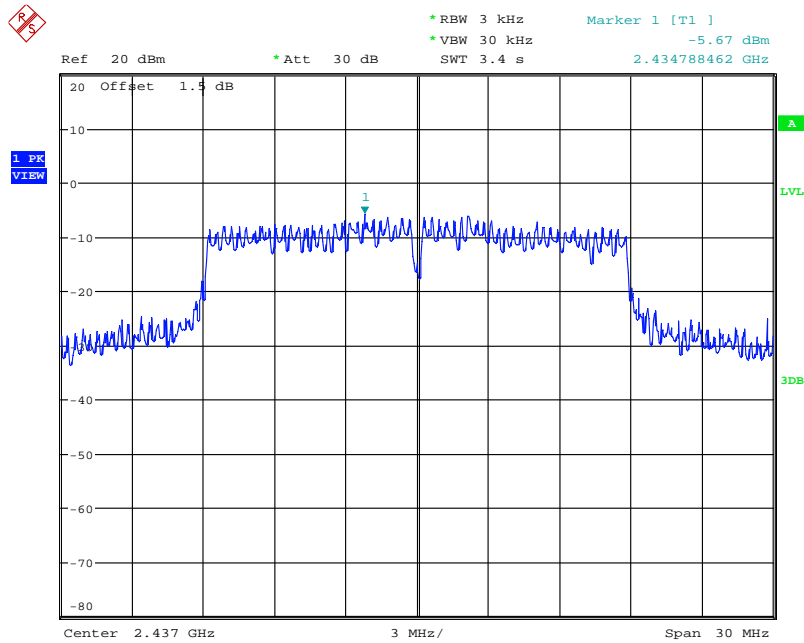


Date: 15.AUG.2014 18:26:15

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

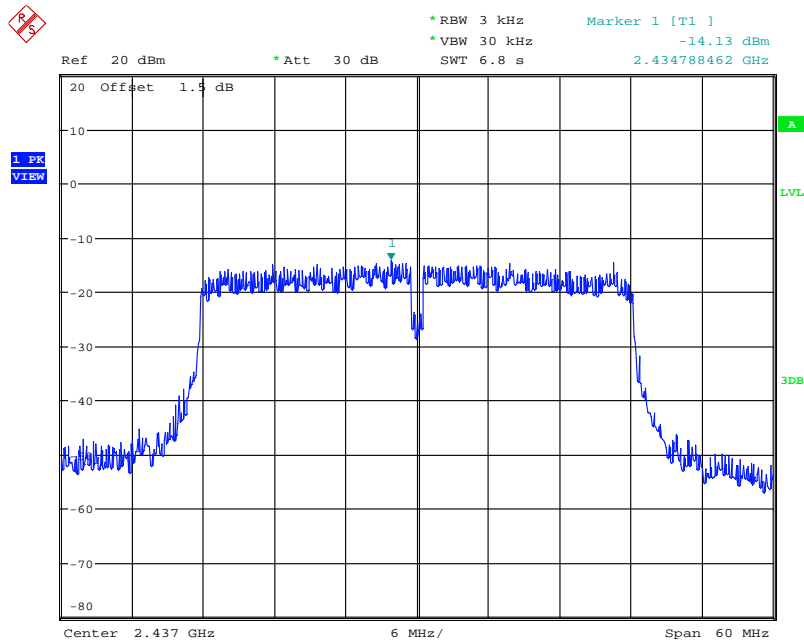


Date: 15.AUG.2014 18:36:50

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

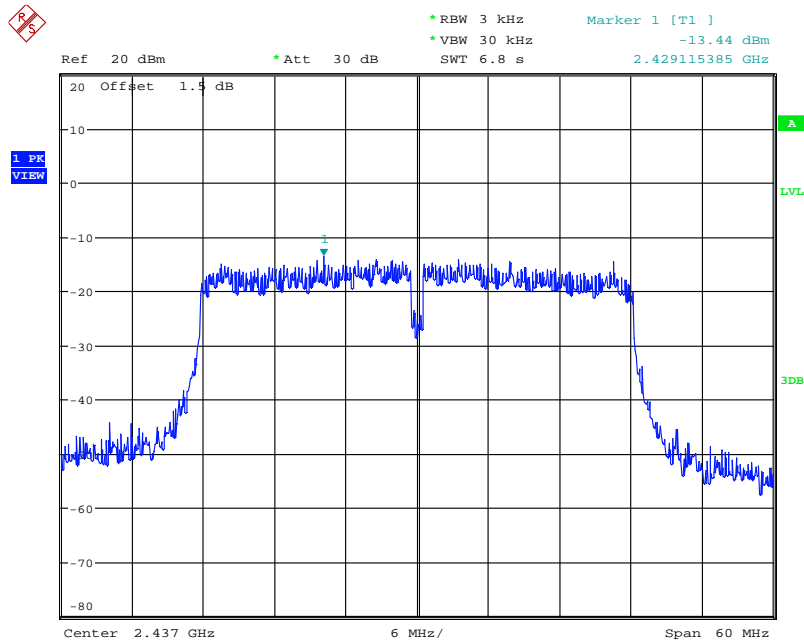


Date: 15.AUG.2014 18:36:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1

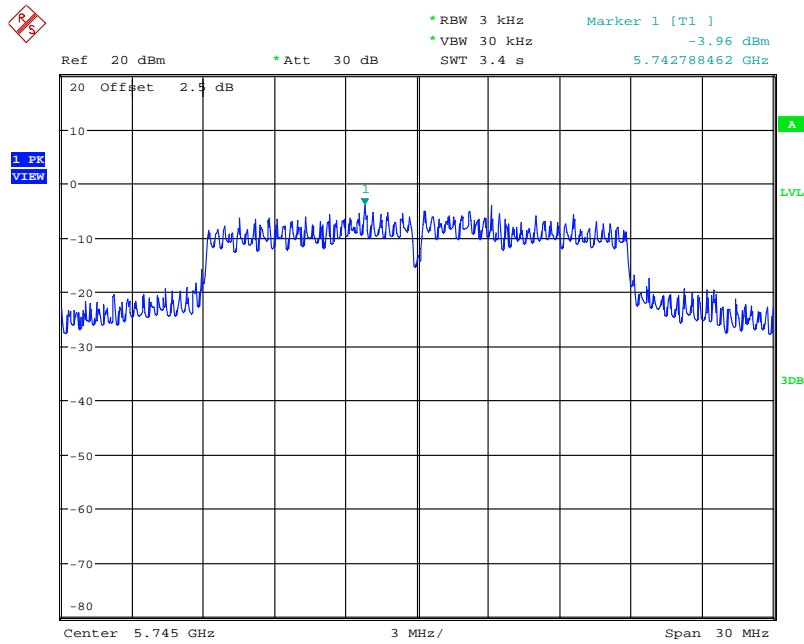


Date: 15.AUG.2014 19:55:49

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 2

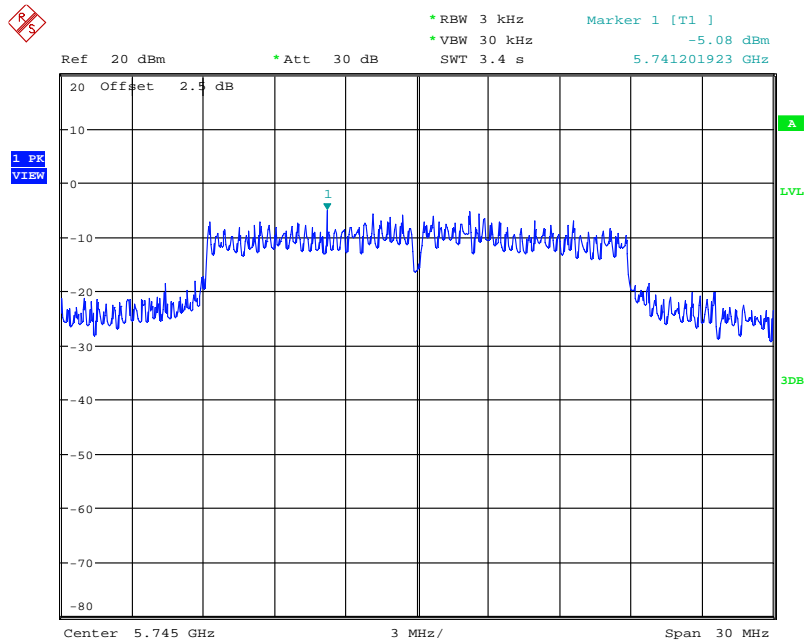


Date: 15.AUG.2014 19:56:48

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 1

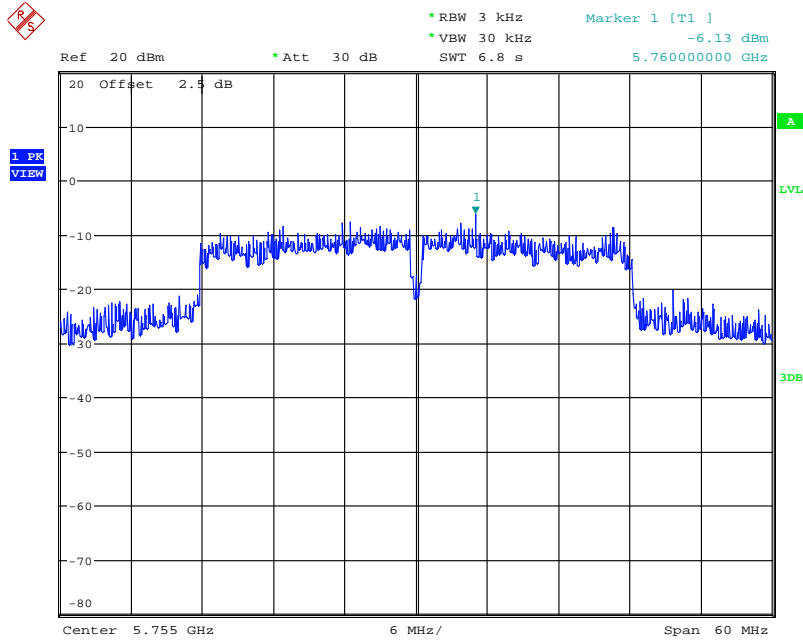


Date: 15.AUG.2014 19:59:02

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 2

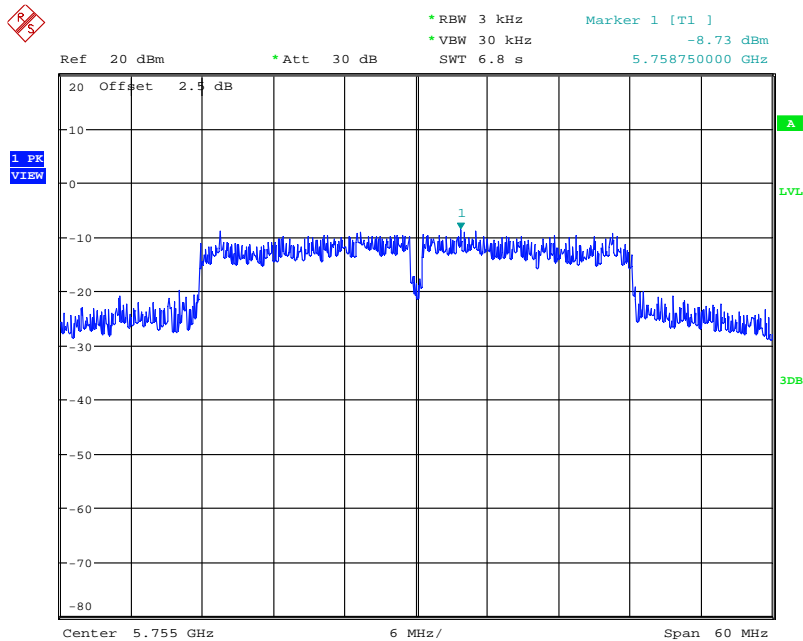


Date: 15.AUG.2014 19:58:13

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

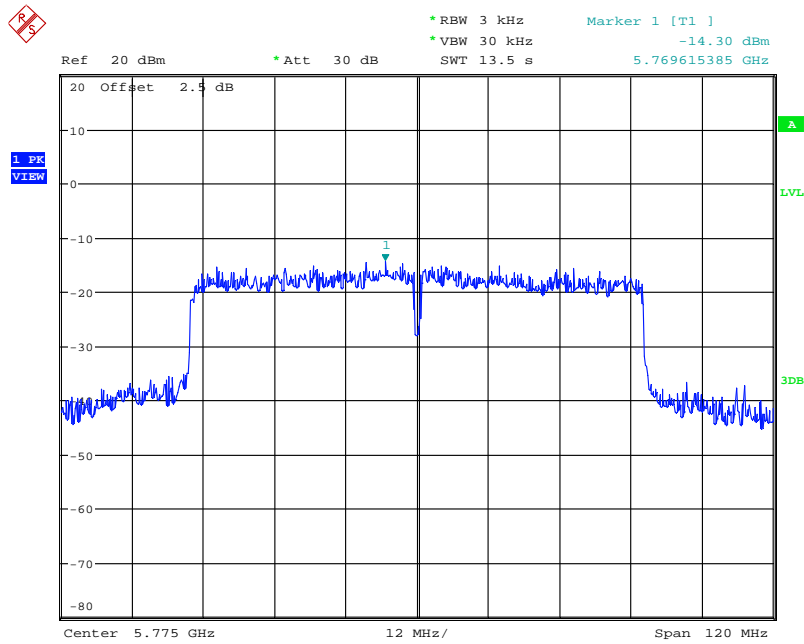


Date: 15.AUG.2014 20:04:18

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

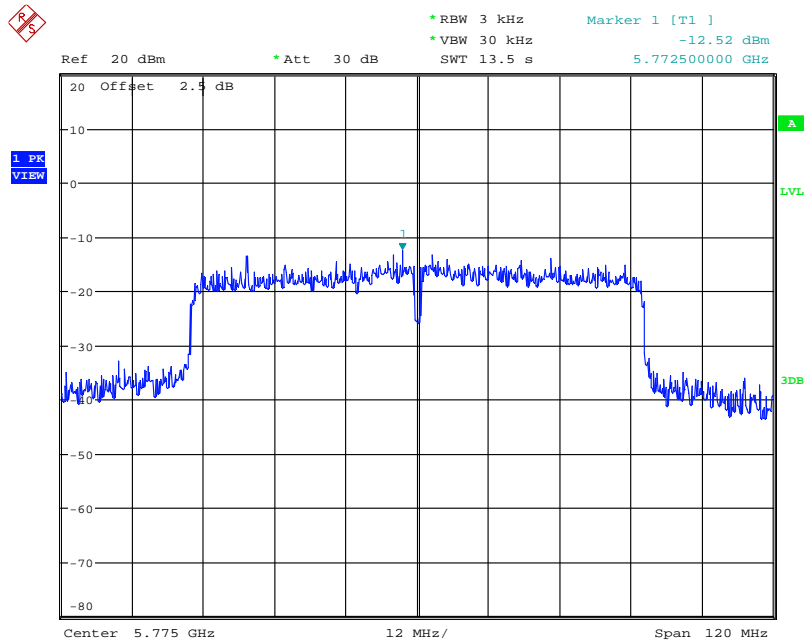


Date: 15.AUG.2014 20:02:51

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

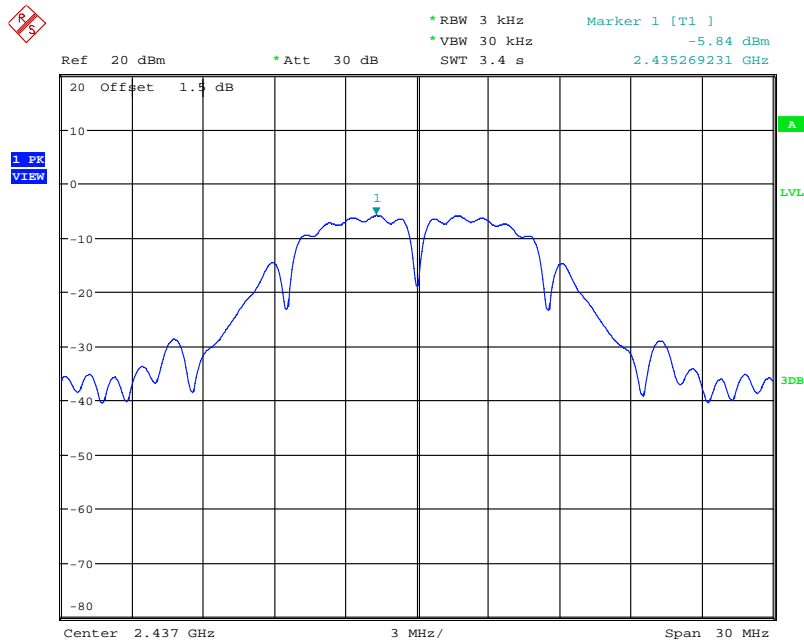


Date: 15.AUG.2014 18:12:35

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

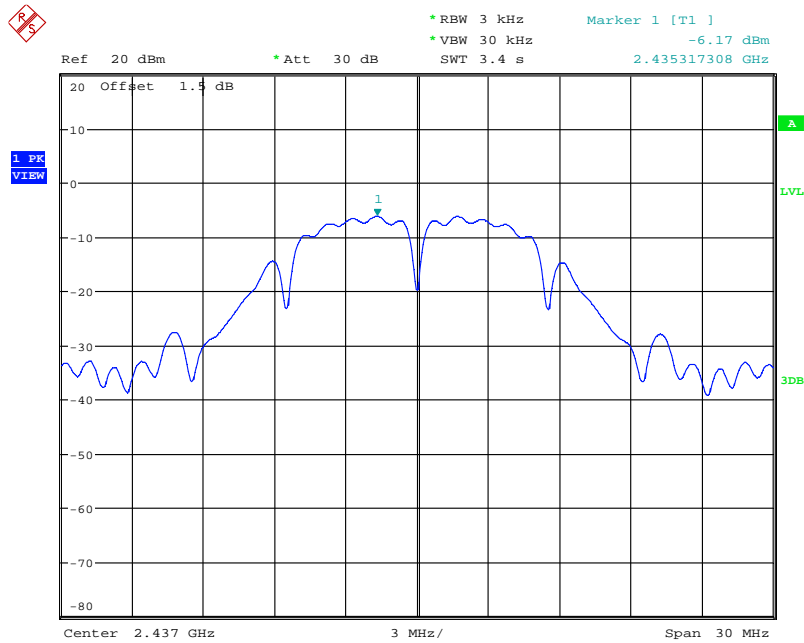


Date: 15.AUG.2014 18:14:24

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

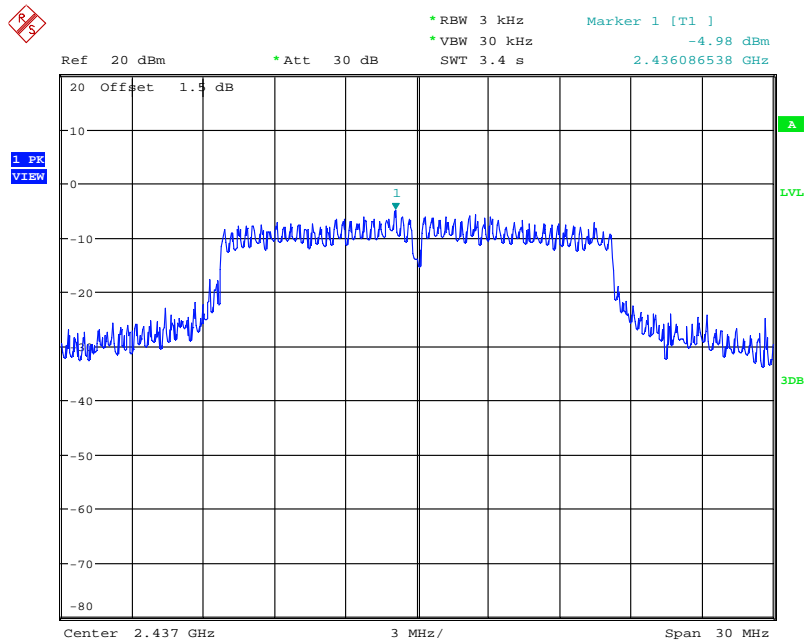

Date: 15.AUG.2014 18:20:09


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

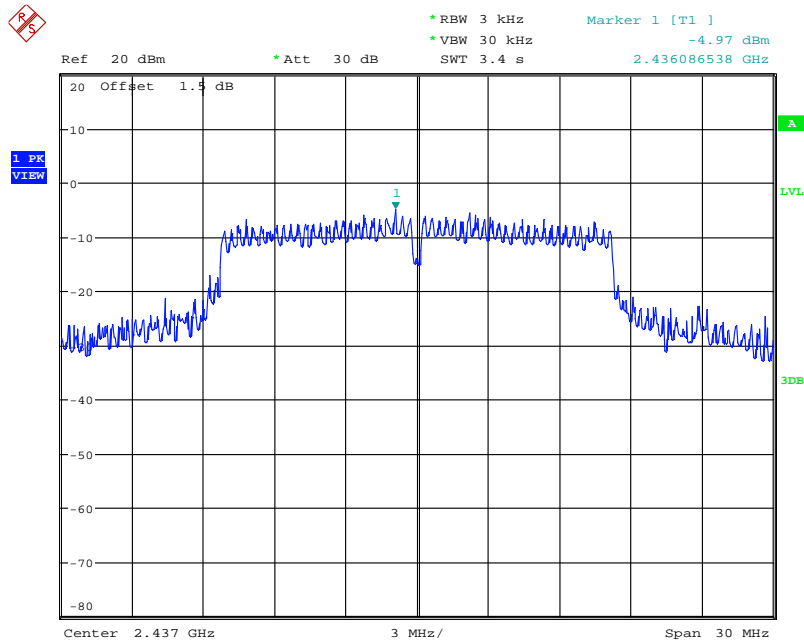

Date: 15.AUG.2014 18:19:17




Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 1

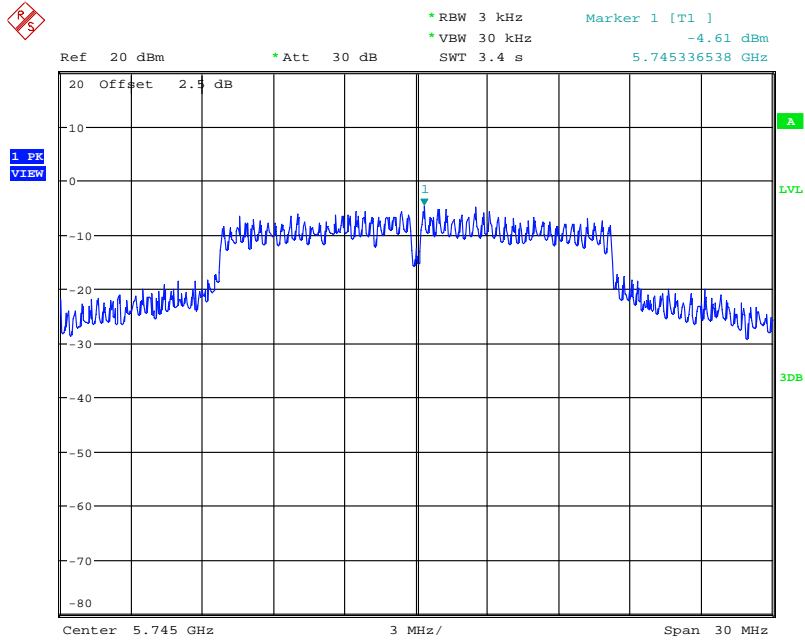

Date: 15.AUG.2014 19:46:35

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 2

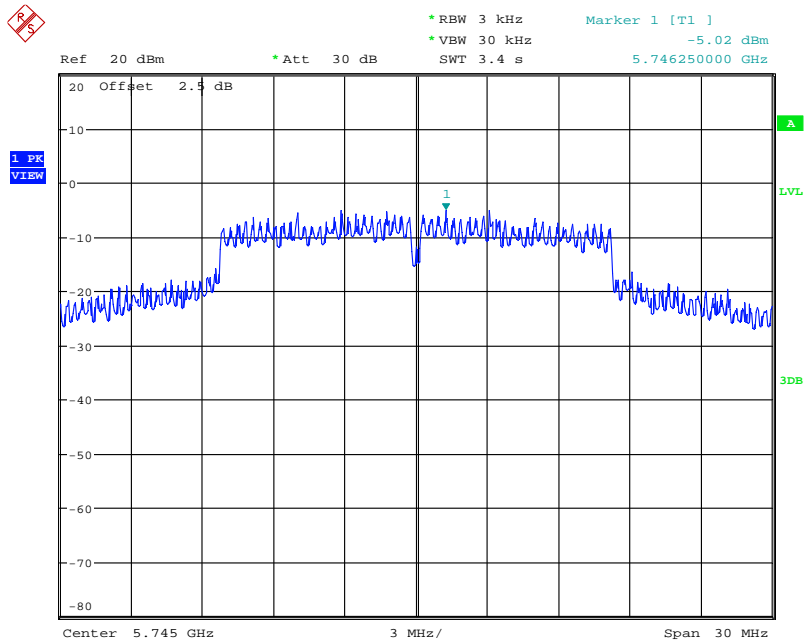

Date: 15.AUG.2014 19:45:23

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameters | Setting |
|---------------------|----------------------------|
| Attenuation | Auto |
| Span Frequency | > 6dB Bandwidth |
| RBW | 100kHz |
| VBW | $\geq 3 \times \text{RBW}$ |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

| | | | |
|----------------------|-----------|-----------------------|-----------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11n/ac |

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 17.56 | 17.62 | 500 | Complies |
| 6 | 2437 MHz | 17.75 | 23.07 | 500 | Complies |
| 11 | 2462 MHz | 17.62 | 17.62 | 500 | Complies |

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3 | 2422 MHz | 36.41 | 36.02 | 500 | Complies |
| 6 | 2437 MHz | 36.41 | 36.02 | 500 | Complies |
| 9 | 2452 MHz | 36.41 | 36.02 | 500 | Complies |

For 5GHz Band
Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 15.00 | 30.83 | 500 | Complies |
| 157 | 5785 MHz | 17.50 | 31.02 | 500 | Complies |
| 165 | 5825 MHz | 17.17 | 30.70 | 500 | Complies |

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151 | 5755 MHz | 34.48 | 64.23 | 500 | Complies |
| 159 | 5795 MHz | 34.48 | 63.58 | 500 | Complies |

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 155 | 5775 MHz | 71.79 | 75.89 | 500 | Complies |

| | | | |
|----------------------|-----------|-----------------------|-------------------|
| Temperature | 20°C | Humidity | 53% |
| Test Engineer | Jim Huang | Configurations | IEEE 802.11 a/b/g |

Configuration IEEE 802.11b / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 10.06 | 12.24 | 500 | Complies |
| 6 | 2437 MHz | 10.12 | 14.16 | 500 | Complies |
| 11 | 2462 MHz | 10.00 | 12.17 | 500 | Complies |

Configuration IEEE 802.11g / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 16.41 | 16.41 | 500 | Complies |
| 6 | 2437 MHz | 16.41 | 22.30 | 500 | Complies |
| 11 | 2462 MHz | 16.47 | 16.47 | 500 | Complies |


Configuration IEEE 802.11a / Chain 1 + Chain 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 16.28 | 30.32 | 500 | Complies |
| 157 | 5785 MHz | 16.34 | 30.76 | 500 | Complies |
| 165 | 5825 MHz | 16.41 | 31.34 | 500 | Complies |

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2

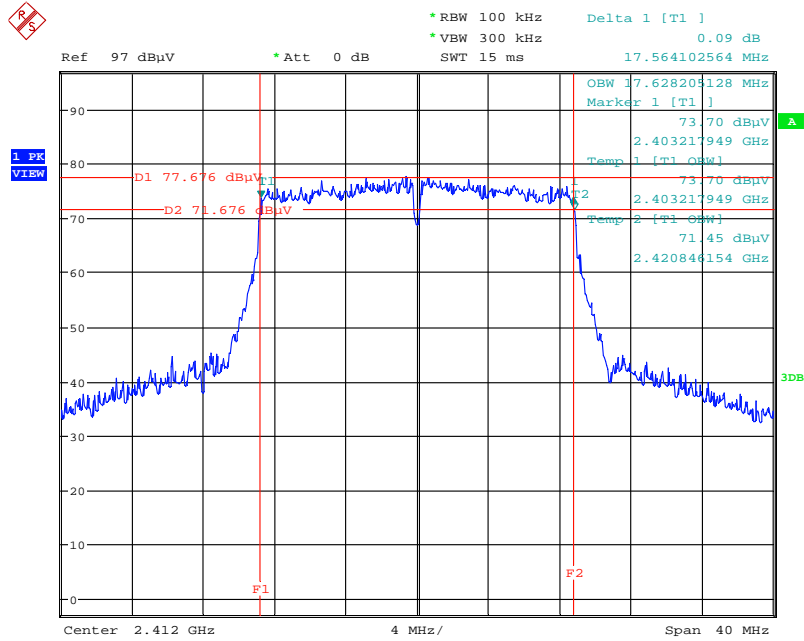


Date: 15.AUG.2014 17:51:24

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2

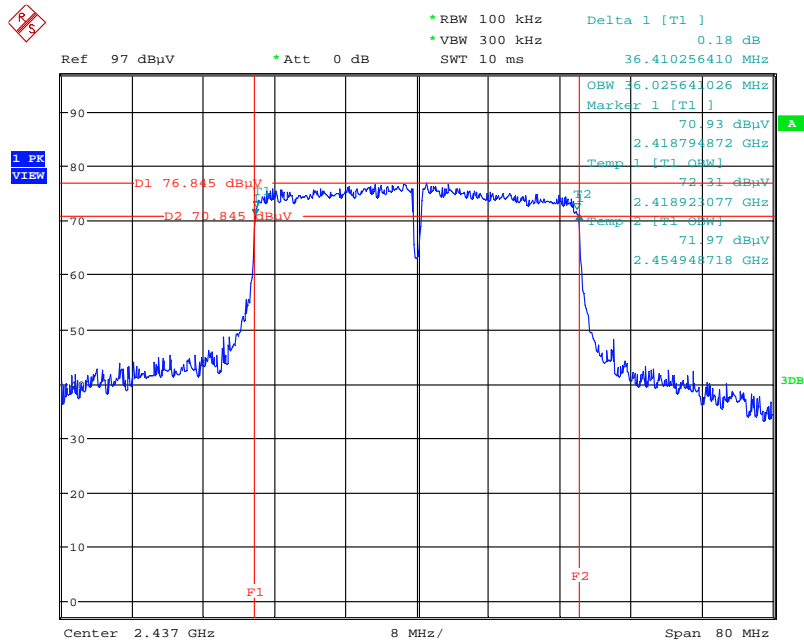


Date: 15.AUG.2014 17:58:56

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1 + Chain 2

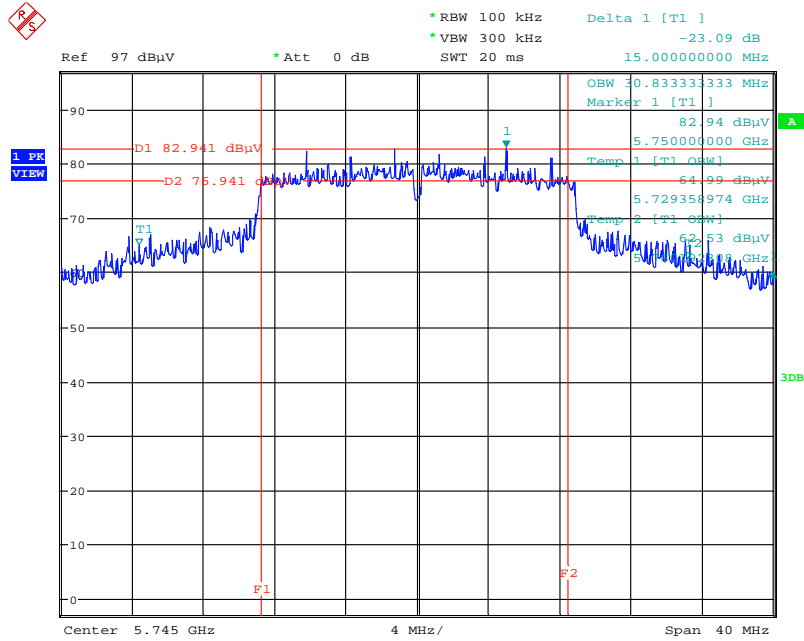


Date: 15.AUG.2014 20:10:45

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755MHz / Chain 1 + Chain 2

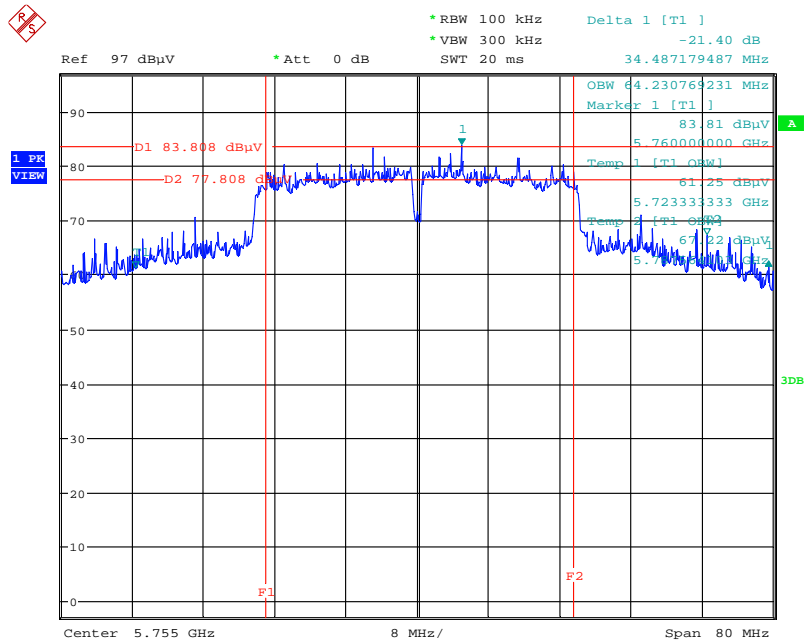


Date: 15.AUG.2014 20:14:50

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2

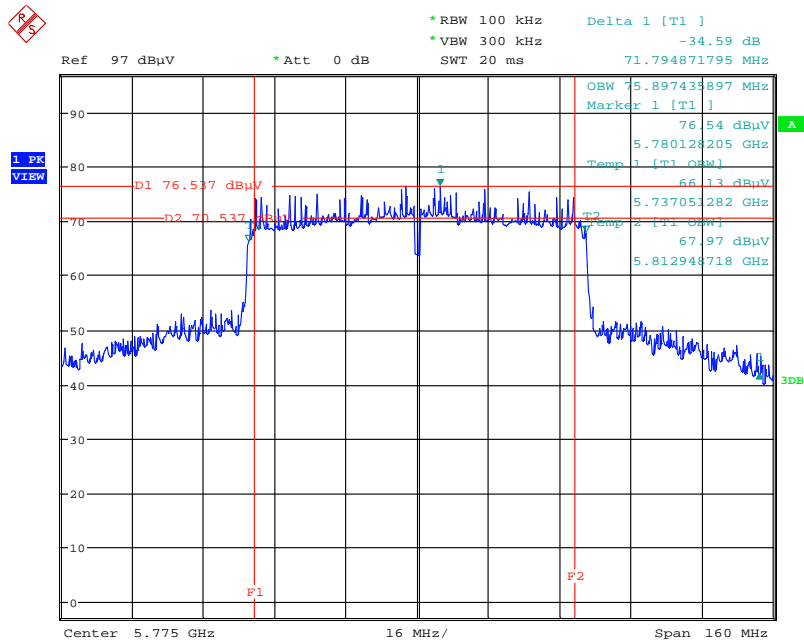


Date: 15.AUG.2014 20:06:05

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2

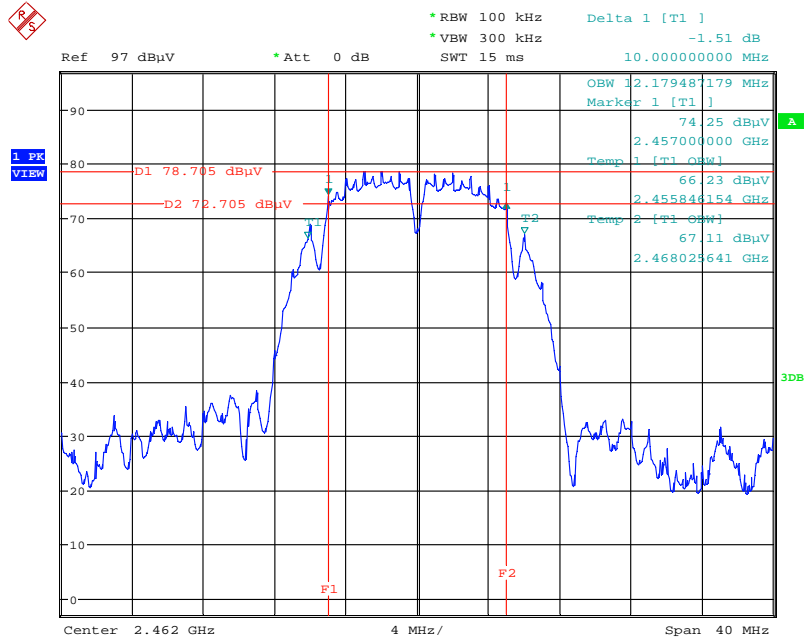


Date: 15.AUG.2014 17:45:33

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2

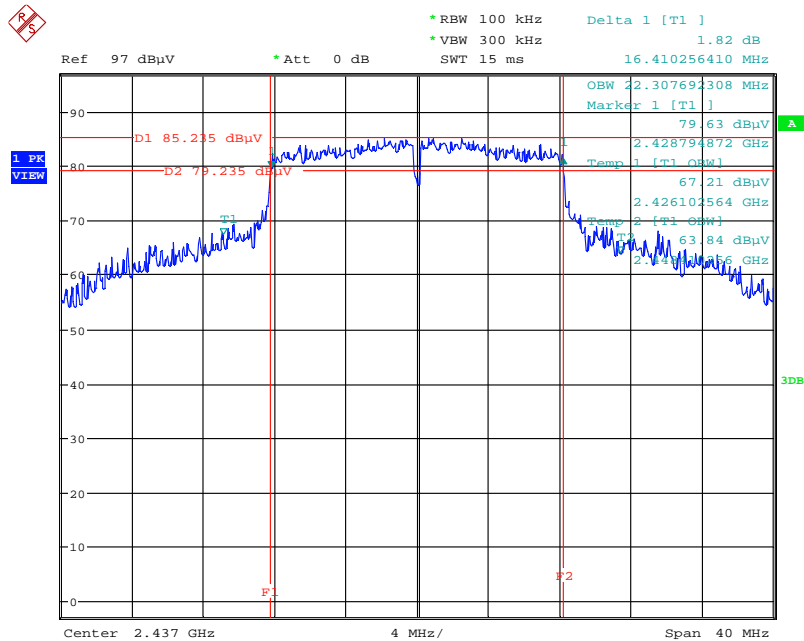

Date: 15.AUG.2014 17:48:36

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 1 + Chain 2

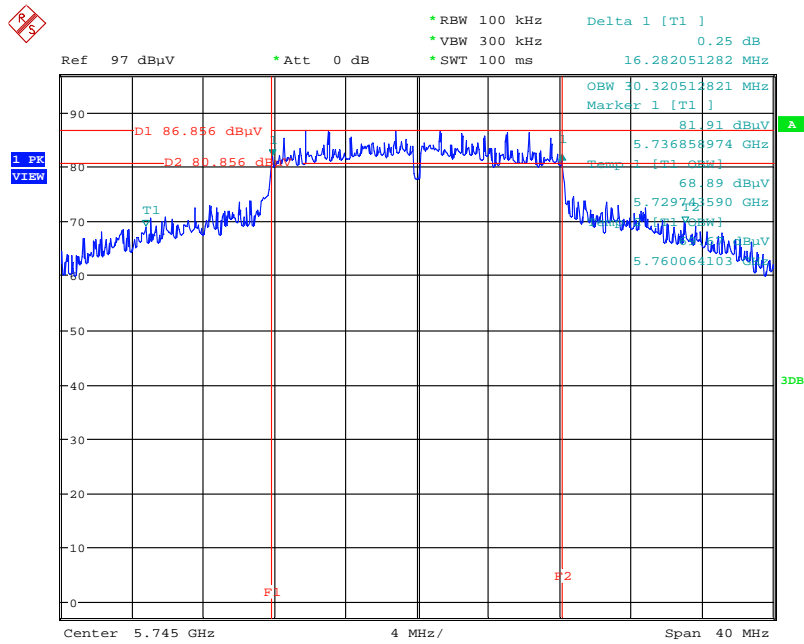

Date: 15.AUG.2014 20:45:59

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RBW / VBW (Emission in restricted band) | 1MHz / 3MHz for Peak, 1MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak |


| Receiver Parameter | Setting |
|------------------------|--------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1GHz / RBW 120kHz for QP |

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

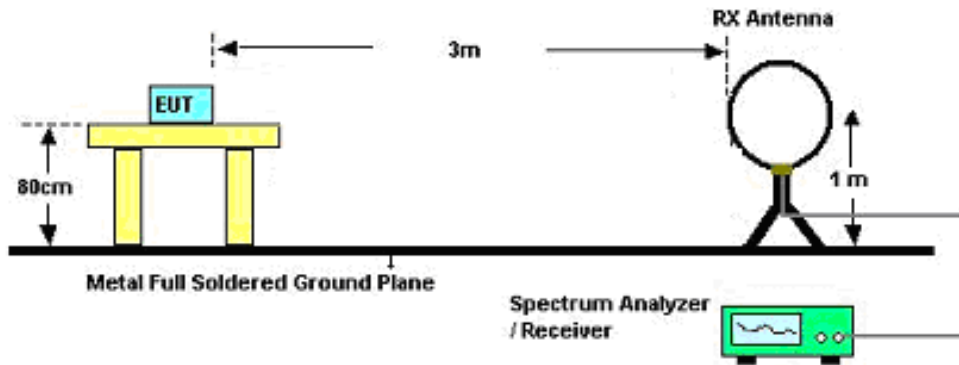

For Radiated Emissions: 30MHz~1GHz

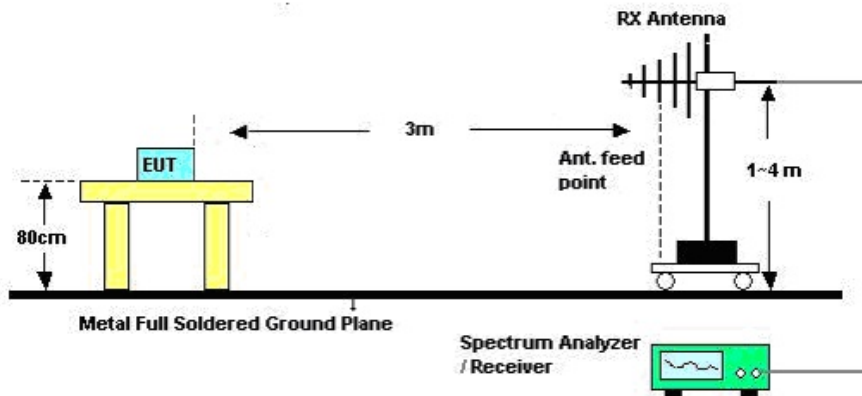

For Radiated Emissions: Above 1GHz

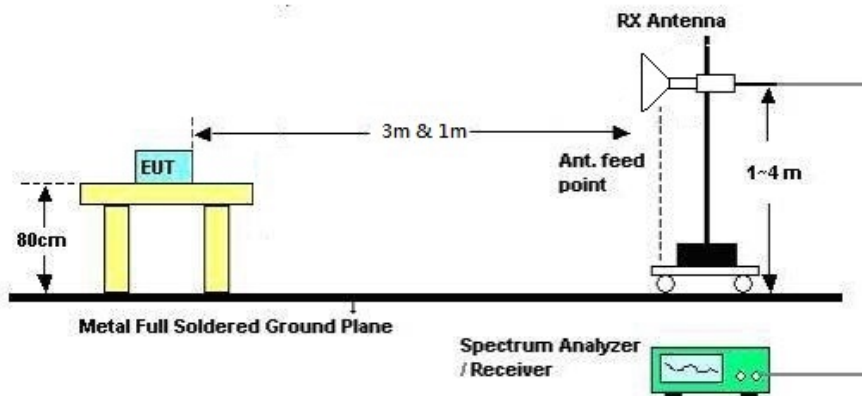

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|---------------|---------------|----------------|-----|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | CTX |
| Test Date | Aug. 20, 2014 | | |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


| | | | |
|---------------|---------|----------------|-----|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | CTX |
| Test Mode | Mode 3 | | |

Horizontal

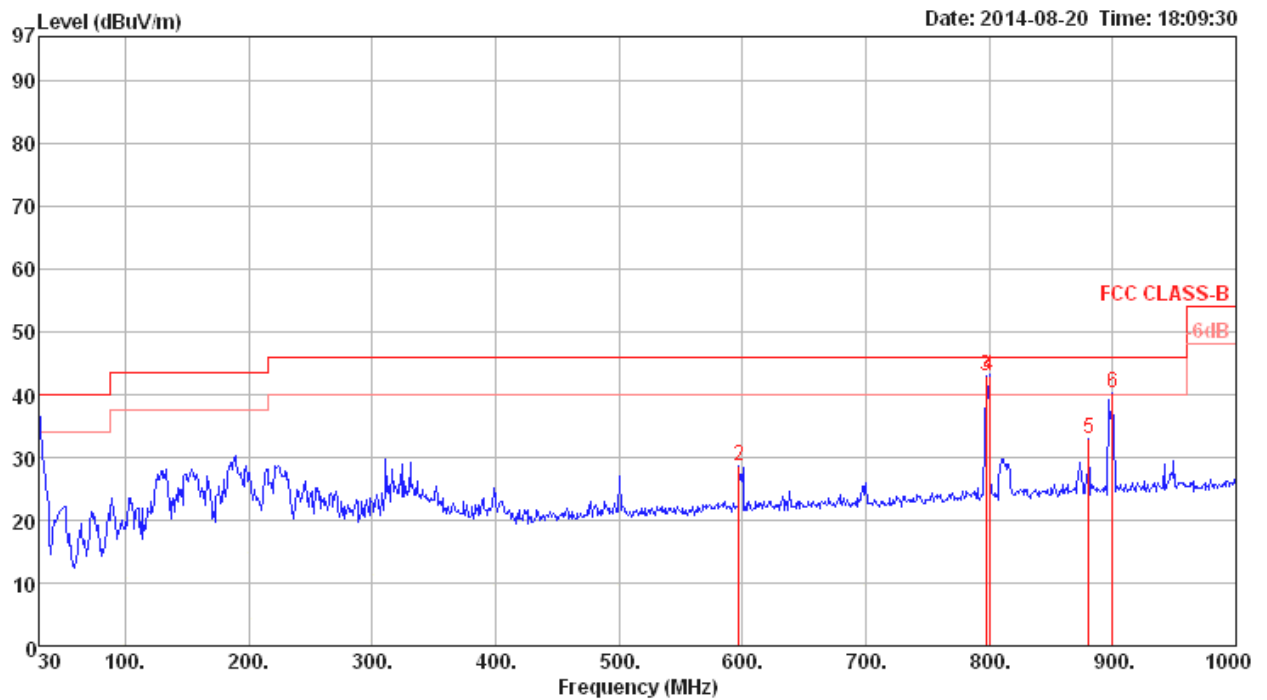

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------------|--------|-------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 30.00 | 36.55 | 40.00 | -3.45 | 44.98 | 0.61 | 18.76 | 27.80 | 100 | 0 | HORIZONTAL |
| 2 | 597.45 | 28.59 | 46.00 | -17.41 | 35.14 | 2.81 | 18.74 | 28.10 | 100 | 0 | HORIZONTAL |
| 3 | 797.27 | 42.95 | 46.00 | -3.05 | 47.59 | 3.22 | 19.75 | 27.61 | 100 | 0 | HORIZONTAL |
| 4 | 800.18 | 42.83 | 46.00 | -3.17 | 47.44 | 3.22 | 19.77 | 27.60 | 100 | 0 | HORIZONTAL |
| 5 | 880.69 | 32.98 | 46.00 | -13.02 | 36.56 | 3.48 | 20.38 | 27.44 | 100 | 0 | HORIZONTAL |
| 6 | 900.09 | 40.14 | 46.00 | -5.86 | 43.46 | 3.55 | 20.53 | 27.40 | 100 | 0 | HORIZONTAL |

Vertical

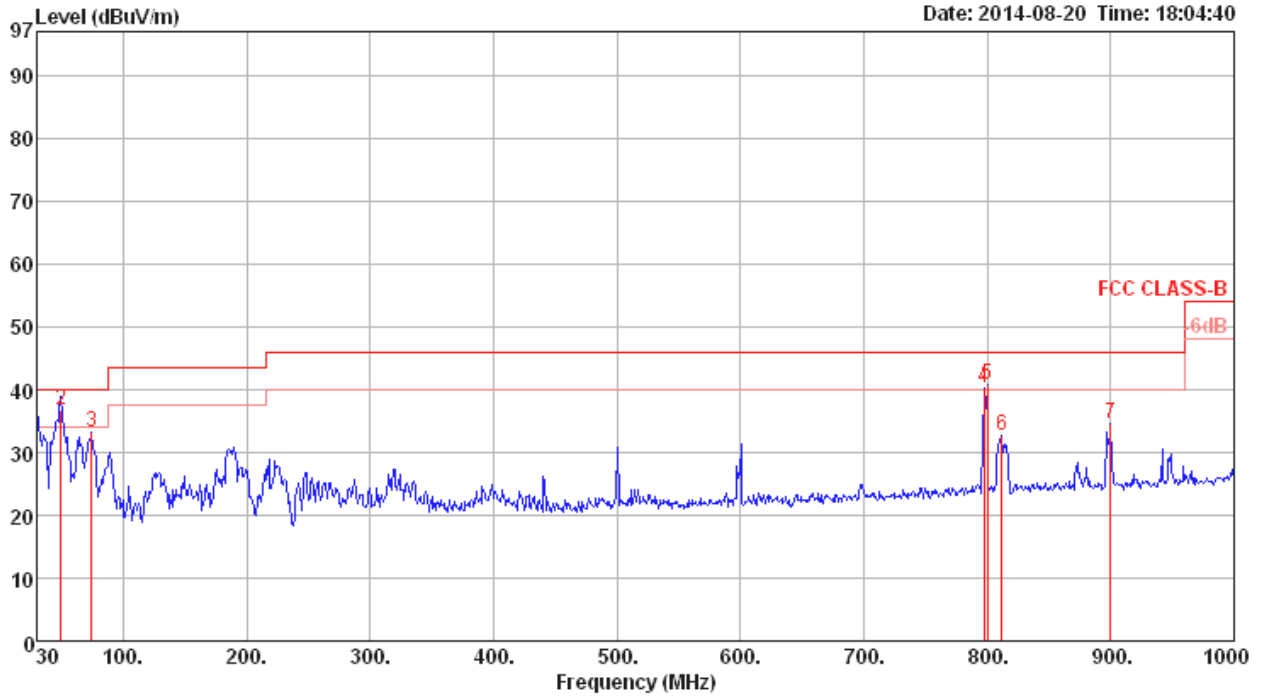

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|-------|---------|--------|--------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | Remark | cm | deg | |
| 1 | 30.00 | 36.91 | 40.00 | -3.09 | 45.34 | 0.61 | 18.76 | 27.80 | Peak | 400 | 0 | VERTICAL |
| 2 | 49.40 | 36.86 | 40.00 | -3.14 | 54.98 | 0.85 | 8.83 | 27.80 | QP | 121 | 185 | VERTICAL |
| 3 | 74.62 | 33.22 | 40.00 | -6.78 | 53.11 | 0.93 | 6.88 | 27.70 | Peak | 400 | 0 | VERTICAL |
| 4 | 797.27 | 40.18 | 46.00 | -5.82 | 44.82 | 3.22 | 19.75 | 27.61 | Peak | 400 | 0 | VERTICAL |
| 5 | 800.18 | 40.70 | 46.00 | -5.30 | 45.31 | 3.22 | 19.77 | 27.60 | Peak | 400 | 0 | VERTICAL |
| 6 | 811.82 | 32.62 | 46.00 | -13.38 | 37.08 | 3.26 | 19.86 | 27.58 | Peak | 400 | 0 | VERTICAL |
| 7 | 900.09 | 34.53 | 46.00 | -11.47 | 37.85 | 3.55 | 20.53 | 27.40 | Peak | 400 | 0 | VERTICAL |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4823.52 | 44.92 | 74.00 | -29.08 | 40.86 | 5.87 | 33.39 | 35.20 | Peak | 100 | 313 | HORIZONTAL |
| 2 | 4823.71 | 32.05 | 54.00 | -21.95 | 27.99 | 5.87 | 33.39 | 35.20 | Average | 145 | 313 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4823.04 | 32.23 | 54.00 | -21.77 | 28.17 | 5.87 | 33.39 | 35.20 | Average | 100 | 150 | VERTICAL |
| 2 | 4823.09 | 45.28 | 74.00 | -28.72 | 41.22 | 5.87 | 33.39 | 35.20 | Peak | 100 | 150 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4873.72 | 32.57 | 54.00 | -21.43 | 28.37 | 5.92 | 33.48 | 35.20 | Average | 100 | 57 | HORIZONTAL |
| 2 | 4874.53 | 45.35 | 74.00 | -28.65 | 41.15 | 5.92 | 33.48 | 35.20 | Peak | 100 | 57 | HORIZONTAL |
| 3 | 7310.43 | 36.98 | 54.00 | -17.02 | 28.77 | 7.13 | 36.51 | 35.43 | Average | 100 | 142 | HORIZONTAL |
| 4 | 7310.50 | 49.00 | 74.00 | -25.00 | 40.79 | 7.13 | 36.51 | 35.43 | Peak | 100 | 142 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4873.08 | 32.51 | 54.00 | -21.49 | 28.31 | 5.92 | 33.48 | 35.20 | Average | 100 | 103 | VERTICAL |
| 2 | 4874.86 | 47.53 | 74.00 | -26.47 | 43.33 | 5.92 | 33.48 | 35.20 | Peak | 100 | 103 | VERTICAL |
| 3 | 7311.58 | 41.28 | 54.00 | -12.72 | 33.07 | 7.13 | 36.51 | 35.43 | Average | 100 | 231 | VERTICAL |
| 4 | 7311.64 | 50.62 | 74.00 | -23.38 | 42.41 | 7.13 | 36.51 | 35.43 | Peak | 100 | 231 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.88 | 32.70 | 54.00 | -21.30 | 28.35 | 5.97 | 33.58 | 35.20 | Average | 100 | 321 | HORIZONTAL |
| 2 | 4924.76 | 45.94 | 74.00 | -28.06 | 41.59 | 5.97 | 33.58 | 35.20 | Peak | 100 | 321 | HORIZONTAL |
| 3 | 7385.98 | 48.55 | 74.00 | -25.45 | 40.23 | 7.17 | 36.61 | 35.46 | Peak | 100 | 168 | HORIZONTAL |
| 4 | 7386.23 | 34.94 | 54.00 | -19.06 | 26.62 | 7.17 | 36.61 | 35.46 | Average | 100 | 168 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.02 | 46.07 | 74.00 | -27.93 | 41.72 | 5.97 | 33.58 | 35.20 | Peak | 100 | 226 | VERTICAL |
| 2 | 4924.72 | 33.15 | 54.00 | -20.85 | 28.80 | 5.97 | 33.58 | 35.20 | Average | 100 | 226 | VERTICAL |
| 3 | 7385.18 | 37.11 | 54.00 | -16.89 | 28.79 | 7.17 | 36.61 | 35.46 | Average | 100 | 87 | VERTICAL |
| 4 | 7385.83 | 48.57 | 74.00 | -25.43 | 40.25 | 7.17 | 36.61 | 35.46 | Peak | 100 | 87 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4843.32 | 32.29 | 54.00 | -21.71 | 28.19 | 5.88 | 33.42 | 35.20 | Average | 100 | 268 | HORIZONTAL |
| 2 | 4844.96 | 45.38 | 74.00 | -28.62 | 41.28 | 5.88 | 33.42 | 35.20 | Peak | 100 | 268 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4843.00 | 32.06 | 54.00 | -21.94 | 27.96 | 5.88 | 33.42 | 35.20 | Average | 100 | 136 | VERTICAL |
| 2 | 4843.66 | 45.66 | 74.00 | -28.34 | 41.56 | 5.88 | 33.42 | 35.20 | Peak | 100 | 136 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4843.03 | 46.04 | 74.00 | -27.96 | 41.94 | 5.88 | 33.42 | 35.20 | Peak | 100 | 226 | HORIZONTAL |
| 2 | 4843.04 | 32.26 | 54.00 | -21.74 | 28.16 | 5.88 | 33.42 | 35.20 | Average | 100 | 226 | HORIZONTAL |
| 3 | 7265.01 | 47.91 | 74.00 | -26.09 | 39.78 | 7.11 | 36.43 | 35.41 | Peak | 100 | 357 | HORIZONTAL |
| 4 | 7266.99 | 34.73 | 54.00 | -19.27 | 26.60 | 7.11 | 36.43 | 35.41 | Average | 100 | 357 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4843.16 | 32.28 | 54.00 | -21.72 | 28.18 | 5.88 | 33.42 | 35.20 | Average | 100 | 156 | VERTICAL |
| 2 | 4844.67 | 45.48 | 74.00 | -28.52 | 41.38 | 5.88 | 33.42 | 35.20 | Peak | 100 | 156 | VERTICAL |
| 3 | 7265.07 | 48.69 | 74.00 | -25.31 | 40.56 | 7.11 | 36.43 | 35.41 | Peak | 100 | 270 | VERTICAL |
| 4 | 7266.93 | 34.86 | 54.00 | -19.14 | 26.73 | 7.11 | 36.43 | 35.41 | Average | 100 | 270 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4903.77 | 32.88 | 54.00 | -21.12 | 28.62 | 5.95 | 33.51 | 35.20 | Average | 100 | 278 | HORIZONTAL |
| 2 | 4904.10 | 46.51 | 74.00 | -27.49 | 42.25 | 5.95 | 33.51 | 35.20 | Peak | 100 | 278 | HORIZONTAL |
| 3 | 7355.66 | 35.14 | 54.00 | -18.86 | 26.86 | 7.16 | 36.56 | 35.44 | Average | 100 | 278 | HORIZONTAL |
| 4 | 7356.55 | 48.09 | 74.00 | -25.91 | 39.81 | 7.16 | 36.56 | 35.44 | Peak | 100 | 278 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4903.73 | 32.16 | 54.00 | -21.84 | 27.90 | 5.95 | 33.51 | 35.20 | Average | 100 | 84 | VERTICAL |
| 2 | 4904.74 | 46.41 | 74.00 | -27.59 | 42.15 | 5.95 | 33.51 | 35.20 | Peak | 100 | 84 | VERTICAL |
| 3 | 7355.46 | 48.19 | 74.00 | -25.81 | 39.91 | 7.16 | 36.56 | 35.44 | Peak | 100 | 227 | VERTICAL |
| 4 | 7356.58 | 35.25 | 54.00 | -18.75 | 26.97 | 7.16 | 36.56 | 35.44 | Average | 100 | 225 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11485.30 | 49.30 | 74.00 | -24.70 | 39.85 | 5.11 | 39.39 | 35.05 | Peak | 100 | 325 | HORIZONTAL |
| 2 | 11486.30 | 36.90 | 54.00 | -17.10 | 27.45 | 5.11 | 39.39 | 35.05 | Average | 100 | 325 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11488.30 | 36.69 | 54.00 | -17.31 | 27.24 | 5.11 | 39.39 | 35.05 | Average | 100 | 190 | VERTICAL |
| 2 | 11489.80 | 48.43 | 74.00 | -25.57 | 38.98 | 5.11 | 39.39 | 35.05 | Peak | 100 | 190 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11569.10 | 37.62 | 54.00 | -16.38 | 28.11 | 5.13 | 39.44 | 35.06 | Average | 100 | 117 | HORIZONTAL |
| 2 | 11575.60 | 48.55 | 74.00 | -25.45 | 39.03 | 5.14 | 39.44 | 35.06 | Peak | 100 | 117 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11574.50 | 38.00 | 54.00 | -16.00 | 28.48 | 5.14 | 39.44 | 35.06 | Average | 100 | 299 | VERTICAL |
| 2 | 11586.40 | 48.37 | 74.00 | -25.63 | 38.84 | 5.14 | 39.45 | 35.06 | Peak | 100 | 299 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11653.40 | 50.23 | 74.00 | -23.77 | 40.66 | 5.16 | 39.49 | 35.08 | Peak | 100 | 327 | HORIZONTAL |
| 2 | 11656.70 | 39.01 | 54.00 | -14.99 | 29.44 | 5.16 | 39.49 | 35.08 | Average | 100 | 327 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11638.80 | 49.97 | 74.00 | -24.03 | 40.40 | 5.16 | 39.48 | 35.07 | Peak | 100 | 12 | VERTICAL |
| 2 | 11651.30 | 39.26 | 54.00 | -14.74 | 29.69 | 5.16 | 39.49 | 35.08 | Average | 100 | 12 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11497.10 | 48.42 | 74.00 | -25.58 | 38.96 | 5.12 | 39.39 | 35.05 | Peak | 100 | 99 | HORIZONTAL |
| 2 | 11514.30 | 37.39 | 54.00 | -16.61 | 27.92 | 5.12 | 39.40 | 35.05 | Average | 100 | 99 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11516.20 | 49.12 | 74.00 | -24.88 | 39.64 | 5.12 | 39.41 | 35.05 | Peak | 100 | 284 | VERTICAL |
| 2 | 11519.00 | 36.86 | 54.00 | -17.14 | 27.37 | 5.13 | 39.41 | 35.05 | Average | 100 | 284 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11589.80 | 37.69 | 54.00 | -16.31 | 28.16 | 5.14 | 39.45 | 35.06 | Average | 100 | 302 | HORIZONTAL |
| 2 | 11600.20 | 48.95 | 74.00 | -25.05 | 39.41 | 5.15 | 39.46 | 35.07 | Peak | 100 | 302 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11586.30 | 49.38 | 74.00 | -24.62 | 39.85 | 5.14 | 39.45 | 35.06 | Peak | 100 | 71 | VERTICAL |
| 2 | 11589.70 | 38.00 | 54.00 | -16.00 | 28.47 | 5.14 | 39.45 | 35.06 | Average | 100 | 71 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11529.20 | 48.50 | 74.00 | -25.50 | 39.01 | 5.13 | 39.41 | 35.05 | Peak | 100 | 78 | HORIZONTAL |
| 2 | 11575.00 | 36.77 | 54.00 | -17.23 | 27.25 | 5.14 | 39.44 | 35.06 | Average | 100 | 78 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11569.80 | 49.46 | 74.00 | -24.54 | 39.94 | 5.14 | 39.44 | 35.06 | Peak | 100 | 226 | VERTICAL |
| 2 | 11575.00 | 36.65 | 54.00 | -17.35 | 27.13 | 5.14 | 39.44 | 35.06 | Average | 100 | 226 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--------------------------------------|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11b CH 1 / Chain 1 +Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4823.81 | 46.32 | 74.00 | -27.68 | 42.26 | 5.87 | 33.39 | 35.20 | Peak | 100 | 30 | HORIZONTAL |
| 2 | 4824.02 | 33.53 | 54.00 | -20.47 | 29.47 | 5.87 | 33.39 | 35.20 | Average | 100 | 30 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4824.08 | 38.06 | 54.00 | -15.94 | 34.00 | 5.87 | 33.39 | 35.20 | Average | 100 | 287 | VERTICAL |
| 2 | 4824.12 | 47.47 | 74.00 | -26.53 | 43.41 | 5.87 | 33.39 | 35.20 | Peak | 100 | 287 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---------------------------------------|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11b CH 6 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4873.93 | 48.03 | 74.00 | -25.97 | 43.83 | 5.92 | 33.48 | 35.20 | Peak | 100 | 280 | HORIZONTAL |
| 2 | 4874.03 | 40.68 | 54.00 | -13.32 | 36.48 | 5.92 | 33.48 | 35.20 | Average | 100 | 280 | HORIZONTAL |
| 3 | 7309.24 | 41.92 | 54.00 | -12.08 | 33.71 | 7.13 | 36.51 | 35.43 | Average | 100 | 279 | HORIZONTAL |
| 4 | 7309.56 | 51.24 | 74.00 | -22.76 | 43.03 | 7.13 | 36.51 | 35.43 | Peak | 100 | 279 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4873.92 | 52.34 | 74.00 | -21.66 | 48.14 | 5.92 | 33.48 | 35.20 | Peak | 100 | 266 | VERTICAL |
| 2 | 4874.00 | 50.10 | 54.00 | -3.90 | 45.90 | 5.92 | 33.48 | 35.20 | Average | 100 | 266 | VERTICAL |
| 3 | 7308.28 | 52.99 | 74.00 | -21.01 | 44.78 | 7.13 | 36.51 | 35.43 | Peak | 100 | 289 | VERTICAL |
| 4 | 7309.24 | 45.53 | 54.00 | -8.47 | 37.32 | 7.13 | 36.51 | 35.43 | Average | 100 | 289 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11b CH 11 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.82 | 46.98 | 74.00 | -27.02 | 42.63 | 5.97 | 33.58 | 35.20 | Peak | 100 | 256 | HORIZONTAL |
| 2 | 4924.03 | 36.72 | 54.00 | -17.28 | 32.37 | 5.97 | 33.58 | 35.20 | Average | 100 | 256 | HORIZONTAL |
| 3 | 7386.38 | 48.45 | 74.00 | -25.55 | 40.13 | 7.17 | 36.61 | 35.46 | Peak | 100 | 160 | HORIZONTAL |
| 4 | 7386.97 | 35.58 | 74.00 | -38.42 | 27.26 | 7.17 | 36.61 | 35.46 | Peak | 100 | 160 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.48 | 50.21 | 74.00 | -23.79 | 45.86 | 5.97 | 33.58 | 35.20 | Peak | 100 | 167 | VERTICAL |
| 2 | 4924.03 | 39.55 | 54.00 | -14.45 | 35.20 | 5.97 | 33.58 | 35.20 | Average | 100 | 167 | VERTICAL |
| 3 | 7386.66 | 37.30 | 54.00 | -16.70 | 28.98 | 7.17 | 36.61 | 35.46 | Average | 100 | 284 | VERTICAL |
| 4 | 7386.67 | 49.13 | 74.00 | -24.87 | 40.81 | 7.17 | 36.61 | 35.46 | Peak | 100 | 284 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---------------------------------------|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11g CH 1 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4823.18 | 45.29 | 74.00 | -28.71 | 41.23 | 5.87 | 33.39 | 35.20 | Peak | 100 | 315 | HORIZONTAL |
| 2 | 4823.26 | 31.76 | 54.00 | -22.24 | 27.70 | 5.87 | 33.39 | 35.20 | Average | 100 | 315 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4823.26 | 45.04 | 74.00 | -28.96 | 40.98 | 5.87 | 33.39 | 35.20 | Peak | 100 | 113 | VERTICAL |
| 2 | 4823.58 | 32.11 | 54.00 | -21.89 | 28.05 | 5.87 | 33.39 | 35.20 | Average | 100 | 113 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---------------------------------------|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11g CH 6 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|----------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 4873.61 | 32.85 | 54.00 | -21.15 | 28.65 | 5.92 | 33.48 | 35.20 | Average | 100 | 96 HORIZONTAL |
| 2 | 4874.40 | 45.76 | 74.00 | -28.24 | 41.56 | 5.92 | 33.48 | 35.20 | Peak | 100 | 96 HORIZONTAL |
| 3 | 7310.25 | 48.60 | 74.00 | -25.40 | 40.39 | 7.13 | 36.51 | 35.43 | Peak | 100 | 197 HORIZONTAL |
| 4 | 7311.02 | 37.64 | 54.00 | -16.36 | 29.43 | 7.13 | 36.51 | 35.43 | Average | 100 | 197 HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|--------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 4873.15 | 45.77 | 74.00 | -28.23 | 41.57 | 5.92 | 33.48 | 35.20 | Peak | 100 | 155 VERTICAL |
| 2 | 4873.83 | 32.93 | 54.00 | -21.07 | 28.73 | 5.92 | 33.48 | 35.20 | Average | 100 | 155 VERTICAL |
| 3 | 7311.13 | 39.01 | 54.00 | -14.99 | 30.80 | 7.13 | 36.51 | 35.43 | Average | 100 | 319 VERTICAL |
| 4 | 7311.72 | 49.23 | 74.00 | -24.77 | 41.02 | 7.13 | 36.51 | 35.43 | Peak | 100 | 319 VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11g CH 11 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.54 | 32.90 | 54.00 | -21.10 | 28.55 | 5.97 | 33.58 | 35.20 | Average | 100 | 100 | HORIZONTAL |
| 2 | 4924.53 | 45.93 | 74.00 | -28.07 | 41.58 | 5.97 | 33.58 | 35.20 | Peak | 100 | 100 | HORIZONTAL |
| 3 | 7385.71 | 47.77 | 74.00 | -26.23 | 39.45 | 7.17 | 36.61 | 35.46 | Peak | 100 | 183 | HORIZONTAL |
| 4 | 7386.94 | 35.39 | 54.00 | -18.61 | 27.07 | 7.17 | 36.61 | 35.46 | Average | 100 | 183 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 4923.02 | 46.82 | 74.00 | -27.18 | 42.47 | 5.97 | 33.58 | 35.20 | Peak | 100 | 184 | VERTICAL |
| 2 | 4923.31 | 33.04 | 54.00 | -20.96 | 28.69 | 5.97 | 33.58 | 35.20 | Average | 100 | 184 | VERTICAL |
| 3 | 7385.00 | 48.16 | 74.00 | -25.84 | 39.84 | 7.17 | 36.61 | 35.46 | Peak | 100 | 306 | VERTICAL |
| 4 | 7386.41 | 35.32 | 54.00 | -18.68 | 27.00 | 7.17 | 36.61 | 35.46 | Average | 100 | 306 | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11a CH 149 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11491.10 | 36.67 | 54.00 | -17.33 | 27.22 | 5.11 | 39.39 | 35.05 | Average | 100 | 125 | HORIZONTAL |
| 2 | 11495.80 | 47.87 | 74.00 | -26.13 | 38.41 | 5.12 | 39.39 | 35.05 | Peak | 100 | 125 | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11488.60 | 49.12 | 74.00 | -24.88 | 39.67 | 5.11 | 39.39 | 35.05 | Peak | 100 | 249 | VERTICAL |
| 2 | 11491.40 | 37.14 | 54.00 | -16.86 | 27.69 | 5.11 | 39.39 | 35.05 | Average | 100 | 249 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11a CH 157 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11571.92 | 38.24 | 54.00 | -15.76 | 28.72 | 5.14 | 39.44 | 35.06 | Average | 100 | 346 | HORIZONTAL |
| 2 | 11577.76 | 49.59 | 74.00 | -24.41 | 40.07 | 5.14 | 39.44 | 35.06 | Peak | 100 | 346 | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11572.48 | 49.27 | 74.00 | -24.73 | 39.75 | 5.14 | 39.44 | 35.06 | Peak | 100 | 12 | VERTICAL |
| 2 | 11574.88 | 37.95 | 54.00 | -16.05 | 28.43 | 5.14 | 39.44 | 35.06 | Average | 100 | 12 | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11a CH 165 / Chain 1 + Chain 2 |
| Test Date | Jul. 29, 2014 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11651.36 | 38.10 | 54.00 | -15.90 | 28.53 | 5.16 | 39.49 | 35.08 | Average | 100 | 125 | HORIZONTAL |
| 2 | 11656.80 | 49.96 | 74.00 | -24.04 | 40.39 | 5.16 | 39.49 | 35.08 | Peak | 100 | 125 | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 11648.00 | 51.58 | 74.00 | -22.42 | 42.02 | 5.16 | 39.48 | 35.08 | Peak | 100 | 249 | VERTICAL |
| 2 | 11652.00 | 39.28 | 54.00 | -14.72 | 29.71 | 5.16 | 39.49 | 35.08 | Average | 100 | 249 | VERTICAL |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band for 2.4GHz, 20dBc in any 100 kHz bandwidth outside the operating frequency band for 5GHz. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Span Frequency | 100 MHz |
| RBW / VBW (Emission in restricted band) | 1MHz / 3MHz for Peak, 1MHz / 1/T for Average |
| For 2.4GHz RBW / VBW (30dBc in any 100 kHz bandwidth emission) | 100 kHz / 300 kHz for Peak |
| For 5GHz RBW / VBW (20dBc in any 100 kHz bandwidth emission) | 100 kHz / 300 kHz for Peak |

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

| | | | |
|---------------|-------------------------------|----------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 |
| Test date | Aug. 09, 2014 ~ Aug. 12, 2014 | | |

Channel 1

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2390.00 | 53.52 | 54.00 | -0.48 | 21.38 | 4.09 | 28.05 | 0.00 | Average | 104 | 23 | VERTICAL |
| 2 | 2390.00 | 71.45 | 74.00 | -2.55 | 39.31 | 4.09 | 28.05 | 0.00 | Peak | 104 | 23 | VERTICAL |
| 3 | 2411.20 | 109.41 | | | 77.21 | 4.11 | 28.09 | 0.00 | Peak | 104 | 23 | VERTICAL |
| 4 | 2411.60 | 99.89 | | | 67.69 | 4.11 | 28.09 | 0.00 | Average | 104 | 23 | VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Pol/Phase | A/Pos | T/Pos | Remark |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-----------|-------|-------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2389.60 | 67.19 | 74.00 | -6.81 | 36.36 | 2.91 | 27.92 | 0.00 | VERTICAL | 105 | 8 | Peak |
| 2 | 2390.00 | 52.37 | 54.00 | -1.63 | 21.54 | 2.91 | 27.92 | 0.00 | VERTICAL | 105 | 8 | Average |
| 3 | 2437.40 | 117.81 | | | 87.01 | 2.94 | 27.86 | 0.00 | VERTICAL | 105 | 8 | Peak |
| 4 | 2437.40 | 107.69 | | | 76.89 | 2.94 | 27.86 | 0.00 | VERTICAL | 105 | 8 | Average |
| 5 | 2483.50 | 53.82 | 54.00 | -0.18 | 23.04 | 2.96 | 27.82 | 0.00 | VERTICAL | 105 | 8 | Average |
| 6 | 2487.50 | 70.15 | 74.00 | -3.85 | 39.38 | 2.97 | 27.80 | 0.00 | VERTICAL | 105 | 8 | Peak |

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2459.00 | 110.22 | | | 77.86 | 4.14 | 28.22 | 0.00 | Peak | 127 | 10 | VERTICAL |
| 2 | 2461.80 | 100.78 | | | 68.42 | 4.14 | 28.22 | 0.00 | Average | 127 | 10 | VERTICAL |
| 3 | 2483.50 | 53.69 | 54.00 | -0.31 | 21.27 | 4.16 | 28.26 | 0.00 | Average | 127 | 10 | VERTICAL |
| 4 | 2483.50 | 72.24 | 74.00 | -1.76 | 39.82 | 4.16 | 28.26 | 0.00 | Peak | 127 | 10 | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 |
| Test date | Aug. 09, 2014 | | |

Channel 3

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 2389.60 | 66.73 | 74.00 | -7.27 | 34.59 | 4.09 | 28.05 | 0.00 Peak | 106 | 23 | VERTICAL |
| 2 | 2390.00 | 53.80 | 54.00 | -0.20 | 21.66 | 4.09 | 28.05 | 0.00 Average | 106 | 23 | VERTICAL |
| 3 | 2420.80 | 105.63 | | | 73.38 | 4.12 | 28.13 | 0.00 Peak | 106 | 23 | VERTICAL |
| 4 | 2423.60 | 96.64 | | | 64.39 | 4.12 | 28.13 | 0.00 Average | 106 | 23 | VERTICAL |

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 2384.00 | 65.00 | 74.00 | -9.00 | 32.87 | 4.08 | 28.05 | 0.00 Peak | 106 | 335 | VERTICAL |
| 2 | 2390.00 | 52.36 | 54.00 | -1.64 | 20.22 | 4.09 | 28.05 | 0.00 Average | 106 | 335 | VERTICAL |
| 3 | 2438.60 | 97.51 | | | 65.20 | 4.13 | 28.18 | 0.00 Average | 106 | 335 | VERTICAL |
| 4 | 2447.40 | 107.39 | | | 75.08 | 4.13 | 28.18 | 0.00 Peak | 106 | 335 | VERTICAL |
| 5 | 2483.50 | 53.91 | 54.00 | -0.09 | 21.49 | 4.16 | 28.26 | 0.00 Average | 106 | 335 | VERTICAL |
| 6 | 2483.50 | 69.72 | 74.00 | -4.28 | 37.30 | 4.16 | 28.26 | 0.00 Peak | 106 | 335 | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 2450.80 | 106.51 | | | 74.20 | 4.13 | 28.18 | 0.00 Peak | 115 | 10 | HORIZONTAL |
| 2 | 2453.60 | 97.39 | | | 65.03 | 4.14 | 28.22 | 0.00 Average | 115 | 10 | HORIZONTAL |
| 3 | 2483.50 | 53.55 | 54.00 | -0.45 | 21.13 | 4.16 | 28.26 | 0.00 Average | 115 | 10 | HORIZONTAL |
| 4 | 2483.50 | 65.92 | 74.00 | -8.08 | 33.50 | 4.16 | 28.26 | 0.00 Peak | 115 | 10 | HORIZONTAL |

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Channel 1

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2387.00 | 60.99 | 74.00 | -13.01 | 28.85 | 4.09 | 28.05 | 0.00 | Peak | 100 | 329 | HORIZONTAL |
| 2 | 2387.20 | 53.51 | 54.00 | -0.49 | 21.37 | 4.09 | 28.05 | 0.00 | Average | 100 | 329 | HORIZONTAL |
| 3 | 2410.20 | 108.00 | | | 75.80 | 4.11 | 28.09 | 0.00 | Average | 100 | 329 | HORIZONTAL |
| 4 | 2410.60 | 111.54 | | | 79.34 | 4.11 | 28.09 | 0.00 | Peak | 100 | 329 | HORIZONTAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2385.20 | 59.79 | 74.00 | -14.21 | 27.66 | 4.08 | 28.05 | 0.00 | Peak | 100 | 46 | VERTICAL |
| 2 | 2385.60 | 51.84 | 54.00 | -2.16 | 19.70 | 4.09 | 28.05 | 0.00 | Average | 100 | 46 | VERTICAL |
| 3 | 2434.60 | 116.06 | | | 83.76 | 4.12 | 28.18 | 0.00 | Peak | 100 | 46 | VERTICAL |
| 4 | 2435.40 | 112.45 | | | 80.15 | 4.12 | 28.18 | 0.00 | Average | 100 | 46 | VERTICAL |
| 5 | 2488.30 | 52.37 | 54.00 | -1.63 | 19.90 | 4.17 | 28.30 | 0.00 | Average | 100 | 46 | VERTICAL |
| 6 | 2488.70 | 60.13 | 74.00 | -13.87 | 27.66 | 4.17 | 28.30 | 0.00 | Peak | 100 | 46 | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2463.60 | 109.44 | | | 77.08 | 4.14 | 28.22 | 0.00 | Average | 127 | 22 | VERTICAL |
| 2 | 2463.60 | 112.81 | | | 80.45 | 4.14 | 28.22 | 0.00 | Peak | 127 | 22 | VERTICAL |
| 3 | 2483.50 | 53.62 | 54.00 | -0.38 | 21.20 | 4.16 | 28.26 | 0.00 | Average | 127 | 22 | VERTICAL |
| 4 | 2483.50 | 60.15 | 74.00 | -13.85 | 27.73 | 4.16 | 28.26 | 0.00 | Peak | 127 | 22 | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 28°C | Humidity | 62% |
| Test Engineer | YC Chen | Configurations | IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 |
| Test Date | Aug. 09, 2014 | | |

Channel 1

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2390.00 | 53.81 | 54.00 | -0.19 | 21.67 | 4.09 | 28.05 | 0.00 | Average | 122 | 8 | HORIZONTAL |
| 2 | 2390.00 | 68.96 | 74.00 | -5.04 | 36.82 | 4.09 | 28.05 | 0.00 | Peak | 122 | 8 | HORIZONTAL |
| 3 | 2411.20 | 102.85 | | | 70.65 | 4.11 | 28.09 | 0.00 | Average | 122 | 8 | HORIZONTAL |
| 4 | 2411.20 | 111.92 | | | 79.72 | 4.11 | 28.09 | 0.00 | Peak | 122 | 8 | HORIZONTAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2388.80 | 65.23 | 74.00 | -8.77 | 33.09 | 4.09 | 28.05 | 0.00 | Peak | 150 | 21 | VERTICAL |
| 2 | 2390.00 | 51.44 | 54.00 | -2.56 | 19.30 | 4.09 | 28.05 | 0.00 | Average | 150 | 21 | VERTICAL |
| 3 | 2437.80 | 116.97 | | | 84.66 | 4.13 | 28.18 | 0.00 | Peak | 150 | 21 | VERTICAL |
| 4 | 2438.20 | 108.03 | | | 75.72 | 4.13 | 28.18 | 0.00 | Average | 150 | 21 | VERTICAL |
| 5 | 2483.50 | 53.71 | 54.00 | -0.29 | 21.29 | 4.16 | 28.26 | 0.00 | Average | 150 | 21 | VERTICAL |
| 6 | 2483.50 | 67.48 | 74.00 | -6.52 | 35.06 | 4.16 | 28.26 | 0.00 | Peak | 150 | 21 | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2461.20 | 100.88 | | | 68.52 | 4.14 | 28.22 | 0.00 | Average | 104 | 336 | VERTICAL |
| 2 | 2461.20 | 109.82 | | | 77.46 | 4.14 | 28.22 | 0.00 | Peak | 104 | 336 | VERTICAL |
| 3 | 2483.50 | 53.49 | 54.00 | -0.51 | 21.07 | 4.16 | 28.26 | 0.00 | Average | 104 | 336 | VERTICAL |
| 4 | 2483.50 | 67.65 | 74.00 | -6.35 | 35.23 | 4.16 | 28.26 | 0.00 | Peak | 104 | 336 | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

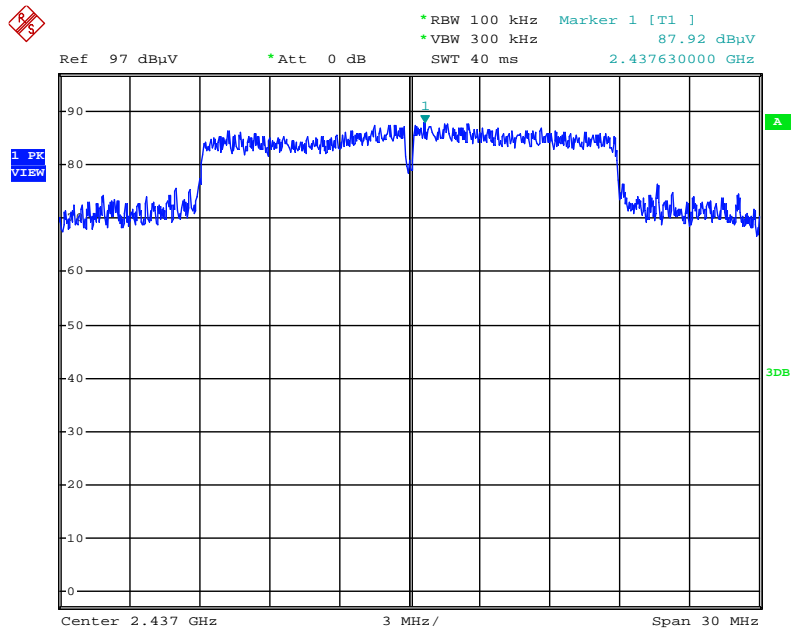


Date: 9.AUG.2014 14:56:55

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

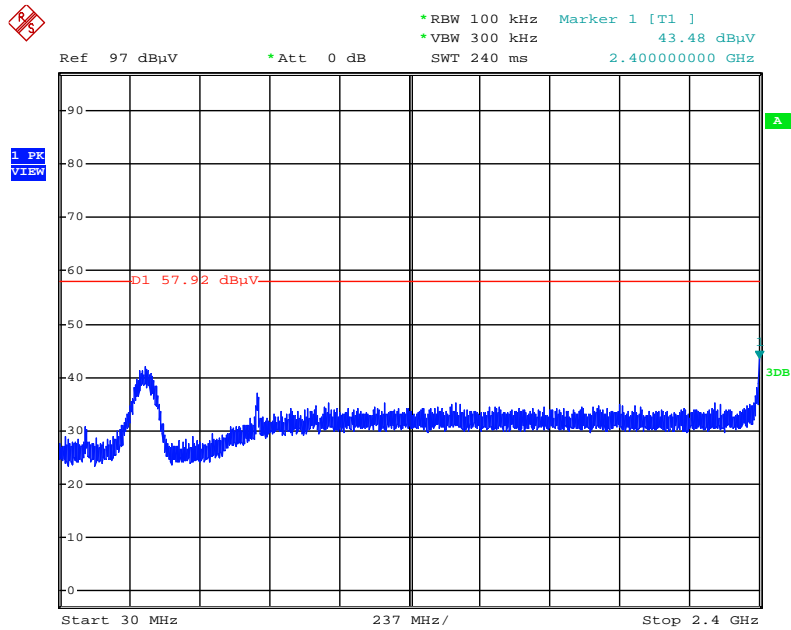


Date: 9.AUG.2014 14:57:53

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

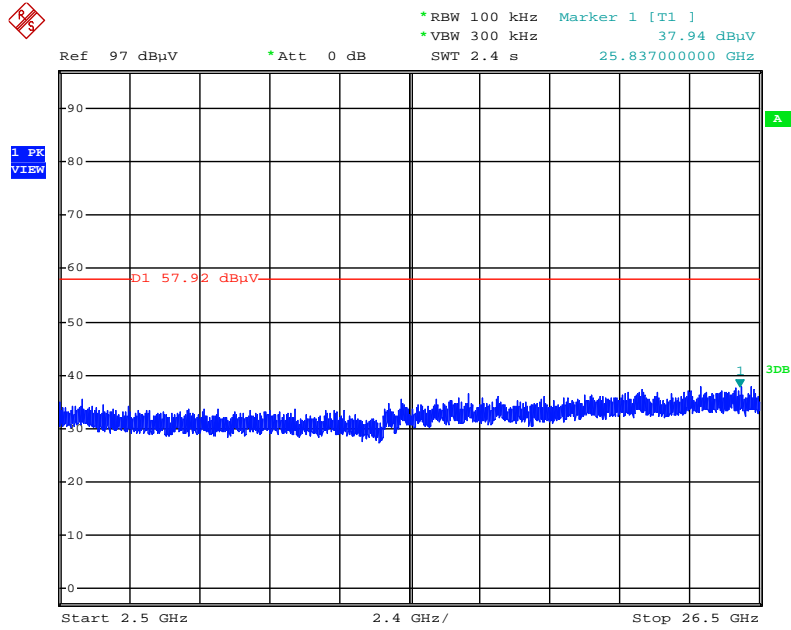


Date: 9.AUG.2014 14:58:30

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

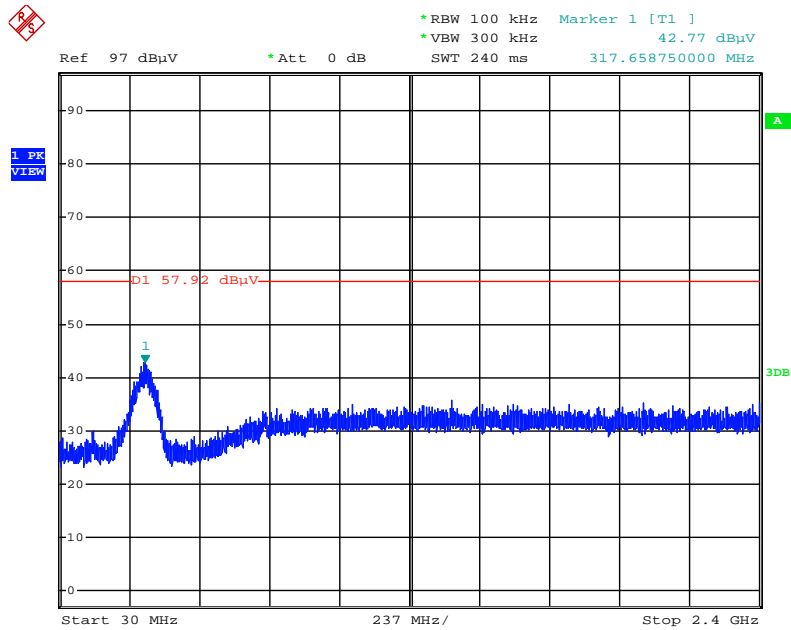


Date: 9.AUG.2014 15:00:05

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

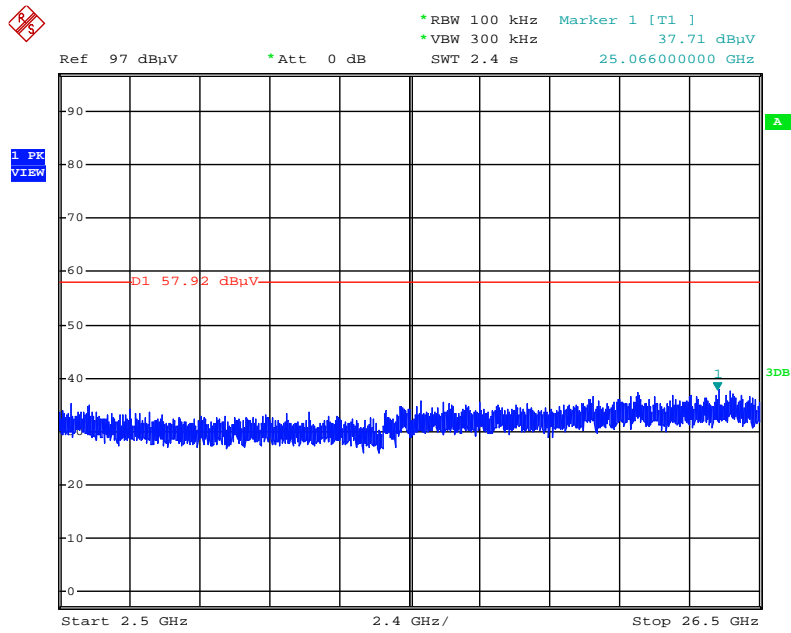


Date: 9.AUG.2014 14:59:31

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

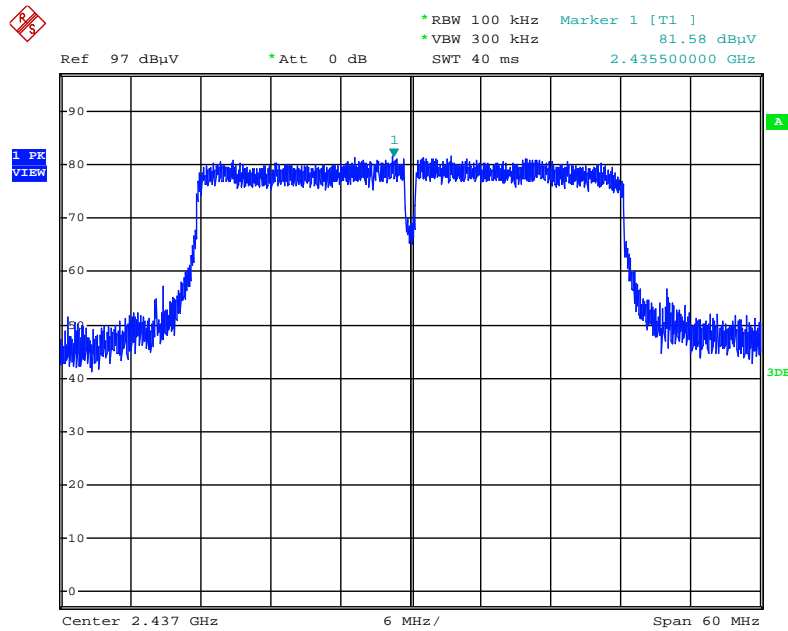


Date: 9.AUG.2014 15:11:35

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

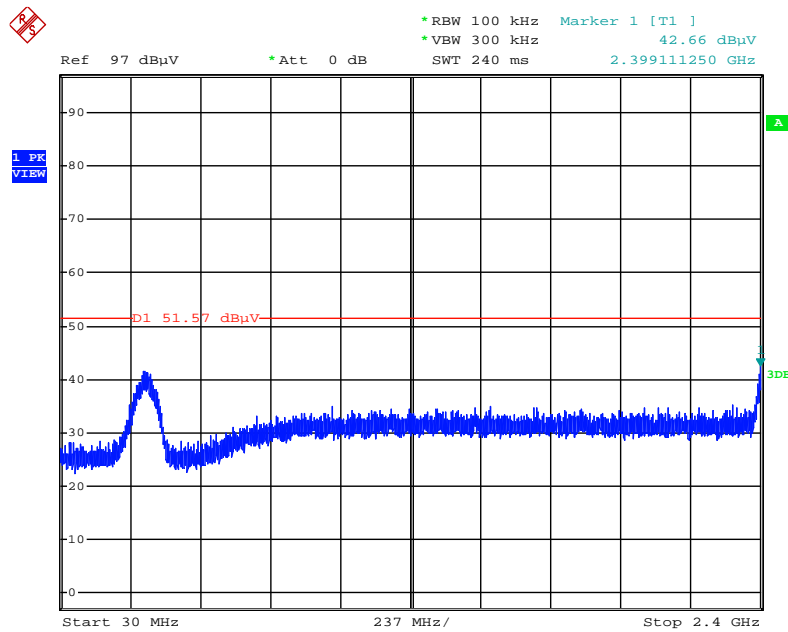


Date: 9.AUG.2014 14:51:32

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

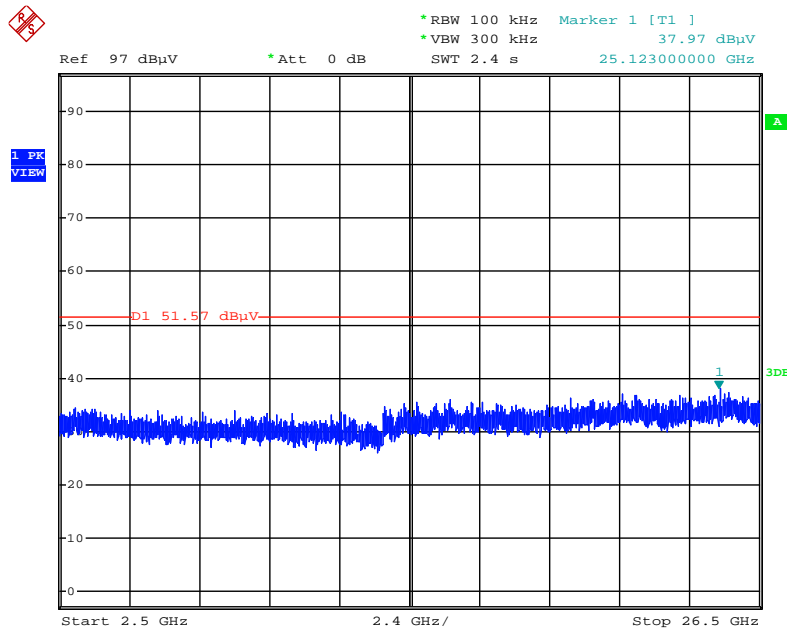


Date: 9.AUG.2014 14:52:47

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

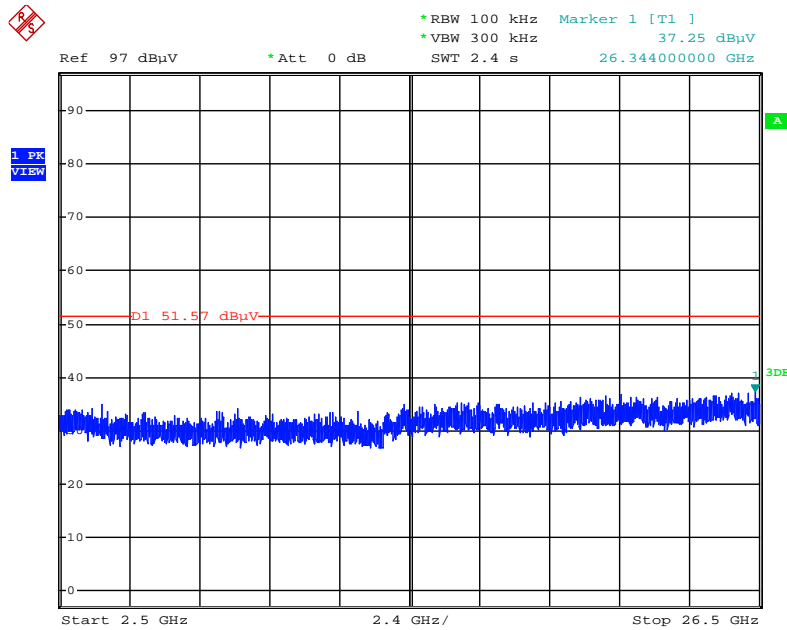


Date: 9.AUG.2014 14:53:15

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

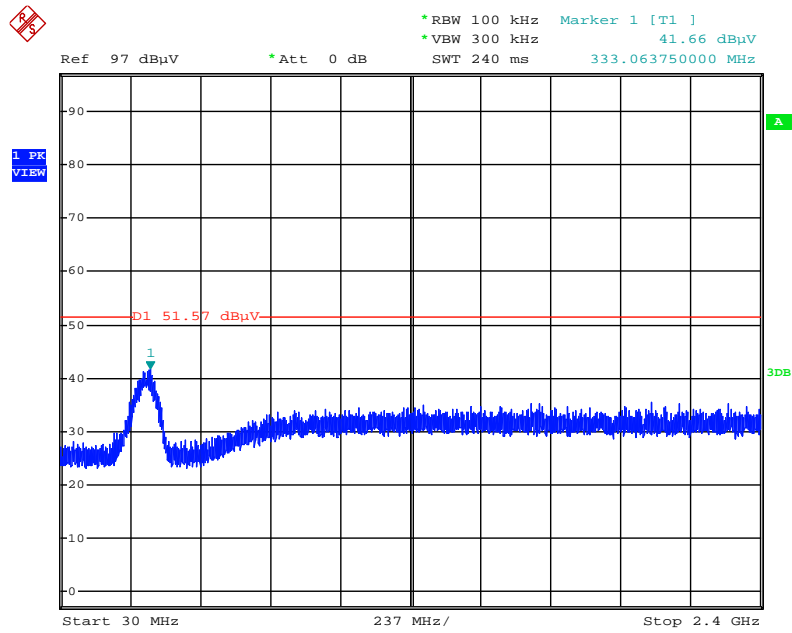


Date: 9.AUG.2014 14:53:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

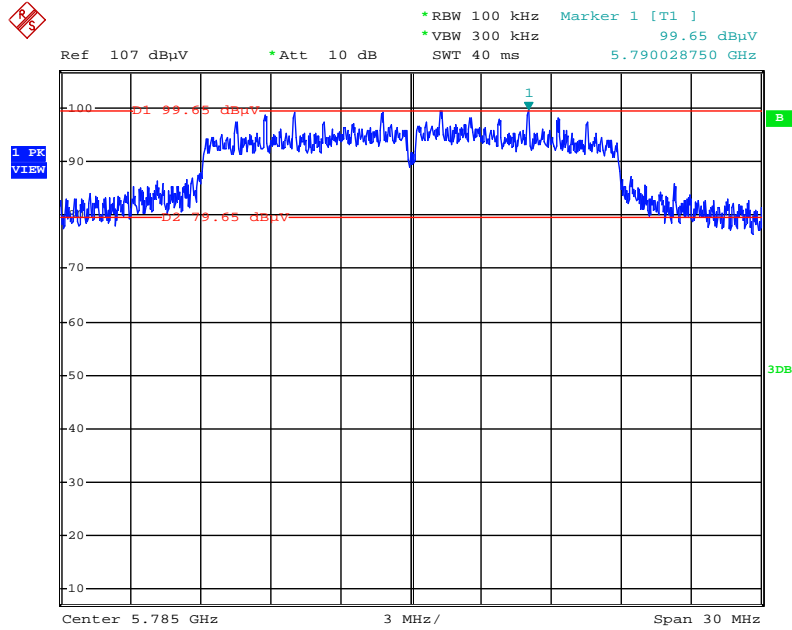


Date: 28.JUL.2014 22:53:08

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 20dBc)

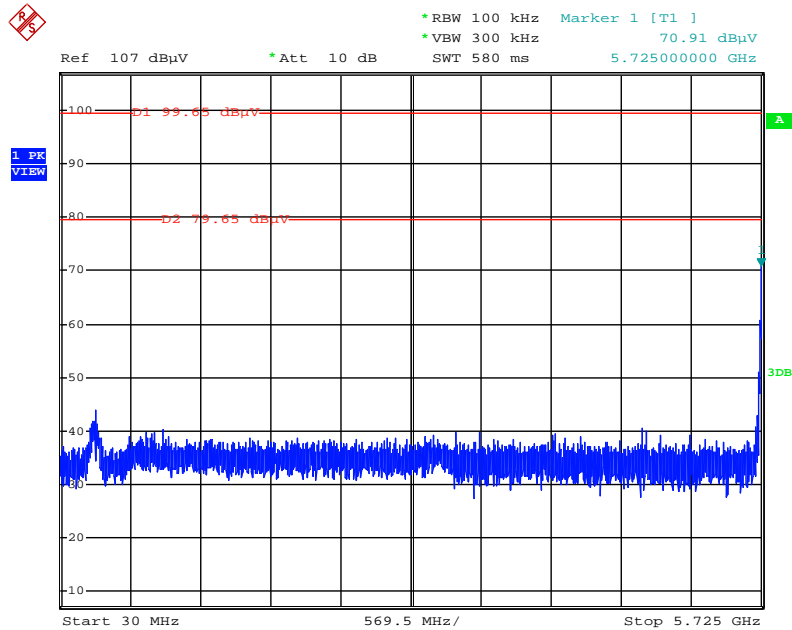


Date: 28.JUL.2014 22:56:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 20dBc)

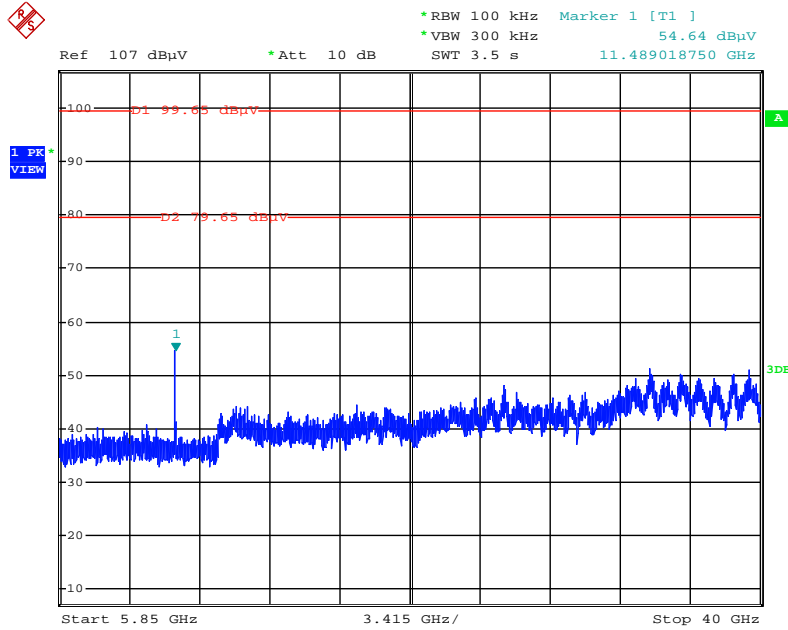


Date: 28.JUL.2014 22:56:50

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 20dBc)

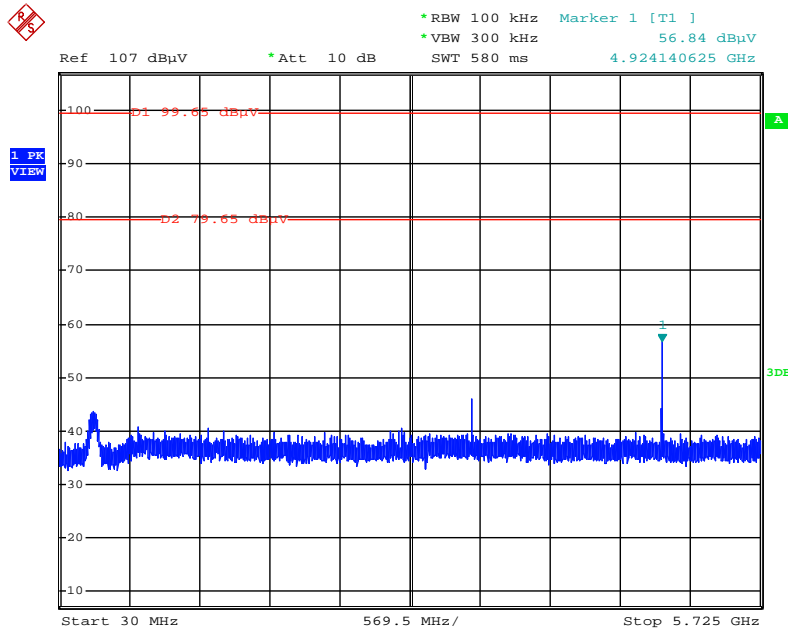


Date: 29.JUL.2014 02:42:38

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 20dBc)

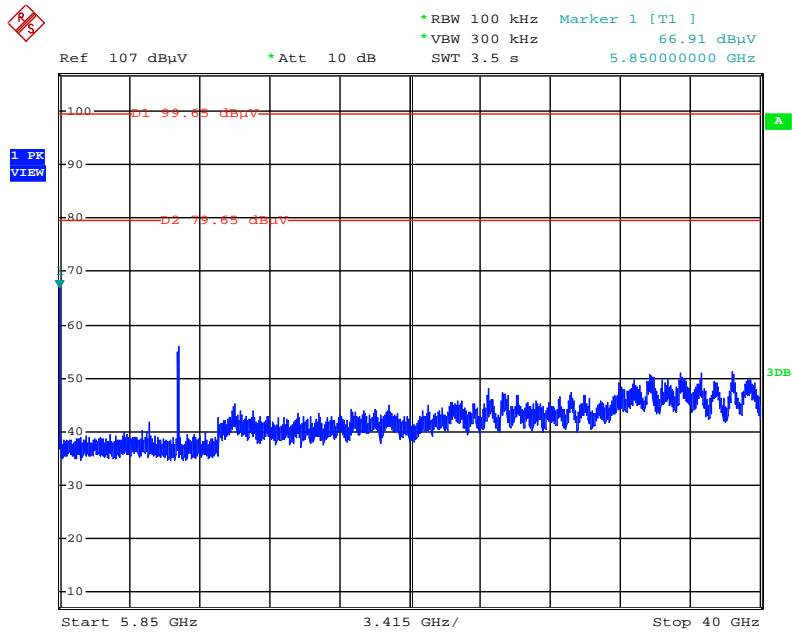


Date: 29.JUL.2014 02:43:09

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

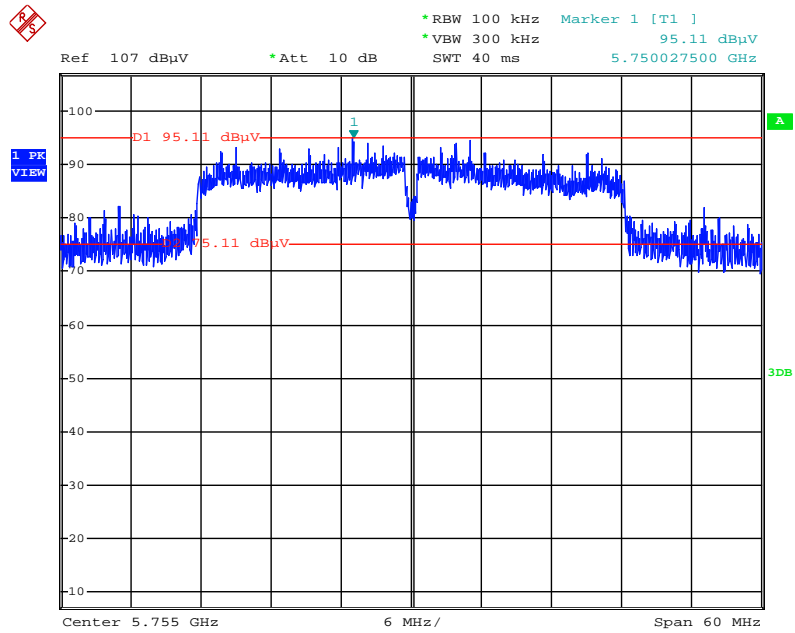


Date: 28.JUL.2014 23:00:31

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 20dBc)

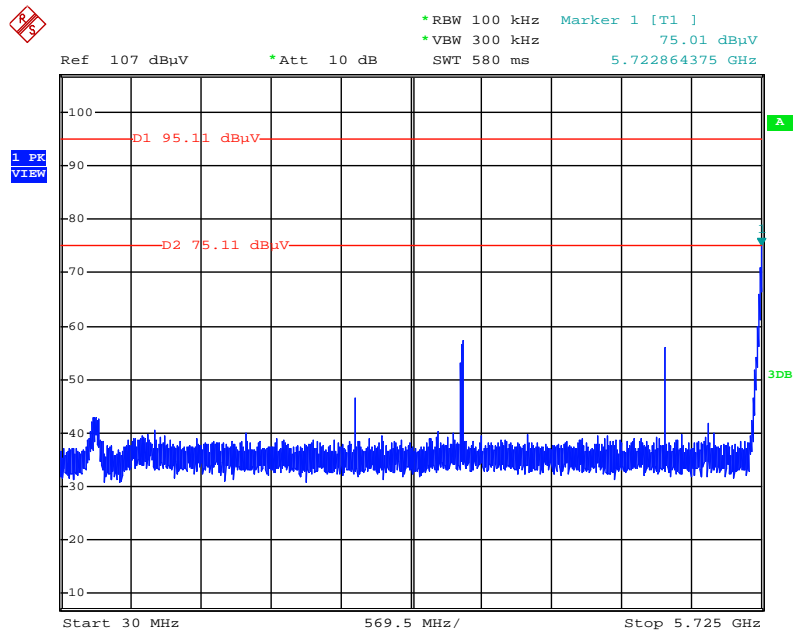


Date: 28.JUL.2014 23:01:16

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 20dBc)

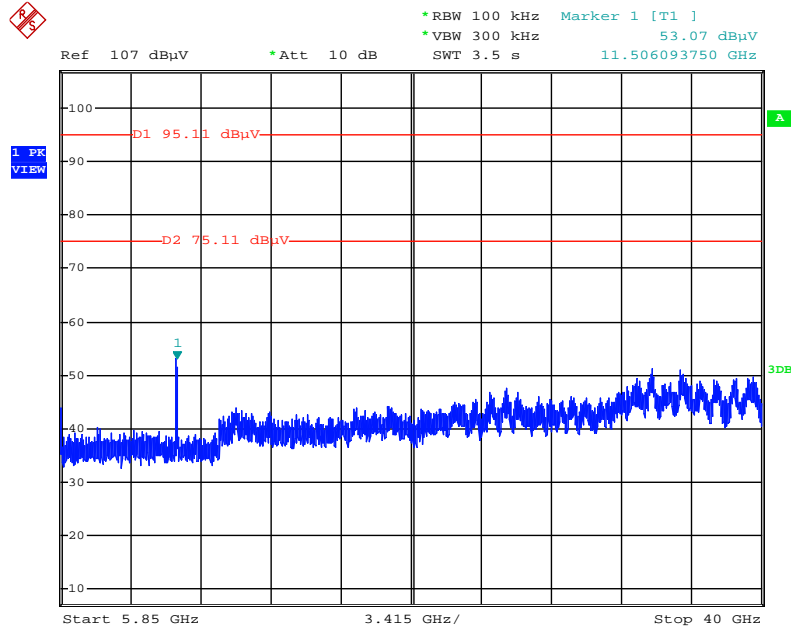


Date: 28.JUL.2014 23:02:01

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 20dBc)

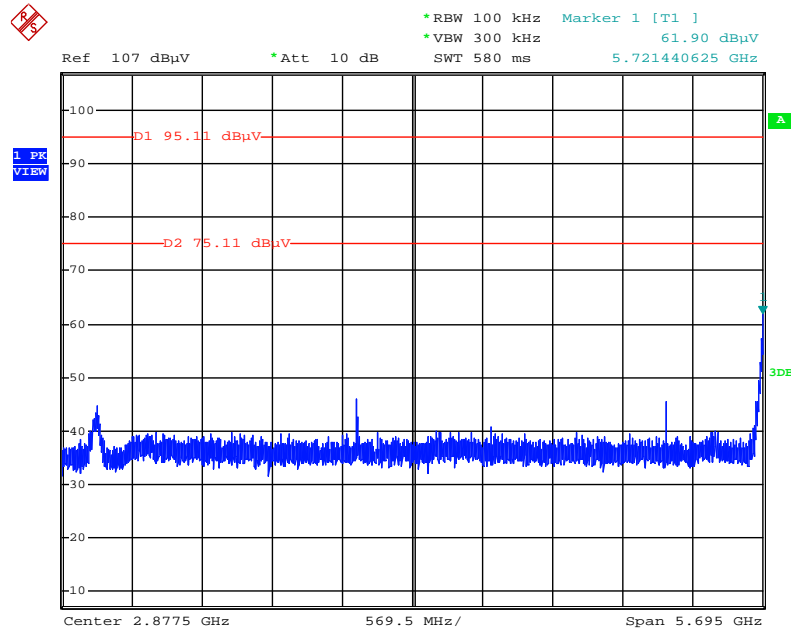


Date: 29.JUL.2014 02:40:18

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 20dBc)

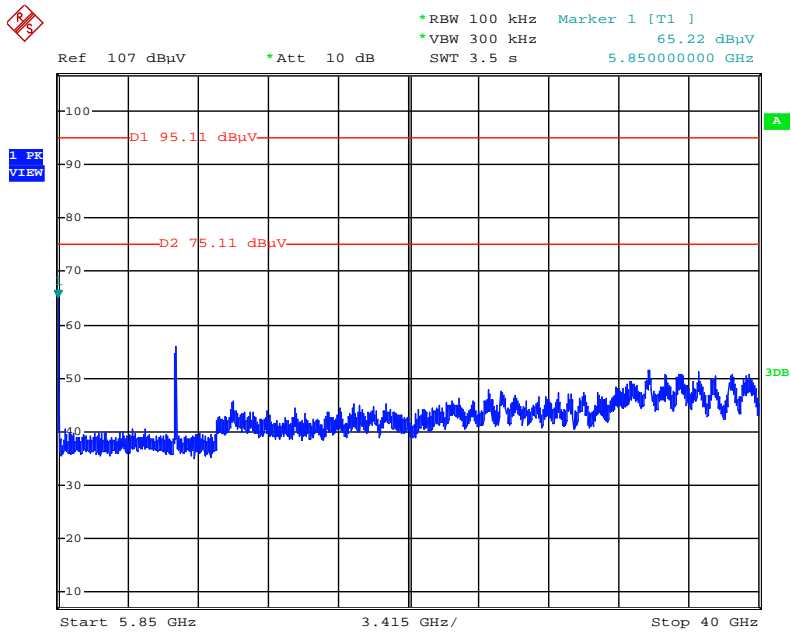


Date: 29.JUL.2014 02:41:20

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

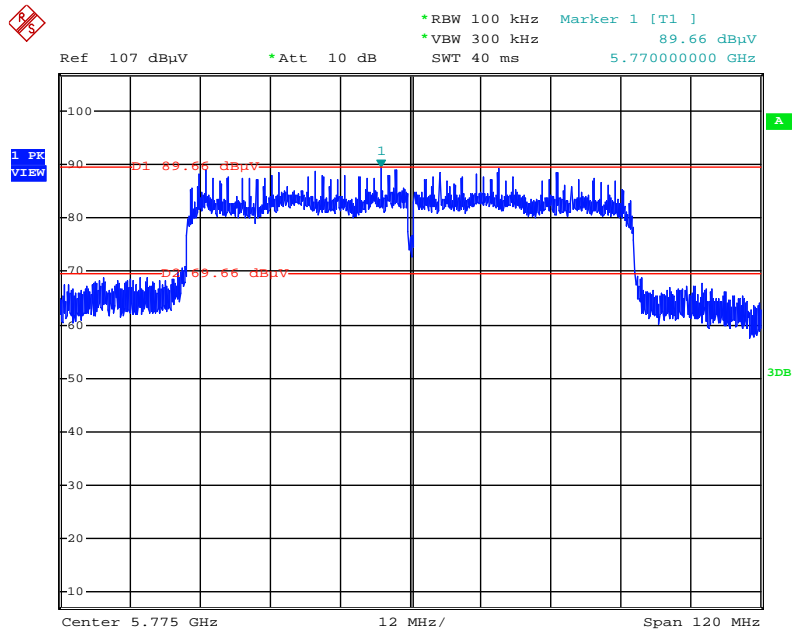


Date: 28.JUL.2014 23:13:15

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 20dBc)

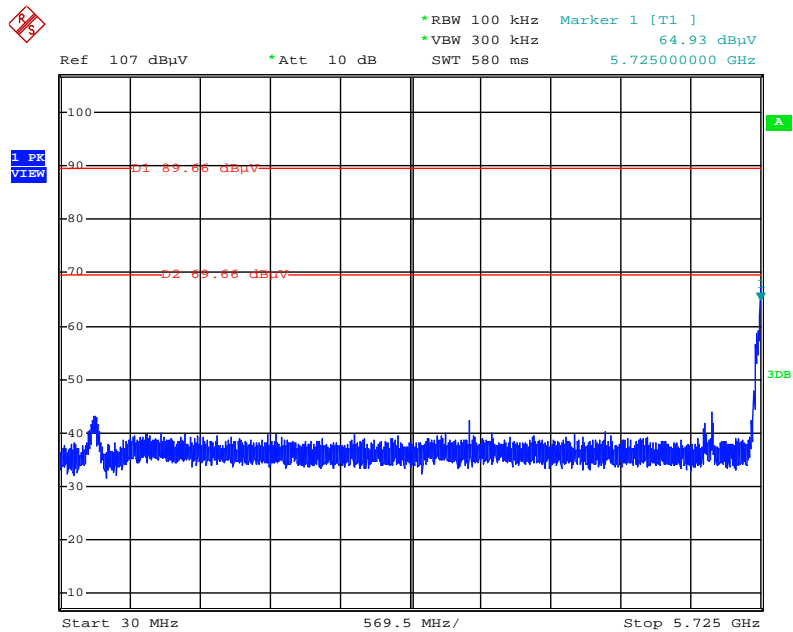


Date: 28.JUL.2014 23:13:58

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 20dBc)

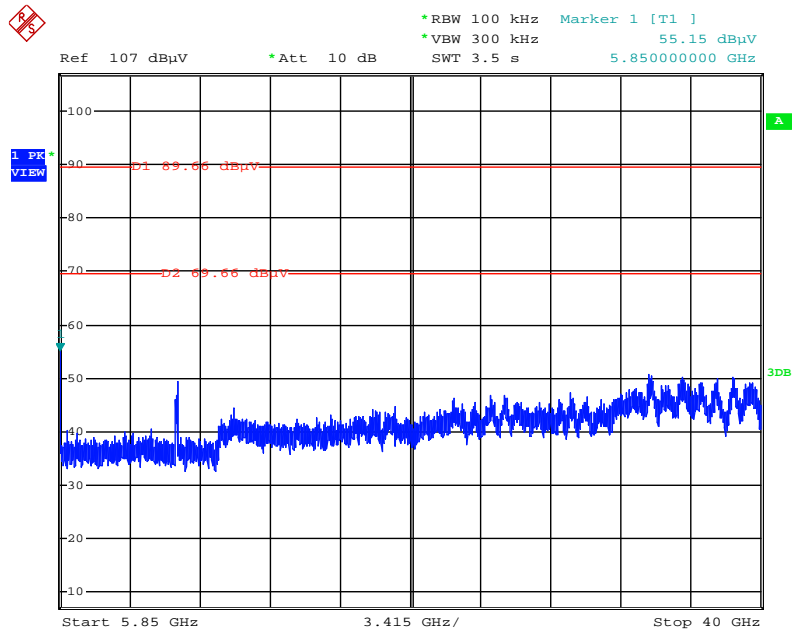


Date: 28.JUL.2014 23:14:34

Plot on Configuration IEEE 802.11b / Reference Level

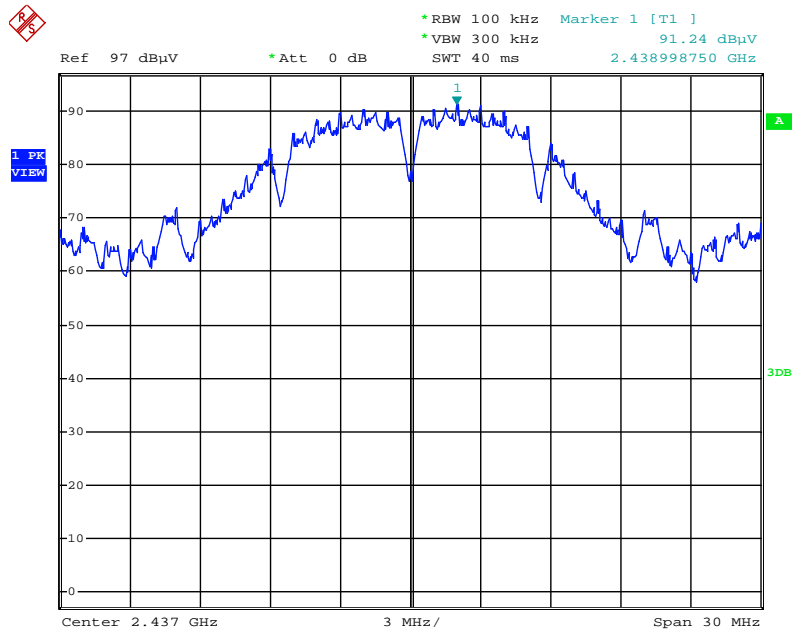


Date: 9.AUG.2014 15:04:30

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

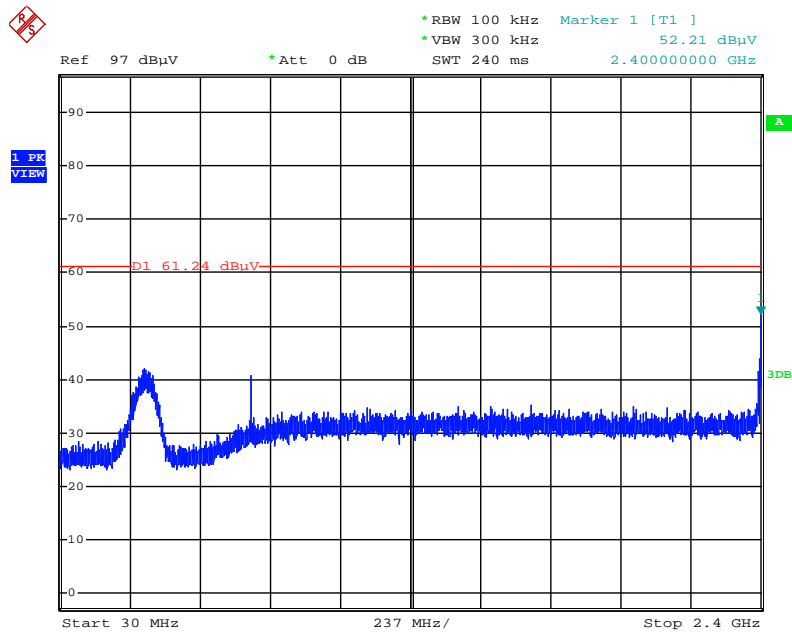


Date: 9.AUG.2014 15:05:27

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

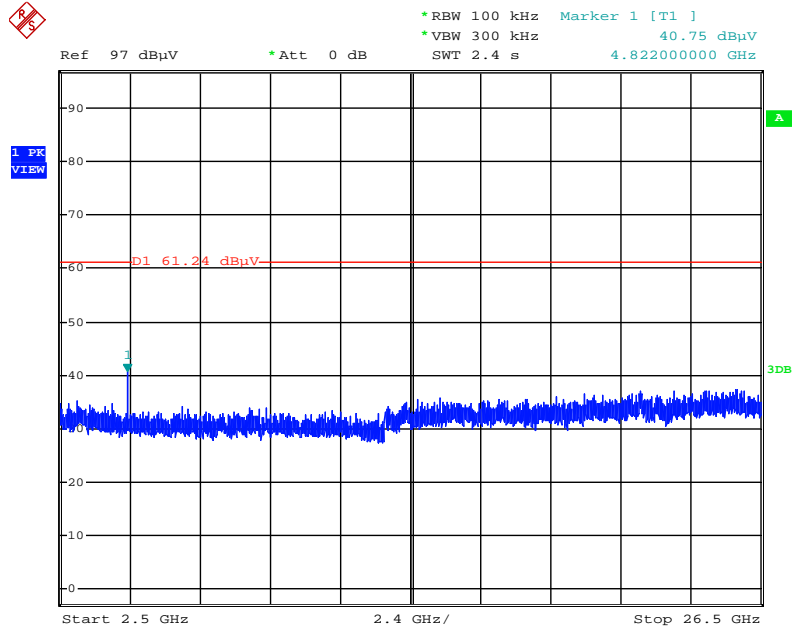


Date: 9.AUG.2014 15:05:53

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

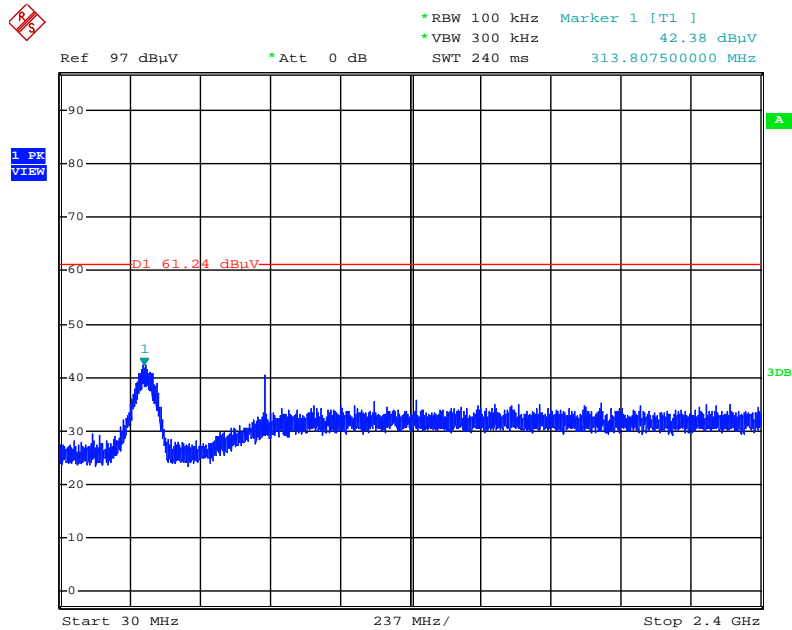


Date: 9.AUG.2014 15:07:21

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

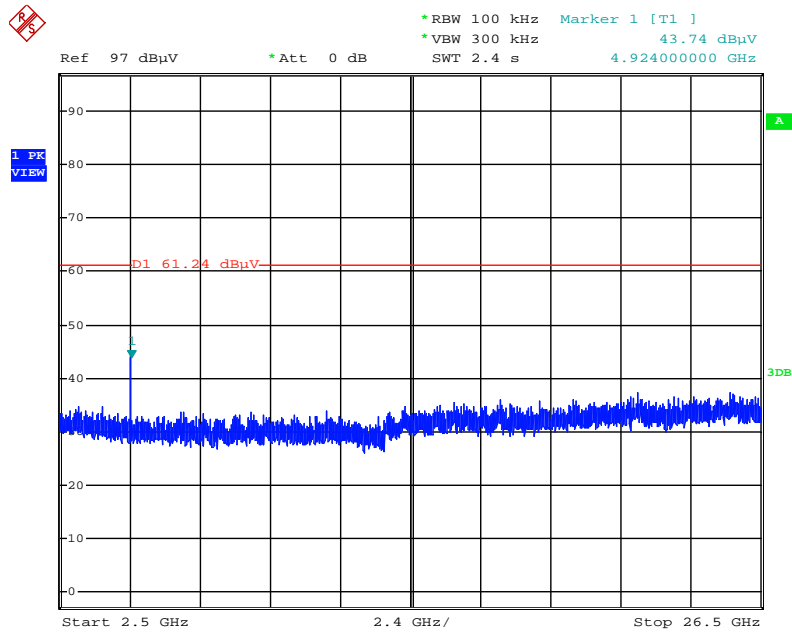


Date: 9.AUG.2014 15:06:25

Plot on Configuration IEEE 802.11g / Reference Level

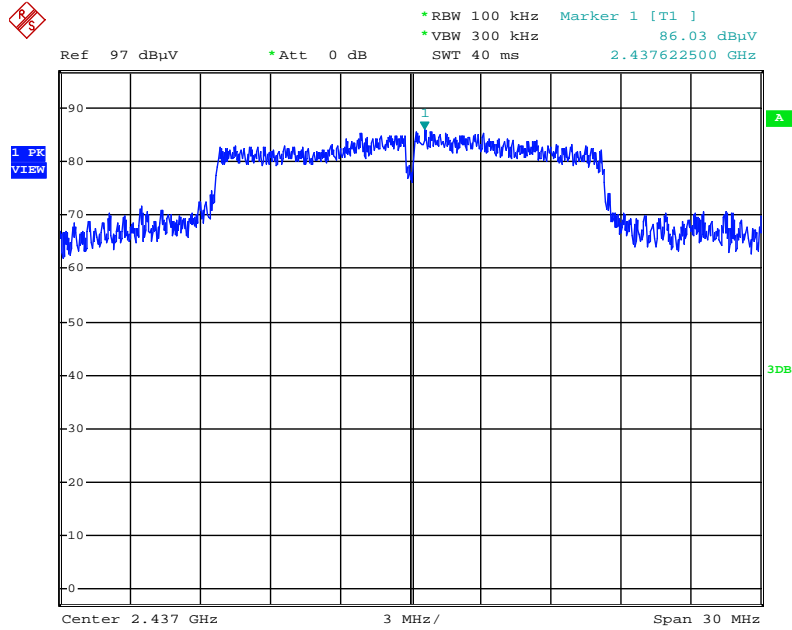


Date: 9.AUG.2014 15:01:26

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

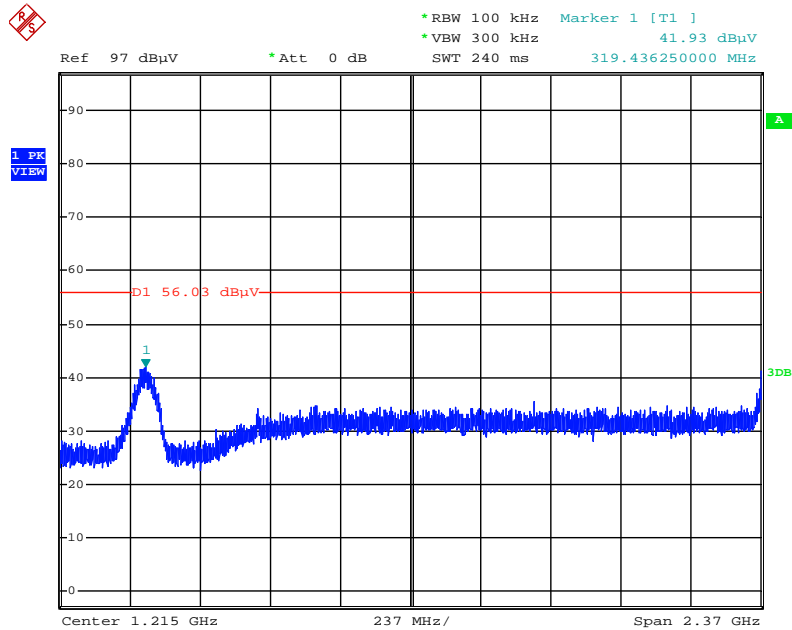


Date: 9.AUG.2014 15:01:57

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

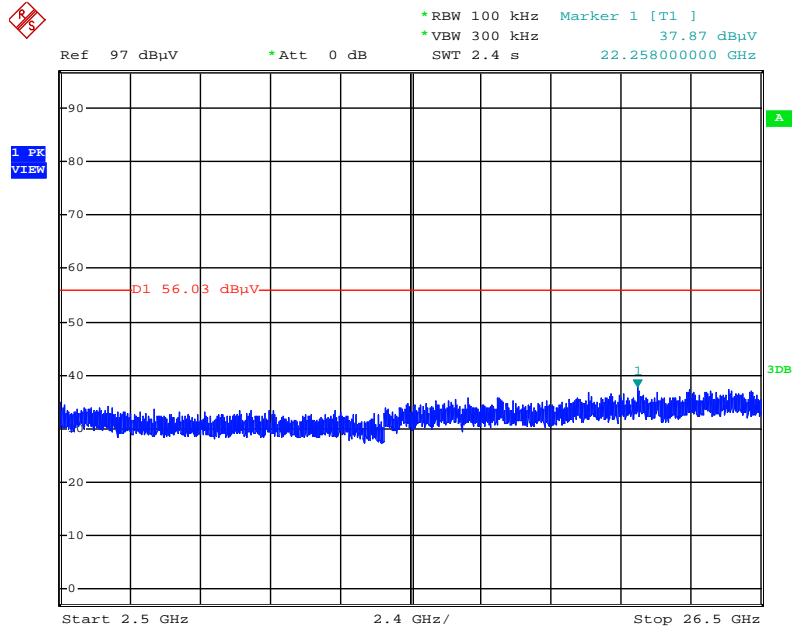


Date: 9.AUG.2014 15:02:23

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

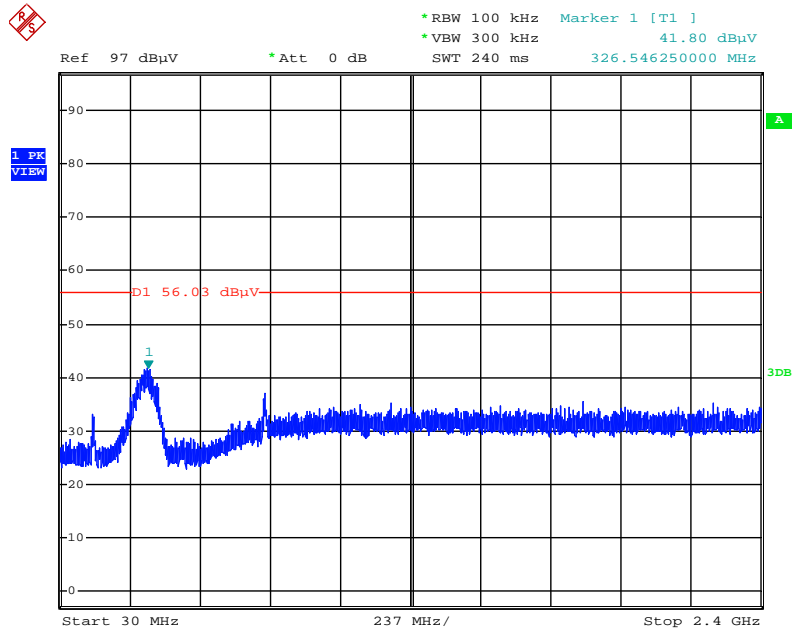


Date: 9.AUG.2014 15:03:35

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

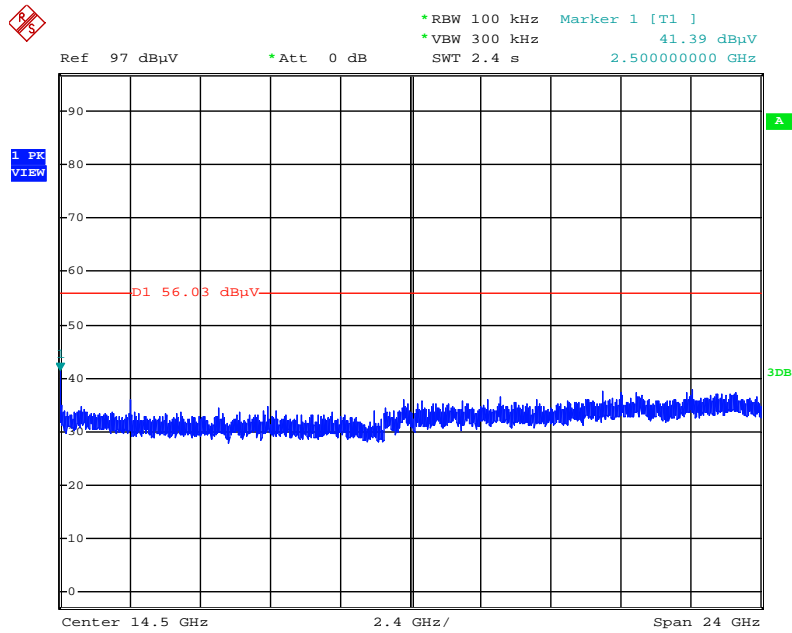


Date: 9.AUG.2014 15:03:08

Plot on Configuration IEEE 802.11a / Reference Level

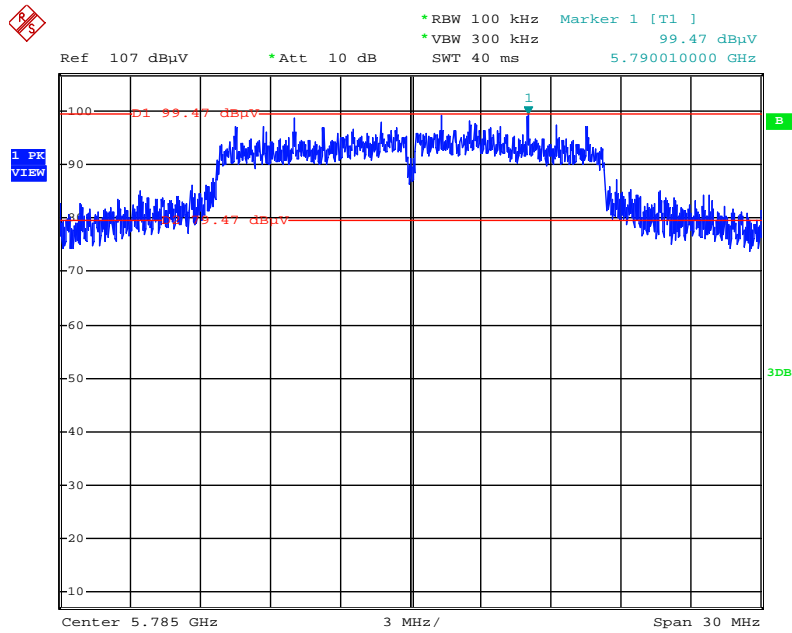


Date: 28.JUL.2014 22:42:41

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 20dBc)

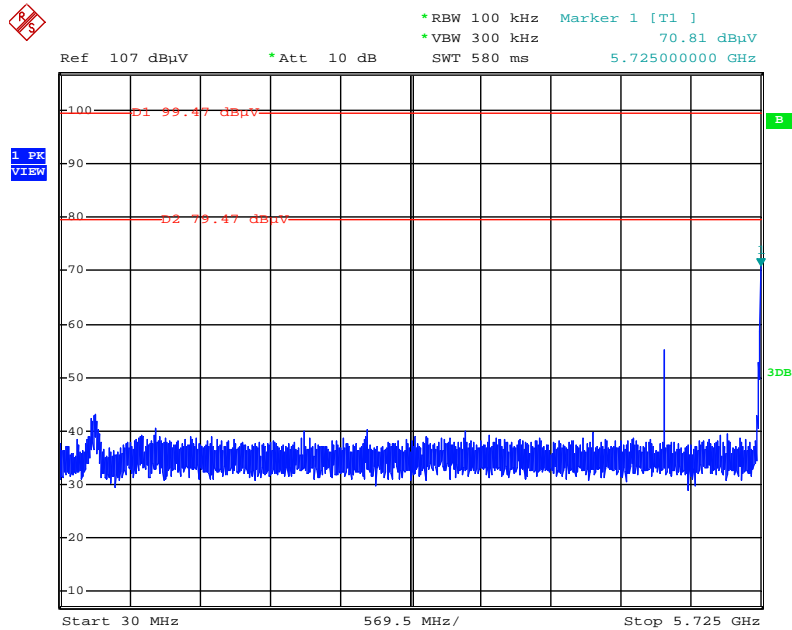


Date: 28.JUL.2014 22:44:41

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 20dBc)

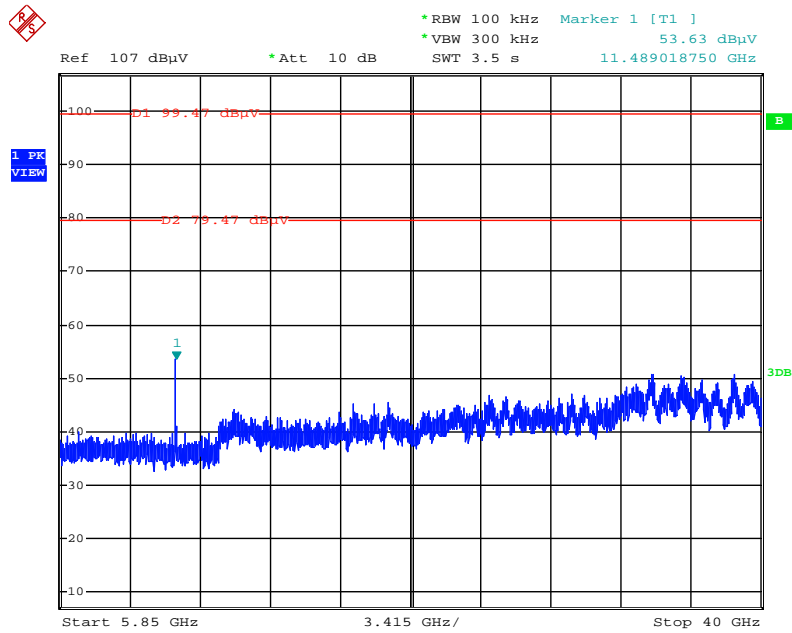


Date: 28.JUL.2014 22:45:24

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 20dBc)

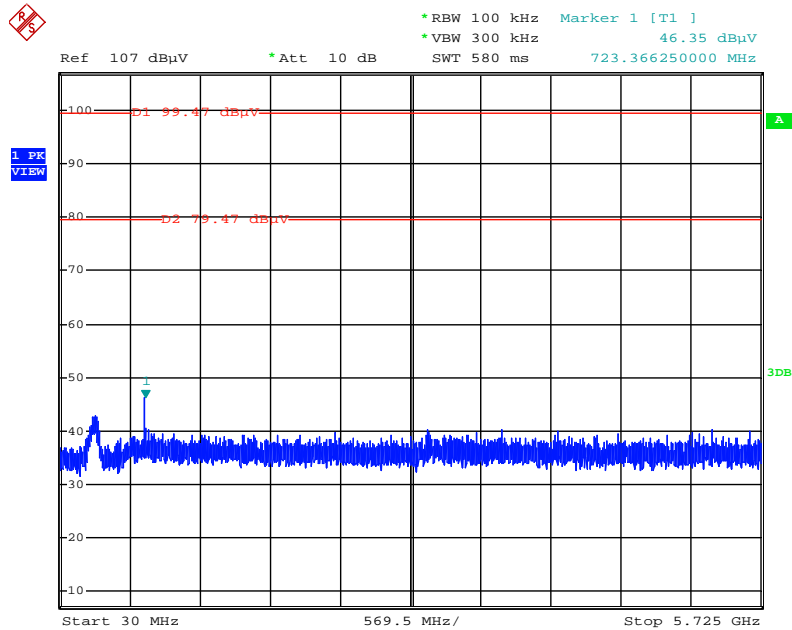

Date: 29.JUL.2014 02:45:38

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~4000MHz (down 20dBc)

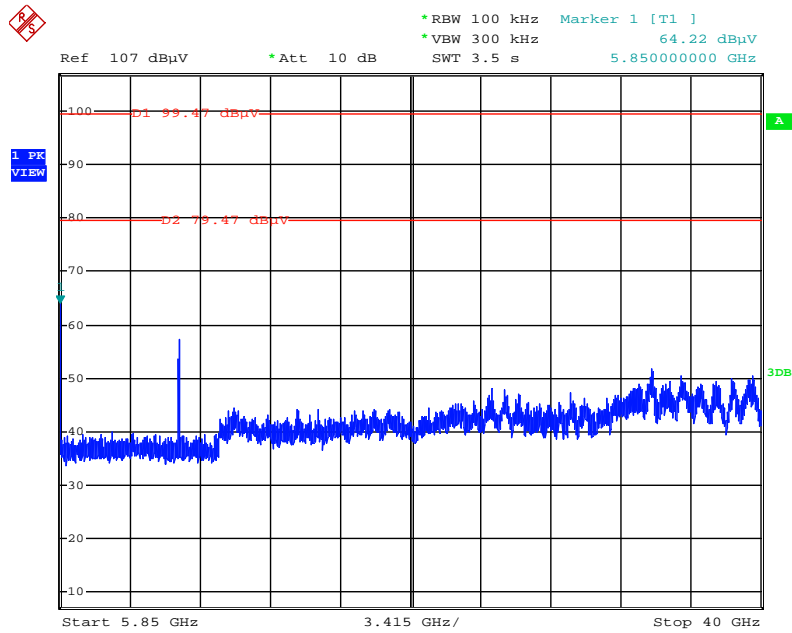

Date: 29.JUL.2014 02:46:01

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-------------------|--------------|------------------|----------------|------------------|------------------|-----------------------|
| EMI Test Receiver | R&S | ESCS 30 | 100355 | 9kHz ~ 2.75GHz | Apr. 23, 2014 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Nov. 23, 2013 | Conduction (CO01-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127478 | 9kHz ~ 30MHz | Nov. 11, 2013 | Conduction (CO01-CB) |
| COND Cable | Woken | Cable | 01 | 150kHz ~ 30MHz | Dec. 04, 2013 | Conduction (CO01-CB) |
| Software | Audix | E3 | 5.410e | - | N.C.R. | Conduction (CO01-CB) |
| BILOG ANTENNA | Schaffner | CBL6112D | 22021 | 20MHz ~ 2GHz | May 26, 2014 | Radiation (03CH01-CB) |
| Loop Antenna | Teseq | HLA 6120 | 24155 | 9 kHz - 30 MHz | Nov. 05, 2012* | Radiation (03CH01-CB) |
| Horn Antenna | EMCO | 3115 | 00075790 | 750MHz~18GHz | Nov. 01, 2013 | Radiation (03CH01-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Dec. 17, 2013 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8447D | 2944A10991 | 0.1MHz ~ 1.3GHz | Nov. 12, 2013 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02310 | 1GHz ~ 26.5GHz | Dec. 16, 2013 | Radiation (03CH01-CB) |
| Pre-Amplifier | WM | TF-130N-R1 | 923365 | 26GHz ~ 40GHz | Oct. 23, 2013 | Radiation (03CH01-CB) |
| Spectrum analyzer | R&S | FSP40 | 100019 | 9kHz~40GHz | Dec. 02, 2013 | Radiation (03CH01-CB) |
| EMI Test Receiver | Agilent | N9038A | MY52260123 | 9kHz ~ 8GHz | Dec. 12, 2013 | Radiation (03CH01-CB) |
| Turn Table | INN CO | CO 2000 | N/A | 0 ~ 360 degree | N.C.R. | Radiation (03CH01-CB) |
| Antenna Mast | INN CO | CO 2000 | N/A | 1 m - 4 m | N.C.R. | Radiation (03CH01-CB) |
| RF Cable-low | Woken | Low Cable-1 | N/A | 30 MHz - 1 GHz | Nov. 17, 2013 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-3 | N/A | 1 GHz - 40 GHz | Nov. 17, 2013 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-4 | N/A | 1 GHz - 40 GHz | Nov. 17, 2013 | Radiation (03CH01-CB) |
| Signal analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | Nov. 29, 2013 | Conducted (TH01-CB) |
| RF Power Divider | Woken | 2 Way | 0120A02056002D | 2GHz ~ 18GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Power Divider | Woken | 3 Way | MDC2366 | 2GHz ~ 18GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Power Divider | Woken | 4 Way | 0120A04056002D | 2GHz ~ 18GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-7 | - | 1 GHz ~ 26.5 GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-8 | - | 1 GHz ~ 26.5 GHz | Nov. 17, 2013 | Conducted (TH01-CB) |



| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|---------------|--------------|---------------|------------|------------------|------------------|---------------------|
| RF Cable-high | Woken | High Cable-9 | - | 1 GHz – 26.5 GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-10 | - | 1 GHz – 26.5 GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-11 | - | 1 GHz – 26.5 GHz | Nov. 17, 2013 | Conducted (TH01-CB) |
| Power Sensor | Anritsu | MA2411B | 0917223 | 300MHz~40GHz | Sep. 18, 2013 | Conducted (TH01-CB) |
| Power Meter | Anritsu | ML2495A | 1035008 | 300MHz~40GHz | Sep. 18, 2013 | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

| Test Items | Uncertainty | Remark |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 2.4 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.6 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 3.7 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 3.5 dB | Confidence levels of 95% |
| Conducted Emission | 1.7 dB | Confidence levels of 95% |