



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR880LA1

Product Name	Wireless AC1900 Dual Band Gigabit Cloud Router
Brand Name	D-Link
Model No.	DIR-880L, DIR-880LW
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Nov. 09, 2013
Final Test Date	Jan. 27, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a/ac (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple List.....	10
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	12
3.10. EUT Operation during Test	13
3.11. Duty Cycle.....	14
3.12. Test Configurations	18
4. TEST RESULT	22
4.1. AC Power Line Conducted Emissions Measurement.....	22
4.2. Maximum Conducted Output Power Measurement.....	26
4.3. Power Spectral Density Measurement	30
4.4. 6dB Spectrum Bandwidth Measurement	56
4.5. Radiated Emissions Measurement	68
4.6. Emissions Measurement	107
4.7. Antenna Requirements	152
5. LIST OF MEASURING EQUIPMENTS	153
6. MEASUREMENT UNCERTAINTY.....	155
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR410860AA	Rev. 01	Initial issue of report	Feb. 14, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1900 Dual Band Gigabit Cloud Router
Brand Name : D-Link
Model No. : DIR-880L, DIR-880LW
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 09, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style with a long horizontal stroke at the end.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.70 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.01 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.99 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.08 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.05 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For non-beamforming function:</u> <u>For 2.4GHz Band:</u> MCS0 (20MHz): 17.76 MHz ; MCS0 (40MHz): 36.48 MHz <u>For 5GHz Band:</u> 802.11ac MCS0, Nss1 (20MHz): 17.84 MHz ; 802.11ac MCS0, Nss1 (40MHz): 36.36 MHz ; 802.11ac MCS0, Nss1 (80MHz): 75.60 MHz <u>For beamforming function:</u> <u>For 2.4GHz Band:</u> MCS0 (20MHz): 17.68 MHz ; MCS0 (40MHz): 36.32 MHz <u>For 5GHz Band:</u> 802.11ac MCS0, Nss1 (20MHz): 17.68 MHz ; 802.11ac MCS0, Nss1 (40MHz): 36.36 MHz ; 802.11ac MCS0, Nss1 (80MHz): 75.60 MHz

Maximum Conducted Output Power	<p><u>For non-beamforming function:</u></p> <p><u>For 2.4GHz Band:</u> MCS0 (20MHz): 29.87 dBm ; MCS0 (40MHz): 24.66 dBm</p> <p><u>For 5GHz Band:</u> 802.11ac MCS0, Nss1 (20MHz): 29.88 dBm ; 802.11ac MCS0, Nss1 (40MHz): 29.85 dBm ; 802.11ac MCS0, Nss1 (80MHz): 28.66 dBm</p> <p><u>For beamforming function:</u></p> <p><u>For 2.4GHz Band:</u> MCS0 (20MHz): 29.02 dBm ; MCS0 (40MHz): 23.91 dBm</p> <p><u>For 5GHz Band:</u> 802.11ac MCS0, Nss1 (20MHz): 28.22 dBm ; 802.11ac MCS0, Nss1 (40MHz): 28.13 dBm ; 802.11ac MCS0, Nss1 (80MHz): 28.18 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11a/b/g

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 12.16 MHz ; 11g: 16.48 MHz ; 11a: 16.40 MHz
Maximum Conducted Output Power	11b: 29.89 dBm ; 11g: 29.83 dBm ; 11a: 29.96 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna and Bandwidth

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
Band width Mode			
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

Note : The product has beamforming function for 802.11n/ac.

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9, Nss1-3
802.11ac (VHT40)	3	MCS 0-9, Nss1-3
802.11ac (VHT80)	3	MCS 0-9, Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model No.	Rating
Adapter	APD	WA-36C12R	Input: 100-240Vac, 50-60Hz, 1A Max. Output: 12Vdc, 3A
Other			
Plug*1			


3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Type	Connector	Gain (dBi)		Cable loss		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	WHA YU	C037-510901-A	Dipole	SMA	2.7	4.15	0.7	1.15	2	3
2	WHA YU	C037-511311-A	Dipole	SMA	2.7	4.15	0.7	1.15	2	3
3	WHA YU	C037-511313-A	Dipole	SMA	2.7	4.15	0.7	1.15	2	3

Note: 1. The total antennas amounted to three sets.

Ant. 1, Ant. 2 and Ant. 3 are identical except for the appearance of case, only the "Ant. 1" was tested and recorded in the report.

2. Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

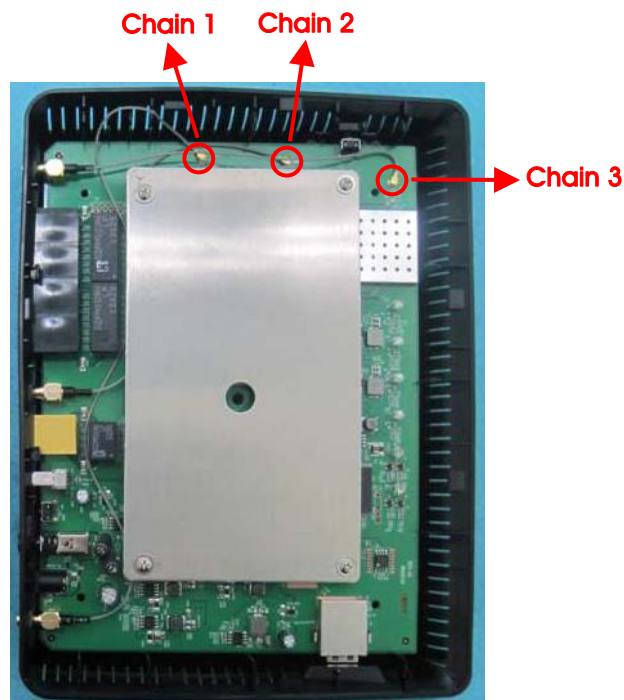

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Power Spectral Density	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	1+2+3
	11n 40MHz	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3

For 5GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac 20MHz	MCS0, Nss1	149/157/165	1+2+3
	11ac 40MHz	MCS0, Nss1	151/159	1+2+3
	11ac 80MHz	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Power Spectral Density	11ac 20MHz	MCS0, Nss1	149/157/165	1+2+3
	11ac 40MHz	MCS0, Nss1	151/159	1+2+3
	11ac 80MHz	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
6dB Spectrum Bandwidth	11ac 20MHz	MCS0, Nss1	149/157/165	1+2+3
	11ac 40MHz	MCS0, Nss1	151/159	1+2+3
	11ac 80MHz	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11ac 20MHz	MCS0, Nss1	149/157/165	1+2+3
	11ac 40MHz	MCS0, Nss1	151/159	1+2+3
	11ac 80MHz	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Band Edge Emissions	11ac 20MHz	MCS0, Nss1	149/157/165	1+2+3
	11ac 40MHz	MCS0, Nss1	151/159	1+2+3
	11ac 80MHz	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3

The following test modes were performed for all tests:

For Radiated Emission below 1GHz test:

Mode 1. Laying of EUT

Mode 2. Stand of EUT

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission above 1GHz test:

There are two modes of EUT, one is Laying of EUT, and the other is Stand of EUT.

After evaluating, Laying of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission above 1GHz test will follow this same test mode.

For Co-location test:

The mode "Laying of EUT" has been evaluated to be the worst case for Radiated emission test.

Consequently, measurement for Co-location test will follow this same test mode.

For MPE and Co-location test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO02-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The EUT has two model numbers which are identical to each other in all aspects except for the following table:

Model No.	Color of housing	Description
DIR-880L	Black	Matched with Ant. 1(C037-510901-A) or Ant. 2 (C037-511311-A).
DIR-880LW	White	Matched with Ant. 3 (C037-511313-A)

From the above models, model: DIR-880L was selected as representative model for the test and its data was recorded in this report.

3.8. Table for Supporting Units

AC Power Line Conducted Emissions test:

Support Unit	Brand	Model	FCC ID
Flash Disk	Silicon	I-Series	DoC
HDD3.0	WD	WDBACY5000AWT	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC

Radiated Emissions below 1GHz test:

Support Unit	Brand	Model	FCC ID
Flash Disk	Silicon	D33B03	DoC
HDD3.0	WD	WDBACY5000AWT	DoC
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
NB	DELL	E6430	DoC
NB	DELL	D420	DoC

Radiated Emissions above 1GHz test:

For non-beamforming function:

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For Beamforming function:

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	D420	DoC
WiFi USB Adapter	NETGEAR	A6200	PY312200200

For Others test:

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming function:

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	82	100	78

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	67	77	62

Power Parameters of IEEE 802.11b/g

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	94	100	90
IEEE 802.11g	82	100	80

Power Parameters of IEEE 802.11ac MCS0, Nss1 20MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0, Nss1 20MHz	98	98	98

Power Parameters of IEEE 802.11ac MCS0, Nss1 40MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	5755 MHz	5795 MHz	
MCS0, Nss1 40MHz	98	98	

Power Parameters of IEEE 802.11ac MCS0, Nss1 80MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	5775 MHz		
MCS0, Nss1 80MHz	94		

Power Parameters of IEEE 802.11a

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	98	98	98

For beamforming function:

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	68	94	73

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	68	73	63

Power Parameters of IEEE 802.11ac MCS0, Nss1 20MHz

Test Software Version	Munual Tool Version 2.0.1.0		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0, Nss1 20MHz	92	92	92

Power Parameters of IEEE 802.11ac MCS0, Nss1 40MHz

Test Software Version	Munual Tool Version 2.0.1.0	
Frequency	5755 MHz	5795 MHz
MCS0, Nss1 40MHz	92	92

Power Parameters of IEEE 802.11ac MCS0, Nss1 80MHz

Test Software Version	Munual Tool Version 2.0.1.0
Frequency	5775 MHz
MCS0, Nss1 80MHz	94

3.10. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:


During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WiFi USB Adapter and transmit duty cycle no less 98%


3.11. Duty Cycle

IEEE 802.11n MCS0 20MHz

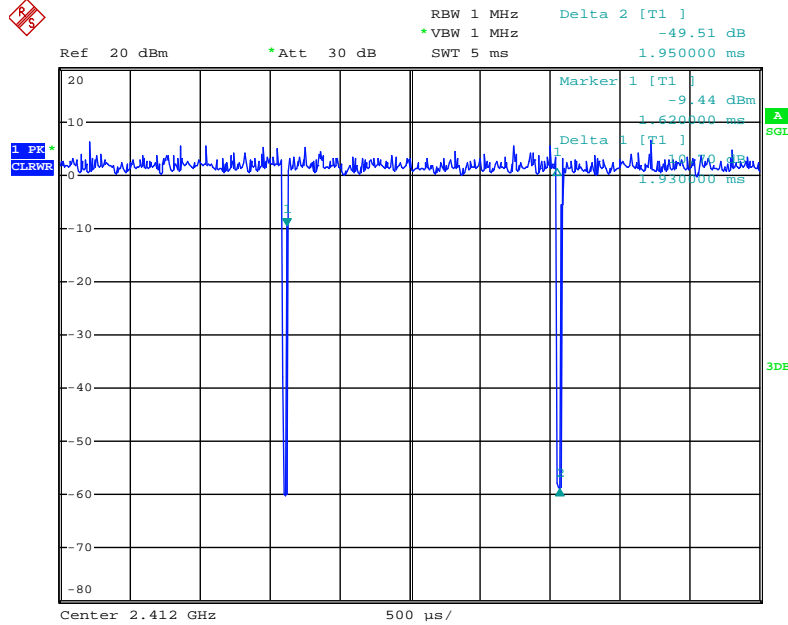


Date: 12.JAN.2014 16:22:57

IEEE 802.11n MCS0 40MHz

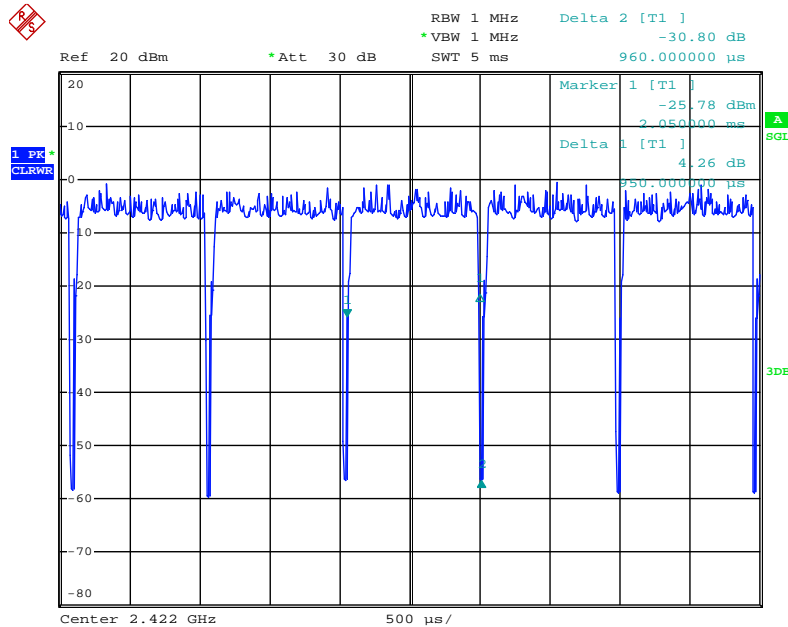


Date: 12.JAN.2014 16:23:38

IEEE 802.11ac MCS0, Nss1 20MHz

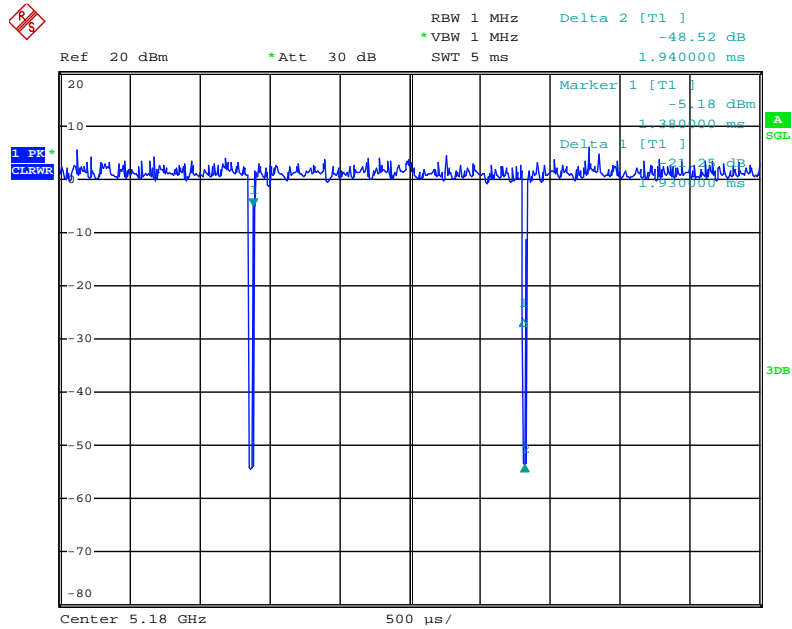


Date: 12.JAN.2014 16:24:29

IEEE 802.11ac MCS0, Nss1 40MHz

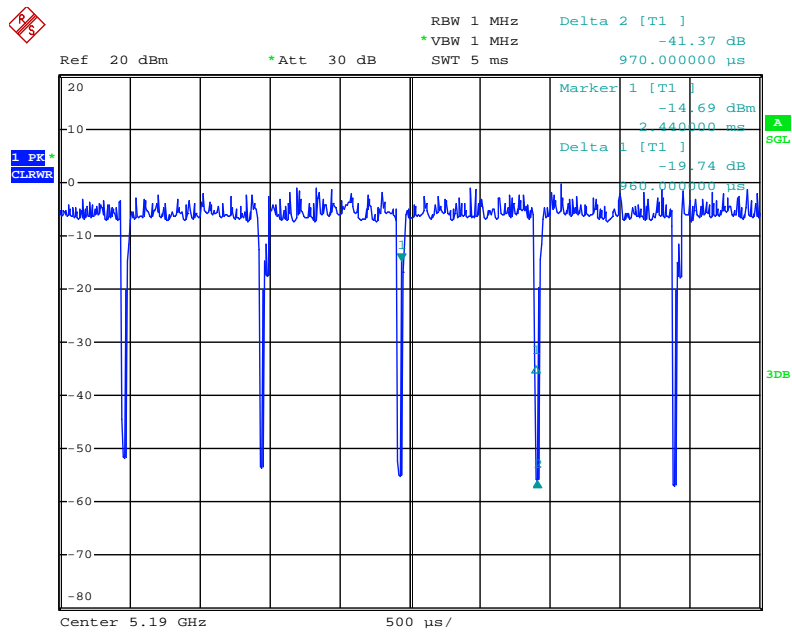


Date: 12.JAN.2014 16:26:05

IEEE 802.11ac MCS0, Nss1 80MHz

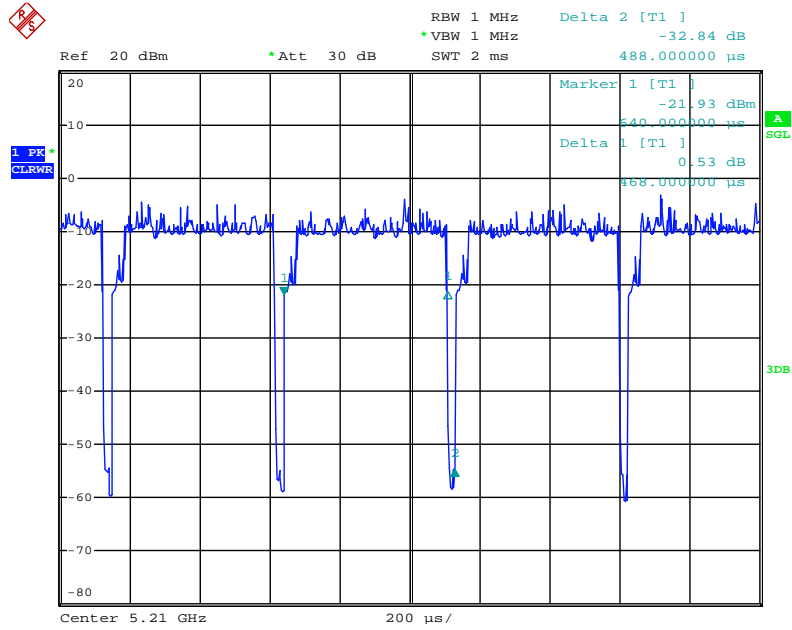


Date: 12.JAN.2014 16:27:04

IEEE 802.11b

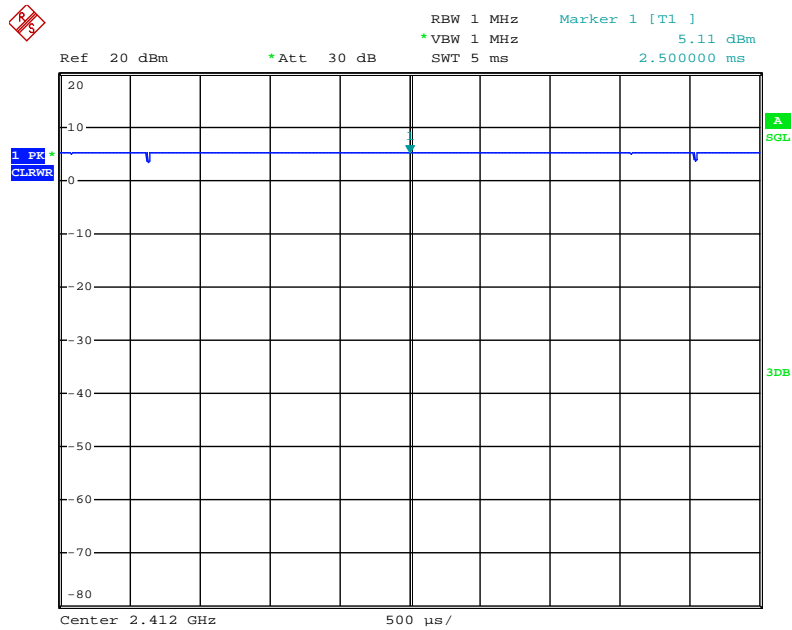


Date: 12.JAN.2014 16:21:48

IEEE 802.11g

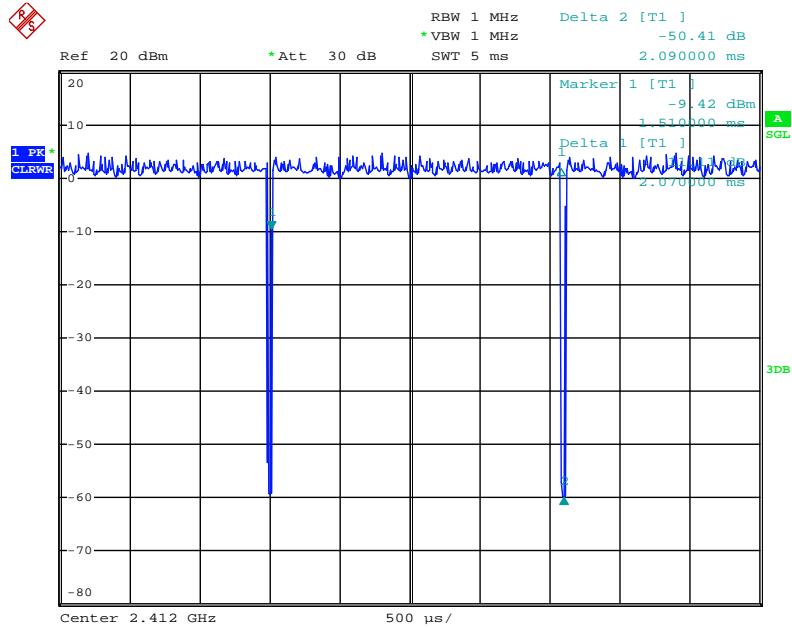

Date: 12.JAN.2014 16:22:23


IEEE 802.11a

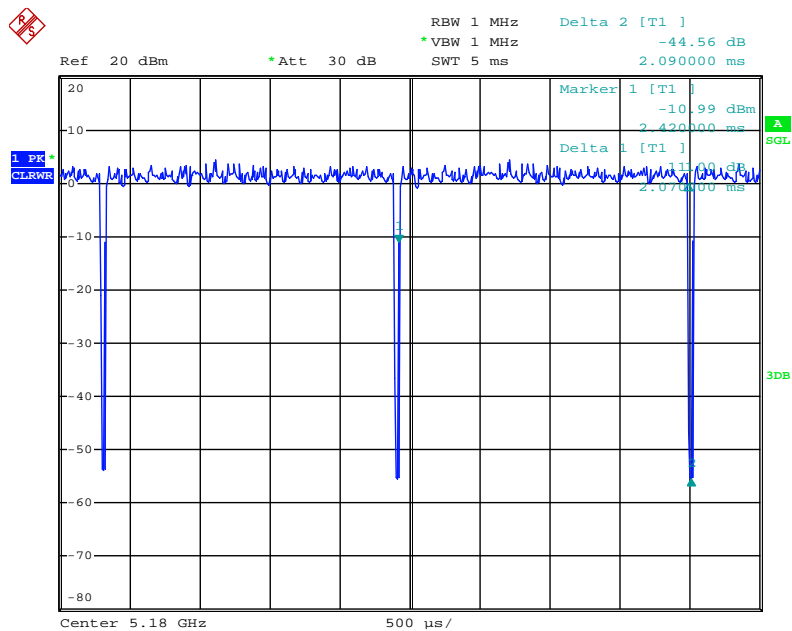

Date: 12.JAN.2014 16:25:14

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

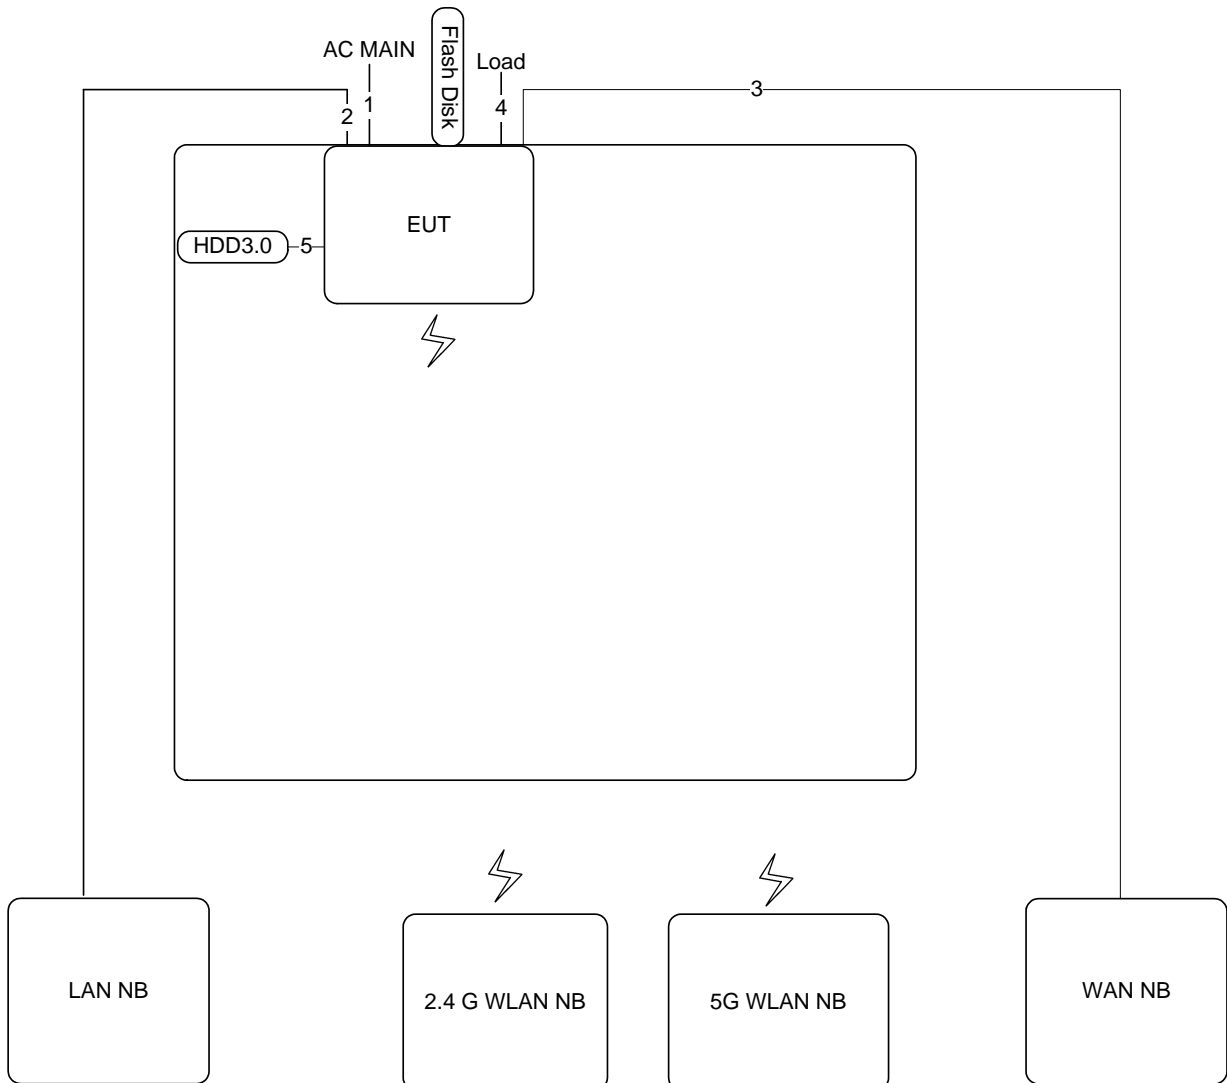

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m
5	USB cable	Yes	0.5m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

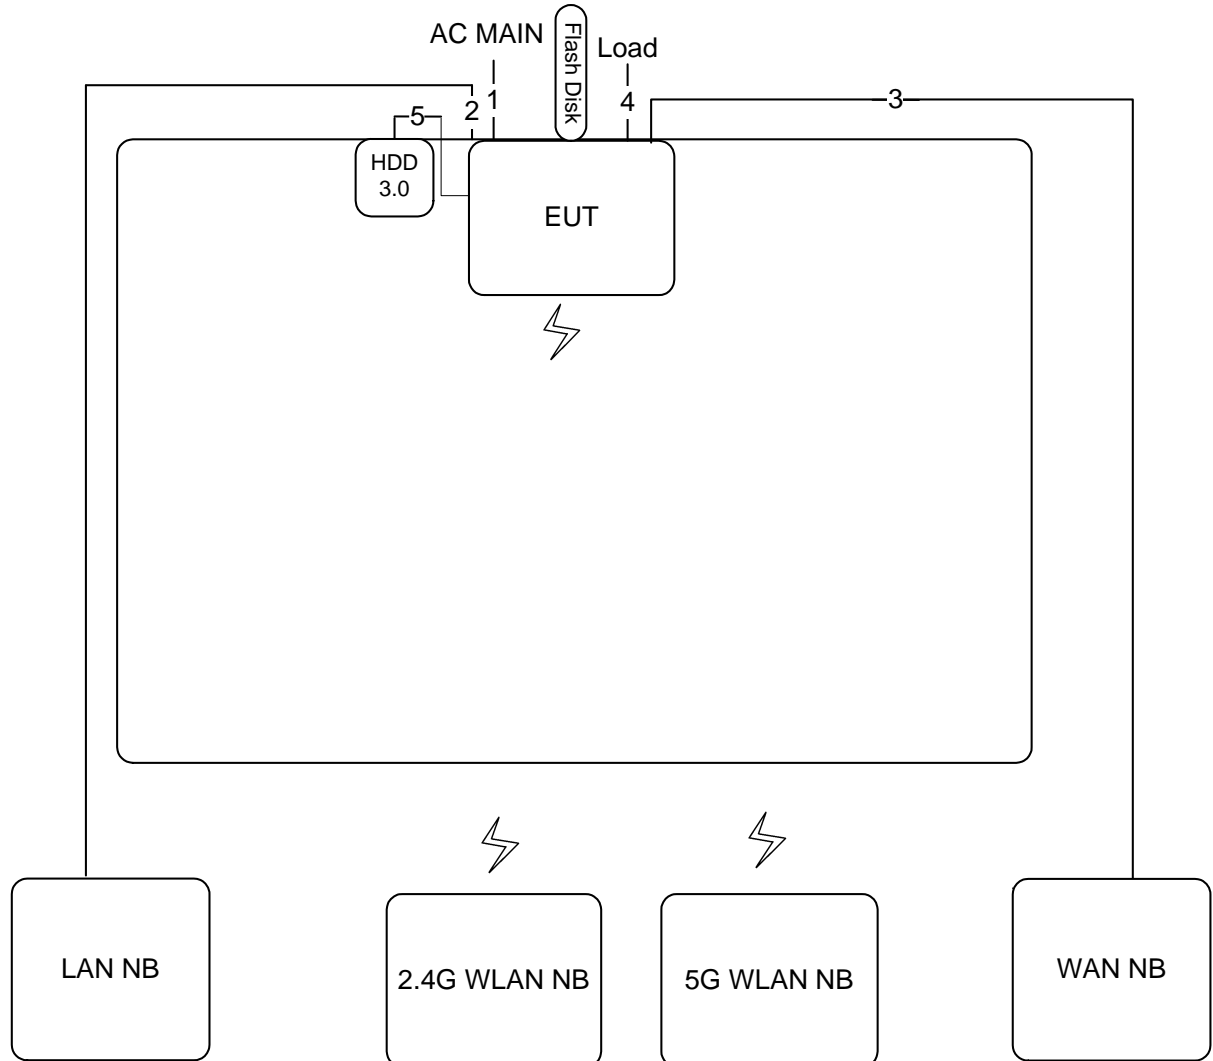


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m
5	USB cable	No	0.2m

Test Configuration: above 1GHz / For non-beamforming function:

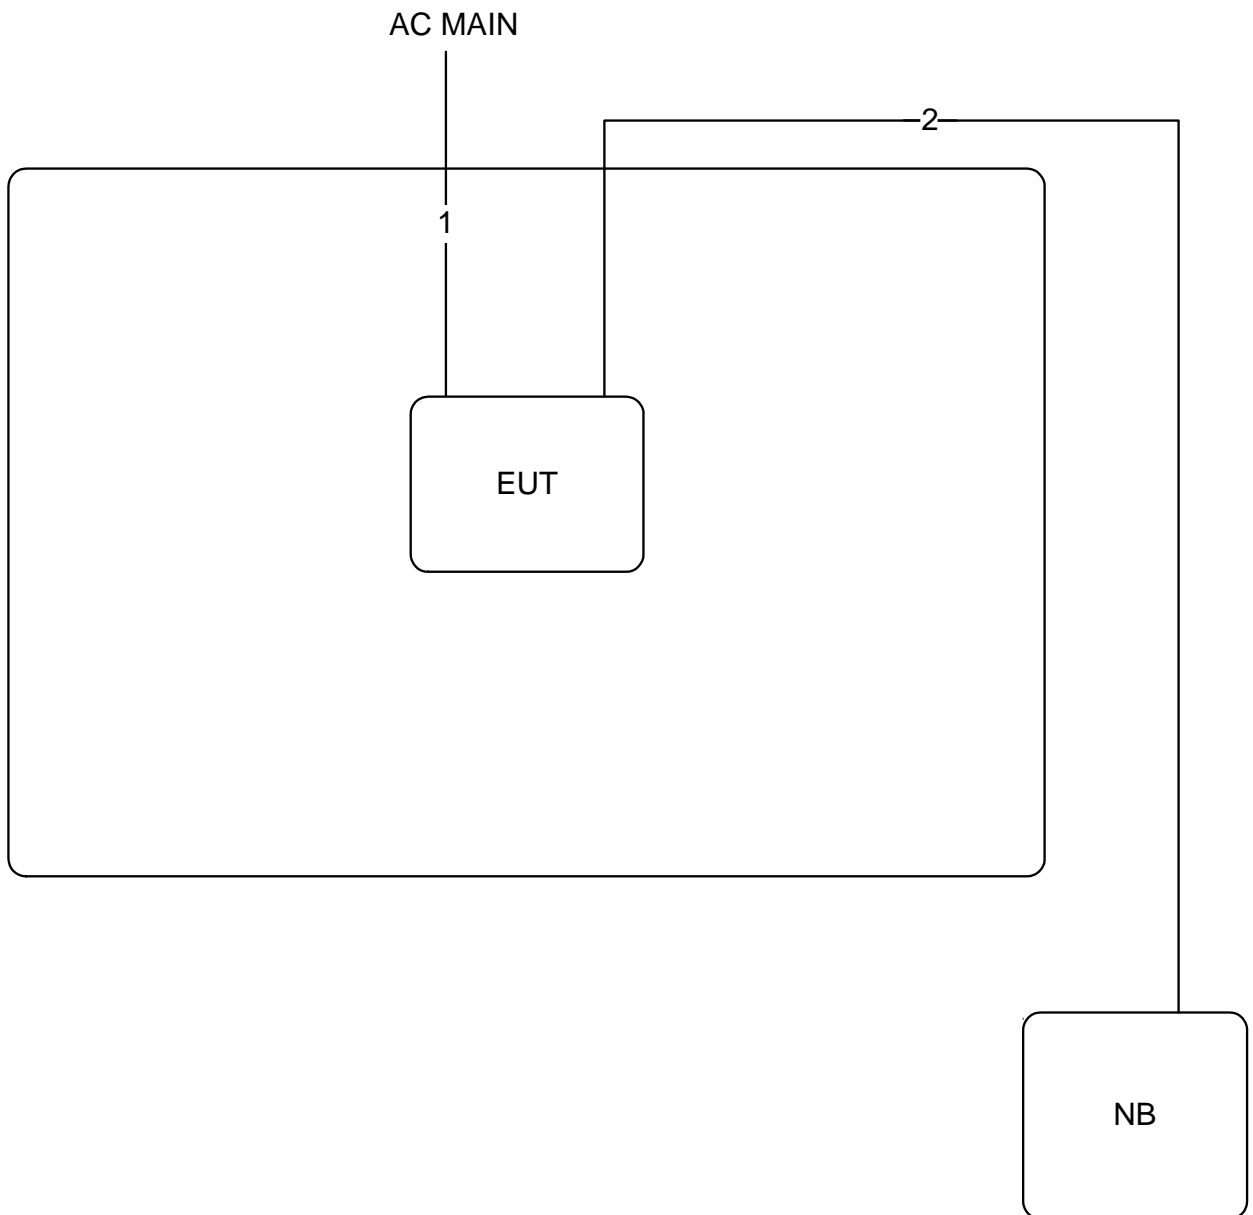

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

For beamforming function:

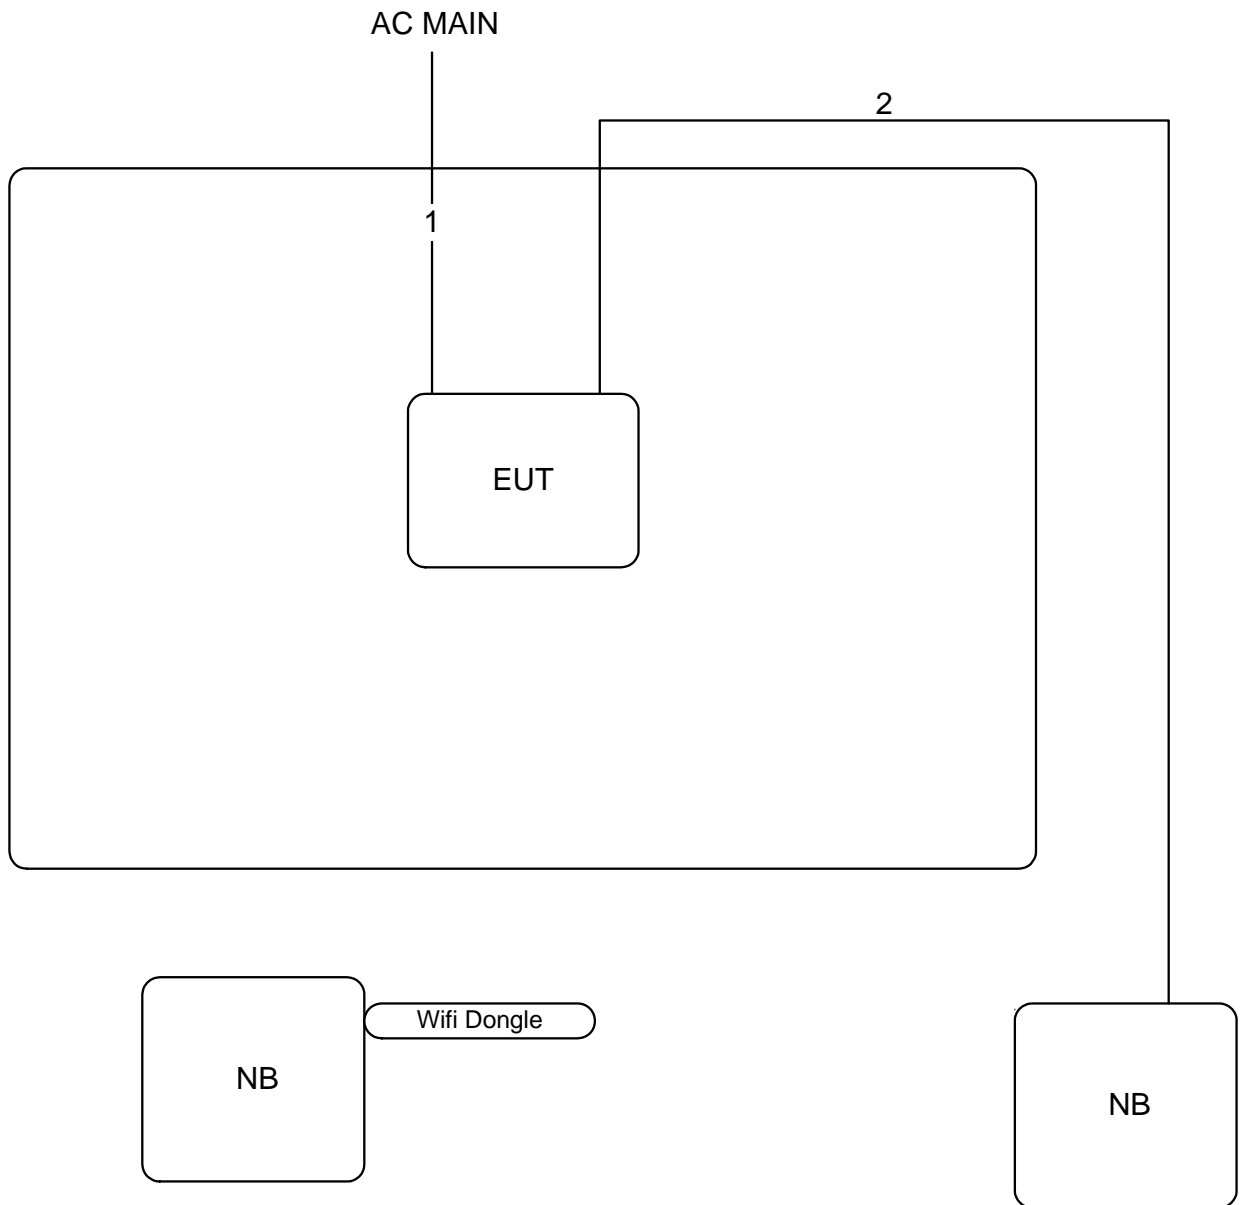

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

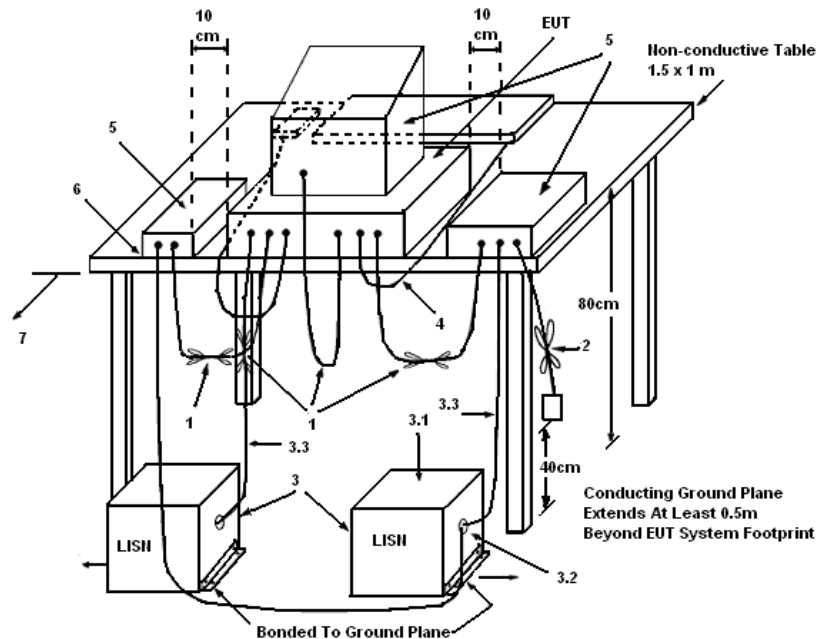

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	51%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link		

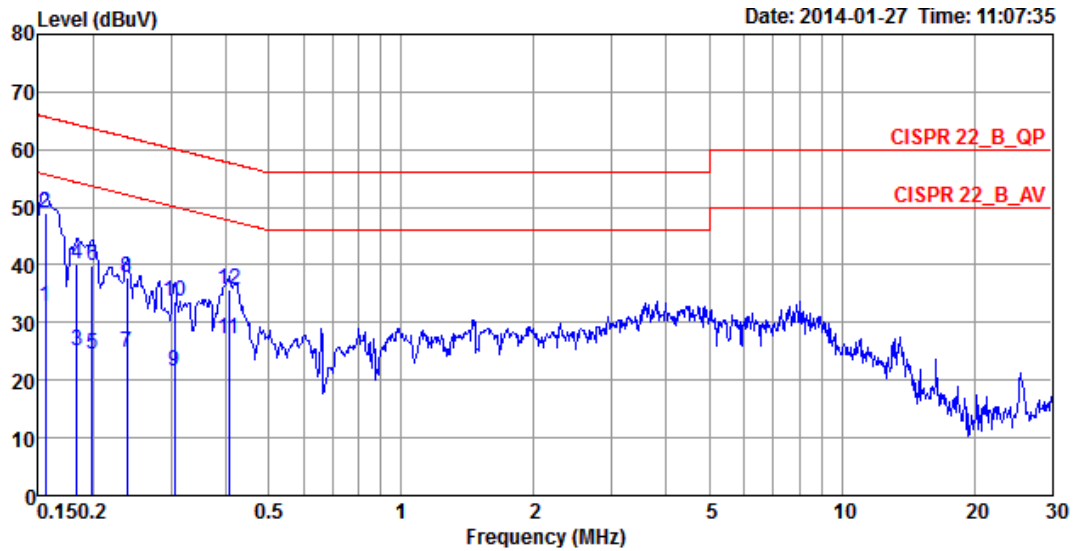

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	32.72	-22.97	55.69	32.45	0.22	0.05	Average	LINE
2 q	0.1557	48.99	-16.70	65.69	48.72	0.22	0.05	QP	LINE
3	0.1835	25.16	-29.17	54.33	24.88	0.21	0.07	Average	LINE
4	0.1835	40.20	-24.13	64.33	39.92	0.21	0.07	QP	LINE
5	0.1986	24.39	-29.28	53.67	24.11	0.21	0.07	Average	LINE
6	0.1986	39.73	-23.94	63.67	39.45	0.21	0.07	QP	LINE
7	0.2378	24.93	-27.24	52.17	24.66	0.21	0.06	Average	LINE
8	0.2378	37.73	-24.44	62.17	37.46	0.21	0.06	QP	LINE
9	0.3051	21.54	-28.56	50.10	21.26	0.22	0.06	Average	LINE
10	0.3051	33.56	-26.54	60.10	33.28	0.22	0.06	QP	LINE
11 a	0.4061	27.11	-20.62	47.73	26.84	0.22	0.05	Average	LINE
12	0.4061	35.87	-21.86	57.73	35.60	0.22	0.05	QP	LINE

Temperature	23°C	Humidity	51%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	Normal Link		

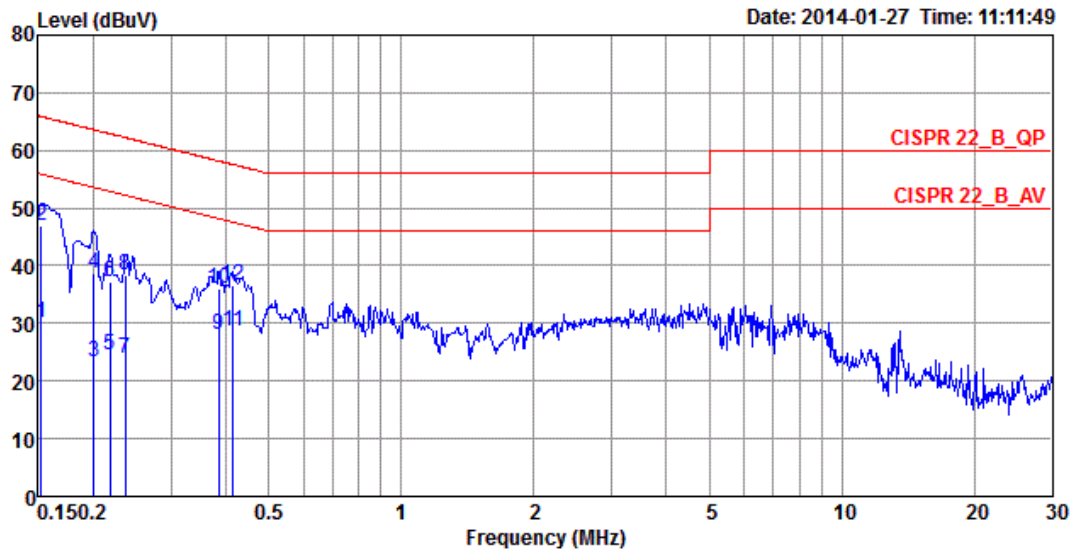

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1524	30.06	-25.81	55.87	29.92	0.09	0.05	Average	NEUTRAL
2	0.1524	46.82	-19.05	65.87	46.68	0.09	0.05	QP	NEUTRAL
3	0.2007	23.47	-30.11	53.58	23.33	0.07	0.07	Average	NEUTRAL
4	0.2007	38.54	-25.04	63.58	38.40	0.07	0.07	QP	NEUTRAL
5	0.2185	24.42	-28.46	52.88	24.28	0.07	0.07	Average	NEUTRAL
6	0.2185	37.08	-25.80	62.88	36.94	0.07	0.07	QP	NEUTRAL
7	0.2366	24.04	-28.18	52.22	23.91	0.07	0.06	Average	NEUTRAL
8	0.2366	38.49	-23.73	62.22	38.36	0.07	0.06	QP	NEUTRAL
9	0.3852	27.92	-20.25	48.17	27.79	0.08	0.05	Average	NEUTRAL
10	0.3852	35.94	-22.23	58.17	35.81	0.08	0.05	QP	NEUTRAL
11	0.4148	28.56	-18.99	47.55	28.43	0.08	0.05	Average	NEUTRAL
12	0.4148	36.69	-20.86	57.55	36.56	0.08	0.05	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

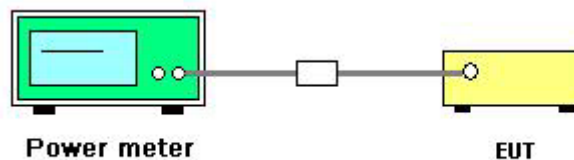

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11n/ac
Test Date	Jan. 11, 2014		

For non-beamforming function:

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	20.51	20.36	21.13	25.45	30.00	Complies
6	2437 MHz	25.23	24.88	25.19	29.87	30.00	Complies
11	2462 MHz	19.45	19.36	20.01	24.39	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	17.14	17.17	17.68	22.11	30.00	Complies
6	2437 MHz	19.74	19.64	20.25	24.66	30.00	Complies
9	2452 MHz	15.79	15.96	16.48	20.86	30.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 20MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	25.11	25.07	25.15	29.88	30.00	Complies
157	5785 MHz	25.02	24.88	25.18	29.80	30.00	Complies
165	5825 MHz	25.01	24.92	25.13	29.79	30.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	25.03	24.83	25.13	29.77	30.00	Complies
159	5795 MHz	25.01	25.01	25.22	29.85	30.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	23.66	23.72	24.25	28.66	30.00	Complies

For beamforming function:

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	17.59	17.15	17.99	22.36	29.23	Complies
6	2437 MHz	24.12	23.48	25.01	29.02	29.23	Complies
11	2462 MHz	18.33	18.51	19.19	23.46	29.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.77\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.77 - 6) = 29.23\text{dBm}$.

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	17.59	17.23	18.32	22.51	29.23	Complies
6	2437 MHz	18.89	18.96	19.54	23.91	29.23	Complies
9	2452 MHz	16.13	16.01	16.69	21.06	29.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.77\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.77 - 6) = 29.23\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 20MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	23.46	23.29	23.60	28.22	28.23	Complies
157	5785 MHz	23.71	23.09	23.22	28.12	28.23	Complies
165	5825 MHz	23.42	23.11	23.37	28.07	28.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $30 - (7.77 - 6) = 28.23\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 40MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	23.37	23.15	23.27	28.04	28.23	Complies
159	5795 MHz	23.45	23.09	23.52	28.13	28.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $30 - (7.77 - 6) = 28.23\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 80MHz

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	23.24	23.25	23.71	28.18	28.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $30 - (7.77 - 6) = 28.23\text{dBm}$.

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a/b/g
Test Date	Jan. 11, 2014		

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	24.53	24.18	25.43	29.52	30.00	Complies
6	2437 MHz	25.27	24.87	25.22	29.89	30.00	Complies
11	2462 MHz	22.89	22.91	23.99	28.07	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	20.61	20.53	21.28	25.59	30.00	Complies
6	2437 MHz	25.21	24.83	25.12	29.83	30.00	Complies
11	2462 MHz	19.92	19.88	20.48	24.87	30.00	Complies

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	25.01	25.25	25.31	29.96	30.00	Complies
157	5785 MHz	25.11	25.07	25.28	29.93	30.00	Complies
165	5825 MHz	25.09	24.86	25.14	29.80	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

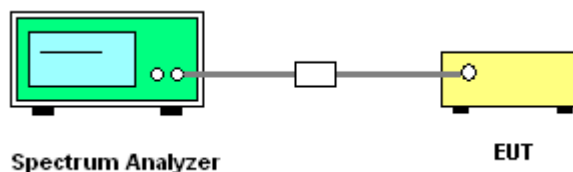

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11n/ac

For non-beamforming function:

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-5.57	-5.70	-6.36	-1.09	8.00	Complies
6	2437 MHz	-2.00	-2.08	-0.19	3.44	8.00	Complies
11	2462 MHz	-7.06	-7.07	-7.66	-2.48	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-11.66	-11.86	-12.47	-7.21	8.00	Complies
6	2437 MHz	-9.22	-9.14	-8.90	-4.31	8.00	Complies
9	2452 MHz	-12.70	-12.45	-11.84	-7.54	8.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 20MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	-2.31	-3.05	-2.25	2.25	8.00	Complies
157	5785 MHz	-1.77	-2.89	-3.19	2.20	8.00	Complies
165	5825 MHz	-2.45	-1.51	-2.98	2.50	8.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	-5.60	-4.80	-5.59	-0.54	8.00	Complies
159	5795 MHz	-5.18	-4.57	-5.78	-0.38	8.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	-8.64	-7.70	-8.83	-3.59	8.00	Complies

For beamforming function:

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-9.86	-9.44	-9.66	-4.88	7.23	Complies
6	2437 MHz	-3.19	-2.84	-2.50	1.94	7.23	Complies
11	2462 MHz	-8.55	-8.51	-8.33	-3.69	7.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.77\text{dBi} > 6\text{dBi}$, so limit = $8 - (6.77 - 6) = 7.23\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-11.47	-12.13	-11.73	-7.00	7.23	Complies
6	2437 MHz	-10.89	-9.10	-9.54	-5.01	7.23	Complies
9	2452 MHz	-12.43	-11.81	-11.90	-7.27	7.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.77\text{dBi} > 6\text{dBi}$, so limit = $8 - (6.77 - 6) = 7.23\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0, Nss1 20MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	-4.31	-4.04	-4.10	0.62	6.23	Complies
157	5785 MHz	-4.05	-4.14	-4.07	0.68	6.23	Complies
165	5825 MHz	-4.07	-3.79	-2.85	1.23	6.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $8 - (7.77 - 6) = 6.23\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0, Nss1 40MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	-7.10	-7.61	-6.36	-2.22	6.23	Complies
159	5795 MHz	-6.88	-7.78	-6.40	-2.21	6.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $8 - (7.77 - 6) = 6.23\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0, Nss1 80MHz

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	-8.64	-7.70	-8.83	-3.59	6.23	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$, so limit = $8 - (7.77 - 6) = 6.23\text{dBm}/3\text{kHz}$.

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	0.37	0.21	1.31	5.43	8.00	Complies
6	2437 MHz	1.36	1.20	1.15	6.01	8.00	Complies
11	2462 MHz	-1.50	-1.52	-0.90	3.47	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-4.54	-6.29	-4.93	-0.42	8.00	Complies
6	2437 MHz	-1.39	-2.39	-0.77	3.30	8.00	Complies
11	2462 MHz	-6.82	-6.91	-6.71	-2.04	8.00	Complies

Configuration IEEE 802.11a


Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	-2.03	-2.26	-1.30	2.93	8.00	Complies
157	5785 MHz	-2.32	-2.58	-2.17	2.42	8.00	Complies
165	5825 MHz	-1.14	-1.62	-1.67	3.30	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For non-beamforming function:

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 1

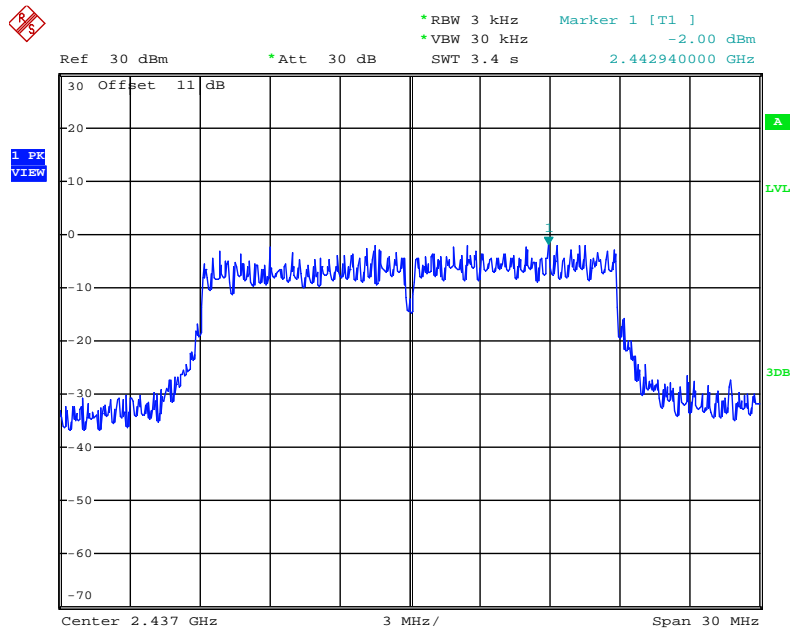


Date: 12.JAN.2014 16:51:20

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 2

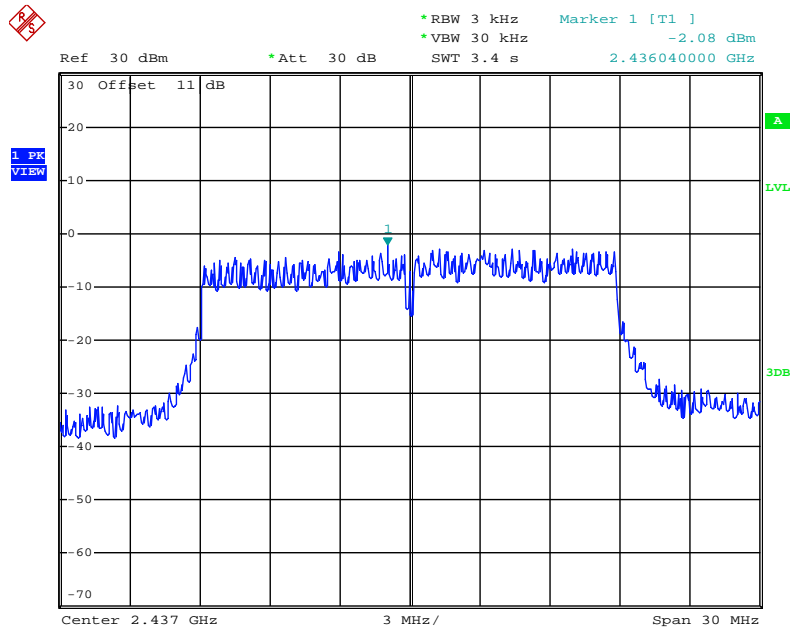


Date: 12.JAN.2014 16:50:41

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 3

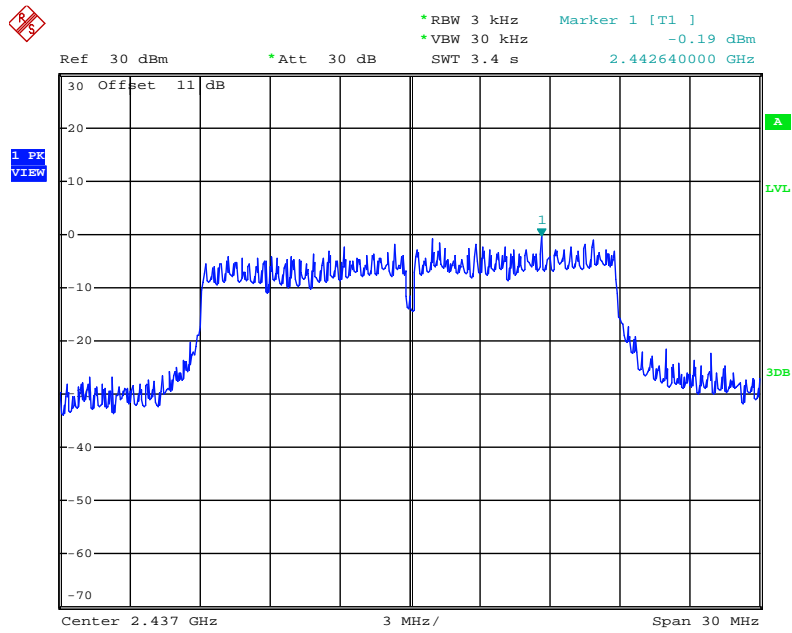


Date: 12.JAN.2014 16:49:59

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 1

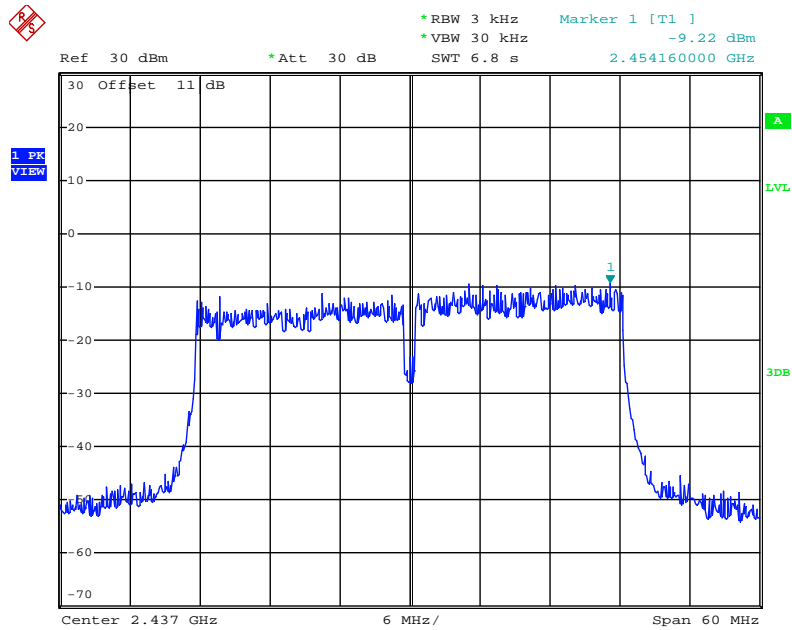


Date: 12.JAN.2014 16:57:13

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 2

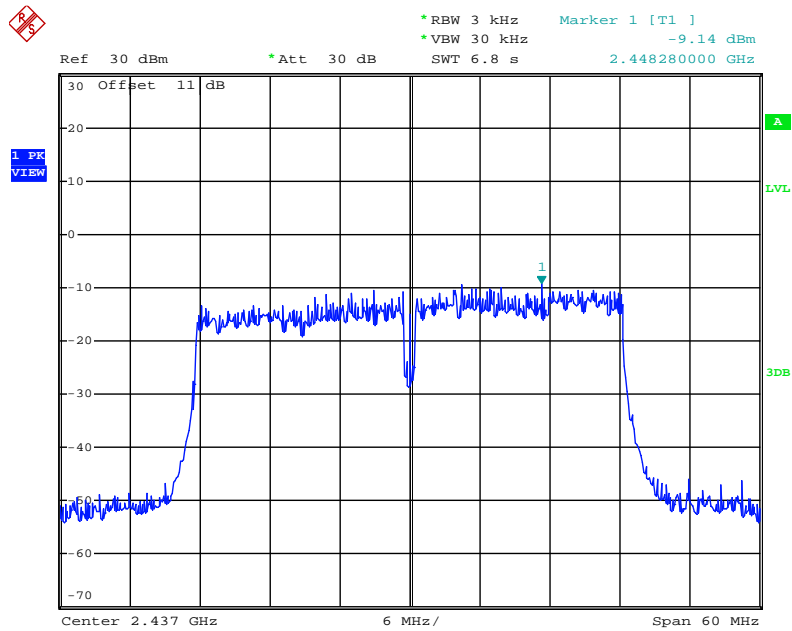


Date: 12.JAN.2014 16:59:46

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 3

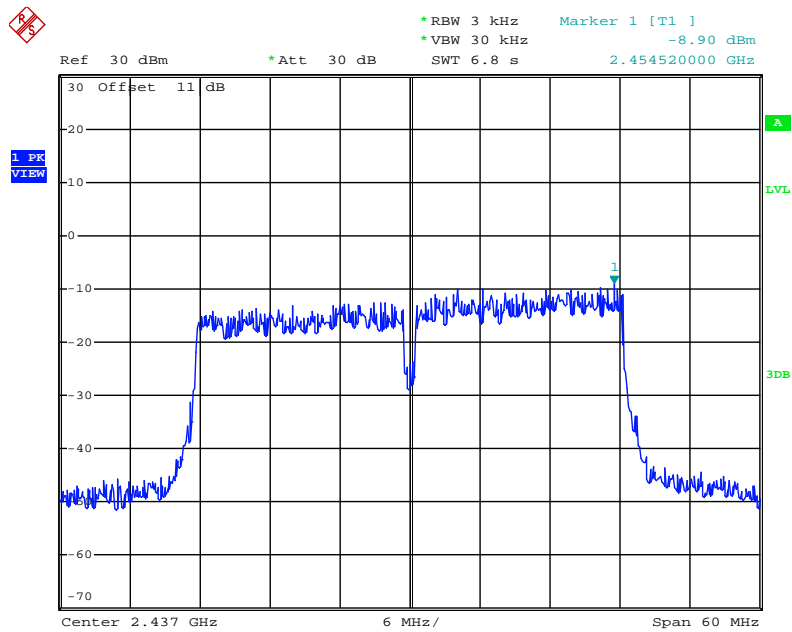


Date: 12.JAN.2014 17:01:43

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 1

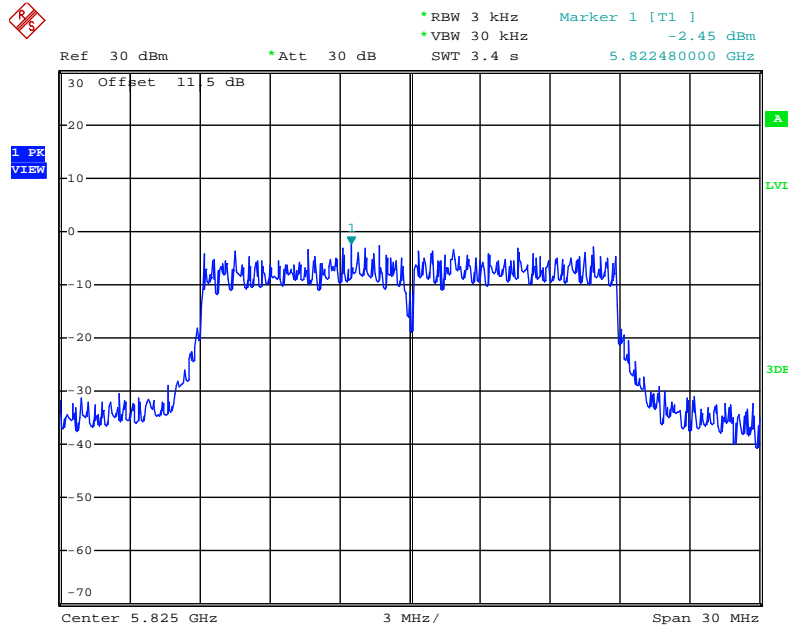


Date: 12.JAN.2014 17:45:15

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 2

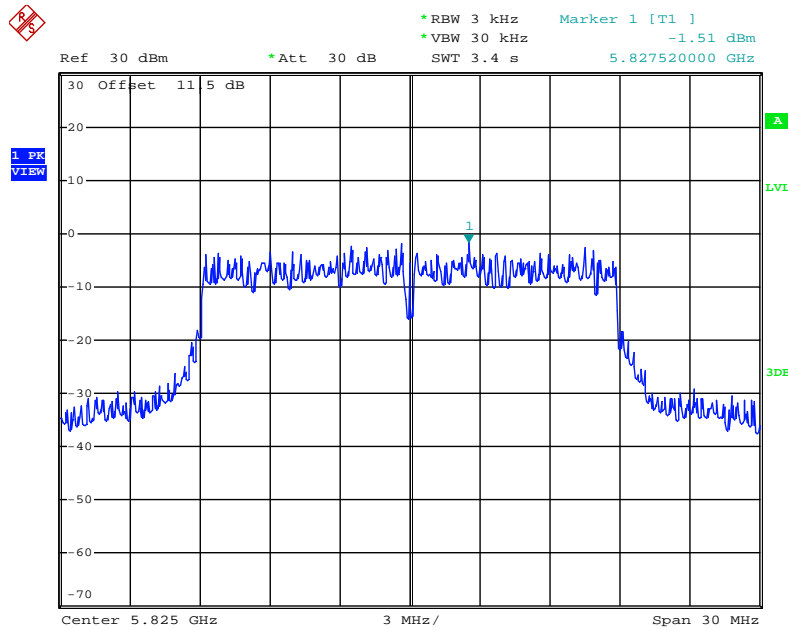


Date: 12.JAN.2014 17:46:15

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 3

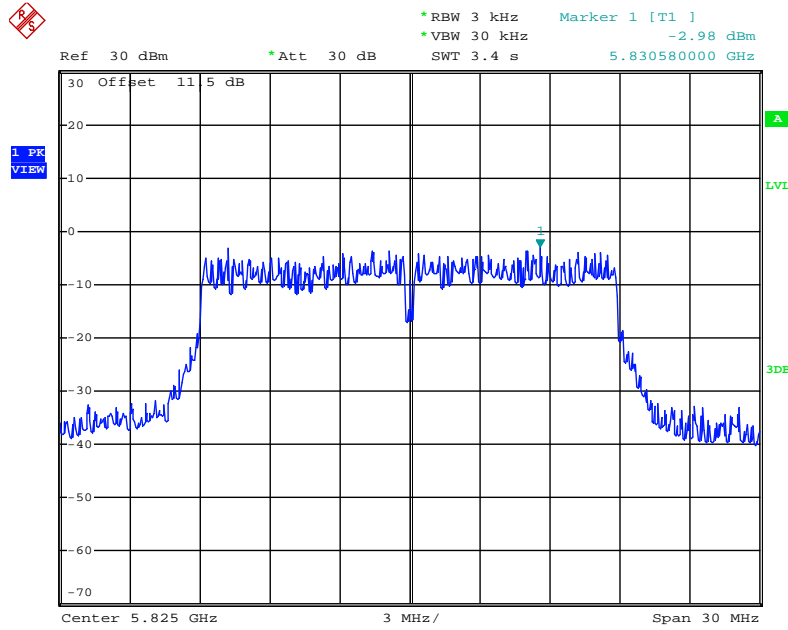


Date: 12.JAN.2014 17:46:45

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 1

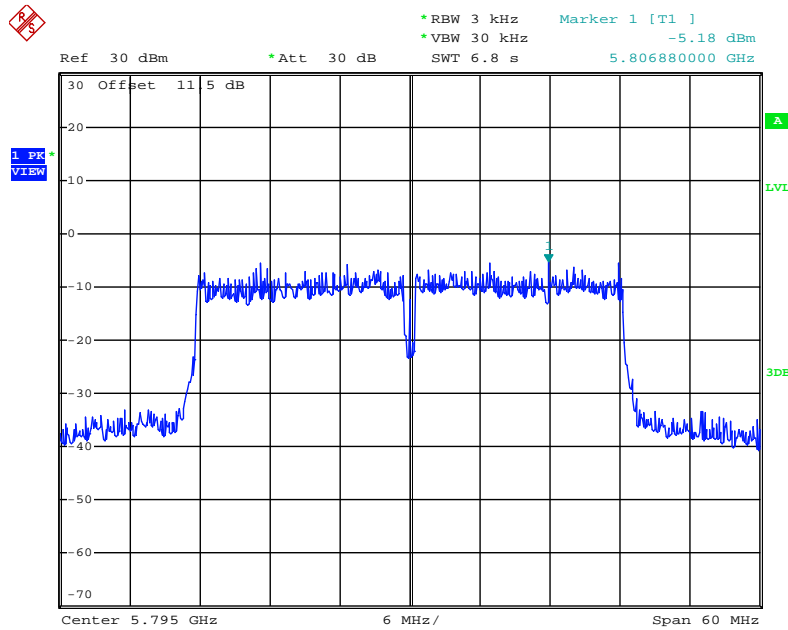


Date: 12.JAN.2014 17:41:33

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 2

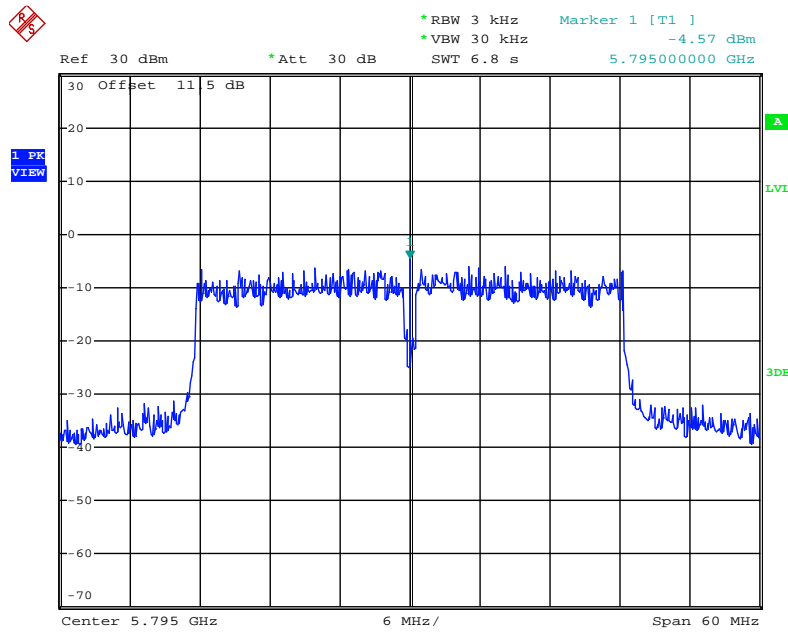


Date: 12.JAN.2014 17:40:59

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 3

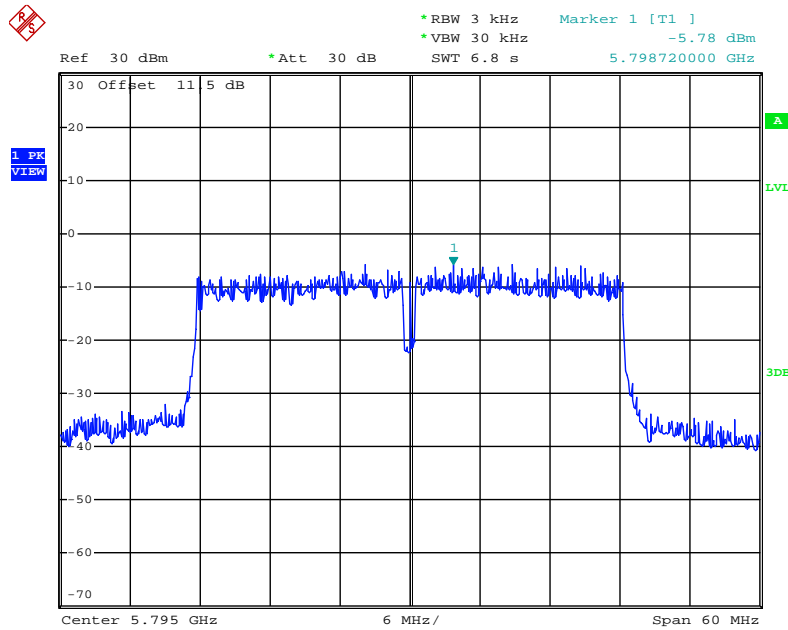


Date: 12.JAN.2014 17:40:13

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 1

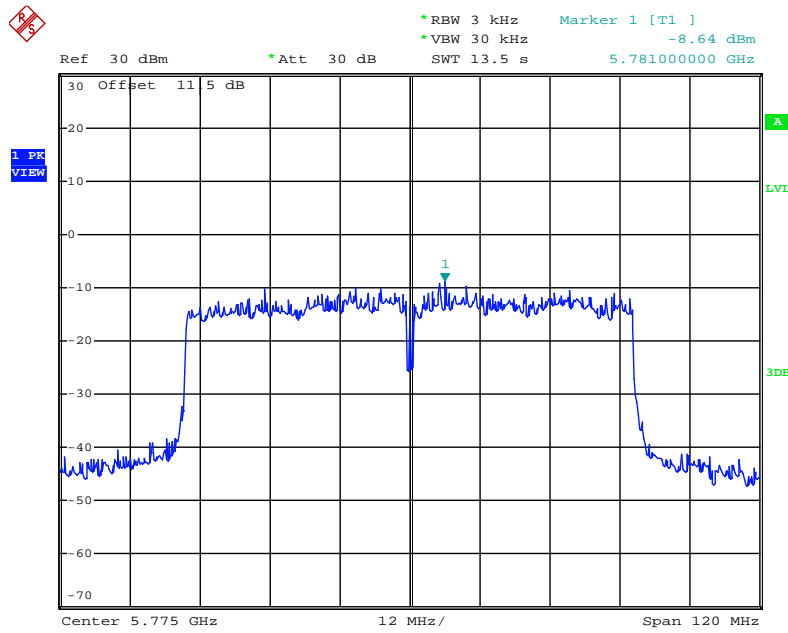


Date: 12.JAN.2014 17:35:03

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 2

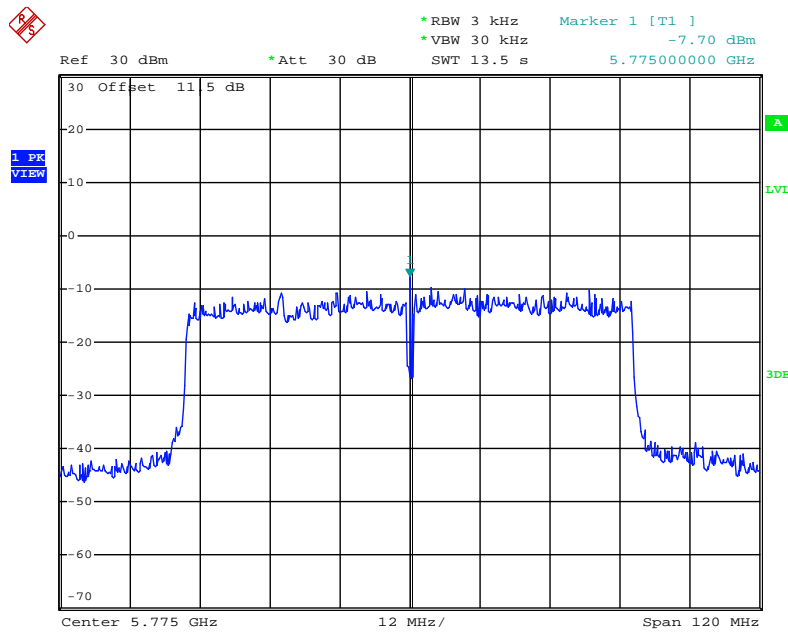


Date: 12.JAN.2014 17:34:27

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 3

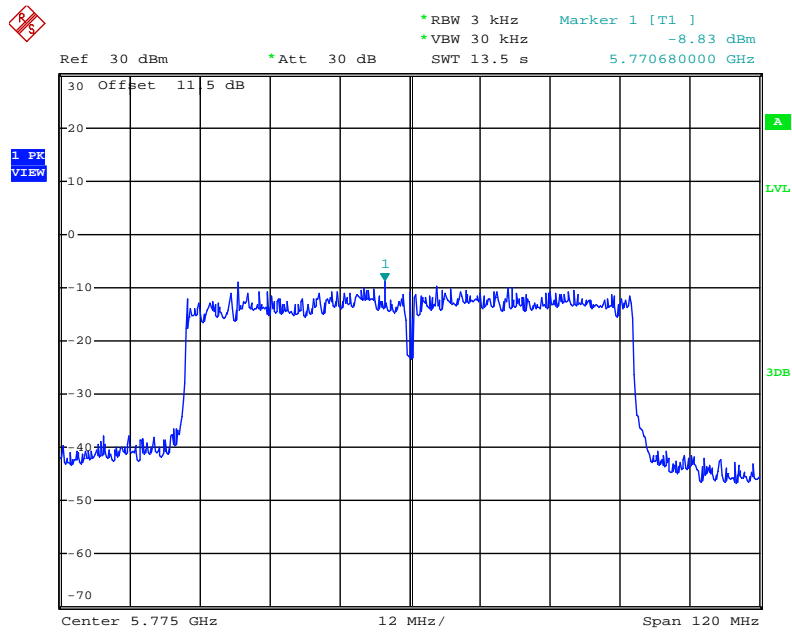


Date: 12.JAN.2014 17:33:48

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

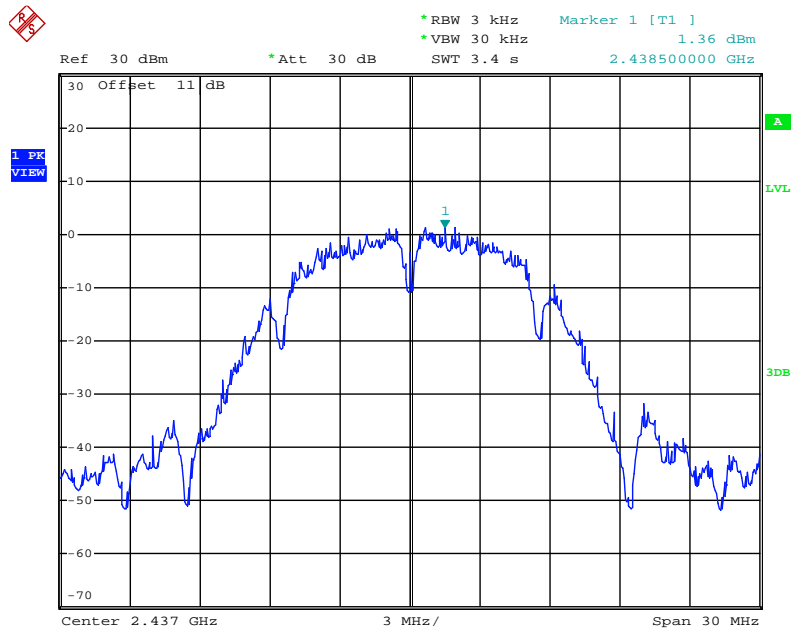


Date: 12.JAN.2014 16:33:48

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

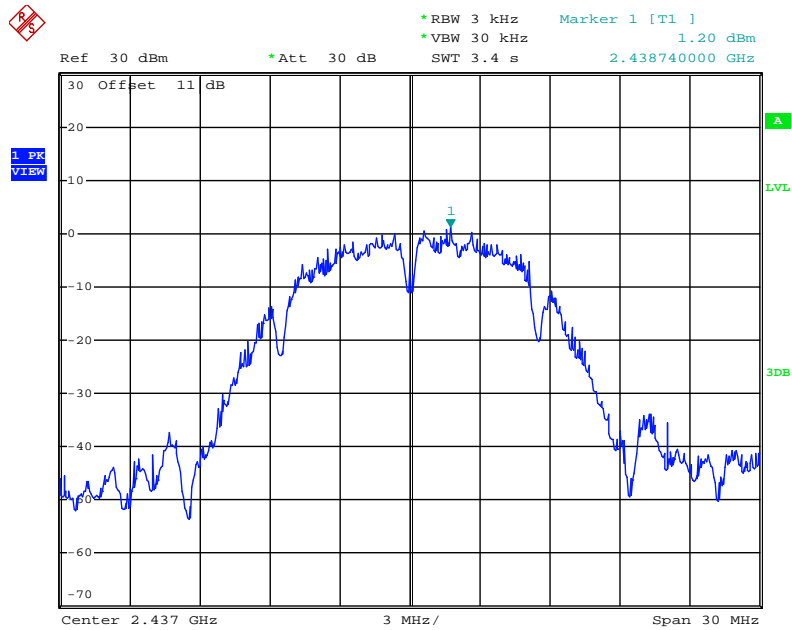


Date: 12.JAN.2014 16:34:57

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

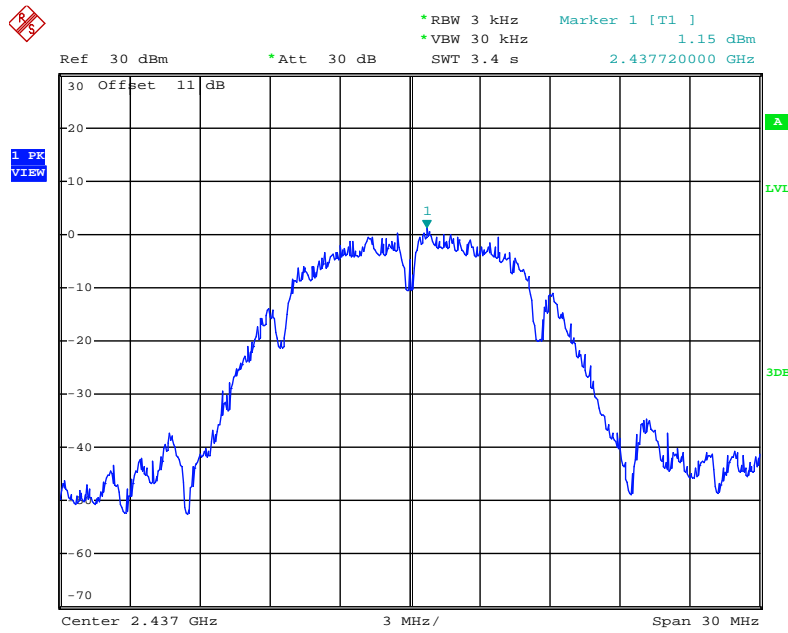


Date: 12.JAN.2014 16:37:32

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

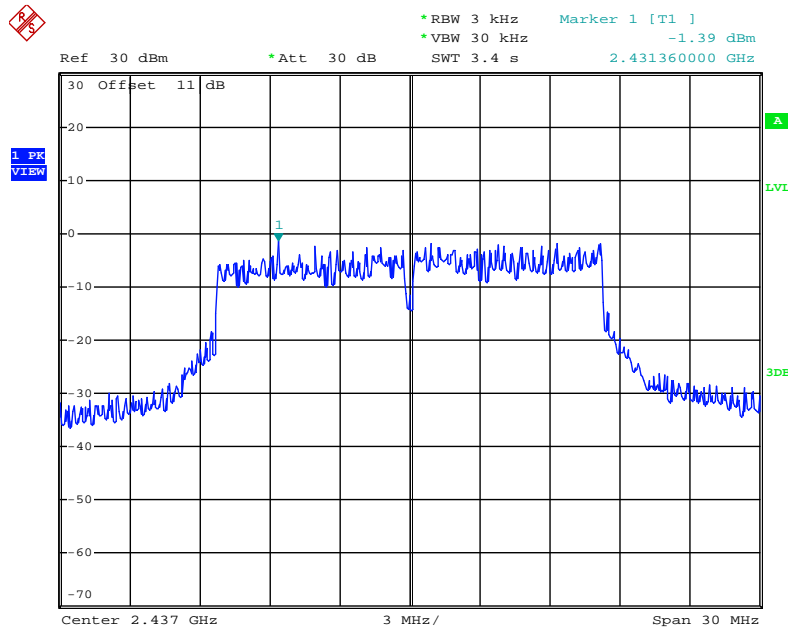


Date: 12.JAN.2014 16:43:46

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

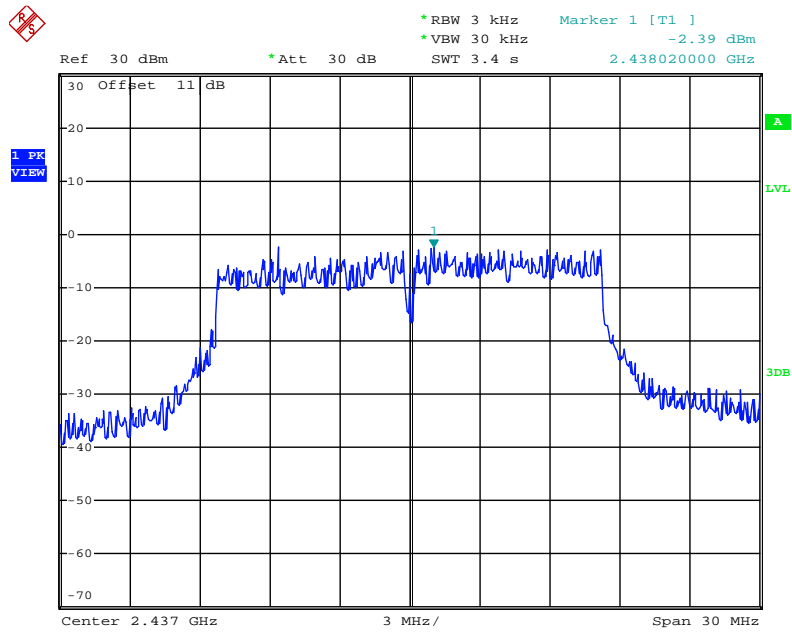


Date: 12.JAN.2014 16:44:40

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

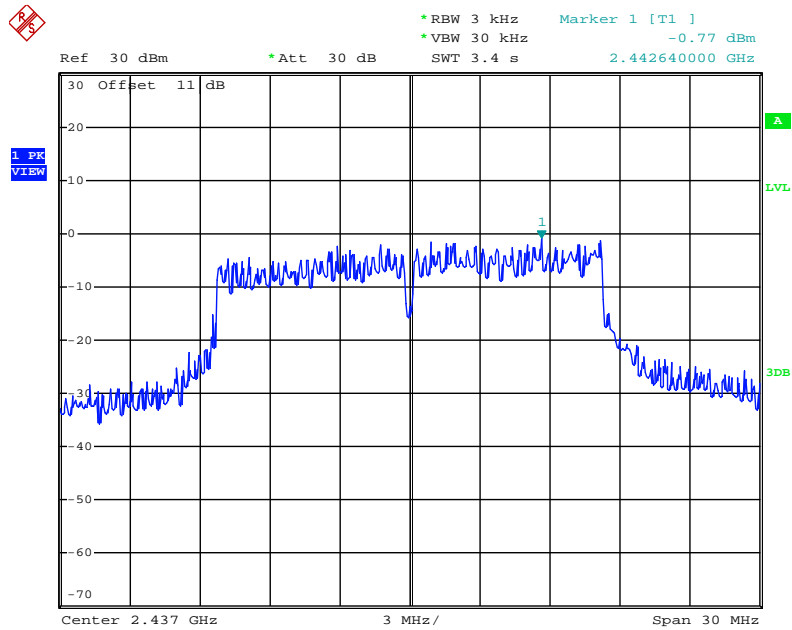


Date: 12.JAN.2014 16:45:24

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 1

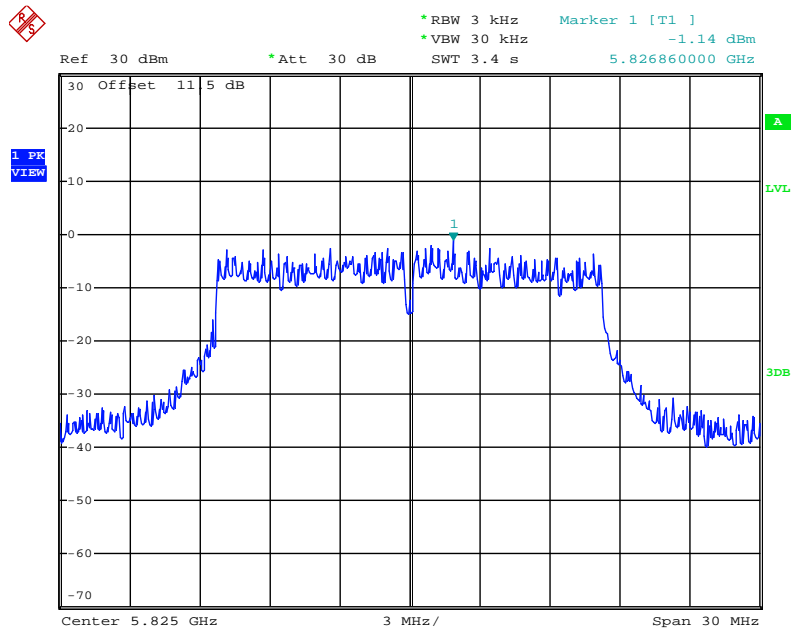


Date: 12.JAN.2014 17:48:28

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 2

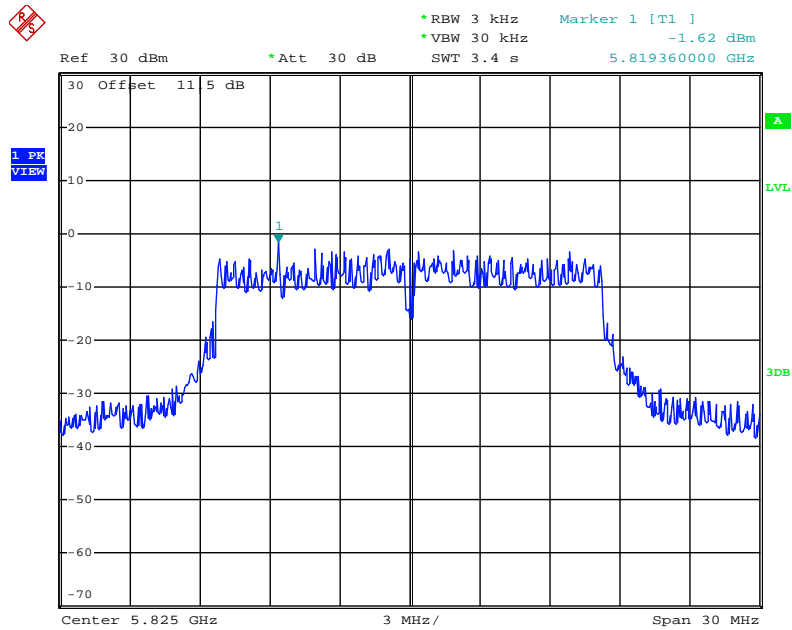

Date: 12.JAN.2014 17:48:03


Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 3

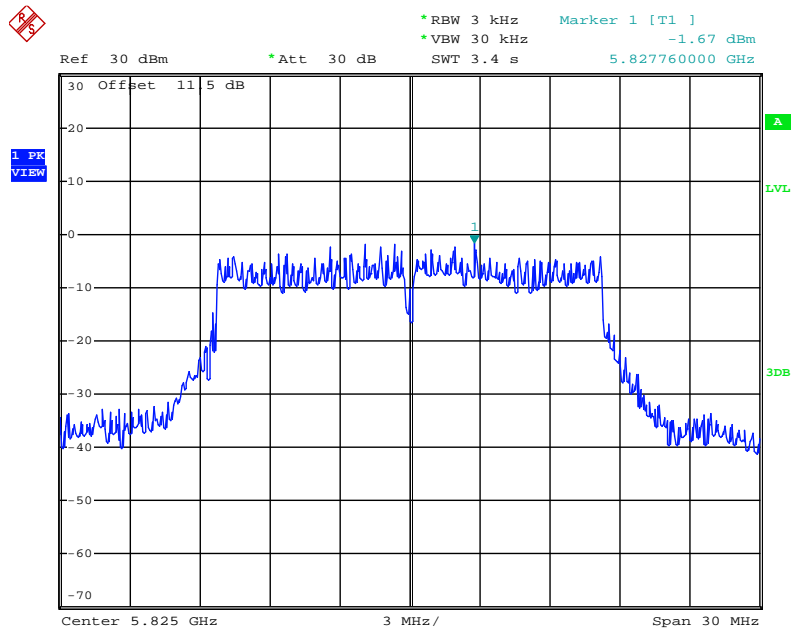

Date: 12.JAN.2014 17:47:34


For beamforming function:

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 1

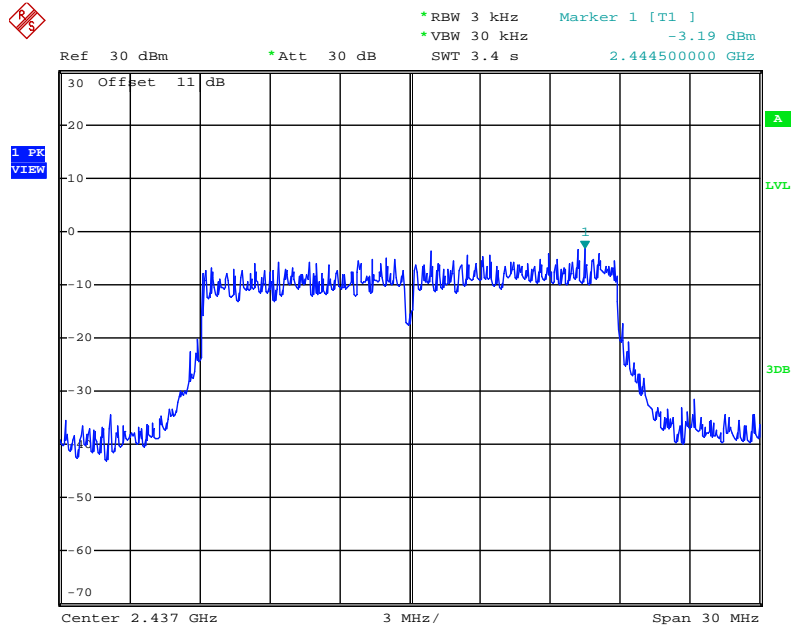


Date: 12.JAN.2014 17:12:15

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 2

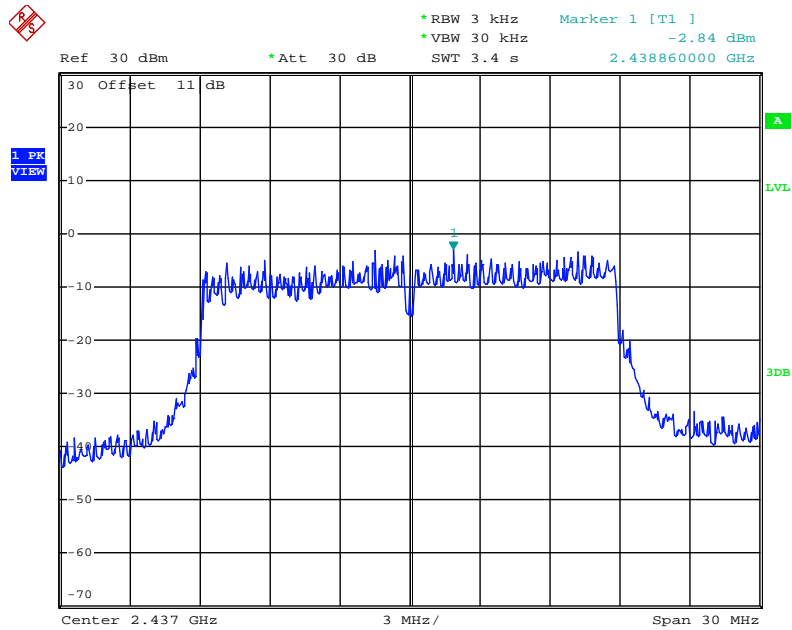


Date: 12.JAN.2014 17:11:33

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 3

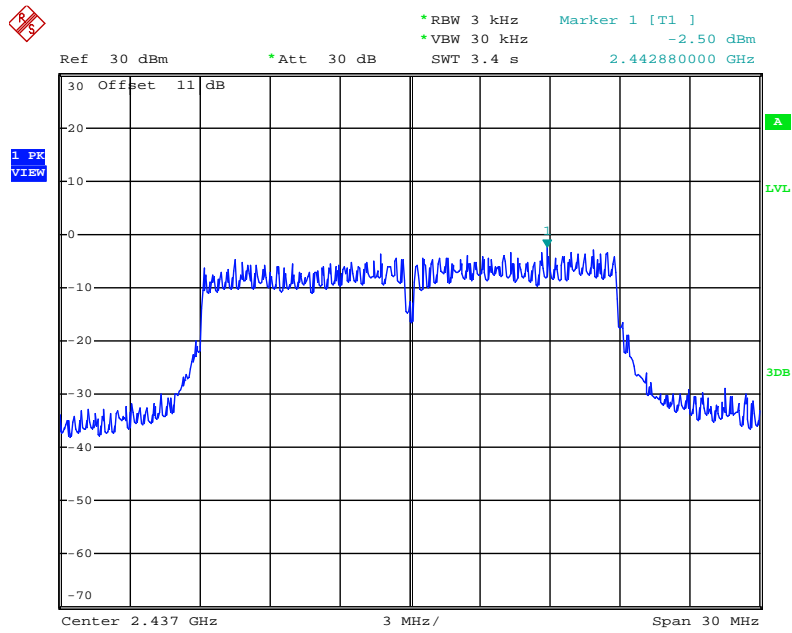


Date: 12.JAN.2014 17:10:48

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 1

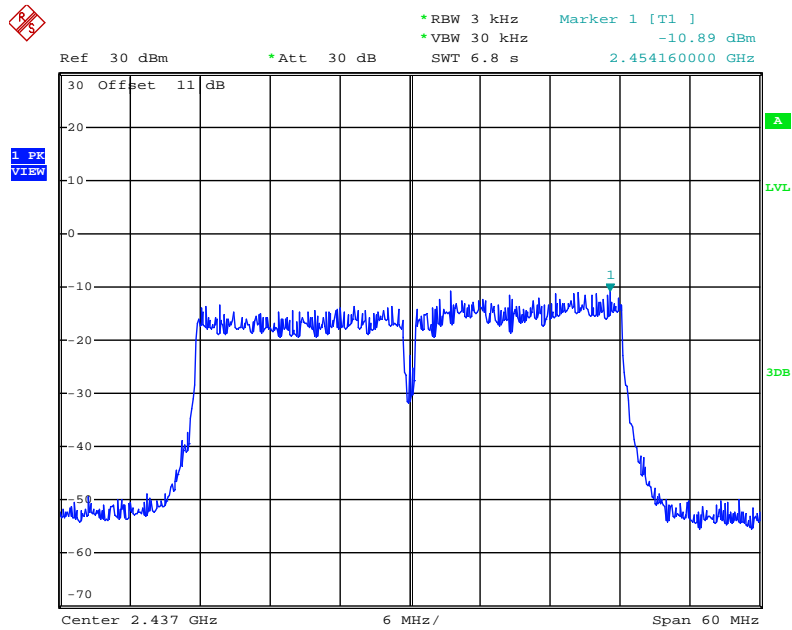


Date: 12.JAN.2014 17:17:32

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 2

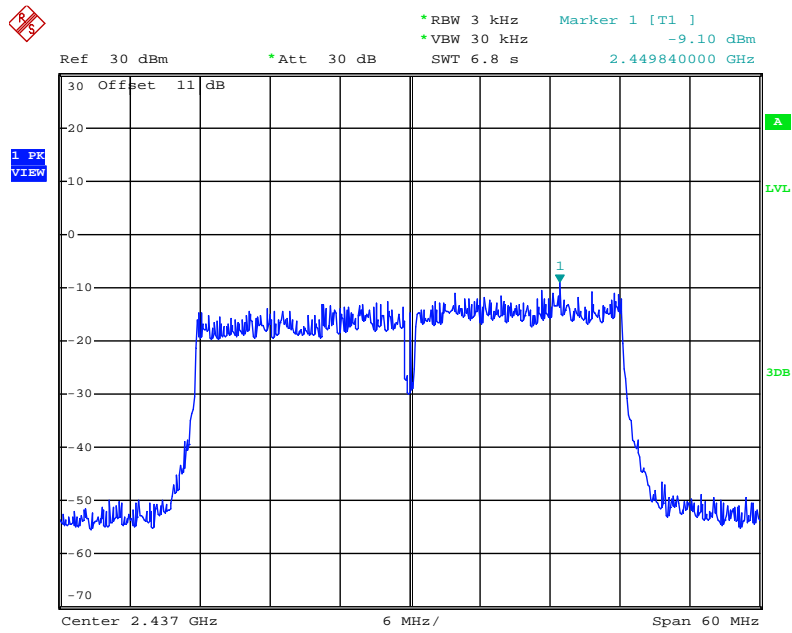


Date: 12.JAN.2014 17:18:07

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 3

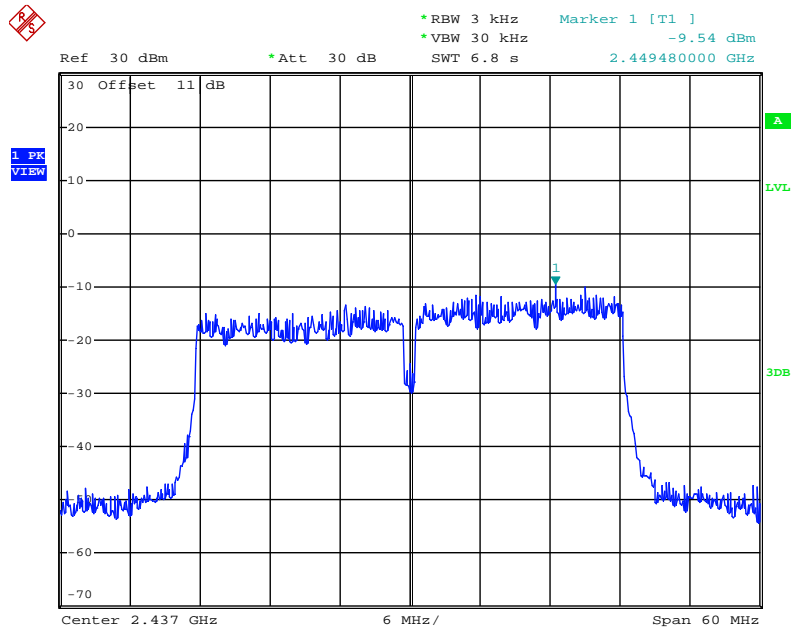


Date: 12.JAN.2014 17:18:35

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 1

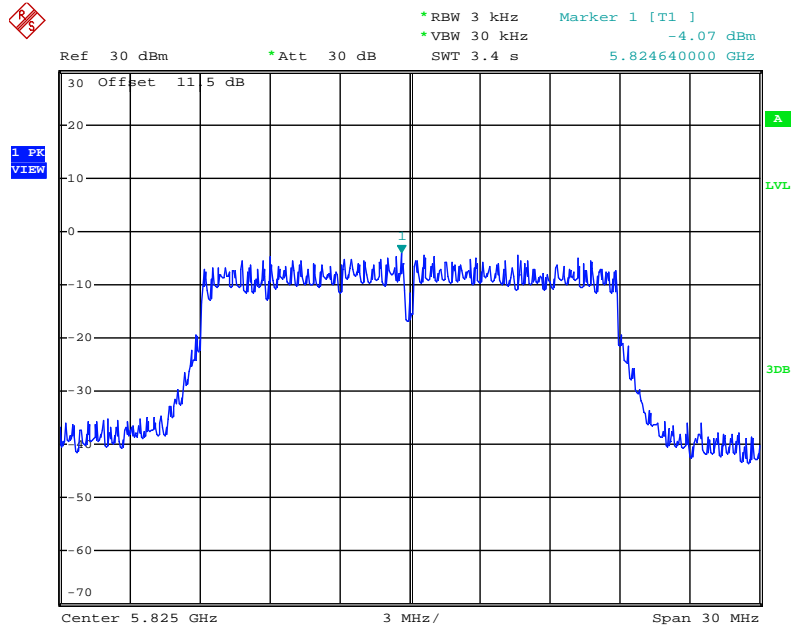


Date: 12.JAN.2014 17:26:50

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 2

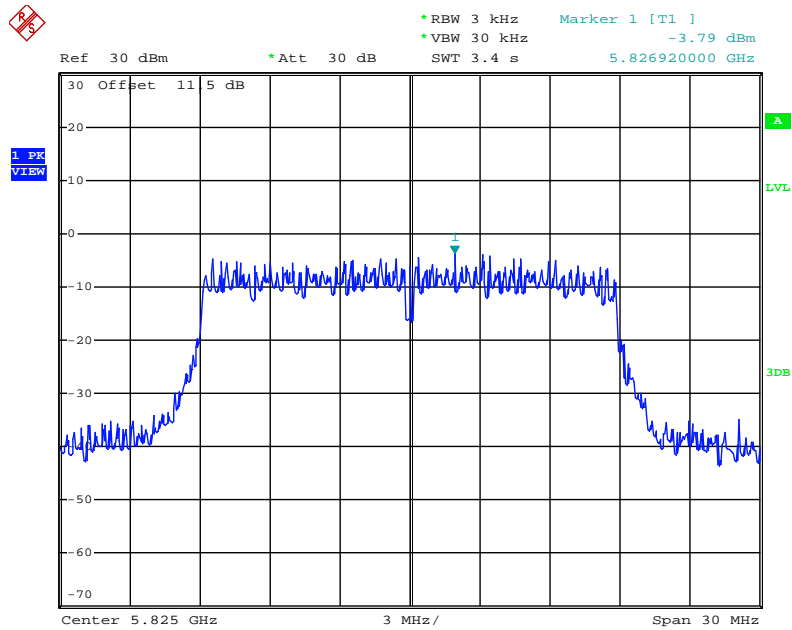


Date: 12.JAN.2014 17:27:34

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 3

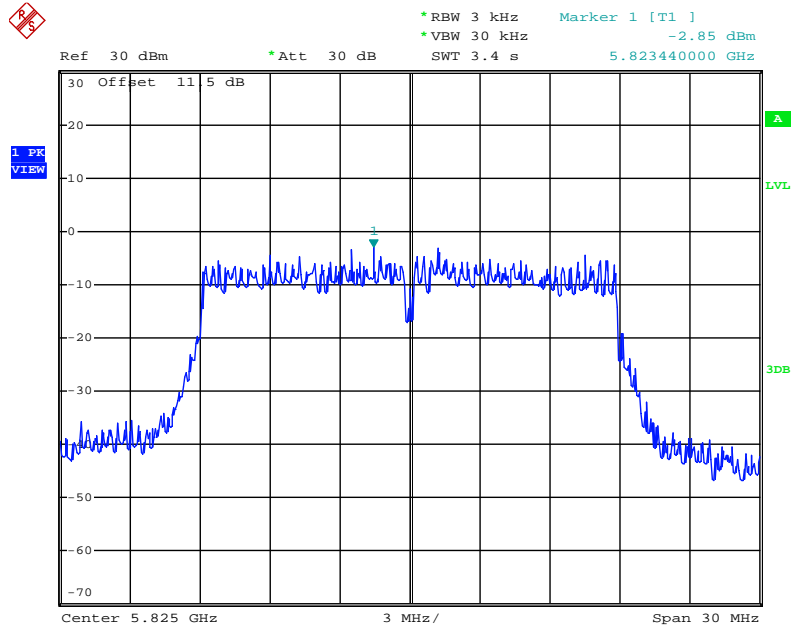


Date: 12.JAN.2014 17:28:12

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 1

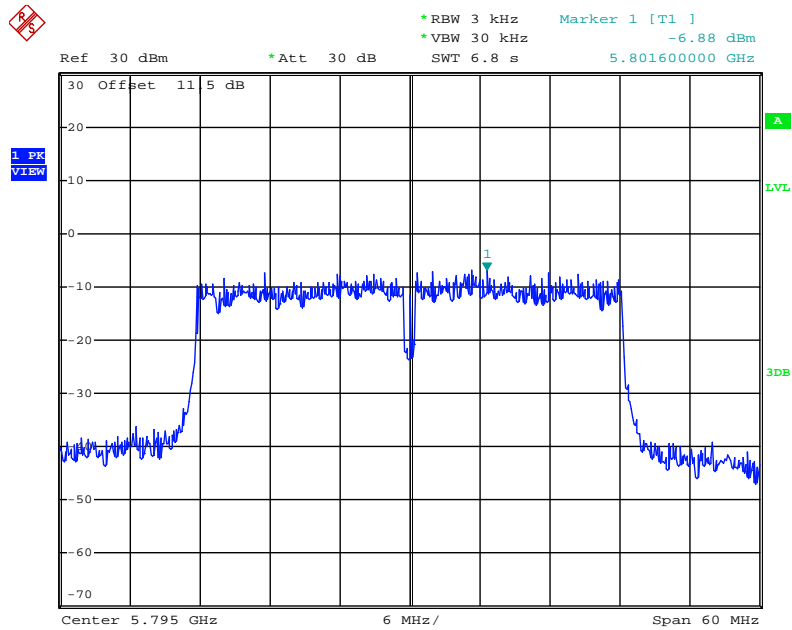


Date: 12.JAN.2014 17:31:40

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 2

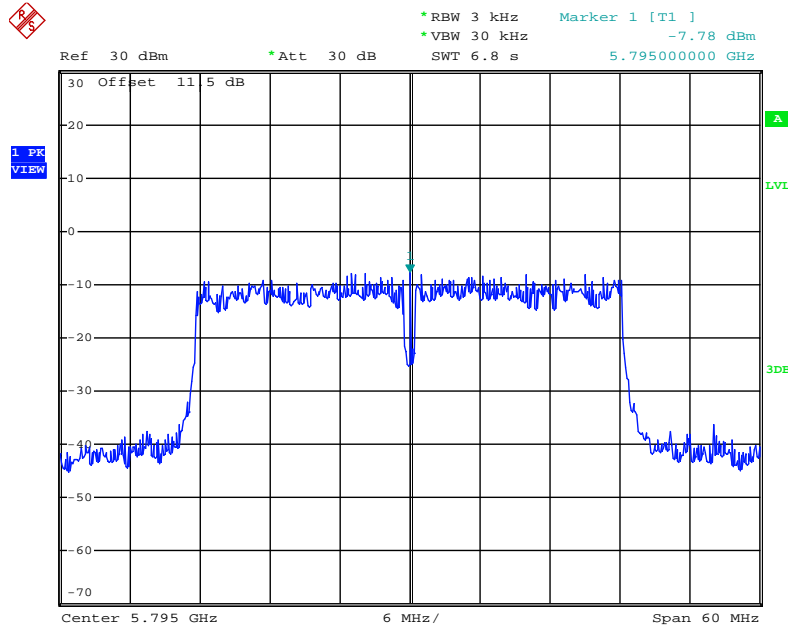


Date: 12.JAN.2014 17:32:18

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5795 MHz / Chain 3

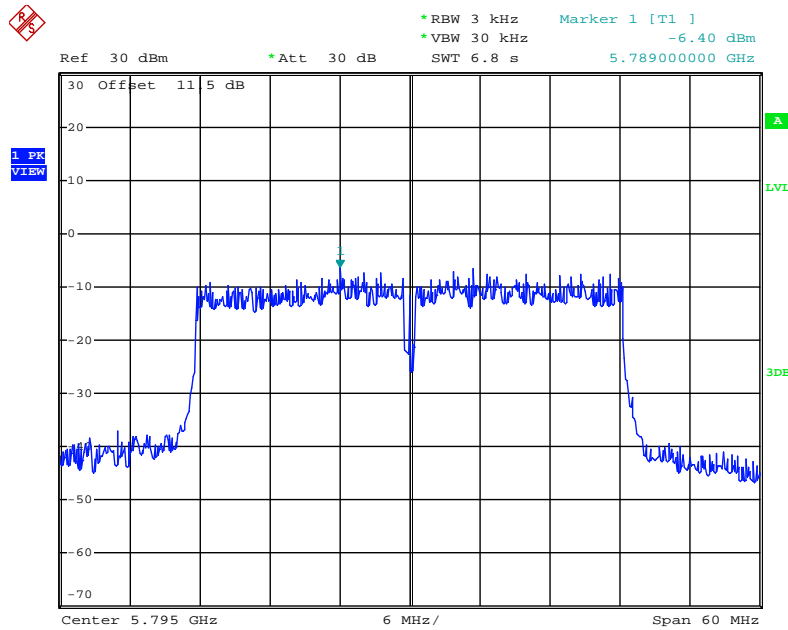


Date: 12.JAN.2014 17:32:45

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 1

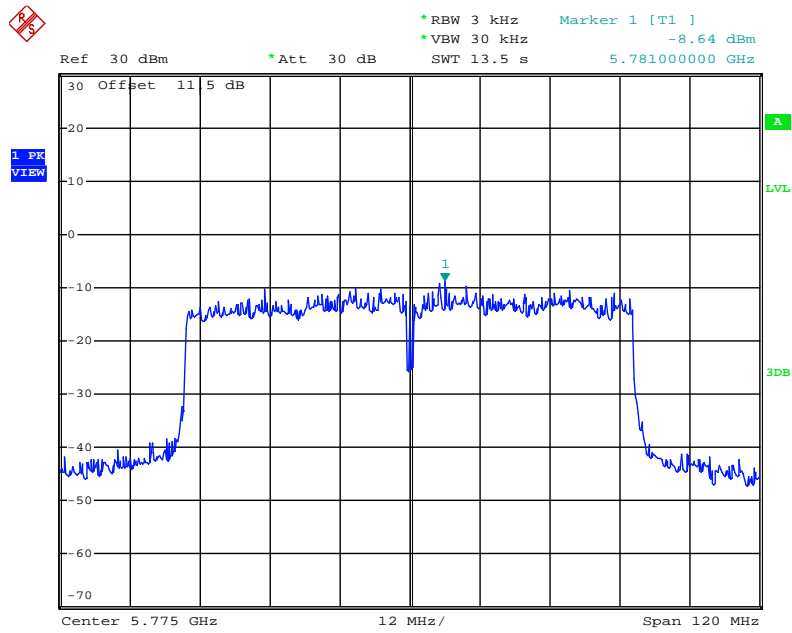


Date: 12.JAN.2014 17:35:03

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 2

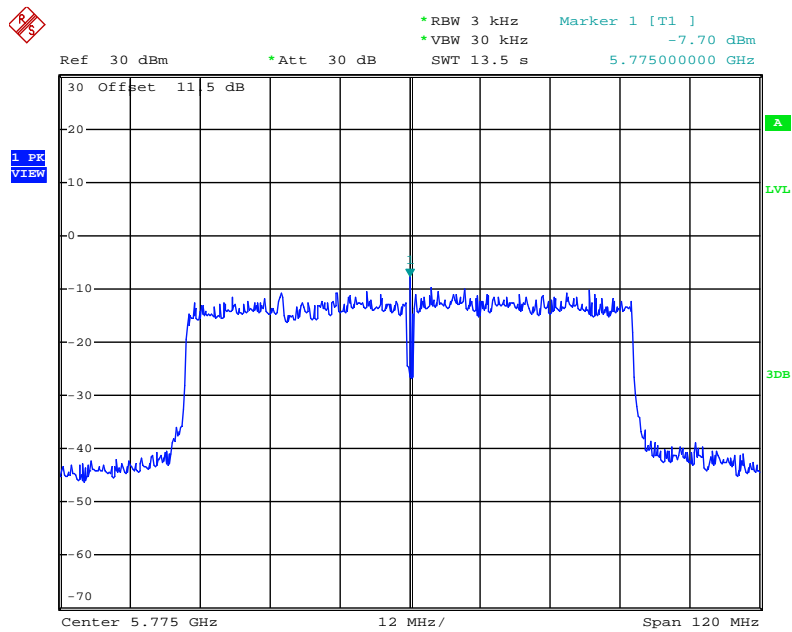

Date: 12.JAN.2014 17:34:27

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz / Chain 3

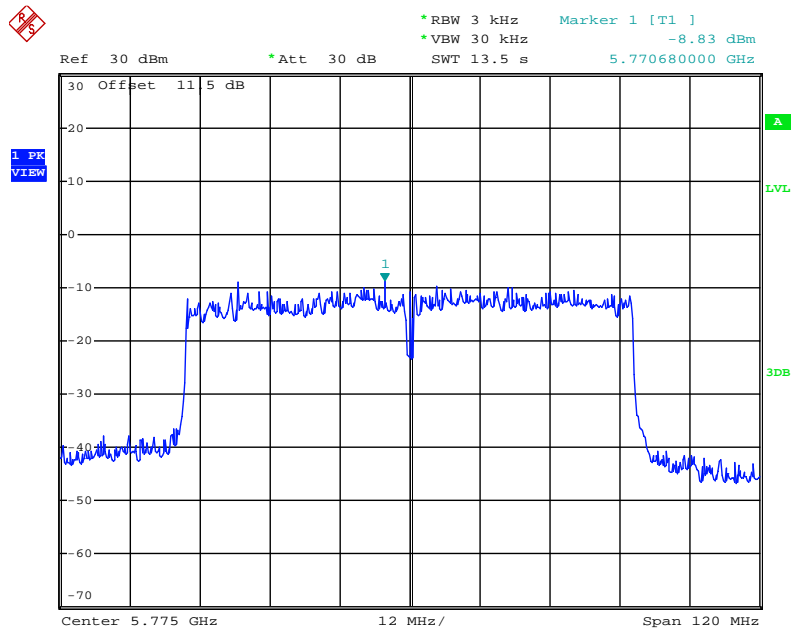

Date: 12.JAN.2014 17:33:48

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

7. The transmitter was radiated to the spectrum analyzer in peak hold mode.
8. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
9. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
10. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11n/ac

For non-beamforming function:

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.76	500	Complies
6	2437 MHz	16.64	17.68	500	Complies
11	2462 MHz	16.48	17.52	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.00	36.48	500	Complies
6	2437 MHz	35.84	36.32	500	Complies
9	2452 MHz	34.24	36.16	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.44	17.76	500	Complies
157	5785 MHz	16.32	17.84	500	Complies
165	5825 MHz	15.44	17.84	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	32.64	36.36	500	Complies
159	5795 MHz	32.64	36.36	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	71.52	75.60	500	Complies

For beamforming function:

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.04	17.68	500	Complies
6	2437 MHz	16.00	17.68	500	Complies
11	2462 MHz	16.32	17.60	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.52	36.32	500	Complies
6	2437 MHz	35.20	36.32	500	Complies
9	2452 MHz	31.36	36.00	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.20	17.68	500	Complies
157	5785 MHz	17.28	17.68	500	Complies
165	5825 MHz	15.68	17.68	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.40	36.24	500	Complies
159	5795 MHz	36.36	36.36	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	74.40	75.60	500	Complies

Temperature	17°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.04	12.00	500	Complies
6	2437 MHz	8.56	12.16	500	Complies
11	2462 MHz	9.12	12.00	500	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	13.36	16.48	500	Complies
6	2437 MHz	16.96	16.08	500	Complies
11	2462 MHz	13.28	16.48	500	Complies

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	13.60	16.40	500	Complies
157	5785 MHz	14.00	16.40	500	Complies
165	5825 MHz	13.28	16.32	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For non-beamforming function:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz / Chain 1 + Chain 2 + Chain 3

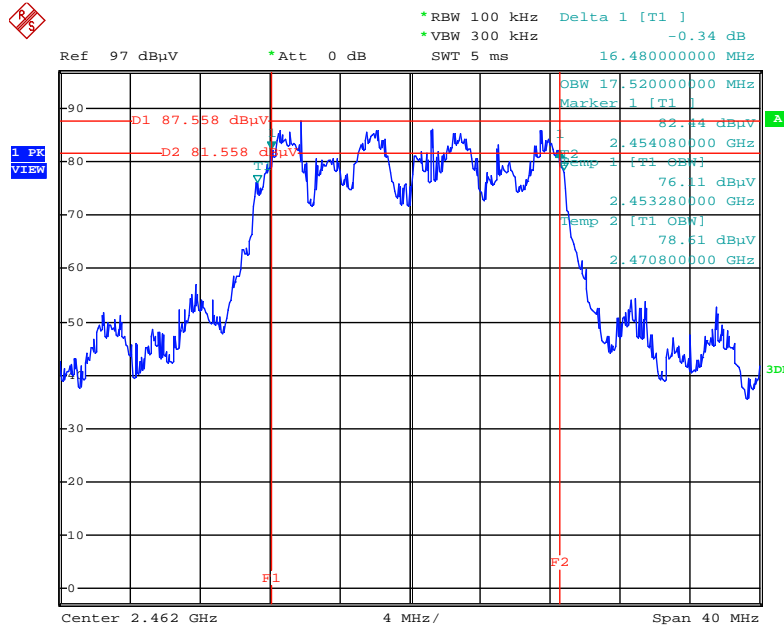

Date: 12.JAN.2014 15:15:44

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz / Chain 1 + Chain 2 + Chain 3

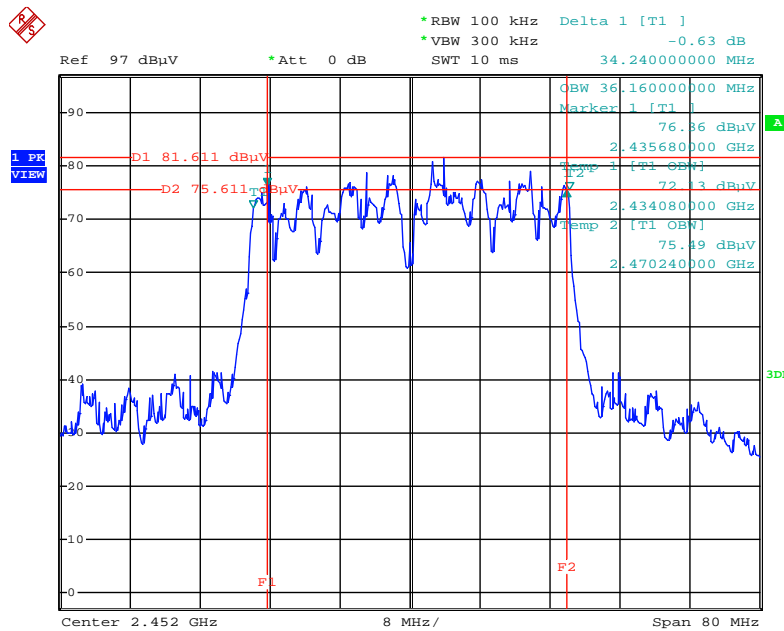


Date: 12.JAN.2014 15:22:34

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5745 MHz / Chain 1 + Chain 2 + Chain 3




Date: 12.JAN.2014 14:57:02

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5755MHz / Chain 1 + Chain 2 + Chain 3

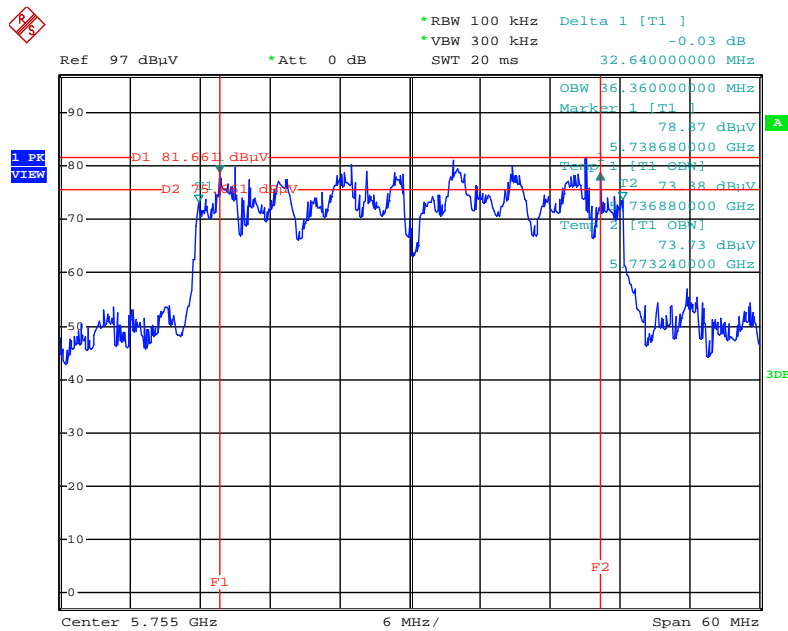


Date: 12.JAN.2014 14:56:19

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz /
Chain 1 + Chain 2 + Chain 3**

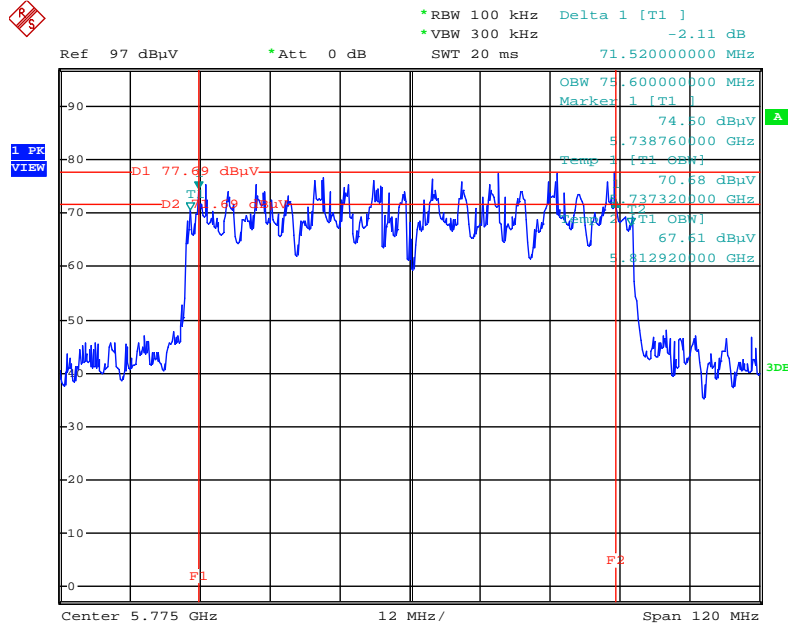


Date: 12.JAN.2014 14:52:20

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3

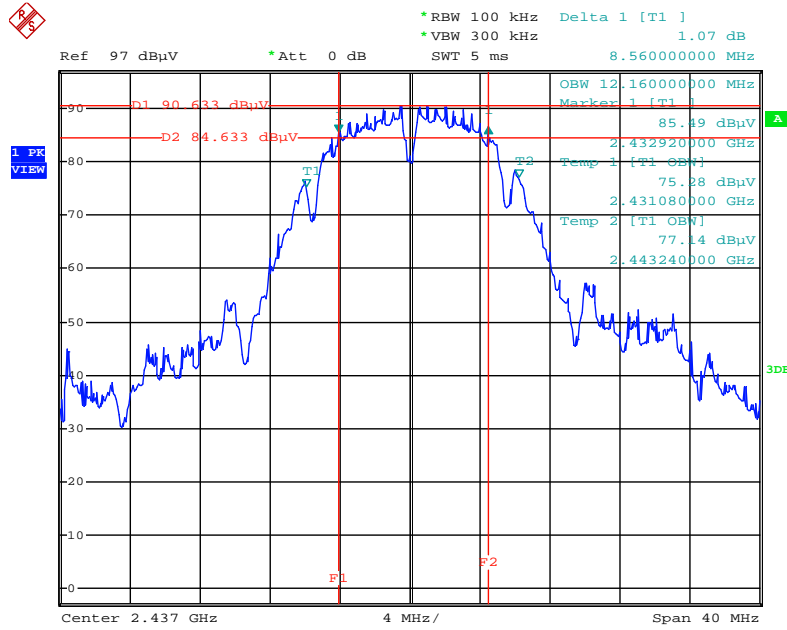


Date: 12.JAN.2014 15:07:44

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3

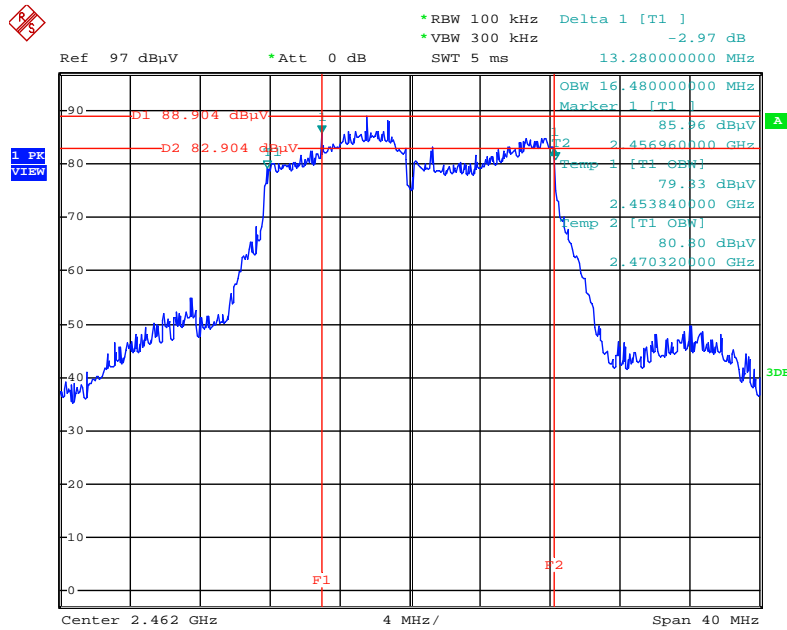

Date: 12.JAN.2014 15:09:46


6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 1 + Chain 2 + Chain 3

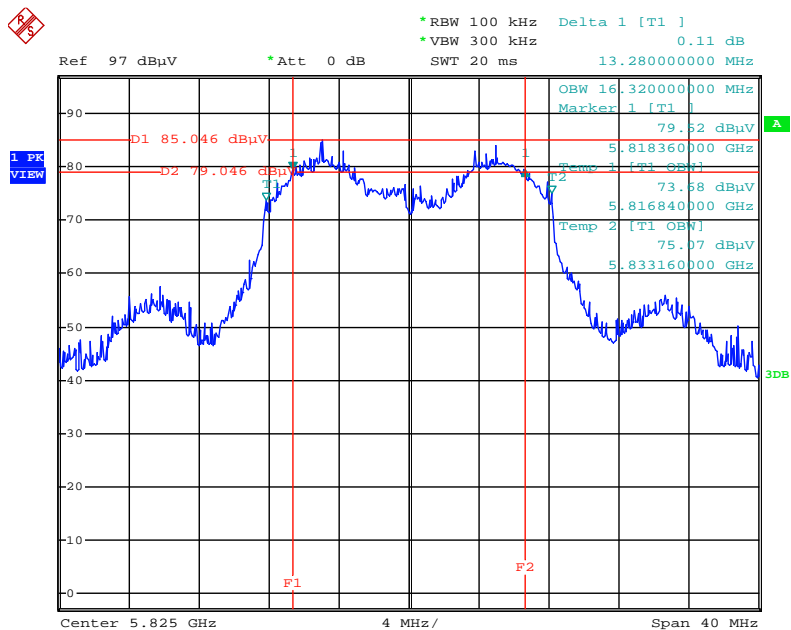

Date: 12.JAN.2014 14:59:03


For beamforming function:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz / Chain 1 + Chain 2 + Chain 3

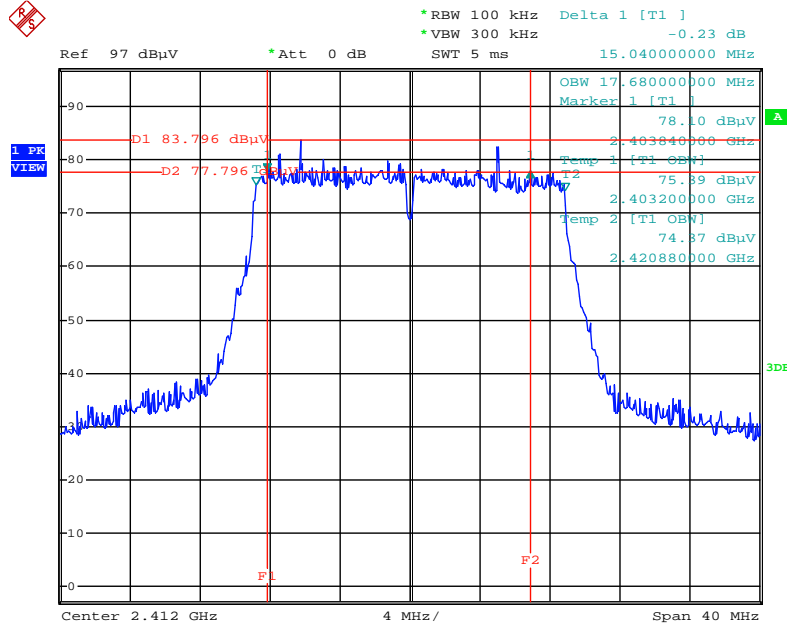


Date: 12.JAN.2014 15:26:41

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz / Chain 1 + Chain 2 + Chain 3

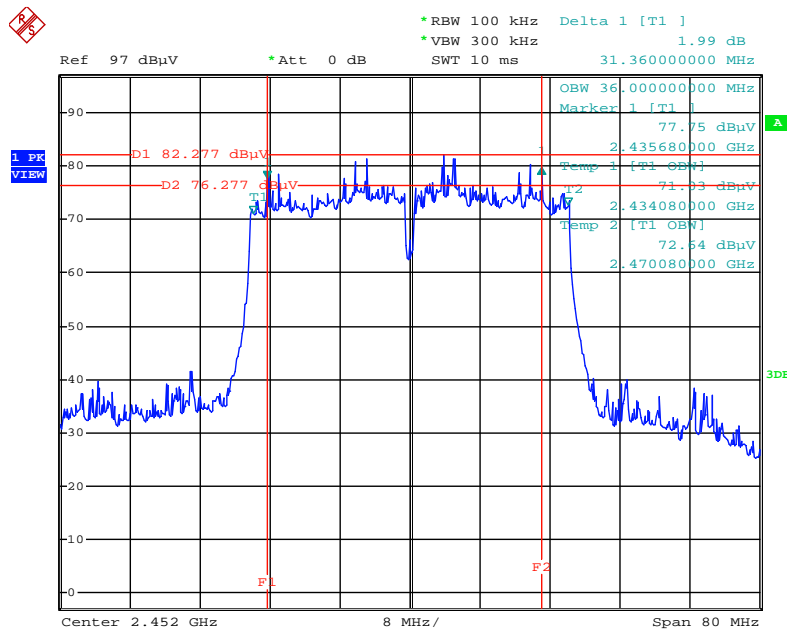


Date: 12.JAN.2014 15:31:50

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / 5825 MHz / Chain 1 + Chain 2 + Chain 3

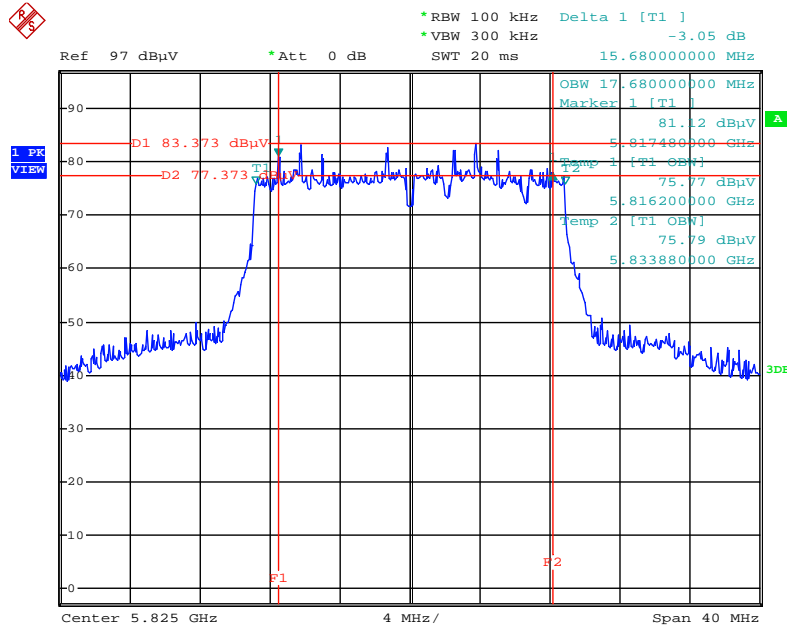


Date: 12.JAN.2014 15:35:22

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / 5755MHz / Chain 1 + Chain 2 + Chain 3

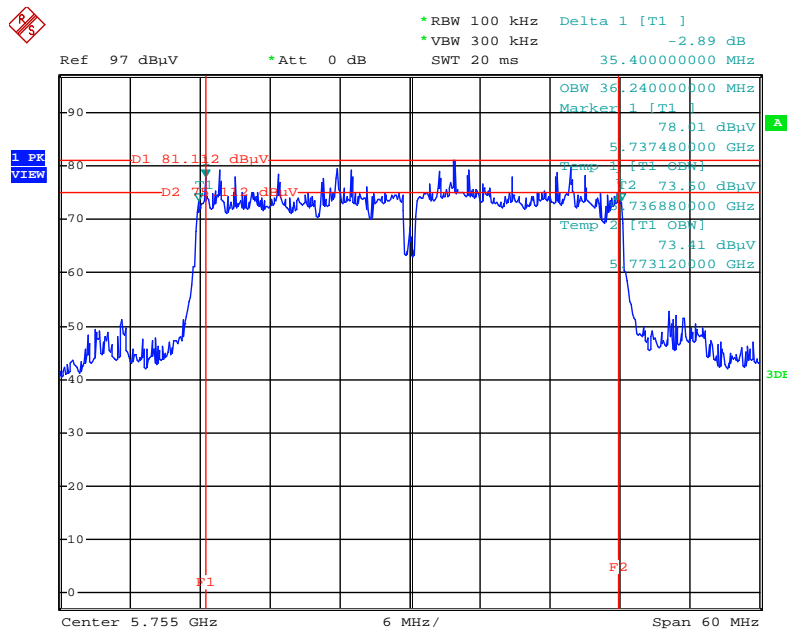

Date: 12.JAN.2014 15:36:08

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / 5775 MHz /
Chain 1 + Chain 2 + Chain 3**

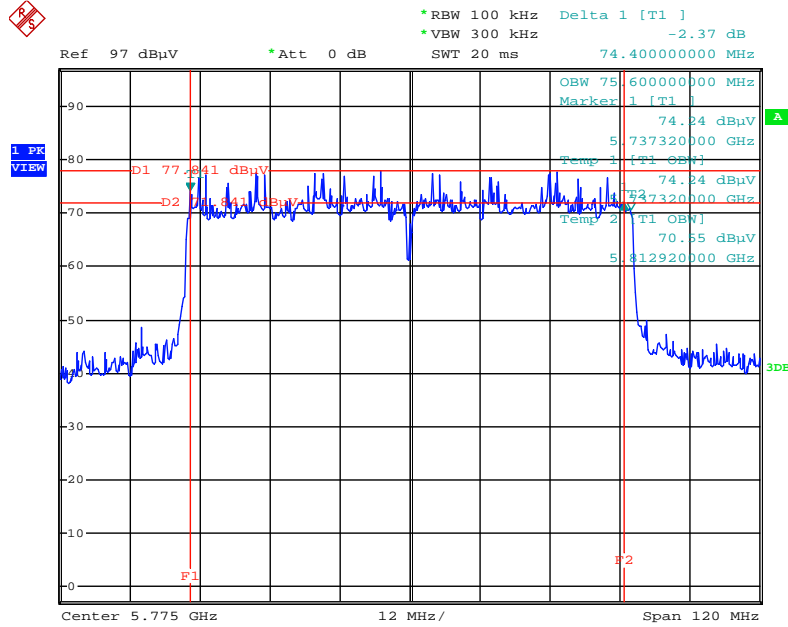

Date: 12.JAN.2014 15:37:43

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

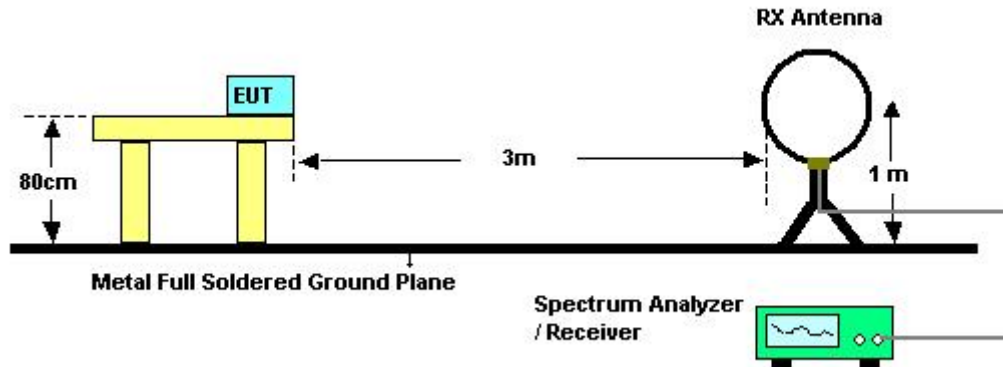

For Radiated Emissions: 30MHz~1GHz

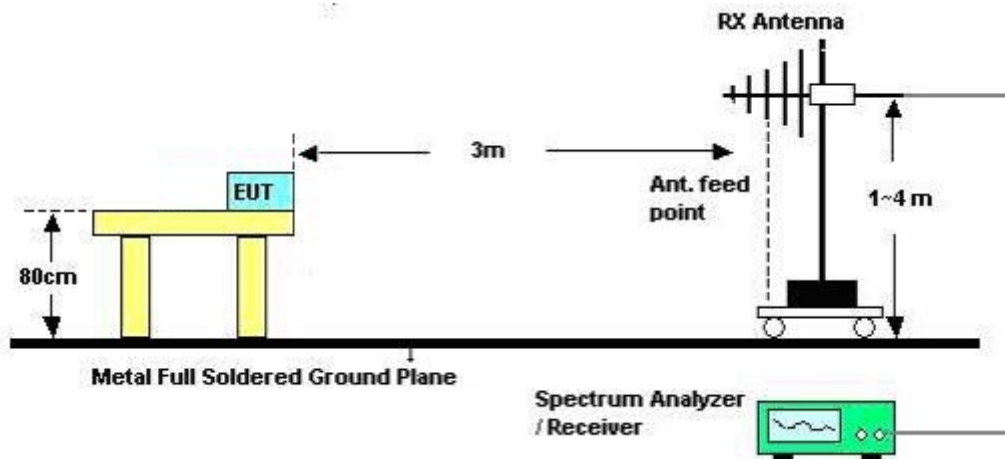

For Radiated Emissions: Above 1GHz

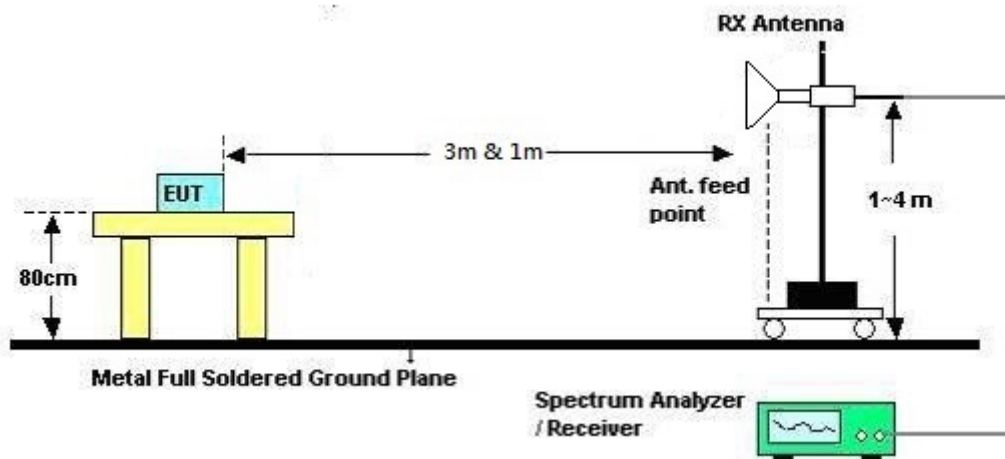

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Date	Jan. 15, 2014	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

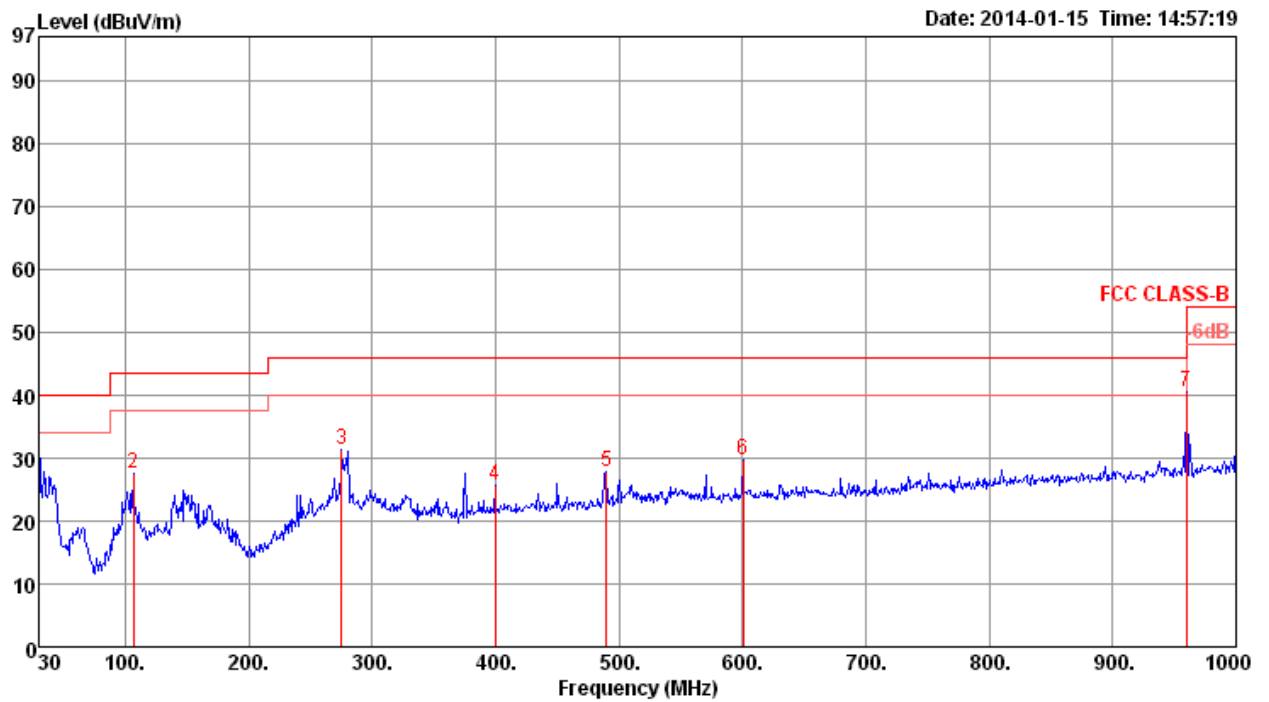

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.00	30.46	40.00	-9.54	38.89	0.61	18.76	27.80	Peak	100	0	HORIZONTAL
2	106.63	27.49	43.50	-16.01	42.35	1.21	11.50	27.57	Peak	100	0	HORIZONTAL
3	275.41	31.26	46.00	-14.74	43.23	1.91	13.07	26.95	Peak	100	0	HORIZONTAL
4	399.57	25.63	46.00	-20.37	34.87	2.30	16.06	27.60	Peak	100	0	HORIZONTAL
5	489.78	27.93	46.00	-18.07	35.89	2.63	17.46	28.05	Peak	100	0	HORIZONTAL
6	600.36	29.76	46.00	-16.24	36.28	2.81	18.77	28.10	Peak	100	0	HORIZONTAL
7	960.00	40.53	46.00	-5.47	43.14	3.56	20.99	27.16	Peak	100	0	HORIZONTAL

Vertical

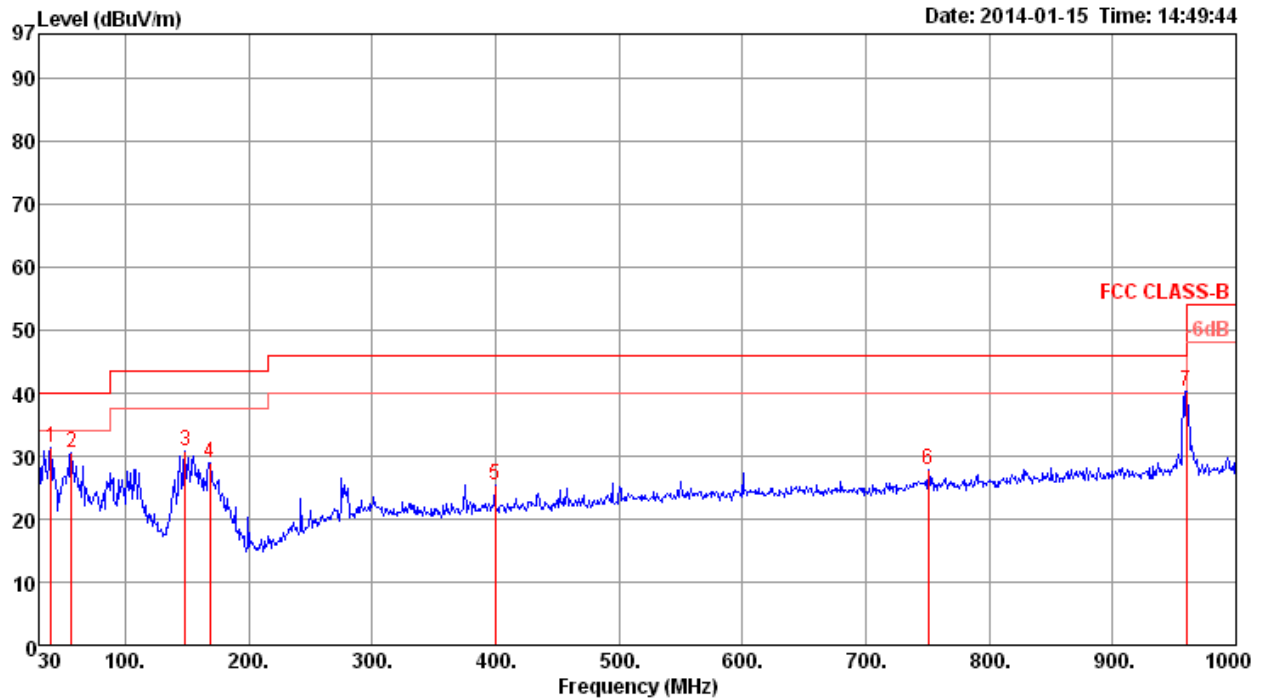

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	39.70	31.39	40.00	-8.61	45.42	0.66	13.11	27.80	Peak	400	0	VERTICAL
2	56.19	30.60	40.00	-9.40	50.06	0.85	7.47	27.78	Peak	400	0	VERTICAL
3	148.34	30.80	43.50	-12.70	44.80	1.42	11.94	27.36	Peak	400	0	VERTICAL
4	168.71	28.89	43.50	-14.61	41.99	1.47	12.68	27.25	Peak	400	0	VERTICAL
5	399.57	25.34	46.00	-20.66	34.58	2.30	16.06	27.60	Peak	400	0	VERTICAL
6	750.71	27.73	46.00	-18.27	32.90	3.20	19.43	27.80	Peak	400	0	VERTICAL
7	960.00	40.39	46.00	-5.61	43.00	3.56	20.99	27.16	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

For non-beamforming function:

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.70	28.44	54.00	-25.56	27.10	3.31	33.06	35.03	Average	100	104	HORIZONTAL
2	4823.14	41.27	74.00	-32.73	39.93	3.31	33.06	35.03	Peak	100	104	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.74	30.43	54.00	-23.57	29.09	3.31	33.06	35.03	Average	100	295	VERTICAL
2	4824.12	42.69	74.00	-31.31	41.35	3.31	33.06	35.03	Peak	100	295	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.84	30.87	54.00	-23.13	29.41	3.33	33.16	35.03	Average	100	78	HORIZONTAL
2	4874.00	43.03	74.00	-30.97	41.57	3.33	33.16	35.03	Peak	100	78	HORIZONTAL
3	7308.28	32.50	54.00	-21.50	27.88	4.06	35.96	35.40	Average	100	271	HORIZONTAL
4	7314.90	45.31	74.00	-28.69	40.69	4.06	35.96	35.40	Peak	100	271	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.24	50.42	74.00	-23.58	48.96	3.33	33.16	35.03	Peak	100	104	VERTICAL
2	4878.24	35.87	54.00	-18.13	34.41	3.33	33.16	35.03	Average	100	104	VERTICAL
3	7307.78	32.83	54.00	-21.17	28.21	4.06	35.96	35.40	Average	100	169	VERTICAL
4	7310.82	45.80	74.00	-28.20	41.18	4.06	35.96	35.40	Peak	100	169	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4919.08	28.12	54.00	-25.88	26.56	3.35	33.23	35.02	Average	100	214	HORIZONTAL
2	4924.52	41.20	74.00	-32.80	39.60	3.35	33.26	35.01	Peak	100	214	HORIZONTAL
3	7381.92	32.88	54.00	-21.12	28.13	4.06	36.09	35.40	Average	100	347	HORIZONTAL
4	7386.52	45.23	74.00	-28.77	40.48	4.06	36.09	35.40	Peak	100	347	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.00	29.49	54.00	-24.51	27.89	3.35	33.26	35.01	Average	100	246	VERTICAL
2	4928.90	40.94	74.00	-33.06	39.34	3.35	33.26	35.01	Peak	100	246	VERTICAL
3	7381.42	32.95	54.00	-21.05	28.20	4.06	36.09	35.40	Average	100	317	VERTICAL
4	7385.48	45.81	74.00	-28.19	41.06	4.06	36.09	35.40	Peak	100	317	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4841.52	28.34	54.00	-25.66	26.96	3.32	33.09	35.03	Average	100	28	HORIZONTAL
2	4845.08	40.93	74.00	-33.07	39.55	3.32	33.09	35.03	Peak	100	28	HORIZONTAL
3	7261.96	32.53	54.00	-21.47	28.02	4.06	35.85	35.40	Average	100	104	HORIZONTAL
4	7268.34	46.17	74.00	-27.83	41.66	4.06	35.85	35.40	Peak	100	104	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4840.76	41.08	74.00	-32.92	39.70	3.32	33.09	35.03	Peak	100	292	VERTICAL
2	4840.88	28.73	54.00	-25.27	27.35	3.32	33.09	35.03	Average	100	292	VERTICAL
3	7264.90	46.41	74.00	-27.59	41.90	4.06	35.85	35.40	Peak	100	50	VERTICAL
4	7266.48	32.51	54.00	-21.49	28.00	4.06	35.85	35.40	Average	100	50	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4871.50	42.48	74.00	-31.52	41.02	3.33	33.16	35.03	Peak	100	148	HORIZONTAL
2	4878.62	28.82	54.00	-25.18	27.36	3.33	33.16	35.03	Average	100	148	HORIZONTAL
3	7306.18	32.46	54.00	-21.54	27.88	4.06	35.92	35.40	Average	100	237	HORIZONTAL
4	7308.38	44.76	74.00	-29.24	40.14	4.06	35.96	35.40	Peak	100	237	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.82	41.76	74.00	-32.24	40.30	3.33	33.16	35.03	Peak	100	98	VERTICAL
2	4878.04	29.78	54.00	-24.22	28.32	3.33	33.16	35.03	Average	100	98	VERTICAL
3	7308.64	44.78	74.00	-29.22	40.16	4.06	35.96	35.40	Peak	100	167	VERTICAL
4	7309.88	32.65	54.00	-21.35	28.03	4.06	35.96	35.40	Average	100	167	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4901.52	41.68	74.00	-32.32	40.17	3.34	33.19	35.02	Peak	100	167	HORIZONTAL
2	4903.82	29.13	54.00	-24.87	27.62	3.34	33.19	35.02	Average	100	167	HORIZONTAL
3	7358.38	45.21	74.00	-28.79	40.53	4.06	36.02	35.40	Peak	100	229	HORIZONTAL
4	7360.44	32.50	54.00	-21.50	27.78	4.06	36.06	35.40	Average	100	229	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4901.28	29.24	54.00	-24.76	27.73	3.34	33.19	35.02	Average	100	125	VERTICAL
2	4908.96	43.24	74.00	-30.76	41.69	3.34	33.23	35.02	Peak	100	125	VERTICAL
3	7358.08	45.15	74.00	-28.85	40.47	4.06	36.02	35.40	Peak	100	266	VERTICAL
4	7360.00	32.48	54.00	-21.52	27.76	4.06	36.06	35.40	Average	100	266	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11487.82	67.89	74.00	-6.11	59.28	5.11	38.78	35.28	Peak	151	323	HORIZONTAL
2	11492.40	53.65	54.00	-0.35	45.04	5.11	38.78	35.28	Average	151	323	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11490.51	66.22	74.00	-7.78	57.61	5.11	38.78	35.28	Peak	100	98	VERTICAL
2	11490.90	53.27	54.00	-0.73	44.66	5.11	38.78	35.28	Average	100	98	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	EEE 802.11ac MCS0, Nss1 20MHz CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11567.28	52.89	54.00	-1.11	44.24	5.13	38.82	35.30	Average	157	323	HORIZONTAL
2	11567.63	66.84	74.00	-7.16	58.18	5.13	38.83	35.30	Peak	157	323	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.22	53.82	54.00	-0.18	45.15	5.14	38.83	35.30	Average	147	319	VERTICAL
2	11570.38	66.64	74.00	-7.36	57.97	5.14	38.83	35.30	Peak	147	319	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11647.08	44.45	54.00	-9.55	35.73	5.16	38.86	35.30	Average	100	321	HORIZONTAL
2	11652.63	56.89	74.00	-17.11	48.17	5.16	38.86	35.30	Peak	100	321	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.13	53.44	54.00	-0.56	44.72	5.16	38.86	35.30	Average	109	125	VERTICAL
2	11649.39	66.93	74.00	-7.07	58.21	5.16	38.86	35.30	Peak	109	125	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz CH 151 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11507.24	51.36	54.00	-2.64	42.73	5.12	38.79	35.28	Average	157	325	HORIZONTAL
2	11517.18	65.29	74.00	-8.71	56.66	5.12	38.80	35.29	Peak	157	325	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11509.62	64.30	74.00	-9.70	55.67	5.12	38.79	35.28	Peak	145	353	VERTICAL
2	11509.74	51.81	54.00	-2.19	43.18	5.12	38.79	35.28	Average	145	353	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz CH 159 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11587.31	50.90	54.00	-3.10	42.23	5.14	38.83	35.30	Average	158	322	HORIZONTAL
2	11591.92	63.54	74.00	-10.46	54.87	5.14	38.83	35.30	Peak	158	322	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11588.85	64.00	74.00	-10.00	55.33	5.14	38.83	35.30	Peak	111	126	VERTICAL
2	11589.26	50.87	54.00	-3.13	42.20	5.14	38.83	35.30	Average	111	126	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 80MHz CH 155 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11528.45	57.10	74.00	-16.90	48.46	5.13	38.80	35.29	Peak	100	59	HORIZONTAL
2	11542.55	45.26	54.00	-8.74	36.62	5.13	38.81	35.30	Average	100	59	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11559.21	46.54	54.00	-7.46	37.89	5.13	38.82	35.30	Average	100	358	VERTICAL
2	11568.83	59.46	74.00	-14.54	50.80	5.13	38.83	35.30	Peak	100	358	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.01	41.60	54.00	-12.40	40.26	3.31	33.06	35.03	Average	126	83	HORIZONTAL
2	4824.51	46.90	74.00	-27.10	45.56	3.31	33.06	35.03	Peak	126	83	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.97	54.64	74.00	-19.36	53.30	3.31	33.06	35.03	Peak	100	280	VERTICAL
2	4824.00	52.10	54.00	-1.90	50.76	3.31	33.06	35.03	Average	100	280	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.97	41.38	54.00	-12.62	39.92	3.33	33.16	35.03	Average	100	84	HORIZONTAL
2	4874.12	46.87	74.00	-27.13	45.41	3.33	33.16	35.03	Peak	100	84	HORIZONTAL
3	7311.67	47.15	74.00	-26.85	42.53	4.06	35.96	35.40	Peak	101	355	HORIZONTAL
4	7311.77	34.36	54.00	-19.64	29.74	4.06	35.96	35.40	Average	101	355	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.94	51.25	54.00	-2.75	49.79	3.33	33.16	35.03	Average	101	281	VERTICAL
2	4874.00	53.59	74.00	-20.41	52.13	3.33	33.16	35.03	Peak	101	281	VERTICAL
3	7309.55	49.79	74.00	-24.21	45.17	4.06	35.96	35.40	Peak	176	95	VERTICAL
4	7311.74	38.73	54.00	-15.27	34.11	4.06	35.96	35.40	Average	176	95	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.92	45.85	74.00	-28.15	44.25	3.35	33.26	35.01	Peak	100	85	HORIZONTAL
2	4924.01	37.41	54.00	-16.59	35.81	3.35	33.26	35.01	Average	100	85	HORIZONTAL
3	7385.06	33.57	54.00	-20.43	28.82	4.06	36.09	35.40	Average	100	119	HORIZONTAL
4	7385.18	47.60	74.00	-26.40	42.85	4.06	36.09	35.40	Peak	100	119	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.86	50.86	74.00	-23.14	49.26	3.35	33.26	35.01	Peak	101	277	VERTICAL
2	4923.94	47.58	54.00	-6.42	45.98	3.35	33.26	35.01	Average	101	277	VERTICAL
3	7386.72	48.36	74.00	-25.64	43.61	4.06	36.09	35.40	Peak	100	92	VERTICAL
4	7386.77	36.52	54.00	-17.48	31.77	4.06	36.09	35.40	Average	100	92	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4819.30	30.12	54.00	-23.88	28.82	3.31	33.02	35.03	Average	100	158	HORIZONTAL
2	4822.44	43.08	74.00	-30.92	41.74	3.31	33.06	35.03	Peak	100	158	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.56	42.29	74.00	-31.71	40.95	3.31	33.06	35.03	Peak	100	101	VERTICAL
2	4824.96	31.68	54.00	-22.32	30.34	3.31	33.06	35.03	Average	100	101	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.34	43.17	74.00	-30.83	41.71	3.33	33.16	35.03	Peak	100	56	HORIZONTAL
2	4874.30	30.78	54.00	-23.22	29.32	3.33	33.16	35.03	Average	100	56	HORIZONTAL
3	7306.86	32.64	54.00	-21.36	28.06	4.06	35.92	35.40	Average	100	259	HORIZONTAL
4	7314.46	45.68	74.00	-28.32	41.06	4.06	35.96	35.40	Peak	100	259	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.82	48.11	74.00	-25.89	46.65	3.33	33.16	35.03	Peak	100	294	VERTICAL
2	4874.12	34.78	54.00	-19.22	33.32	3.33	33.16	35.03	Average	100	294	VERTICAL
3	7306.96	32.81	54.00	-21.19	28.23	4.06	35.92	35.40	Average	100	156	VERTICAL
4	7307.60	45.78	74.00	-28.22	41.16	4.06	35.96	35.40	Peak	100	156	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.26	28.34	54.00	-25.66	26.74	3.35	33.26	35.01	Average	100	158	HORIZONTAL
2	4924.00	41.10	74.00	-32.90	39.50	3.35	33.26	35.01	Peak	100	158	HORIZONTAL
3	7382.62	32.92	54.00	-21.08	28.17	4.06	36.09	35.40	Average	100	80	HORIZONTAL
4	7382.78	45.44	74.00	-28.56	40.69	4.06	36.09	35.40	Peak	100	80	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4920.36	41.96	74.00	-32.04	40.39	3.35	33.23	35.01	Peak	100	324	VERTICAL
2	4925.04	29.96	54.00	-24.04	28.36	3.35	33.26	35.01	Average	100	324	VERTICAL
3	7381.90	45.56	74.00	-28.44	40.81	4.06	36.09	35.40	Peak	100	188	VERTICAL
4	7381.92	32.89	54.00	-21.11	28.14	4.06	36.09	35.40	Average	100	188	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11486.72	52.77	54.00	-1.23	42.35	6.74	34.82	38.50	Average	327	143	HORIZONTAL
2	11486.96	66.58	74.00	-7.42	56.16	6.74	34.82	38.50	Peak	327	143	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11488.44	53.18	54.00	-0.82	42.76	6.74	34.82	38.50	Average	327	139	VERTICAL
2	11488.88	68.92	74.00	-5.08	58.50	6.74	34.82	38.50	Peak	327	139	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11566.44	63.84	74.00	-10.16	53.41	6.77	34.84	38.50	Peak	330	147	HORIZONTAL
2	11566.44	50.71	54.00	-3.29	40.28	6.77	34.84	38.50	Average	330	147	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11568.88	53.84	54.00	-0.16	43.41	6.77	34.84	38.50	Average	327	138	VERTICAL
2	11568.92	69.87	74.00	-4.13	59.44	6.77	34.84	38.50	Peak	327	138	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 06, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11647.15	64.02	74.00	-9.98	55.30	5.16	38.86	35.30	Peak	154	322	HORIZONTAL
2	11647.72	51.47	54.00	-2.53	42.75	5.16	38.86	35.30	Average	154	322	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11648.69	66.31	74.00	-7.69	57.59	5.16	38.86	35.30	Peak	169	1	VERTICAL
2	11653.75	53.12	54.00	-0.88	44.40	5.16	38.86	35.30	Average	169	1	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For beamforming function:

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4823.92	42.51	74.00	-31.49	40.43	4.21	34.69	32.56	Peak	185	100	HORIZONTAL
2	4824.08	33.39	54.00	-20.61	31.31	4.21	34.69	32.56	Average	185	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4814.56	42.26	74.00	-31.74	40.23	4.20	34.69	32.52	Peak	265	100	VERTICAL
2	4819.28	29.77	54.00	-24.23	27.69	4.21	34.69	32.56	Average	265	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4875.08	33.49	54.00	-20.51	31.28	4.22	34.67	32.66	Average	191	100	HORIZONTAL
2	4879.76	44.75	74.00	-29.25	42.54	4.22	34.67	32.66	Peak	191	100	HORIZONTAL
3	7301.16	34.49	54.00	-19.51	27.11	5.34	34.93	36.97	Average	220	100	HORIZONTAL
4	7301.80	46.80	74.00	-27.20	39.42	5.34	34.93	36.97	Peak	219	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4874.44	39.92	74.00	-34.08	37.71	4.22	34.67	32.66	Peak	281	100	VERTICAL
2	4874.44	33.48	54.00	-20.52	31.27	4.22	34.67	32.66	Average	281	100	VERTICAL
3	7301.12	38.51	54.00	-15.49	31.13	5.34	34.93	36.97	Average	237	100	VERTICAL
4	7305.80	46.80	74.00	-27.20	39.42	5.34	34.93	36.97	Peak	237	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4921.68	29.68	54.00	-24.32	27.34	4.23	34.65	32.76	Average	139	100	HORIZONTAL
2	4929.68	41.76	74.00	-32.24	39.42	4.23	34.65	32.76	Peak	139	100	HORIZONTAL
3	7379.20	47.63	74.00	-26.37	40.17	5.36	34.96	37.06	Peak	165	100	HORIZONTAL
4	7384.32	35.26	54.00	-18.74	27.78	5.36	34.96	37.08	Average	165	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4922.88	29.73	54.00	-24.27	27.39	4.23	34.65	32.76	Average	241	100	VERTICAL
2	4928.20	42.56	74.00	-31.44	40.22	4.23	34.65	32.76	Peak	241	100	VERTICAL
3	7376.48	35.37	54.00	-18.63	27.91	5.36	34.96	37.06	Average	186	100	VERTICAL
4	7380.64	47.17	74.00	-26.83	39.71	5.36	34.96	37.06	Peak	186	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4843.80	41.90	74.00	-32.10	39.78	4.21	34.68	32.59	Peak	213	100	HORIZONTAL
2	4844.68	29.46	54.00	-24.54	27.34	4.21	34.68	32.59	Average	213	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4841.92	30.15	54.00	-23.85	28.03	4.21	34.68	32.59	Average	173	100	VERTICAL
2	4844.68	42.62	74.00	-31.38	40.50	4.21	34.68	32.59	Peak	173	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4871.88	43.53	74.00	-30.47	41.32	4.22	34.67	32.66	Peak	138	100	HORIZONTAL
2	4872.80	32.62	54.00	-21.38	30.41	4.22	34.67	32.66	Average	138	100	HORIZONTAL
3	7301.76	48.61	74.00	-25.39	41.23	5.34	34.93	36.97	Peak	111	100	HORIZONTAL
4	7301.76	33.61	54.00	-20.39	26.23	5.34	34.93	36.97	Average	111	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4869.28	32.75	54.00	-21.25	30.54	4.22	34.67	32.66	Average	111	100	VERTICAL
2	4874.80	50.62	74.00	-23.38	48.41	4.22	34.67	32.66	Peak	111	100	VERTICAL
3	7304.08	51.63	74.00	-22.37	44.25	5.34	34.93	36.97	Peak	213	100	VERTICAL
4	7305.96	31.66	54.00	-22.34	24.28	5.34	34.93	36.97	Average	213	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4895.76	42.48	74.00	-31.52	40.23	4.22	34.66	32.69	Peak	191	100	HORIZONTAL
2	4911.84	29.51	54.00	-24.49	27.22	4.22	34.66	32.73	Average	191	100	HORIZONTAL
3	7364.28	47.13	74.00	-26.87	39.71	5.35	34.96	37.03	Peak	253	100	HORIZONTAL
4	7364.56	33.17	54.00	-20.83	25.75	5.35	34.96	37.03	Average	253	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4913.72	42.65	74.00	-31.35	40.36	4.22	34.66	32.73	Peak	168	100	VERTICAL
2	4913.92	29.70	54.00	-24.30	27.41	4.22	34.66	32.73	Average	168	100	VERTICAL
3	7354.28	47.33	74.00	-26.67	39.90	5.35	34.95	37.03	Peak	184	100	VERTICAL
4	7365.80	33.33	54.00	-20.67	25.91	5.35	34.96	37.03	Average	184	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11488.20	61.08	74.00	-12.92	50.66	6.74	34.82	38.50	Peak	324	100	HORIZONTAL
2	11490.08	47.31	54.00	-6.69	36.89	6.74	34.82	38.50	Average	324	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11487.84	68.43	74.00	-5.57	58.01	6.74	34.82	38.50	Peak	121	122	VERTICAL
2	11489.68	53.92	54.00	-0.08	43.50	6.74	34.82	38.50	Average	121	122	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	EEE 802.11ac MCS0, Nss1 20MHz CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11568.76	59.53	74.00	-14.47	49.10	6.77	34.84	38.50	Peak	156	100	HORIZONTAL
2	11568.76	49.00	54.00	-5.00	38.57	6.77	34.84	38.50	Average	156	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11562.44	69.20	74.00	-4.80	58.77	6.77	34.84	38.50	Peak	123	117	VERTICAL
2	11562.64	53.89	54.00	-0.11	43.46	6.77	34.84	38.50	Average	123	117	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11644.84	46.55	54.00	-7.45	36.11	6.80	34.86	38.50	Average	155	100	HORIZONTAL
2	11648.08	56.46	74.00	-17.54	46.03	6.80	34.87	38.50	Peak	155	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11658.36	53.72	54.00	-0.28	43.29	6.80	34.87	38.50	Average	65	119	VERTICAL
2	11659.24	66.28	74.00	-7.72	55.85	6.80	34.87	38.50	Peak	65	119	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz CH 151 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11505.00	62.19	74.00	-11.81	51.76	6.75	34.82	38.50	Peak	129	100	HORIZONTAL
2	11514.98	48.41	54.00	-5.59	37.97	6.76	34.82	38.50	Average	129	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11509.94	62.33	74.00	-11.67	51.90	6.75	34.82	38.50	Peak	178	100	VERTICAL
2	11509.96	53.15	54.00	-0.85	42.72	6.75	34.82	38.50	Average	178	100	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz CH 159 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11599.36	61.29	74.00	-12.71	50.86	6.78	34.85	38.50	Peak	276	100	HORIZONTAL
2	11599.36	48.63	54.00	-5.37	38.20	6.78	34.85	38.50	Average	276	130	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11588.60	53.29	54.00	-0.71	42.86	6.78	34.85	38.50	Average	357	132	VERTICAL
2	11590.16	65.15	74.00	-8.85	54.72	6.78	34.85	38.50	Peak	357	132	VERTICAL

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0, Nss1 80MHz CH 155 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5133.40	55.65	74.00	-18.35	52.83	4.33	34.62	33.11	Peak	226	100	HORIZONTAL
2	5133.40	45.67	54.00	-8.33	42.85	4.33	34.62	33.11	Average	226	100	HORIZONTAL
3	11548.76	51.89	74.00	-22.11	41.46	6.77	34.84	38.50	Peak	226	100	HORIZONTAL
4	11549.04	41.82	54.00	-12.18	31.39	6.77	34.84	38.50	Average	226	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5133.40	59.59	74.00	-14.41	56.77	4.33	34.62	33.11	Peak	226	100	VERTICAL
2	5133.40	51.47	54.00	-2.53	48.65	4.33	34.62	33.11	Average	226	100	VERTICAL
3	11551.48	60.75	74.00	-13.25	50.32	6.77	34.84	38.50	Peak	176	100	VERTICAL
4	11554.60	47.86	54.00	-6.14	37.43	6.77	34.84	38.50	Average	176	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming function:

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.67	54.00	-0.33	23.28	2.22	28.17	0.00	Average	165	11	HORIZONTAL
2	2390.00	73.87	74.00	-0.13	43.48	2.22	28.17	0.00	Peak	165	11	HORIZONTAL
3	2406.60	108.30			77.87	2.22	28.21	0.00	Average	165	11	HORIZONTAL
4	2406.80	119.21			88.78	2.22	28.21	0.00	Peak	165	11	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	47.81	54.00	-6.19	17.42	2.22	28.17	0.00	Average	154	17	HORIZONTAL
2	2389.80	64.41	74.00	-9.59	34.02	2.22	28.17	0.00	Peak	154	17	HORIZONTAL
3	2444.40	111.92			81.39	2.24	28.29	0.00	Average	154	17	HORIZONTAL
4	2444.60	122.53			92.00	2.24	28.29	0.00	Peak	154	17	HORIZONTAL
5	2484.10	51.03	54.00	-2.97	20.39	2.26	28.38	0.00	Average	154	17	HORIZONTAL
6	2485.30	70.89	74.00	-3.11	40.21	2.26	28.42	0.00	Peak	154	17	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2456.60	106.89			76.32	2.24	28.33	0.00	Average	157	10	HORIZONTAL
2	2457.00	117.49			86.92	2.24	28.33	0.00	Peak	157	10	HORIZONTAL
3	2483.50	53.10	54.00	-0.90	22.46	2.26	28.38	0.00	Average	157	10	HORIZONTAL
4	2485.70	72.81	74.00	-1.19	42.13	2.26	28.42	0.00	Peak	157	10	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2380.40	69.69	74.00	-4.31	39.35	2.21	28.13	0.00	Peak	100	168	HORIZONTAL
2	2384.00	53.24	54.00	-0.76	22.86	2.21	28.17	0.00	Average	100	168	HORIZONTAL
3	2408.40	102.64			72.21	2.22	28.21	0.00	Average	100	168	HORIZONTAL
4	2408.40	114.53			84.10	2.22	28.21	0.00	Peak	100	168	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.40	64.77	74.00	-9.23	34.39	2.21	28.17	0.00	Peak	149	22	HORIZONTAL
2	2389.20	48.16	54.00	-5.84	17.78	2.21	28.17	0.00	Average	149	22	HORIZONTAL
3	2454.60	103.56			72.99	2.24	28.33	0.00	Average	149	22	HORIZONTAL
4	2454.60	115.00			84.43	2.24	28.33	0.00	Peak	149	22	HORIZONTAL
5	2484.70	53.37	54.00	-0.63	22.73	2.26	28.38	0.00	Average	149	22	HORIZONTAL
6	2485.90	69.51	74.00	-4.49	38.83	2.26	28.42	0.00	Peak	149	22	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2448.40	100.26			69.73	2.24	28.29	0.00	Average	125	192	HORIZONTAL
2	2448.40	111.52			80.99	2.24	28.29	0.00	Peak	125	192	HORIZONTAL
3	2483.50	53.71	54.00	-0.29	23.07	2.26	28.38	0.00	Average	125	192	HORIZONTAL
4	2483.50	67.93	74.00	-6.07	37.29	2.26	28.38	0.00	Peak	125	192	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.20	53.34	54.00	-0.66	22.96	2.21	28.17	0.00	Average	155	9	HORIZONTAL
2	2390.00	62.31	74.00	-11.69	31.92	2.22	28.17	0.00	Peak	155	9	HORIZONTAL
3	2411.00	121.27			90.84	2.22	28.21	0.00	Peak	155	9	HORIZONTAL
4	2411.20	117.38			86.95	2.22	28.21	0.00	Average	155	9	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.60	56.19	74.00	-17.81	25.81	2.21	28.17	0.00	Peak	152	10	HORIZONTAL
2	2390.00	44.38	54.00	-9.62	13.99	2.22	28.17	0.00	Average	152	10	HORIZONTAL
3	2437.60	116.05			85.53	2.23	28.29	0.00	Average	152	10	HORIZONTAL
4	2438.00	120.27			89.75	2.23	28.29	0.00	Peak	152	10	HORIZONTAL
5	2483.50	46.85	54.00	-7.15	16.21	2.26	28.38	0.00	Average	152	10	HORIZONTAL
6	2483.90	59.26	74.00	-14.74	28.62	2.26	28.38	0.00	Peak	152	10	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.20	115.62			85.05	2.24	28.33	0.00	Average	156	11	HORIZONTAL
2	2461.20	119.49			88.92	2.24	28.33	0.00	Peak	156	11	HORIZONTAL
3	2483.50	53.76	54.00	-0.24	23.12	2.26	28.38	0.00	Average	156	11	HORIZONTAL
4	2483.50	62.16	74.00	-11.84	31.52	2.26	28.38	0.00	Peak	156	11	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Dec. 05, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	73.60	74.00	-0.40	43.21	2.22	28.17	0.00	Peak	100	340	VERTICAL
2	2390.00	53.13	54.00	-0.87	22.74	2.22	28.17	0.00	Average	100	340	VERTICAL
3	2408.80	118.61			88.18	2.22	28.21	0.00	Peak	100	340	VERTICAL
4	2409.20	108.18			77.75	2.22	28.21	0.00	Average	100	340	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	60.57	74.00	-13.43	30.19	2.21	28.17	0.00	Peak	149	22	HORIZONTAL
2	2390.00	45.24	54.00	-8.76	14.85	2.22	28.17	0.00	Average	149	22	HORIZONTAL
3	2444.00	111.42			80.89	2.24	28.29	0.00	Average	149	22	HORIZONTAL
4	2444.60	121.95			91.42	2.24	28.29	0.00	Peak	149	22	HORIZONTAL
5	2483.50	48.96	54.00	-5.04	18.32	2.26	28.38	0.00	Average	149	22	HORIZONTAL
6	2484.70	65.02	74.00	-8.98	34.38	2.26	28.38	0.00	Peak	149	22	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2460.40	108.11			77.54	2.24	28.33	0.00	Average	151	15	HORIZONTAL
2	2460.40	119.01			88.44	2.24	28.33	0.00	Peak	151	15	HORIZONTAL
3	2483.50	73.50	74.00	-0.50	42.86	2.26	28.38	0.00	Peak	151	15	HORIZONTAL
4	2484.70	53.54	54.00	-0.46	22.90	2.26	28.38	0.00	Average	151	15	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For beamforming function:

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	70.15	74.00	-3.85	39.37	2.91	0.00	27.87	Peak	155	100	VERTICAL
2	2390.00	53.95	54.00	-0.05	23.17	2.91	0.00	27.87	Average	155	100	VERTICAL
3	2404.00	106.04			75.28	2.92	0.00	27.84	Average	155	100	VERTICAL
4	2404.20	117.04			86.28	2.92	0.00	27.84	Peak	155	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2387.60	67.13	74.00	-6.87	36.35	2.91	0.00	27.87	Peak	101	100	VERTICAL
2	2390.00	49.01	54.00	-4.99	18.23	2.91	0.00	27.87	Average	101	168	VERTICAL
3	2444.60	123.79			93.07	2.94	0.00	27.78	Peak	101	100	VERTICAL
4	2445.00	113.08			82.36	2.94	0.00	27.78	Average	101	100	VERTICAL
5	2483.50	50.87	54.00	-3.13	20.18	2.96	0.00	27.73	Average	101	100	VERTICAL
6	2485.50	67.50	74.00	-6.50	36.81	2.96	0.00	27.73	Peak	101	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2455.60	107.44			76.73	2.95	0.00	27.76	Average	153	144	VERTICAL
2	2458.00	118.50			87.79	2.95	0.00	27.76	Peak	153	144	VERTICAL
3	2483.70	53.56	54.00	-0.44	22.87	2.96	0.00	27.73	Average	153	144	VERTICAL
4	2484.50	69.53	74.00	-4.47	38.84	2.96	0.00	27.73	Peak	153	144	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n MCS0 40MHz CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2013		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2374.40	70.33	74.00	-3.67	39.54	2.90	0.00	27.89	Peak	156	100	VERTICAL
2	2379.60	53.77	54.00	-0.23	22.98	2.90	0.00	27.89	Average	156	100	VERTICAL
3	2404.40	115.13			84.37	2.92	0.00	27.84	Peak	156	100	VERTICAL
4	2404.80	104.39			73.63	2.92	0.00	27.84	Average	156	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2388.40	60.00	74.00	-14.00	29.22	2.91	0.00	27.87	Peak	155	153	VERTICAL
2	2389.20	46.90	54.00	-7.10	16.12	2.91	0.00	27.87	Average	155	153	VERTICAL
3	2447.80	105.56			74.84	2.94	0.00	27.78	Average	155	153	VERTICAL
4	2448.60	116.61			85.89	2.94	0.00	27.78	Peak	155	153	VERTICAL
5	2483.50	66.05	74.00	-7.95	35.36	2.96	0.00	27.73	Peak	155	153	VERTICAL
6	2483.50	53.55	54.00	-0.45	22.86	2.96	0.00	27.73	Average	155	153	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2453.60	103.67			72.96	2.95	0.00	27.76	Average	153	145	VERTICAL
2	2454.80	114.65			83.94	2.95	0.00	27.76	Peak	153	145	VERTICAL
3	2483.90	53.23	54.00	-0.77	22.54	2.96	0.00	27.73	Average	153	145	VERTICAL
4	2484.70	67.56	74.00	-6.44	36.87	2.96	0.00	27.73	Peak	153	145	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


For non-beamforming function:

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

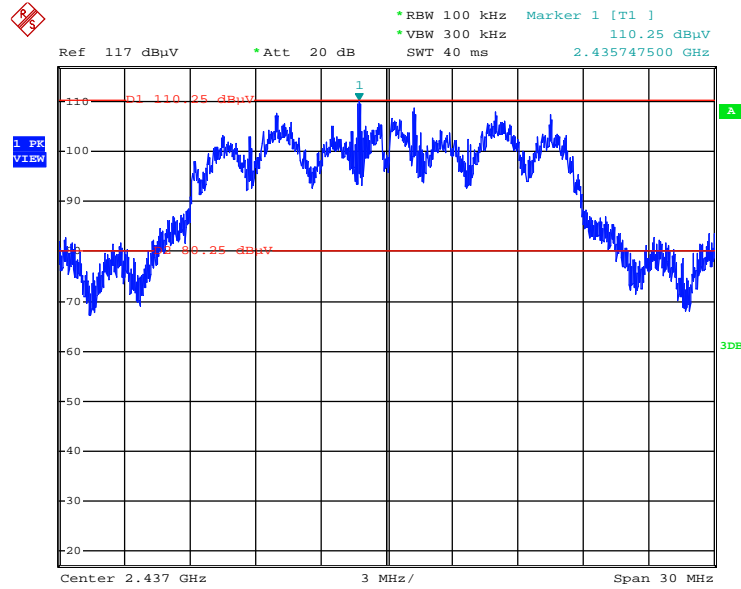


Date: 6.DEC.2013 23:13:44

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

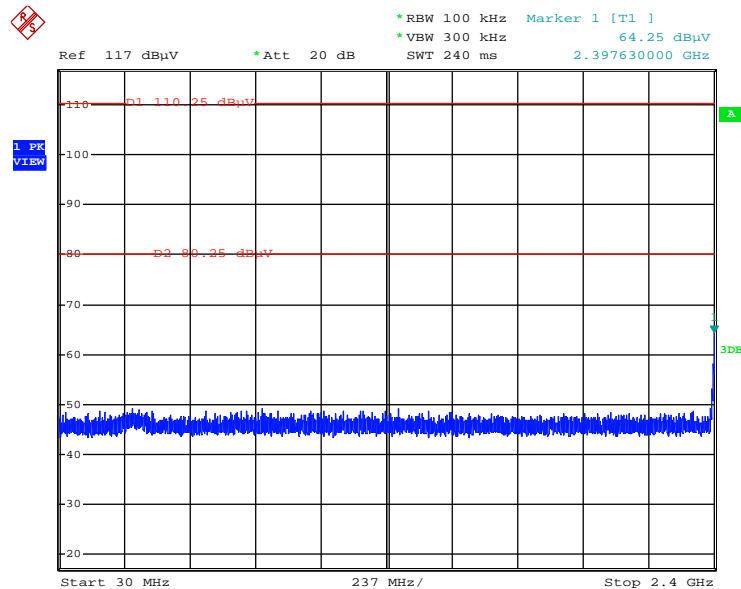


Date: 6.DEC.2013 23:14:38

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

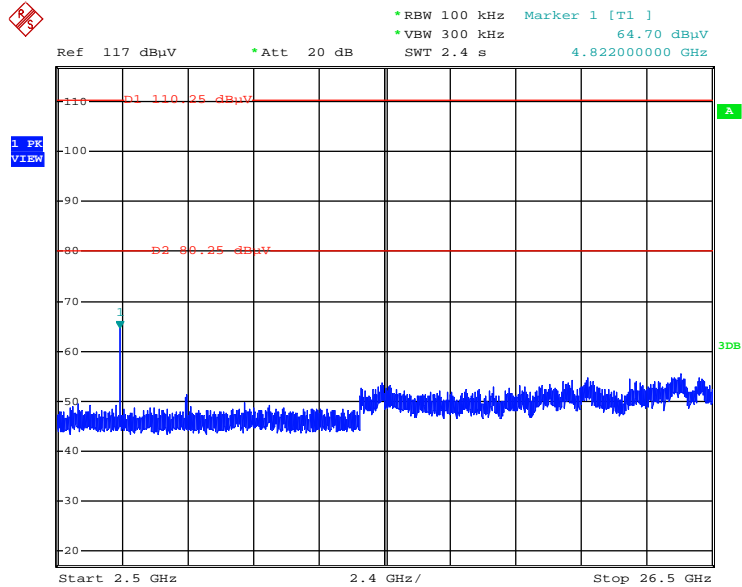


Date: 6.DEC.2013 23:15:13

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

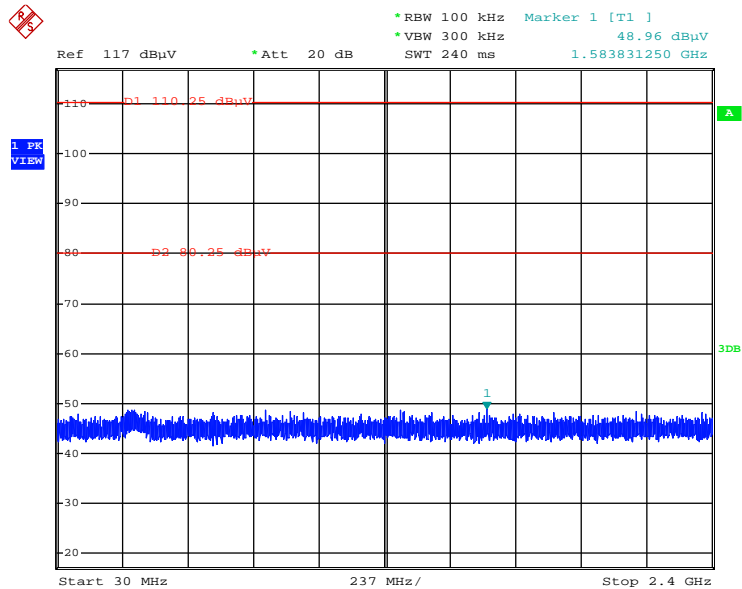


Date: 6.DEC.2013 23:16:06

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

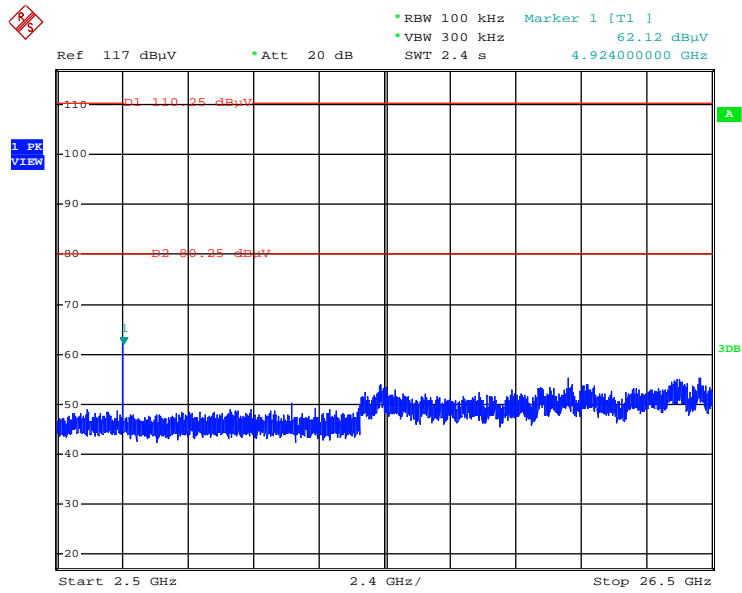


Date: 6.DEC.2013 23:15:46

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

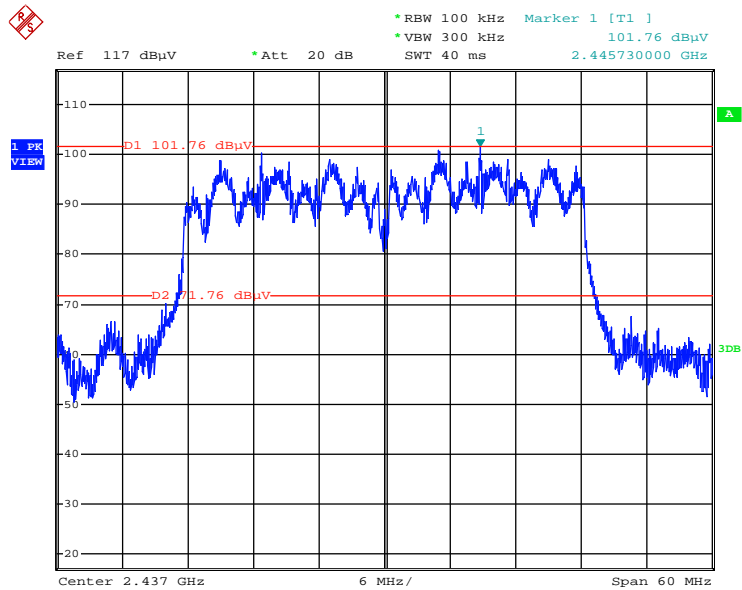


Date: 6.DEC.2013 23:17:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

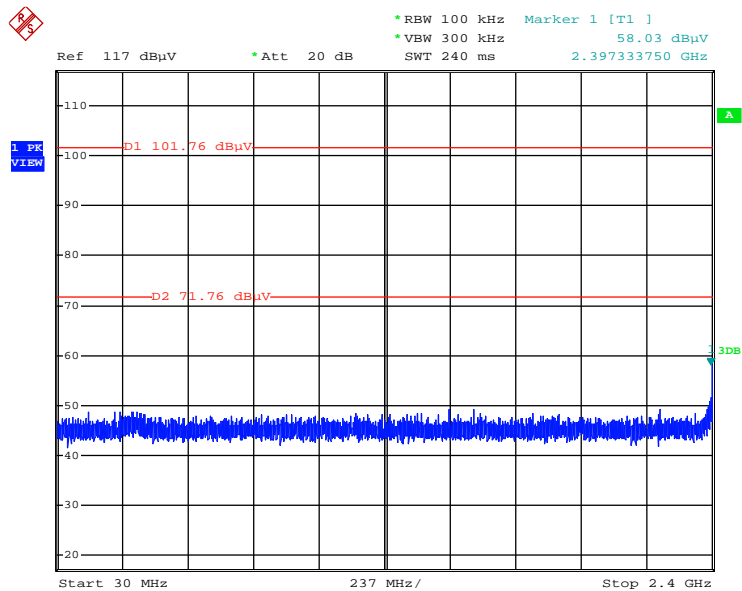


Date: 6.DEC.2013 23:18:39

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

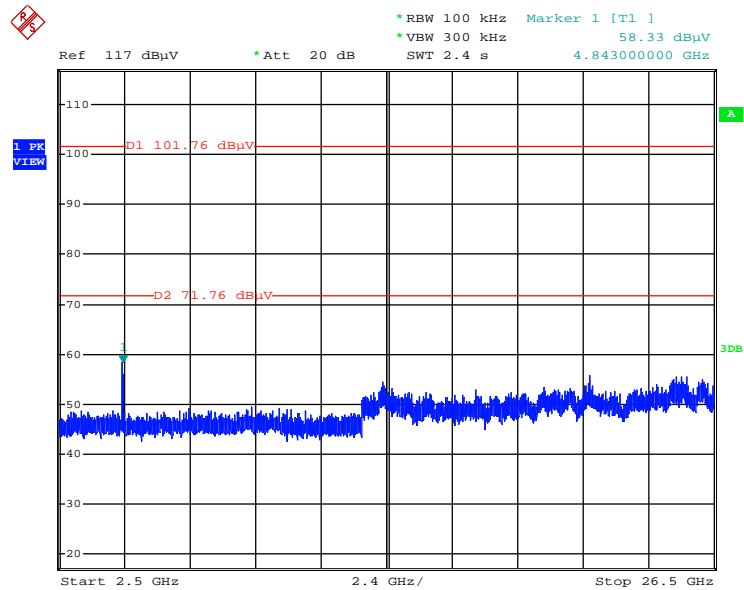


Date: 6.DEC.2013 23:19:08

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

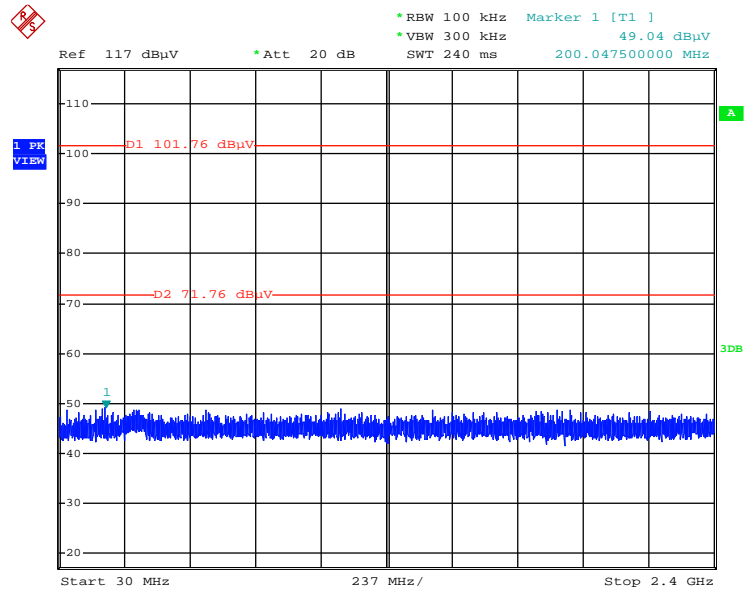


Date: 6.DEC.2013 23:20:11

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)

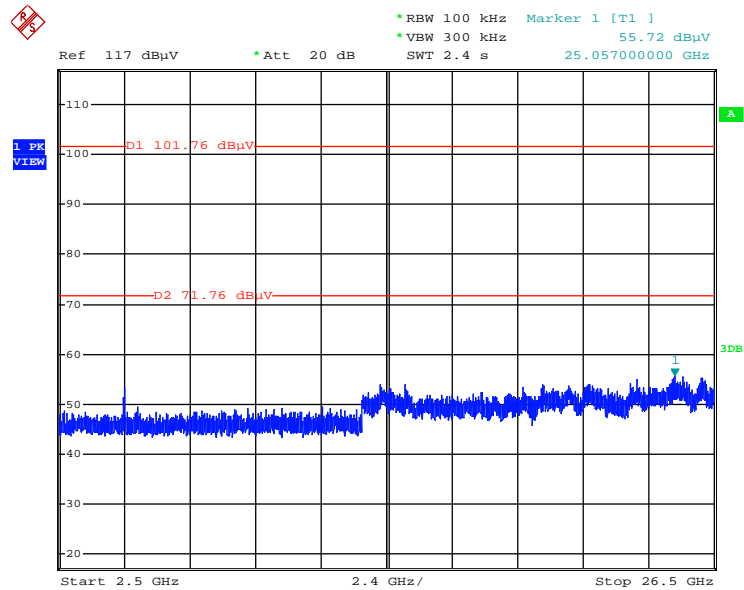


Date: 6.DEC.2013 23:19:48

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Reference Level

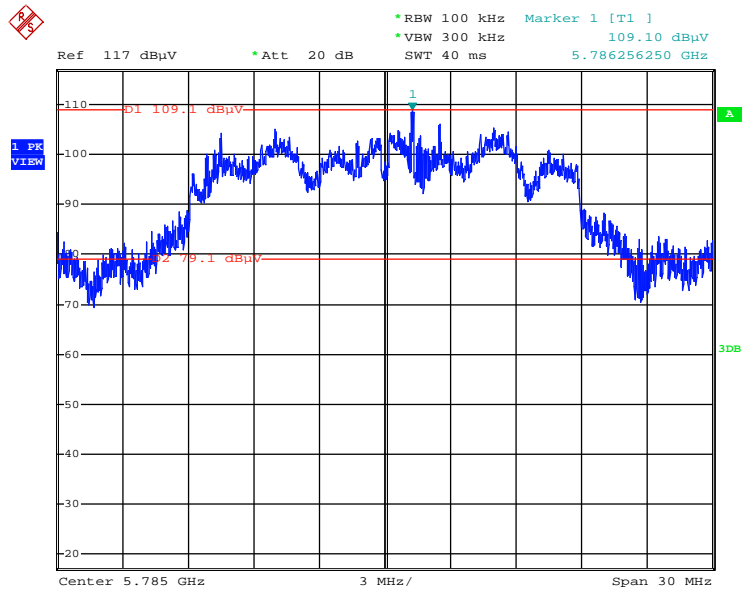


Date: 6.DEC.2013 22:33:20

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

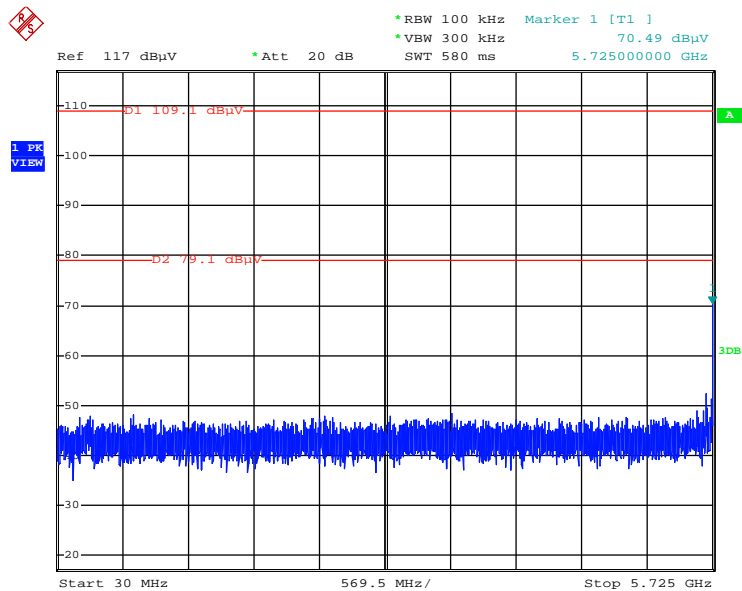


Date: 6.DEC.2013 22:34:23

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

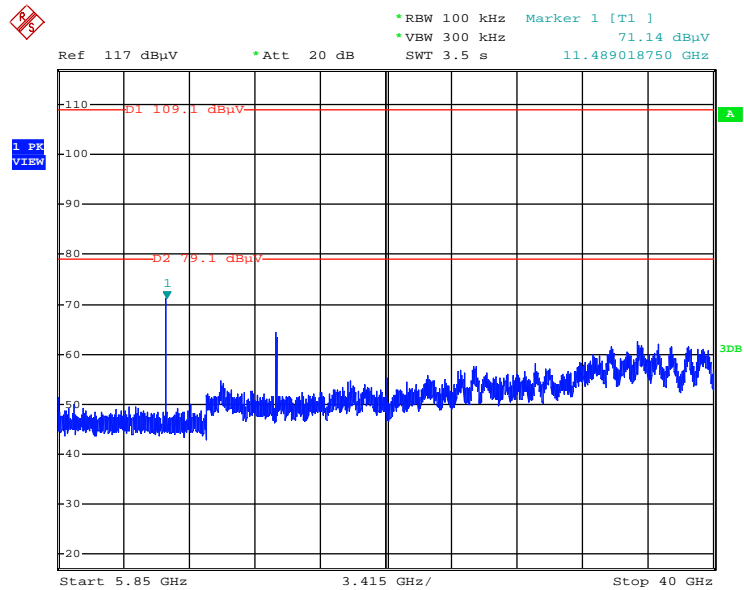


Date: 6.DEC.2013 22:34:49

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

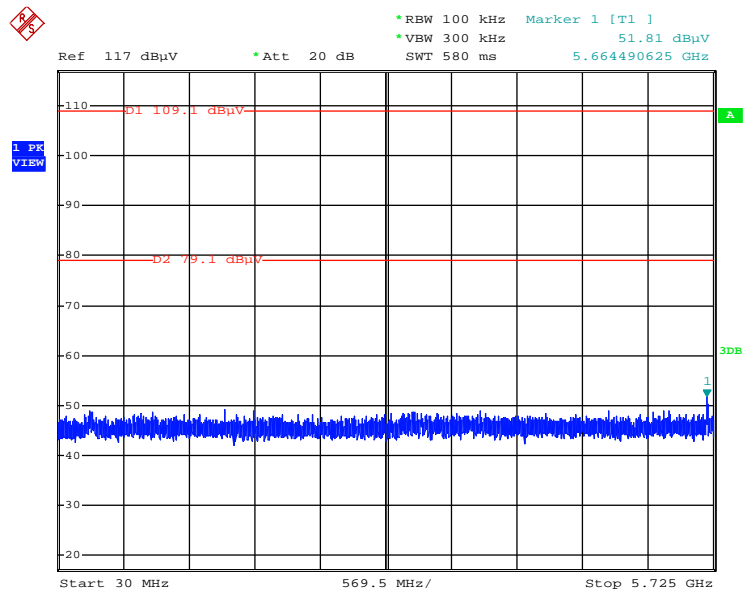


Date: 6.DEC.2013 22:35:49

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

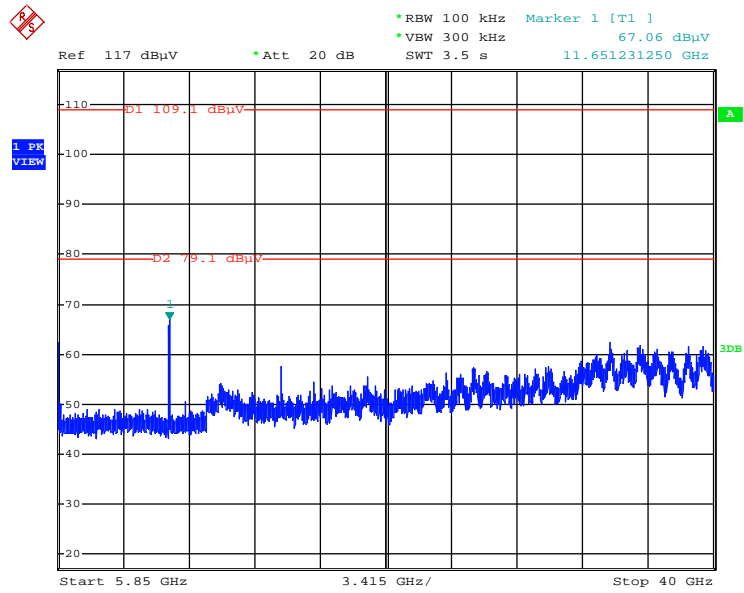


Date: 6.DEC.2013 22:35:20

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Reference Level

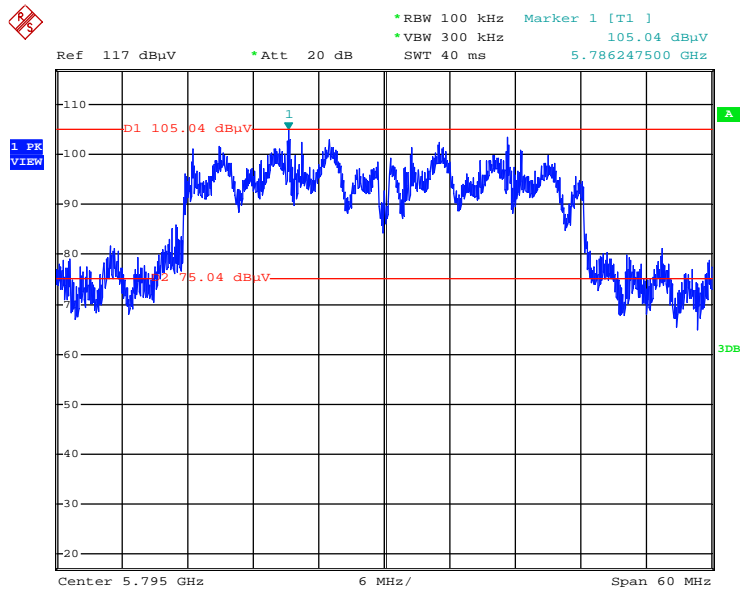


Date: 6.DEC.2013 22:27:41

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

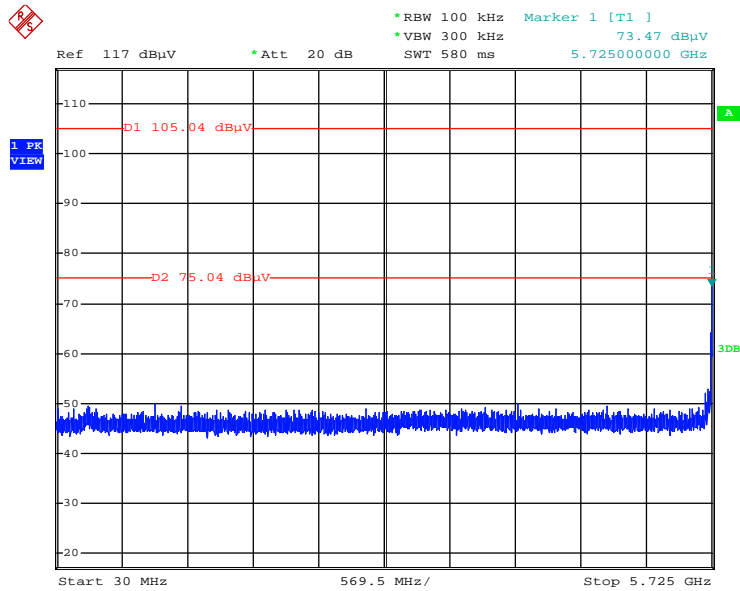


Date: 6.DEC.2013 22:31:39

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

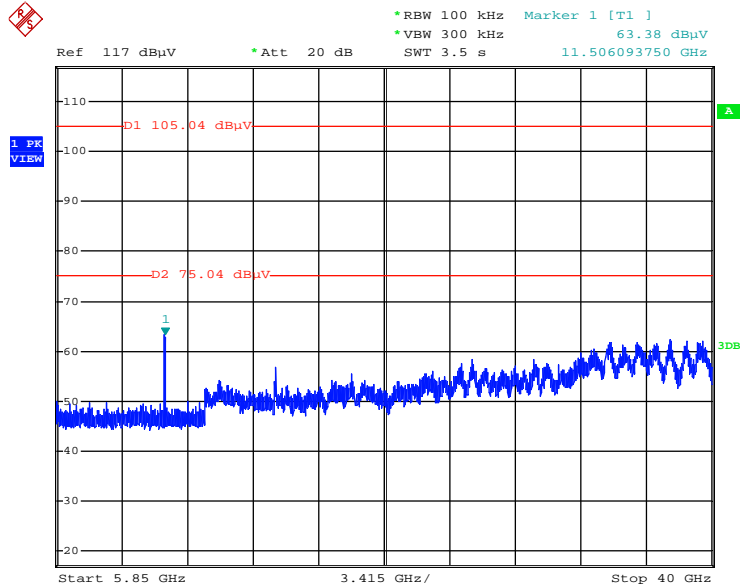


Date: 6.DEC.2013 22:32:25

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

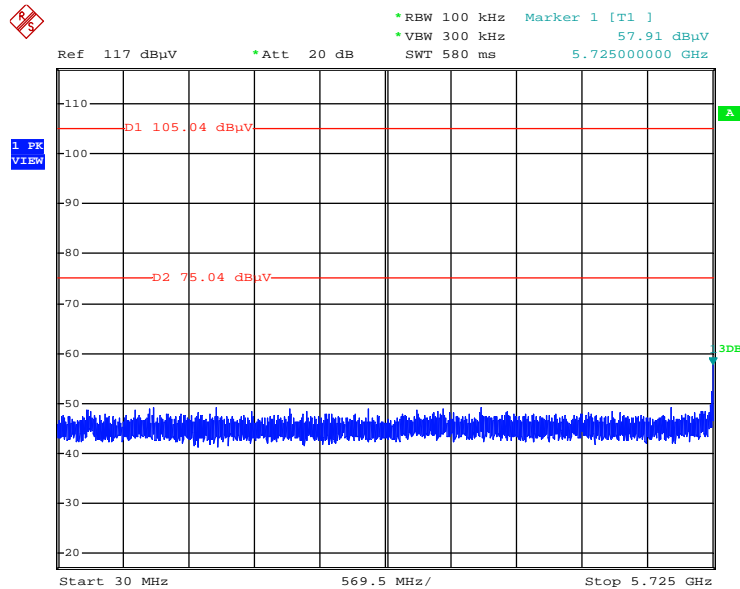


Date: 6.DEC.2013 22:28:54

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

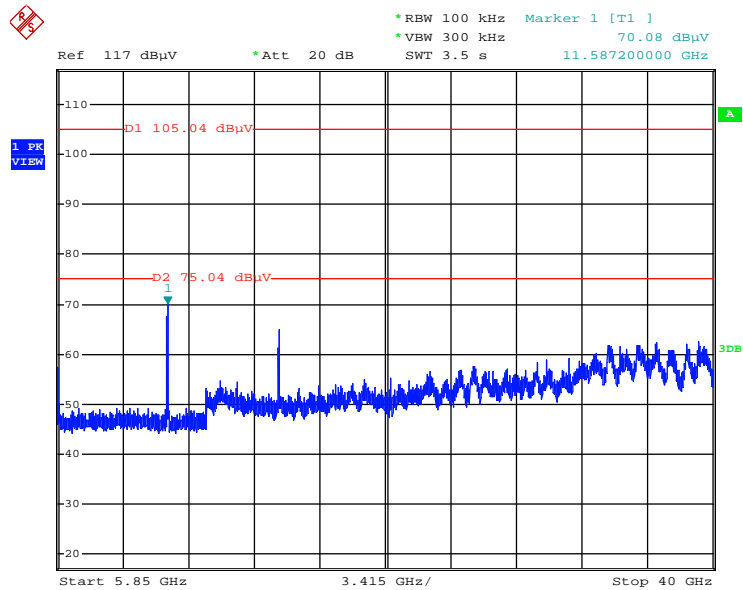


Date: 6.DEC.2013 22:28:32

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Reference Level

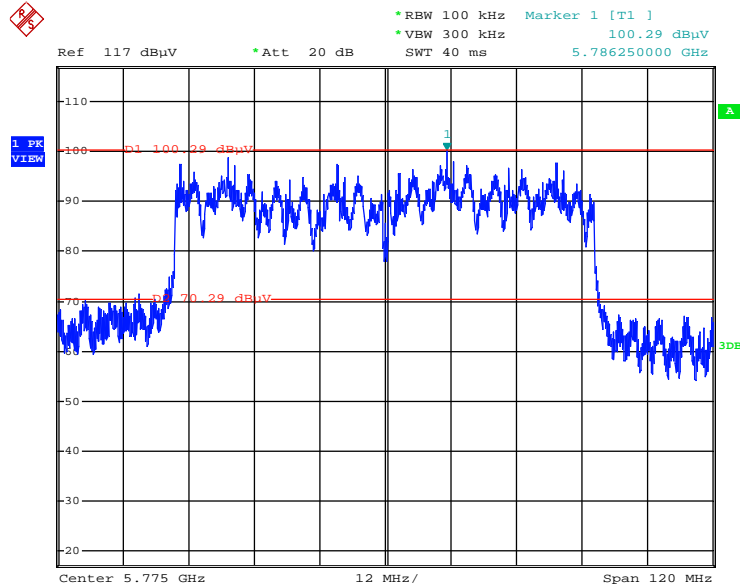


Date: 6.DEC.2013 22:23:33

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / CH 155 / 30MHz~5725MHz (down 30dBc)

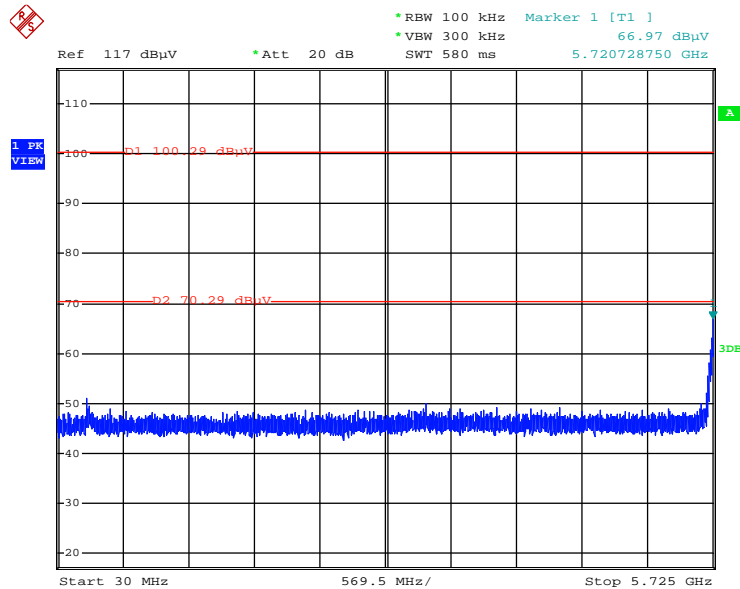


Date: 6.DEC.2013 22:24:08

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / CH 155 / 5850MHz~40000MHz (down 30dBc)

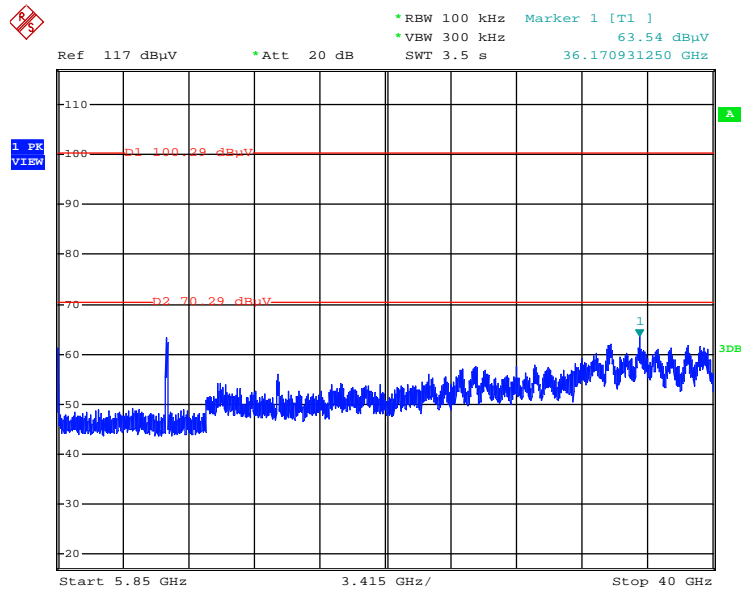


Date: 6.DEC.2013 22:26:21

Plot on Configuration IEEE 802.11b / Reference Level

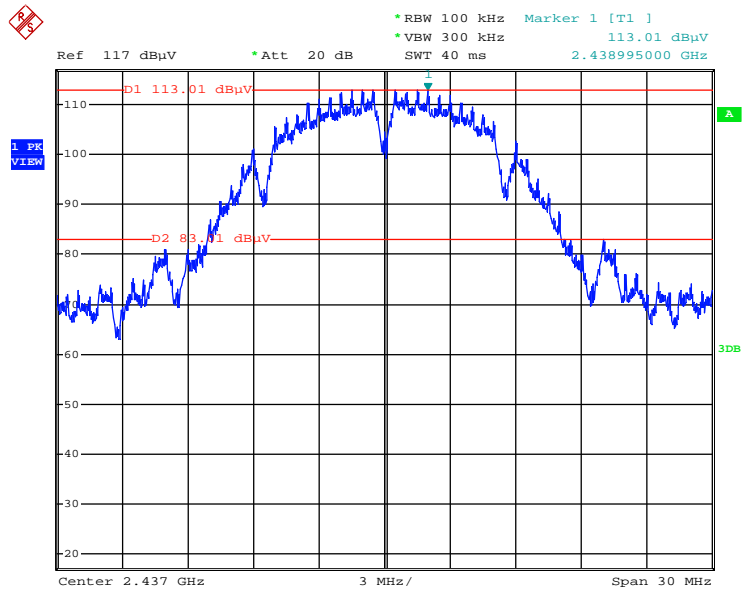


Date: 6.DEC.2013 22:54:13

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

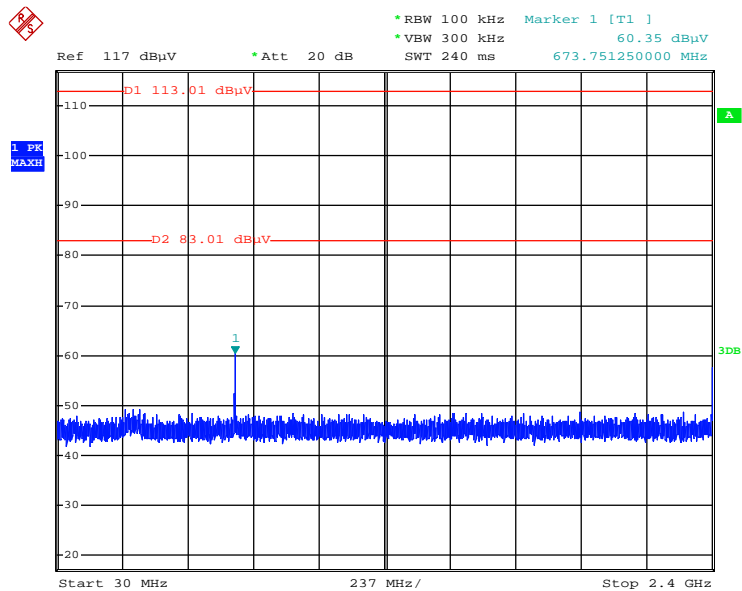


Date: 6.DEC.2013 23:04:53

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

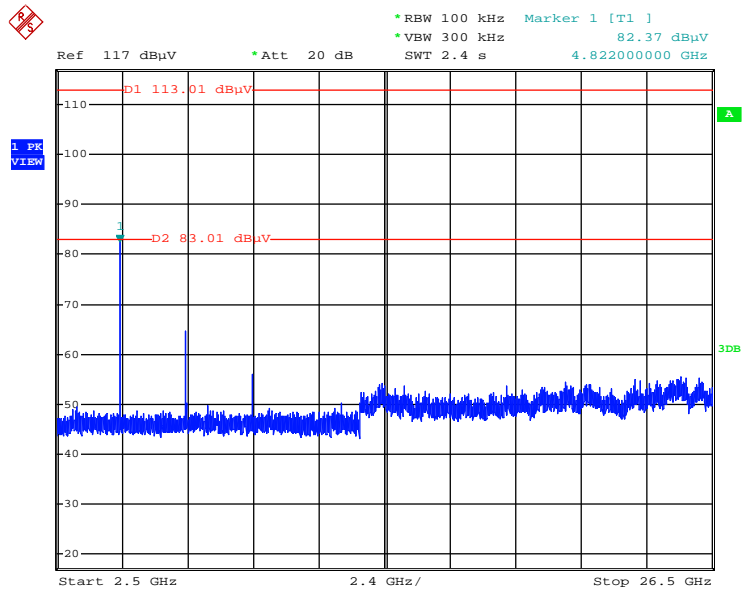


Date: 6.DEC.2013 23:04:24

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

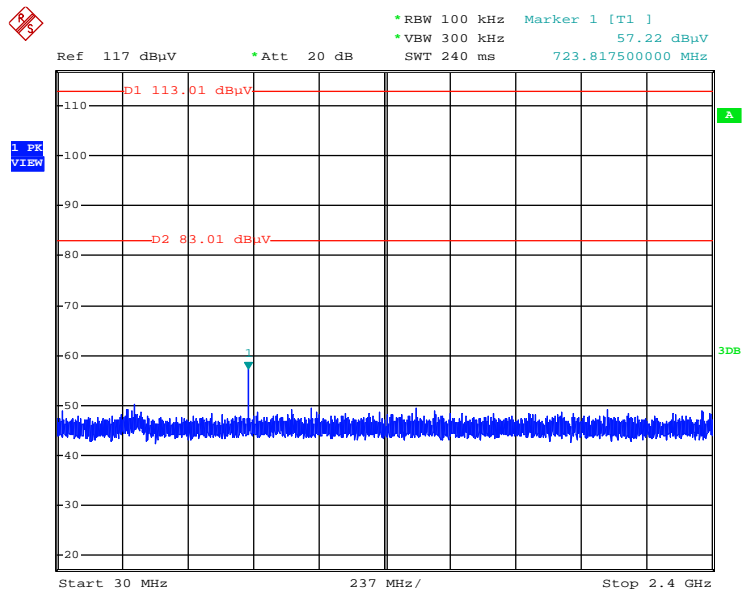


Date: 6.DEC.2013 23:07:07

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

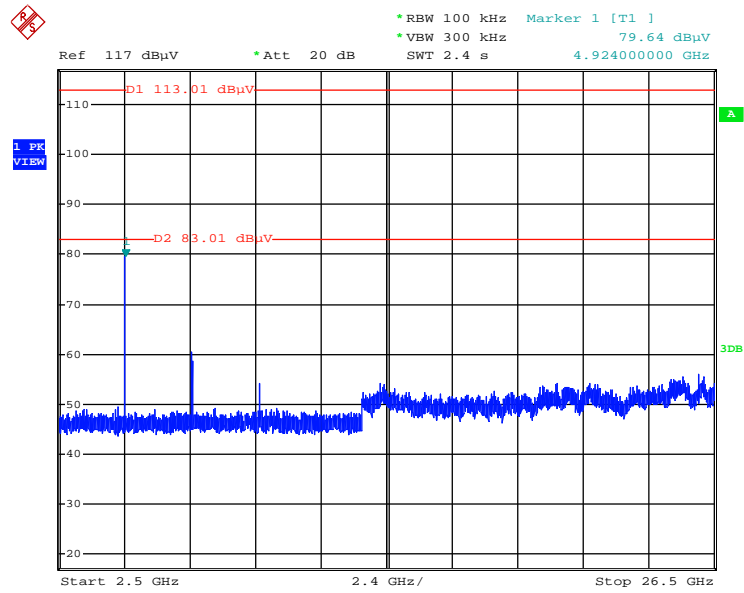


Date: 6.DEC.2013 23:06:09

Plot on Configuration IEEE 802.11g / Reference Level

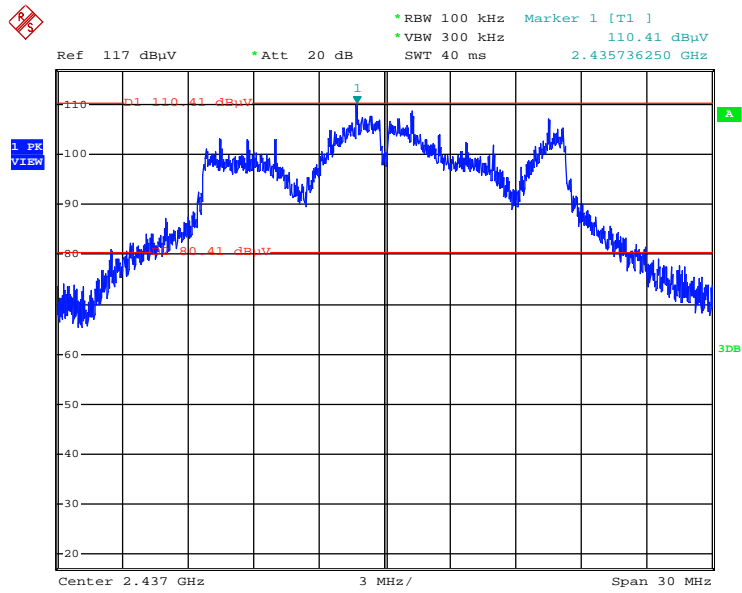


Date: 6.DEC.2013 23:08:30

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

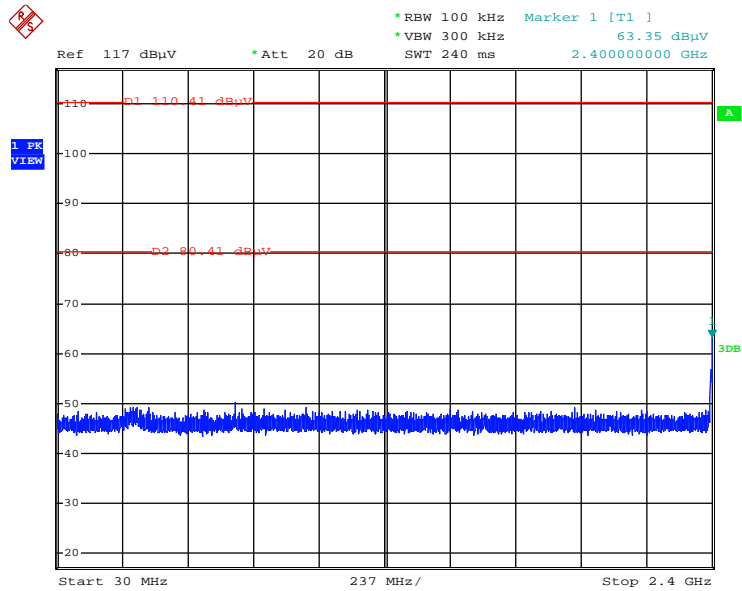


Date: 6.DEC.2013 23:10:17

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

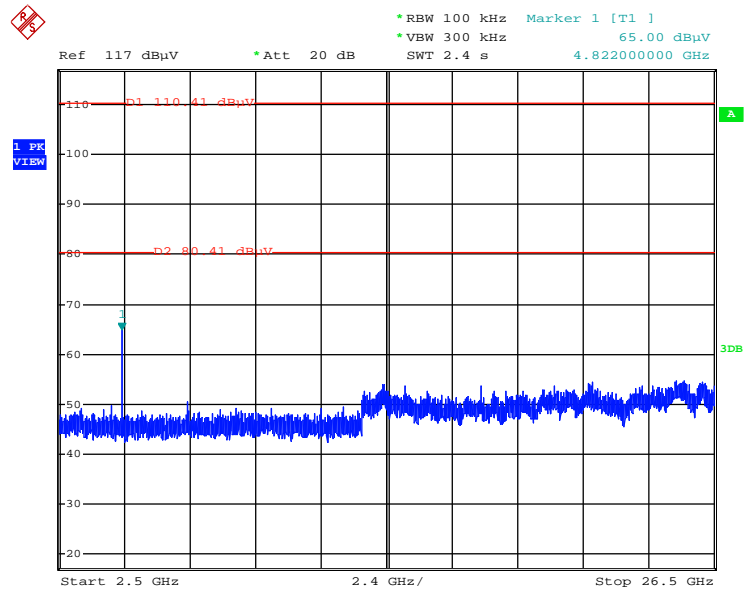


Date: 6.DEC.2013 23:10:51

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

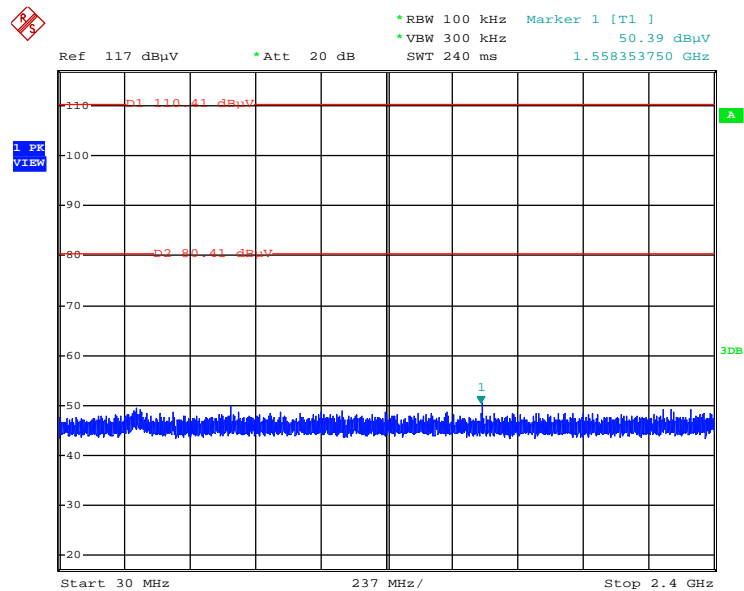


Date: 6.DEC.2013 23:12:19

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

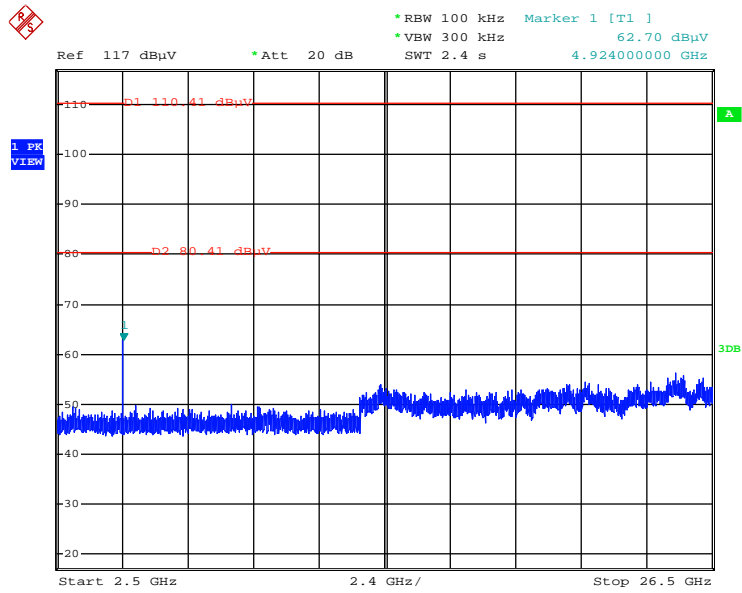


Date: 6.DEC.2013 23:11:38

Plot on Configuration IEEE 802.11a / Reference Level

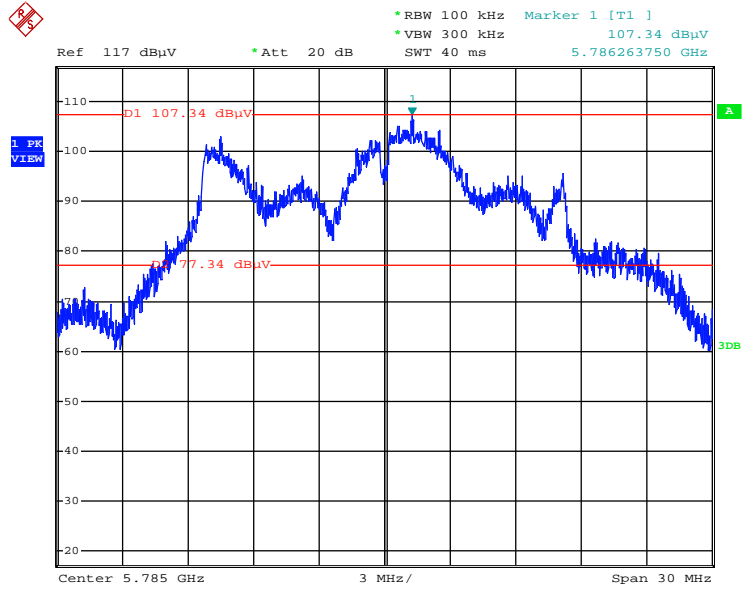


Date: 6.DEC.2013 22:37:10

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

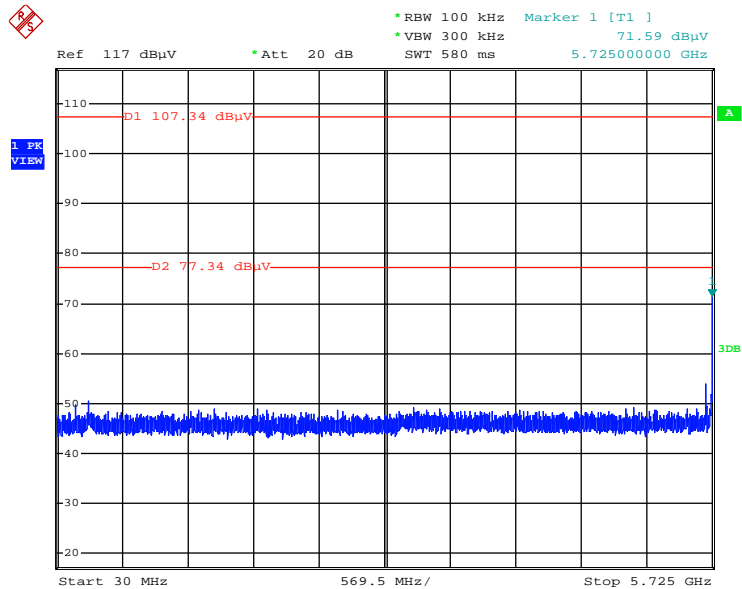


Date: 6.DEC.2013 22:38:11

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

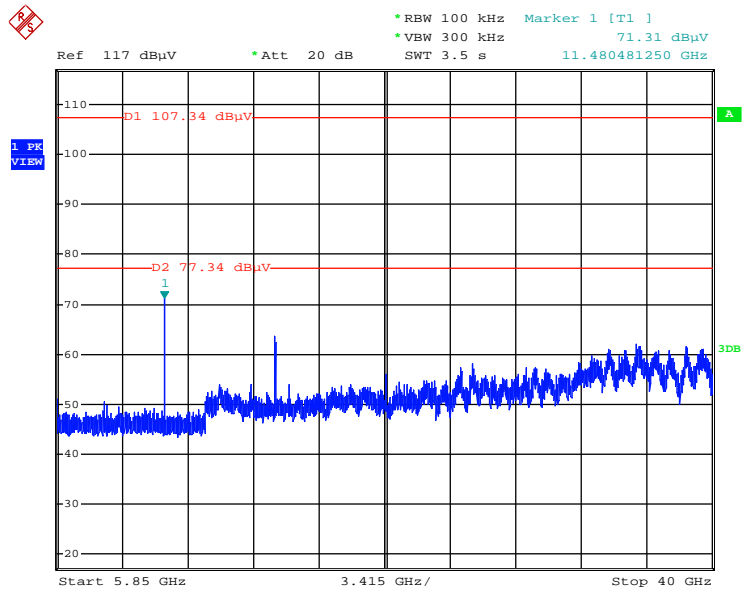


Date: 6.DEC.2013 22:40:30

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

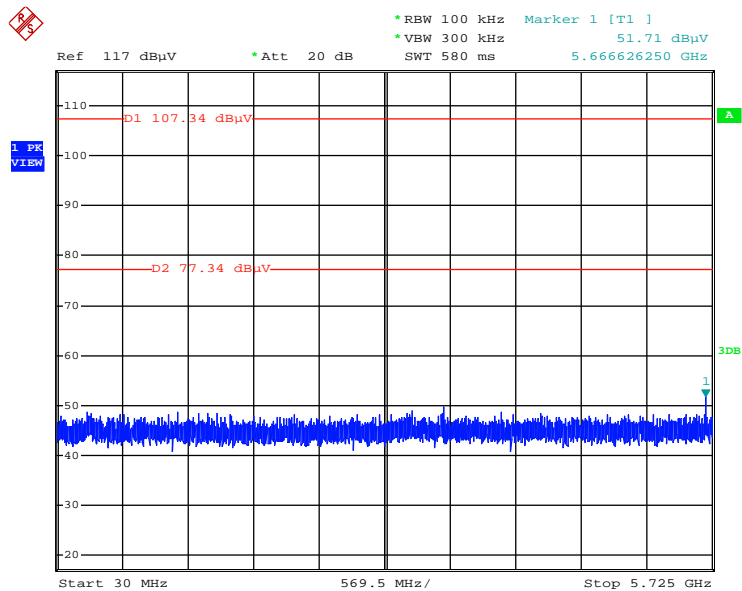

Date: 6.DEC.2013 22:41:26


Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

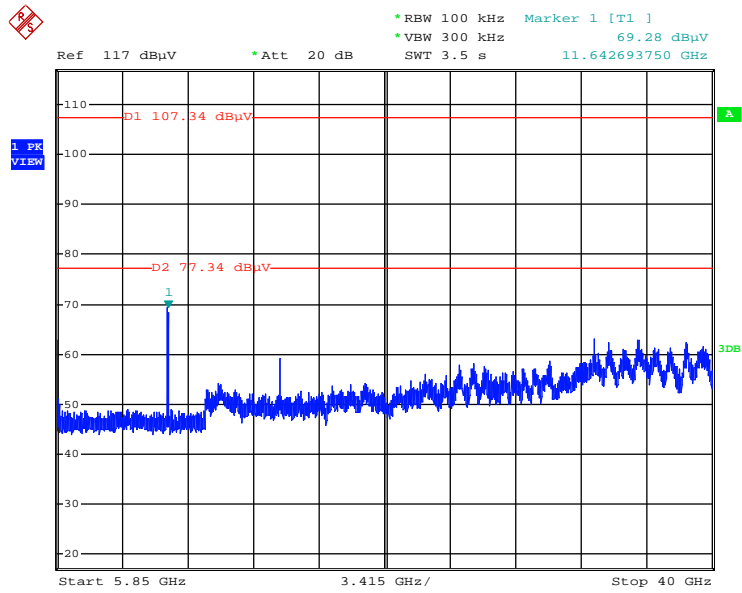

Date: 6.DEC.2013 22:41:03


For beamforming function:

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

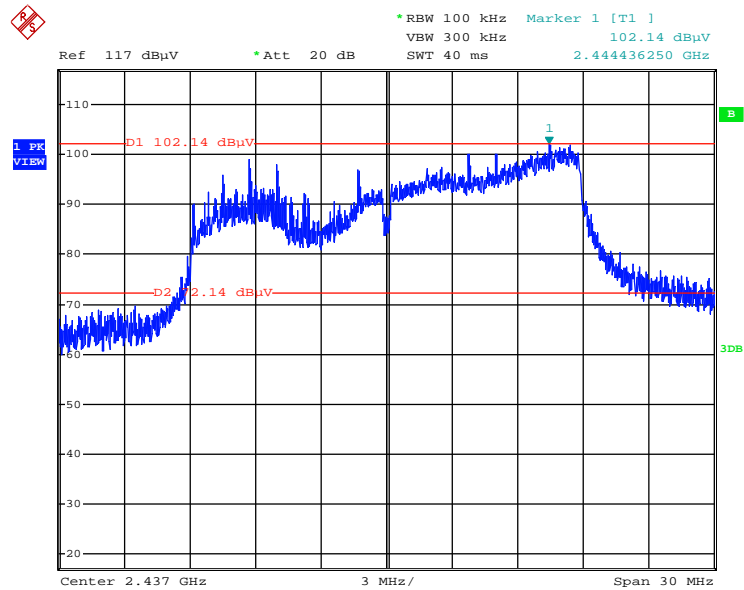


Date: 30.NOV.2013 17:51:12

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

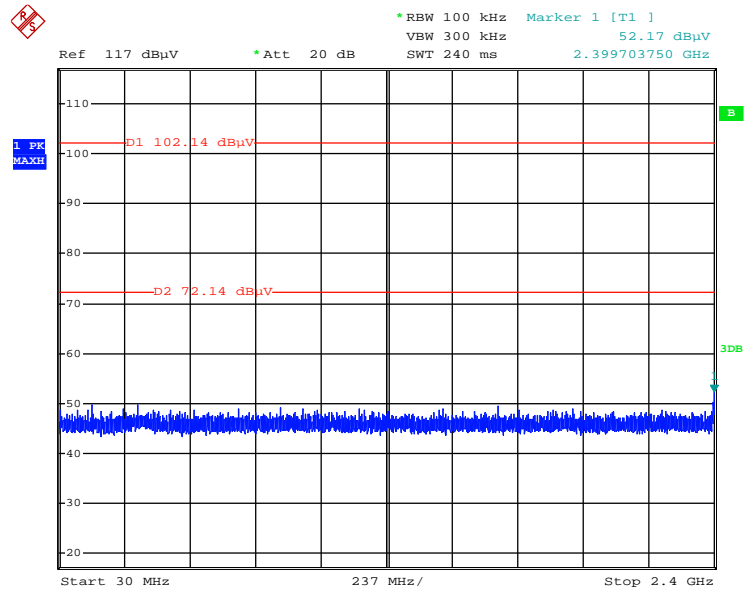


Date: 30.NOV.2013 17:54:18

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

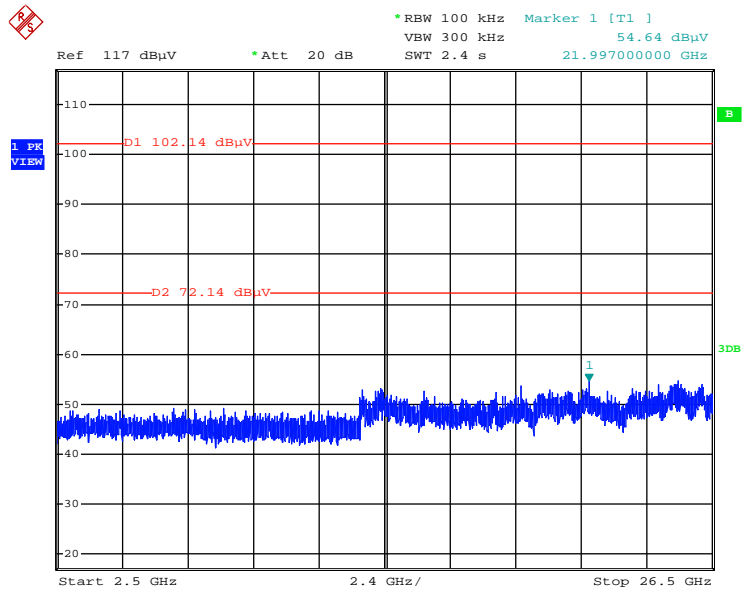


Date: 30.NOV.2013 17:54:50

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

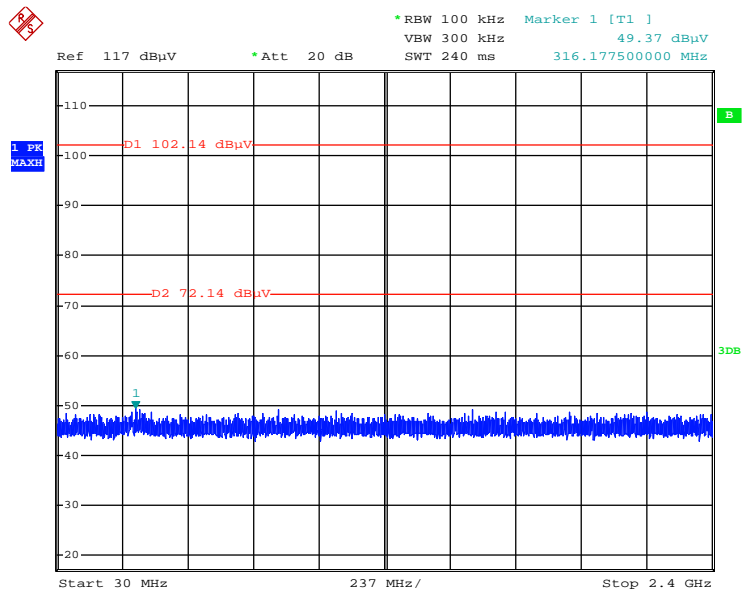


Date: 30.NOV.2013 17:56:08

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

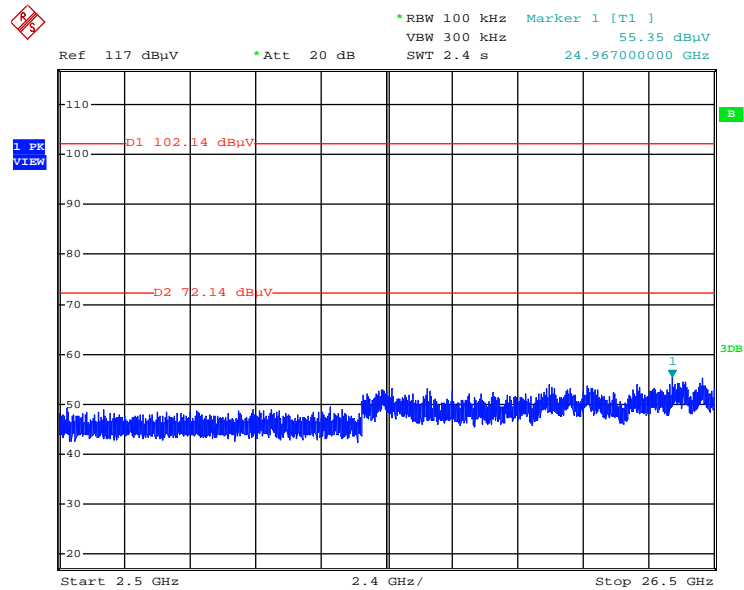


Date: 30.NOV.2013 17:55:37

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

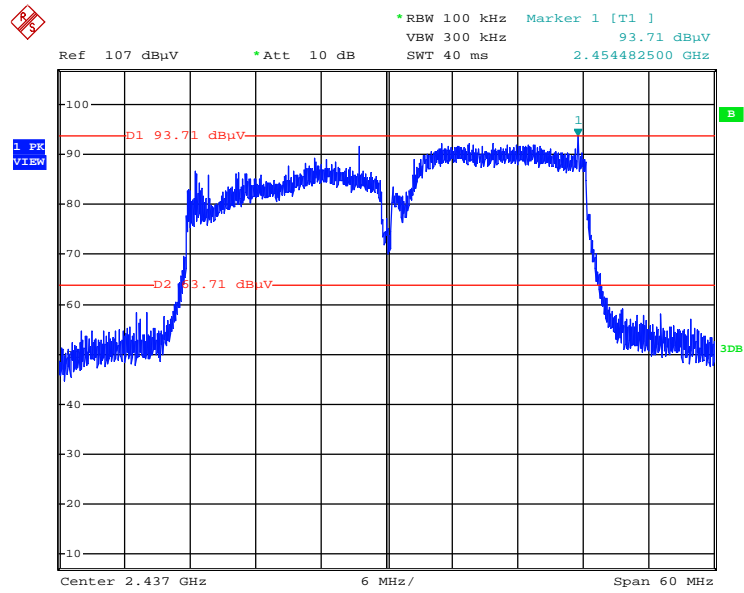


Date: 30.NOV.2013 18:00:51

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

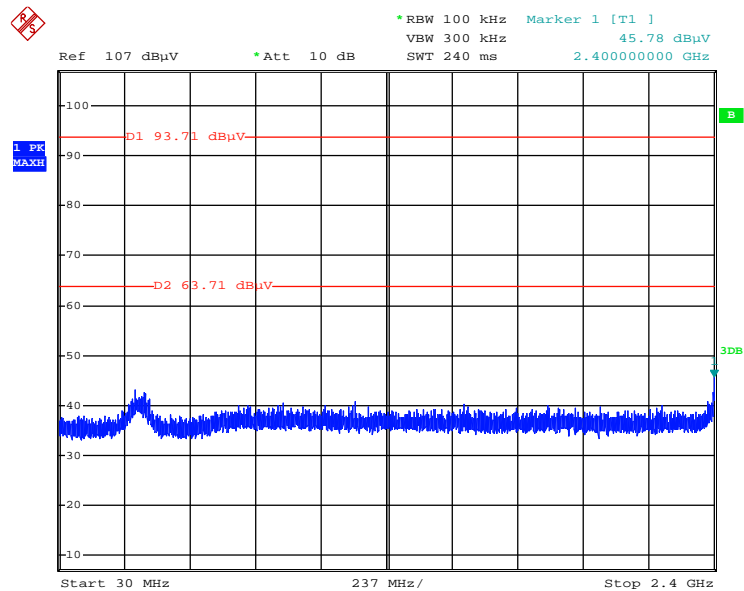


Date: 30.NOV.2013 18:02:45

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

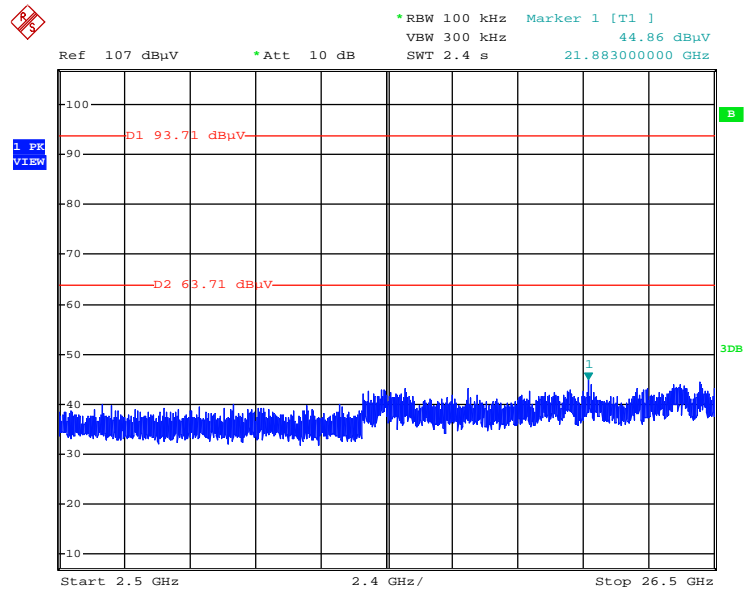


Date: 30.NOV.2013 18:04:06

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

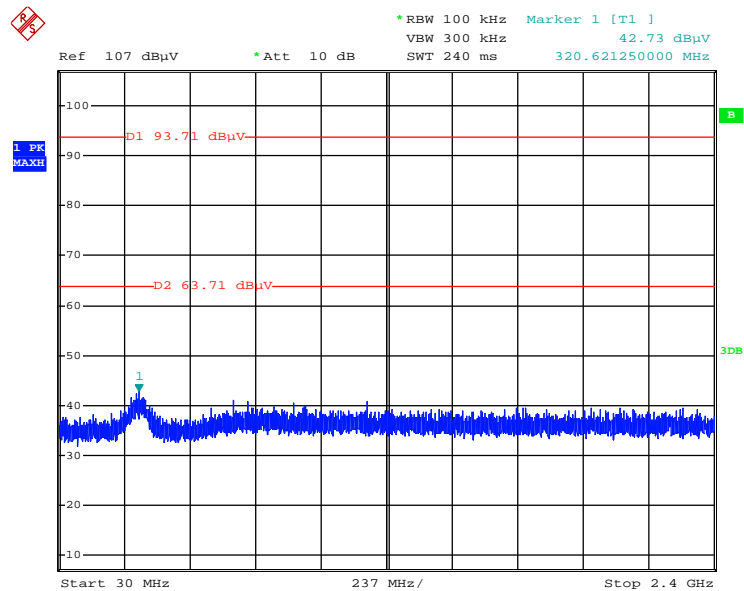


Date: 30.NOV.2013 18:05:24

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Reference Level

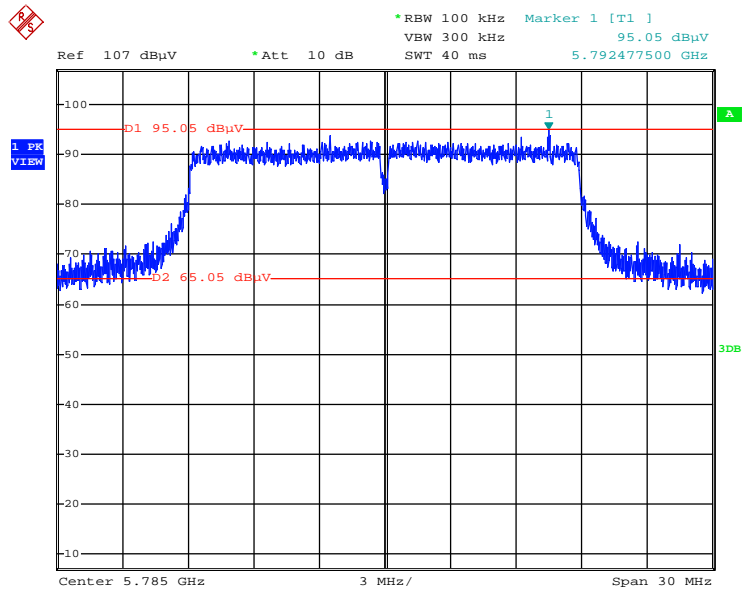


Date: 30.NOV.2013 13:40:38

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

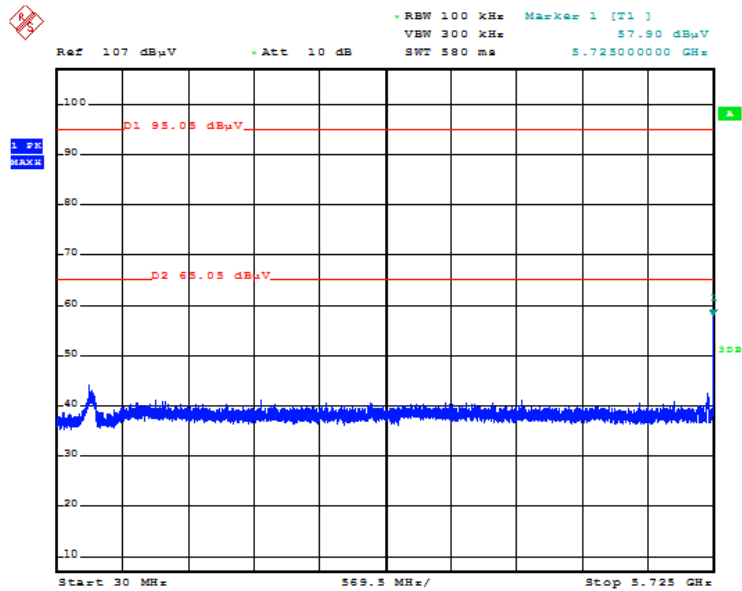


Date: 30.NOV.2013 13:46:26

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

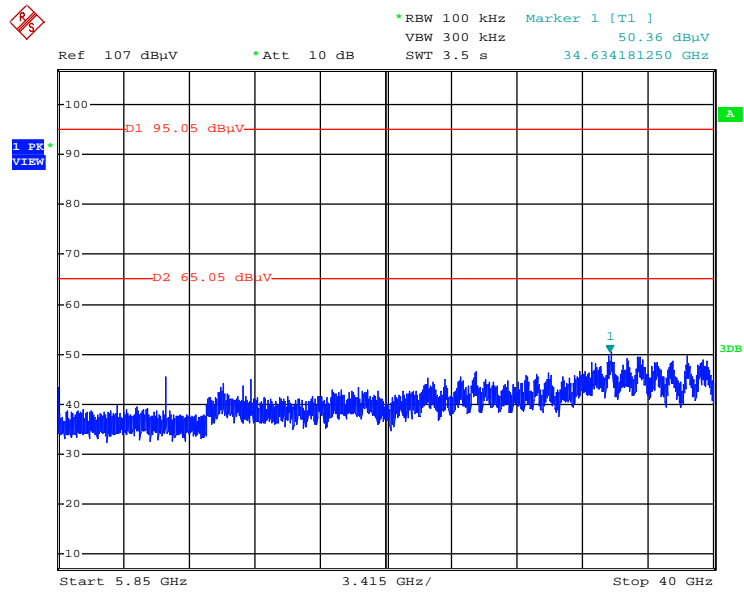


Date: 30.NOV.2013 13:47:50

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

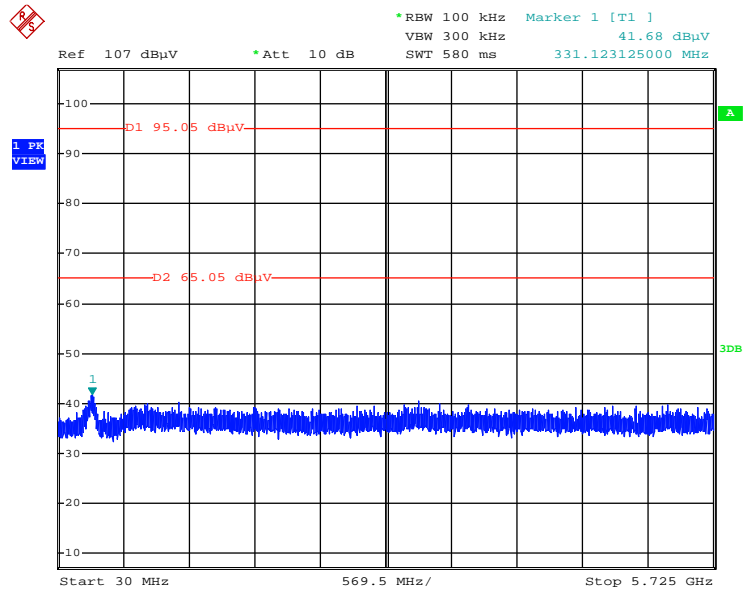


Date: 30.NOV.2013 13:49:33

Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

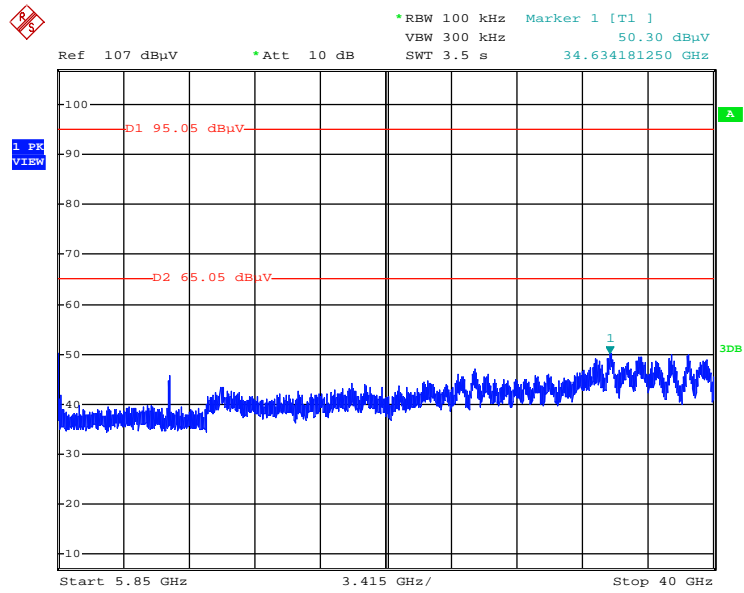


Date: 30.NOV.2013 13:49:03

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Reference Level

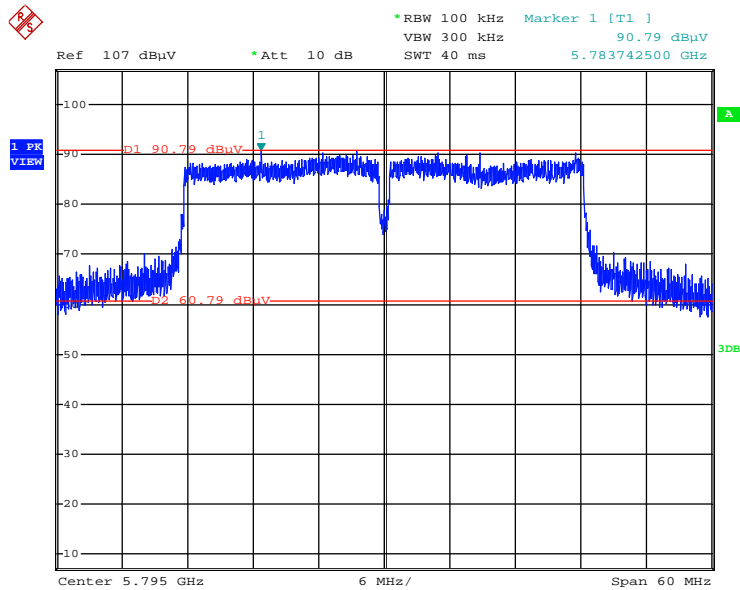


Date: 30.NOV.2013 13:54:24

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

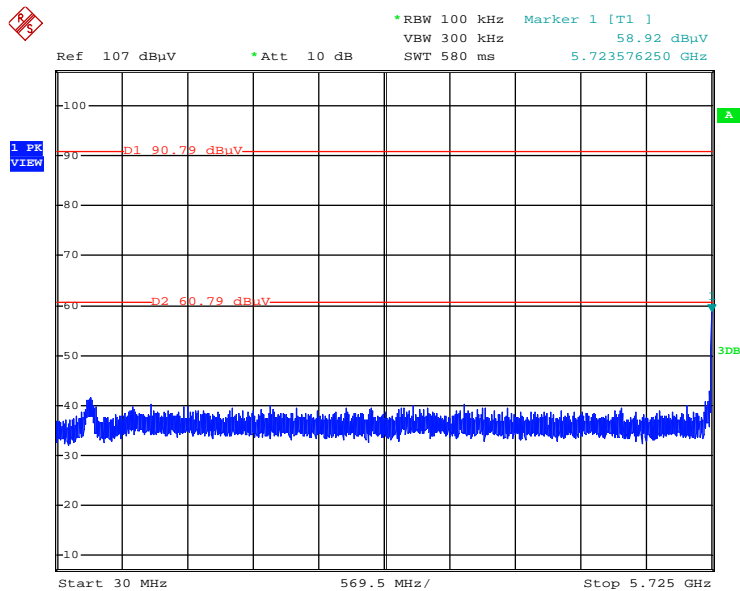


Date: 30.NOV.2013 13:58:57

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

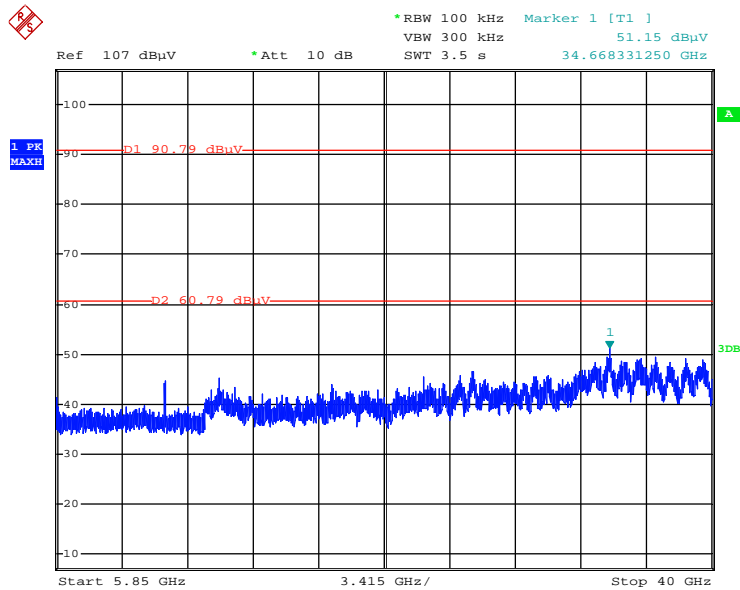


Date: 30.NOV.2013 13:58:22

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

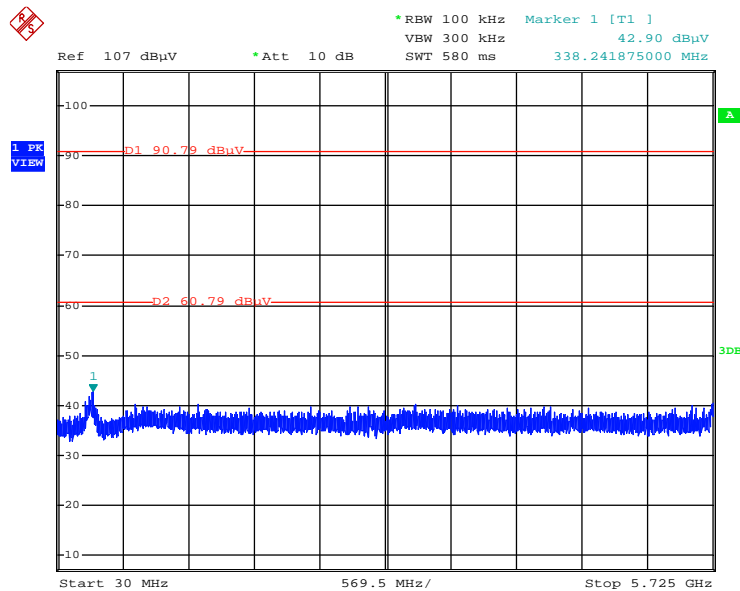


Date: 30.NOV.2013 14:00:24

Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

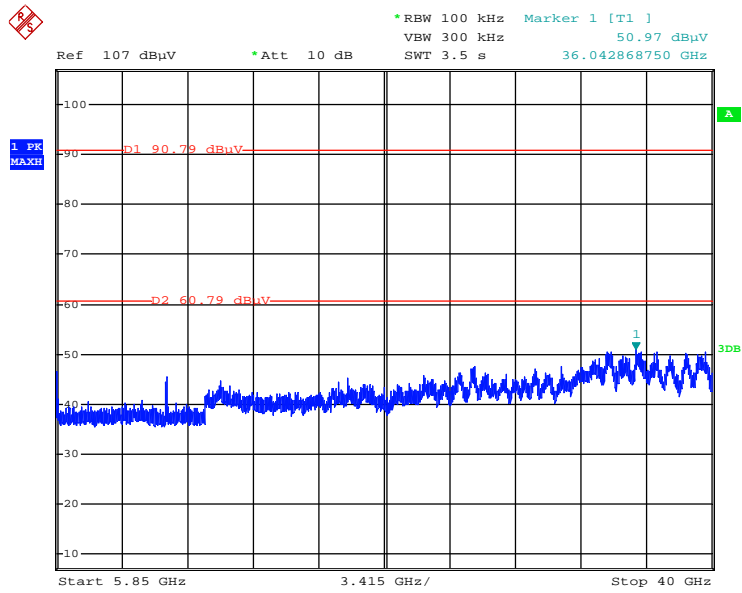


Date: 30.NOV.2013 14:01:21

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Reference Level

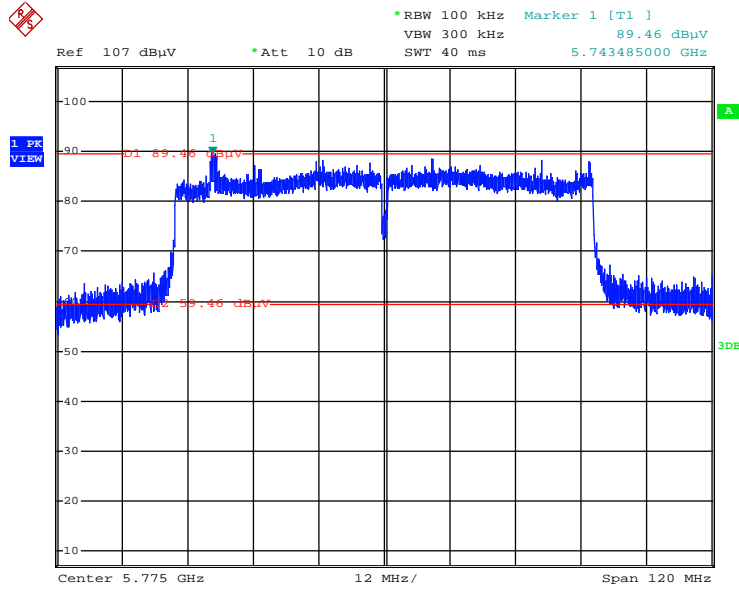


Date: 30.NOV.2013 14:06:10

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / CH 155 / 30MHz~5725MHz (down 30dBc)

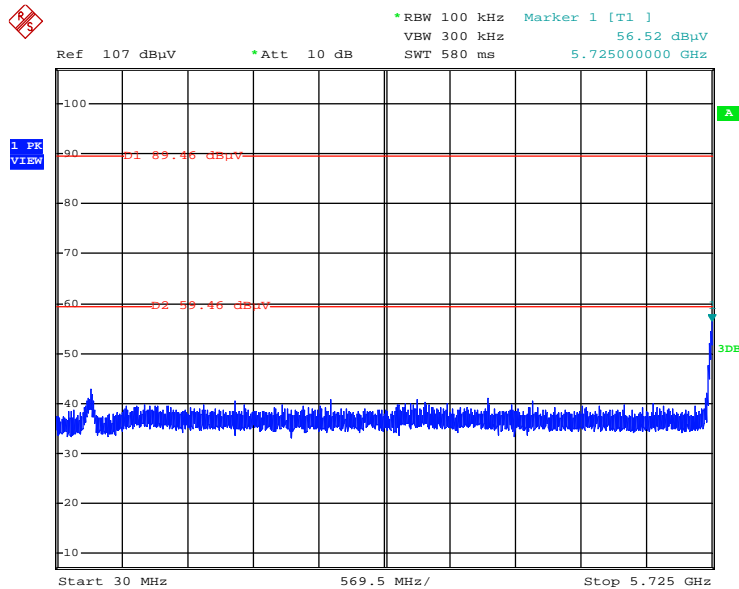

Date: 30.NOV.2013 14:08:09

Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / CH 155 / 5850MHz~40000MHz (down 30dBc)

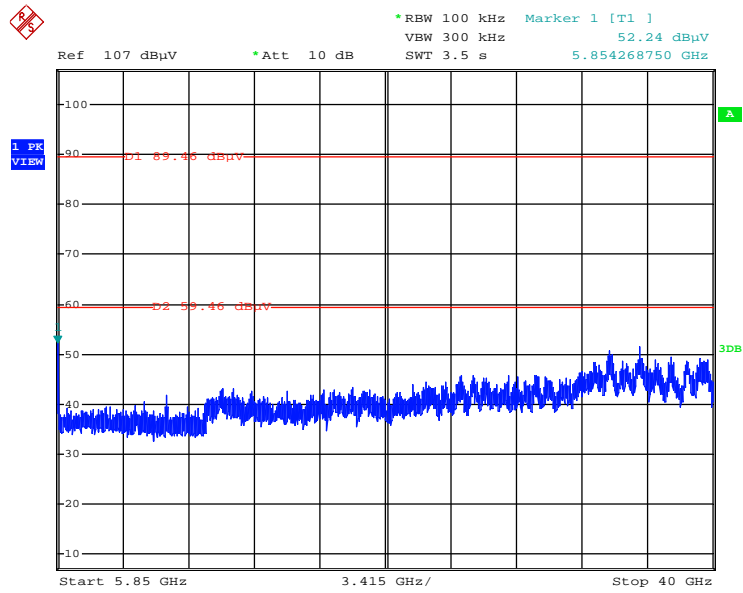

Date: 30.NOV.2013 14:08:55

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9KHz ~ 8GHz	Dec. 12, 2013	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2013	Conduction (CO02-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (O3CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (O3CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (O3CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-507	15GHz ~ 40GHz	Jan. 14, 2013	Radiation (O3CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (O3CH01-CB)
Spectrum analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Nov. 15, 2013	Radiation (O3CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (O3CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (O3CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (O3CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (O3CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (O3CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726