

RF Test Report

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Mesh Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : M95

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Jul. 02, 2024

Test Period : Jul. 05, 2024 ~ Oct. 29, 2024

Issued Date : Nov. 19, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range: 9 kHz to 325 GHz
Bade test site :
Test Firm Registration Number: 226252
Test Firm Designation Number: TW0010
Wugu test site :
Test Firm Registration Number: 191812
Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Nov. 19, 2024	Initial Issue	Snow Wang

Verification of Compliance

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Mesh Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : M95

FCC ID : KA2M95A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	7
1.4.	Test Site Environment	7
2	EUT Description	8
3	Test Methodology	17
3.1.	Mode of Operation	17
3.2.	EUT Test Step	21
3.3.	Configuration of Test System Details	22
3.4.	Test Instruments.....	23
4	Measurement Procedure	26
4.1.	AC Power Conducted Emission Measurement	26
4.2.	Transmitter Radiated Emissions Measurement.....	28
4.3.	Maximum Output Power Measurement.....	33
4.4.	Emission Bandwidth Measurement.....	35
4.5.	In-Band Emission (Mask) Measurement	37
4.6.	Frequency Stability Measurement.....	39
4.7.	Maximum Power Spectral Density Measurement.....	40
4.8.	Contention Based Protocol Measurement.....	42
4.9.	Operational restrictions for 6 GHz U-NII devices	44
4.10.	Automatically discontinue transmission.....	44
4.11.	Antenna Requirement	44
5	Test Results	46
5.1.	Conducted Emission	46
5.2.	Radiated Emission Measurement	48
5.3.	Conducted Test Results	49

Appendix A. Test Data

Appendix B. Emission Bandwidth, In-Band Emission

Appendix C. Radiated Emission

Appendix D. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Output Power	PASS	---
15.407(a)	Emission Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(b)	In-Band Emission (Mask)	PASS	---
15.407(g)	Frequency Stability	PASS	---
15.407(d)	Contention based Protocol	PASS	---
15.407(d)	Operational restrictions for 6 GHz U-NII devices	PASS	Note 2
15.407(a)	Dual Client Proper Power Adjustment	N/A	Note 3
15.407(c)	Automatically discontinue transmission	PASS	---
15.203	Antenna Requirement	PASS	---

Note 1: The above test items refer to the test standards

Note 2: Declaration by applicant

Note 3: Device associates with low power indoor AP only

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033 D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
KDB 987594 D02 v01r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure 6 GHz (U-NII) Devices Part 15, Subpart E

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency	Uncertainty	
		BD	WG
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB	2.6 dB
Conducted Output Power		1.1 dB	1.1 dB
RF Bandwidth		4.4 %	4.4 %
Power Spectral Density		1.1 dB	1.1 dB
Duty Cycle		0.3 %	0.3 %
Time Occupancy		0.2 %	0.1 %
Frequency Stability		1.2 x 10 ⁻⁷	1.2 x 10 ⁻⁷

Test Item	Frequency	Uncertainty				
		96601-BD	96603-BD	96602-WG	96603-WG	96604-WG
Radiated Emission	9 kHz ~ 30 MHz	1.8 dB	1.8 dB	1.9 dB	1.9 dB	1.9 dB
	30 MHz ~ 1000 MHz	4.7 dB	4.7 dB	4.7 dB	4.7 dB	4.5 dB
	1000 MHz ~ 18000 MHz	4.7 dB	4.8 dB	4.6 dB	4.7 dB	5.1 dB
	18000 MHz ~ 26500 MHz	4.0 dB	4.1 dB	3.9 dB	4.1 dB	4.3 dB
	26500 MHz ~ 40000 MHz	4.2 dB	4.2 dB	4.2 dB	4.2 dB	4.6 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Maximum Output Power (e.i.r.p.)).

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606		
Product Name	BE9500 Wi-Fi 7 Smart Mesh Router Wi-Fi 7 BE9500 Mesh Router		
Product Name different description	Different product name is for marketing purpose. No physical difference.		
Trade Name	D-Link		
Model No.	M95		
FCC ID	KA2M95A1		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	802.11a	U-NII Band 5	5955 – 6415
		U-NII Band 6	6435 – 6515
		U-NII Band 7	6535 – 6855
		U-NII Band 8	6875 – 7115
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20	U-NII Band 5	5955 – 6415
		U-NII Band 6	6435 – 6515
		U-NII Band 7	6535 – 6855
		U-NII Band 8	6875 – 7115
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40	U-NII Band 5	5965 – 6405
		U-NII Band 6	6445 – 6485
		U-NII Band 7	6525 – 6845
		U-NII Band 8	6885 – 7085
	802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80	U-NII Band 5	5985 – 6385
		U-NII Band 6	6465 – 6545
		U-NII Band 7	6625 – 6785
		U-NII Band 8	6865 – 7025
	802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160	U-NII Band 5	6025 – 6345
		U-NII Band 6	6505
		U-NII Band 7	6665 – 6825
		U-NII Band 8	6985
	802.11be EHT320	U-NII Band 5	6105 – 6265
		U-NII Band 5/6/7	6425
		U-NII Band 6/7	6585
		U-NII Band 7/8	6745 – 6905

Modulation Type	OFDM/OFDMA					
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)		
	ANT-0 (ANT 3)	C3859-M95-EVT1-DUAL3	Dipole Antenna	U-NII Band 5	1.66	
				U-NII Band 6	1.66	
				U-NII Band 7	2.36	
				U-NII Band 8	2.52	
	ANT-1 (ANT 4)	C3859-M95-EVT1-DUAL4	Dipole Antenna	U-NII Band 5	1.33	
				U-NII Band 6	1.91	
				U-NII Band 7	1.91	
				U-NII Band 8	2.38	
Antenna Delivery	Reference section 3.1					
Operate Temp. Range	0 ~ +40 ℃					
EUT Power Rating	12 Vdc					

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11a	U-NII Band 5	19.47	0.0885
	U-NII Band 6	19.02	0.0798
	U-NII Band 7	20.78	0.1197
	U-NII Band 8	21.30	0.1349
802.11n HT20	U-NII Band 5	19.71	0.0935
	U-NII Band 6	19.56	0.0904
	U-NII Band 7	20.59	0.1146
	U-NII Band 8	21.10	0.1288
802.11n HT40	U-NII Band 5	22.61	0.1824
	U-NII Band 6	21.75	0.1496
	U-NII Band 7	25.09	0.3228
	U-NII Band 8	26.30	0.4266
802.11ac VHT20	U-NII Band 5	19.73	0.0940
	U-NII Band 6	19.56	0.0904
	U-NII Band 7	20.63	0.1156
	U-NII Band 8	21.18	0.1312
802.11ac VHT40	U-NII Band 5	22.73	0.1875
	U-NII Band 6	21.90	0.1549
	U-NII Band 7	25.14	0.3266
	U-NII Band 8	26.31	0.4276
802.11ac VHT80	U-NII Band 5	25.11	0.3243
	U-NII Band 6	22.90	0.1950
	U-NII Band 7	28.35	0.6839
	U-NII Band 8	28.72	0.7447
802.11ac VHT160	U-NII Band 5	29.32	0.8551
	U-NII Band 6	27.29	0.5358
	U-NII Band 7	29.91	0.9795
	U-NII Band 8	28.93	0.7816

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11ax HE20	U-NII Band 5	19.95	0.0989
	U-NII Band 6	19.70	0.0933
	U-NII Band 7	20.72	0.1180
	U-NII Band 8	21.55	0.1429
802.11ax HE40	U-NII Band 5	22.66	0.1845
	U-NII Band 6	21.79	0.1510
	U-NII Band 7	25.23	0.3334
	U-NII Band 8	26.36	0.4325
802.11ax HE80	U-NII Band 5	25.24	0.3342
	U-NII Band 6	24.79	0.3013
	U-NII Band 7	28.40	0.6918
	U-NII Band 8	28.76	0.7516
802.11ax HE160	U-NII Band 5	29.40	0.8710
	U-NII Band 6	27.21	0.5260
	U-NII Band 7	29.87	0.9705
	U-NII Band 8	28.89	0.7745
802.11be EHT20	U-NII Band 5	19.98	0.0995
	U-NII Band 6	19.78	0.0951
	U-NII Band 7	20.74	0.1186
	U-NII Band 8	21.57	0.1435
802.11be EHT40	U-NII Band 5	22.85	0.1928
	U-NII Band 6	21.91	0.1552
	U-NII Band 7	25.29	0.3381
	U-NII Band 8	26.39	0.4355
802.11be EHT80	U-NII Band 5	25.26	0.3357
	U-NII Band 6	24.80	0.3020
	U-NII Band 7	29.02	0.7980
	U-NII Band 8	28.80	0.7586
802.11be EHT160	U-NII Band 5	29.41	0.8730
	U-NII Band 6	27.10	0.5129
	U-NII Band 7	29.32	0.8551
	U-NII Band 8	27.98	0.6281
802.11be EHT320	U-NII Band 5	29.48	0.8872
	U-NII Band 5/6/7	28.22	0.6637
	U-NII Band 6/7	29.30	0.8511
	U-NII Band 7/8	28.93	0.7816

Beamforming on

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11n HT20	U-NII Band 5	19.48	0.0887
	U-NII Band 6	19.31	0.0853
	U-NII Band 7	20.33	0.1079
	U-NII Band 8	20.85	0.1216
802.11n HT40	U-NII Band 5	22.37	0.1726
	U-NII Band 6	21.57	0.1435
	U-NII Band 7	24.89	0.3083
	U-NII Band 8	26.10	0.4074
802.11ac VHT20	U-NII Band 5	19.50	0.0891
	U-NII Band 6	19.33	0.0857
	U-NII Band 7	20.39	0.1094
	U-NII Band 8	20.95	0.1245
802.11ac VHT40	U-NII Band 5	22.52	0.1786
	U-NII Band 6	21.69	0.1476
	U-NII Band 7	24.91	0.3097
	U-NII Band 8	26.15	0.4121
802.11ac VHT80	U-NII Band 5	24.95	0.3126
	U-NII Band 6	22.68	0.1854
	U-NII Band 7	28.17	0.6561
	U-NII Band 8	28.46	0.7015
802.11ac VHT160	U-NII Band 5	29.10	0.8128
	U-NII Band 6	27.06	0.5082
	U-NII Band 7	29.75	0.9441
	U-NII Band 8	29.33	0.8570

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11ax HE20	U-NII Band 5	19.79	0.0953
	U-NII Band 6	19.51	0.0893
	U-NII Band 7	20.48	0.1117
	U-NII Band 8	21.32	0.1355
802.11ax HE40	U-NII Band 5	22.50	0.1778
	U-NII Band 6	21.58	0.1439
	U-NII Band 7	25.03	0.3184
	U-NII Band 8	26.14	0.4111
802.11ax HE80	U-NII Band 5	25.07	0.3214
	U-NII Band 6	24.59	0.2877
	U-NII Band 7	28.19	0.6592
	U-NII Band 8	28.56	0.7178
802.11ax HE160	U-NII Band 5	29.19	0.8299
	U-NII Band 6	27.02	0.5035
	U-NII Band 7	29.61	0.9141
	U-NII Band 8	29.26	0.8433
802.11be EHT20	U-NII Band 5	19.83	0.0962
	U-NII Band 6	19.55	0.0902
	U-NII Band 7	20.58	0.1143
	U-NII Band 8	21.36	0.1368
802.11be EHT40	U-NII Band 5	22.64	0.1837
	U-NII Band 6	21.80	0.1514
	U-NII Band 7	25.14	0.3266
	U-NII Band 8	26.12	0.4093
802.11be EHT80	U-NII Band 5	25.12	0.3251
	U-NII Band 6	24.57	0.2864
	U-NII Band 7	28.86	0.7691
	U-NII Band 8	28.64	0.7311
802.11be EHT160	U-NII Band 5	29.24	0.8395
	U-NII Band 6	27.18	0.5224
	U-NII Band 7	29.79	0.9528
	U-NII Band 8	29.56	0.9036
802.11be EHT320	U-NII Band 5	28.72	0.7447
	U-NII Band 5/6/7	28.03	0.6353
	U-NII Band 6/7	29.08	0.8091
	U-NII Band 7/8	28.71	0.7430

Equipment Type	
Indoor access point	V
Subordinate device	V
Indoor Client devices	---

UNII-5

BW 20M	CH	1	5	9	13	17	21	25	29
	Freq.(MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	CH	3		11		19		27	
	Freq.(MHz)	5965		6005		6045		6085	
BW 80M	CH	7				23			
	Freq.(MHz)	5985				6065			
BW 160M	CH	15							
	Freq.(MHz)	6025							

BW 20M	CH	33	37	41	45	49	53	57	61
	Freq.(MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	CH	35		43		51		59	
	Freq.(MHz)	6125		6165		6205		6245	
BW 80M	CH	39				55			
	Freq.(MHz)	6145				6225			
BW 160M	CH	47							
	Freq.(MHz)	6185							
BW 320M	CH	31							
	Freq.(MHz)	6105							

BW 20M	CH	65	69	73	77	81	85	89	93
	Freq.(MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	CH	67		75		83		91	
	Freq.(MHz)	6285		6325		6365		6405	
BW 80M	CH	71				87			
	Freq.(MHz)	6305				6385			
BW 160M	CH	79							
	Freq.(MHz)	6345							
BW 320M	CH	63							
	Freq.(MHz)	6265							

UNII-5/6/7

BW 320M	CH	95
	Freq.(MHz)	6425

UNII-6/7

BW 20M	CH	97	101	105	109	113	117	121	125
	Freq.(MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	CH	99		107		115		123	
	Freq.(MHz)	6445		6485		6525		6565	
BW 80M	CH	103				119			
	Freq.(MHz)	6465				6545			
BW 160M	CH	111							
	Freq.(MHz)	6505							
BW 320M	CH	127							
	Freq.(MHz)	6585							

UNII-7

BW 20M	CH	129	133	137	141	145	149	153	157
	Freq.(MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	CH	131		139		147		155	
	Freq.(MHz)	6605		6645		6685		6725	
BW 80M	CH	135				151			
	Freq.(MHz)	6625				6705			
BW 160M	CH	143							
	Freq.(MHz)	6665							

UNII-7/8

BW 20M	CH	161	165	169	173	177	181	185	189
	Freq.(MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	CH	163		171		179		187	
	Freq.(MHz)	6765		6805		6845		6885	
BW 80M	CH	167				183			
	Freq.(MHz)	6785				6865			
BW 160M	CH	175							
	Freq.(MHz)	6825							
BW 320M	CH	159							
	Freq.(MHz)	6745							
	CH	191							
	Freq.(MHz)	6905							

UNII-8

BW 20M	CH	193	197	201	205	209	213	217	221
	Freq.(MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	CH	195		203		211		219	
	Freq.(MHz)	6925		6965		7005		7045	
BW 80M	CH	199				215			
	Freq.(MHz)	6945				7025			
BW 160M	CH	207							
	Freq.(MHz)	6985							

BW 20M	CH	225	229
	Freq.(MHz)	7075	7095
BW 40M	CH	227	
	Freq.(MHz)	7085	

BW 20M	CH	233							
	Freq.(MHz)	7115							

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11a	V
802.11n HT20	---
802.11n HT40	---
802.11ac VHT20	---
802.11ac VHT40	---
802.11ac VHT80	---
802.11ac VHT160	---
802.11ax HE20	---
802.11ax HE40	---
802.11ax HE80	---
802.11ax HE160	---
802.11be EHT20	V
802.11be EHT40	V
802.11be EHT80	V
802.11be EHT160	V
802.11be EHT320	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: This product supports normal mode and Beamforming on mode. According to power table, the normal mode is worst power. So, normal mode has to test and record results for Conducted.

Note 2: Investigation has been done on all the possible configurations for searching the worst cases (EHT20/EHT40 covers HE20/HE40/HT20/HT40/VHT20/VHT40). The table is a list of the test modes show in this test report.

Note 3: 802.11 be / 802.11 ax only support full RU.

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11a	V	V	V
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11ac VHT20	V	V	V
802.11ac VHT40	V	V	V
802.11ac VHT80	V	V	V
802.11ac VHT160	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V
802.11ax HE160	V	V	V
802.11be EHT20	V	V	V
802.11be EHT40	V	V	V
802.11be EHT80	V	V	V
802.11be EHT160	V	V	V
802.11be EHT320	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11a	2TX (CDD)	6	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 233
802.11n HT20	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 233
802.11n HT40	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11ac VHT20	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 233
802.11ac VHT40	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11ac VHT80	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103, 119
			U-NII Band 7	135, 151, 167
			U-NII Band 8	183, 199, 215
802.11ac VHT160	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	15, 47, 79
			U-NII Band 6	111
			U-NII Band 7	143, 175
			U-NII Band 8	207

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11ax HE20	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 233
802.11ax HE40	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11ax HE80	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103, 119
			U-NII Band 7	135, 151, 167
			U-NII Band 8	183, 199, 215
802.11ax HE160	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	15, 47, 79
			U-NII Band 6	111
			U-NII Band 7	143, 175
			U-NII Band 8	207
802.11be EHT20	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 233
802.11be EHT40	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11be EHT80	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103, 119
			U-NII Band 7	135, 151, 167
			U-NII Band 8	183, 199, 215
802.11be EHT160	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	15, 47, 79
			U-NII Band 6	111
			U-NII Band 7	143, 175
			U-NII Band 8	207
802.11be EHT320	2TX (MIMO/Beamforming on)	MCS0	U-NII Band 5	31,63
			U-NII Band 5/6/7	95
			U-NII Band 6/7	127
			U-NII Band 7/8	159, 191


3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details

Radiated Emissions (Above 1 GHz)

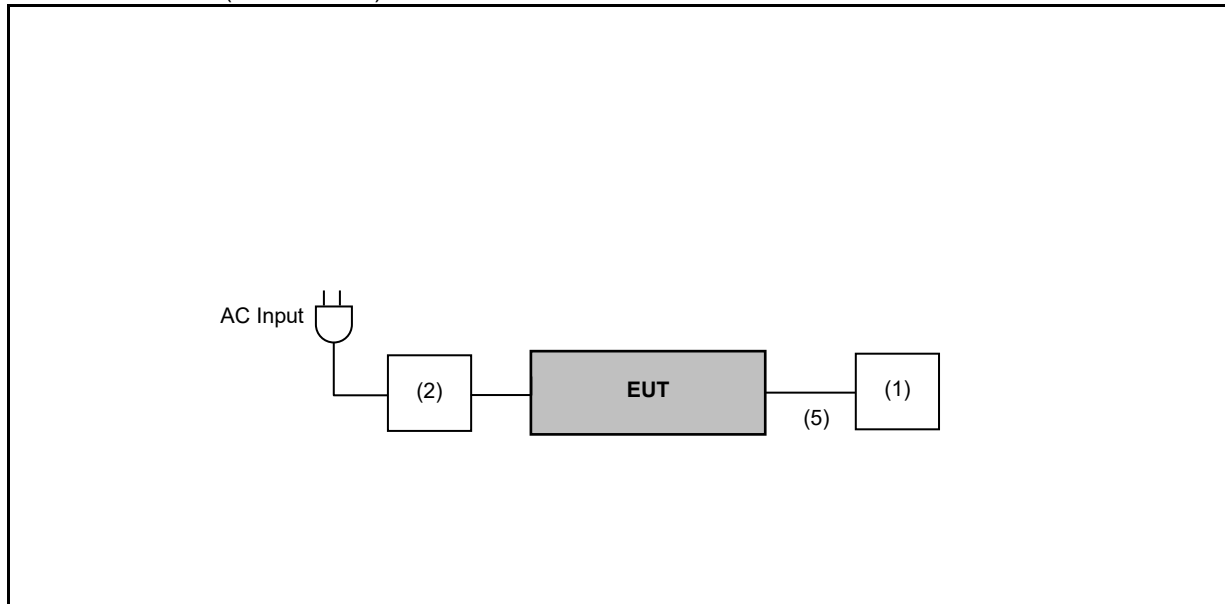

Conduction Emission & Radiated Emissions (Below 1 GHz)

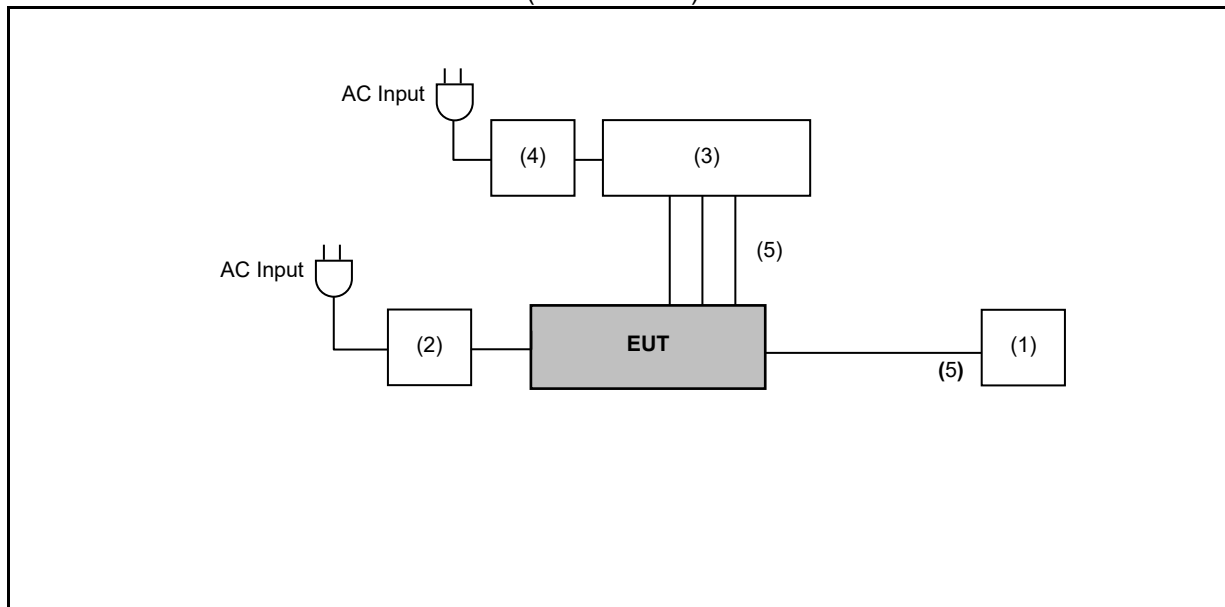

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	ASUS	P1448U	K7NXCVC10P85229A	---
(2)	EUT Adapter	APD	WA-36N12R	---	---
(3)	Switch	Edimax	GS-1005BE	---	---
(4)	Switch Adapter	APD	WA-12M12R	---	---
(5)	Lan Cable	i-gota	Cat 6A 3M	---	---

3.4. Test Instruments

For Conducted

Test Period: Oct. 14 , 2024 ~ Oct. 21 , 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2023	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

For Conducted

Test Period: Jul. 29 ,2024 ~ Oct. 29, 2024

Testing Engineer: Sandy Yang

Test Site		RF03-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2023	1 year
☒	Power Sensor	Anritsu	MA24418A	12662	Dec. 01, 2023	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Jul. 5 ~ Aug. 12, 2024

Testing Engineer: Jason Yeh, Oren Wu

Radiation test sites		Semi Anechoic Room 96603-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	LOOP Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	00031	Feb. 23, 2024	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	1276	Feb. 02, 2024	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	RF SPIN	DRH18-E	210307A18ES	Dec. 15, 2023	1 year
☒	Broadband Horn Antenna (15 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	BBHA9170	1133	Jan. 18, 2024	1 year
☒	Spectrum Analyzer (2 Hz~50 GHz)	KEYSIGHT	N9030B	MY57153537	Apr. 21, 2024	1 year
☒	Pre-Amplifier	EMCI	EMC001330	980859	Nov. 29, 2023	1 year
☒	Pre-Amplifier	EMCI	EMC118A45SE	980818	Dec. 15, 2023	1 year
☒	Pre-Amplifier	EMCI	EMC184045SE	980861	Dec. 21, 2023	1 year
☒	Coaxial Cable (10 kHz~3000 MHz)	EMCI	EMCCFD400-NM- NM-2000	211009	Dec. 28, 2023	1 year
☒	Coaxial Cable (10 kHz~3000 MHz)	EMCI	EMCCFD400-NM- NM-2000	211010	Dec. 28, 2023	1 year
☒	Coaxial Cable (10 kHz~3000 MHz)	EMCI	EMCCFD400-NM- NM-6000	211018	Dec. 28, 2023	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM- 1000	211029	Dec. 28, 2023	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM- 2000	211033	Dec. 28, 2023	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM- 8000	211038	Dec. 28, 2023	1 year
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM- KM-600	211211	Dec. 28, 2023	1 year

Note: N.C.R. = No Calibration Request

For Radiated Emissions

Test Period: Jul. 5 ~ Aug. 12, 2024

Testing Engineer: Jason Yeh, Oren Wu

Radiation test sites		Semi Anechoic Room 96603-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM-KM-2000	211210	Dec. 28, 2023	1 year
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM-KM-6000	211209	Dec. 28, 2023	1 year
☒	Highpass Filter	Warison	WFIL-H3000-20000F	WR4BBFWC2B1	Nov. 13, 2023	1 year
☒	Highpass Filter	Warison	WFIL-H8000-26000F	001	Nov. 13, 2023	1 year
☒	Software	R_RAM	V1.3	N/A	N.C.R.	---

For Conduction Emissions

Test Period: Aug. 12, 2024

Testing Engineer: Jason Yeh

Radiation test sites		Conducted Emission Measurement Conduction01-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESR3	102919	Dec. 30, 2023	1 year
☒	LISN	R&S	ENV216	101041	Mar. 21, 2024	1 year
☒	Current Probe	R&S	EZ-17	101687	Jun. 15, 2024	1 year
☒	Cable	EMCI	EMCCFD300-BM-NM-4000	220402	Jun. 12, 2024	1 year
☒	Software	ELEKTRA	94.50.4	N.A.	N.C.R.	N.C.R.

Note: N.C.R. = No Calibration Request


4 Measurement Procedure

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

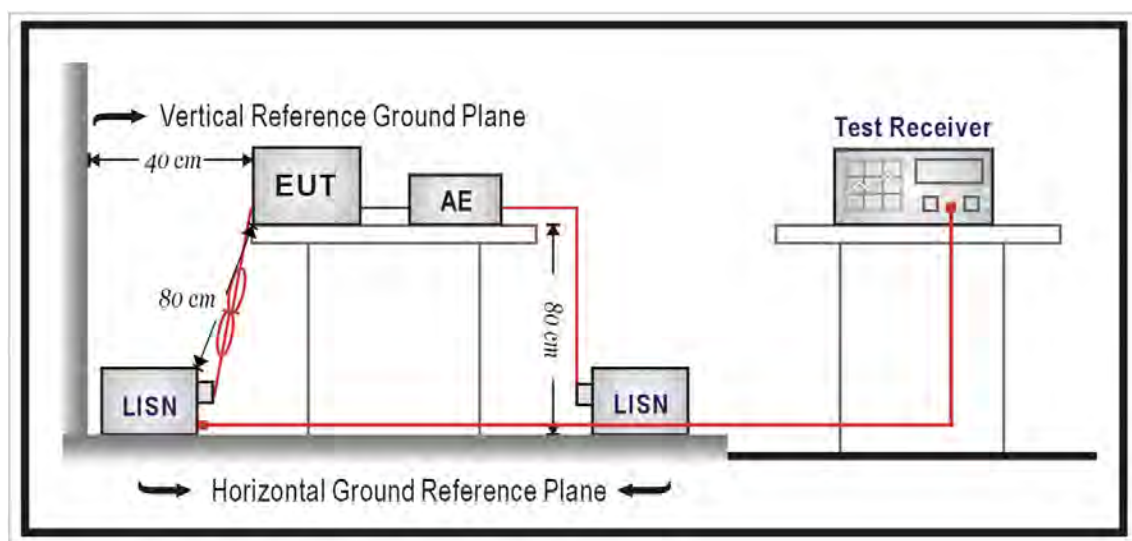

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

4.2. Transmitter Radiated Emissions Measurement

■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the band 5925~6425 MHz, 6425~6525 MHz, 6525~6875 MHz and 6875~7125 MHz all emissions outside the band 5925~7125 MHz shall not exceed -27 dBm/MHz E.I.R.P..

E.I.R.P. (dBm/MHz)	Avg Field Strength at 3 m(dBuV/m)
-7 (Peak)	88.2 (Peak)
-27 (AVG)	68.2 (AVG)

(2)Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


- Note:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

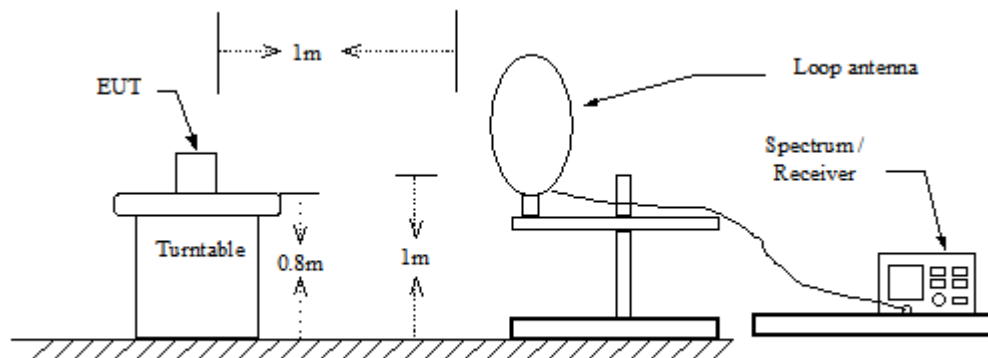

30 MHz ~ 1 GHz

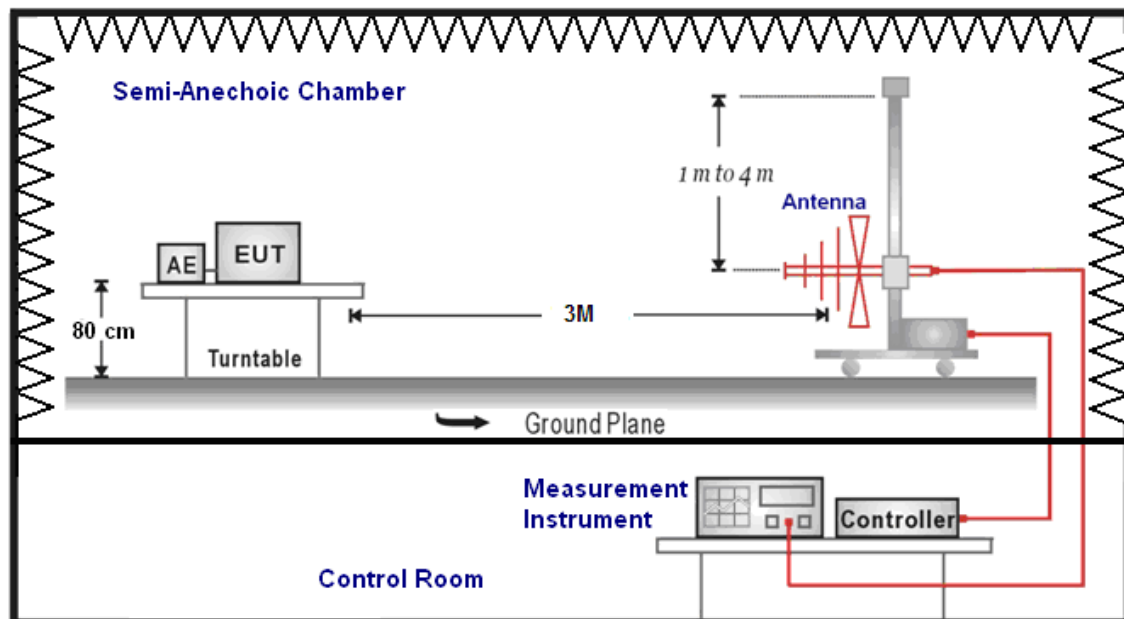

Above 1 GHz

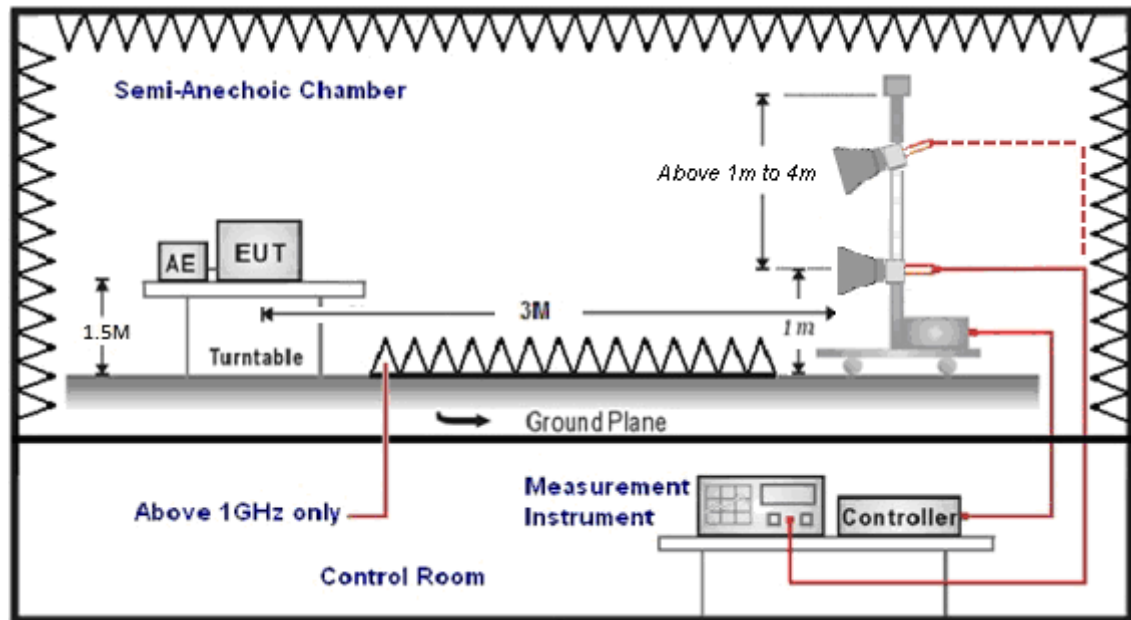

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB/m), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

- (1) Amplitude (dBuV/m) = FI (dBuV) +AF (dB/m) +CL (dB)
- FI= Reading of the field intensity.
- AF= Antenna factor.
- CL= Cable loss.
- P.S Amplitude is auto calculate in spectrum analyzer.

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average (Only WLAN 6G)


4.3. Maximum Output Power Measurement

■ Limit

Frequency Range (GHz)	Maximum Output Power Limit
5.925 ~ 6.425	For standard power access point and fixed client device : e.i.r.p. $\leq$ 36dBm, For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
	For indoor access point : e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of a standard power access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
6.425 ~ 6.525	For indoor access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
6.525 ~ 6.875	For standard power access point and fixed client device : e.i.r.p. $\leq$ 36dBm, For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
	For indoor access point : e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of a standard power access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
6.875 ~ 7.125	For indoor access point : e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.

For Radiation Method

■ Test Setup

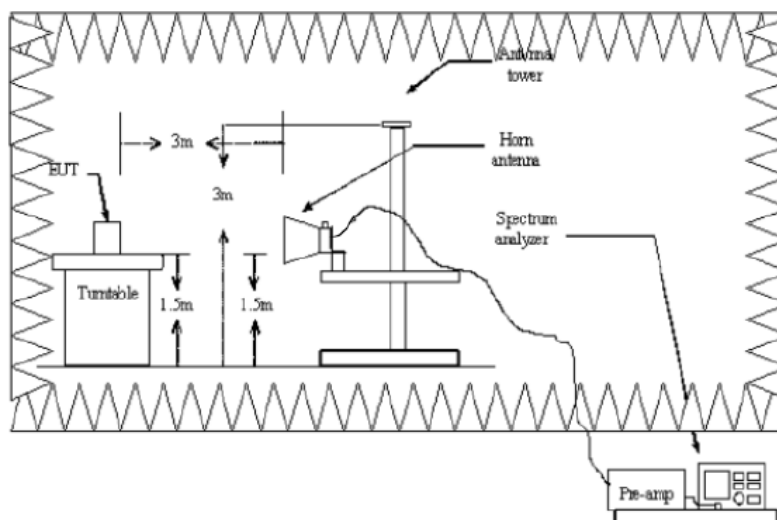

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices.

Accordance with ANSI C63.10:2013 section 12.1.2 use radiated compliance measurements.


1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a antenna tower.
3. The height of antenna is fixed 1.5 meter , Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. Perform a EIRP level measurement and record the worse read value, is the EIRP level value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.

4.4. Emission Bandwidth Measurement

■ Limit

≤ 320 MHz

■ Test Setup

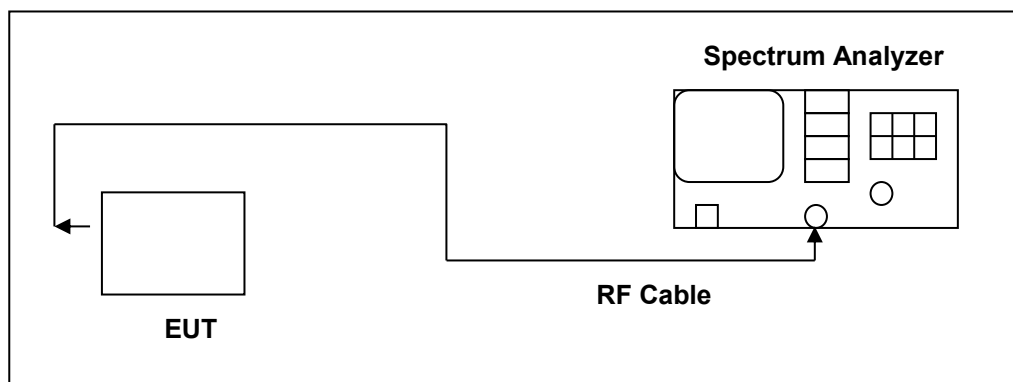

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.4 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

For 26 dB Bandwidth:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Bandwidth:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5 times and 5.0 times the OBW
RBW	Approximately 1 % ~ 5 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.5. In-Band Emission (Mask) Measurement

■ Limit

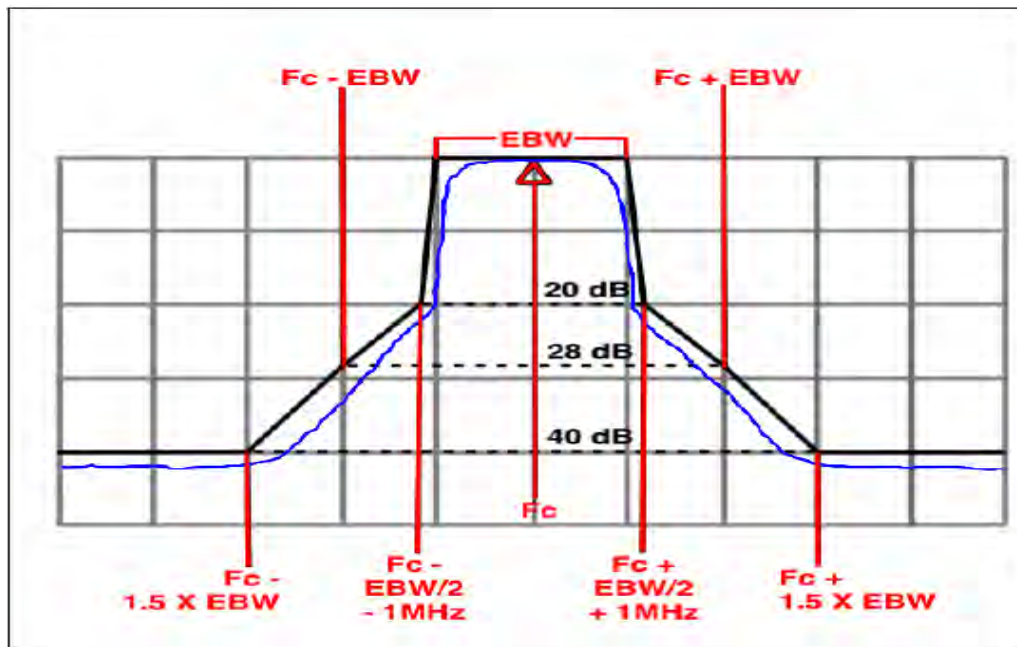

■ Test Setup

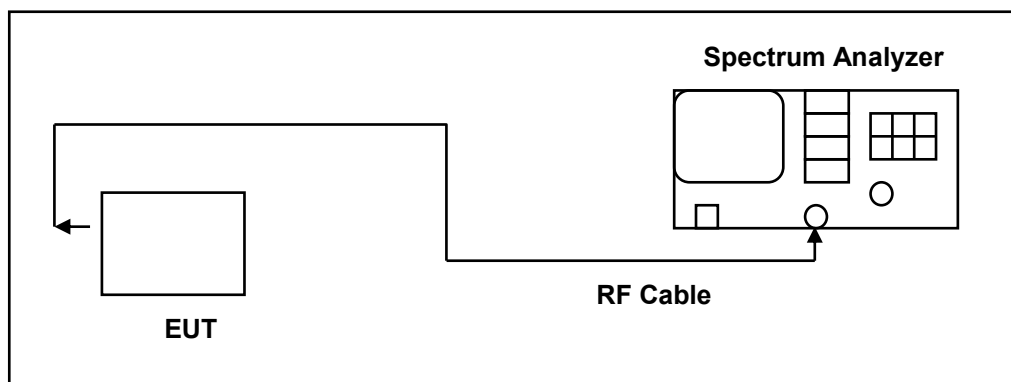

■ Test Procedure


1. Connect output of the antenna port to a spectrum analyzer.
2. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013.
3. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
4. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
5. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
6. Adjust the span to encompass the entire mask as necessary.
7. Clear trace.
8. Trace average at least 100 traces in power averaging (rms) mode.
9. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

4.6. Frequency Stability Measurement

■ Limit

The carrier frequency remains within the operating frequency band.

■ Test Setup

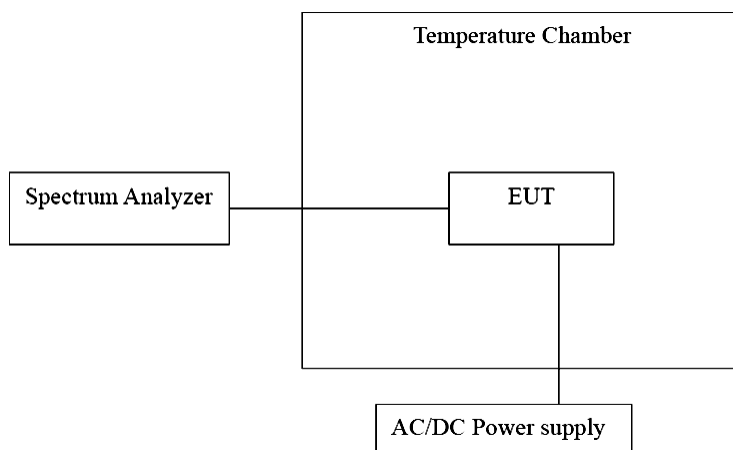

■ Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. Turn the on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Repeat step 4 with the temperature chamber set to the lower the chamber temperature by not more that 10 °C, and allow the temperature inside the chamber to stabilize.
6. The test chamber was allowed to stabilize at +20°C for a minimum of 30 minutes. The supply voltage was then adjusted of the EUT form 85% (or end point) to 115% and the frequency record.


4.7. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (GHz)	Maximum Power Spectral Density Limit
5.925 ~ 6.425	For standard power access point and fixed client device : e.i.r.p. PSD ≤ 23 dBm/MHz.
	For indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of a standard power access point : e.i.r.p. PSD ≤ 17 dBm/MHz.
	For client device control of an indoor access point : e.i.r.p. PSD ≤ -1 dBm/MHz.
6.425 ~ 6.525	For indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of an indoor access point : e.i.r.p. PSD ≤ -1 dBm/MHz.
6.525 ~ 6.875	For standard power access point and fixed client device : e.i.r.p. PSD ≤ 23 dBm/MHz.
	For indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of a standard power access point : e.i.r.p. PSD ≤ 17 dBm/MHz.
	For client device control of an indoor access point : e.i.r.p. PSD ≤ -1 dBm/MHz.
6.875 ~ 7.125	For indoor access point : e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of an indoor access point : e.i.r.p. PSD ≤ -1 dBm/MHz.

For Radiation Method

■ Test Setup

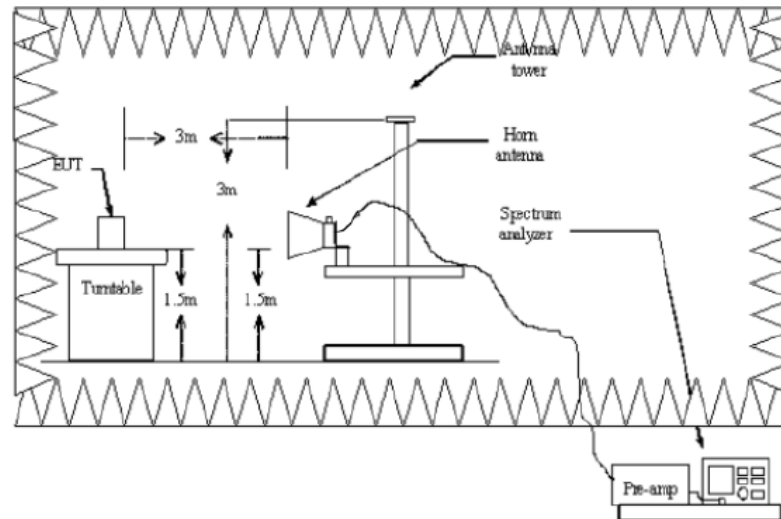

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Accordance with ANSI C63.10:2013 section 12.1.2 use radiated compliance measurements.

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a antenna tower.
3. The height of antenna is fixed 1.5 meter , Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. Perform a EIRP level measurement and record the worse read value, is the EIRP level value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.8. Contention Based Protocol Measurement


■ Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

■ Test Setup

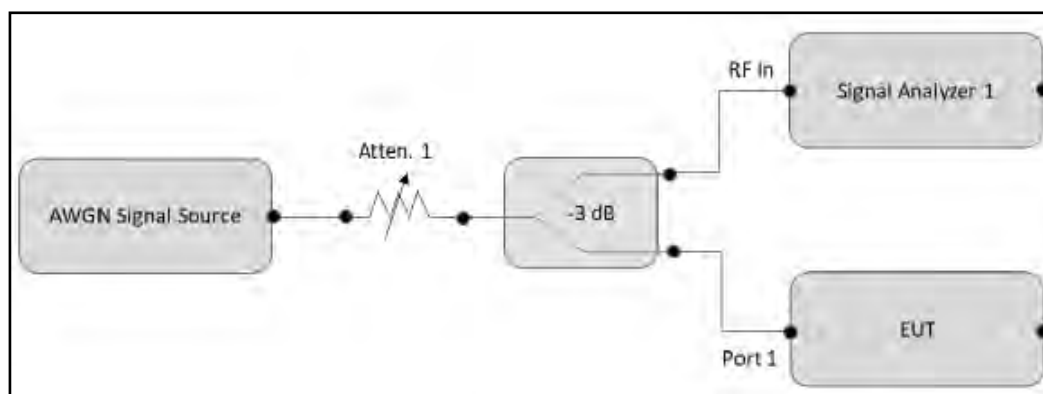

■ Test Procedure

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
5. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB divider, to the signal analyzer 1 and the EUT as shown in Test Setup.
6. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
7. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
8. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
9. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 4, choose a different center frequency for the AWGN signal and repeat the process.

4.9. Operational restrictions for 6 GHz U-NII devices

■ Limits

In the 5.925-7.125 GHz band, client devices, except fixed client devices, must operate under the control of a standard power access point, indoor access point or subordinate devices; Subordinate devices must operate under the control of an indoor access point.

■ Declare

Device is an indoor client device under the control of a low power indoor access point. Please refer to the declaration letter exhibit supplied within this application.

4.10. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

4.11. Antenna Requirement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.

■ Directional Gain Calculated


Test mode	Band	Transmission Type	Antenna				Directional Gain	Directional Gain	Power	PSD
							for	for	Limit	Limit
			Ant-0	Ant-1	Ant-2	Ant-3	Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
802.11a	Band 5	CDD	1.66	1.33			4.51	4.51	0.00	0.00
	Band 6		1.66	1.91			4.80	4.80	0.00	0.00
	Band 7		2.36	1.91			5.15	5.15	0.00	0.00
	Band 8		2.52	2.38			5.46	5.46	0.00	0.00
802.11n HT20 802.11n HT40 802.11ac VHT20 802.11ac VHT40 802.11ac VHT80 802.11ac VHT160 802.11ax HE20 802.11ax HE40 802.11ax HE80 802.11ax HE160 802.11be EHT20 802.11be EHT40 802.11be EHT80 802.11be EHT160 802.11be EHT320	Band 5	MIMO/Beam forming	1.66	1.33			4.51	4.51	0.00	0.00
Band 6	1.66		1.91			4.80	4.80	0.00	0.00	
Band 7	2.36		1.91			5.15	5.15	0.00	0.00	
Band 8	2.52		2.38			5.46	5.46	0.00	0.00	

If transmit signals are correlated, then Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit mode		
Description:			

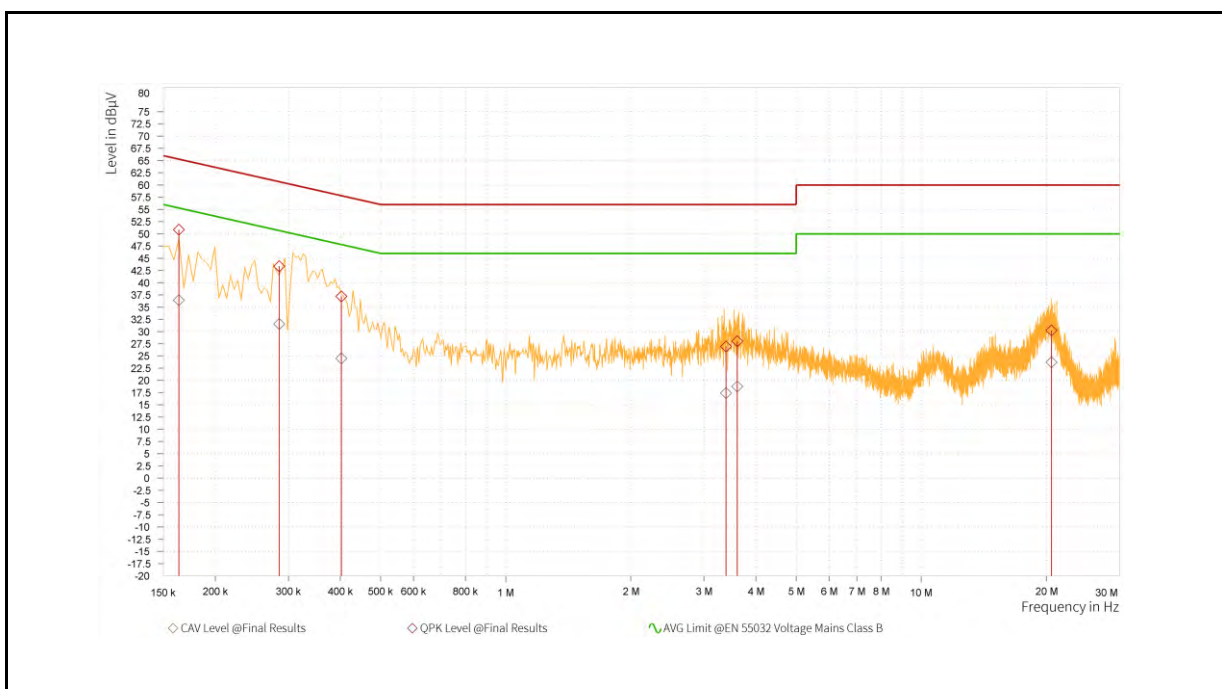

Rg	Frequency [MHz]	QP Result [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Result [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Correction factor [dB]	Line
1	0.164	50.88	65.28	14.41	36.43	55.28	18.86	9.61	L1
1	0.285	43.37	60.67	17.30	31.55	50.67	19.12	9.61	L1
1	0.402	37.19	57.81	20.62	24.50	47.81	23.31	9.62	L1
1	3.390	26.95	56.00	29.05	17.41	46.00	28.59	9.70	L1
1	3.606	28.03	56.00	27.97	18.78	46.00	27.22	9.70	L1
1	20.571	30.24	60.00	29.76	23.69	50.00	26.31	9.88	L1

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit mode		
Description:			



Rg	Frequency [MHz]	QP Result [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Result [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Correction factor [dB]	Line
1	0.159	51.33	65.52	14.19	37.00	55.52	18.52	9.59	N
1	0.290	40.63	60.54	19.91	28.27	50.54	22.27	9.59	N
1	0.447	29.51	56.93	27.42	18.78	46.93	28.15	9.60	N
1	3.534	28.48	56.00	27.52	18.79	46.00	27.21	9.70	N
1	3.606	28.33	56.00	27.67	18.45	46.00	27.55	9.70	N
1	20.166	29.24	60.00	30.76	23.10	50.00	26.90	10.03	N

5.2. Radiated Emission Measurement

Reference Appendix C

5.3. Conducted Test Results

5.3.1. Duty cycle

Duty cycle

Reference Appendix A

Duty Cycle Graphs




802.11n HT40

On+off time



802.11ac VHT20

On+off time

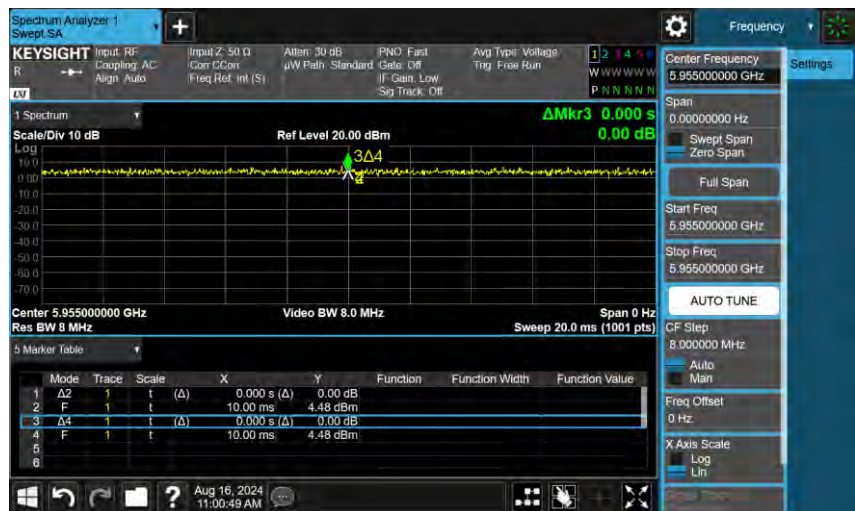


802.11ac VHT40

On+off time



802.11ac VHT80

On+off time

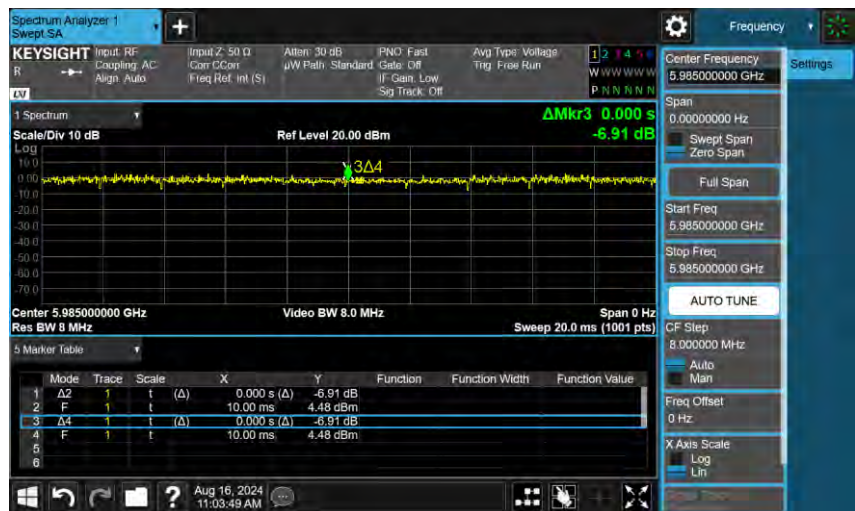


802.11ac VHT160

On+off time



802.11ax HE20

On+off time

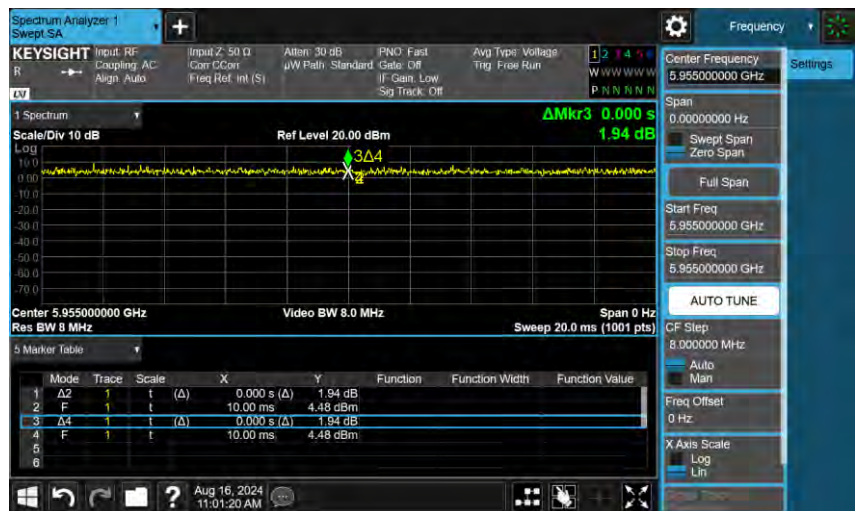


802.11ax HE40

On+off time



802.11ax HE80

On+off time

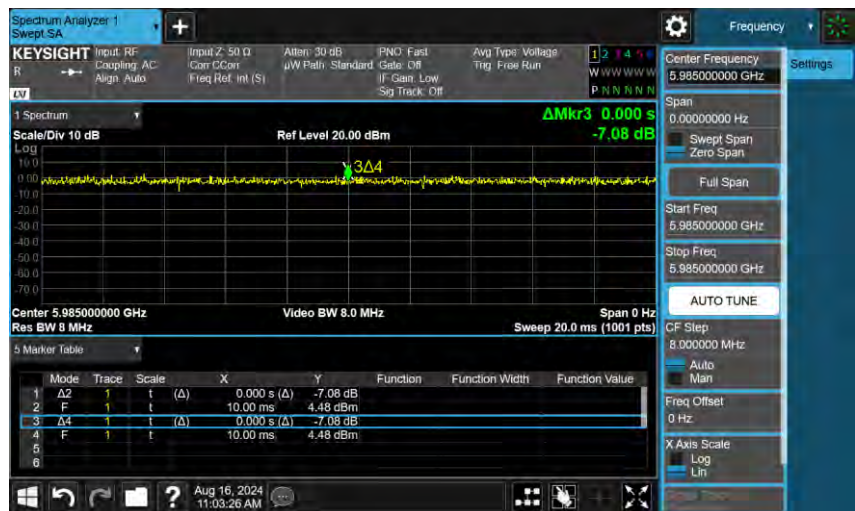


802.11ax HE160

On+off time



802.11be EHT20

On+off time

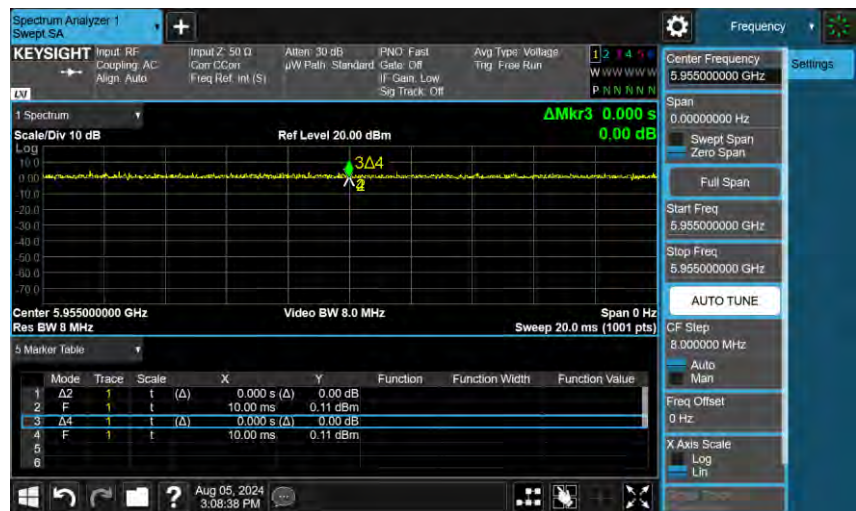


802.11be EHT40

On+off time




802.11be EHT80

On+off time

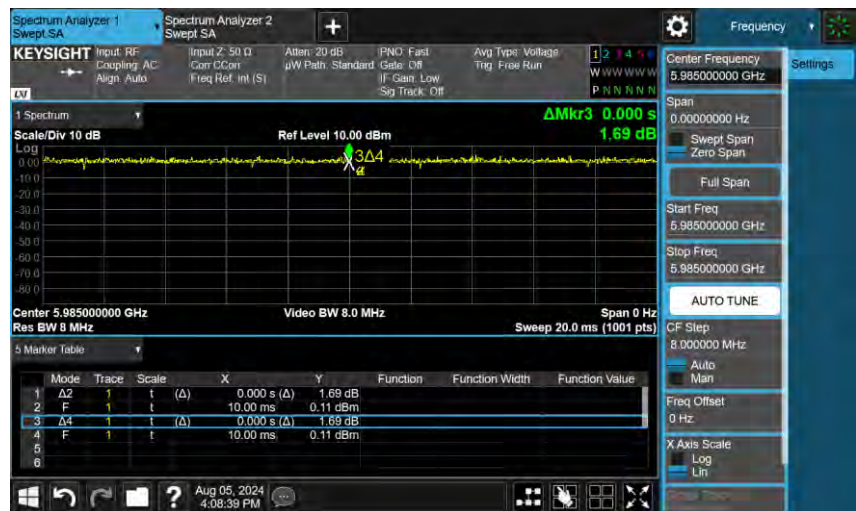


802.11be EHT160

On+off time

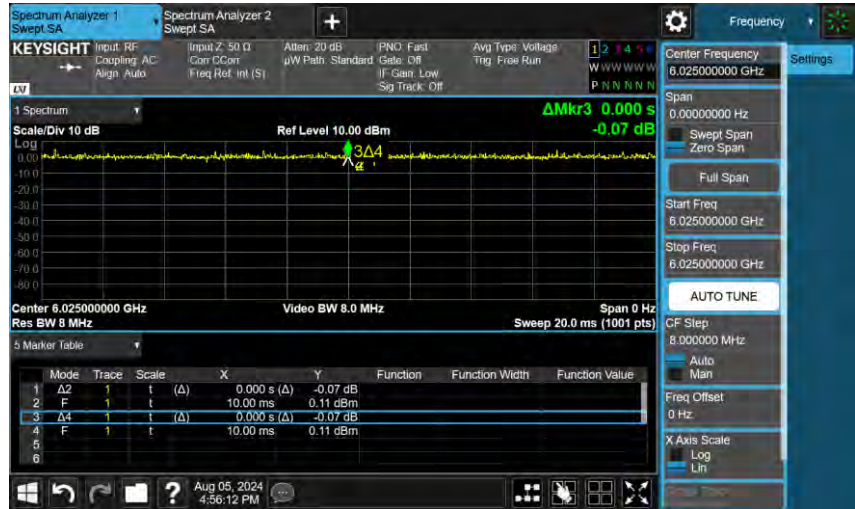

802.11be EHT320

On+off time

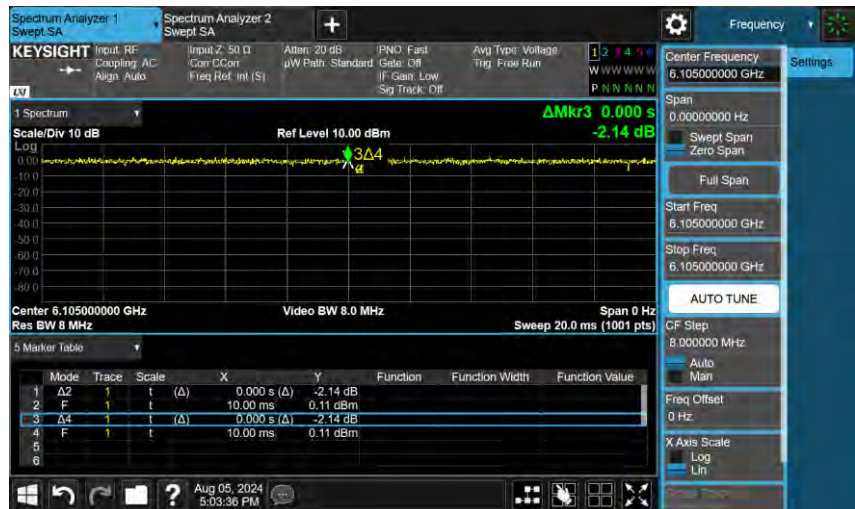

5.3.2. Maximum Output Power Measurement

Reference Appendix A


5.3.3. Emission Bandwidth Measurement

Reference Appendix B

5.3.4. Maximum Power Spectral Density Measurement


Reference Appendix A

■ Test Graphs

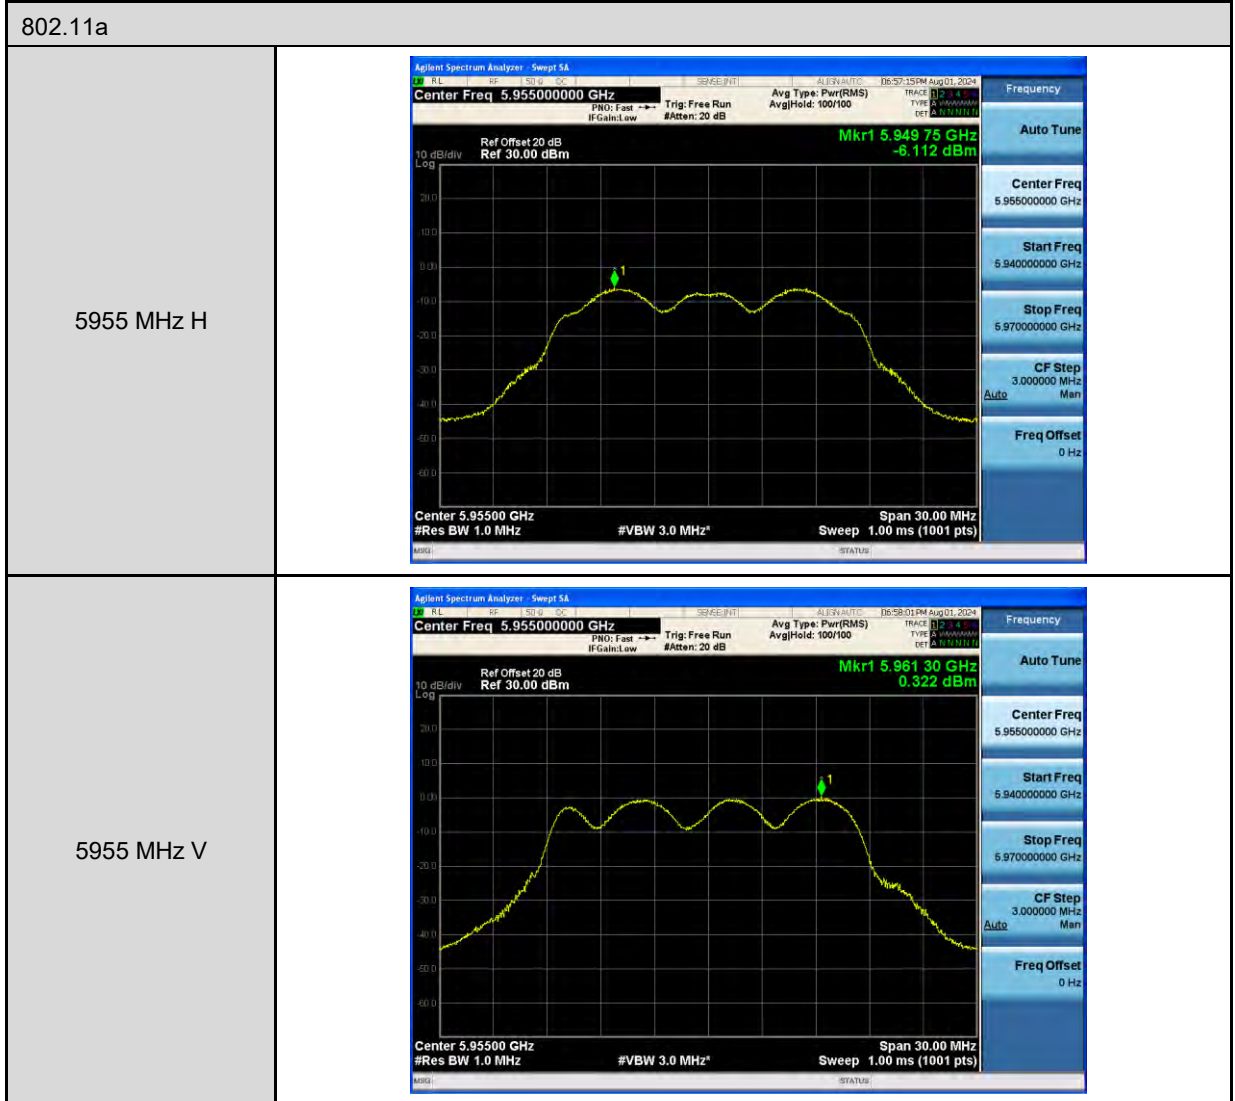


802.11a

6175 MHz H

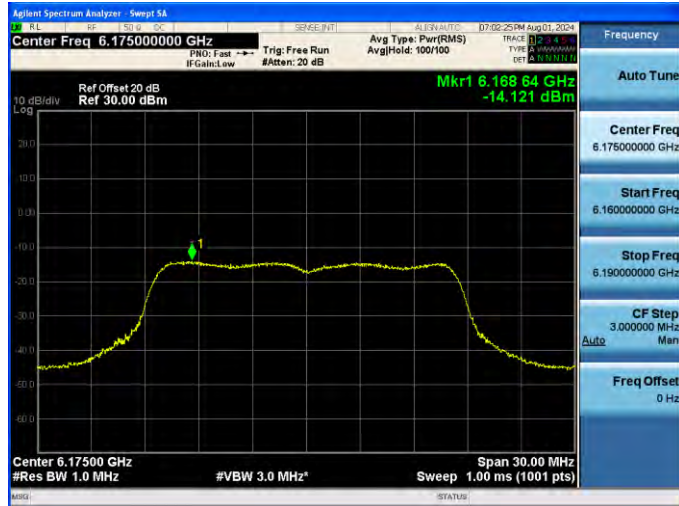


6175 MHz V

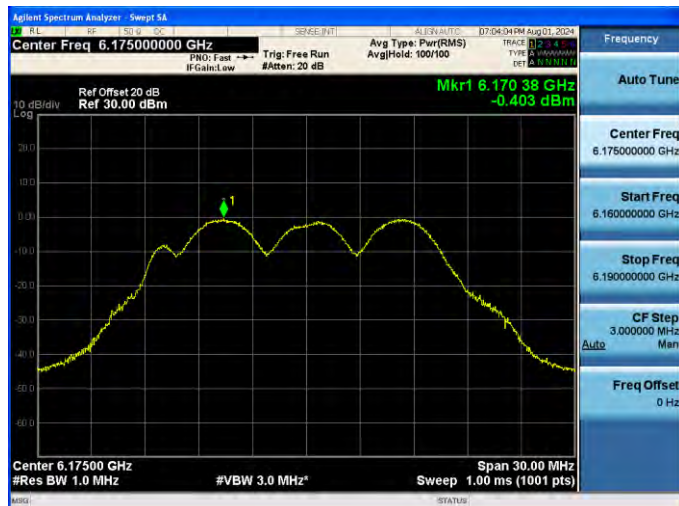



802.11a

6415 MHz H

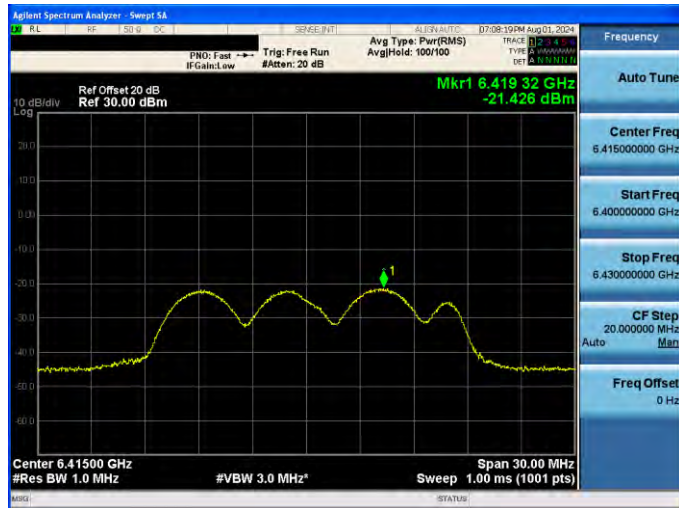


6415 MHz V

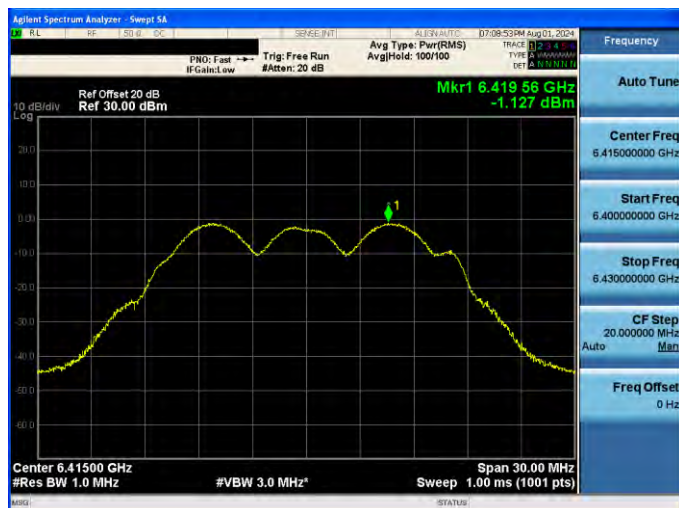

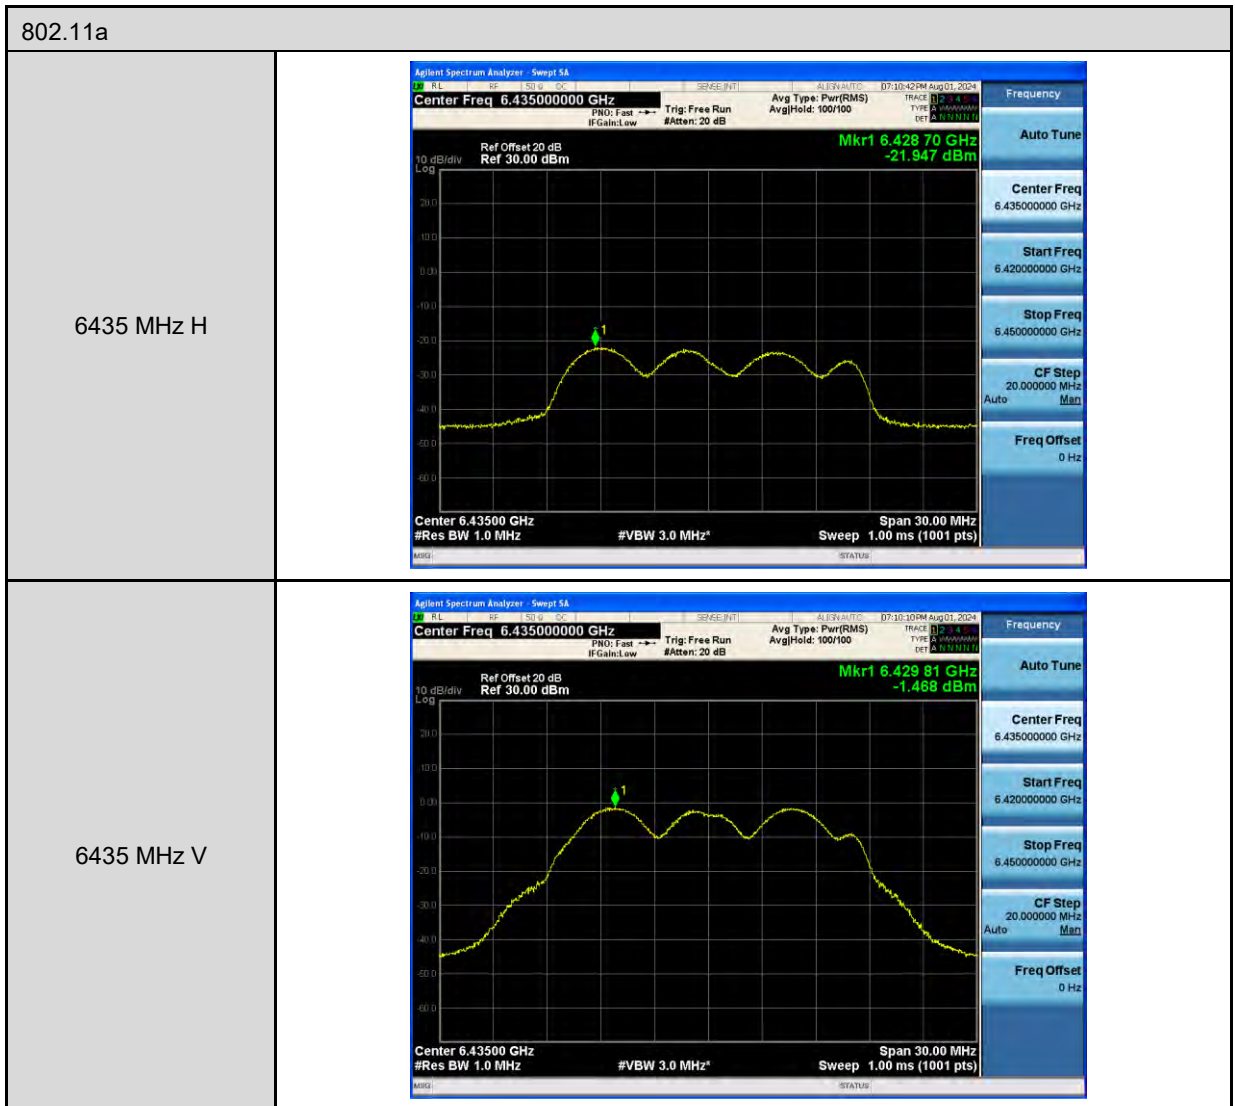



802.11a


6475 MHz H

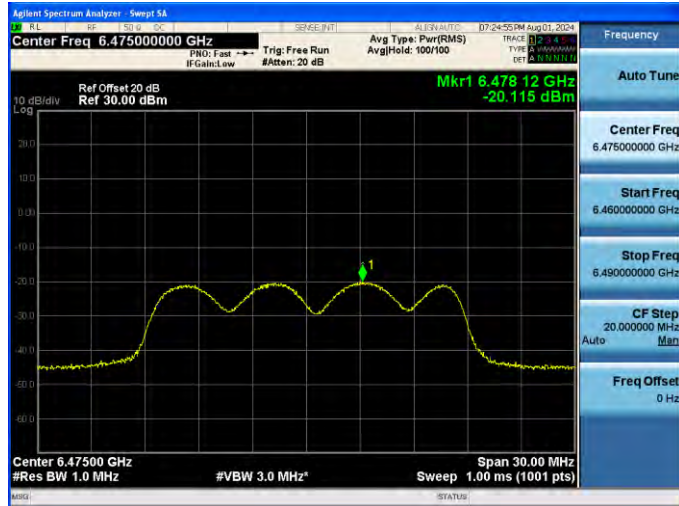

6475 MHz V

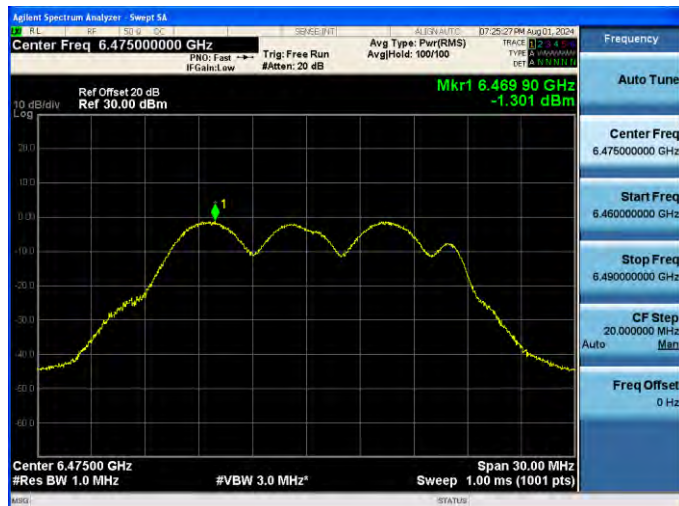


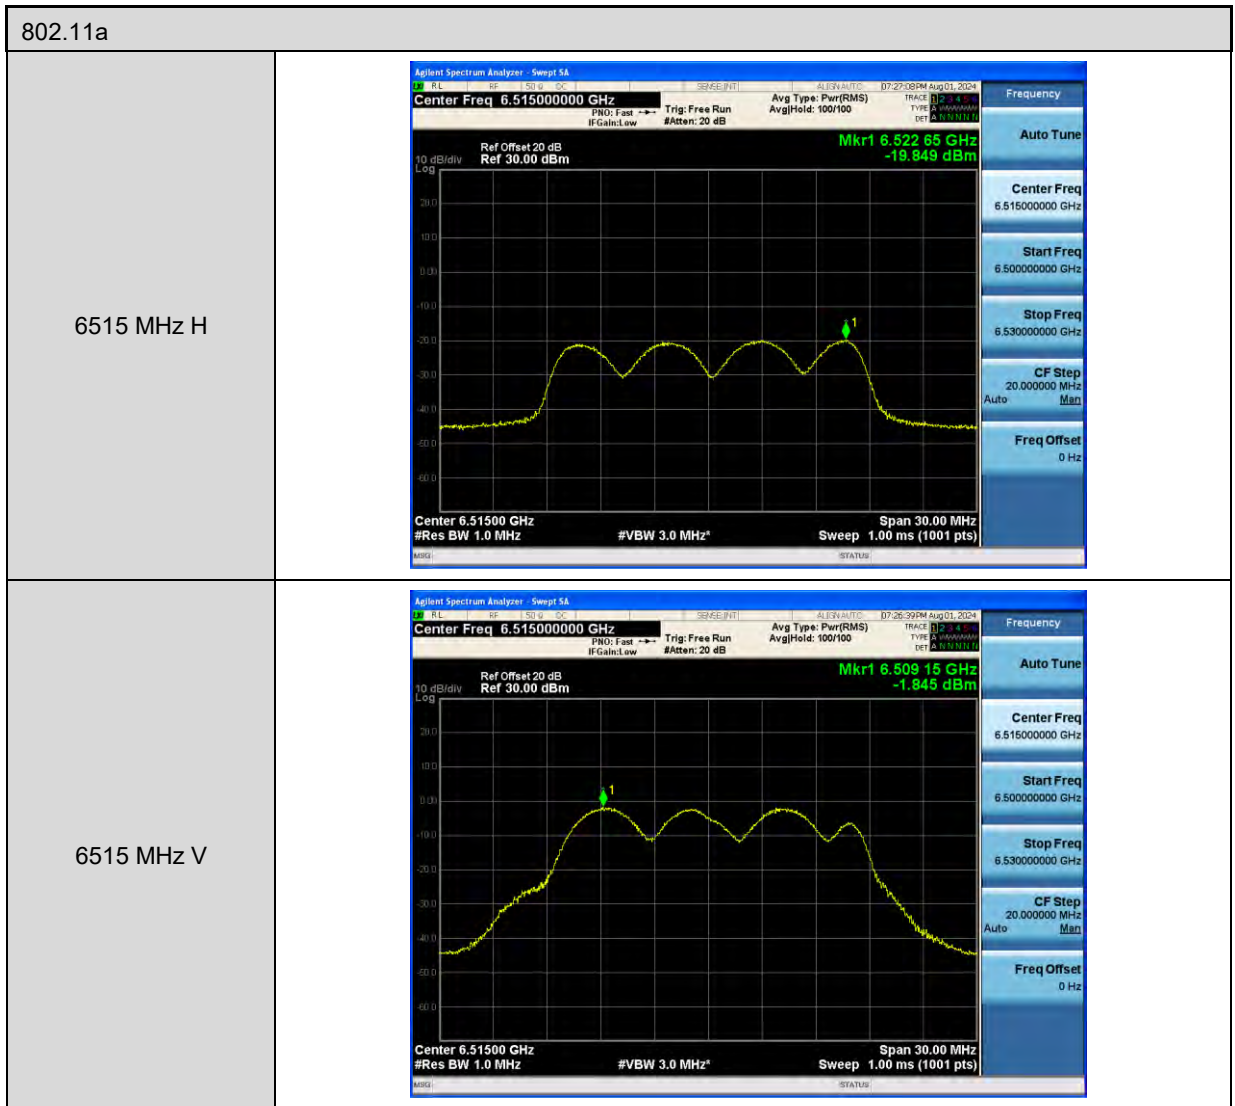

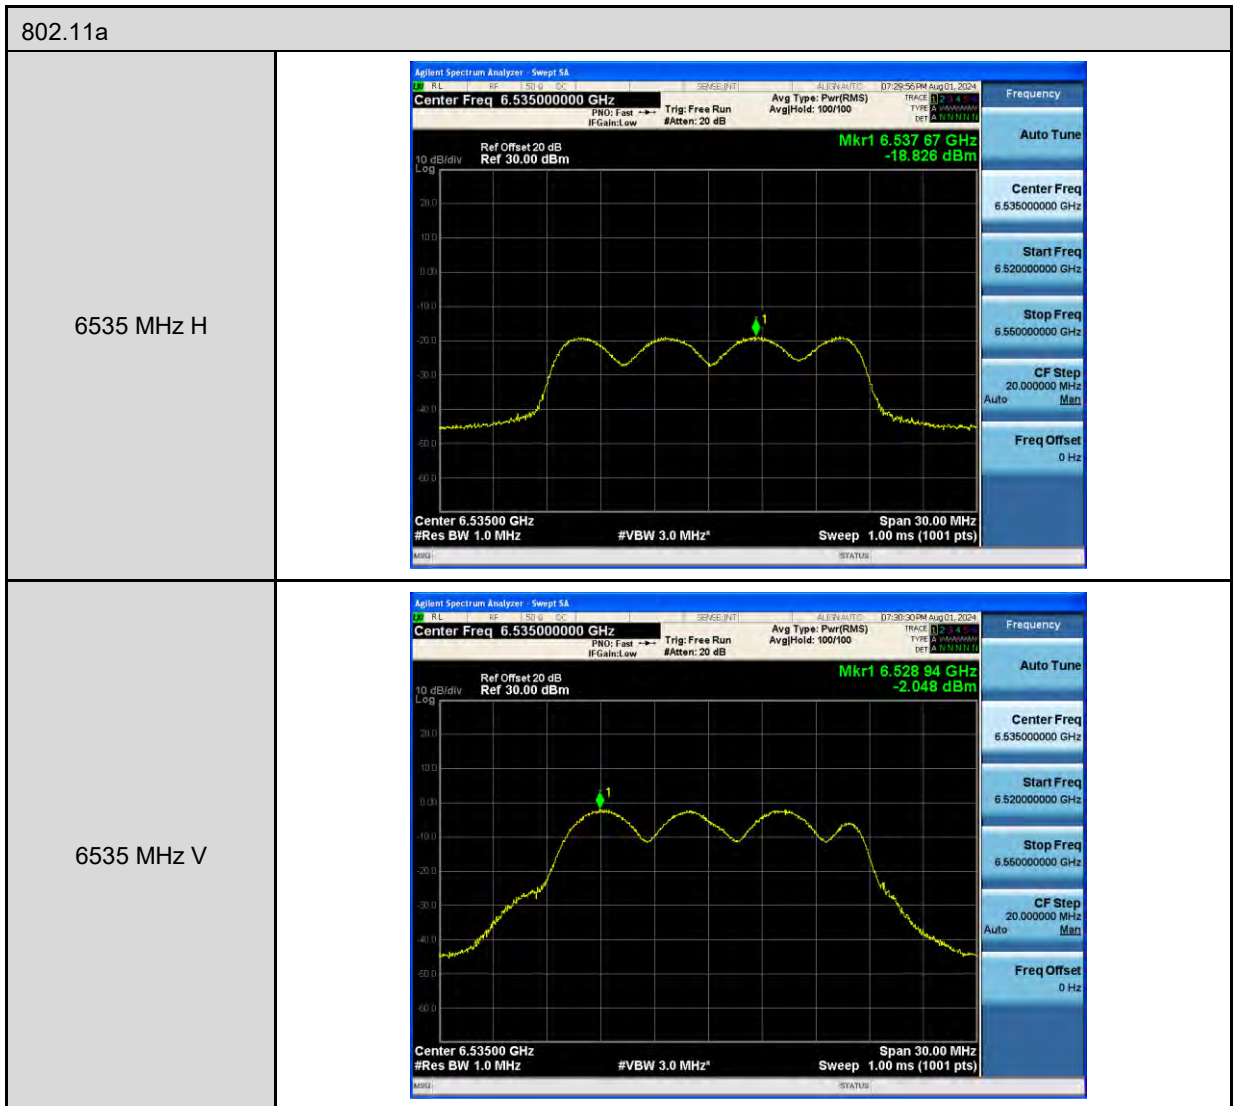


802.11a

6695 MHz H

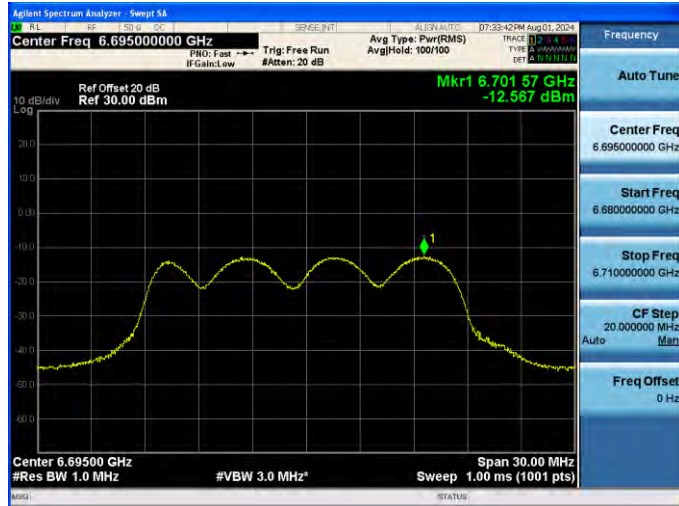


6695 MHz V

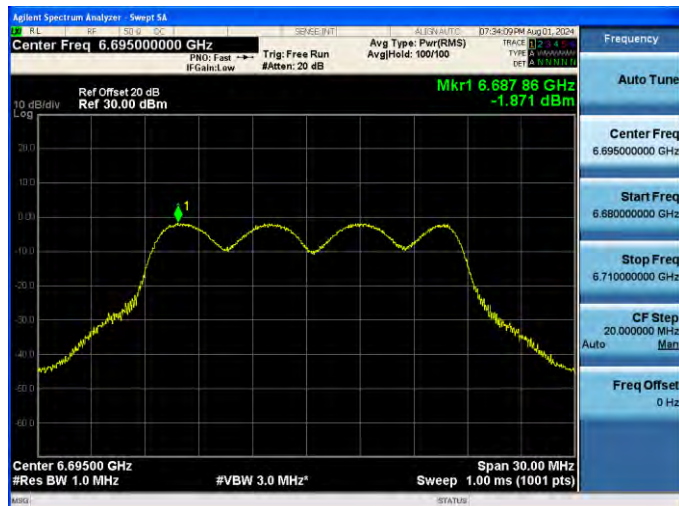


802.11a

6855 MHz H

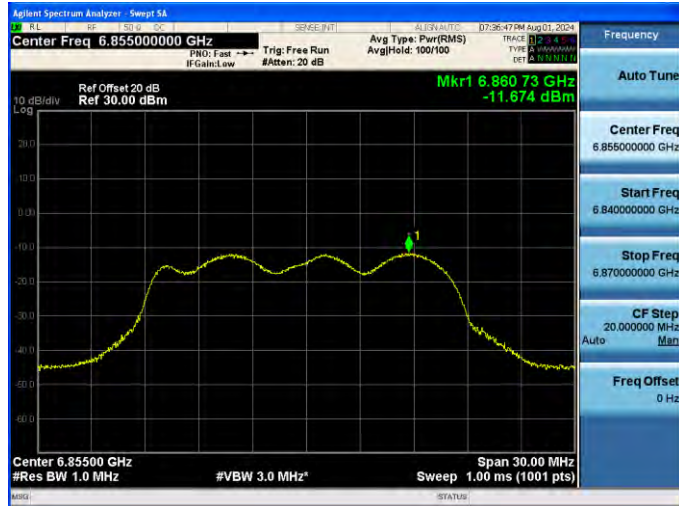


6855 MHz V

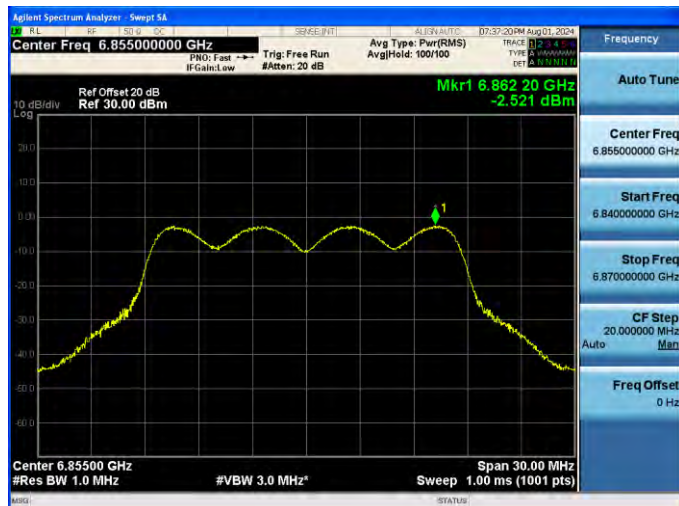



802.11a


6875 MHz H

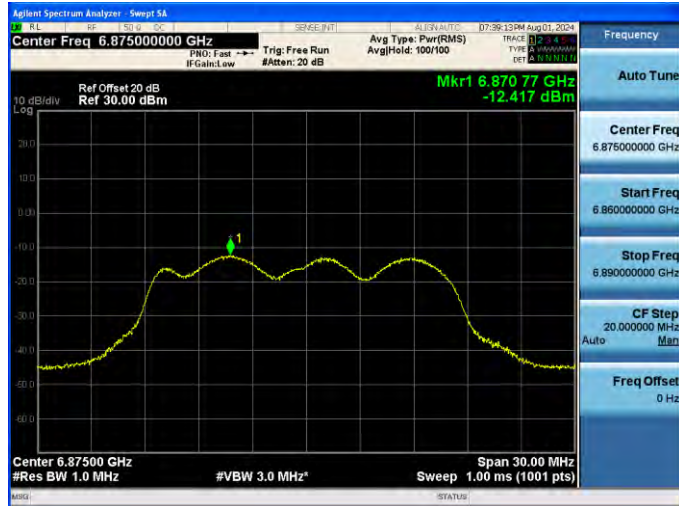

6875 MHz V

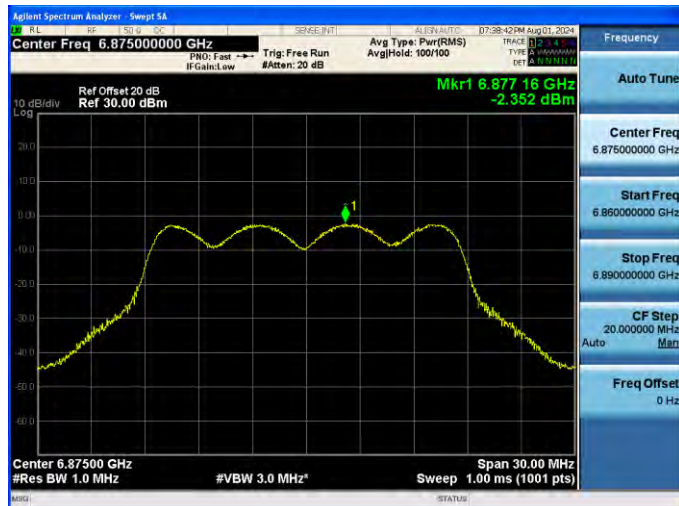


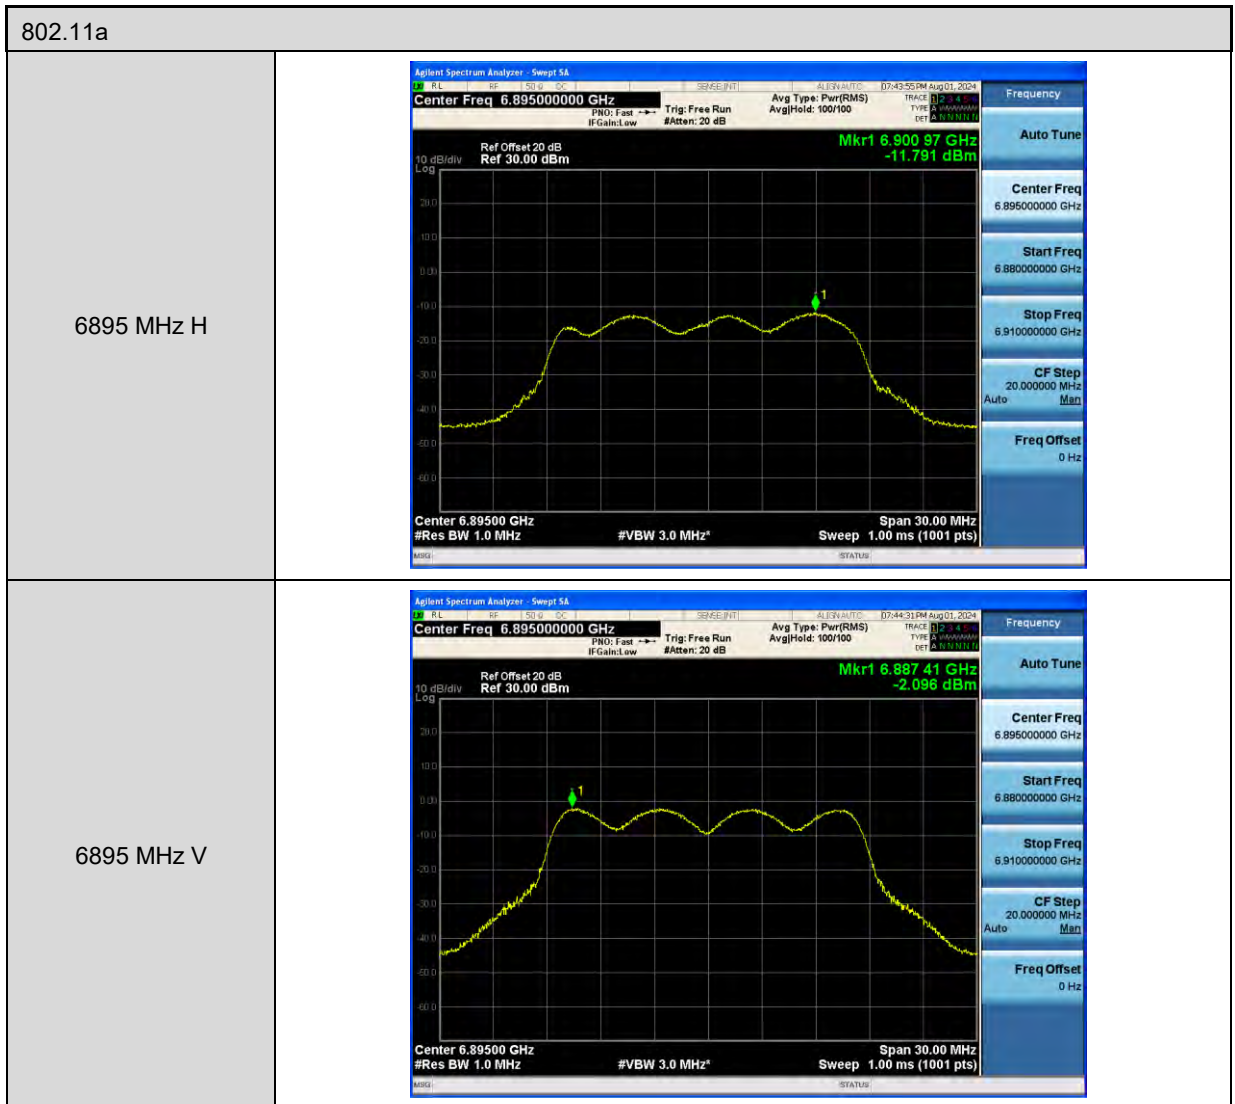

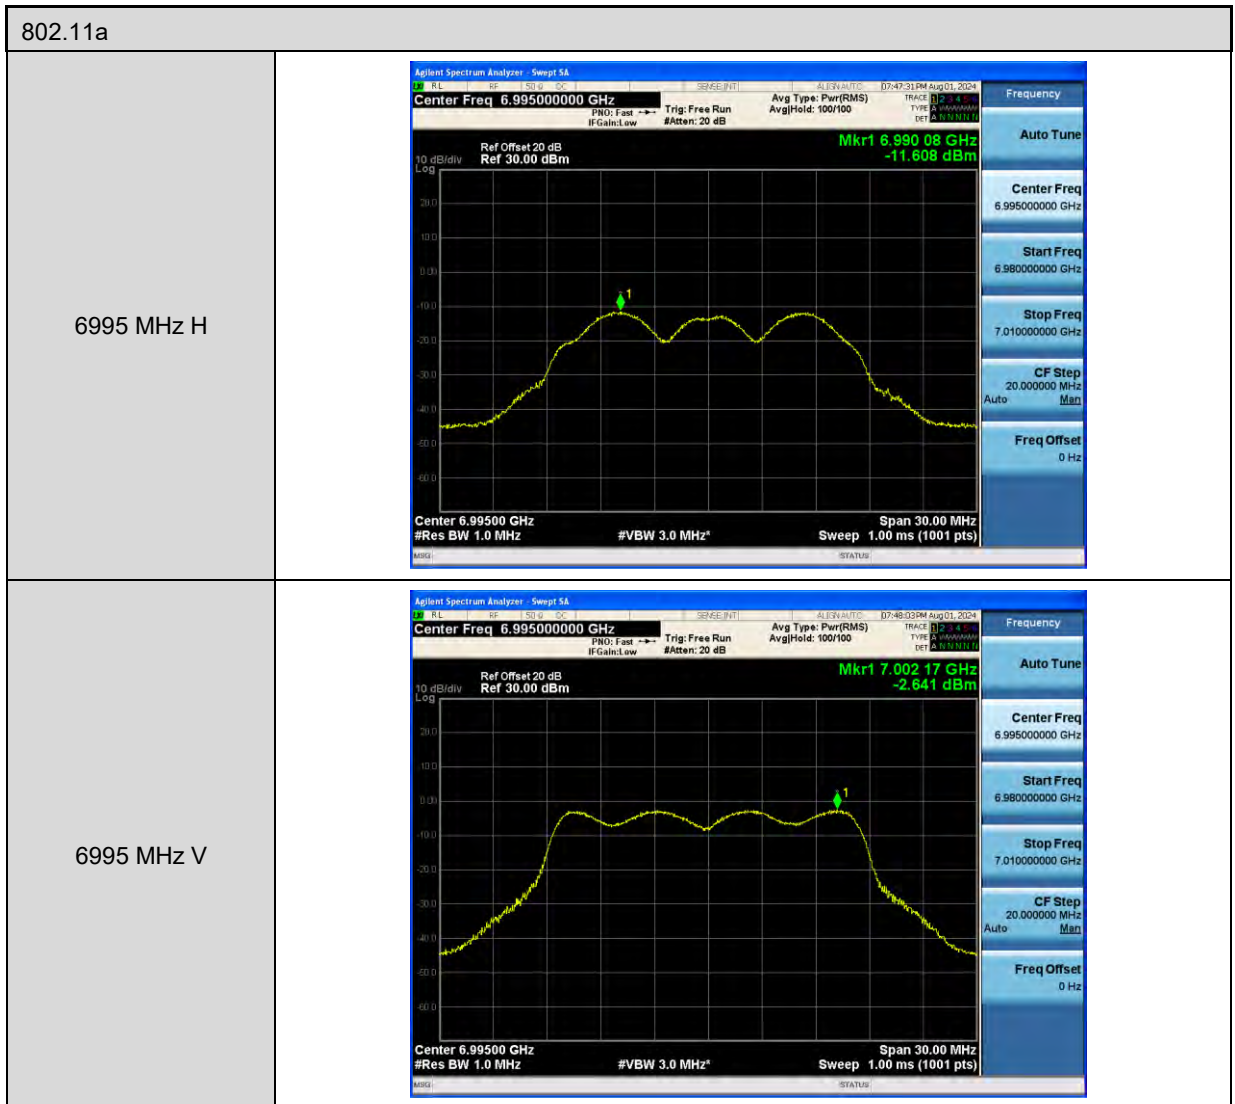


802.11a

7115 MHz H

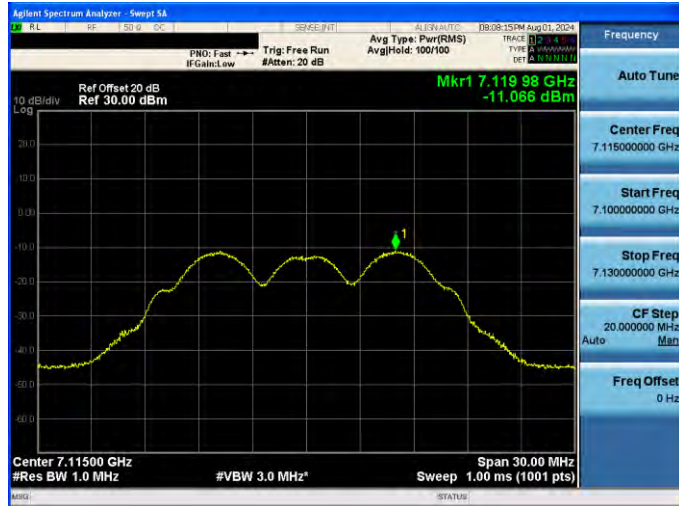


7115 MHz V

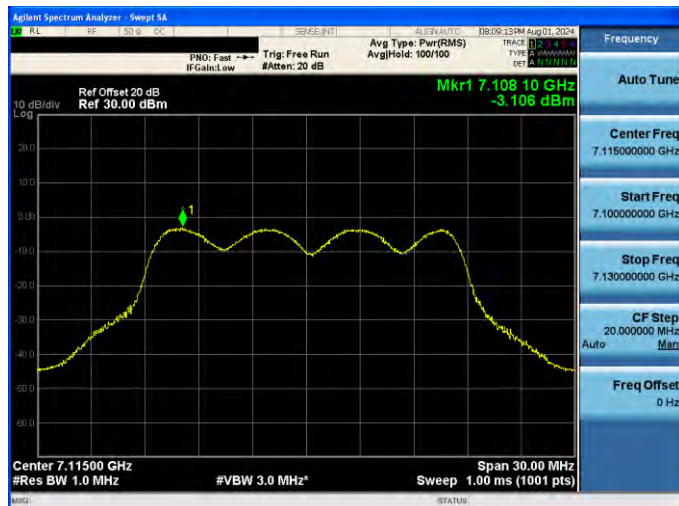

802.11be EHT20

5955 MHz H

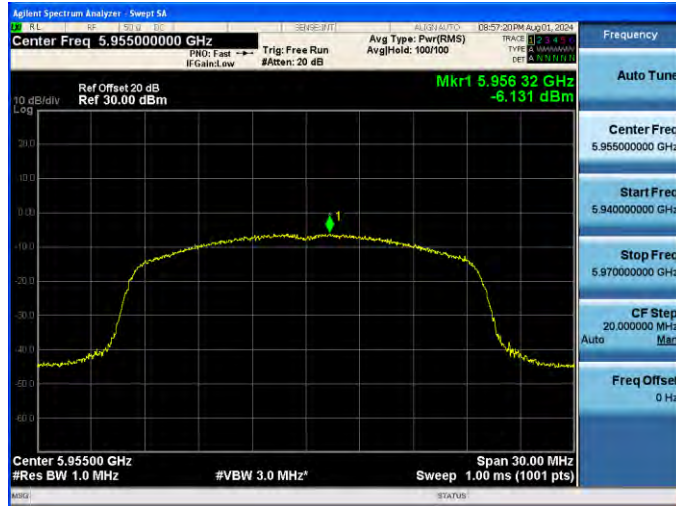


5955 MHz V





802.11be EHT20


6175 MHz H

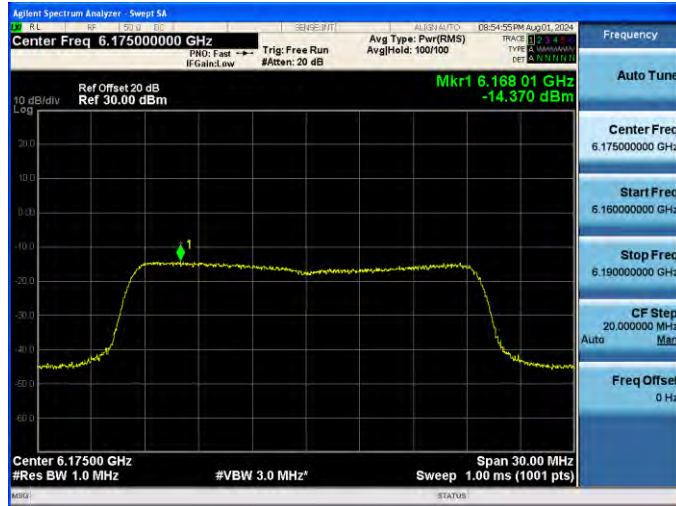

6175 MHz V

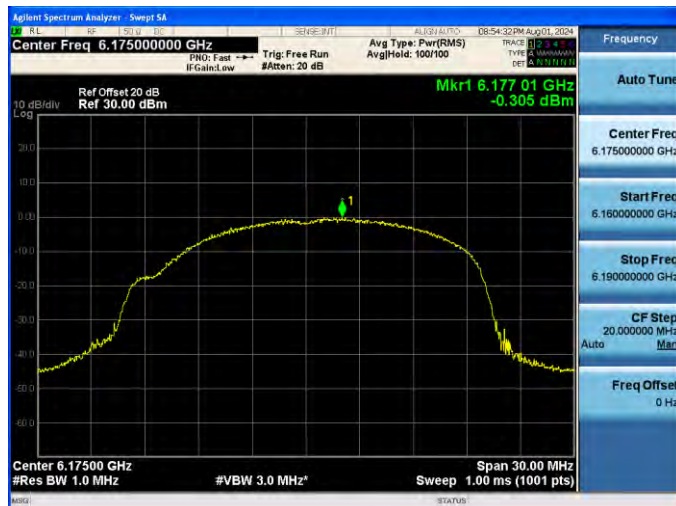


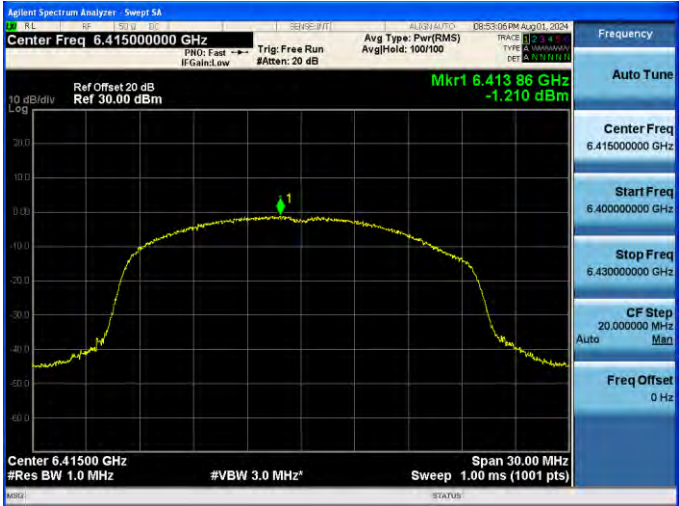802.11be EHT20	
6415 MHz H	
6415 MHz V	

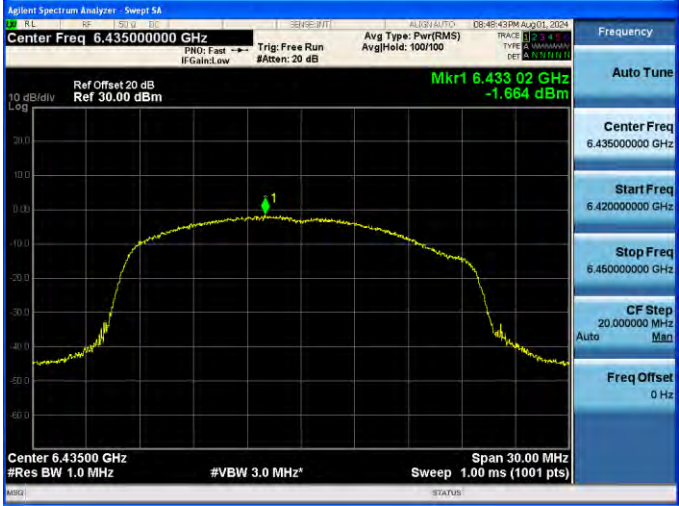
802.11be EHT20	
6435 MHz H	
6435 MHz V	

802.11be EHT20

6475 MHz H

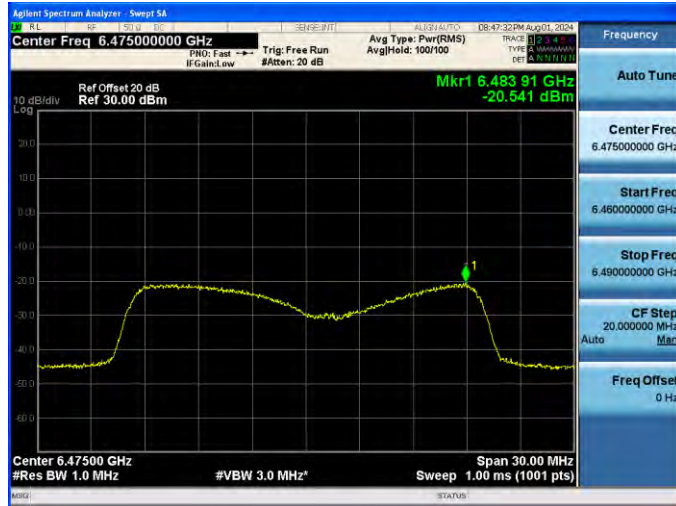


6475 MHz V

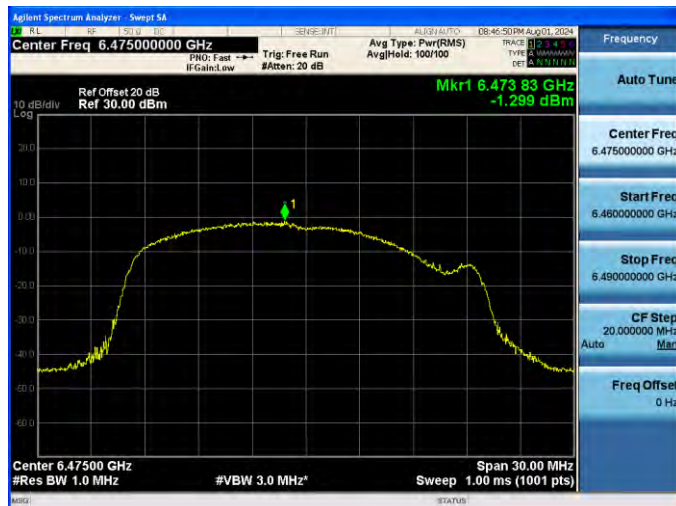


802.11be EHT20

6515 MHz H

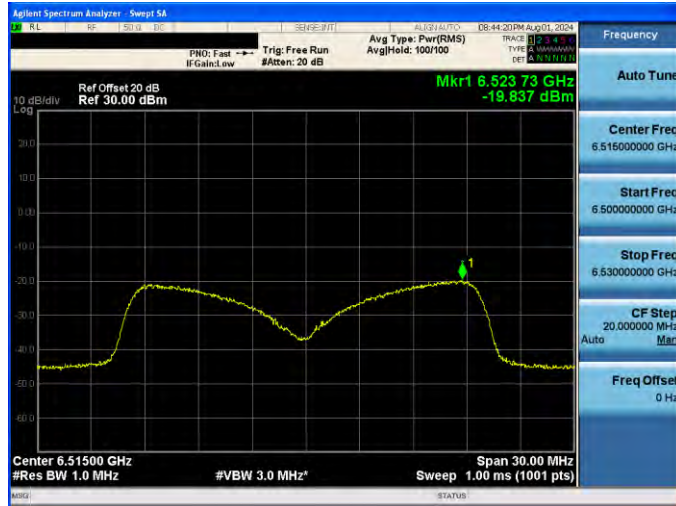


6515 MHz V

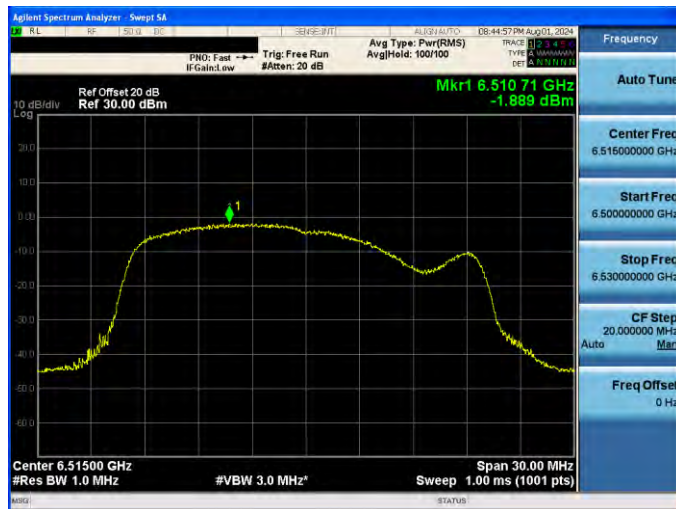


802.11be EHT20

6535 MHz H

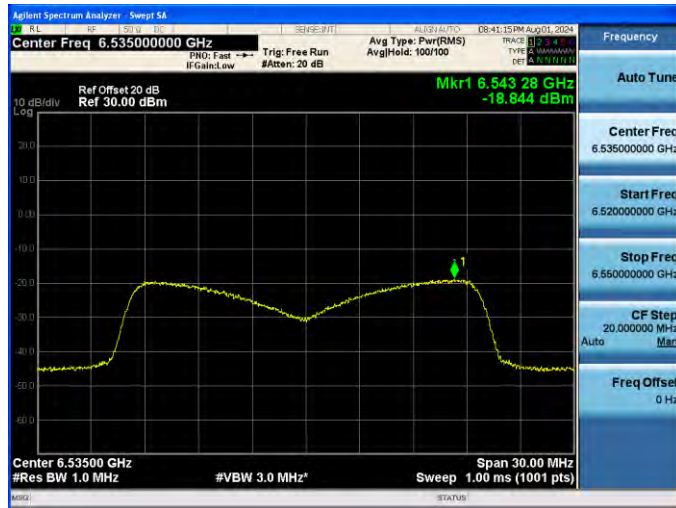

6535 MHz V

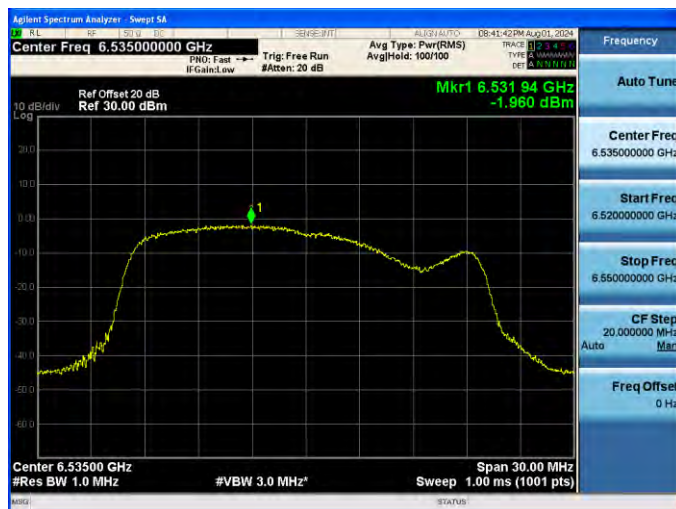


802.11be EHT20

6695 MHz H




6695 MHz V

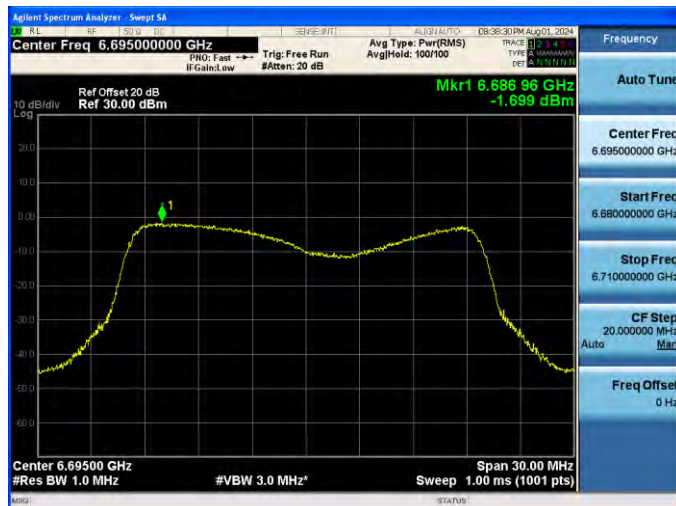


802.11be EHT20

6855 MHz H

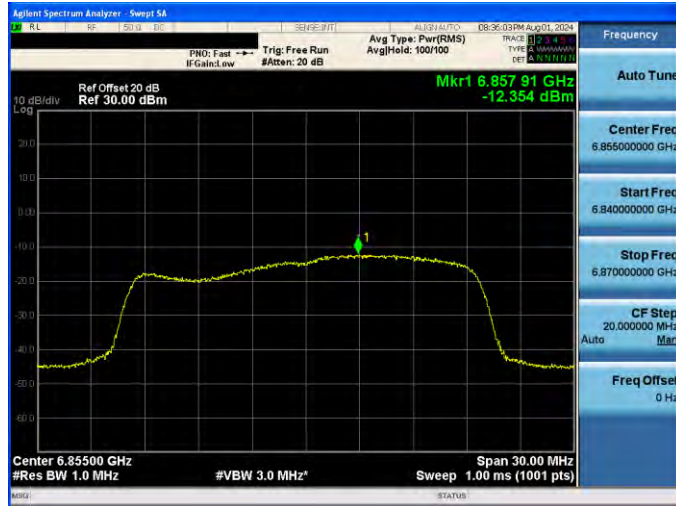


6855 MHz V

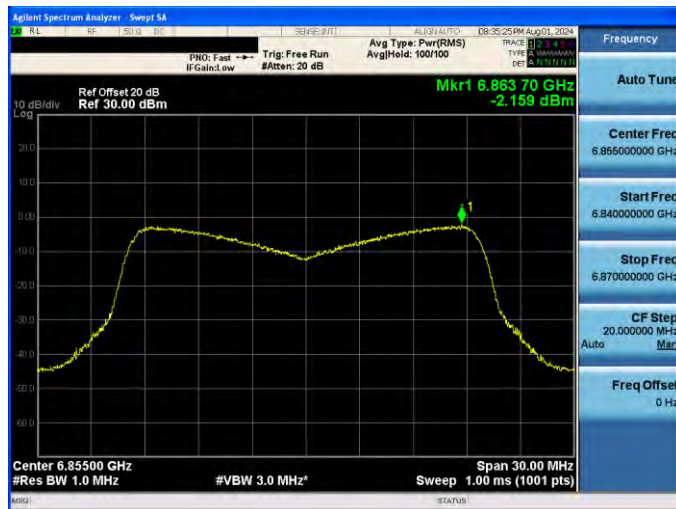



802.11be EHT20

6875 MHz H

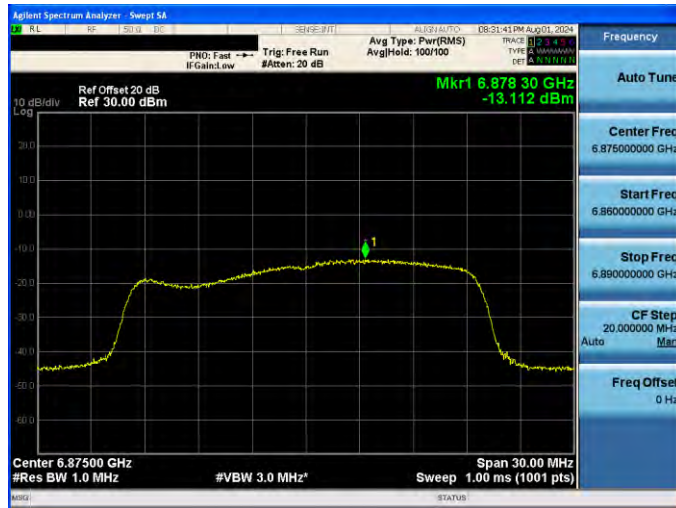


6875 MHz V

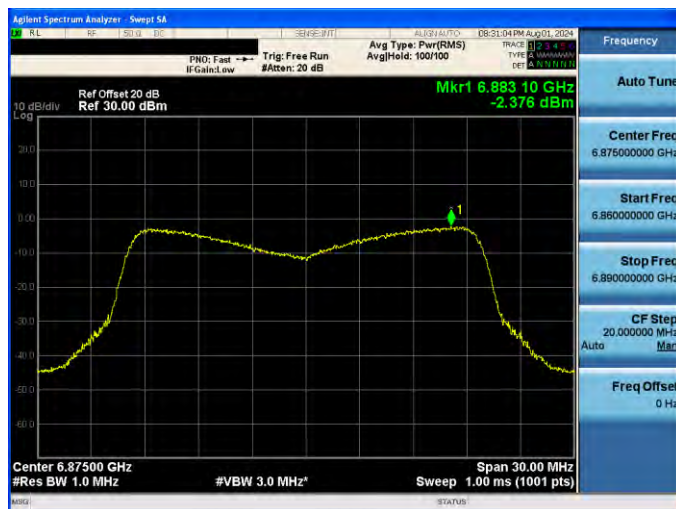

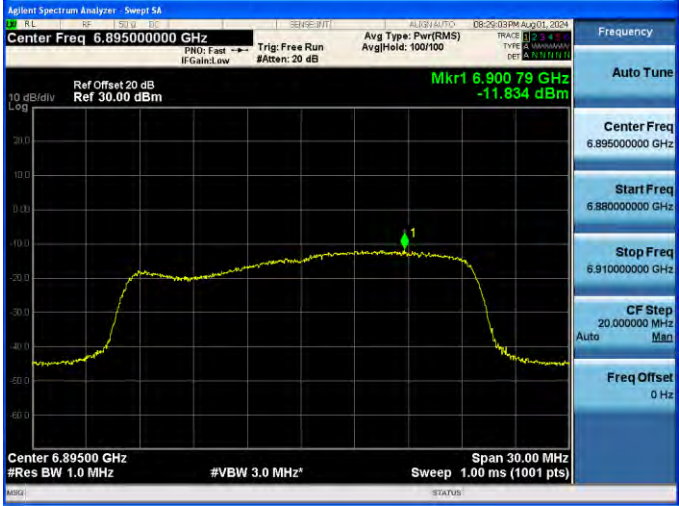802.11be EHT20	
6895 MHz H	
6895 MHz V	


802.11be EHT20

6995 MHz H


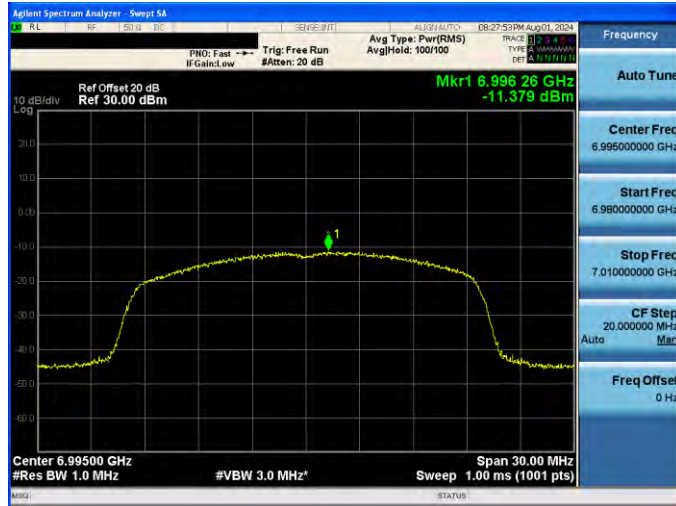


6995 MHz V

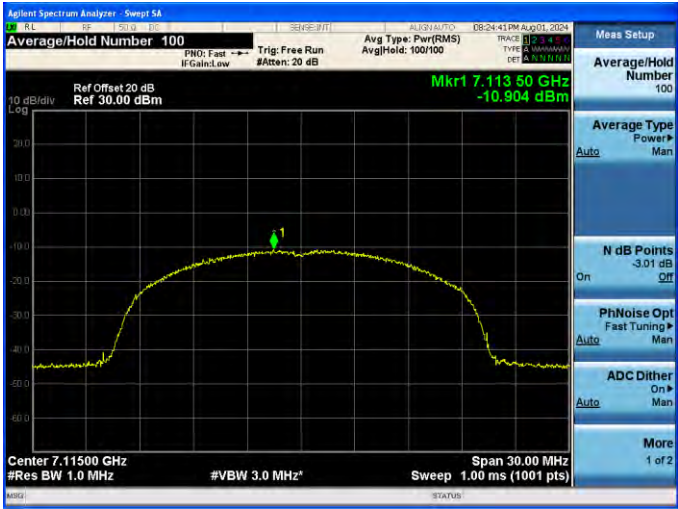


802.11be EHT20	
7115 MHz H	
7115 MHz V	

802.11be EHT40	
5965 MHz H	
5965 MHz V	

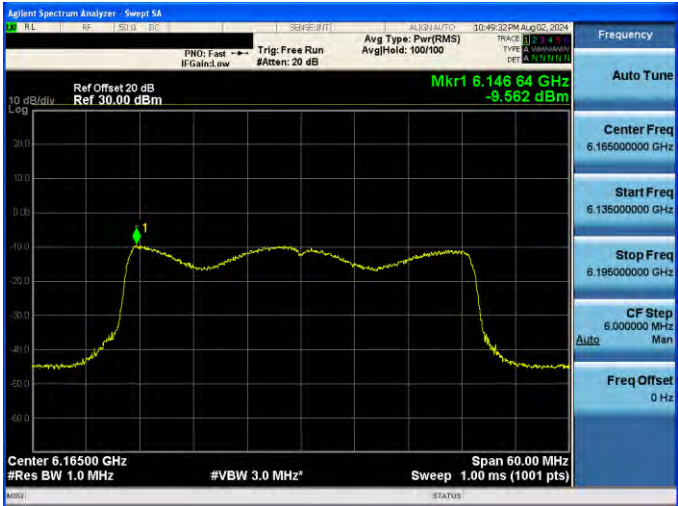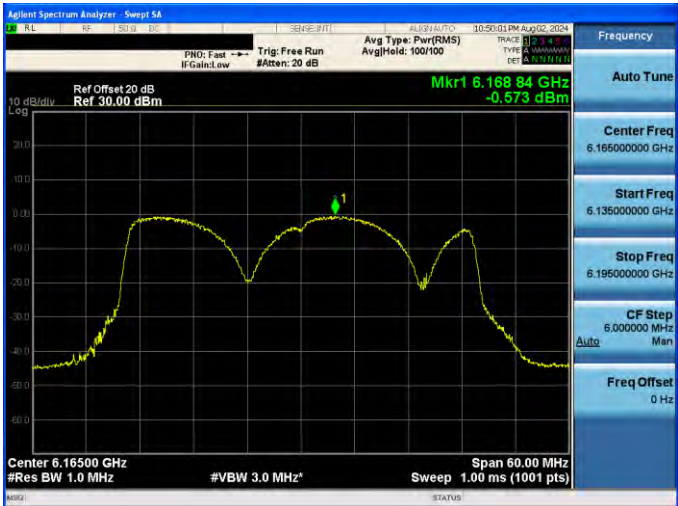
802.11be EHT40	
6165 MHz H	
6165 MHz V	


802.11be EHT40

6405 MHz H

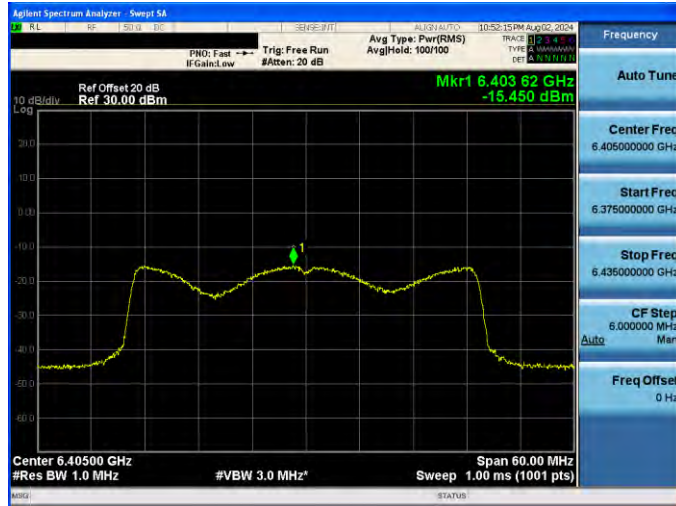


6405 MHz V

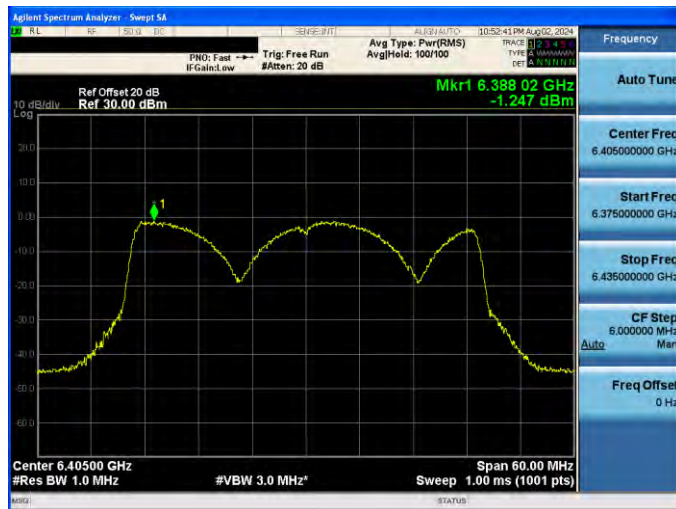

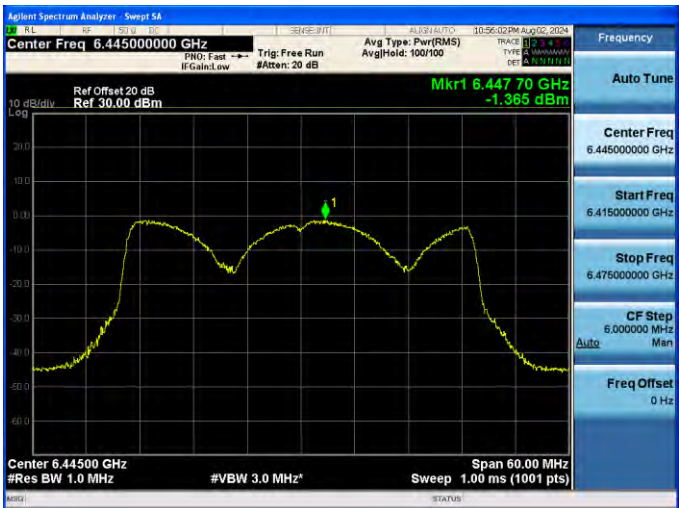
802.11be EHT40	
6445 MHz H	
6445 MHz V	

802.11be EHT40

6485 MHz H

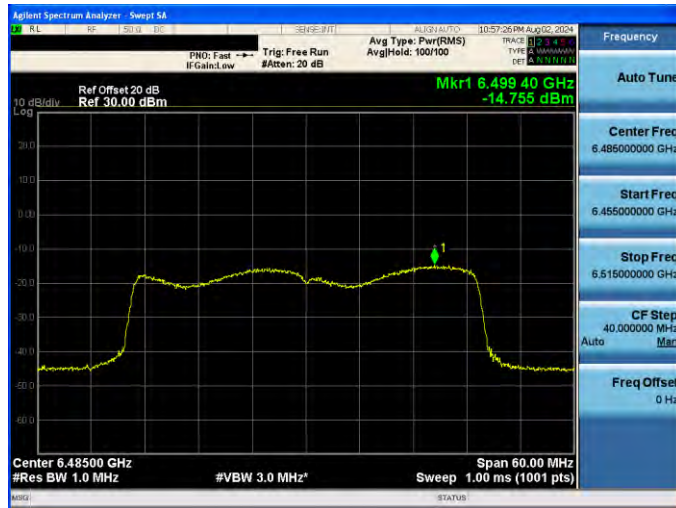


6485 MHz V

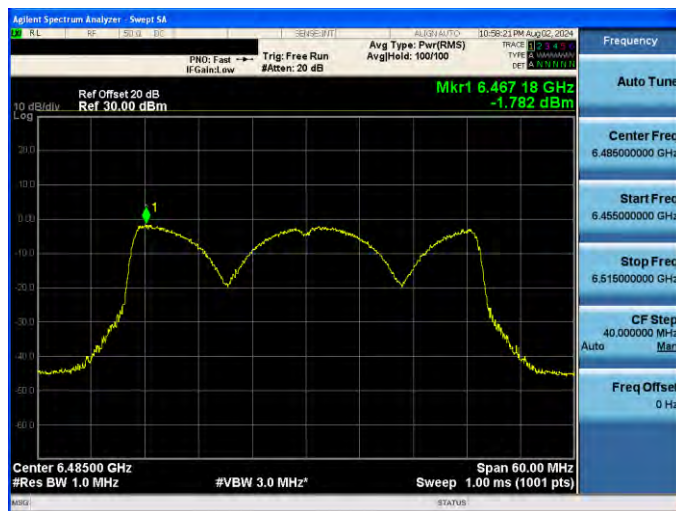

802.11be EHT40

6525 MHz H

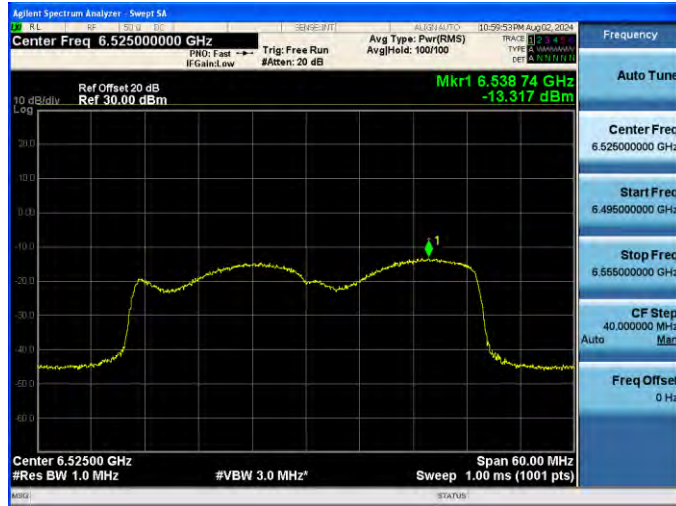


6525 MHz V




802.11be EHT40

6565 MHz H

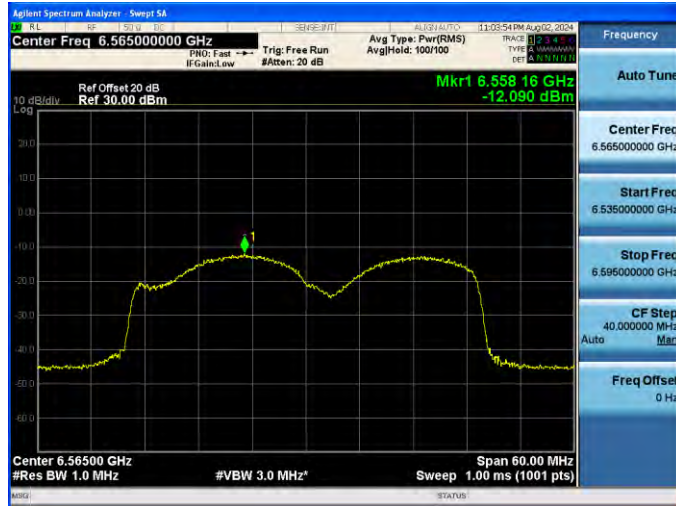


6565 MHz V

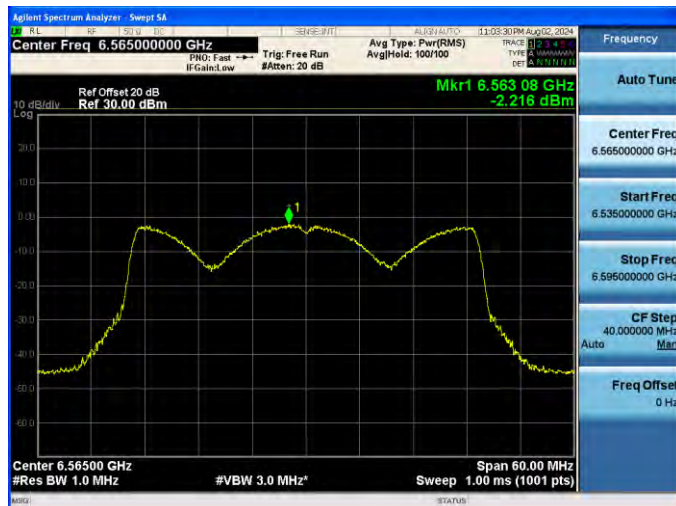

802.11be EHT40

6685 MHz H

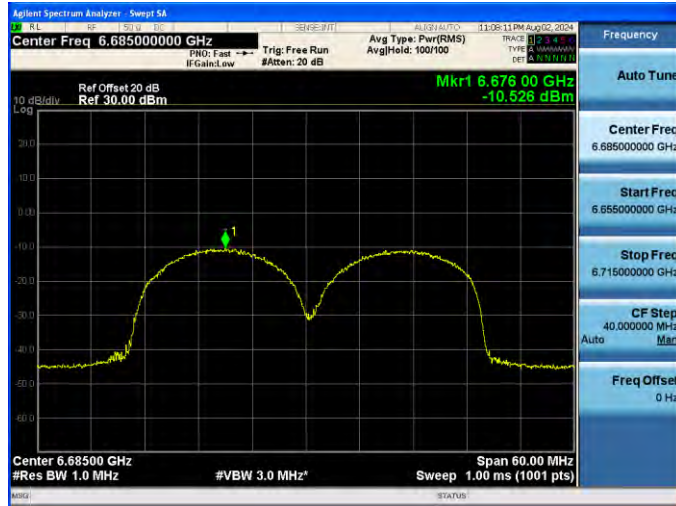


6685 MHz V





802.11be EHT40

6845 MHz H

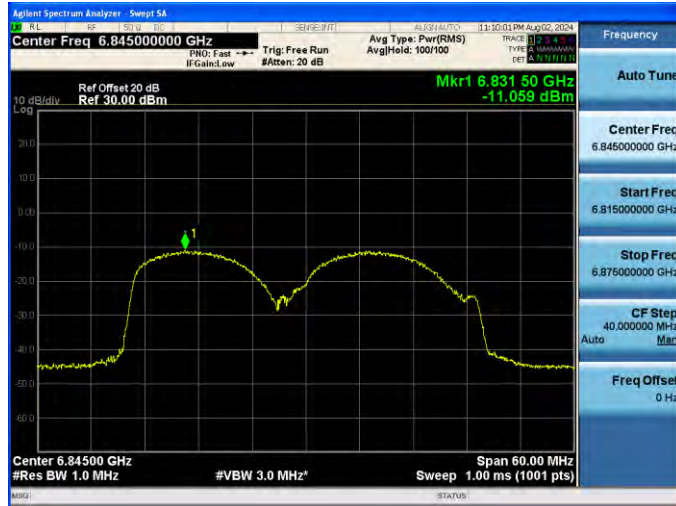


6845 MHz V

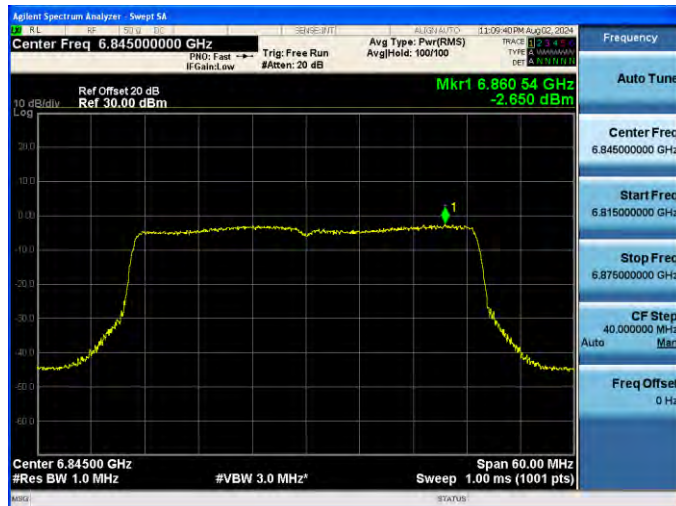

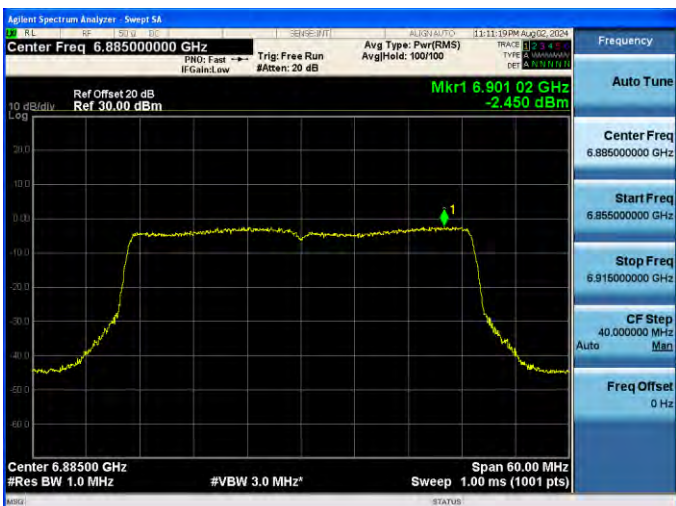
802.11be EHT40	
6885 MHz H	
6885 MHz V	

802.11be EHT40

6925 MHz H

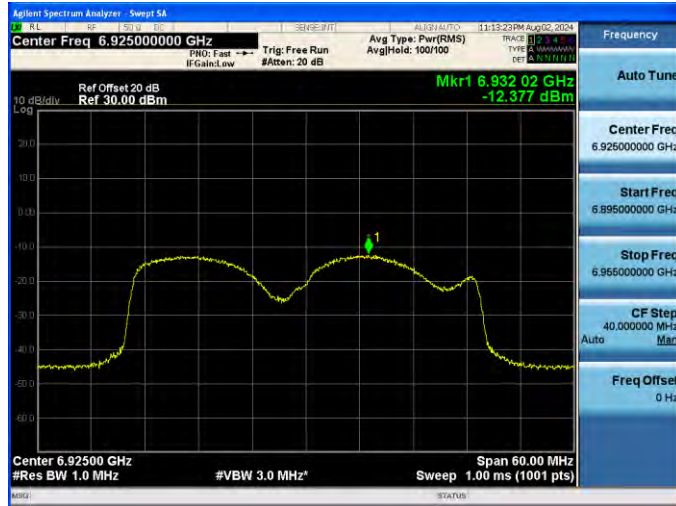


6925 MHz V

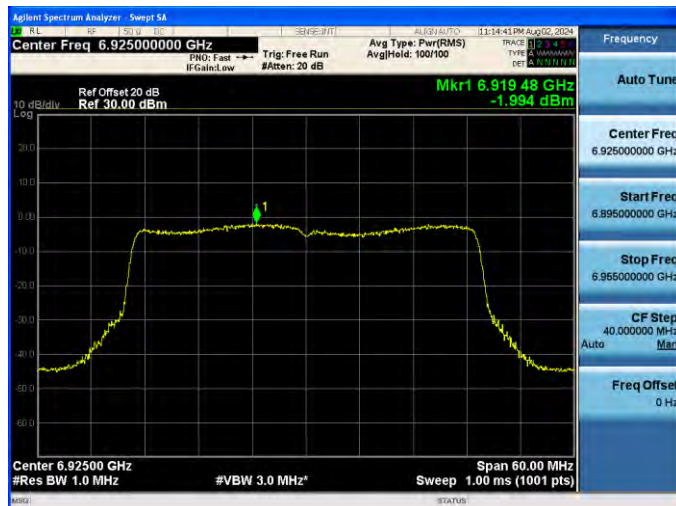


802.11be EHT40

7005 MHz H

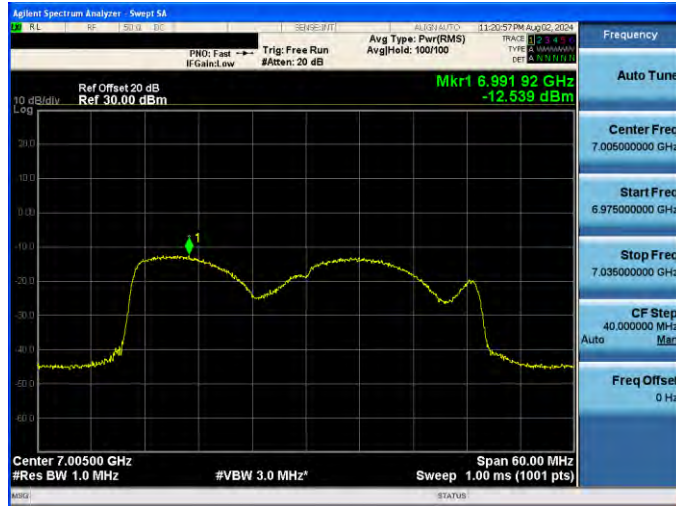


7005 MHz V

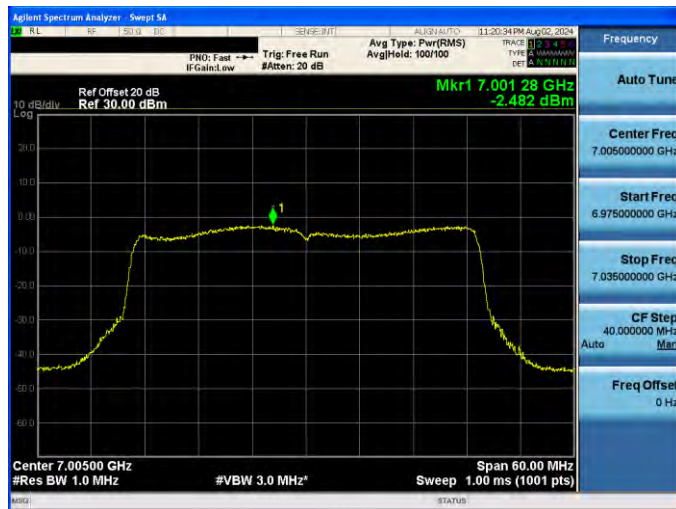


802.11be EHT40

7085 MHz H

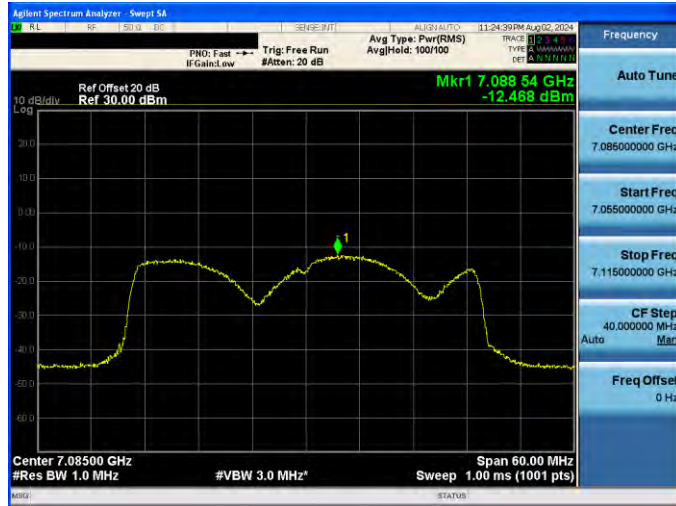


7085 MHz V

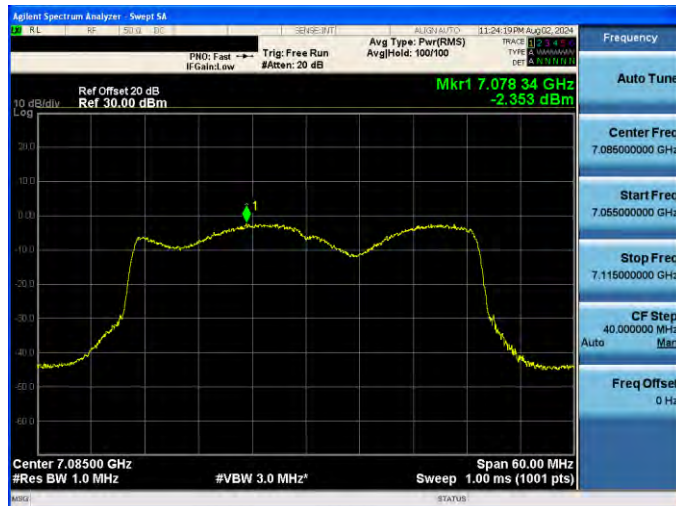


802.11be EHT80

5985 MHz H

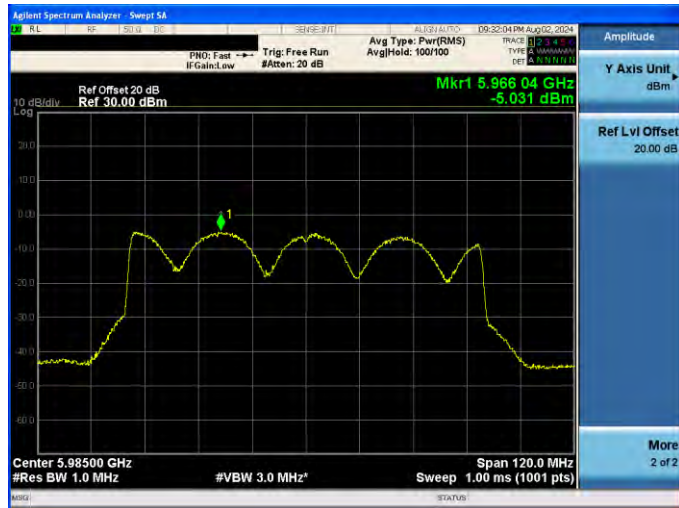


5985 MHz V

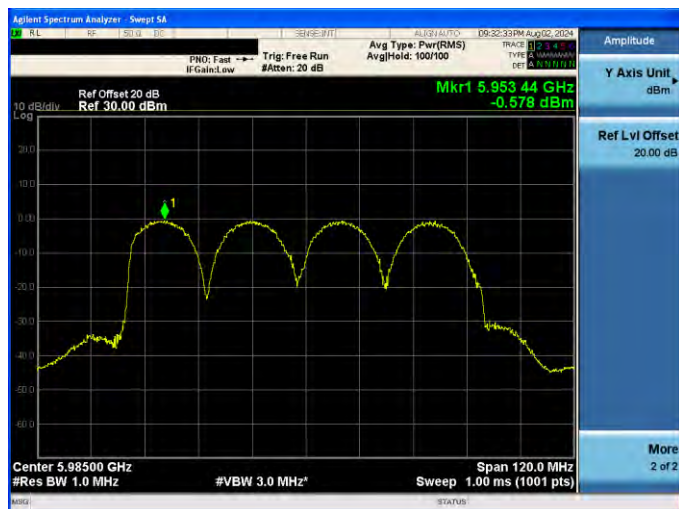




802.11be EHT80

6145 MHz H

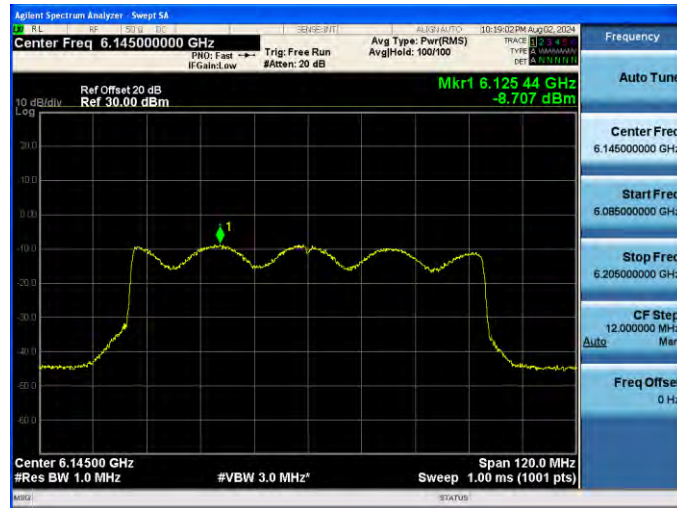


6145 MHz V

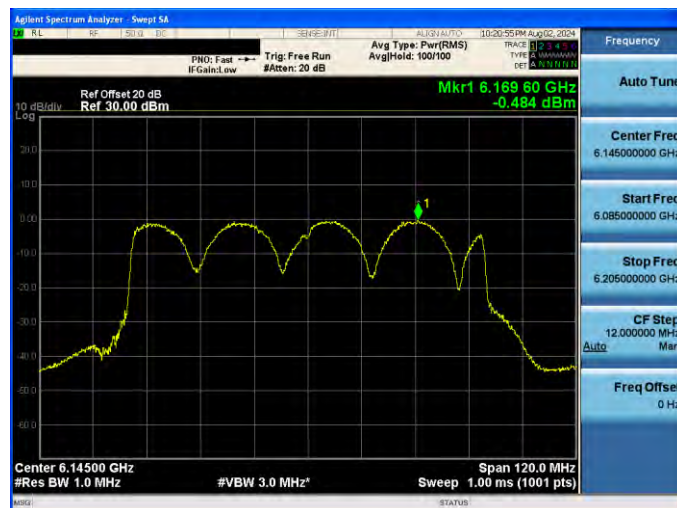

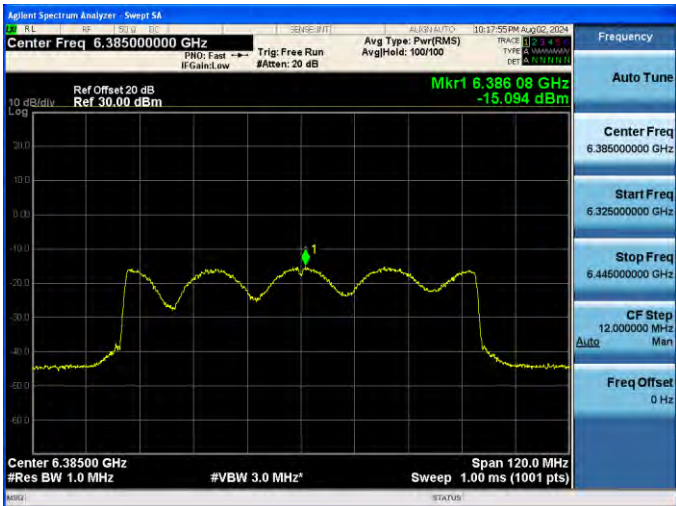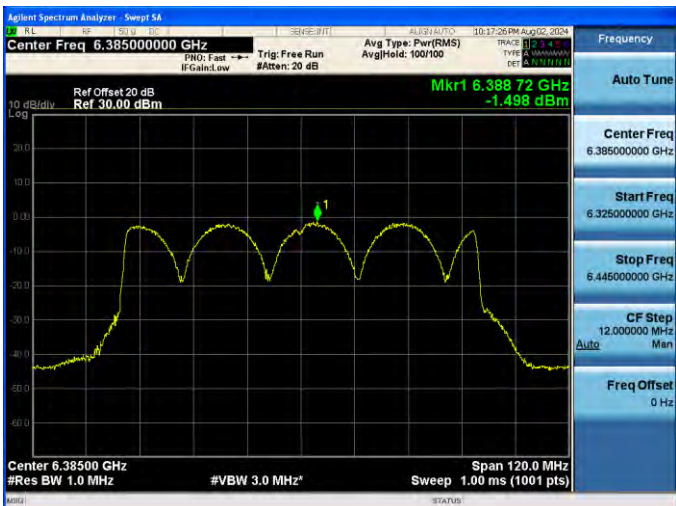
802.11be EHT80	
6385 MHz H	
6385 MHz V	

802.11be EHT80

6465 MHz H

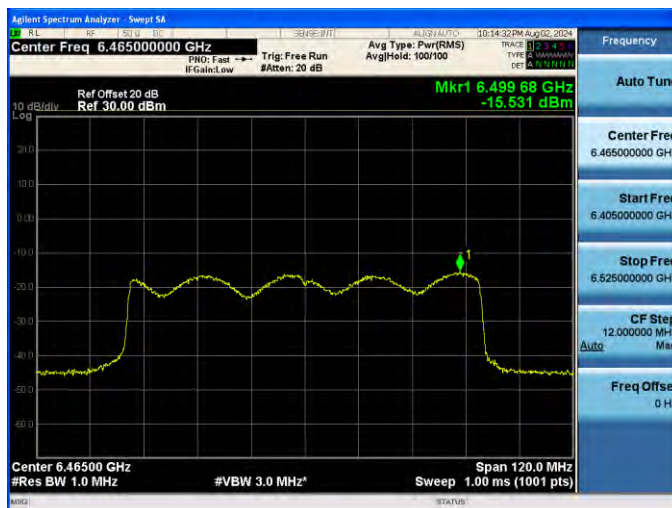


6465 MHz V

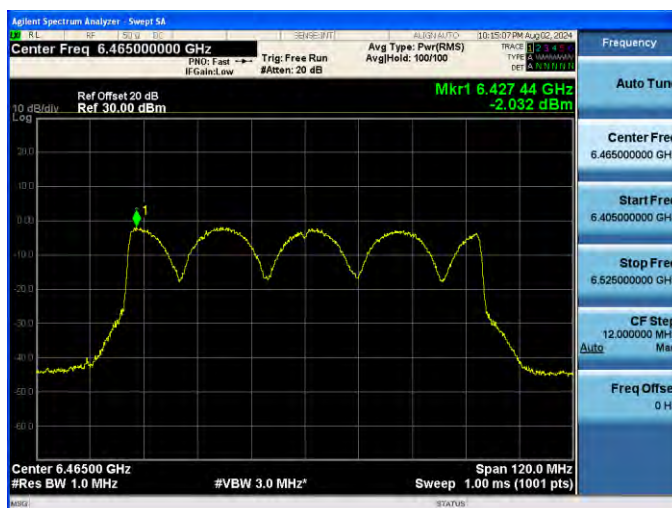


802.11be EHT80

6545 MHz H

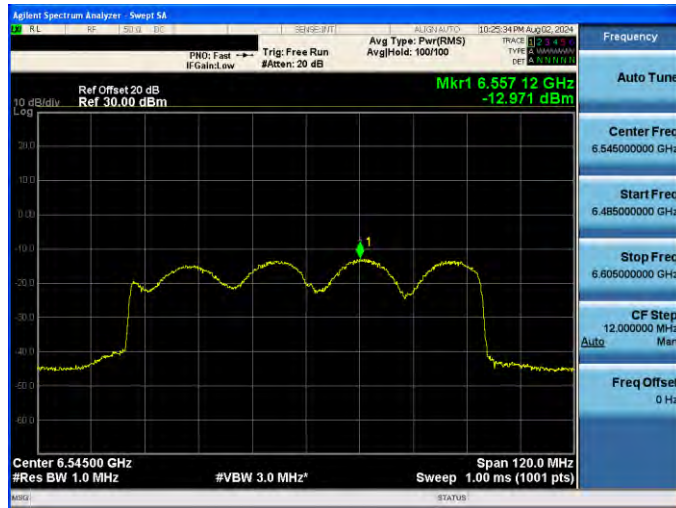


6545 MHz V

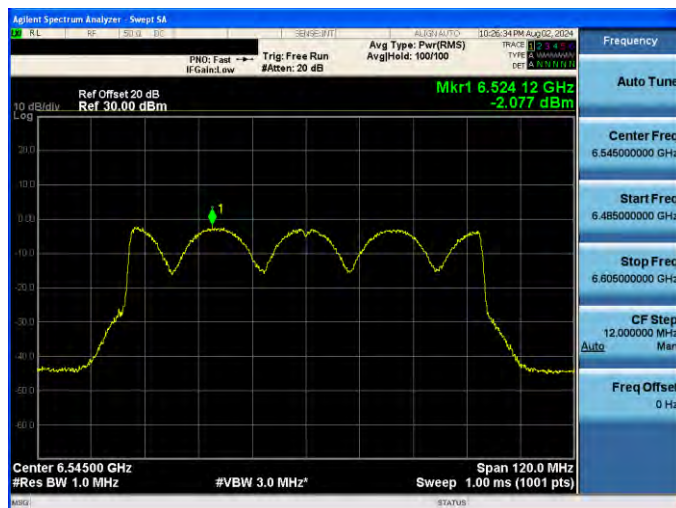


802.11be EHT80

6625 MHz H

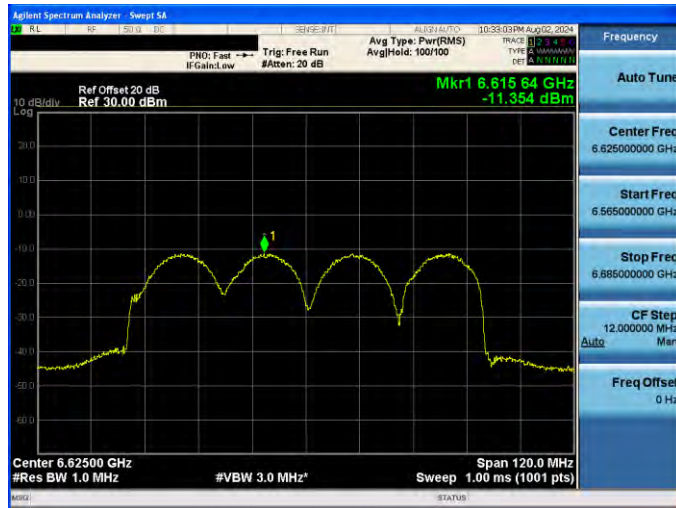


6625 MHz V

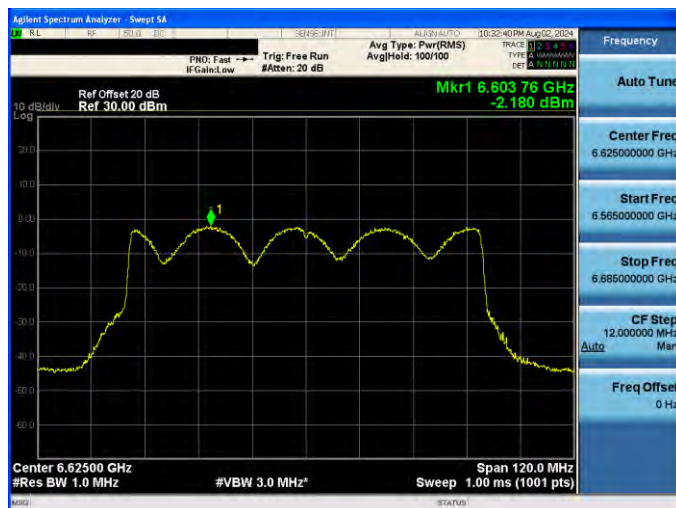


802.11be EHT80

6705 MHz H

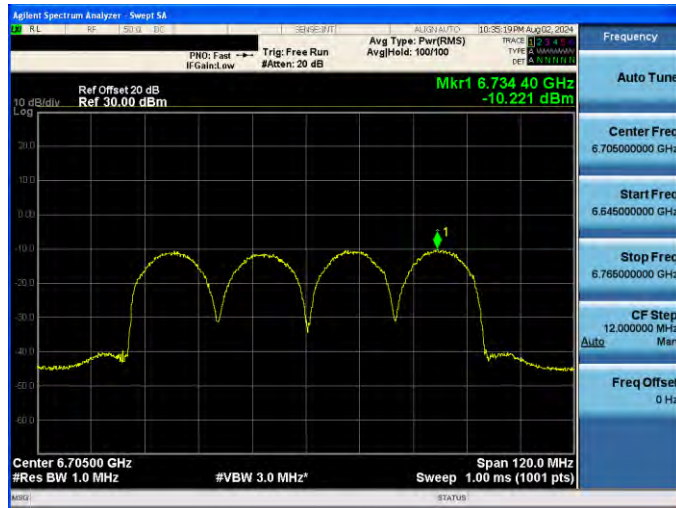


6705 MHz V

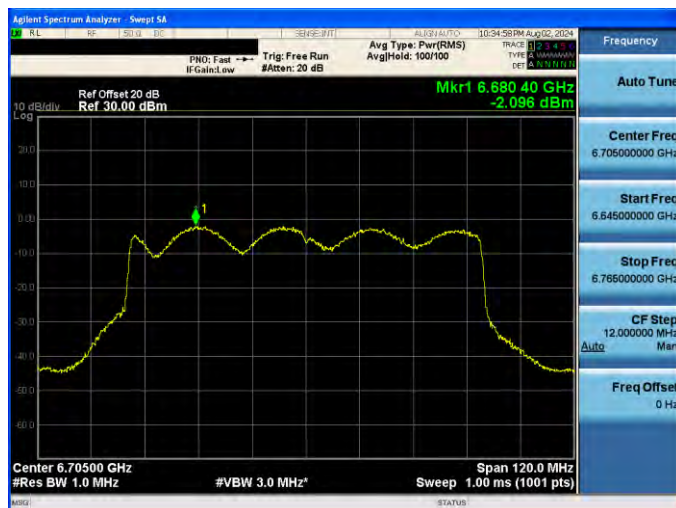

802.11be EHT80

6785 MHz H

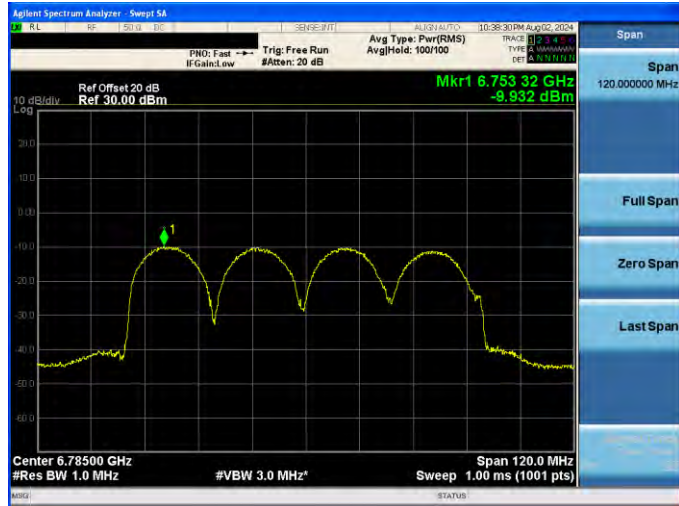


6785 MHz V



802.11be EHT80	
6865 MHz H	
6865 MHz V	


802.11be EHT80



6945 MHz H

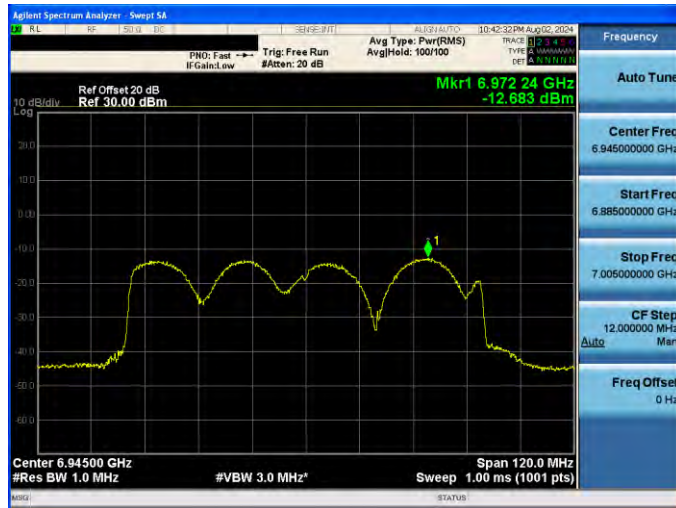

6945 MHz V

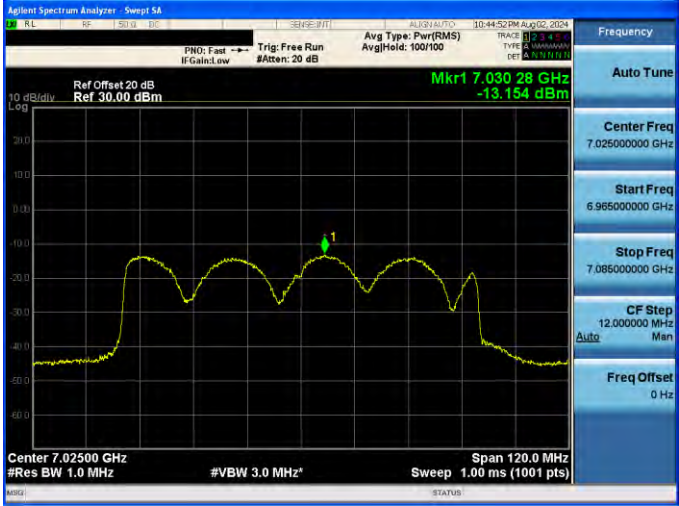


802.11be EHT80	
7025 MHz H	 Agilent Spectrum Analyzer - Swept 5A Ref Offset 20 dB Ref 30.00 dBm Mkr1 7.030 28 GHz -13.154 dBm Center 7.02500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Span 120.0 MHz Sweep 1.00 ms (1001 pts) Frequency Auto Tune Center Freq 7.025000000 GHz Start Freq 6.965000000 GHz Stop Freq 7.085000000 GHz CF Step 12.000000 MHz Auto Man Freq Offset 0 Hz
7025 MHz V	 Agilent Spectrum Analyzer - Swept 5A Ref Offset 20 dB Ref 30.00 dBm Mkr1 7.062 44 GHz -2.929 dBm Center 7.02500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Span 120.0 MHz Sweep 1.00 ms (1001 pts) Frequency Auto Tune Center Freq 7.025000000 GHz Start Freq 6.965000000 GHz Stop Freq 7.085000000 GHz CF Step 12.000000 MHz Auto Man Freq Offset 0 Hz

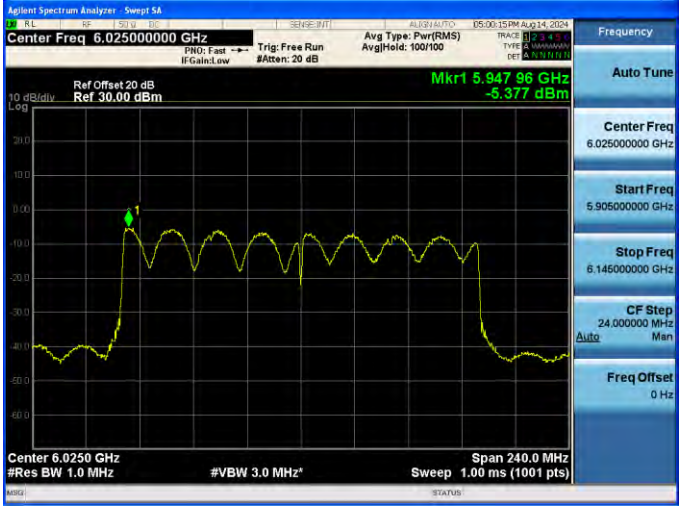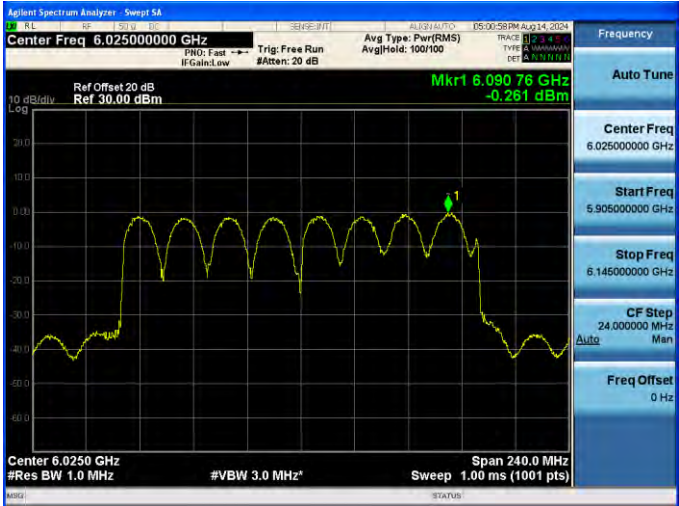
802.11be EHT160	
6025 MHz H	
6025 MHz V	

802.11be EHT160

6185 MHz H

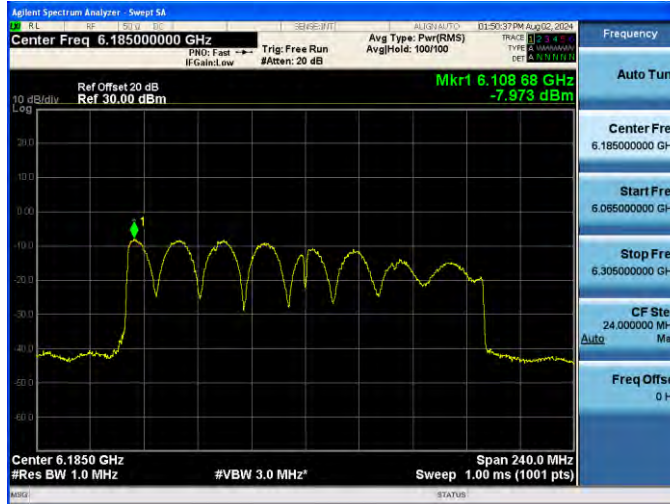


6185 MHz V

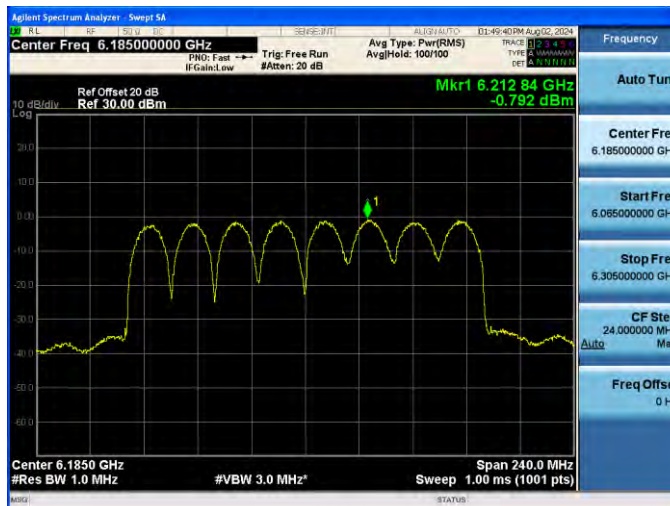


802.11be EHT160

6345 MHz H

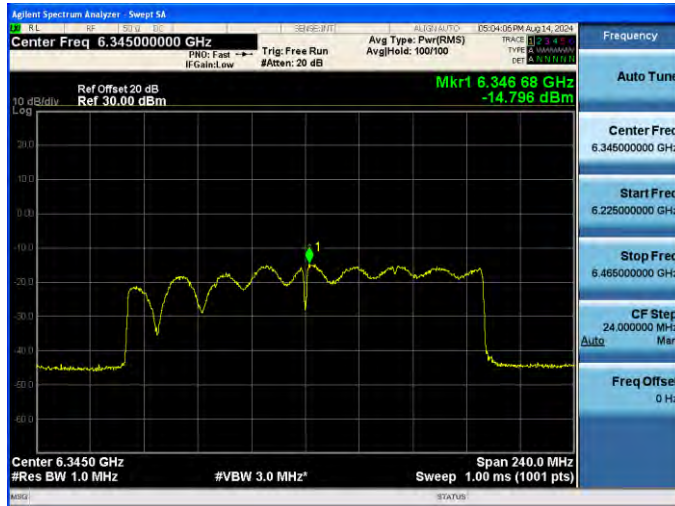


6345 MHz V

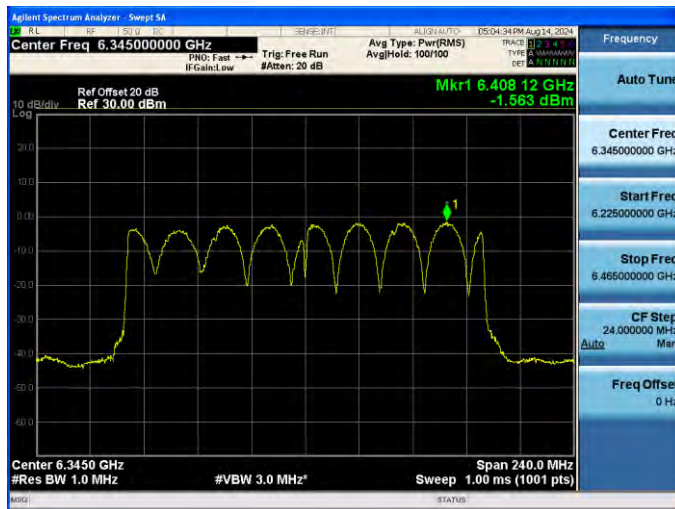


802.11be EHT160

6505 MHz H

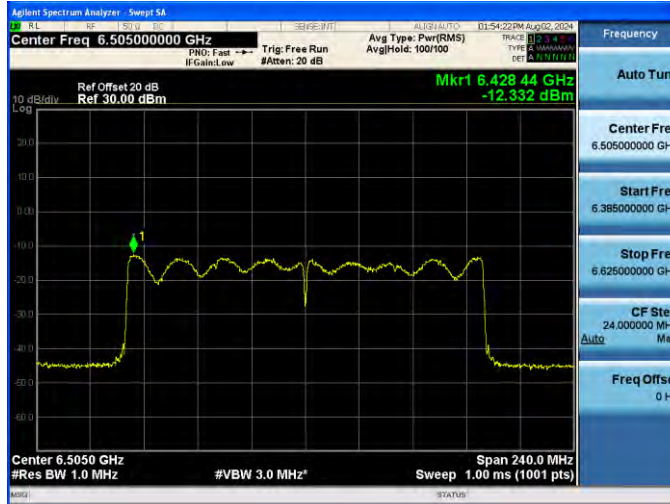


6505 MHz V

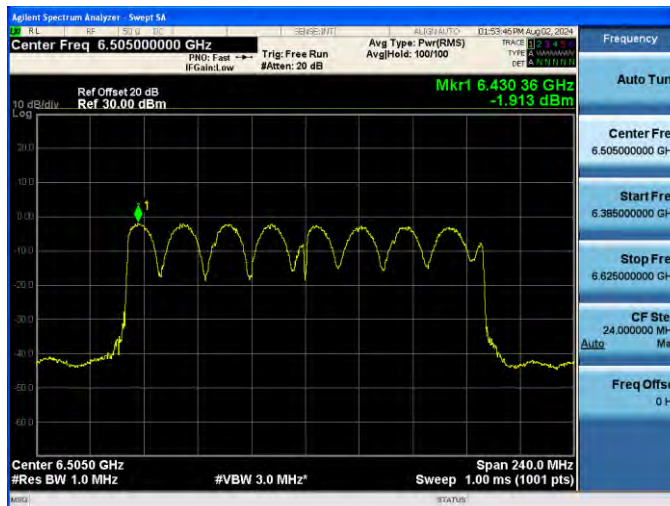


802.11be EHT160

6665 MHz H

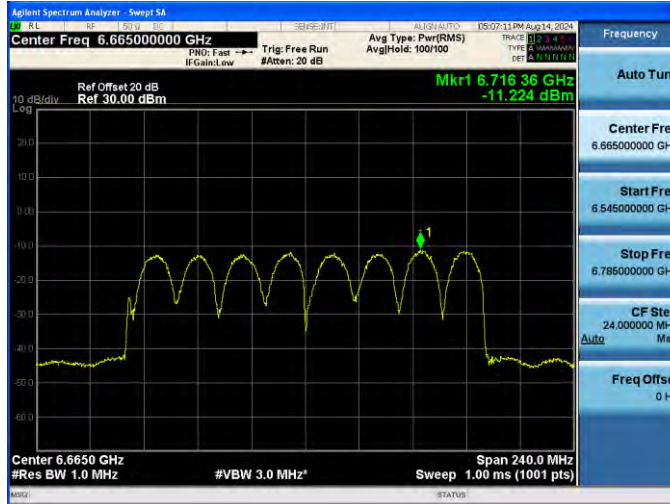


6665 MHz V

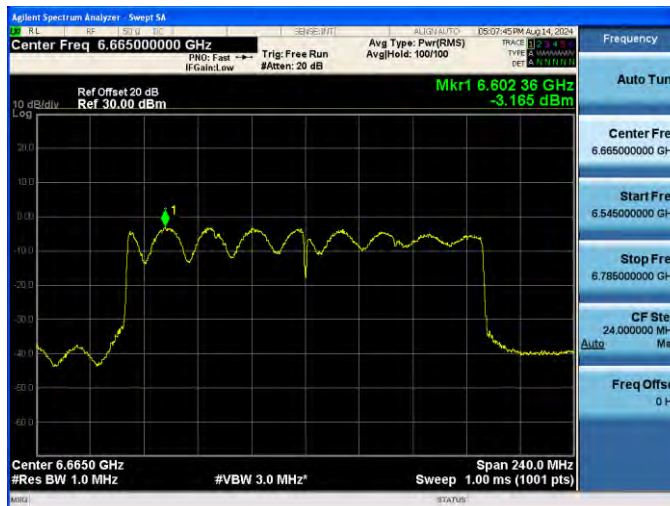


802.11be EHT160

6825 MHz H

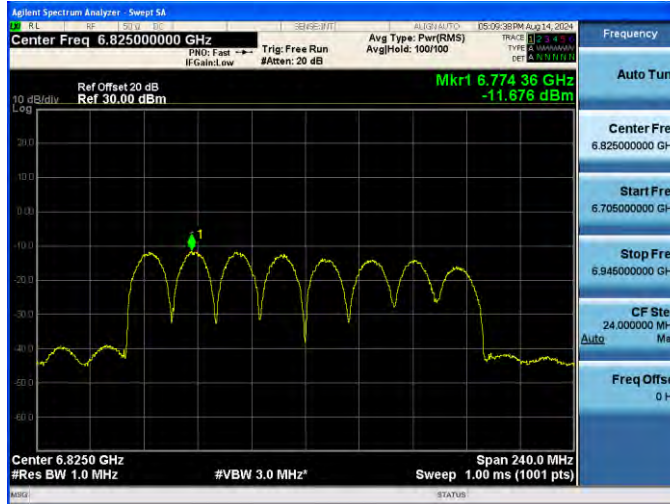

6825 MHz V

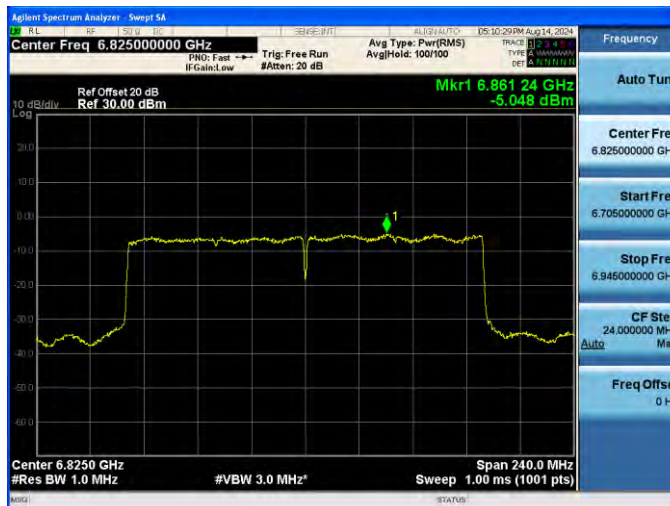


802.11be EHT160

6985 MHz H



6985 MHz V

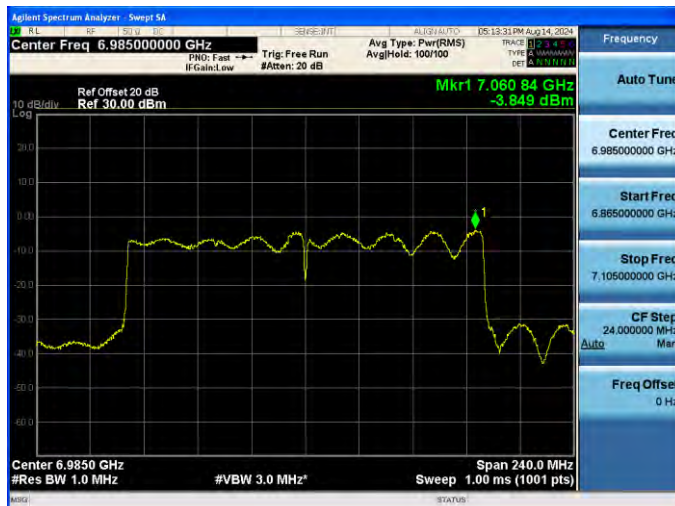

802.11be EHT320

6105 MHz H



6105 MHz V

