



# FCC Test Report

**Equipment** : AC800 Selectable Dual Band VPN Business Router  
**Brand Name** : D-Link  
**Model No.** : DSR-500AC  
**FCC ID** : KA2SR500ACA1  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DTS  
**Applicant** : D-Link Corporation  
17595 Mt. Herrmann, Fountain Valley, CA 92708 U.S.A

The product sample received on Aug. 27, 2014 and completely tested on Jan. 05, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
James Fan / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	7
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	9
2.4	The Worst Case Measurement Configuration .....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>12</b>
3.1	AC Power-line Conducted Emissions .....	12
3.2	6dB Bandwidth.....	15
3.3	RF Output Power .....	17
3.4	Power Spectral Density .....	21
3.5	Emissions in non-restricted frequency bands.....	24
3.6	Transmitter Radiated Unwanted Emissions .....	37
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>66</b>
	<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1-A5</b>



### Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.3751190MHz 48.89 (Margin 9.50dB) – QP 45.20 (Margin 3.19dB) – AV	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 20M: 7.61 / 40M: 35.71	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 26.58	Power [dBm]: 30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]: -3.58	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 20dB below the highest power	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 2390 MHz 52.98 (Margin 1.02dB) – AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



### Revision History

Report No.	Version	Description	Issued Date
FR4N2636AC	Rev. 01	Initial issue of report	Feb. 04, 2015
FR4N2636AC	Rev. 02	Modify ANSI C63.10 version	May 21, 2015

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information					
<b>Internal antenna</b>					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)
2400-2483.5	b	2412-2462	1-11 [11]	2	21.11
2400-2483.5	g	2412-2462	1-11 [11]	2	26.54
2400-2483.5	HT20	2412-2462	1-11 [11]	2	26.58
2400-2483.5	HT40	2422-2452	3-9 [7]	2	19.49
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.					

### 1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input checked="" type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input checked="" type="checkbox"/>	RF connector provided
<input checked="" type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information					
No.	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
			2400~2483.5	5150~5250	5725~5850
1	Dipole	R-SMA	2	2	2



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 99.53% - IEEE 802.11b	0.02
<input checked="" type="checkbox"/> 91.77% - IEEE 802.11g	0.37
<input checked="" type="checkbox"/> 96.13% - IEEE 802.11n (HT20)	0.17
<input checked="" type="checkbox"/> 93.50% - IEEE 802.11n (HT40)	0.29

1.1.5 EUT Operational Condition

Power Supply Type	12Vdc from adapter
-------------------	--------------------

## 1.2 Accessories and Support Equipment

Accessories		
No.	Equipment	Description
1	AC Adapter	Brand: APD Model: DA-30P12 I/P: 100-240Vac, 50/60Hz, 0.8A Max O/P: 12Vdc, 2.5A DC line: 1.47m non-shielded w/o core

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	Latitude E6440	DoC
2	Notebook	DELL	Latitude E6440	DoC
3	USB 2.0 Flash	hp	V225w	---

Note: No.3 was provided by applicant.

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074 v03r02
- ◆ FCC KDB 662911 v02r01
- ◆ FCC KDB 412172 v01

Note: FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Mark Liao	20°C / 63%	Jan. 05, 2015
AC Conduction	CO04-HY	Skys Huang	22°C / 54%	Dec. 15, 2014
Radiated Emission	03CH03-HY	Jack Li	20-26°C / 64-65%	Aug. 27 ~ Dec. 12, 2014
Test site registered number [643075] with FCC Test site registered number [4086B-1] with IC				

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS
11b	2	1-11 Mbps	1 Mbps
11g	2	6-54 Mbps	6 Mbps
HT20	2	MCS 0-15	MCS 0
HT40	2	MCS 0-15	MCS 0

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz)
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT-40)	2422-(F4), 2437-(F5), 2452-(F6)




### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software	ART2						
Test Software Version	ver_4_9_802_1_CS_Bin						
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b,1-11Mbps	2	15	14.5	14.5	--	--	--
11g,6-54Mbps	2	13	22	14	--	--	--
HT20,M0-15	2	12	21	12	--	--	--
HT40,M0-15	2	--	--	--	10	12	10


## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, 6dB bandwidth, Power Spectral Density
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	11b, 11g, HT20, HT40
<b>Operating Mode</b>	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
<b>User Position</b>	<input checked="" type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
<b>Operating Mode</b>	<input checked="" type="checkbox"/> 1. AC Power & Radio link (WLAN)		
<b>Modulation Mode</b>	11b, 11g, HT20, HT40		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			

## 2.5 Test Setup Diagram

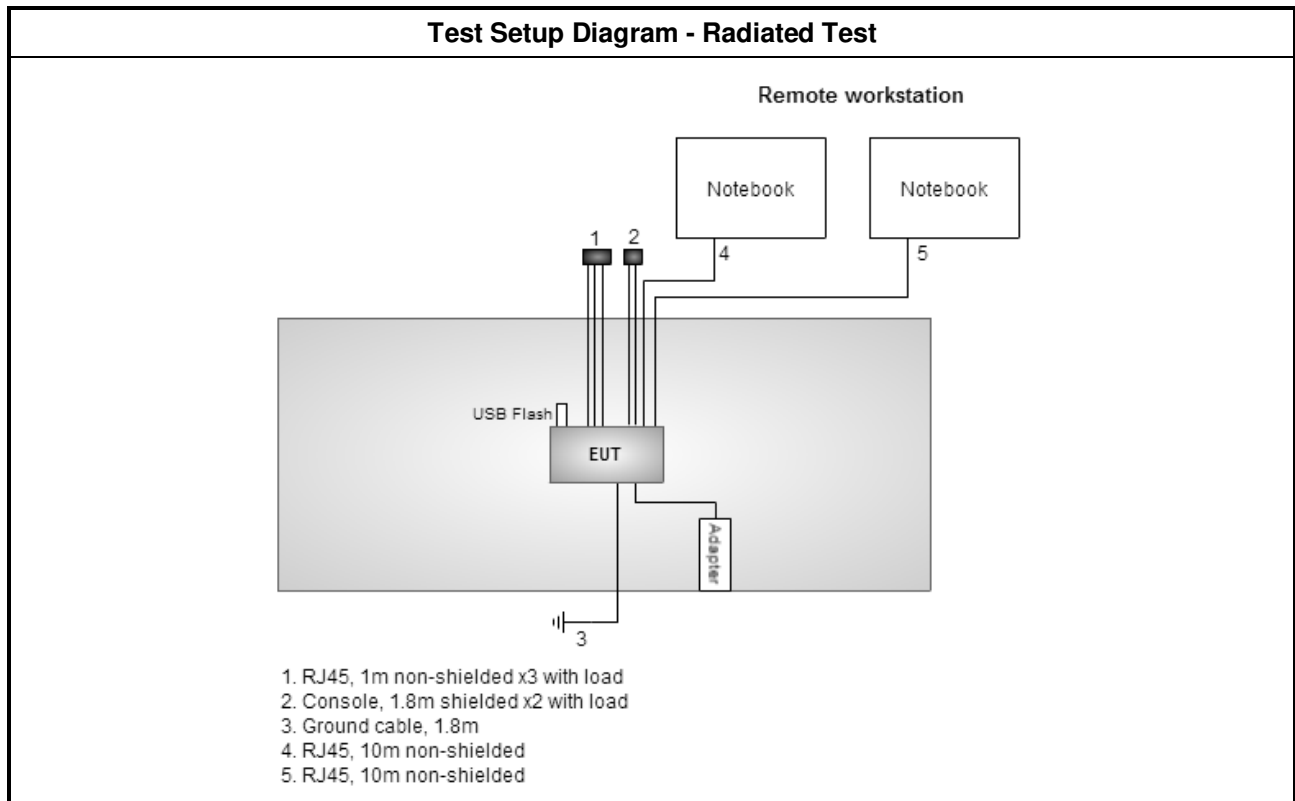

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 – 56 *	56 – 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

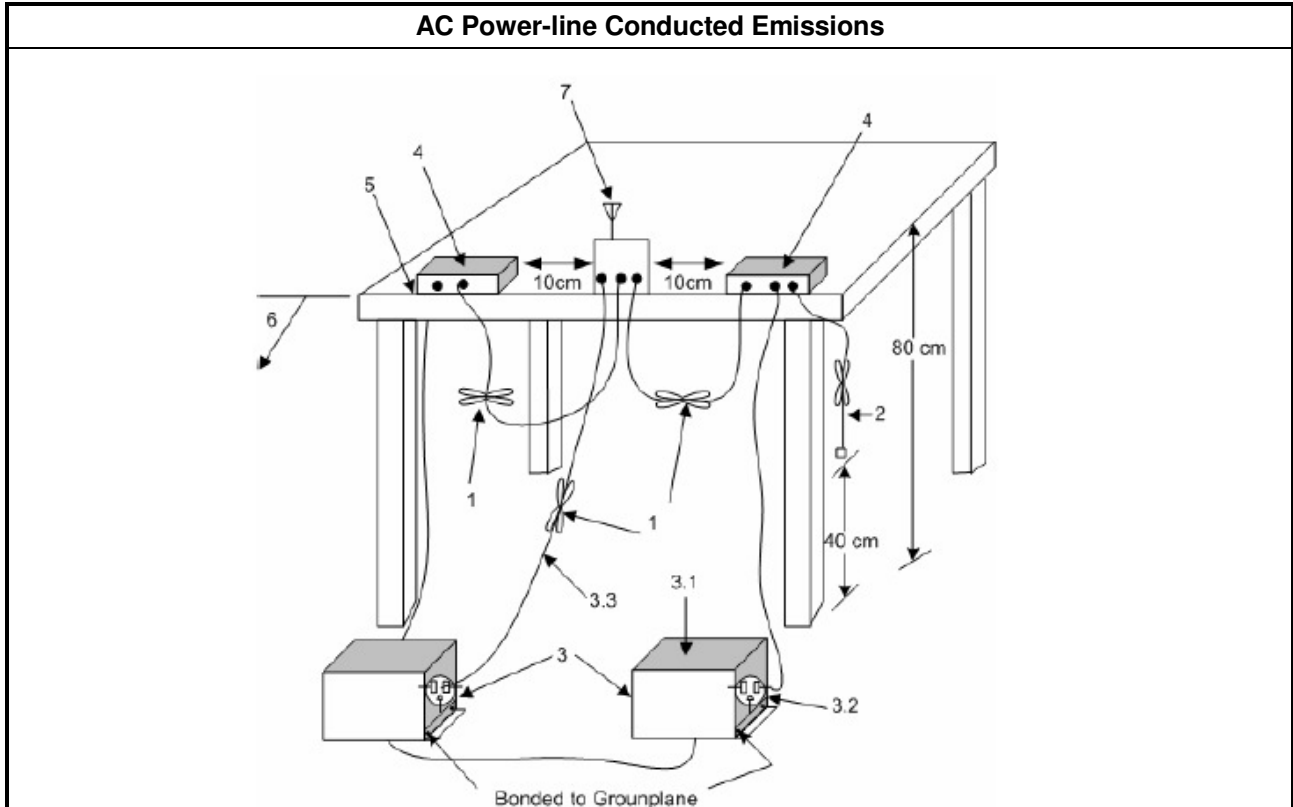


### 3.1.5 Test Result of AC Power-line Conducted Emissions

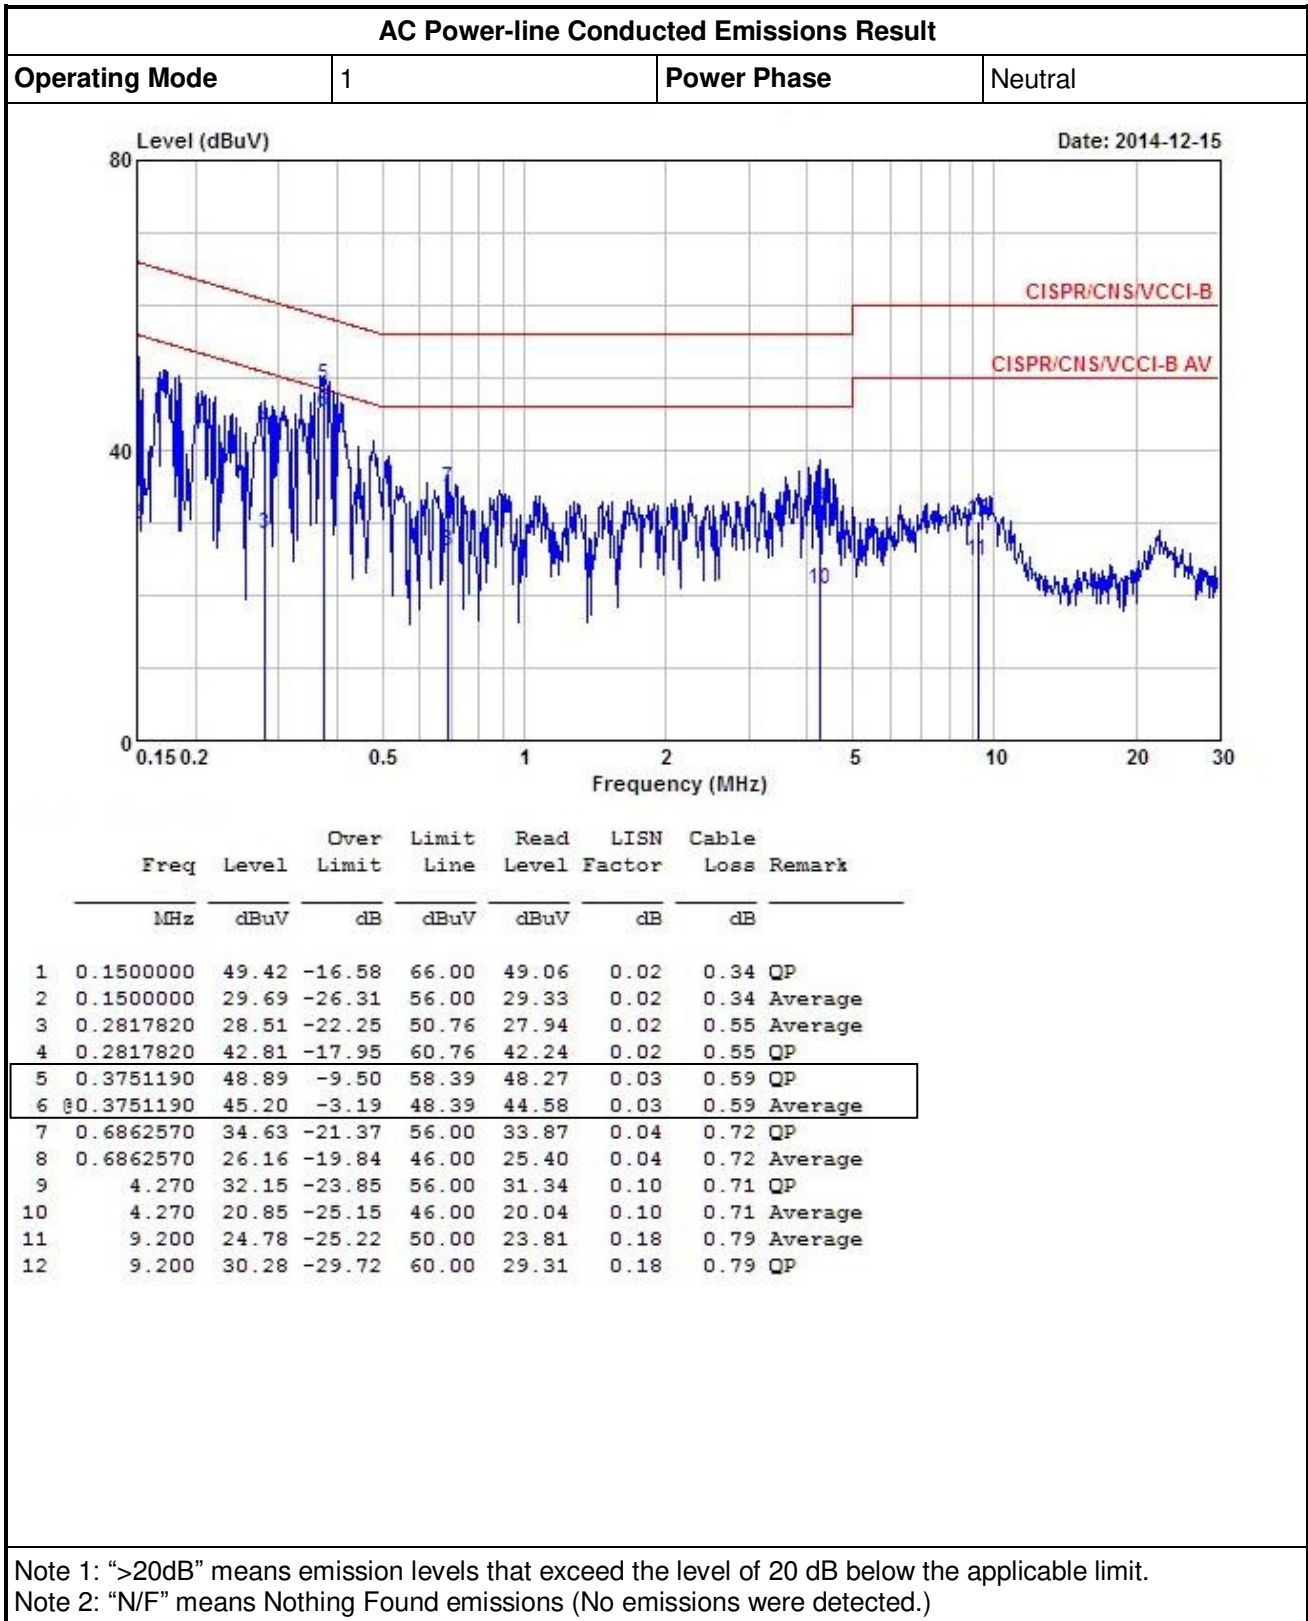



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
----------------	---	-------------	------

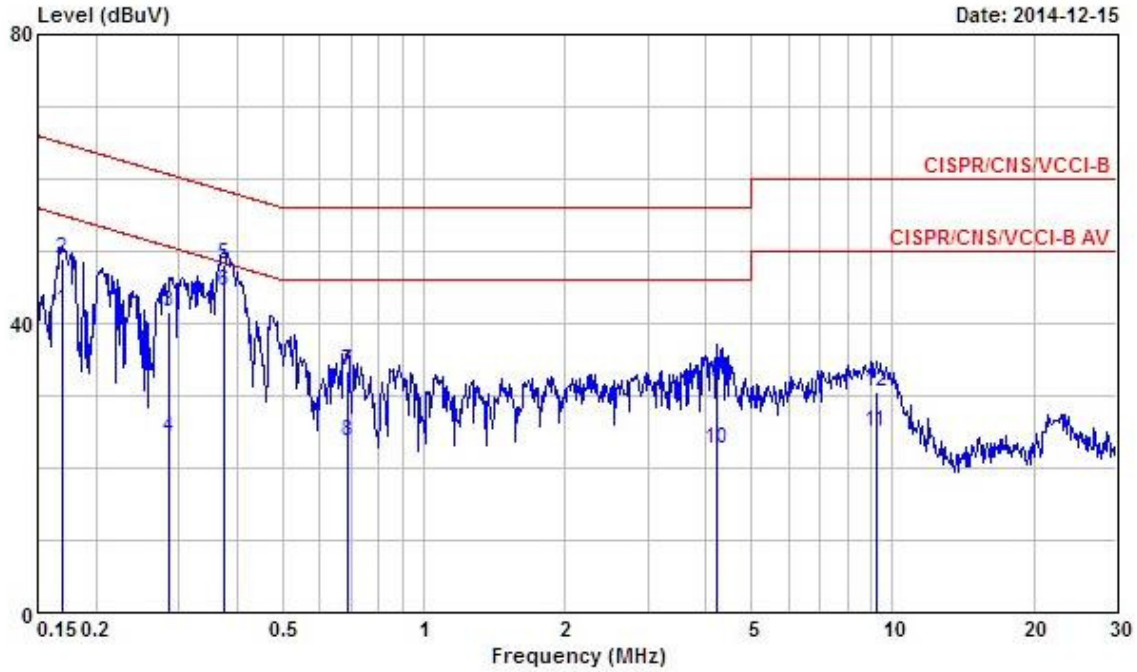

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1694400	41.76	-13.23	54.99	41.32	0.03	0.41	Average
2	0.1694400	49.01	-15.98	64.99	48.57	0.03	0.41	QP
3	0.2862970	41.58	-19.05	60.63	41.00	0.03	0.55	QP
4	0.2862970	24.26	-26.37	50.63	23.68	0.03	0.55	Average
5	0.3751190	48.26	-10.13	58.39	47.64	0.03	0.59	QP
6	0.3751190	44.58	-3.81	48.39	43.96	0.03	0.59	Average
7	0.6862570	33.39	-22.61	56.00	32.62	0.05	0.72	QP
8	0.6862570	23.81	-22.19	46.00	23.04	0.05	0.72	Average
9	4.200	31.94	-24.06	56.00	31.13	0.10	0.71	QP
10	4.200	22.57	-23.43	46.00	21.76	0.10	0.71	Average
11	9.200	25.07	-24.93	50.00	24.10	0.18	0.79	Average
12	9.200	30.63	-29.37	60.00	29.66	0.18	0.79	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.2 6dB Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	6 dB bandwidth $\geq$ 500 kHz.


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


#### 3.2.4 Test Setup

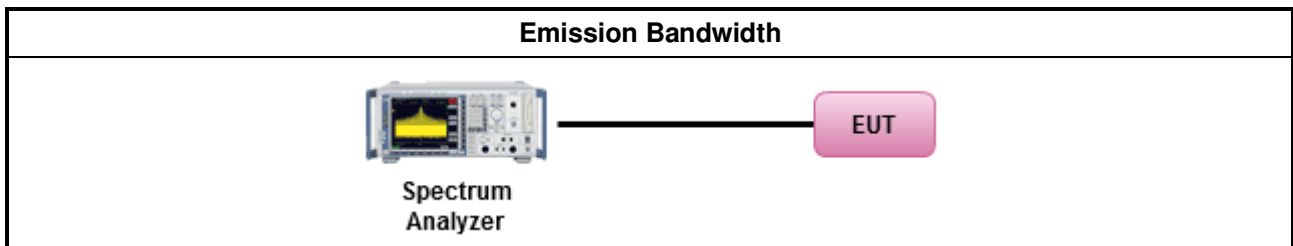

### 3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11b	2	2412	12.08	12.03	--	--	7.07	6.61	--	--
11b	2	2437	12.04	12.01	--	--	7.07	6.61	--	--
11b	2	2462	12.02	11.99	--	--	7.07	7.07	--	--
11g	2	2412	16.69	16.63	--	--	16.35	16.35	--	--
11g	2	2437	22.61	21.95	--	--	16.35	16.35	--	--
11g	2	2462	16.70	16.61	--	--	16.35	16.35	--	--
HT-20	2	2412	17.81	17.81	--	--	17.51	17.62	--	--
HT-20	2	2437	20.44	19.14	--	--	16.58	17.57	--	--
HT-20	2	2462	17.80	17.78	--	--	17.28	17.62	--	--
HT-40	2	2422	36.64	36.68	--	--	35.83	35.71	--	--
HT-40	2	2437	36.66	36.66	--	--	35.71	35.71	--	--
HT-40	2	2452	36.68	36.62	--	--	35.83	35.71	--	--
<b>Limit</b>			<b>N/A</b>				<b>≥500 kHz</b>			
<b>Result</b>			<b>Complied</b>							

Note 1: N<sub>TX</sub> = Number of Transmit Chains

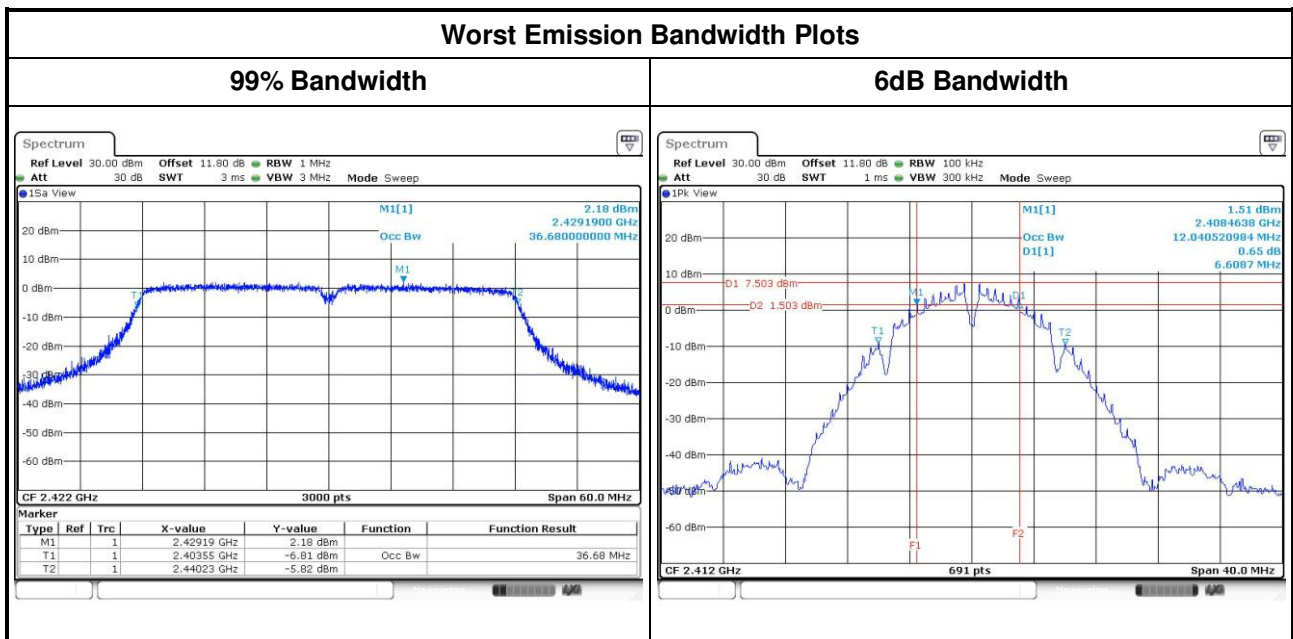



### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

RF Output Power Limit	
<b>Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
<input type="checkbox"/>	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
<input type="checkbox"/>	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.1.1 (RBW ≥ DTS BW).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.1.2 (Peak power meter)
<input checked="" type="checkbox"/>	Maximum Conducted Output Power ( Reference only)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 9.2.3.2 Method AVGPM-G (using a gated RF average power meter)
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

### 3.3.4 Test Setup

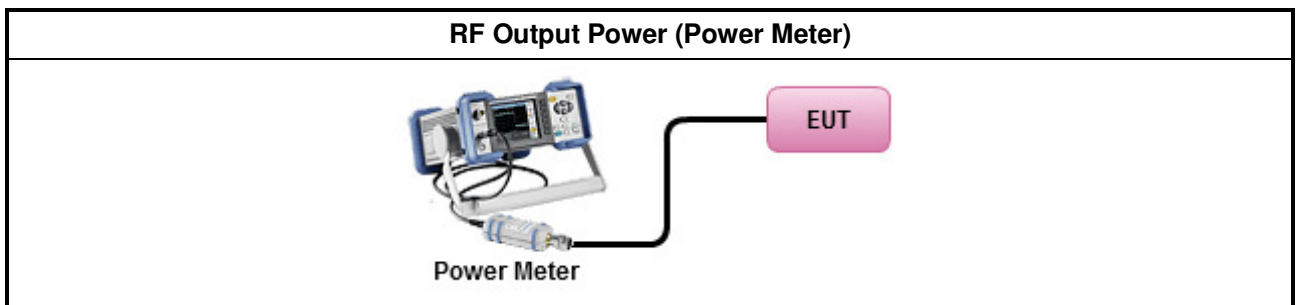



### 3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G <sub>ANT</sub> (dBi)		2	2	-	-
Modulation Mode	DG (dBi)	N <sub>TX</sub>	N <sub>SS</sub>	STBC	Array Gain (dB)
11b,1-11Mbps	2	2	1	-	-
11g,6-54Mbps	2	2	1	-	-
HT20,M0-15	2	2	1	-	-
HT40,M0-15	2	2	1	-	-

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Peak Conducted Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	2	2412	18.21	17.98	--	--	21.11	30.00	2.00	23.11	36.00
11b	2	2437	17.83	17.69	--	--	20.77	30.00	2.00	22.77	36.00
11b	2	2462	17.64	17.43	--	--	20.55	30.00	2.00	22.55	36.00
11g	2	2412	17.81	17.86	--	--	20.85	30.00	2.00	22.85	36.00
11g	2	2437	23.63	23.42	--	--	26.54	30.00	2.00	28.54	36.00
11g	2	2462	18.76	18.81	--	--	21.80	30.00	2.00	23.80	36.00
HT-20	2	2412	16.81	16.73	--	--	19.78	30.00	2.00	21.78	36.00
HT-20	2	2437	23.54	23.59	--	--	<b>26.58</b>	30.00	2.00	28.58	36.00
HT-20	2	2462	16.78	16.69	--	--	19.75	30.00	2.00	21.75	36.00
HT-40	2	2422	14.63	14.66	--	--	17.66	30.00	2.00	19.66	36.00
HT-40	2	2437	16.43	16.52	--	--	19.49	30.00	2.00	21.49	36.00
HT-40	2	2452	14.43	14.41	--	--	17.43	30.00	2.00	19.43	36.00
<b>Result</b>			<b>Complied</b>								

Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	2	2412	15.33	15.18	--	--	18.27	30.00	2.00	20.27	36.00
11b	2	2437	14.95	14.77	--	--	17.87	30.00	2.00	19.87	36.00
11b	2	2462	14.71	14.54	--	--	17.64	30.00	2.00	19.64	36.00
11g	2	2412	11.92	11.95	--	--	14.95	30.00	2.00	16.95	36.00
11g	2	2437	19.92	19.83	--	--	<b>22.89</b>	30.00	2.00	24.89	36.00
11g	2	2462	12.72	12.81	--	--	15.78	30.00	2.00	17.78	36.00
HT-20	2	2412	10.93	10.92	--	--	13.94	30.00	2.00	15.94	36.00
HT-20	2	2437	19.23	19.26	--	--	22.26	30.00	2.00	24.26	36.00
HT-20	2	2462	10.85	10.72	--	--	13.80	30.00	2.00	15.80	36.00
HT-40	2	2422	8.49	8.51	--	--	11.51	30.00	2.00	13.51	36.00
HT-40	2	2437	10.61	10.68	--	--	13.66	30.00	2.00	15.66	36.00
HT-40	2	2452	8.51	8.44	--	--	11.49	30.00	2.00	13.49	36.00
<b>Result</b>			<b>Complied</b>								

Note: AV power is for reference only.

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 v03r02, clause 10.2 Method PKPSD (RBW=3kHz; detector=peak)..
<input type="checkbox"/> Refer as FCC KDB 558074 v03r02, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 v03r02, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 558074 v03r02, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 v03r02, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N <sub>TX</sub> output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.


### 3.4.4 Test Setup

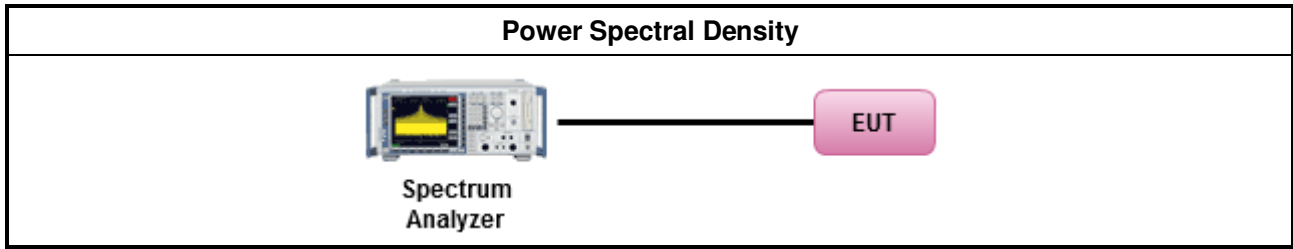

### 3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density (dBm/3kHz)	
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Sum Chain	Power Limit
11b	2	2412	-4.77	8
11b	2	2437	-4.03	8
11b	2	2462	-5.21	8
11g	2	2412	-11.19	8
11g	2	2437	-3.58	8
11g	2	2462	-9.93	8
HT-20	2	2412	-12.11	8
HT-20	2	2437	-4.23	8
HT-20	2	2462	-11.65	8
HT-40	2	2422	-17.75	8
HT-40	2	2437	-15.69	8
HT-40	2	2452	-17.82	8
<b>Result</b>			<b>Complied</b>	

Note: Test result is bin-by-bin summing measured value of each TX port.

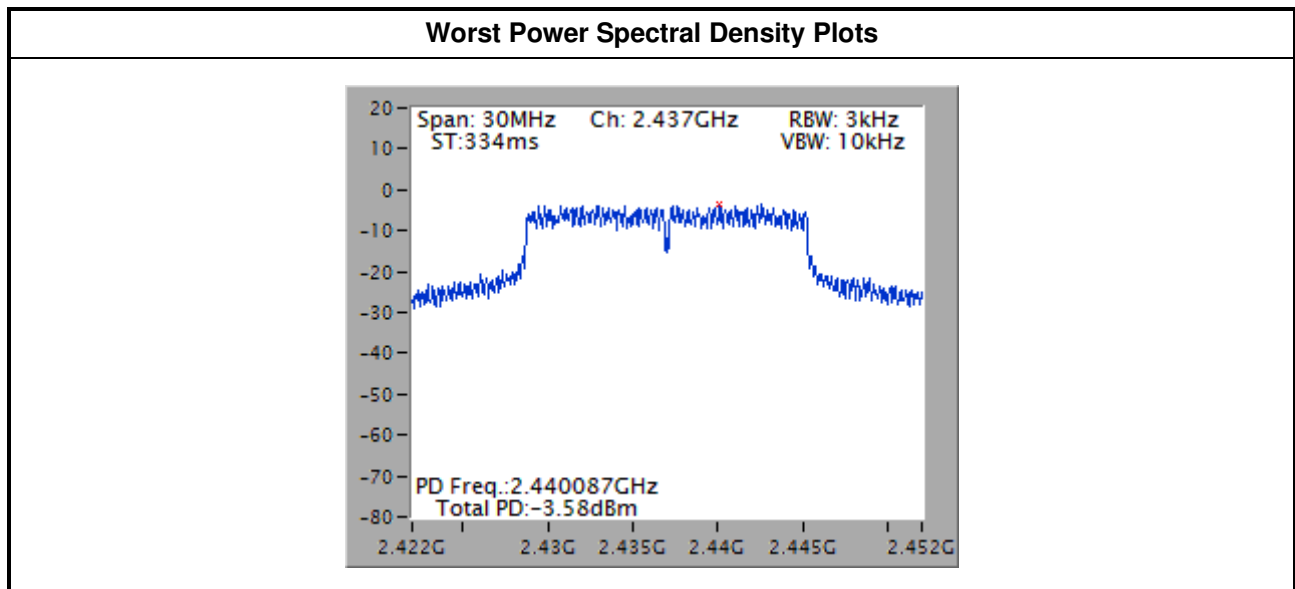

### 3.5 Emissions in non-restricted frequency bands

#### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures


##### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

##### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

#### 3.5.4 Test Setup

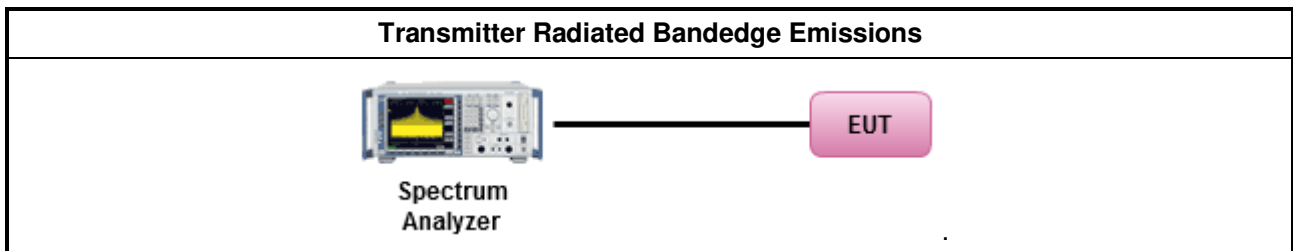

#### 3.5.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding  $10 \log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.







### 3.5.6 Test Result of Emissions in non-restricted frequency bands

802.11b

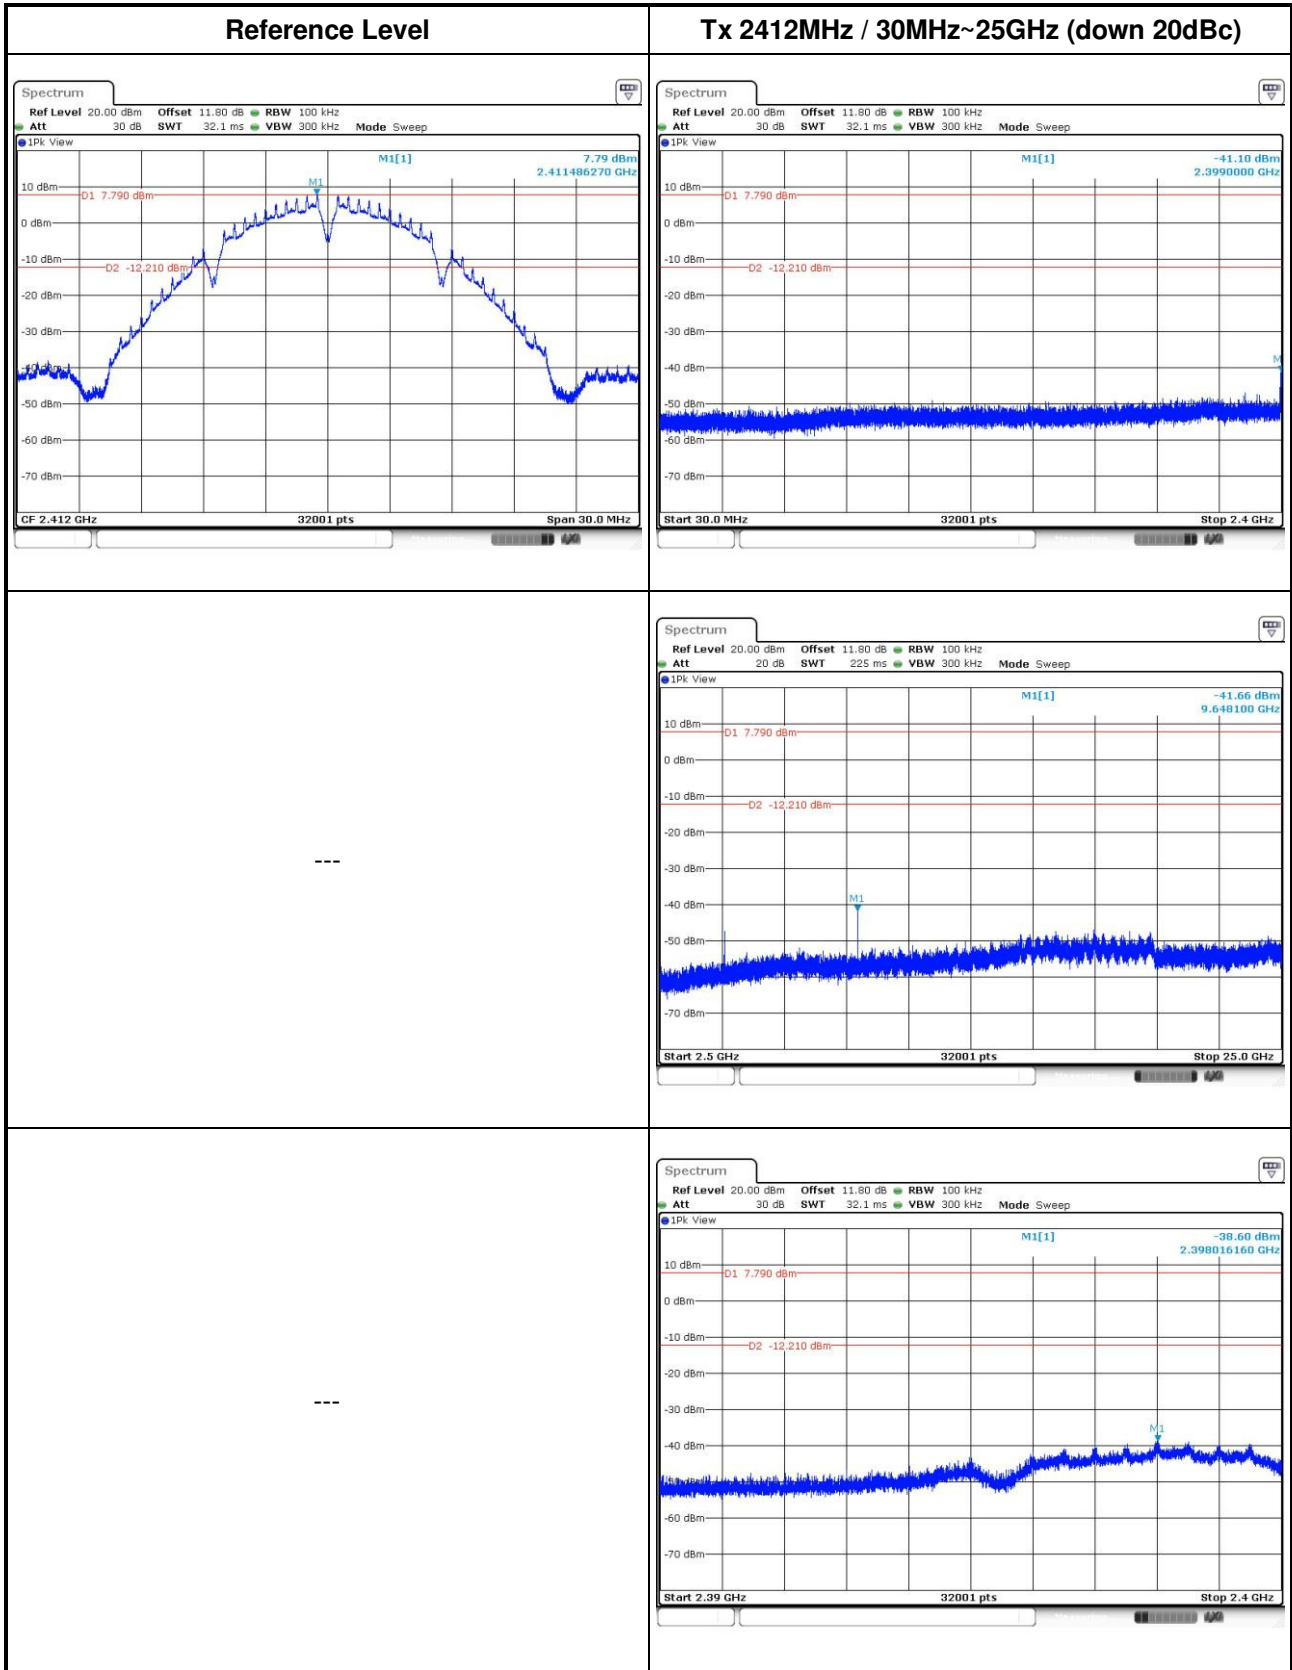


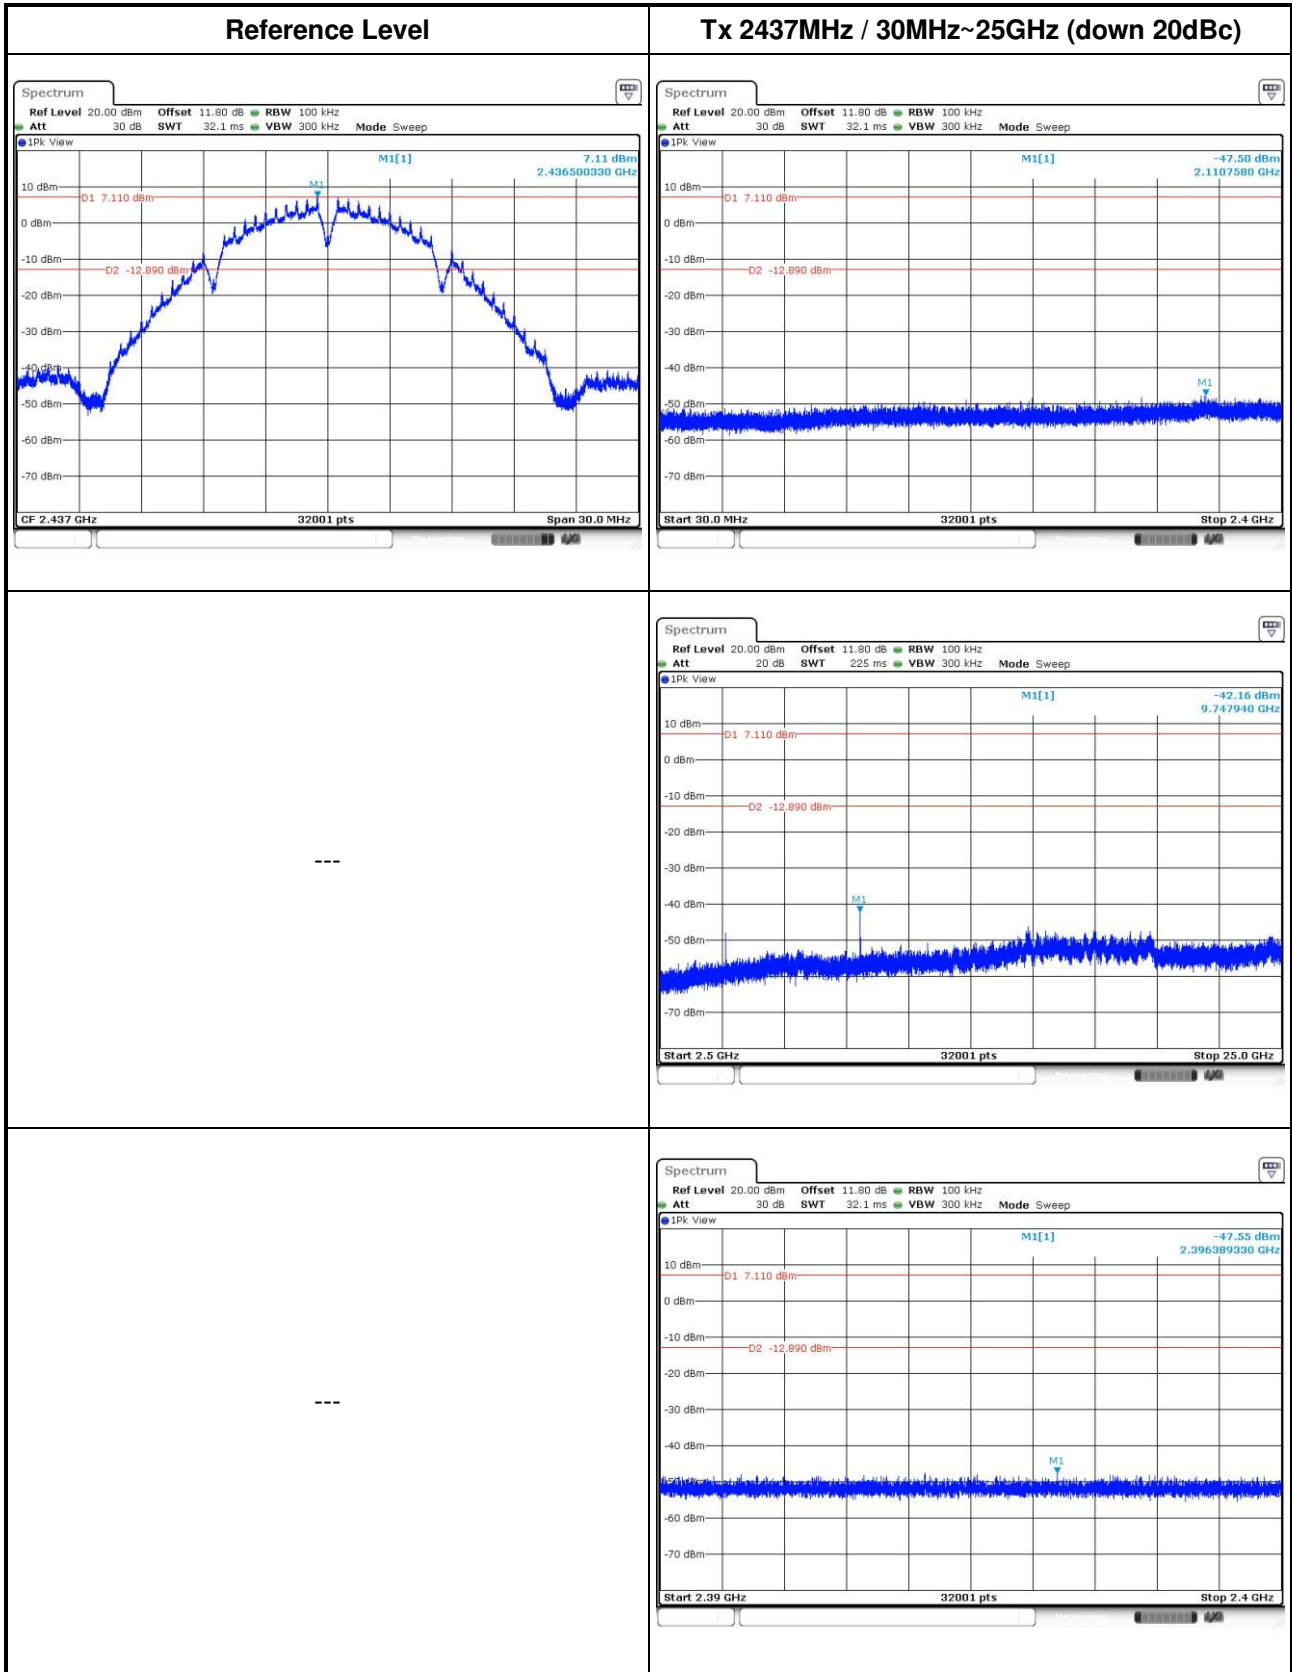


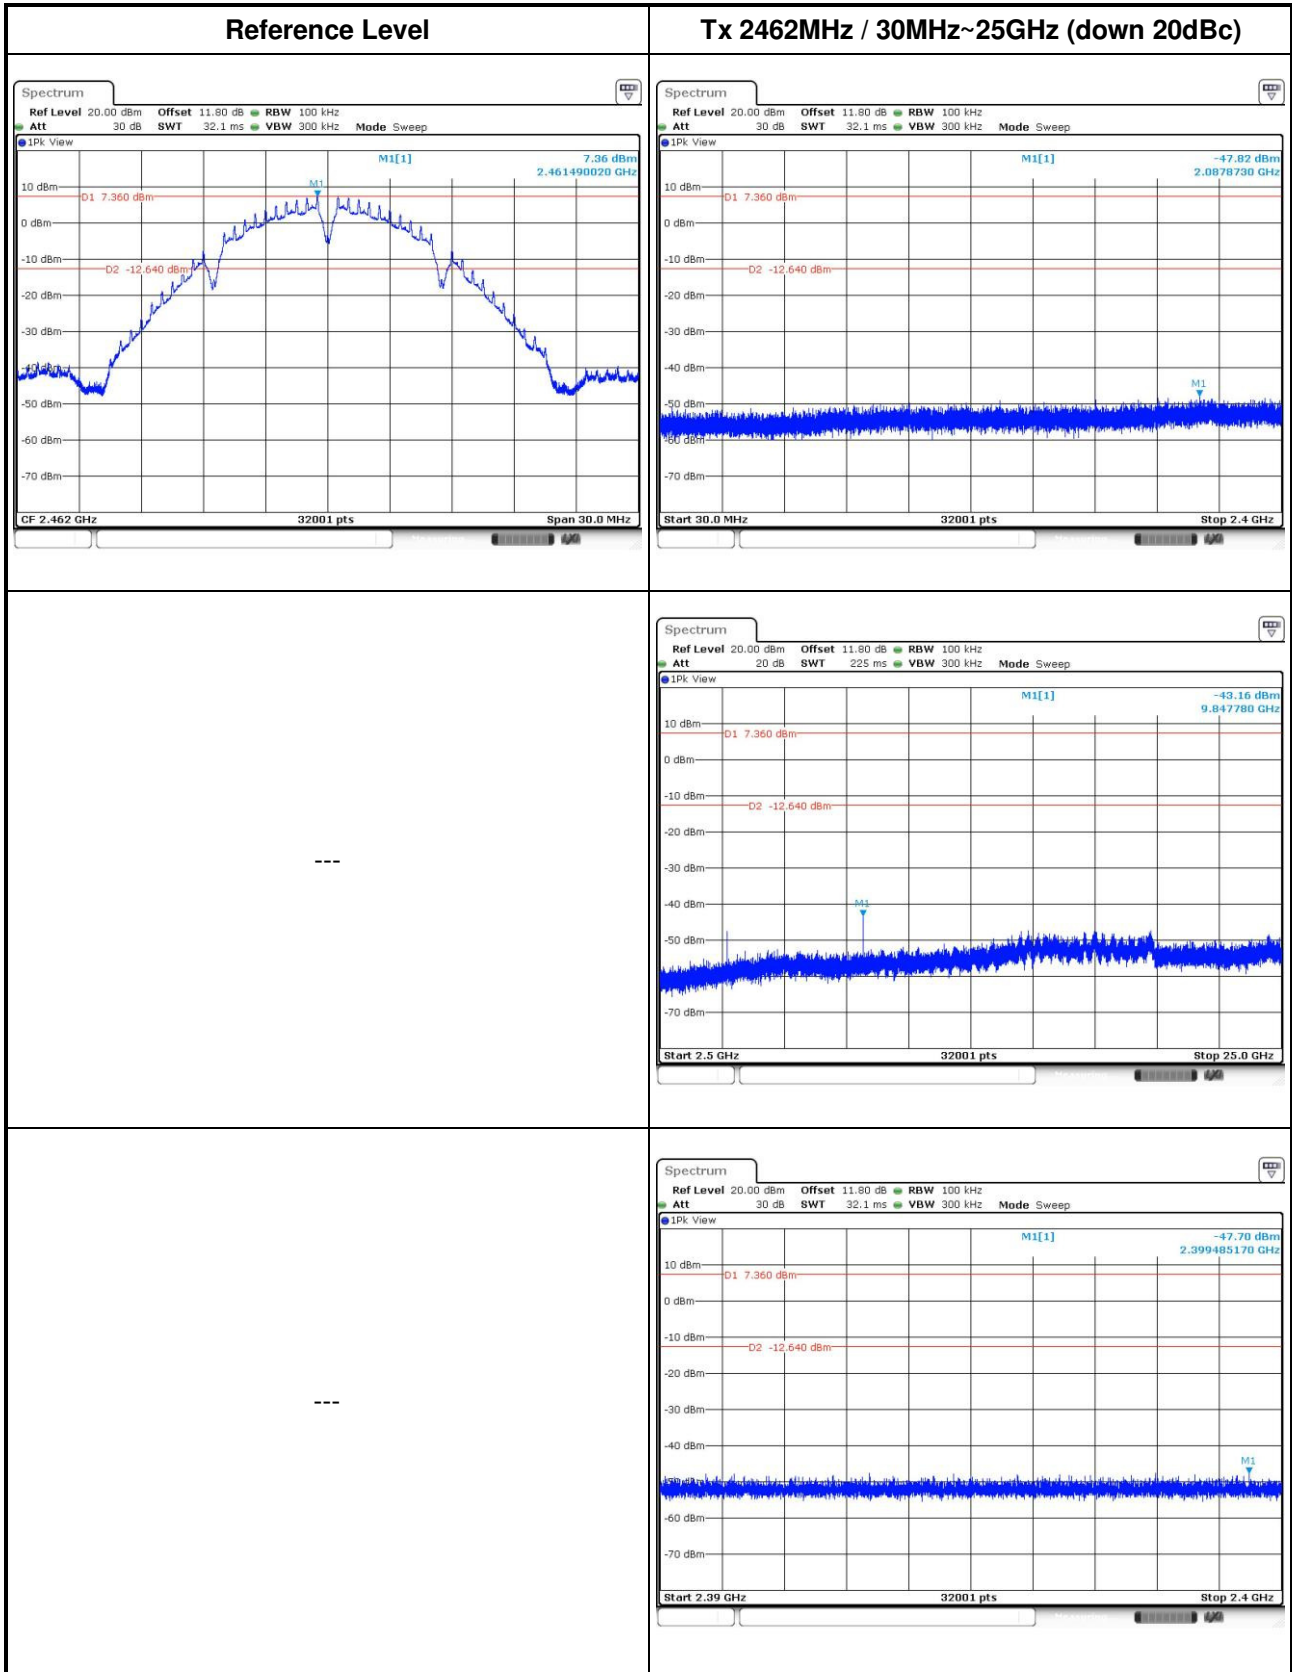




802.11g

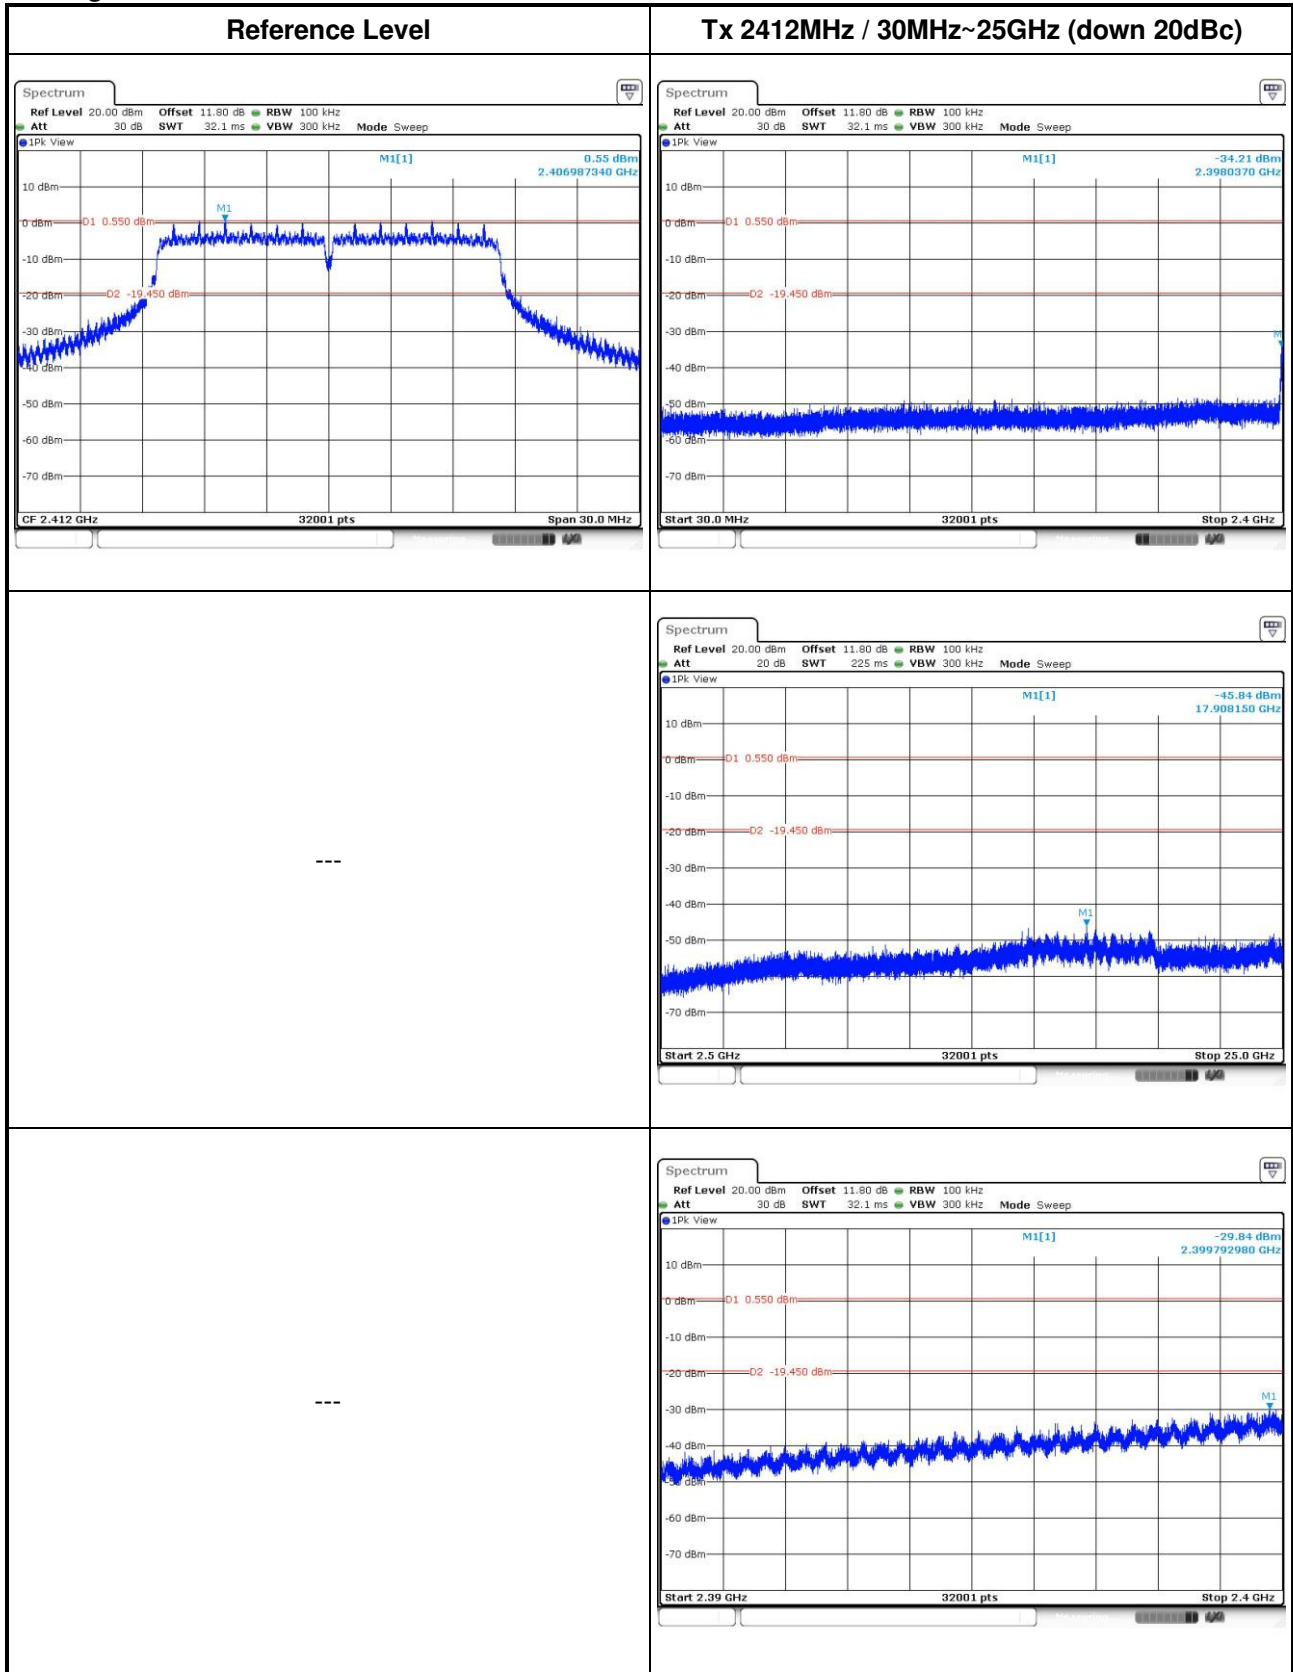


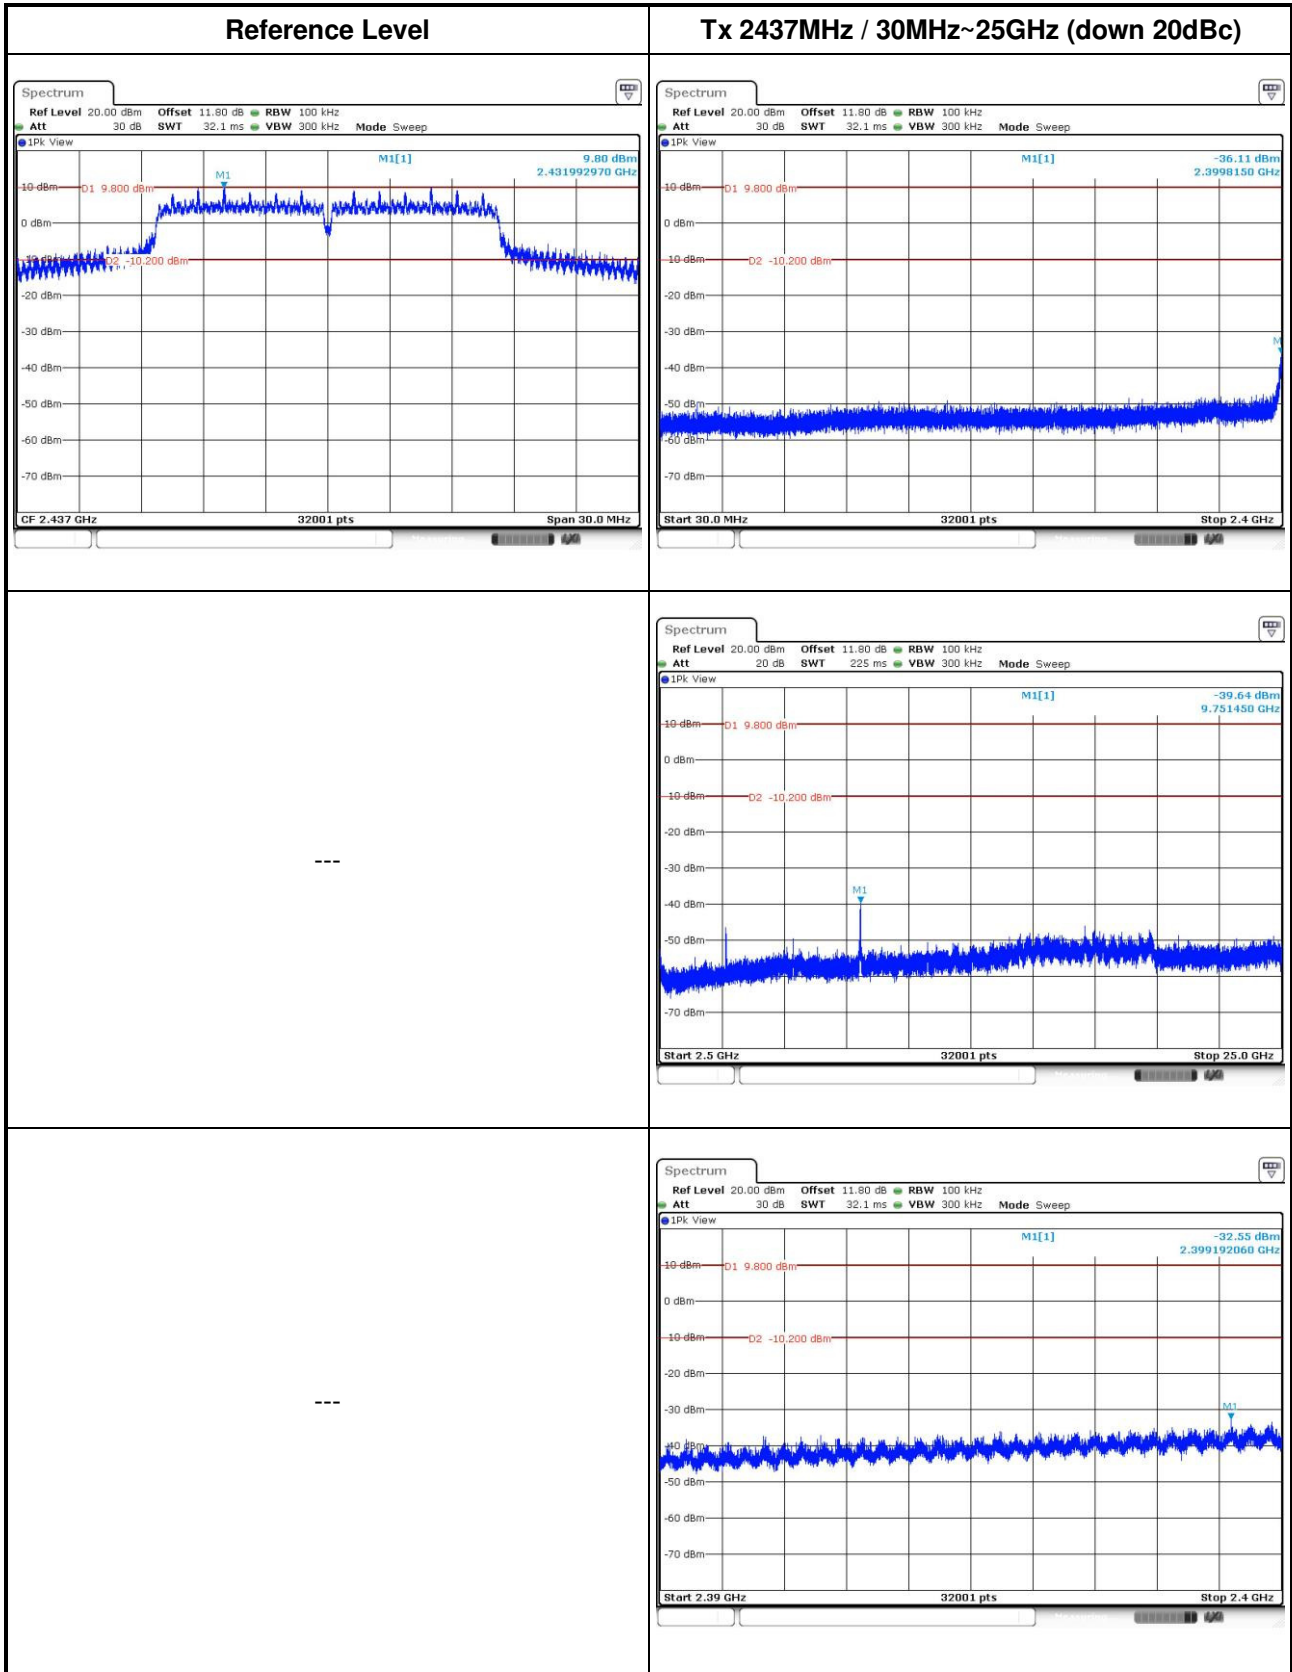


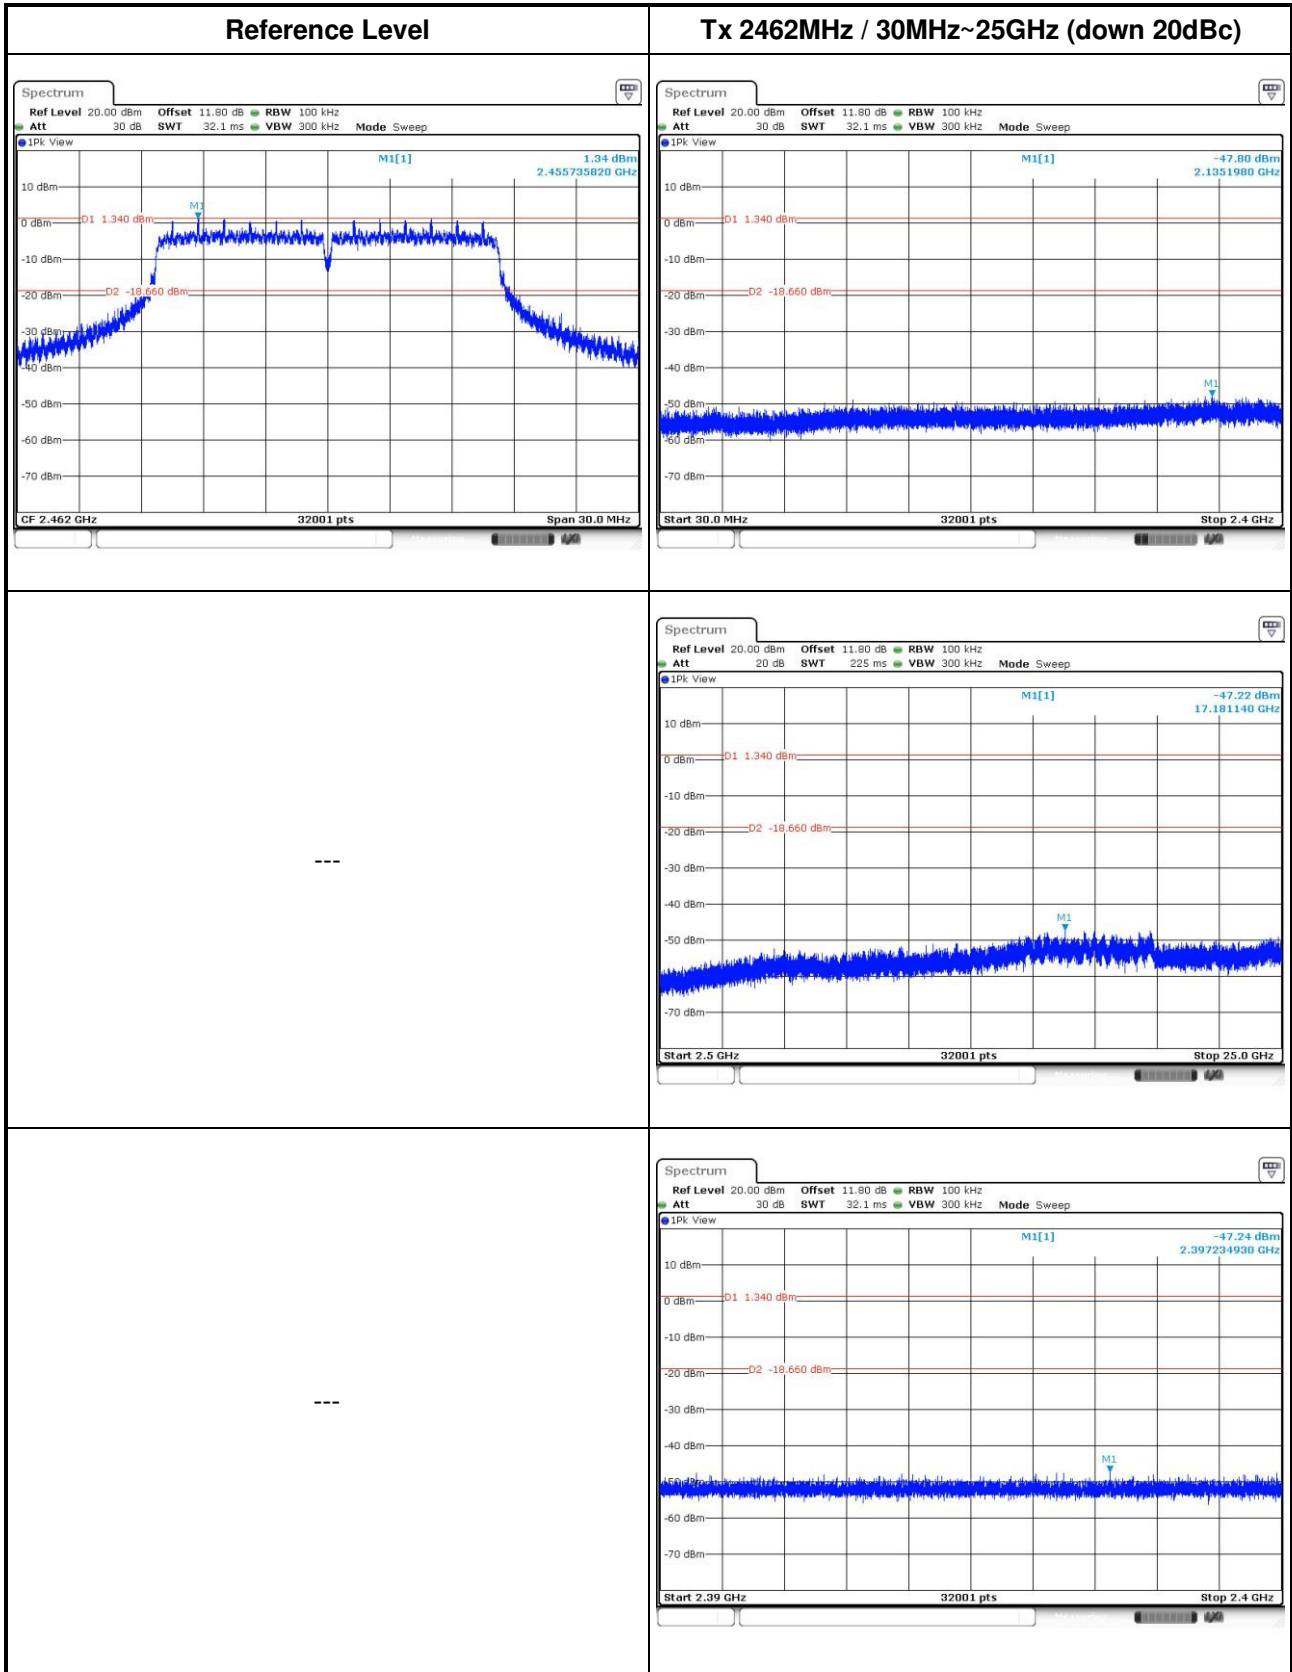




802.11n HT20

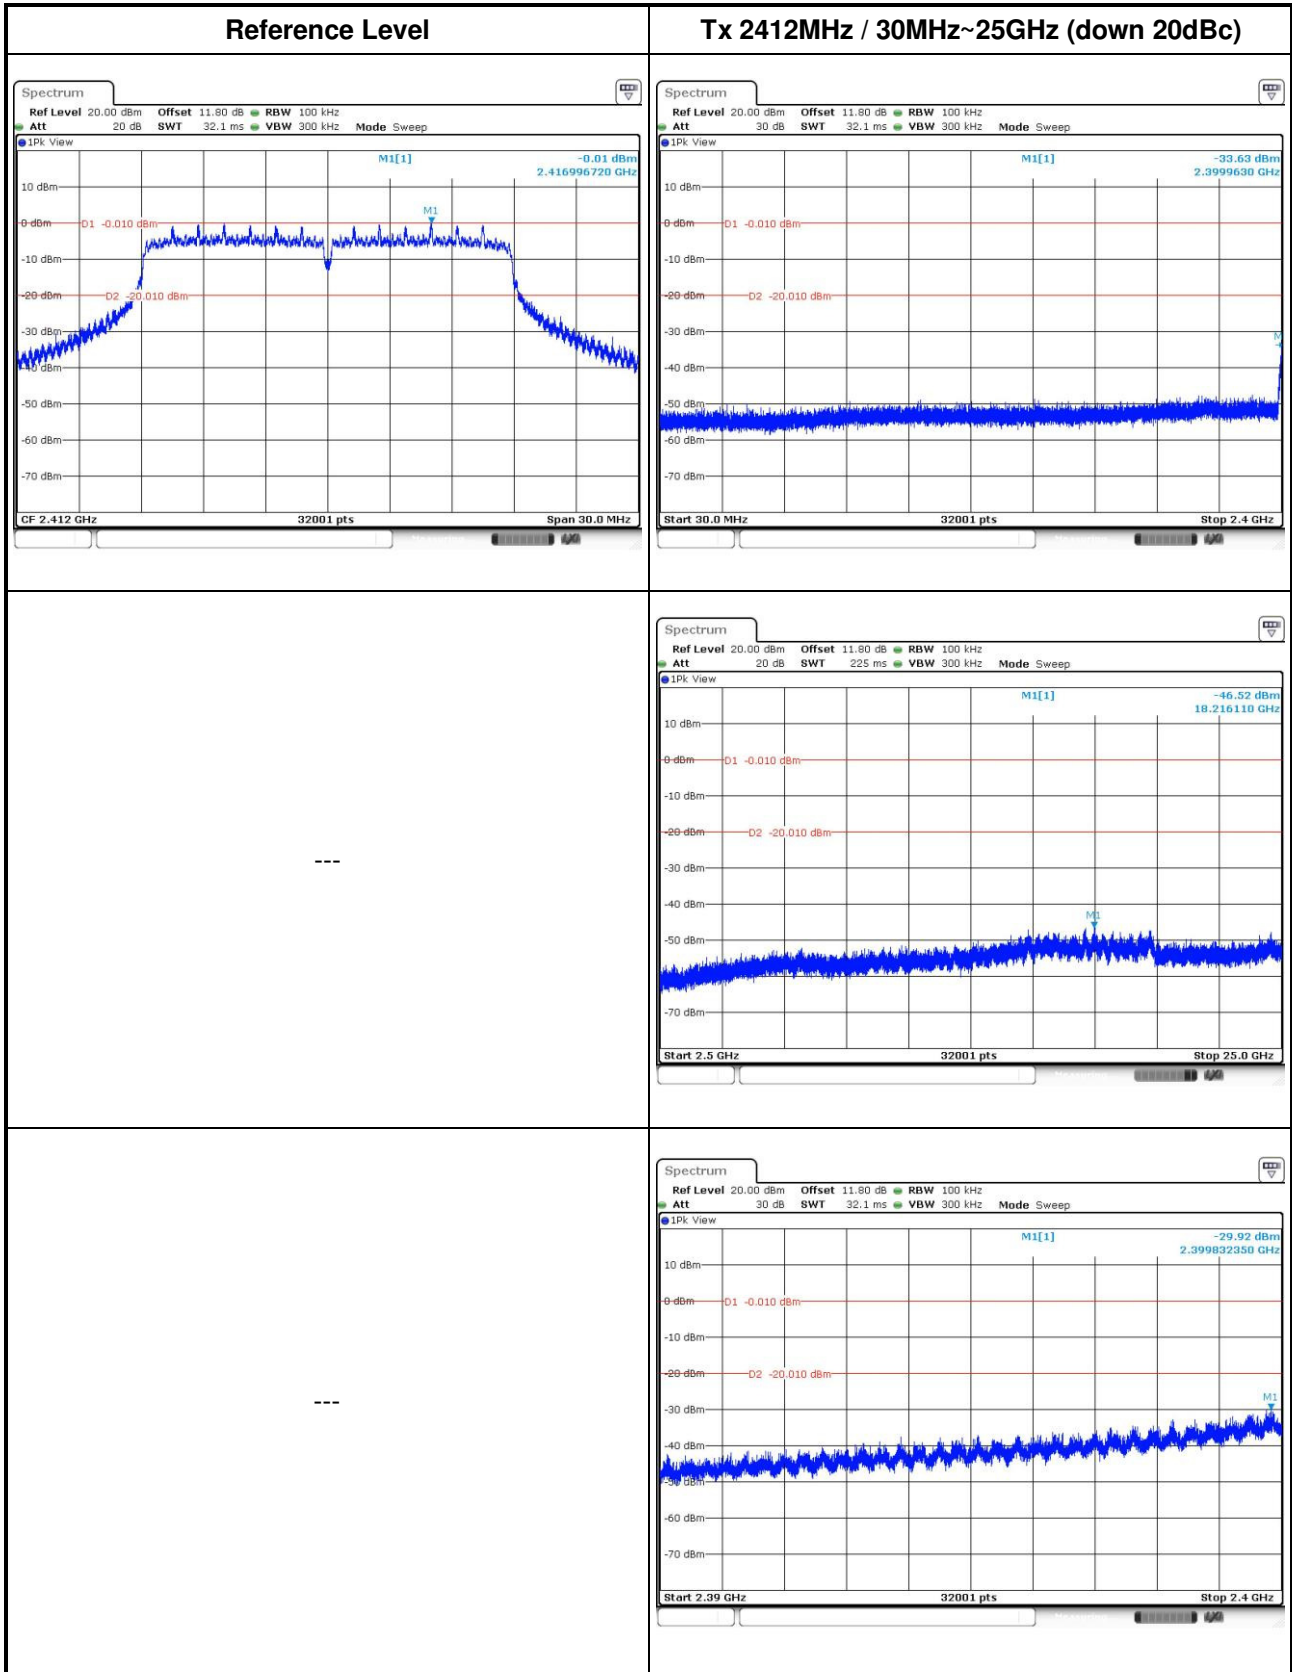

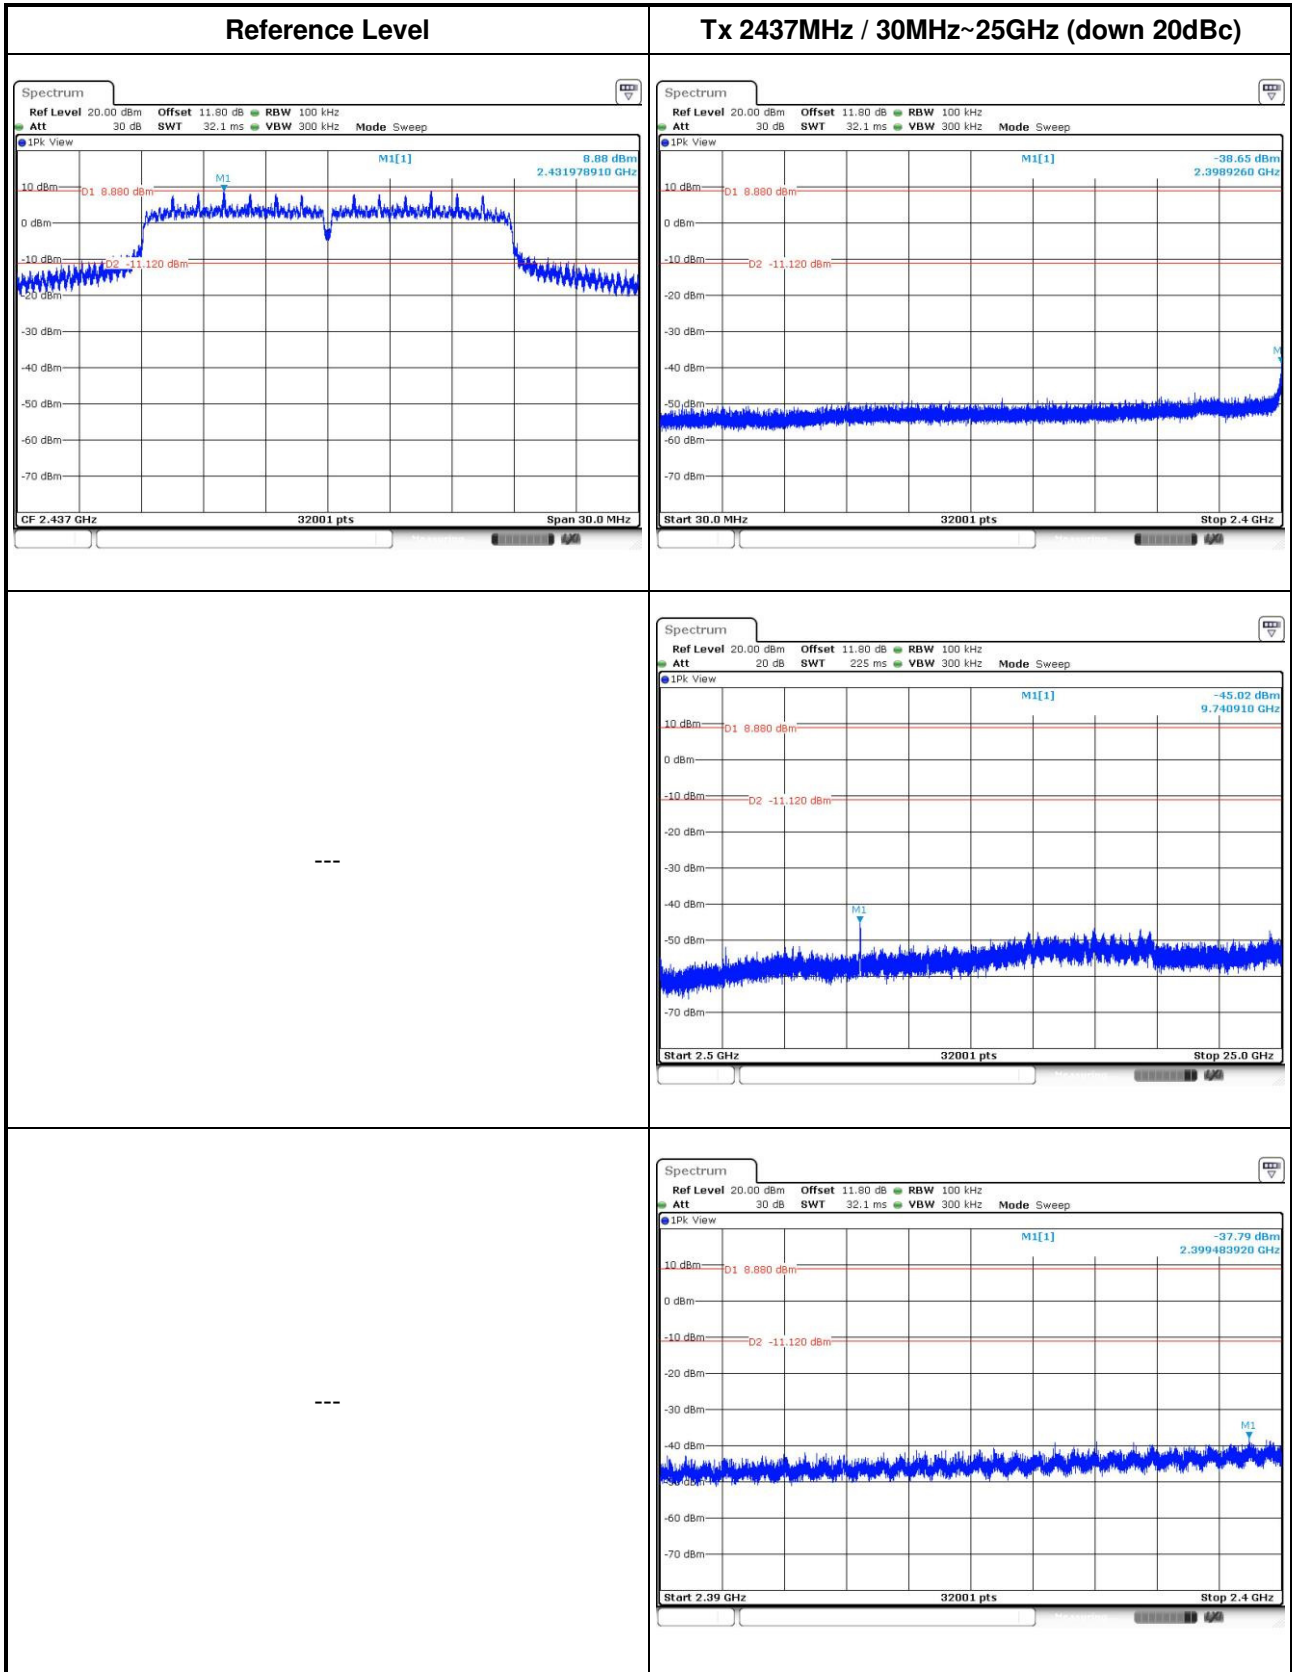





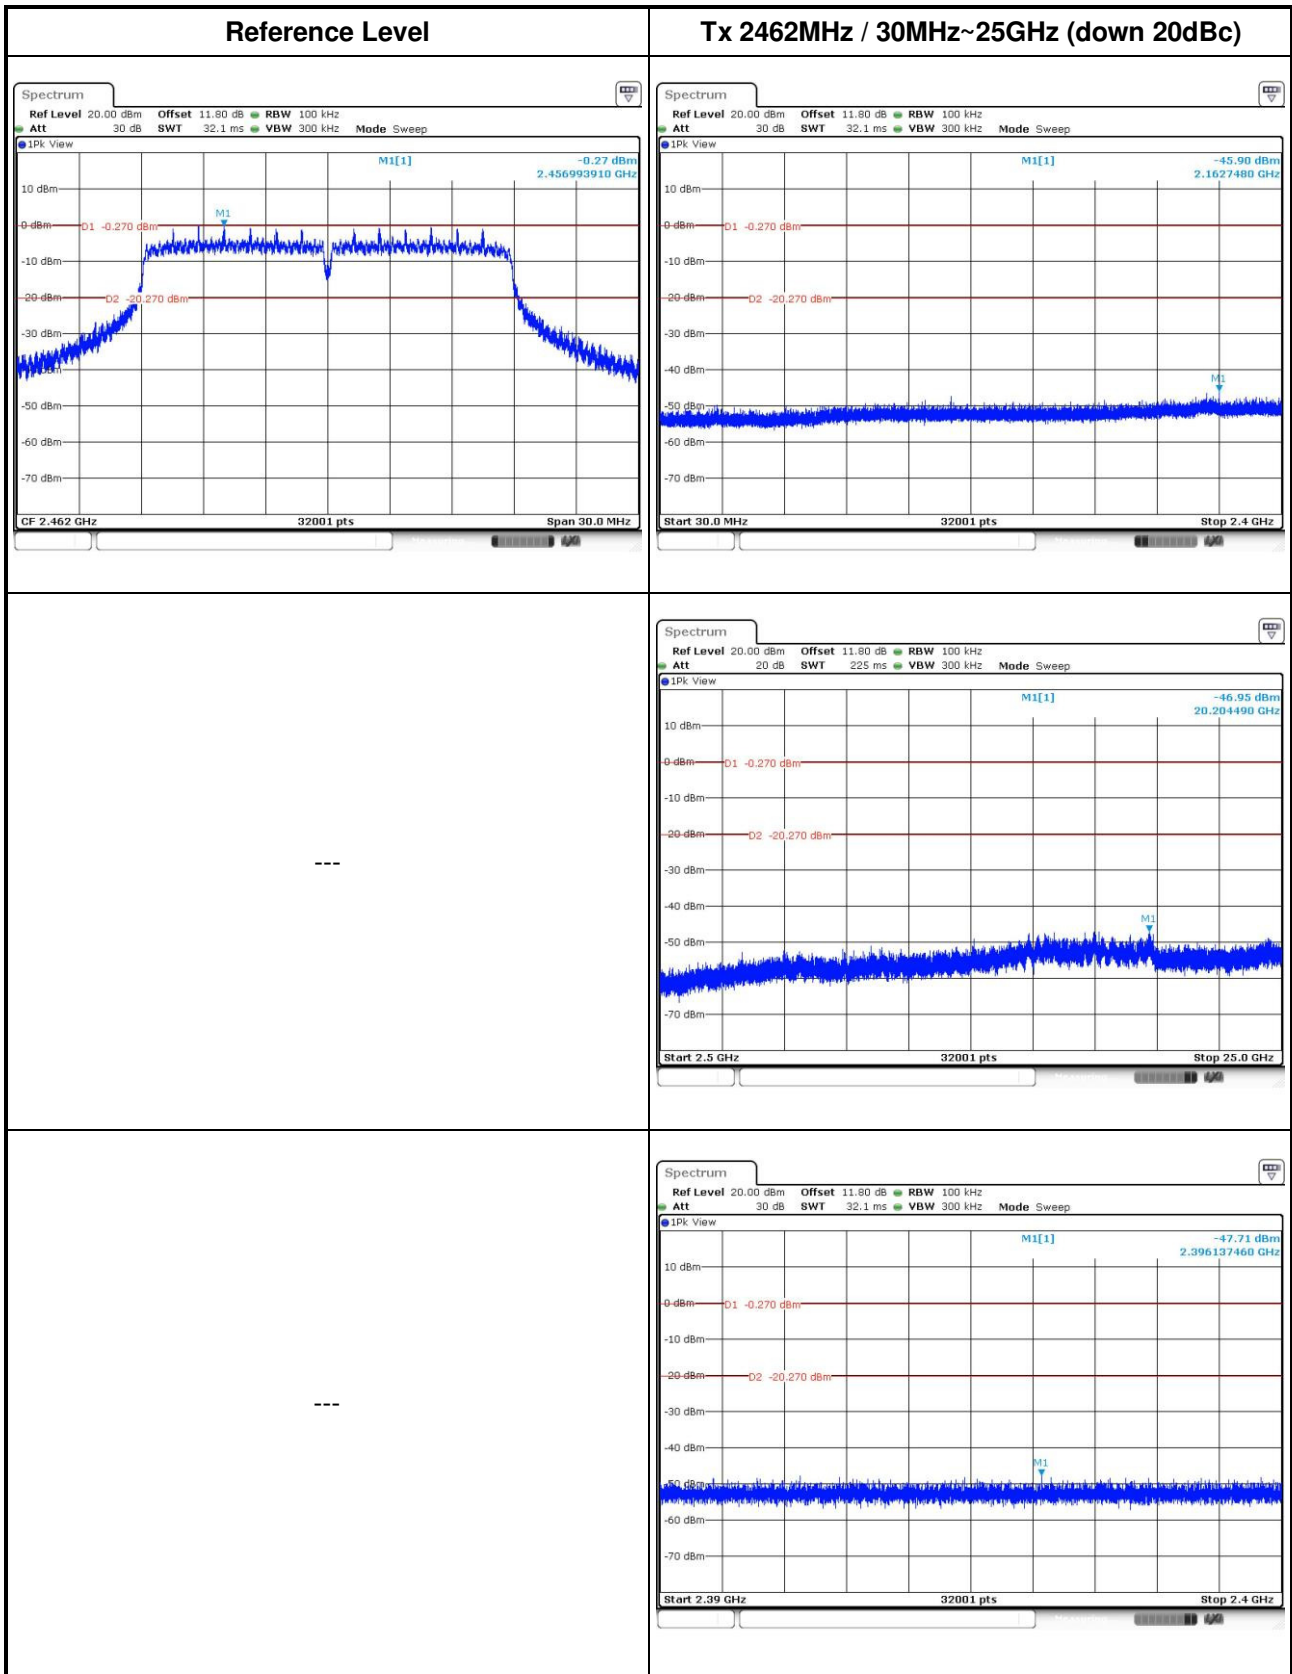




802.11n HT40

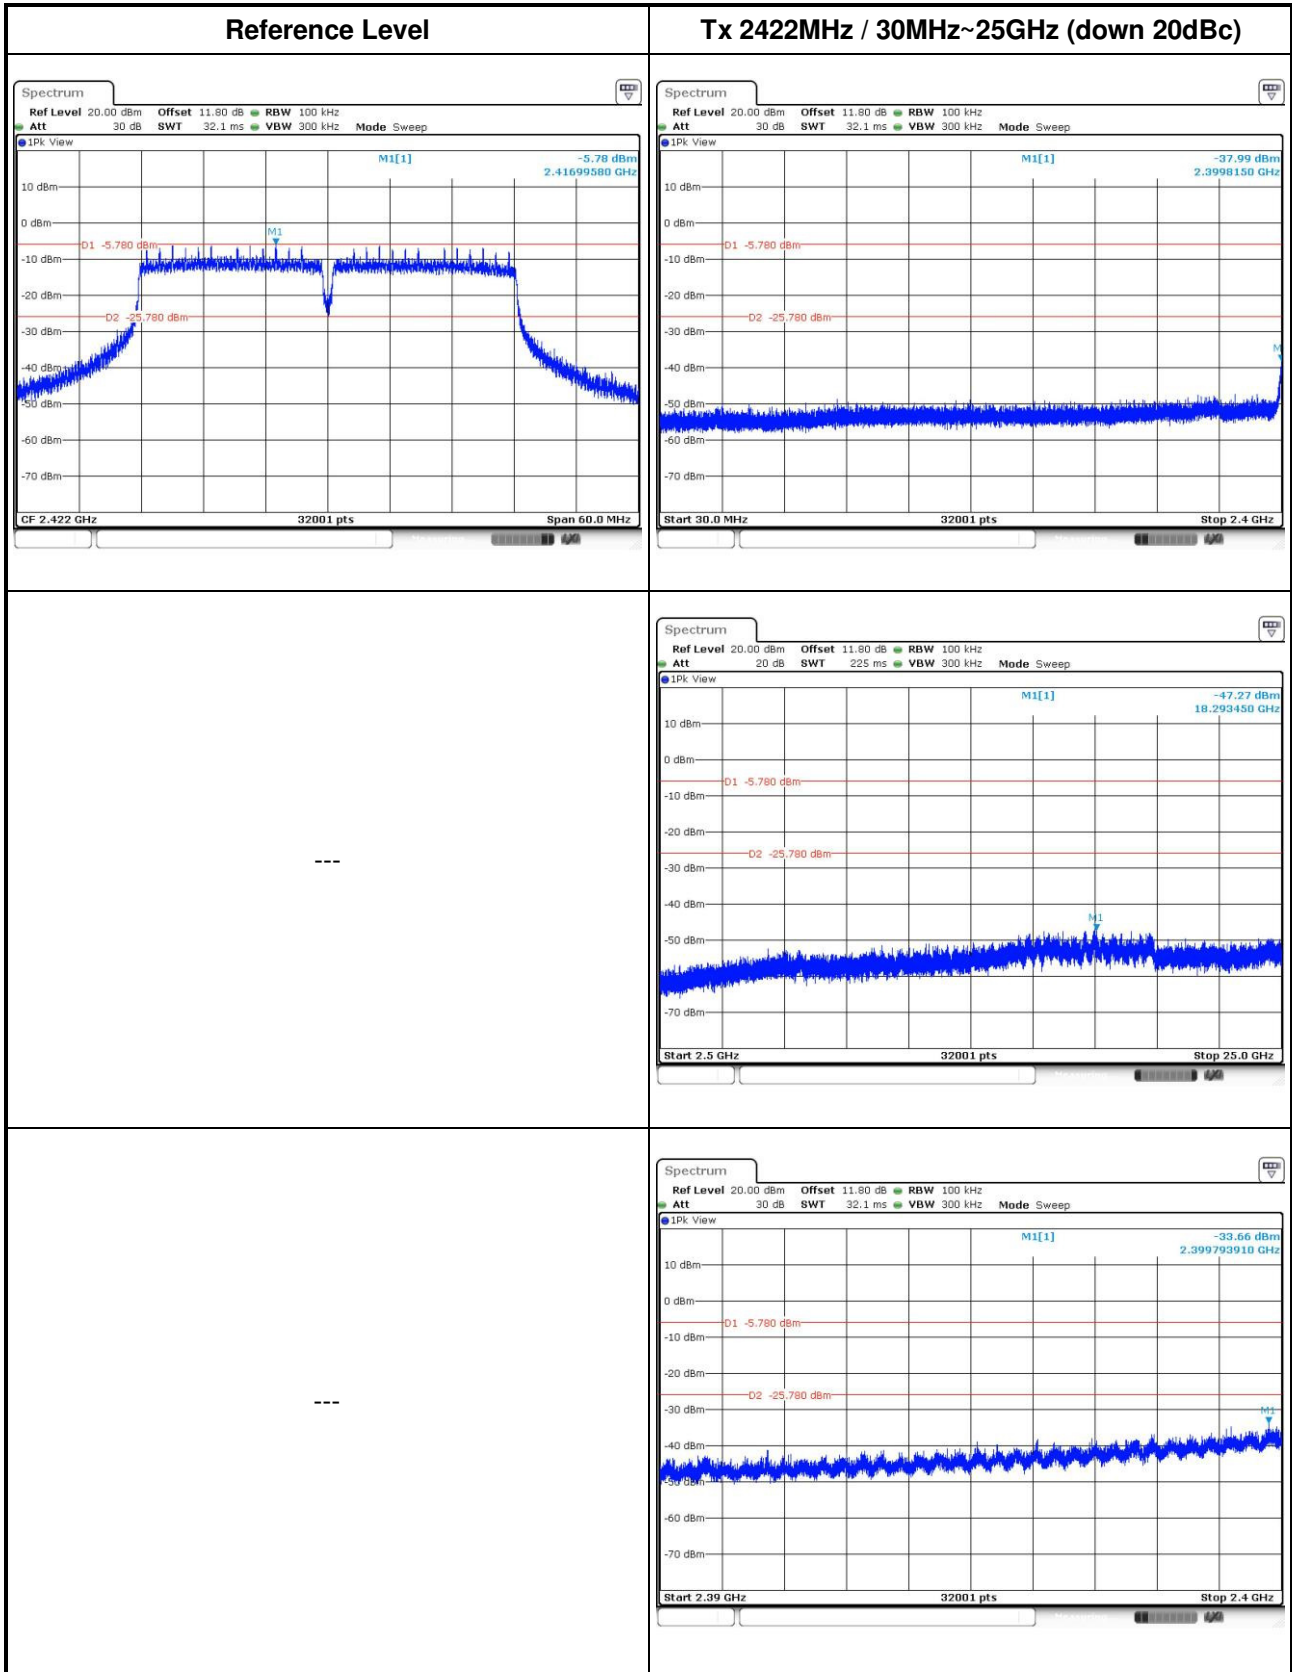

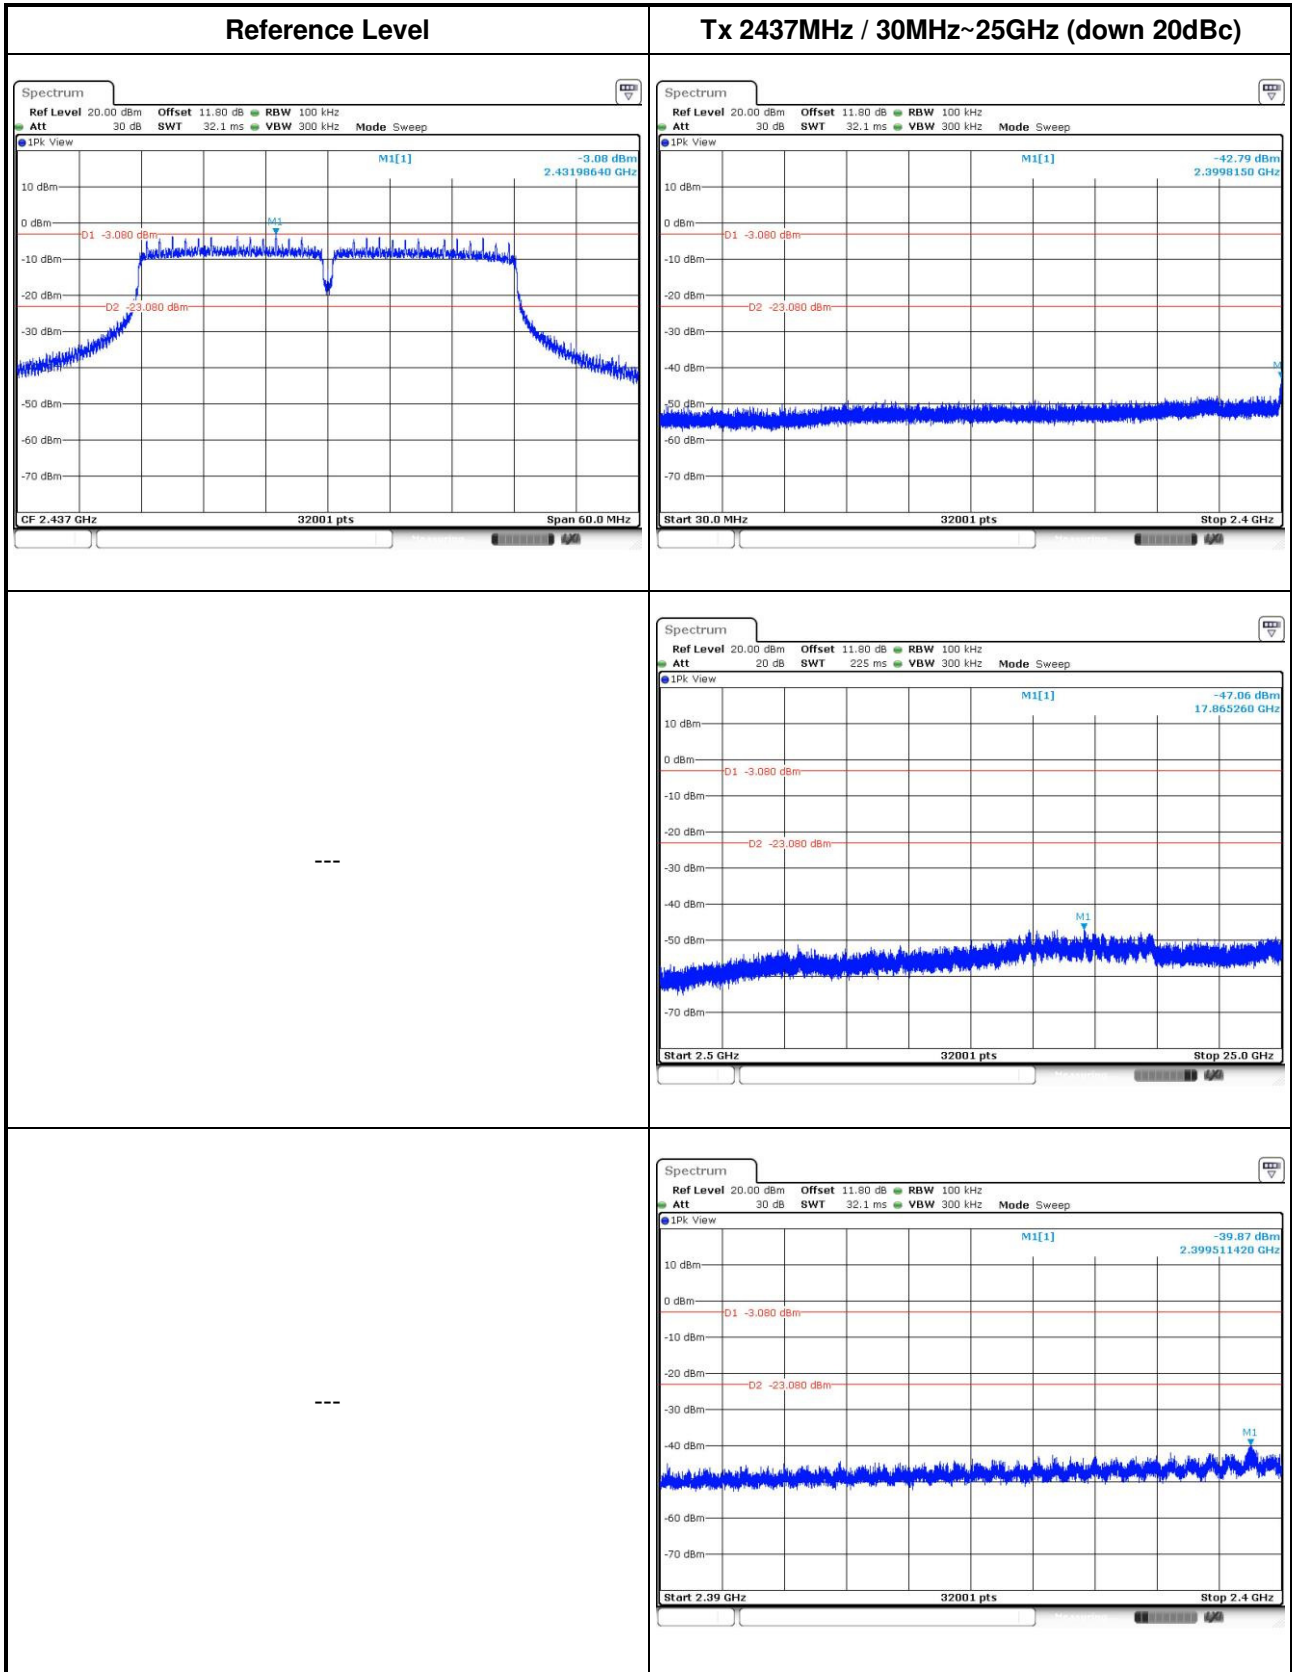

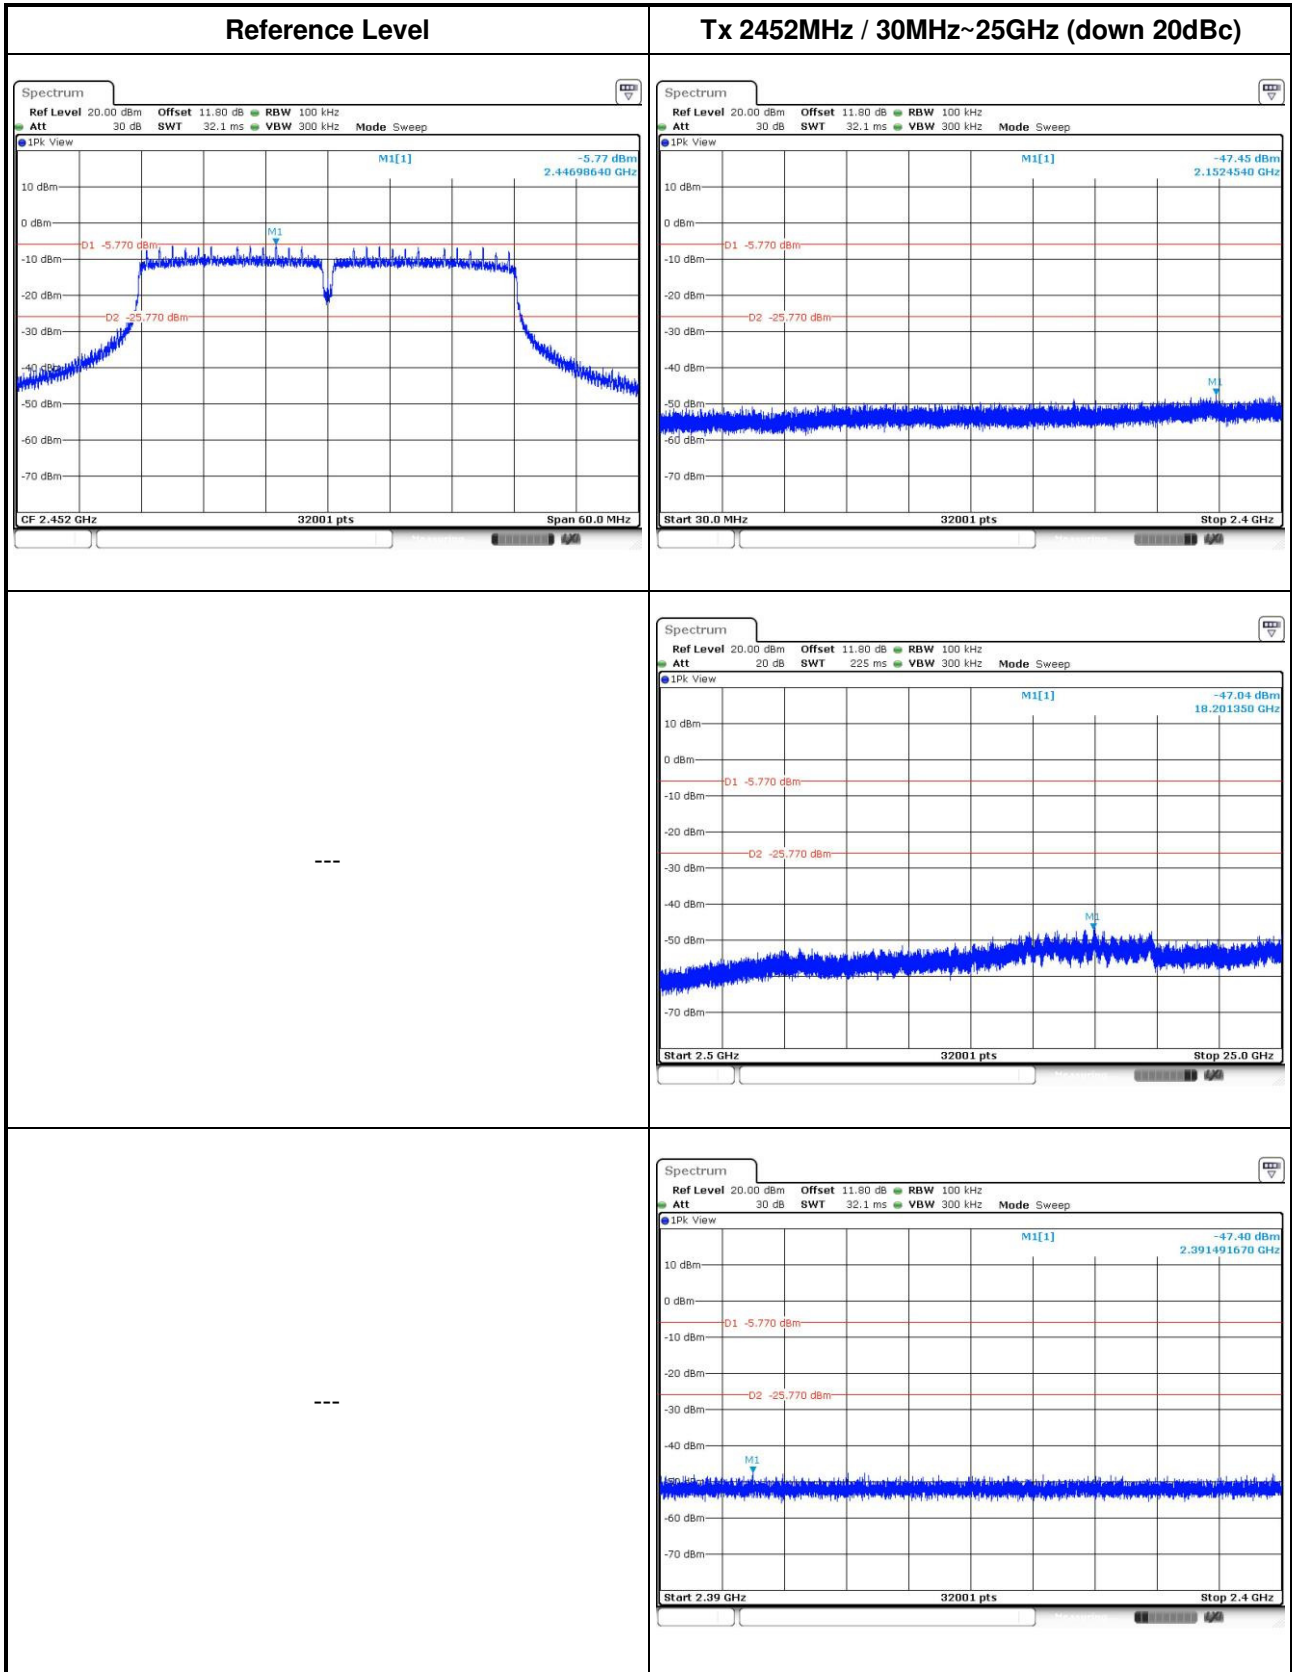

### 3.6 Transmitter Radiated Unwanted Emissions

#### 3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$ )
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$ ).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r02, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 11.12.2.3 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074 v03r02, clause 12.2.7
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method	
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074 v03r02, clause 12.2
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

### 3.6.4 Test Setup

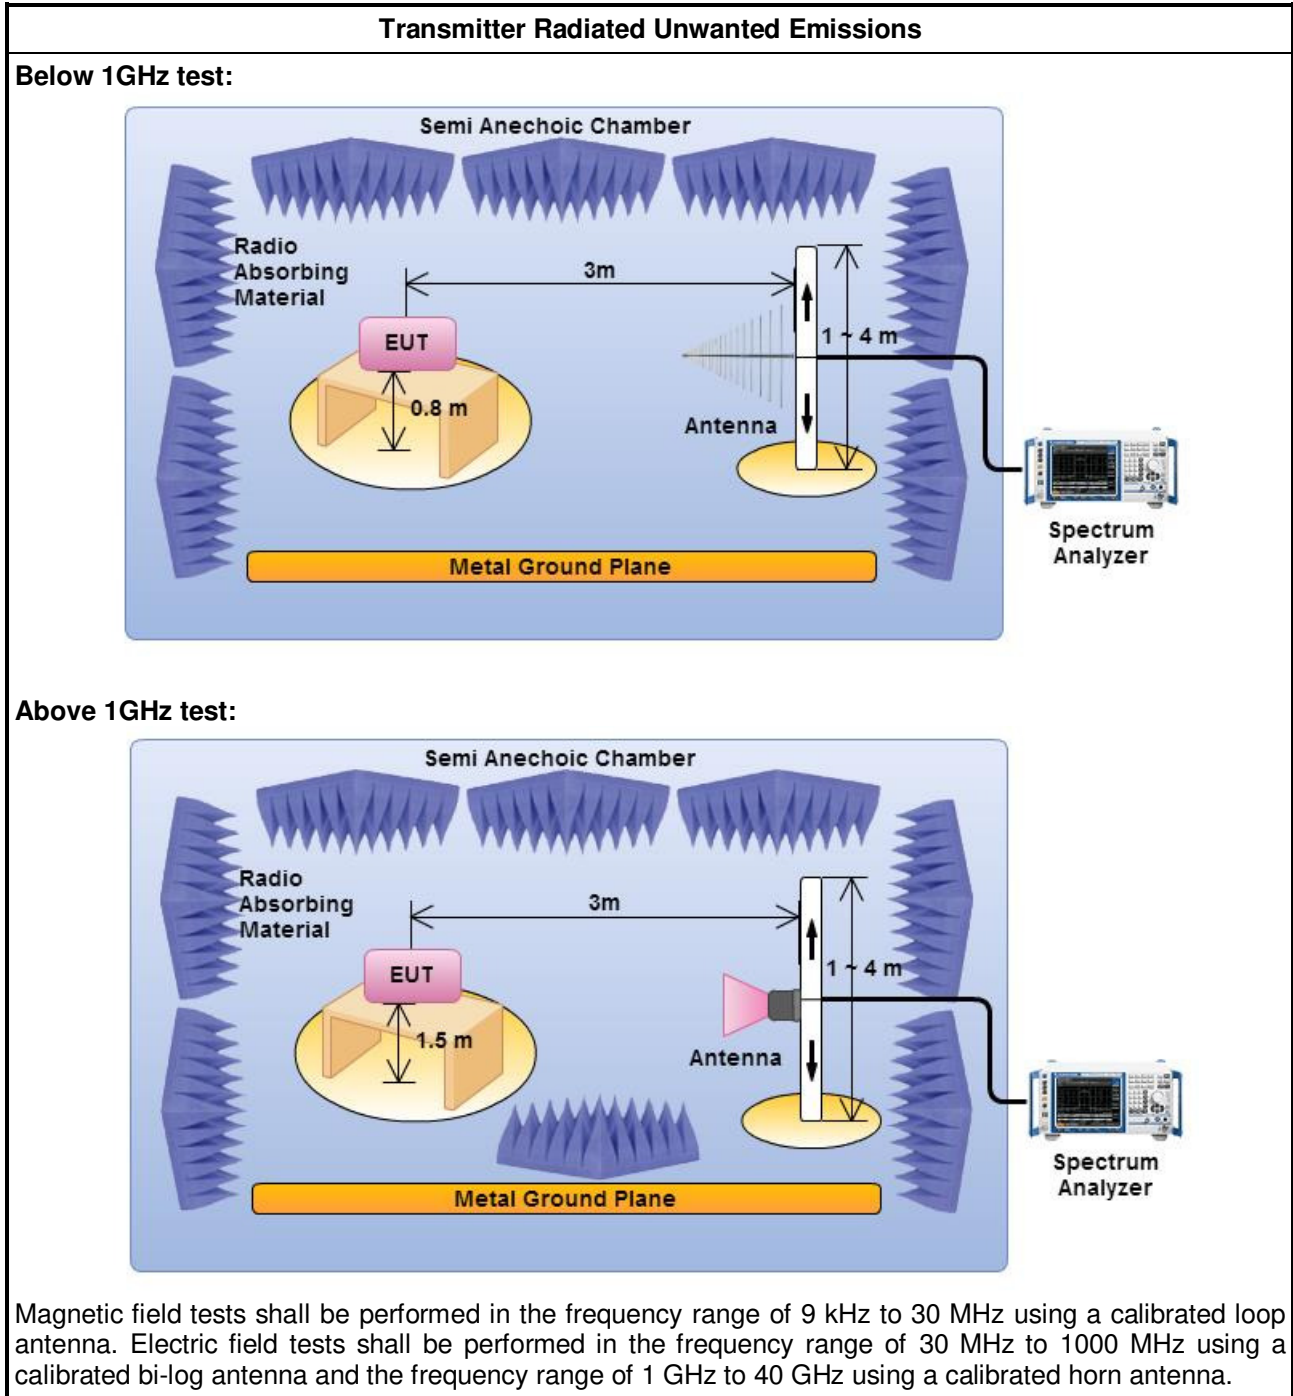


### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2437
Polarization	H		

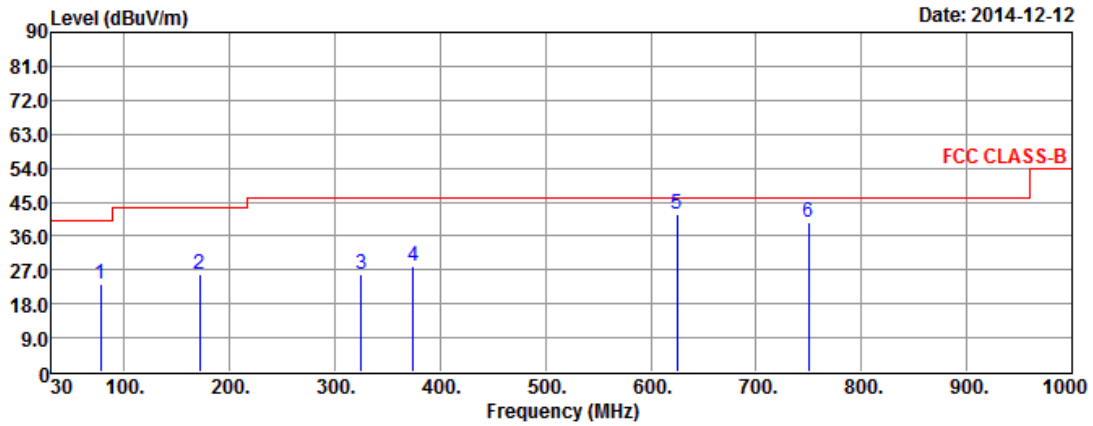

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	77.32	23.33	-16.67	40.00	44.58	9.95	0.59	31.79	---	---	Peak
2	171.58	25.89	-17.61	43.50	43.61	13.03	0.84	31.59	---	---	Peak
3	324.56	25.78	-20.22	46.00	41.33	14.69	1.18	31.42	---	---	Peak
4	374.61	28.14	-17.86	46.00	42.45	15.84	1.29	31.44	---	---	Peak
5	624.77	41.89	-4.11	46.00	51.06	20.50	1.71	31.38	---	---	Peak
6	749.56	39.63	-6.37	46.00	46.82	22.29	1.88	31.36	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)





Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
Polarization	V		

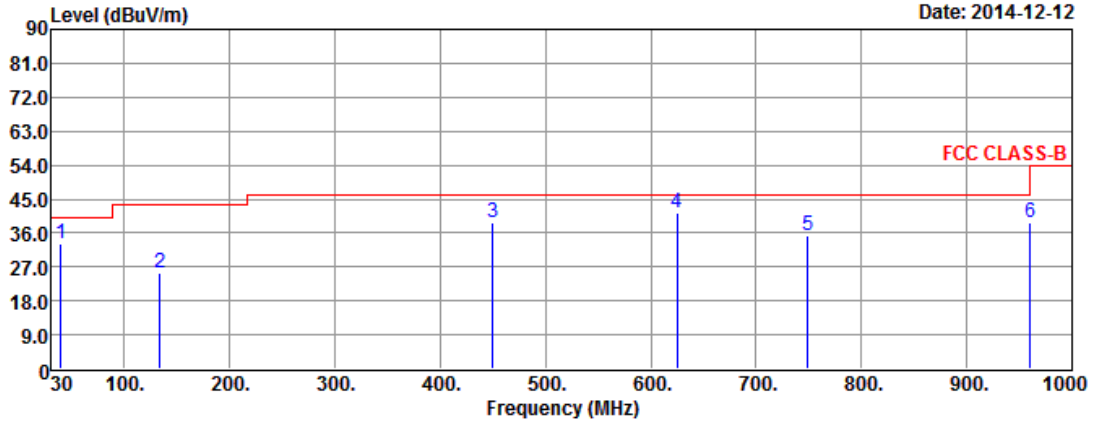


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	39.42	33.37	-6.63	40.00	50.68	14.05	0.47	31.83	---	---	Peak
2	133.42	25.21	-18.29	43.50	43.43	12.68	0.75	31.65	---	---	Peak
3	449.62	38.94	-7.06	46.00	51.42	17.49	1.43	31.40	---	---	Peak
4	624.56	41.25	-4.75	46.00	50.42	20.50	1.71	31.38	---	---	Peak
5	749.36	35.14	-10.86	46.00	42.33	22.29	1.88	31.36	---	---	Peak
6	960.12	38.81	-15.19	54.00	43.31	24.64	2.19	31.33	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	H

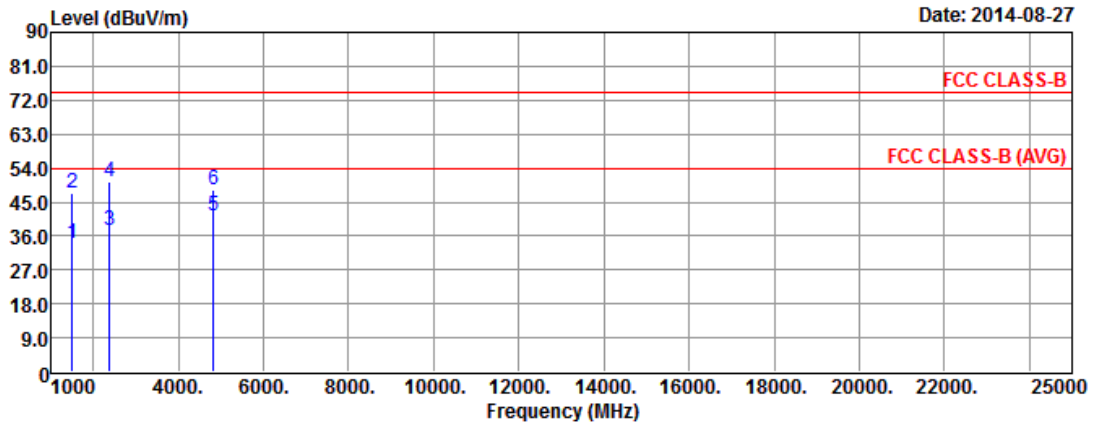


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.15	-19.85	54.00	40.62	25.80	3.45	35.72	---	---	Average
2	1500.00	47.21	-26.79	74.00	53.68	25.80	3.45	35.72	---	---	Peak
3	2390.00	37.59	-16.41	54.00	40.41	27.21	4.60	34.63	---	---	Average
4	2390.00	50.25	-23.75	74.00	53.07	27.21	4.60	34.63	---	---	Peak
5	4824.00	41.38	-12.62	54.00	36.29	31.52	6.74	33.17	---	---	Average
6	4824.00	48.30	-25.70	74.00	43.21	31.52	6.74	33.17	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	V

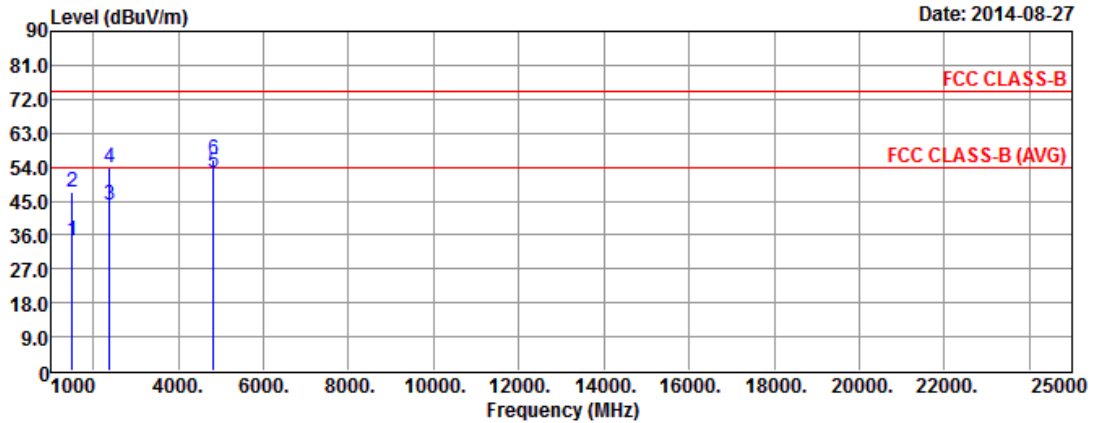

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	34.35	-19.65	54.00	40.82	25.80	3.45	35.72	---	---	Average
2	1500.00	47.27	-26.73	74.00	53.74	25.80	3.45	35.72	---	---	Peak
3	2390.00	44.03	-9.97	54.00	46.85	27.21	4.60	34.63	---	---	Average
4	2390.00	53.88	-20.12	74.00	56.70	27.21	4.60	34.63	---	---	Peak
5	4824.00	52.72	-1.28	54.00	47.63	31.52	6.74	33.17	---	---	Average
6	4824.00	55.91	-18.09	74.00	50.82	31.52	6.74	33.17	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																										
Modulation Mode	11b			Test Freq. (MHz)	2437																																																																																																					
N <sub>TX</sub>	2			Polarization	H																																																																																																					
<div style="text-align: right;">Date: 2014-08-27</div> <table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>37.01</td> <td>-16.99</td> <td>54.00</td> <td>39.83</td> <td>27.21</td> <td>4.60</td> <td>34.63</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.63</td> <td>-24.37</td> <td>74.00</td> <td>52.45</td> <td>27.21</td> <td>4.60</td> <td>34.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>40.77</td> <td>-13.23</td> <td>54.00</td> <td>35.59</td> <td>31.60</td> <td>6.73</td> <td>33.15</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>48.37</td> <td>-25.63</td> <td>74.00</td> <td>43.19</td> <td>31.60</td> <td>6.73</td> <td>33.15</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>38.53</td> <td>-15.47</td> <td>54.00</td> <td>27.79</td> <td>36.28</td> <td>8.98</td> <td>34.52</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>51.14</td> <td>-22.86</td> <td>74.00</td> <td>40.40</td> <td>36.28</td> <td>8.98</td> <td>34.52</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>												Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2390.00	37.01	-16.99	54.00	39.83	27.21	4.60	34.63	---	---	Average	2	2390.00	49.63	-24.37	74.00	52.45	27.21	4.60	34.63	---	---	Peak	3	4874.00	40.77	-13.23	54.00	35.59	31.60	6.73	33.15	---	---	Average	4	4874.00	48.37	-25.63	74.00	43.19	31.60	6.73	33.15	---	---	Peak	5	7311.00	38.53	-15.47	54.00	27.79	36.28	8.98	34.52	---	---	Average	6	7311.00	51.14	-22.86	74.00	40.40	36.28	8.98	34.52	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2390.00	37.01	-16.99	54.00	39.83	27.21	4.60	34.63	---	---	Average																																																																																															
2	2390.00	49.63	-24.37	74.00	52.45	27.21	4.60	34.63	---	---	Peak																																																																																															
3	4874.00	40.77	-13.23	54.00	35.59	31.60	6.73	33.15	---	---	Average																																																																																															
4	4874.00	48.37	-25.63	74.00	43.19	31.60	6.73	33.15	---	---	Peak																																																																																															
5	7311.00	38.53	-15.47	54.00	27.79	36.28	8.98	34.52	---	---	Average																																																																																															
6	7311.00	51.14	-22.86	74.00	40.40	36.28	8.98	34.52	---	---	Peak																																																																																															
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																																										



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	V

Date: 2014-08-27

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	40.03	-13.97	54.00	42.85	27.21	4.60	34.63	---	---	Average
2	2390.00	52.76	-21.24	74.00	55.58	27.21	4.60	34.63	---	---	Peak
3	4874.00	52.90	-1.10	54.00	47.72	31.60	6.73	33.15	---	---	Average
4	4874.00	56.24	-17.76	74.00	51.06	31.60	6.73	33.15	---	---	Peak
5	7311.00	41.88	-12.12	54.00	31.14	36.28	8.98	34.52	---	---	Average
6	7311.00	53.00	-21.00	74.00	42.26	36.28	8.98	34.52	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																										
Modulation Mode	11b		Test Freq. (MHz)	2462																																																																																																						
N <sub>TX</sub>	2		Polarization	H																																																																																																						
<div style="text-align: right;">Date: 2014-08-27</div> <table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>36.89</td> <td>-17.11</td> <td>54.00</td> <td>39.28</td> <td>27.46</td> <td>4.74</td> <td>34.59</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>49.99</td> <td>-24.01</td> <td>74.00</td> <td>52.38</td> <td>27.46</td> <td>4.74</td> <td>34.59</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>40.79</td> <td>-13.21</td> <td>54.00</td> <td>35.51</td> <td>31.68</td> <td>6.73</td> <td>33.13</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4924.00</td> <td>48.07</td> <td>-25.93</td> <td>74.00</td> <td>42.79</td> <td>31.68</td> <td>6.73</td> <td>33.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>38.38</td> <td>-15.62</td> <td>54.00</td> <td>27.54</td> <td>36.45</td> <td>9.01</td> <td>34.62</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>6</td> <td>7386.00</td> <td>51.29</td> <td>-22.71</td> <td>74.00</td> <td>40.45</td> <td>36.45</td> <td>9.01</td> <td>34.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>												Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2483.50	36.89	-17.11	54.00	39.28	27.46	4.74	34.59	---	---	Average	2	2483.50	49.99	-24.01	74.00	52.38	27.46	4.74	34.59	---	---	Peak	3	4924.00	40.79	-13.21	54.00	35.51	31.68	6.73	33.13	---	---	Average	4	4924.00	48.07	-25.93	74.00	42.79	31.68	6.73	33.13	---	---	Peak	5	7386.00	38.38	-15.62	54.00	27.54	36.45	9.01	34.62	---	---	Average	6	7386.00	51.29	-22.71	74.00	40.45	36.45	9.01	34.62	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2483.50	36.89	-17.11	54.00	39.28	27.46	4.74	34.59	---	---	Average																																																																																															
2	2483.50	49.99	-24.01	74.00	52.38	27.46	4.74	34.59	---	---	Peak																																																																																															
3	4924.00	40.79	-13.21	54.00	35.51	31.68	6.73	33.13	---	---	Average																																																																																															
4	4924.00	48.07	-25.93	74.00	42.79	31.68	6.73	33.13	---	---	Peak																																																																																															
5	7386.00	38.38	-15.62	54.00	27.54	36.45	9.01	34.62	---	---	Average																																																																																															
6	7386.00	51.29	-22.71	74.00	40.45	36.45	9.01	34.62	---	---	Peak																																																																																															
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																																										



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2462
N <sub>TX</sub>	2	Polarization	V

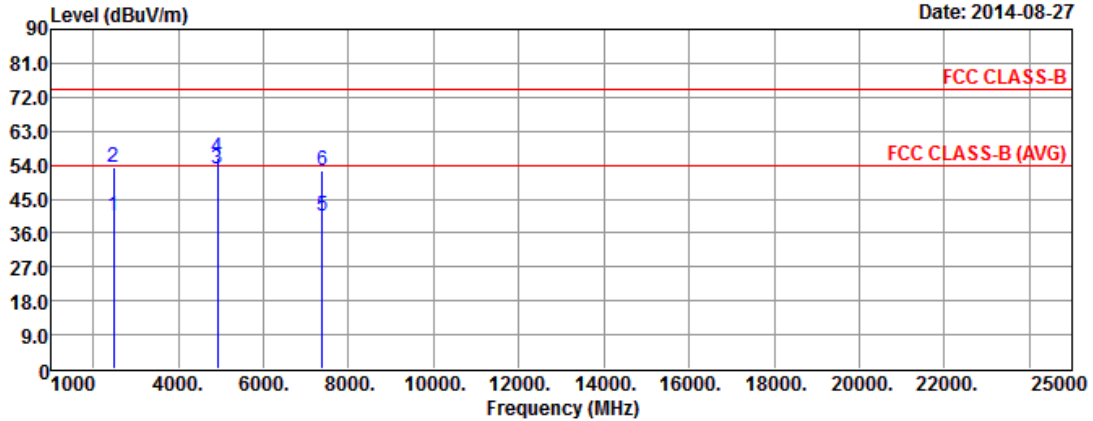


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	40.65	-13.35	54.00	43.04	27.46	4.74	34.59	---	---	Average
2	2483.50	53.25	-20.75	74.00	55.64	27.46	4.74	34.59	---	---	Peak
3	4924.00	52.83	-1.17	54.00	47.55	31.68	6.73	33.13	---	---	Average
4	4924.00	55.82	-18.18	74.00	50.54	31.68	6.73	33.13	---	---	Peak
5	7386.00	40.69	-13.31	54.00	29.85	36.45	9.01	34.62	---	---	Average
6	7386.00	52.58	-21.42	74.00	41.74	36.45	9.01	34.62	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	H

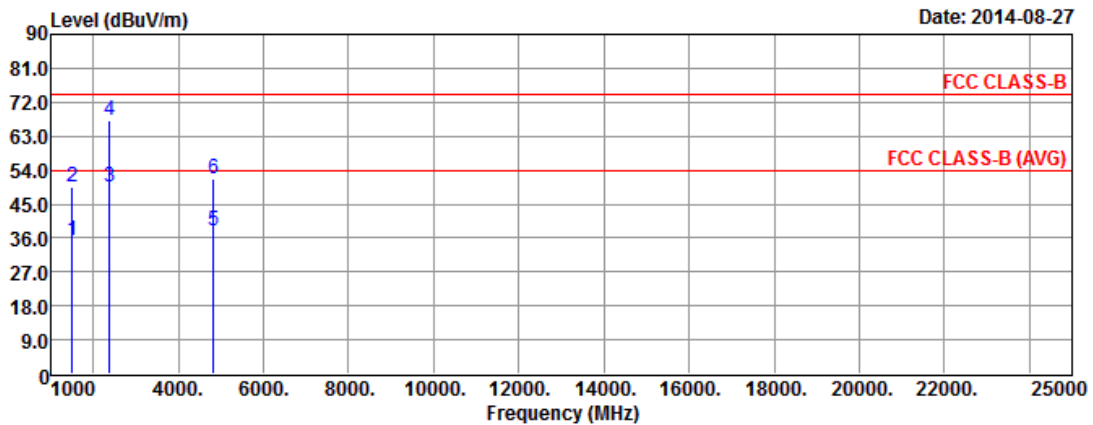

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.16	-18.84	54.00	41.63	25.80	3.45	35.72	---	---	Average
2	1500.00	49.46	-24.54	74.00	55.93	25.80	3.45	35.72	---	---	Peak
3	2390.00	49.46	-4.54	54.00	52.28	27.21	4.60	34.63	---	---	Average
4	2390.00	67.21	-6.79	74.00	70.03	27.21	4.60	34.63	---	---	Peak
5	4824.00	37.82	-16.18	54.00	32.73	31.52	6.74	33.17	---	---	Average
6	4824.00	51.54	-22.46	74.00	46.45	31.52	6.74	33.17	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	V

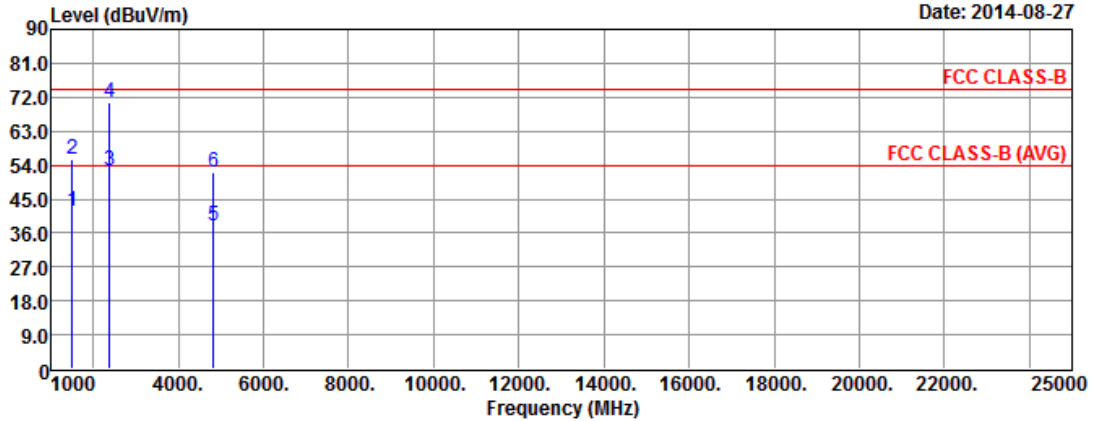

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	41.57	-12.43	54.00	48.04	25.80	3.45	35.72	---	---	Average
2	1500.00	55.62	-18.38	74.00	62.09	25.80	3.45	35.72	---	---	Peak
3	2390.00	52.53	-1.47	54.00	55.35	27.21	4.60	34.63	---	---	Average
4	2390.00	70.59	-3.41	74.00	73.41	27.21	4.60	34.63	---	---	Peak
5	4824.00	38.02	-15.98	54.00	32.93	31.52	6.74	33.17	---	---	Average
6	4824.00	51.89	-22.11	74.00	46.80	31.52	6.74	33.17	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	H

Date: 2014-08-27

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	50.03	-3.97	54.00	52.85	27.21	4.60	34.63	---	---	Average
2	2390.00	69.88	-4.12	74.00	72.70	27.21	4.60	34.63	---	---	Peak
3	2483.50	49.26	-4.74	54.00	51.65	27.46	4.74	34.59	---	---	Average
4	2483.50	69.27	-4.73	74.00	71.66	27.46	4.74	34.59	---	---	Peak
5	4874.00	37.15	-16.85	54.00	31.97	31.60	6.73	33.15	---	---	Average
6	4874.00	51.00	-23.00	74.00	45.82	31.60	6.73	33.15	---	---	Peak
7	7311.00	39.66	-14.34	54.00	28.92	36.28	8.98	34.52	---	---	Average
8	7311.00	52.39	-21.61	74.00	41.65	36.28	8.98	34.52	---	---	Peak


  

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	V

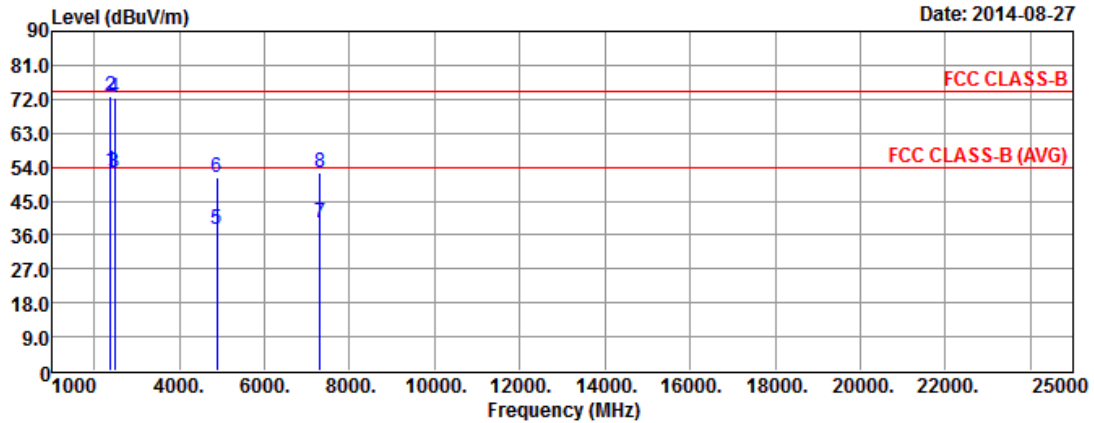

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	52.98	-1.02	54.00	55.80	27.21	4.60	34.63	---	---	Average
2	2390.00	72.94	-1.06	74.00	75.76	27.21	4.60	34.63	---	---	Peak
3	2483.50	52.44	-1.56	54.00	54.83	27.46	4.74	34.59	---	---	Average
4	2483.50	72.37	-1.63	74.00	74.76	27.46	4.74	34.59	---	---	Peak
5	4874.00	37.39	-16.61	54.00	32.21	31.60	6.73	33.15	---	---	Average
6	4874.00	51.39	-22.61	74.00	46.21	31.60	6.73	33.15	---	---	Peak
7	7311.00	39.26	-14.74	54.00	28.52	36.28	8.98	34.52	---	---	Average
8	7311.00	52.40	-21.60	74.00	41.66	36.28	8.98	34.52	---	---	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																										
Modulation Mode	11g		Test Freq. (MHz)	2462																																																																																																						
N <sub>TX</sub>	2		Polarization	H																																																																																																						
<div style="text-align: right;">Date: 2014-08-27</div> <table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.62</td> <td>-4.38</td> <td>54.00</td> <td>52.01</td> <td>27.46</td> <td>4.74</td> <td>34.59</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>69.24</td> <td>-4.76</td> <td>74.00</td> <td>71.63</td> <td>27.46</td> <td>4.74</td> <td>34.59</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>38.24</td> <td>-15.76</td> <td>54.00</td> <td>32.96</td> <td>31.68</td> <td>6.73</td> <td>33.13</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4924.00</td> <td>52.02</td> <td>-21.98</td> <td>74.00</td> <td>46.74</td> <td>31.68</td> <td>6.73</td> <td>33.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>38.66</td> <td>-15.34</td> <td>54.00</td> <td>27.82</td> <td>36.45</td> <td>9.01</td> <td>34.62</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>6</td> <td>7386.00</td> <td>52.00</td> <td>-22.00</td> <td>74.00</td> <td>41.16</td> <td>36.45</td> <td>9.01</td> <td>34.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>												Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2483.50	49.62	-4.38	54.00	52.01	27.46	4.74	34.59	---	---	Average	2	2483.50	69.24	-4.76	74.00	71.63	27.46	4.74	34.59	---	---	Peak	3	4924.00	38.24	-15.76	54.00	32.96	31.68	6.73	33.13	---	---	Average	4	4924.00	52.02	-21.98	74.00	46.74	31.68	6.73	33.13	---	---	Peak	5	7386.00	38.66	-15.34	54.00	27.82	36.45	9.01	34.62	---	---	Average	6	7386.00	52.00	-22.00	74.00	41.16	36.45	9.01	34.62	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2483.50	49.62	-4.38	54.00	52.01	27.46	4.74	34.59	---	---	Average																																																																																															
2	2483.50	69.24	-4.76	74.00	71.63	27.46	4.74	34.59	---	---	Peak																																																																																															
3	4924.00	38.24	-15.76	54.00	32.96	31.68	6.73	33.13	---	---	Average																																																																																															
4	4924.00	52.02	-21.98	74.00	46.74	31.68	6.73	33.13	---	---	Peak																																																																																															
5	7386.00	38.66	-15.34	54.00	27.82	36.45	9.01	34.62	---	---	Average																																																																																															
6	7386.00	52.00	-22.00	74.00	41.16	36.45	9.01	34.62	---	---	Peak																																																																																															
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																																										



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2462
N <sub>TX</sub>	2	Polarization	V

Date: 2014-08-27

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	52.73	-1.27	54.00	55.12	27.46	4.74	34.59	---	---	Average
2	2483.50	72.41	-1.59	74.00	74.80	27.46	4.74	34.59	---	---	Peak
3	4924.00	38.62	-15.38	54.00	33.34	31.68	6.73	33.13	---	---	Average
4	4924.00	52.46	-21.54	74.00	47.18	31.68	6.73	33.13	---	---	Peak
5	7386.00	38.84	-15.16	54.00	28.00	36.45	9.01	34.62	---	---	Average
6	7386.00	52.23	-21.77	74.00	41.39	36.45	9.01	34.62	---	---	Peak


  

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	H

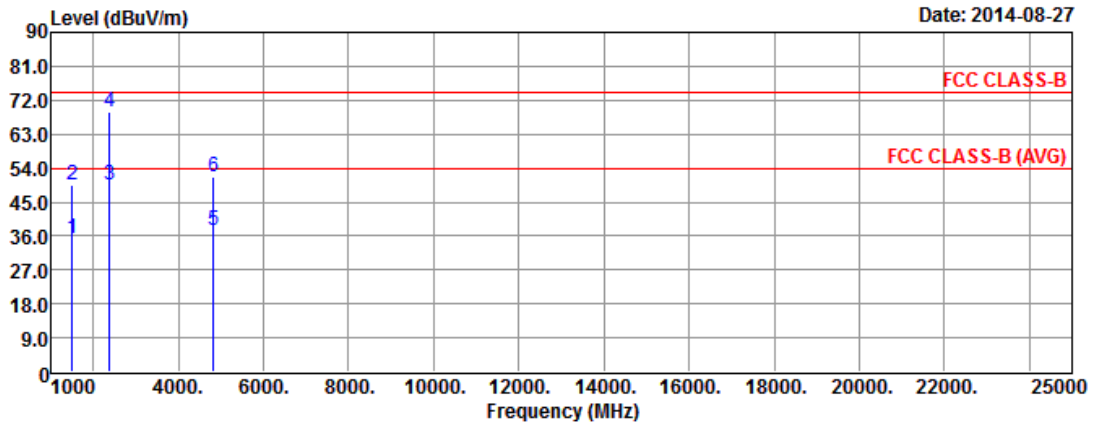


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.33	-18.67	54.00	41.80	25.80	3.45	35.72	---	---	Average
2	1500.00	49.46	-24.54	74.00	55.93	25.80	3.45	35.72	---	---	Peak
3	2390.00	49.36	-4.64	54.00	52.18	27.21	4.60	34.63	---	---	Average
4	2390.00	69.11	-4.89	74.00	71.93	27.21	4.60	34.63	---	---	Peak
5	4824.00	37.62	-16.38	54.00	32.53	31.52	6.74	33.17	---	---	Average
6	4824.00	51.48	-22.52	74.00	46.39	31.52	6.74	33.17	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N <sub>TX</sub>	2	Polarization	V

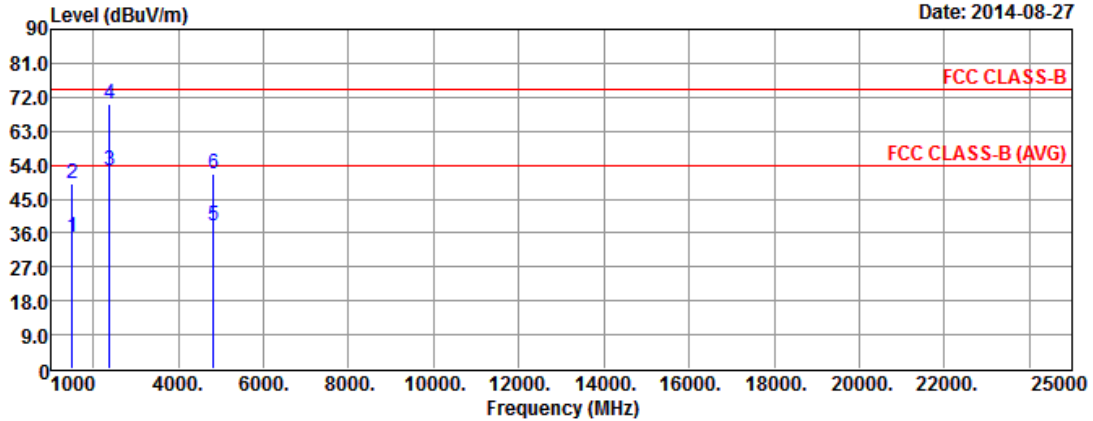

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.06	-18.94	54.00	41.53	25.80	3.45	35.72	---	---	Average
2	1500.00	49.16	-24.84	74.00	55.63	25.80	3.45	35.72	---	---	Peak
3	2390.00	52.33	-1.67	54.00	55.15	27.21	4.60	34.63	---	---	Average
4	2390.00	70.01	-3.99	74.00	72.83	27.21	4.60	34.63	---	---	Peak
5	4824.00	37.94	-16.06	54.00	32.85	31.52	6.74	33.17	---	---	Average
6	4824.00	51.75	-22.25	74.00	46.66	31.52	6.74	33.17	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	H

Date: 2014-08-27

	Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	49.02	-4.98	54.00	51.84	27.21	4.60	34.63	---	---	Average
2	2390.00	66.29	-7.71	74.00	69.11	27.21	4.60	34.63	---	---	Peak
3	2483.50	49.06	-4.94	54.00	51.45	27.46	4.74	34.59	---	---	Average
4	2483.50	66.63	-7.37	74.00	69.02	27.46	4.74	34.59	---	---	Peak
5	4874.00	37.27	-16.73	54.00	32.09	31.60	6.73	33.15	---	---	Average
6	4874.00	51.09	-22.91	74.00	45.91	31.60	6.73	33.15	---	---	Peak
7	7311.00	39.93	-14.07	54.00	29.19	36.28	8.98	34.52	---	---	Average
8	7311.00	52.62	-21.38	74.00	41.88	36.28	8.98	34.52	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	V
Date: 2014-08-27			
	Freq	Level	Over Limit
	MHz	dBuV/m	dB
	Limit Line	dBuV/m	dB
	Read Level	dBuV	dB/m
	Antenna Factor	dB	dB
	Cable Loss	dB	dB
	Preamp Factor	cm	deg
	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB
1	2390.00	52.16	-1.84
2	2390.00	69.47	-4.53
3	2483.50	52.13	-1.87
4	2483.50	69.80	-4.20
5	4874.00	37.36	-16.64
6	4874.00	51.24	-22.76
7	7311.00	39.57	-14.43
8	7311.00	52.06	-21.94
	54.00	74.00	74.00
	54.98	72.29	74.00
	54.52	72.19	74.00
	32.18	46.06	74.00
	28.83	41.32	74.00
	36.28	36.28	74.00
	34.63	34.63	74.00
	34.59	34.59	74.00
	33.15	33.15	74.00
	34.52	34.52	74.00
	34.52	34.52	74.00
	---	---	Average
	---	---	Peak
	---	---	Average
	---	---	Peak
	---	---	Average
	---	---	Peak
	---	---	Average
	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2462
N <sub>TX</sub>	2	Polarization	H

Date: 2014-08-27

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	49.35	-4.65	54.00	51.74	27.46	4.74	34.59	---	---	Average
2	2483.50	65.30	-8.70	74.00	67.69	27.46	4.74	34.59	---	---	Peak
3	4924.00	37.33	-16.67	54.00	32.05	31.68	6.73	33.13	---	---	Average
4	4924.00	50.78	-23.22	74.00	45.50	31.68	6.73	33.13	---	---	Peak
5	7386.00	39.22	-14.78	54.00	28.38	36.45	9.01	34.62	---	---	Average
6	7386.00	52.06	-21.94	74.00	41.22	36.45	9.01	34.62	---	---	Peak


  

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N <sub>TX</sub>	2	Polarization	V

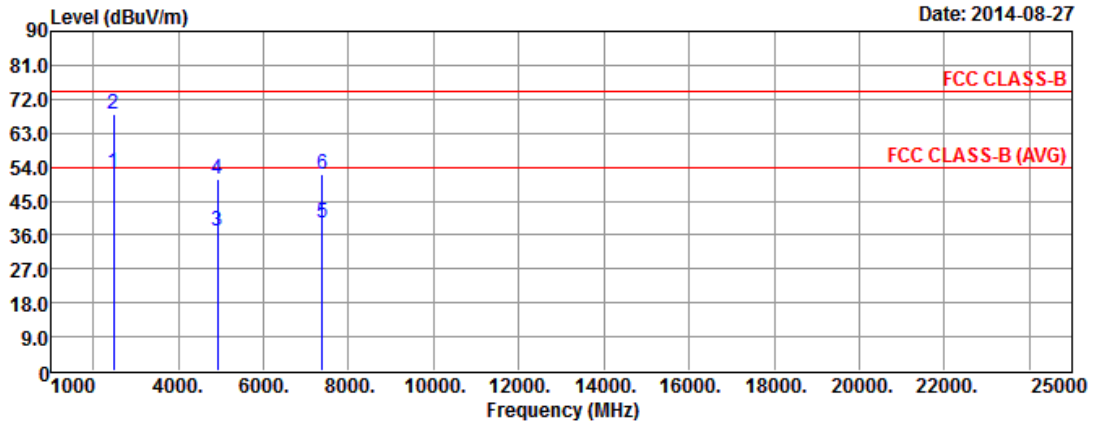


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	52.44	-1.56	54.00	54.83	27.46	4.74	34.59	---	---	Average
2	2483.50	68.18	-5.82	74.00	70.57	27.46	4.74	34.59	---	---	Peak
3	4924.00	36.98	-17.02	54.00	31.70	31.68	6.73	33.13	---	---	Average
4	4924.00	50.73	-23.27	74.00	45.45	31.68	6.73	33.13	---	---	Peak
5	7386.00	39.26	-14.74	54.00	28.42	36.45	9.01	34.62	---	---	Average
6	7386.00	52.00	-22.00	74.00	41.16	36.45	9.01	34.62	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2422
N <sub>TX</sub>	2	Polarization	H

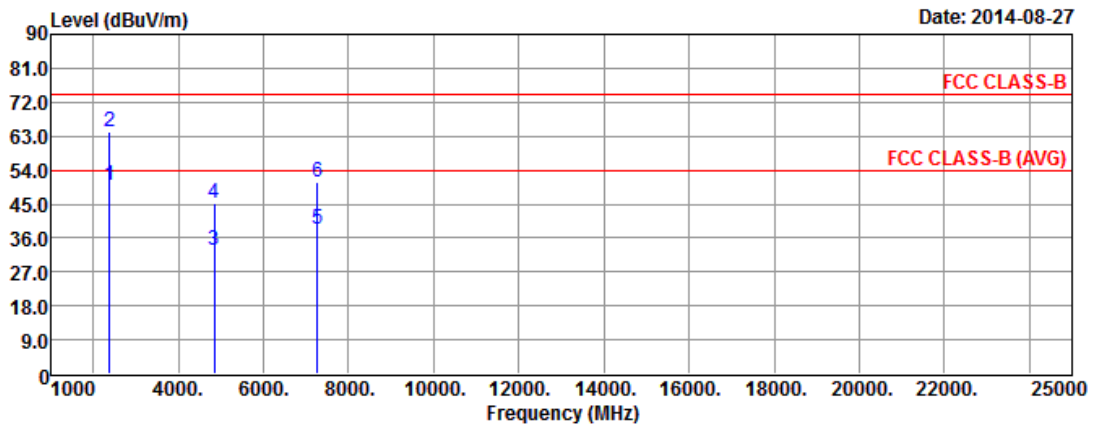


	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	2390.00	49.87	-4.13	54.00	52.69	27.21	4.60	34.63	---	---	Average
2	2390.00	64.05	-9.95	74.00	66.87	27.21	4.60	34.63	---	---	Peak
3	4844.00	32.66	-21.34	54.00	27.53	31.55	6.74	33.16	---	---	Average
4	4844.00	45.43	-28.57	74.00	40.30	31.55	6.74	33.16	---	---	Peak
5	7266.00	38.37	-15.63	54.00	27.69	36.19	8.95	34.46	---	---	Average
6	7266.00	51.01	-22.99	74.00	40.33	36.19	8.95	34.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N <sub>TX</sub>	2	Polarization	V

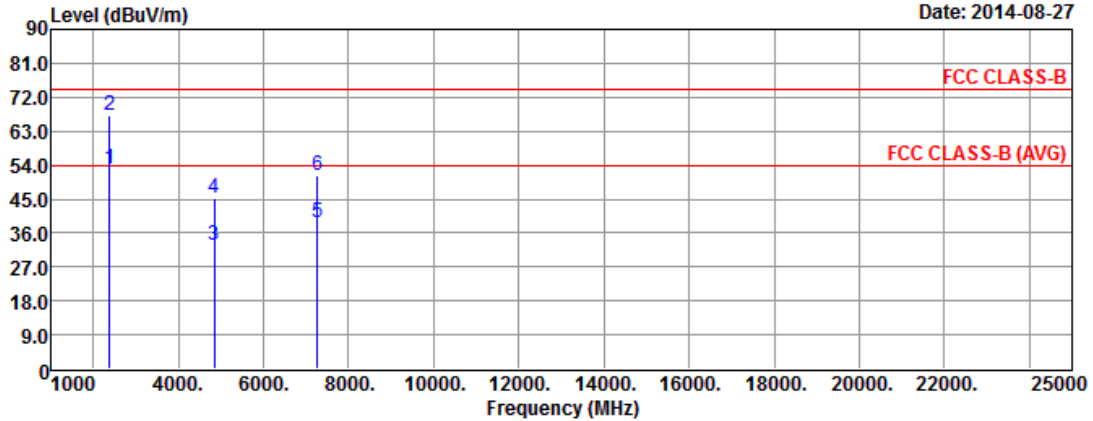


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	52.98	-1.02	54.00	55.80	27.21	4.60	34.63	---	---	Average
2	2390.00	67.18	-6.82	74.00	70.00	27.21	4.60	34.63	---	---	Peak
3	4844.00	32.53	-21.47	54.00	27.40	31.55	6.74	33.16	---	---	Average
4	4844.00	45.27	-28.73	74.00	40.14	31.55	6.74	33.16	---	---	Peak
5	7266.00	38.78	-15.22	54.00	28.10	36.19	8.95	34.46	---	---	Average
6	7266.00	51.30	-22.70	74.00	40.62	36.19	8.95	34.46	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	H

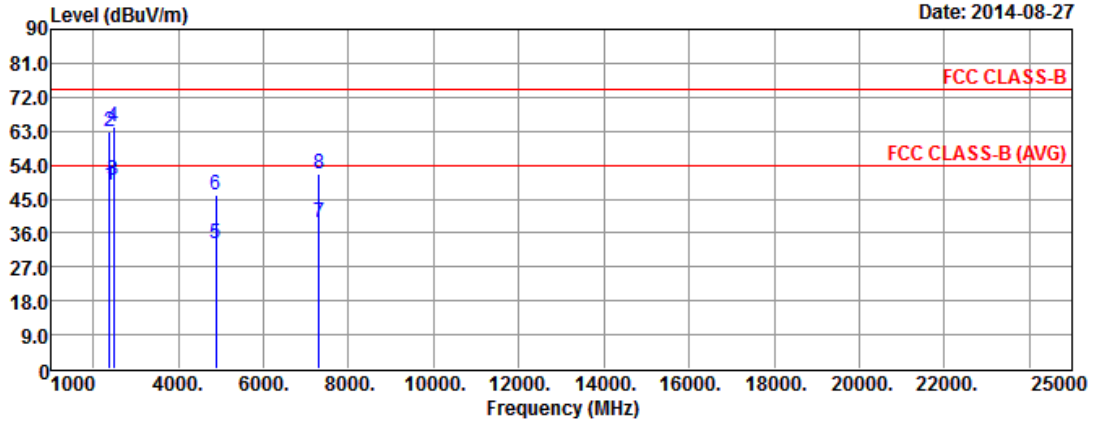

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	48.51	-5.49	54.00	51.33	27.21	4.60	34.63	---	---	Average
2	2390.00	63.00	-11.00	74.00	65.82	27.21	4.60	34.63	---	---	Peak
3	2483.50	49.87	-4.13	54.00	52.26	27.46	4.74	34.59	---	---	Average
4	2483.50	64.05	-9.95	74.00	66.44	27.46	4.74	34.59	---	---	Peak
5	4874.00	33.05	-20.95	54.00	27.87	31.60	6.73	33.15	---	---	Average
6	4874.00	45.98	-28.02	74.00	40.80	31.60	6.73	33.15	---	---	Peak
7	7311.00	38.78	-15.22	54.00	28.04	36.28	8.98	34.52	---	---	Average
8	7311.00	51.52	-22.48	74.00	40.78	36.28	8.98	34.52	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.




Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2437
N <sub>TX</sub>	2	Polarization	V
Date: 2014-08-27			
	Freq	Level	Over Limit
	MHz	dBuV/m	dB
	Limit Line	dBuV/m	dB
	Read Level	dBuV	dB/m
	Antenna Factor	dB	dB
	Cable Loss	dB	dB
	Preamp Factor	cm	deg
	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB
1	2390.00	51.82	-2.18
2	2390.00	65.89	-8.11
3	2483.50	52.95	-1.05
4	2483.50	67.04	-6.96
5	4874.00	33.39	-20.61
6	4874.00	46.08	-27.92
7	7311.00	38.97	-15.03
8	7311.00	51.89	-22.11
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>			



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N <sub>TX</sub>	2	Polarization	H

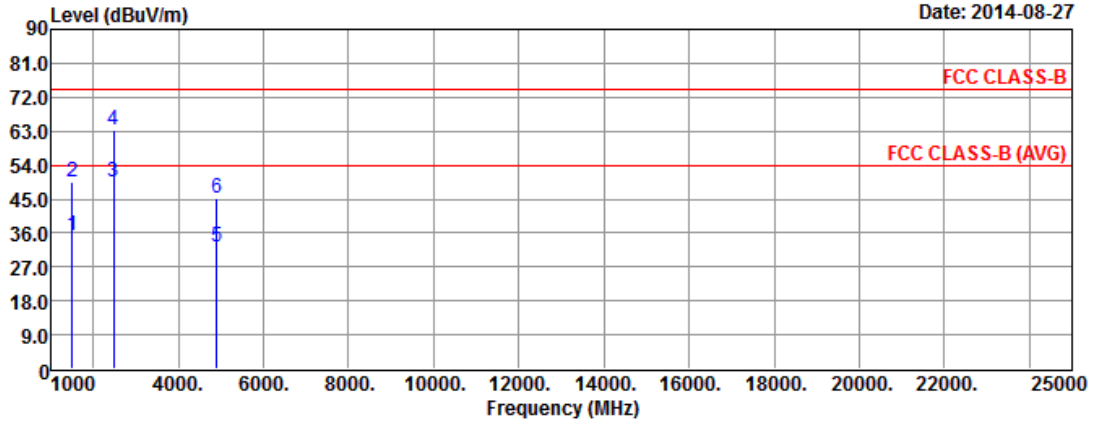

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.21	-18.79	54.00	41.68	25.80	3.45	35.72	---	---	Average
2	1500.00	49.50	-24.50	74.00	55.97	25.80	3.45	35.72	---	---	Peak
3	2483.50	49.33	-4.67	54.00	51.72	27.46	4.74	34.59	---	---	Average
4	2483.50	63.15	-10.85	74.00	65.54	27.46	4.74	34.59	---	---	Peak
5	4904.00	32.27	-21.73	54.00	27.03	31.65	6.73	33.14	---	---	Average
6	4904.00	45.17	-28.83	74.00	39.93	31.65	6.73	33.14	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N <sub>TX</sub>	2	Polarization	V

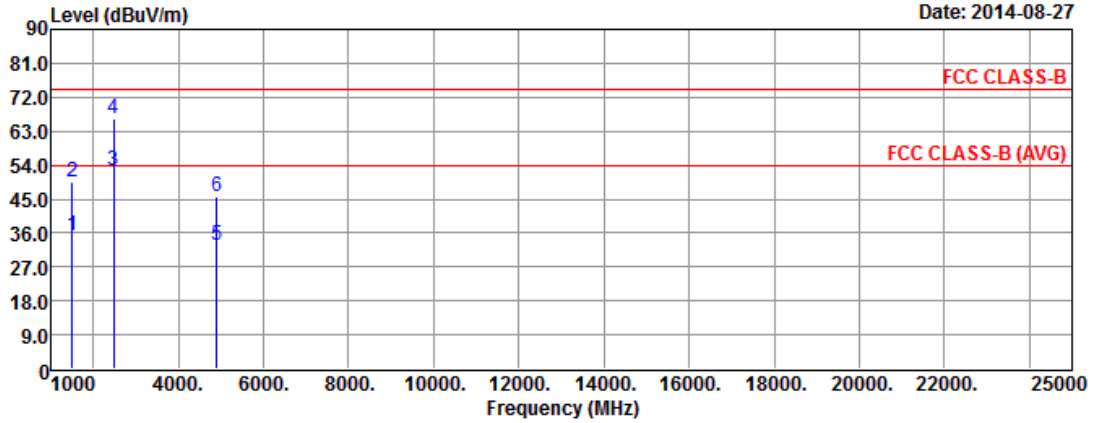

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1500.00	35.26	-18.74	54.00	41.73	25.80	3.45	35.72	---	---	Average
2	1500.00	49.37	-24.63	74.00	55.84	25.80	3.45	35.72	---	---	Peak
3	2483.50	52.67	-1.33	54.00	55.06	27.46	4.74	34.59	---	---	Average
4	2483.50	66.38	-7.62	74.00	68.77	27.46	4.74	34.59	---	---	Peak
5	4904.00	32.78	-21.22	54.00	27.54	31.65	6.73	33.14	---	---	Average
6	4904.00	45.79	-28.21	74.00	40.55	31.65	6.73	33.14	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2014	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2724	30 MHz ~ 1 GHz	Aug. 04, 2014	Radiation (03CH03-HY)
Horn Antenna	ETS • LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 11, 2014	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Aug. 03, 2014	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Mar. 05, 2014	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation (03CH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz ~ 30MHz	Jul. 28, 2014	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14, 2014	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2014	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 25, 2014	Conduction (CO04-HY)
Software	Audix	E3	3	Conducted	NCR	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20- SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 25, 2014	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Jan. 28, 2014	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Jan. 28, 2014	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_ 104	SN 345675/4	30MHz ~ 26.5GHz	Dec. 01, 2014	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_ 104	SN 345669/4	30MHz ~ 26.5GHz	Dec. 01, 2014	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.