



# FCC TEST REPORT

**REPORT NO.:** RF920617R08

**MODEL NO.:** GL2454MP-0T

**RECEIVED:** June 17, 2003

**TESTED:** June 19 ~ 25, 2003

**APPLICANT:** D-Link Corporation

**ADDRESS:** No.8, Li-Hsin VII Road Science Based Industrial  
Park Hsin-Chu, Taiwan

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 77 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0



## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST PROCEDURES .....	10
4.1.4	DEVIATION FROM TEST STANDARD .....	10
4.1.5	TEST SETUP .....	11
4.1.6	EUT OPERATING CONDITIONS .....	11
4.1.7	TEST RESULTS .....	12
4.2	RADIATED EMISSION MEASUREMENT .....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	18
4.2.2	TEST INSTRUMENTS .....	19
4.2.3	TEST PROCEDURES .....	20
4.2.4	DEVIATION FROM TEST STANDARD .....	20
4.2.5	TEST SETUP .....	21
4.2.6	EUT OPERATING CONDITIONS .....	21
4.2.7	TEST RESULTS (A) .....	22
4.2.8	TEST RESULTS (B) .....	29
4.2.9	TEST RESULTS (C) .....	36
4.3	6dB BANDWIDTH MEASUREMENT.....	43
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	43
4.3.2	TEST INSTRUMENTS .....	43
4.3.3	TEST PROCEDURE .....	44
4.3.4	DEVIATION FROM TEST STANDARD .....	44
4.3.5	TEST SETUP .....	44
4.3.6	EUT OPERATING CONDITIONS .....	44
4.3.7	TEST RESULTS .....	45
4.4	MAXIMUM PEAK OUTPUT POWER .....	54
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	54
4.4.2	TEST INSTRUMENTS .....	54



4.4.3	TEST PROCEDURES .....	55
4.4.4	DEVIATION FROM TEST STANDARD .....	55
4.4.5	TEST SETUP .....	55
4.4.6	EUT OPERATING CONDITIONS .....	55
4.4.7	TEST RESULTS .....	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	57
4.5.2	TEST INSTRUMENTS .....	57
4.5.3	TEST PROCEDURE .....	58
4.5.4	DEVIATION FROM TEST STANDARD .....	58
4.5.5	TEST SETUP .....	58
4.5.6	EUT OPERATING CONDITIONS .....	58
4.5.7	TEST RESULTS .....	59
4.6	BAND EDGES MEASUREMENT .....	67
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	67
4.6.2	TEST INSTRUMENTS .....	67
4.6.3	TEST PROCEDURE .....	67
4.6.4	DEVIATION FROM TEST STANDARD .....	67
4.6.5	EUT OPERATING CONDITION .....	68
4.6.6	TEST RESULTS .....	68
4.7	ANTENNA REQUIREMENT .....	73
4.7.1	STANDARD APPLICABLE .....	73
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	73
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	74
6	INFORMATION ON THE TESTING LABORATORIES .....	78



## 1 CERTIFICATION

**PRODUCT :** 2.4GHz/54Mbps Wireless MINI PCI Card  
**MODEL NO. :** GL2454MP-0T  
**BRAND NAME :** D-Link  
**APPLICANT :** D-Link Corporation  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 19 to 25, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Emily Lu , **DATE:** June 27, 2003  
Emily Lu  
**APPROVED BY:** Dr. Alan Lane , **DATE:** June 27, 2003  
Dr. Alan Lane  
Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -14.10dBuV at 0.180MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.10dBuV at 7311.10MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	2.4GHz/54Mbps Wireless MINI PCI Card
<b>MODEL NO.</b>	GL2454MP-0T
<b>SOURCE VOLTAGE</b>	$V_{nom} = 230$ $V_{min} = 207$ $V_{max} = 253$
<b>POWER SUPPLY</b>	3.3VDC from host equipment
<b>MODULATION TYPE</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	up to 54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>CHANNEL SPACING</b>	5MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	19.84dBm
<b>ANTENNA TYPE</b>	Dipole antenna, Patch antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. Fully compatible with the 802.11g standard to provide a wireless data rate of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. Five sets of antenna were provided to this EUT. Please refer to the following:

<b>Antenna Type</b>	<b>Antenna Gain (dBi)</b>
Dipole	1.7
Dipole	1.8
Dipole	2
Patch	2.5
Dipole	5

Three antennas were selected for the final test: 1.7dBi, 2.5dBi & 5dBi

4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 DESCRIPTION OF TEST MODES

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 22Mbps with CCK technique and 6Mbps with OFDM technique, the worst cases, were chosen for final test.
4. For "Radiated Emission Measurement test (section 4.2)", three test results were provided to this EUT. The test result A was for antenna gain with 1.7dBi, the test result B was for antenna gain with 2.5dBi and test result C for antenna gain with 5dBi.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 2.4GHz/54Mbps Wireless MINI PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-190-B220	FCC DoC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
3	MODEM	ACEEX	1414	980020569	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).





## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 10.
  4. The VCCI Site Registration No. is C-1312.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

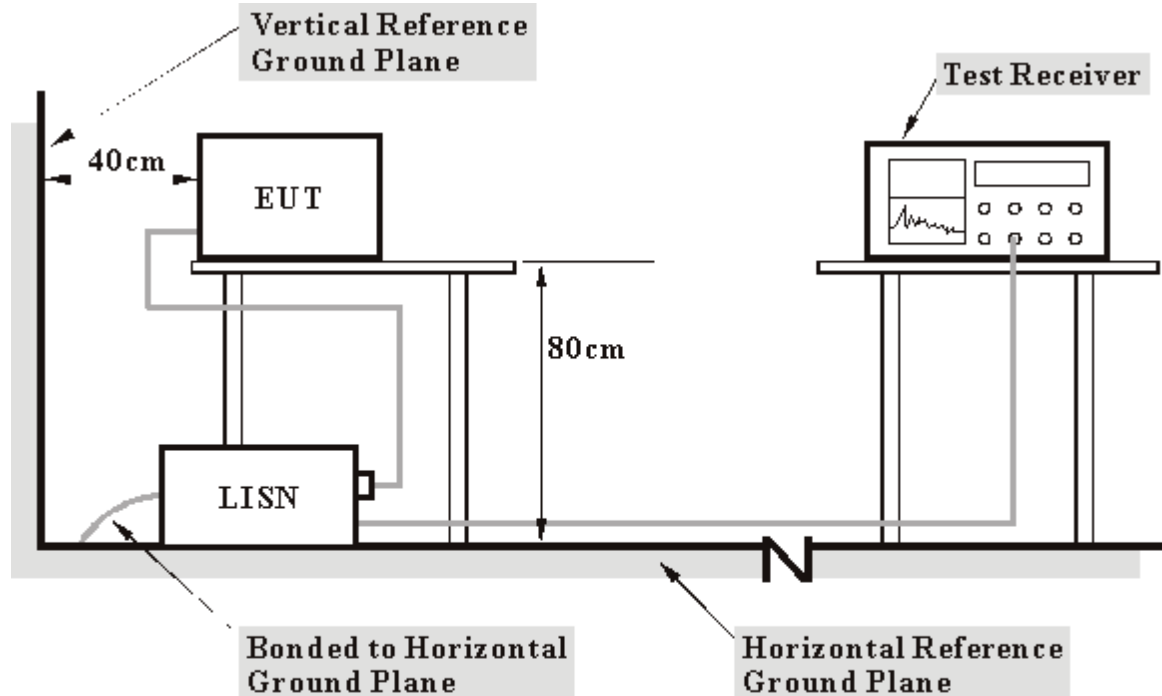

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeat steps b-e.




4.1.7 TEST RESULTS

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 01	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.180	0.06	50.33	-	50.39	-	64.49	54.49	-14.10	-
2	0.237	0.06	42.49	-	42.55	-	62.20	52.20	-19.65	-
3	0.297	0.06	35.52	-	35.58	-	60.33	50.33	-24.75	-
4	2.803	0.20	31.58	-	31.78	-	56.00	46.00	-24.22	-
5	4.534	0.24	29.78	-	30.02	-	56.00	46.00	-25.98	-
6	16.286	0.58	31.33	-	31.91	-	60.00	50.00	-28.09	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.
- 7.

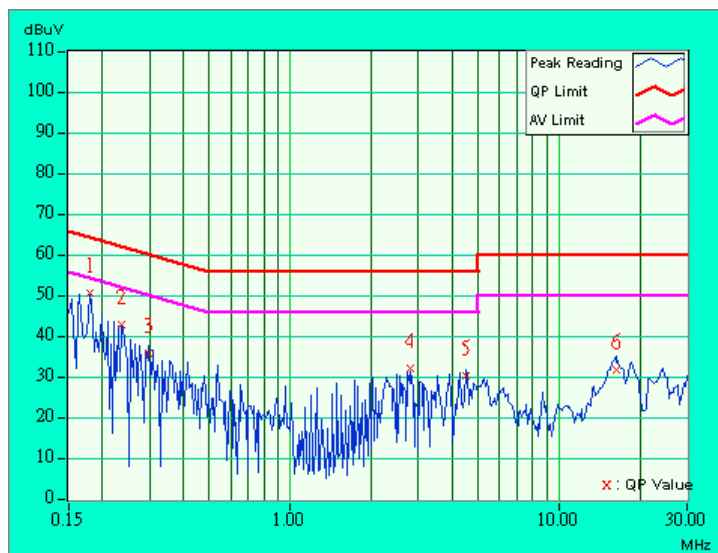




<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 01	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.180	0.05	47.45	-	47.50	-	64.49	54.49	-16.99	-
2	0.237	0.05	39.30	-	39.35	-	62.20	52.20	-22.85	-
3	0.294	0.05	28.75	-	28.80	-	60.41	50.41	-31.61	-
4	3.043	0.19	30.41	-	30.60	-	56.00	46.00	-25.40	-
5	4.234	0.21	31.12	-	31.33	-	56.00	46.00	-24.67	-
6	16.289	0.50	30.67	-	31.17	-	60.00	50.00	-28.83	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

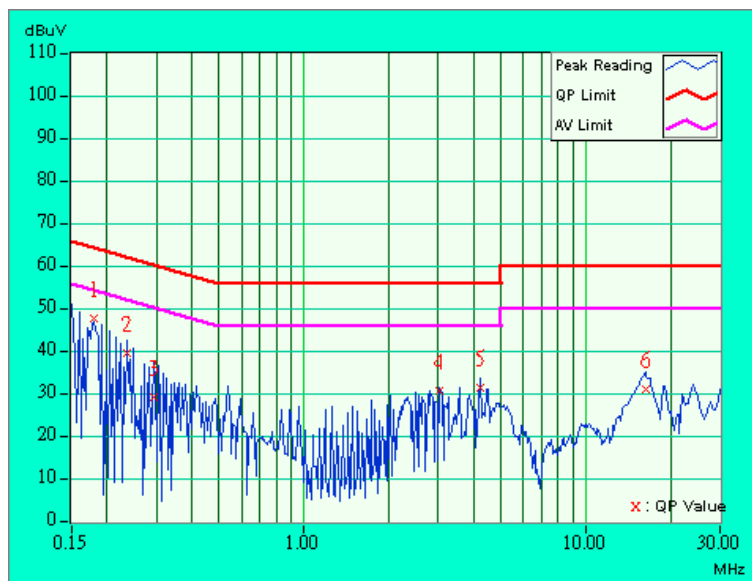




<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 06	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.06	49.23	-	49.29	-	64.63	54.63	-15.34	-
2	0.240	0.06	43.05	-	43.11	-	62.10	52.10	-18.99	-
3	0.357	0.06	34.49	-	34.55	-	58.80	48.80	-24.25	-
4	2.923	0.20	30.55	-	30.75	-	56.00	46.00	-25.25	-
5	3.817	0.22	28.48	-	28.70	-	56.00	46.00	-27.30	-
6	16.655	0.59	31.88	-	32.47	-	60.00	50.00	-27.53	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

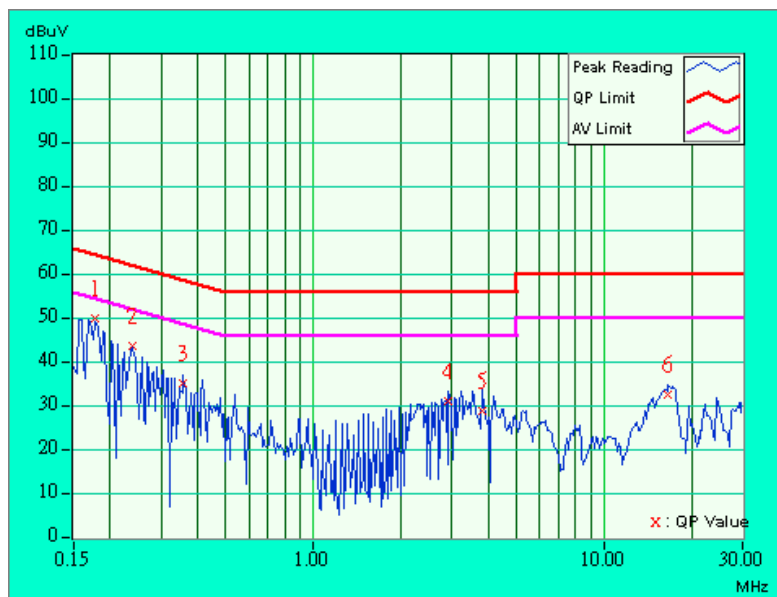




<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 06	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.05	39.80	-	39.85	-	64.77	54.77	-24.92	-
2	0.240	0.05	37.98	-	38.03	-	62.10	52.10	-24.07	-
3	0.297	0.05	33.04	-	33.09	-	60.33	50.33	-27.24	-
4	3.103	0.19	29.15	-	29.34	-	56.00	46.00	-26.66	-
5	15.638	0.49	27.85	-	28.34	-	60.00	50.00	-31.66	-
6	18.332	0.50	30.32	-	30.82	-	60.00	50.00	-29.18	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

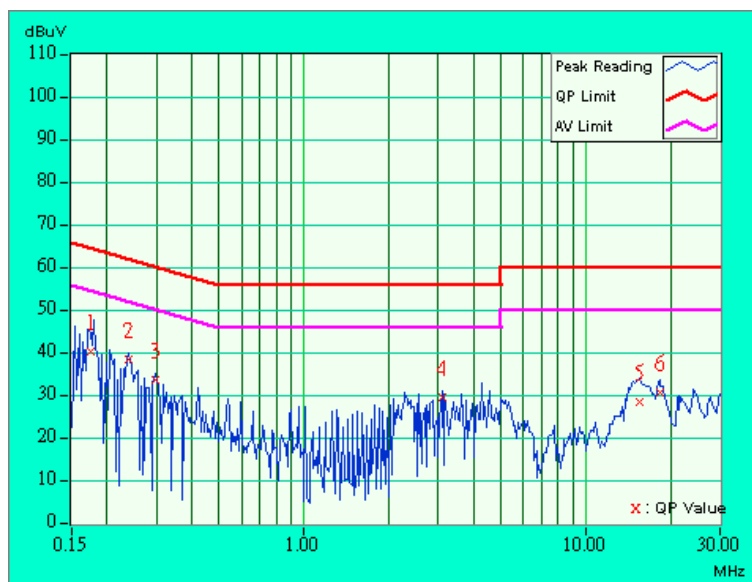




<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.183	0.06	46.01	-	46.07	-	64.35	54.35	-18.28	-
2	0.240	0.06	43.03	-	43.09	-	62.10	52.10	-19.01	-
3	0.417	0.06	32.75	-	32.81	-	57.51	47.51	-24.69	-
4	3.166	0.20	31.76	-	31.96	-	56.00	46.00	-24.04	-
5	4.480	0.24	28.74	-	28.98	-	56.00	46.00	-27.02	-
6	15.344	0.57	29.81	-	30.38	-	60.00	50.00	-29.62	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

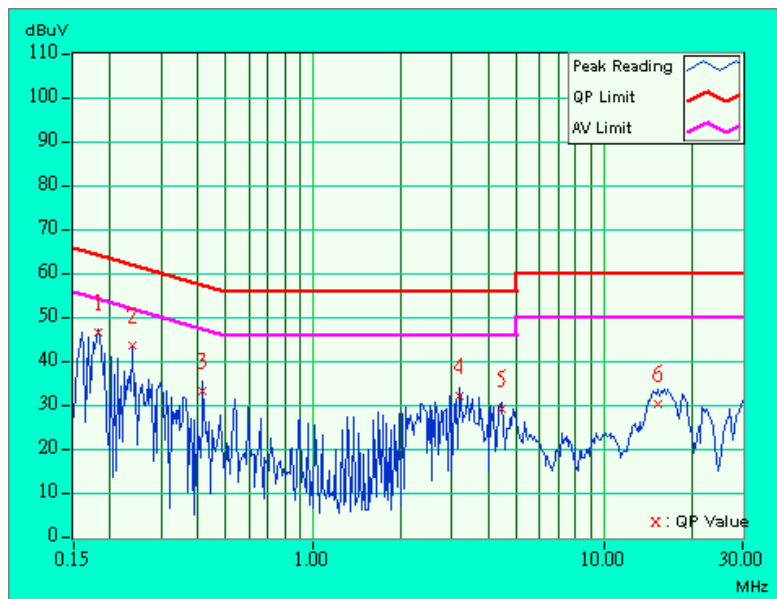






<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.05	40.58	-	40.63	-	64.75	54.75	-24.12	-
2	0.234	0.05	32.82	-	32.87	-	62.31	52.31	-29.44	-
3	0.297	0.05	33.00	-	33.05	-	60.33	50.33	-27.28	-
4	2.389	0.19	29.75	-	29.94	-	56.00	46.00	-26.06	-
5	4.423	0.22	27.88	-	28.10	-	56.00	46.00	-27.90	-
6	16.253	0.50	27.27	-	27.77	-	60.00	50.00	-32.23	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

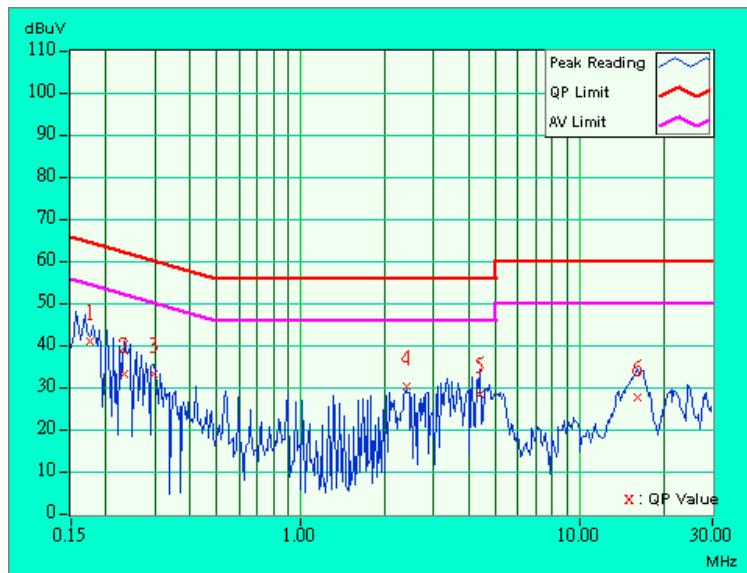



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8594E	3911A07465	July 08, 2003
* HP Preamplifier	8447D	2944A10386	Aug. 15, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	836858/008	Dec.13, 2003
* SCHAFFNER BILOG Antenna	CBL6111C	2727	July. 17, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July. 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* ADT. Turn Table	TT100	0201	NA
* ADT. Tower	AT100	0201	NA
* Software	ADT_Radiated_V5.06	NA	NA
* ANRITSU RF Switches	MP59B	6100237246	Oct. 30, 2003
* TIMES RF cable	LMR-600	CABLE-ST10-01	Oct. 30, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. "\*" = These equipment are used for the final measurement.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The test was performed in ADT Open Site No. 10.
  5. The VCCI Site Registration No. is R-1248.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

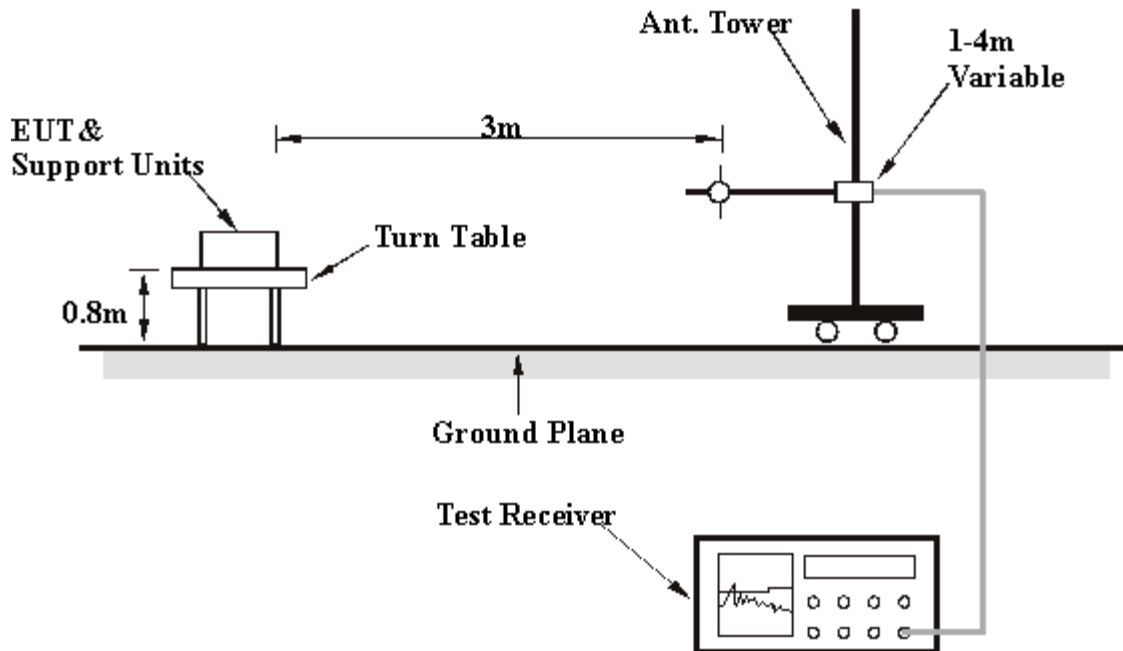

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



## 4.2.7 TEST RESULTS (A)

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>CHANNEL</b>	Channel 01	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.01	38.0 QP	43.50	-5.50	2.39 H	189	27.00	11.00
2	320.23	24.4 QP	46.00	-21.60	1.42 H	0	9.30	15.10
3	440.00	24.6 QP	46.00	-21.40	2.24 H	227	6.00	18.60
4	480.02	30.4 QP	46.00	-15.60	1.00 H	227	11.10	19.40
5	520.03	27.1 QP	46.00	-18.90	1.84 H	307	6.30	20.80
6	560.04	29.1 QP	46.00	-16.90	2.00 H	234	6.90	22.20
7	759.99	28.2 QP	46.00	-17.80	1.10 H	193	3.50	24.70
8	840.06	28.9 QP	46.00	-17.10	1.99 H	219	3.40	25.50
9	879.98	28.6 QP	46.00	-17.40	1.00 H	155	3.00	25.60
10	920.01	28.8 QP	46.00	-17.20	1.04 H	133	2.70	26.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.03	27.5 QP	43.50	-16.00	1.10 V	97	16.50	11.00
2	480.03	27.2 QP	46.00	-18.80	1.59 V	149	7.80	19.40
3	520.00	27.7 QP	46.00	-18.30	1.04 V	142	7.00	20.80
4	560.00	27.5 QP	46.00	-18.50	1.06 V	263	5.30	22.20
5	600.00	27.7 QP	46.00	-18.30	1.35 V	200	6.20	21.50
6	640.00	24.9 QP	46.00	-21.10	1.35 V	304	2.70	22.20
7	680.00	27.7 QP	46.00	-18.30	1.28 V	210	4.80	22.90
8	760.00	27.5 QP	46.00	-18.50	1.40 V	123	2.80	24.70
9	840.00	28.6 QP	46.00	-17.40	1.56 V	250	3.20	25.50
10	880.00	26.9 QP	46.00	-19.10	1.61 V	82	1.40	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	39.6 PK	80.20	-40.60	1.15 H	214	9.20	30.40
1	2038.00	31.2 AV	71.30	-40.10	1.15 H	214	0.80	30.40
2	*2412.00	100.2 PK			1.18 H	130	68.20	32.00
2	*2412.00	91.3 AV			1.18 H	130	59.30	30.40
3	4076.00	43.3 PK	74.00	-30.70	1.14 H	222	6.40	36.90
4	7236.00	57.6 PK	80.20	-22.60	1.35 H	135	13.00	44.60
4	7236.00	48.2 AV	71.30	-23.10	1.35 H	135	3.60	31.90

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	41.6 PK	86.80	-45.20	1.58 V	145	11.20	30.40
1	2038.00	35.2 AV	77.20	-42.00	1.58 V	145	4.80	30.40
2	*2412.00	106.8 PK			1.24 V	155	74.80	32.00
2	*2412.00	97.2 AV			1.24 V	155	65.20	30.40
3	4076.00	46.2 PK	74.00	-27.80	1.20 V	233	9.40	36.90
4	4824.00	45.2 PK	74.00	-28.80	1.12 V	238	6.70	38.50
5	7236.10	62.1 PK	86.80	24.70	1.33 V	354	17.50	44.60
5	7236.10	53.7 AV	77.20	-23.50	1.33 V	354	9.10	31.90
6	9648.00	53.3 PK	86.80	-33.50	1.25 V	214	7.00	46.30
6	9648.00	44.2 AV	77.20	-33.00	1.25 V	214	-2.00	32.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.6 PK	82.50	-37.90	1.18 H	200	14.00	30.60
1	2063.00	35.2 AV	73.20	-38.00	1.18 H	200	4.60	30.60
2	*2437.00	102.5 PK			1.36 H	214	70.30	32.20
2	*2437.00	93.2 AV			1.36 H	214	61.00	30.60
3	4126.00	45.2 PK	74.00	-28.80	1.32 H	158	8.20	37.00
4	7315.20	55.3 PK	74.00	-18.70	1.10 H	89	10.70	44.60
4	7315.20	46.3 AV	54.00	-7.70	1.10 H	89	1.70	32.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.5 PK	87.50	-48.00	1.12 V	210	11.90	30.60
1	2063.00	33.6 AV	78.20	-44.60	1.12 V	210	3.00	30.60
2	*2437.00	107.5 PK			1.19 V	123	75.30	32.20
2	*2437.00	98.2 AV			1.19 V	123	66.00	30.60
3	4126.00	44.7 PK	74.00	-29.30	1.32 V	102	7.70	37.00
4	7308.98	60.1 PK	74.00	-13.90	1.02 V	155	15.50	44.60
4	7308.98	51.4 AV	54.00	-2.60	1.02 V	155	6.80	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency





<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	44.2 PK	82.70	-38.50	1.22 H	163	13.40	30.80
1	2088.00	38.3 AV	73.70	-35.40	1.22 H	163	7.40	30.80
2	*2462.00	102.7 PK			1.40 H	178	70.20	32.50
2	*2462.00	93.7 AV			1.40 H	178	61.20	30.80
3	4176.00	44.3 PK	74.00	-29.70	1.06 H	199	7.30	37.00
4	7389.20	44.6 PK	82.70	-38.10	1.16 H	325	-0.40	45.00
4	7389.20	37.0 AV	73.70	-36.70	1.16 H	325	-8.10	45.00

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.5 PK	90.30	-47.80	1.02 V	125	11.70	30.80
1	2088.00	35.6 AV	81.20	-45.60	1.02 V	125	4.80	30.80
2	*2462.13	110.3 PK			1.09 V	112	77.90	32.50
2	*2462.13	101.2 AV			1.09 V	112	68.80	30.80
3	4176.00	46.0 PK	74.00	-28.00	1.22 V	200	9.00	37.00
4	4924.00	45.6 PK	74.00	-28.40	1.12 V	214	6.80	38.80
5	7386.13	57.2 PK	74.00	-16.80	1.15 V	185	12.20	45.00
5	7386.13	49.4 AV	54.00	-4.60	1.15 V	185	4.40	32.50
6	9848.00	50.0 PK	90.30	-40.30	1.11 V	144	4.70	45.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	40.4 PK	85.40	-45.00	1.16 H	220	9.90	30.40
1	2038.00	34.2 AV	76.20	-42.00	1.16 H	220	3.80	30.40
2	*2412.00	105.4 PK			1.12 H	125	73.40	32.00
2	*2412.00	96.2 AV			1.12 H	125	64.20	30.40
3	4076.00	45.2 PK	74.00	-28.80	1.10 H	144	8.30	36.90
4	7236.10	62.5 PK	85.40	-22.90	1.25 H	135	17.90	44.60
4	7236.10	53.1 AV	76.20	-23.10	1.25 H	135	8.50	31.90

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.4 PK	83.40	-41.00	1.22 V	120	11.90	30.40
1	2038.00	35.7 AV	74.20	-38.50	1.22 V	120	5.30	30.40
2	*2412.00	103.4 PK			1.14 V	225	71.40	32.00
2	*2412.00	94.2 AV			1.14 V	225	62.20	30.40
3	4076.00	46.6 PK	74.00	-27.40	1.12 V	106	9.70	36.90
4	7236.10	61.6 PK	83.40	-21.80	1.66 V	100	17.00	44.60
4	7236.10	52.3 AV	74.20	-21.90	1.66 V	100	7.70	31.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	43.3 PK	87.90	-44.60	1.33 H	120	12.60	30.60
1	2063.00	37.0 AV	78.00	-41.00	1.33 H	120	6.40	30.60
2	*2437.00	107.9 PK			1.00 H	144	75.70	32.20
2	*2437.00	98.0 AV			1.00 H	144	65.80	30.60
3	4126.00	46.2 PK	74.00	-27.80	1.38 H	244	9.20	37.00
4	7311.00	63.8 PK	74.00	-10.20	1.25 H	100	19.20	44.60
4	7311.00	52.7 AV	54.00	-1.30	1.25 H	100	8.10	32.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.3 PK	87.70	-45.40	1.33 V	100	11.70	30.60
1	2063.00	34.2 AV	77.30	-43.10	1.33 V	100	3.60	30.60
2	*2437.00	107.7 PK			1.42 V	122	75.40	32.20
2	*2437.00	97.3 AV			1.42 V	122	65.00	30.60
3	4126.00	44.7 PK	74.00	-29.30	1.55 V	260	7.70	37.00
4	7311.00	61.4 PK	74.00	-12.60	1.25 V	114	16.80	44.60
4	7311.00	51.0 AV	54.00	-3.00	1.25 V	114	6.40	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	38.6 PK	87.20	-48.60	1.44 H	125	7.80	30.80
1	2088.00	35.0 AV	77.60	-42.60	1.44 H	125	4.20	30.80
2	*2462.00	107.2 PK			1.40 H	86	74.80	32.50
2	*2462.00	97.6 AV			1.40 H	86	65.20	30.80
3	4176.05	46.2 PK	74.00	-27.80	1.45 H	110	9.30	37.00
4	7381.05	57.7 PK	74.00	-16.30	1.12 H	210	12.70	45.00
4	7381.05	48.3 AV	54.00	-5.70	1.12 H	210	3.40	32.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.7 PK	88.60	-45.90	1.30 V	220	11.90	30.80
1	2088.00	37.1 AV	77.20	-40.10	1.30 V	220	6.30	30.80
2	*2462.00	108.6 PK			1.10 V	233	76.20	32.50
2	*2462.00	97.2 AV			1.10 V	233	64.80	30.80
3	4176.00	47.0 PK	74.00	-27.00	1.25 V	144	10.00	37.00
4	7381.20	59.2 PK	74.00	-14.80	1.30 V	144	14.20	45.00
4	7381.20	48.5 AV	54.00	-5.50	1.30 V	144	3.50	32.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



## 4.2.8 TEST RESULTS (B)

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.02	31.8 QP	43.50	-11.70	2.00 H	1	20.80	11.00
2	280.02	28.0 QP	46.00	-18.00	1.54 H	153	13.90	14.10
3	320.02	33.0 QP	46.00	-13.00	1.32 H	10	17.90	15.10
4	440.01	29.1 QP	46.00	-16.90	1.01 H	121	10.60	18.60
5	520.01	25.4 QP	46.00	-20.60	1.95 H	139	4.60	20.80
6	560.01	26.4 QP	46.00	-19.60	1.47 H	226	4.30	22.20
7	640.01	28.1 QP	46.00	-17.90	1.37 H	178	5.80	22.20
8	720.01	28.0 QP	46.00	-18.00	1.63 H	149	4.20	23.80
9	760.01	31.2 QP	46.00	-14.80	1.23 H	293	6.50	24.70
10	880.01	28.8 QP	46.00	-17.20	1.58 H	167	3.20	25.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.01	25.9 QP	43.50	-17.60	1.13 V	351	14.90	11.00
2	280.02	24.6 QP	46.00	-21.40	1.69 V	187	10.50	14.10
3	320.00	25.0 QP	46.00	-21.00	1.27 V	139	9.90	15.10
4	440.00	24.7 QP	46.00	-21.30	1.27 V	73	6.20	18.60
5	480.02	24.6 QP	46.00	-21.40	1.64 V	258	5.30	19.40
6	520.02	23.0 QP	46.00	-23.00	1.00 V	202	2.30	20.80
7	640.00	27.2 QP	46.00	-18.80	1.30 V	290	5.00	22.20
8	720.00	27.2 QP	46.00	-18.80	1.52 V	75	3.40	23.80
9	760.02	28.8 QP	46.00	-17.20	1.12 V	134	4.10	24.70
10	880.01	27.7 QP	46.00	-18.30	1.61 V	249	2.10	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	49.0 PK	85.40	-36.40	1.31 H	178	18.50	30.40
1	2038.00	43.5 AV	73.10	-29.60	1.31 H	178	13.10	30.40
2	*2412.00	105.4 PK			1.14 H	161	73.40	32.00
2	*2412.00	93.1 AV			1.14 H	161	61.10	30.40
3	4076.00	44.3 PK	74.00	-29.70	1.02 H	275	7.40	36.90
4	7236.20	52.3 PK	85.40	-33.10	1.00 H	295	7.60	44.60
4	7236.20	43.0 AV	73.10	-30.10	1.00 H	295	-1.70	31.90
5	9648.00	54.5 PK	85.40	-30.90	1.16 H	59	8.30	46.30
5	9648.00	45.1 AV	73.10	-28.00	1.16 H	59	-1.20	32.00

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	39.6 PK	84.40	-44.80	1.87 V	163	9.20	30.40
1	2038.00	33.9 AV	75.20	-41.30	1.87 V	163	3.50	30.40
2	*2412.00	104.4 PK			1.20 V	172	72.40	32.00
2	*2412.00	95.2 AV			1.20 V	172	63.20	30.40
3	4076.00	45.5 PK	74.00	-28.50	1.22 V	56	8.70	36.90
4	7236.10	62.6 PK	84.40	-21.80	1.33 V	358	17.90	44.60
4	7236.10	52.1 AV	75.20	-23.10	1.33 V	358	7.50	31.90
5	9648.12	55.4 PK	84.40	-29.00	1.51 V	254	9.20	46.30
5	9648.12	45.5 AV	75.20	-29.70	1.51 V	254	-0.70	32.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.3 PK	86.80	-42.50	1.26 H	176	13.70	30.60
1	2063.00	39.0 AV	76.50	-37.50	1.26 H	176	8.40	30.60
2	*2437.00	106.8 PK			1.14 H	158	74.60	32.20
2	*2437.00	96.5 AV			1.14 H	158	64.20	30.60
3	4126.00	45.0 PK	74.00	-29.00	1.16 H	304	8.00	37.00
4	7311.20	62.4 PK	74.00	-11.60	1.53 H	49	17.80	44.60
4	7311.20	51.8 AV	54.00	-2.20	1.53 H	49	7.20	32.20
5	9748.00	58.9 PK	86.80	-27.90	1.20 H	94	11.60	47.30
5	9748.00	48.2 AV	76.50	-28.30	1.20 H	94	0.90	37.00

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.4 PK	87.20	-42.80	1.00 V	170	13.80	30.60
1	2063.00	40.1 AV	76.70	-36.60	1.00 V	170	9.50	30.60
2	*2437.00	107.2 PK			1.20 V	160	75.00	32.20
2	*2437.00	96.7 AV			1.20 V	160	64.50	30.60
3	4126.00	45.0 PK	74.00	-29.00	1.35 V	78	7.90	37.00
4	7310.20	53.4 PK	74.00	-20.60	1.35 V	1	8.80	44.60
4	7310.20	45.0 AV	54.00	-9.00	1.35 V	1	0.40	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	41.4 PK	84.80	-43.40	1.04 H	184	10.50	30.80
1	2088.00	33.4 AV	76.00	-42.60	1.04 H	184	2.60	30.80
2	*2462.00	104.8 PK			1.00 H	160	72.40	32.50
2	*2462.00	96.0 AV			1.00 H	160	63.60	30.80
3	4175.95	44.5 PK	74.00	-29.50	1.23 H	265	7.60	37.00
4	4924.05	44.2 PK	74.00	-29.80	1.36 H	247	5.40	38.80
5	7386.00	58.7 PK	74.00	-15.30	1.25 H	335	13.70	45.00
5	7386.00	50.4 AV	54.00	-3.60	1.25 H	335	5.40	32.50
6	9848.00	53.7 PK	84.80	-31.10	1.25 H	235	8.30	45.30
6	9848.00	43.9 AV	76.00	-32.10	1.25 H	235	-1.50	37.00

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	44.3 PK	87.70	-43.40	1.10 V	275	13.50	30.80
1	2088.00	39.0 AV	78.50	-39.50	1.10 V	275	8.20	30.80
2	*2462.00	107.7 PK			1.15 V	160	75.20	32.50
2	*2462.00	98.5 AV			1.15 V	160	66.00	30.80
3	4176.85	44.7 PK	74.00	-29.30	1.43 V	92	7.70	37.00
4	4924.05	44.4 PK	74.00	-29.60	1.30 V	282	5.60	38.80
5	7386.20	59.5 PK	74.00	-14.50	1.52 V	356	14.50	45.00
5	7386.20	51.0 AV	54.00	-3.00	1.52 V	356	6.00	32.50
6	9848.00	54.0 PK	87.70	-33.70	1.35 V	285	8.60	45.30
6	9848.00	44.1 AV	78.50	-34.40	1.35 V	285	-1.20	32.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency





<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.4 PK	86.00	-42.60	1.32 H	222	11.90	30.40
1	2038.00	37.6 AV	77.60	-40.00	1.32 H	222	7.20	30.40
2	*2412.00	106.0 PK			1.32 H	158	73.90	32.00
2	*2412.00	97.6 AV			1.32 H	158	65.60	30.40
3	4076.32	44.7 PK	74.00	-29.30	1.47 H	300	7.80	36.90
4	7236.00	65.3 PK	86.00	-20.70	1.32 H	255	20.70	44.60
4	7236.00	54.7 AV	77.60	-22.90	1.32 H	255	10.10	31.90

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.4 PK	83.5	-41.10	1.36 V	125	11.90	30.40
1	2038.00	36.0 AV	75.10	-39.10	1.36 V	125	5.50	30.40
2	*2412.00	103.5 PK			1.10 V	242	71.50	32.00
2	*2412.00	95.1 AV			1.10 V	242	63.10	30.40
3	4076.00	46.6 PK	74.00	-27.40	1.22 V	100	9.70	36.90
4	7236.10	62.3 PK	83.50	-21.20	1.32 V	245	17.70	44.60
4	7236.10	53.6 AV	75.10	-21.50	1.32 V	245	9.00	31.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	43.2 PK	86.70	-43.50	1.32 H	152	12.60	30.60
1	2063.00	36.9 AV	77.00	-40.10	1.32 H	152	6.20	30.60
2	*2437.00	106.7 PK			1.10 H	232	74.50	32.20
2	*2437.00	97.0 AV			1.10 H	232	64.80	30.60
3	4126.00	45.4 PK	74.00	-28.60	1.25 H	258	8.30	37.00
4	7311.25	63.6 PK	74.00	-10.40	1.10 H	163	19.00	44.60
4	7311.25	51.2 AV	54.00	-2.80	1.10 H	163	6.60	32.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.3 PK	85.70	-43.40	1.35 V	300	11.70	30.60
1	2063.00	34.7 AV	76.20	-41.50	1.35 V	300	4.10	30.60
2	*2437.00	105.7 PK			1.42 V	200	73.40	32.20
2	*2437.00	96.2 AV			1.42 V	200	64.00	30.60
3	4126.00	46.0 PK	74.00	-28.00	1.36 V	288	8.90	37.00
4	7311.25	62.4 PK	74.00	-11.60	1.59 V	120	17.80	44.60
4	7311.25	50.3 AV	54.00	-3.70	1.59 V	120	5.70	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.4 PK	88.00	-45.60	1.47 H	126	11.60	30.80
1	2088.00	37.6 AV	77.80	-40.20	1.47 H	126	6.70	30.80
2	*2462.00	108.0 PK			1.00 H	235	75.50	32.50
2	*2462.00	97.8 AV			1.00 H	235	65.30	30.80
3	4176.00	48.3 PK	74.00	-25.70	1.23 H	236	11.30	37.00
4	7381.20	58.7 PK	74.00	-15.30	1.30 H	200	13.70	45.00
4	7381.20	48.4 AV	54.00	-5.60	1.30 H	200	3.40	32.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.03	40.3 PK	87.20	-46.90	1.63 V	89	9.50	30.80
1	2088.03	36.2 AV	77.00	-40.80	1.63 V	89	9.50	30.80
2	*2462.00	107.2 PK			1.45 V	89	74.80	32.50
2	*2462.00	97.0 AV			1.45 V	89	64.60	30.80
3	4176.31	46.4 PK	74.00	-27.60	1.45 V	214	9.40	37.00
4	7381.25	57.4 PK	74.00	-16.60	1.25 V	332	12.40	45.00
4	7381.25	46.6 AV	54.00	-7.40	1.25 V	332	1.60	32.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency

## 4.2.9 TEST RESULTS (C)

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.00	40.4 QP	43.50	-3.10	2.03 H	166	29.50	11.00
2	400.01	33.3 QP	46.00	-12.70	1.00 H	152	15.80	17.50
3	440.01	31.5 QP	46.00	-14.50	1.00 H	33	12.90	18.60
4	480.01	33.1 QP	46.00	-12.90	1.00 H	50	13.80	19.40
5	520.01	27.8 QP	46.00	-18.20	1.00 H	167	7.10	20.80
6	560.01	28.9 QP	46.00	-17.10	1.80 H	175	6.70	22.20
7	600.01	30.8 QP	46.00	-15.20	1.60 H	22	9.30	21.50
8	640.01	31.4 QP	46.00	-14.60	1.38 H	130	9.20	22.20
9	720.01	30.5 QP	46.00	-15.50	1.36 H	216	6.70	23.80
10	760.01	30.9 QP	46.00	-15.10	1.54 H	147	6.20	24.70
11	880.01	32.9 QP	46.00	-13.10	1.06 H	121	7.40	25.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.01	31.6 QP	43.50	-11.90	2.10 V	220	20.60	11.00
2	400.01	29.4 QP	46.00	-16.60	1.70 V	163	11.80	17.50
3	440.01	32.5 QP	46.00	-13.50	1.33 V	199	13.90	18.60
4	480.01	35.8 QP	46.00	-10.20	1.31 V	134	16.50	19.40
5	520.01	28.8 QP	46.00	-17.20	1.72 V	149	8.00	20.80
6	560.01	29.2 QP	46.00	-16.80	1.02 V	221	7.10	22.20
7	600.01	32.4 QP	46.00	-13.60	1.02 V	126	10.90	21.50
8	640.02	31.9 QP	46.00	-14.10	1.40 V	354	9.60	22.20
9	720.04	28.1 QP	46.00	-17.90	1.72 V	84	4.30	23.80
10	760.02	27.2 QP	46.00	-18.80	1.72 V	282	2.50	24.70
11	880.02	30.0 QP	46.00	-16.00	1.12 V	99	4.40	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	38.0 PK	83.30	-45.30	1.28 H	112	7.60	30.40
1	2038.00	30.3 AV	73.30	-43.00	1.28 H	112	-0.10	30.40
2	*2412.00	103.3 PK			1.18 H	129	71.30	32.00
2	*2412.00	93.3 AV			1.18 H	129	61.20	30.40
3	4076.00	44.1 PK	74.00	-29.90	1.27 H	171	7.20	36.90
4	7236.00	58.8 PK	83.30	-24.50	1.39 H	217	14.20	44.60
4	7236.00	49.8 AV	73.30	-23.50	1.39 H	217	5.10	31.90

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.0 PK	92.00	-50.00	1.39 V	126	11.50	30.40
1	2038.00	37.3 AV	81.50	-44.20	1.39 V	126	6.90	30.40
2	*2412.00	112.0 PK			1.23 V	191	79.90	32.00
2	*2412.00	101.5 AV			1.23 V	191	69.50	30.40
3	4076.00	46.1 PK	74.00	-27.90	1.19 V	287	9.20	36.90
4	4824.00	45.7 PK	74.00	-28.30	1.00 V	174	7.20	38.50
5	7236.00	64.2 PK	92.00	-27.80	1.36 V	96	19.60	44.60
5	7236.00	55.2 AV	81.50	-26.30	1.36 V	96	10.60	31.90
6	9648.00	54.6 PK	92.00	-37.40	1.26 V	271	8.30	46.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.1 PK	84.90	-42.80	1.17 H	209	11.50	30.60
1	2063.00	36.9 AV	76.10	-39.20	1.17 H	209	6.30	30.60
2	*2437.00	104.9 PK			1.29 H	116	72.70	32.20
2	*2437.00	96.1 AV			1.29 H	116	63.90	30.60
3	4126.00	44.6 PK	74.00	-29.40	1.32 H	125	7.50	37.00
4	7315.00	54.2 PK	74.00	-19.80	1.05 H	75	9.60	44.60
4	7315.00	45.5 AV	54.00	-8.50	1.05 H	75	0.90	32.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.1 PK	92.20	-48.10	1.16 V	204	13.50	30.60
1	2063.00	36.0 AV	82.90	-46.90	1.16 V	204	5.30	30.60
2	*2437.00	112.2 PK			1.19 V	113	80.00	32.20
2	*2437.00	102.9 AV			1.19 V	113	70.60	30.60
3	4126.00	45.4 PK	74.00	-28.60	1.31 V	103	8.30	37.00
4	7308.98	62.1 PK	74.00	-11.90	1.00 V	147	17.60	44.60
4	7308.98	52.8 AV	54.00	-1.20	1.00 V	147	8.30	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	45.0 PK	84.20	-39.20	1.03 H	185	14.20	30.80
1	2088.00	39.7 AV	74.90	-35.20	1.03 H	185	8.90	30.80
2	*2462.00	104.2 PK			1.00 H	193	71.70	32.50
2	*2462.00	94.9 AV			1.00 H	193	62.50	30.80
3	4176.00	44.7 PK	74.00	-29.30	1.03 H	193	7.70	37.00
4	7389.20	46.4 PK	74.00	-27.60	1.19 H	88	1.30	45.00

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	41.7 PK	95.10	-53.40	1.00 V	165	10.90	30.80
1	2088.00	34.4 AV	85.40	-51.00	1.00 V	165	3.60	30.80
2	*2462.13	115.1 PK			1.02 V	216	82.60	32.50
2	*2462.13	105.4 AV			1.02 V	216	73.00	30.80
3	4176.00	44.9 PK	74.00	-29.10	1.15 V	135	8.00	37.00
4	4924.00	46.3 PK	74.00	-27.70	1.35 V	200	7.50	38.80
5	7386.13	58.6 PK	74.00	-15.40	1.10 V	194	13.60	45.00
5	7386.13	50.2 AV	54.00	-3.80	1.10 V	194	5.20	32.50
6	9848.00	50.5 PK	95.10	-44.60	1.18 V	110	5.20	45.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 01		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	41.9 PK	87.20	-45.30	1.15 H	222	11.50	30.40
1	2038.00	36.0 AV	77.00	-41.00	1.15 H	222	5.60	30.40
2	*2412.00	107.2 PK			1.13 H	114	75.20	32.00
2	*2412.00	97.0 AV			1.13 H	114	64.90	30.40
3	4076.00	45.6 PK	74.00	-28.40	1.00 H	125	8.70	36.90
4	7236.10	64.6 PK	87.20	-22.60	1.42 H	145	20.00	44.60
4	7236.10	53.9 AV	77.00	-23.10	1.42 H	145	9.20	31.90

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	43.0 PK	84.60	-41.60	1.28 V	115	12.60	30.40
1	2038.00	36.7 AV	75.20	-38.50	1.28 V	115	6.30	30.40
2	*2412.00	104.6 PK			1.12 V	266	72.60	32.00
2	*2412.00	95.2 AV			1.12 V	266	63.20	30.40
3	4076.00	47.5 PK	74.00	-26.50	1.00 V	99	10.70	36.90
4	7236.10	63.5 PK	84.60	-21.10	1.62 V	118	18.90	44.60
4	7236.10	52.1 AV	75.20	-23.10	1.62 V	118	7.50	31.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency





<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 06		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.1 PK	87.50	-43.40	1.32 H	130	13.50	30.60
1	2063.00	37.50PK	78.10	-40.60	1.32 H	130	6.90	30.60
2	*2437.00	107.5 PK			1.00 H	216	75.30	32.20
2	*2437.00	98.1 AV			1.00 H	216	65.80	30.60
3	4126.00	46.4 PK	74.00	-27.60	1.40 H	258	9.30	37.00
4	7311.10	64.8 PK	74.00	-9.20	1.26 H	95	20.30	44.60
4	7311.10	52.9 AV	54.00	-1.10	1.26 H	95	8.30	32.20

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.9 PK	89.10	-46.20	1.36 V	95	12.30	30.60
1	2063.00	34.9 AV	78.50	-43.60	1.36 V	95	4.30	30.60
2	*2437.00	109.1 PK			1.42 V	114	76.80	32.20
2	*2437.00	98.5 AV			1.42 V	114	66.30	30.60
3	4126.00	45.9 PK	74.00	-28.10	1.58 V	268	8.80	37.00
4	7311.10	63.9 PK	74.00	-10.10	1.70 V	117	19.30	44.60
4	7311.10	51.4 AV	54.00	-2.60	1.70 V	117	6.90	32.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.7 PK	91.00	-48.30	1.30 H	128	11.90	30.80
1	2088.00	37.4 AV	79.00	-41.60	1.30 H	128	6.60	30.80
2	*2462.00	110.0 PK			1.00 H	226	77.50	32.50
2	*2462.00	99.0 AV			1.00 H	226	66.50	30.80
3	4176.00	47.7 PK	74.00	-26.30	1.25 H	224	10.70	37.00
4	7381.20	59.9 PK	74.00	-14.10	1.30 H	147	14.90	45.00
4	7381.20	48.6 AV	54.00	-5.40	1.30 H	147	3.60	32.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.05	39.4 PK	88.80	-49.40	1.54 V	78	8.50	30.80
1	2088.05	35.1 AV	78.80	-43.70	1.54 V	78	4.30	30.80
2	*2462.00	108.8 PK			1.40 V	96	76.40	32.50
2	*2462.00	98.8 AV			1.40 V	96	66.30	30.80
3	4176.05	45.9 PK	74.00	-28.10	1.48 V	96	9.00	37.00
4	7381.25	58.3 PK	74.00	-15.70	1.15 V	231	13.30	45.00
4	7381.25	47.1 AV	54.00	-6.90	1.15 V	231	2.10	32.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

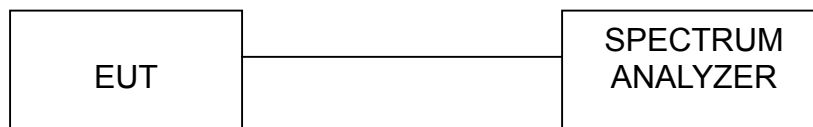

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 4.3.7 TEST RESULTS

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	11.32	0.5	PASS
6	2437	11.36	0.5	PASS
11	2462	11.60	0.5	PASS





CH1

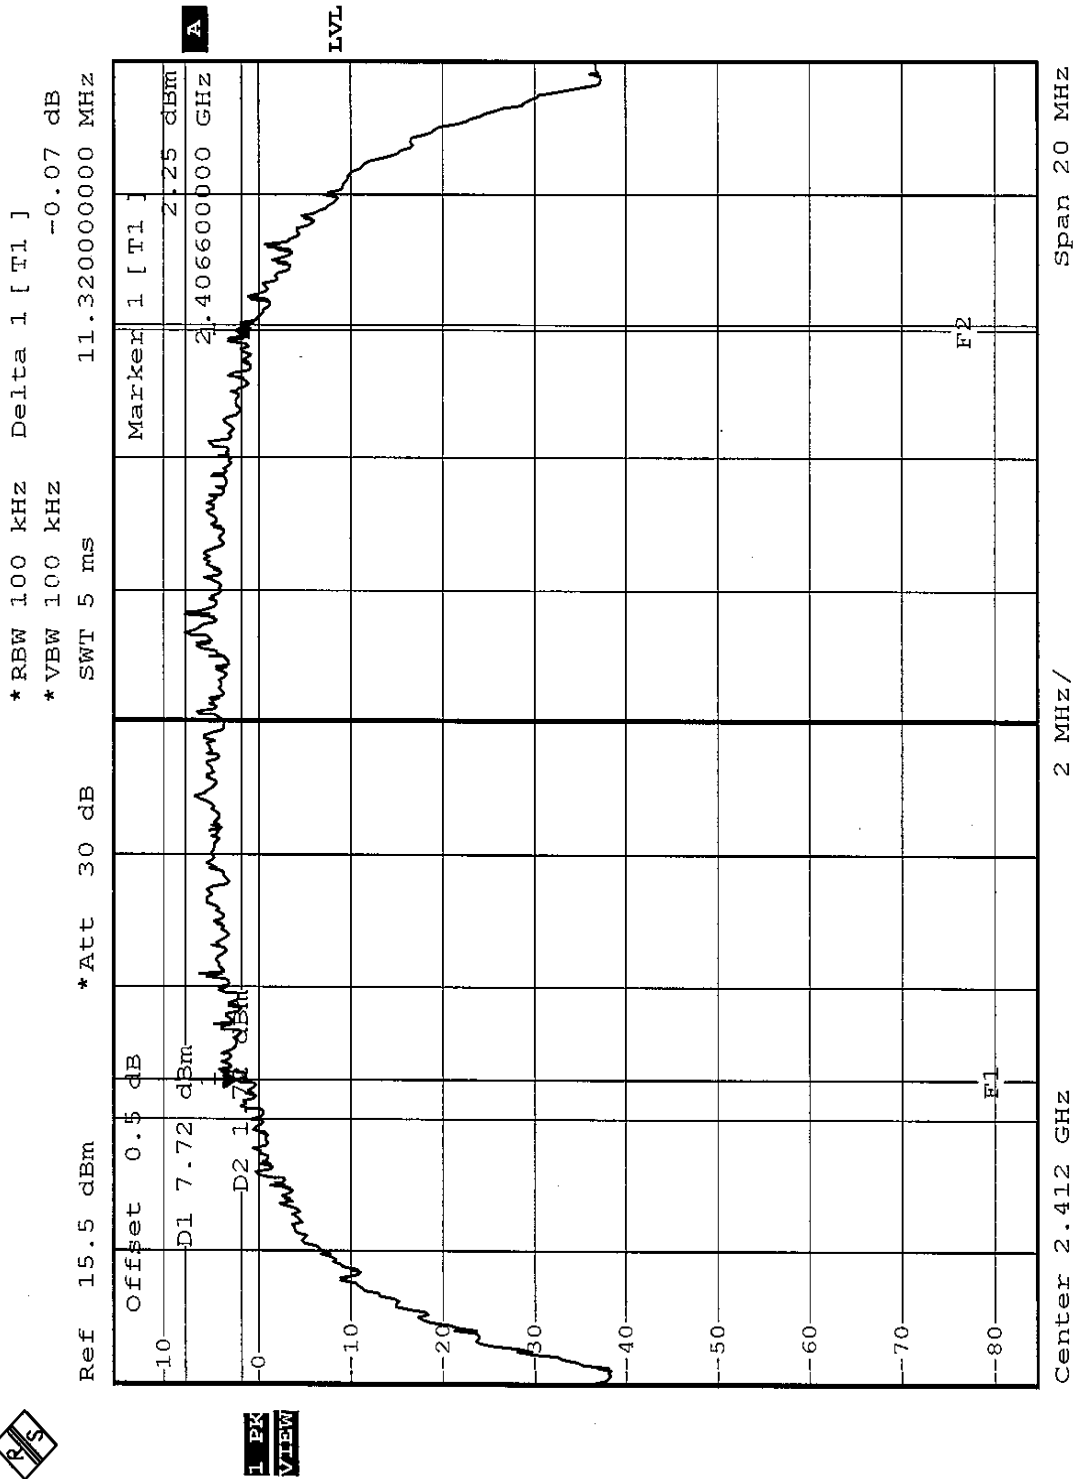



CH6

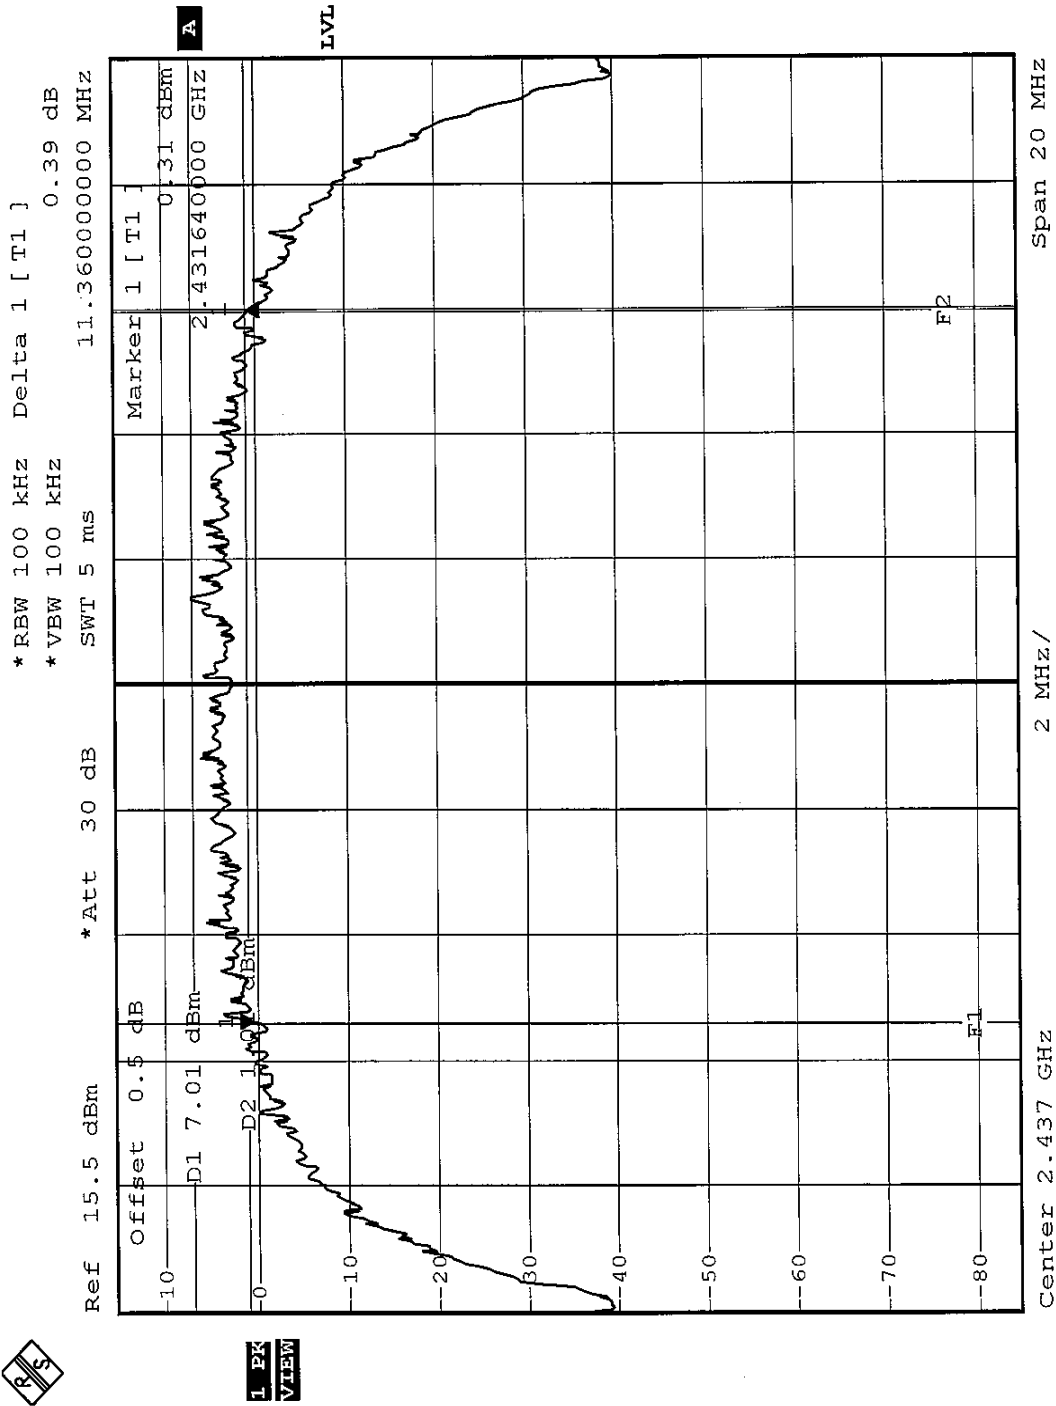








CH11

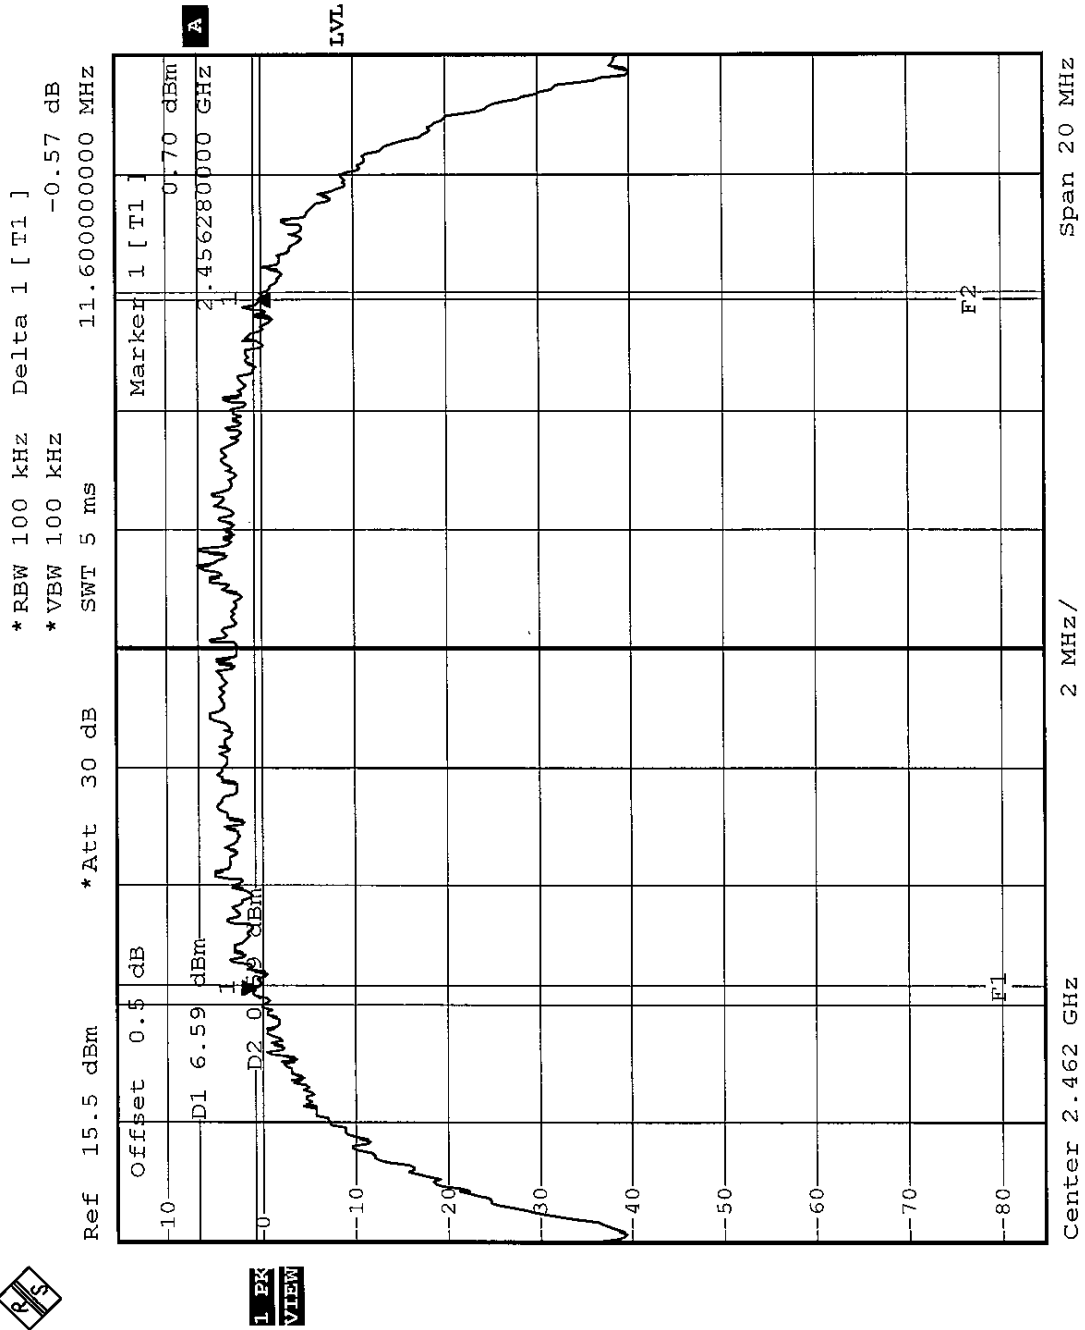




<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.52	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS




CH1

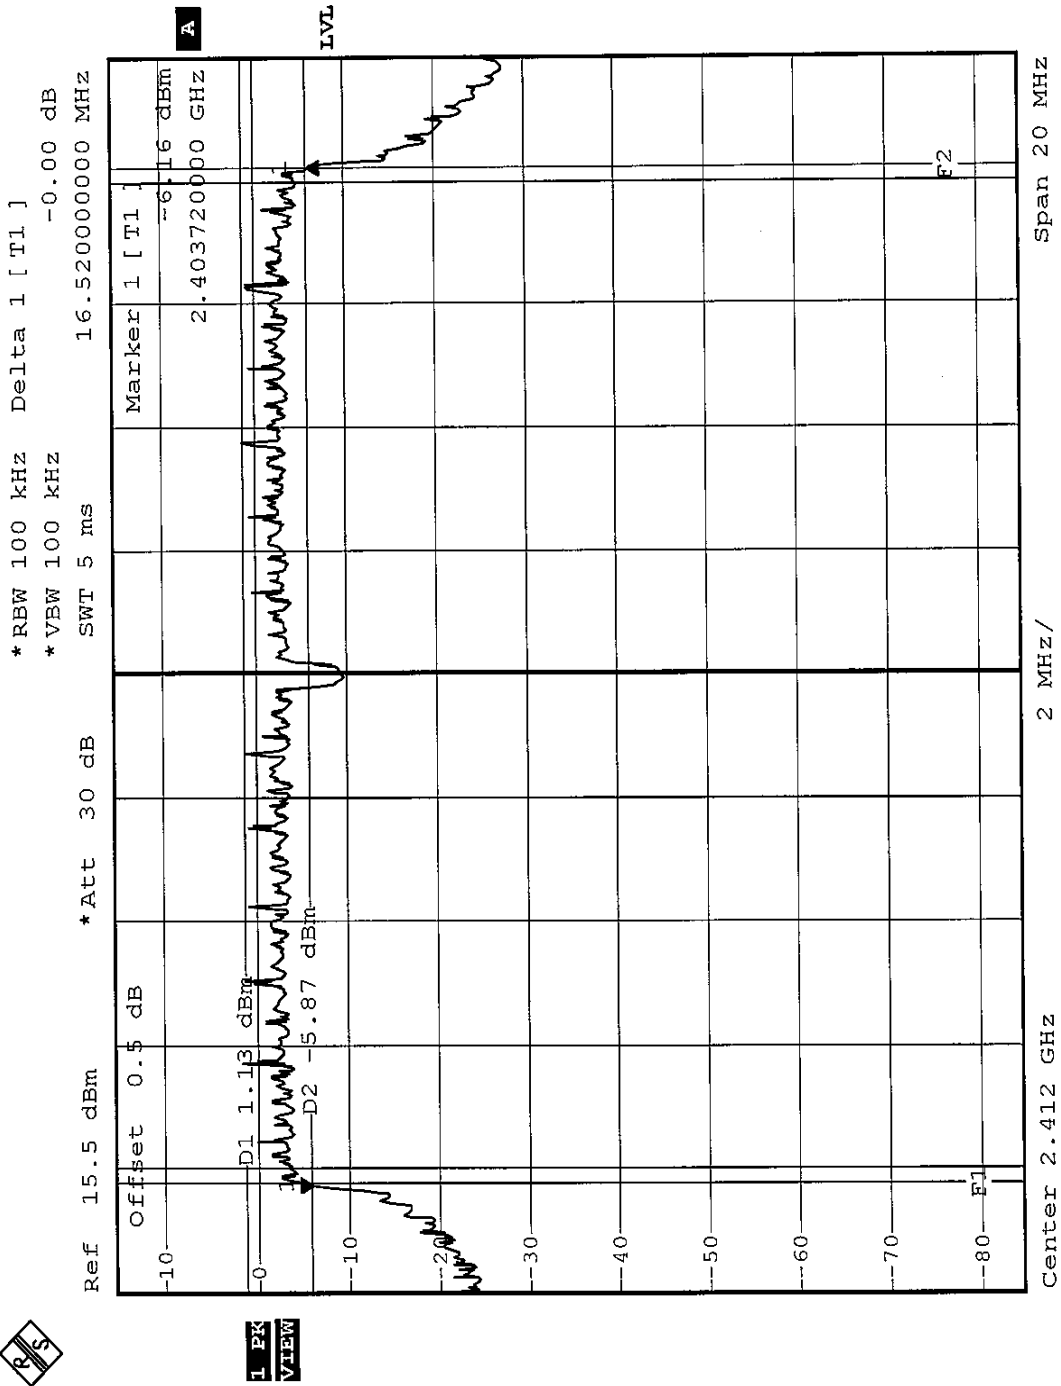



CH6


\*RBW 100 kHz Delta 1 [ T1 ]  
 \*VBW 100 kHz -0.71 dB  
 \*Att 30 dB 16.40000000 MHz  
 Ref 15.5 dBm SWT 5 ms  
 Offset 0.5 dB  
 D1 1.57 dBm  
 Marker 1 [ T1 ]  
 -41.35 dBm  
 2.42880000 GHz

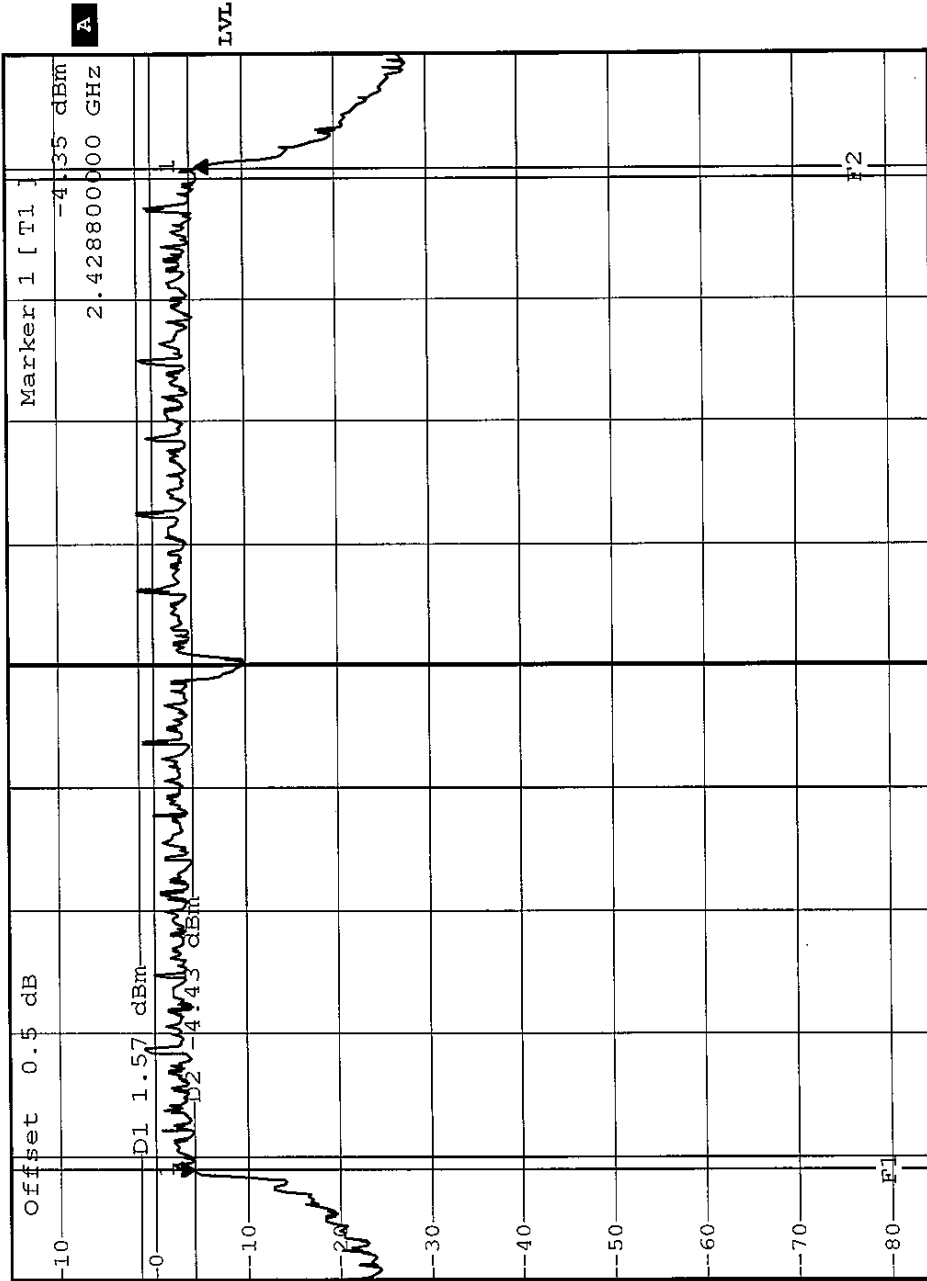

1 PK VIEW



CH11

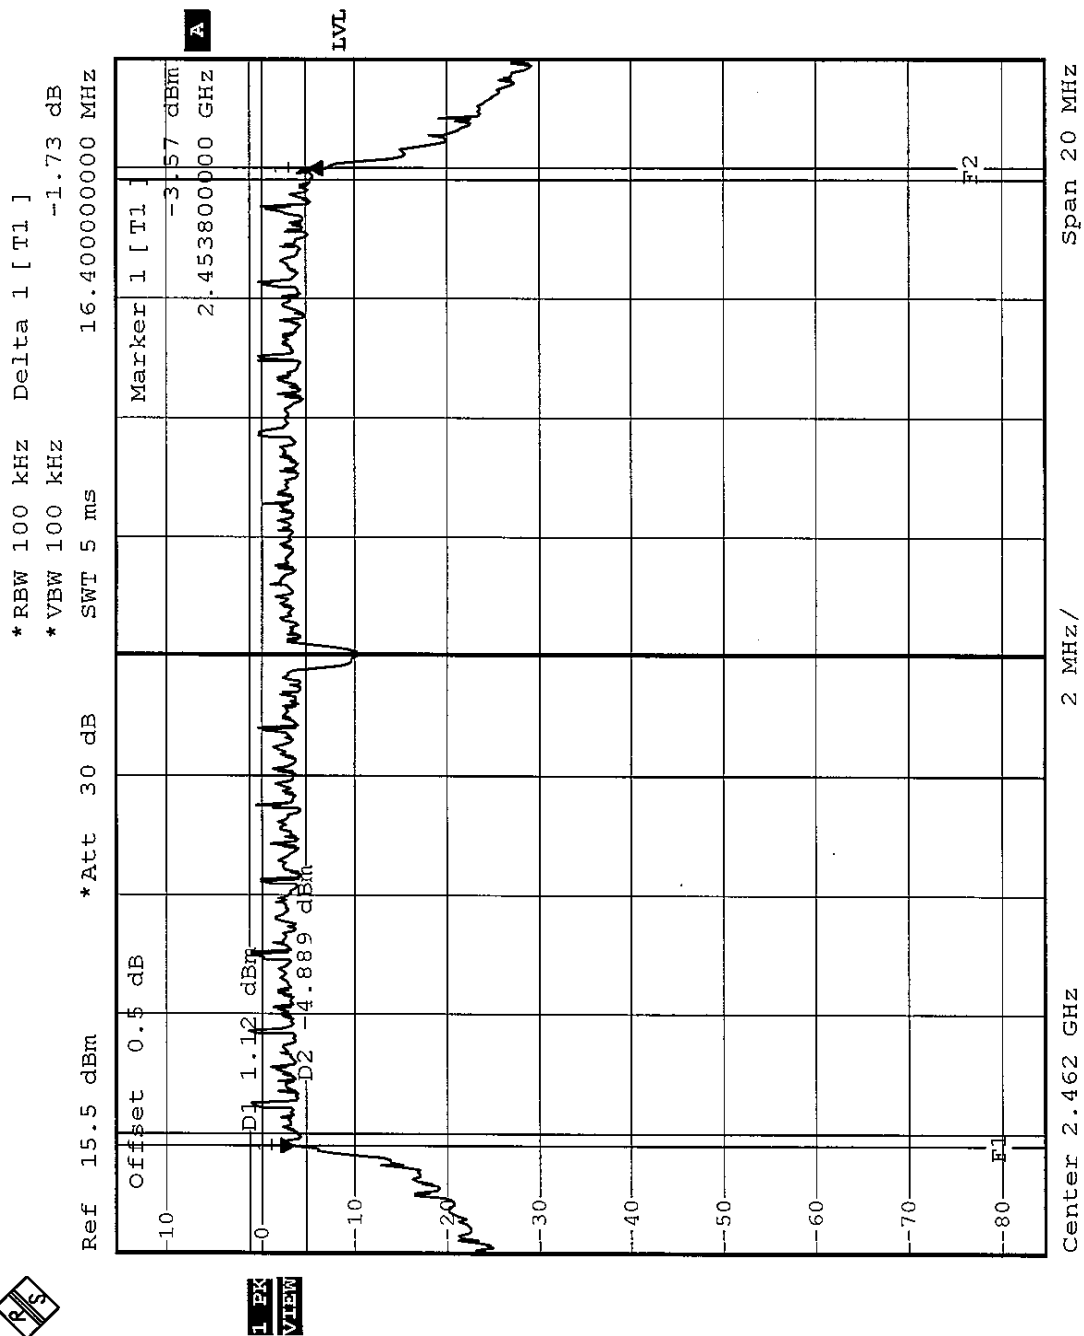



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

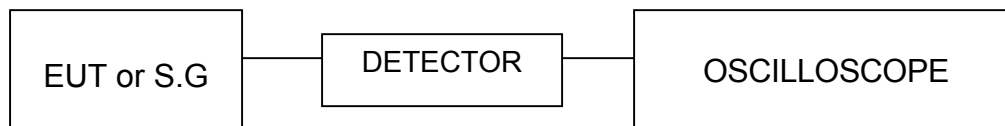

#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.72	30	PASS
6	2437	19.84	30	PASS
11	2462	19.76	30	PASS

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.84	30	PASS
6	2437	18.82	30	PASS
11	2462	18.84	30	PASS





## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP

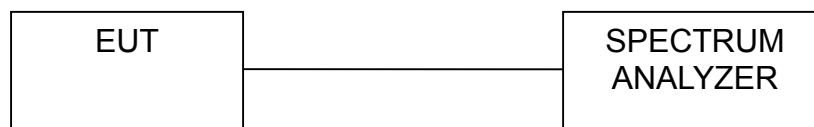

#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6





## 4.5.7 TEST RESULTS

<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	CCK	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-8.80	8	PASS
6	2437	-9.13	8	PASS
11	2462	-9.35	8	PASS





CH1

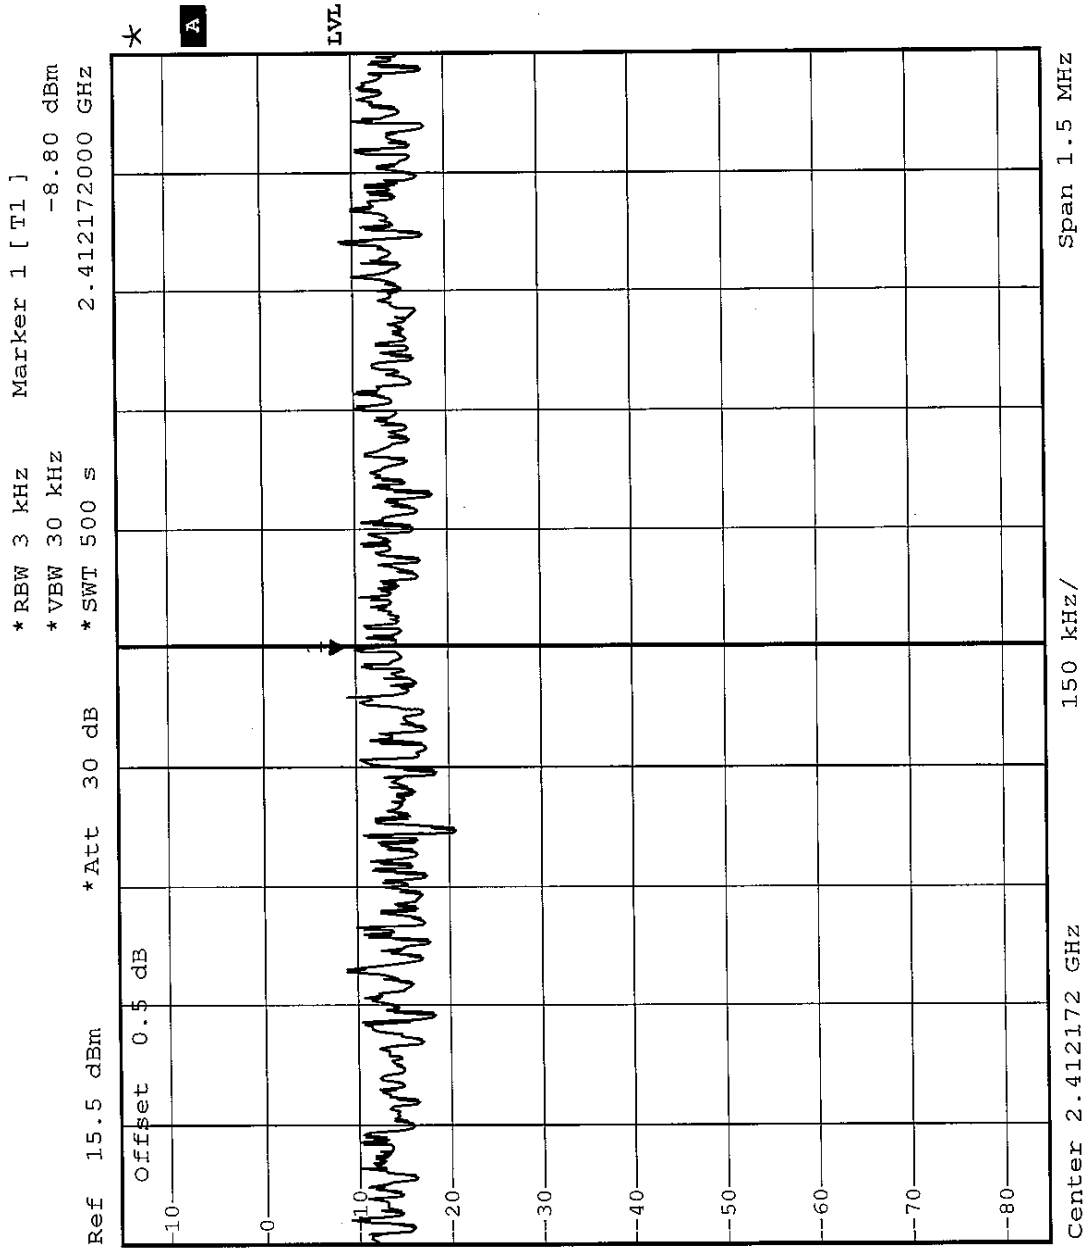





CH6

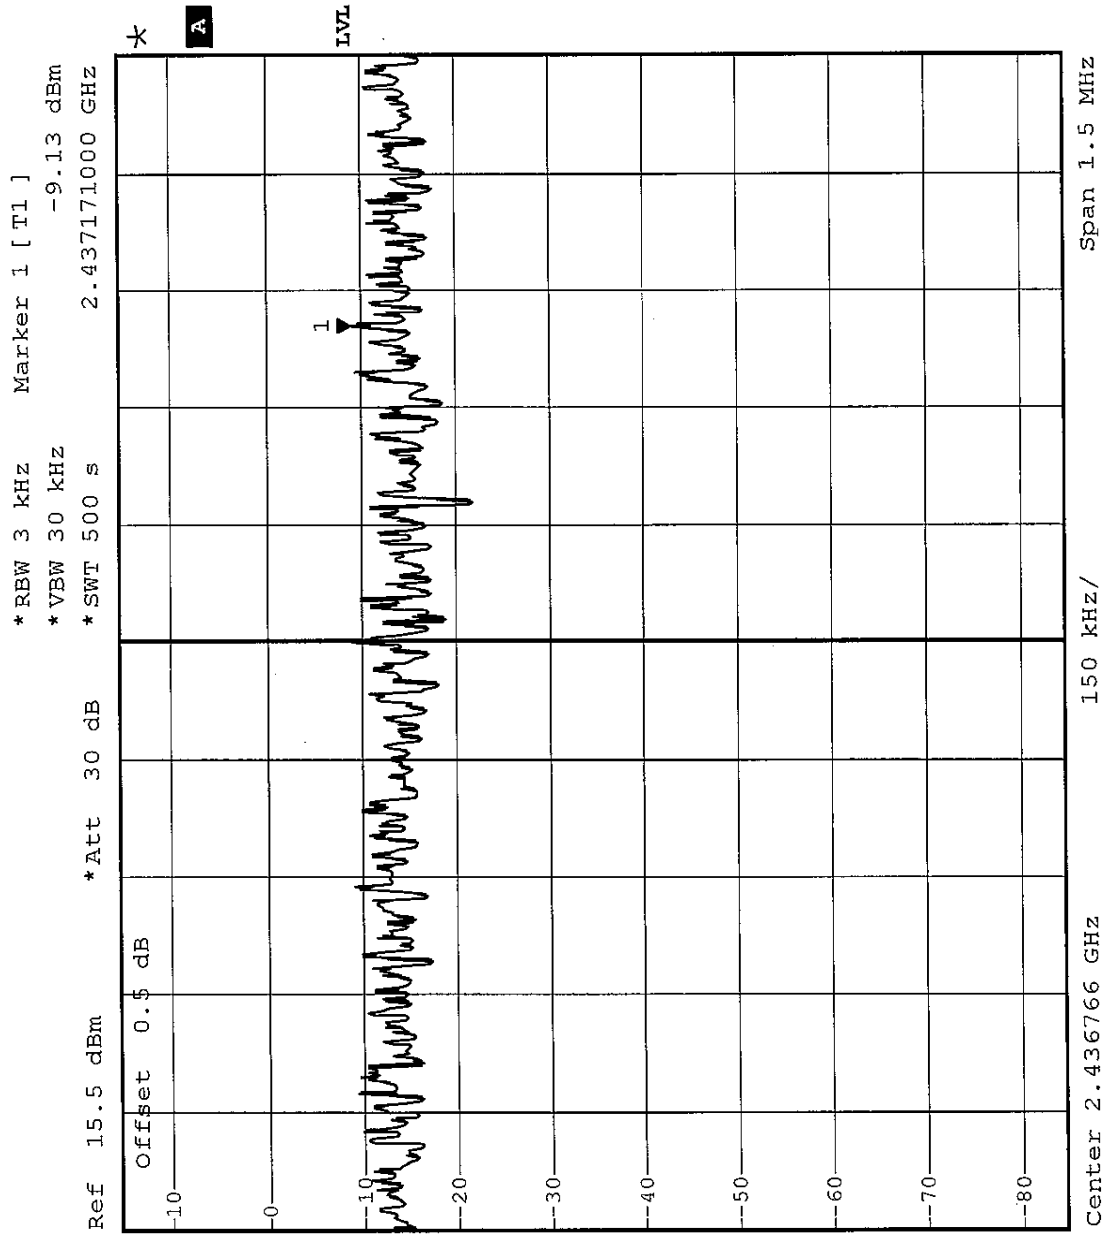



CH11

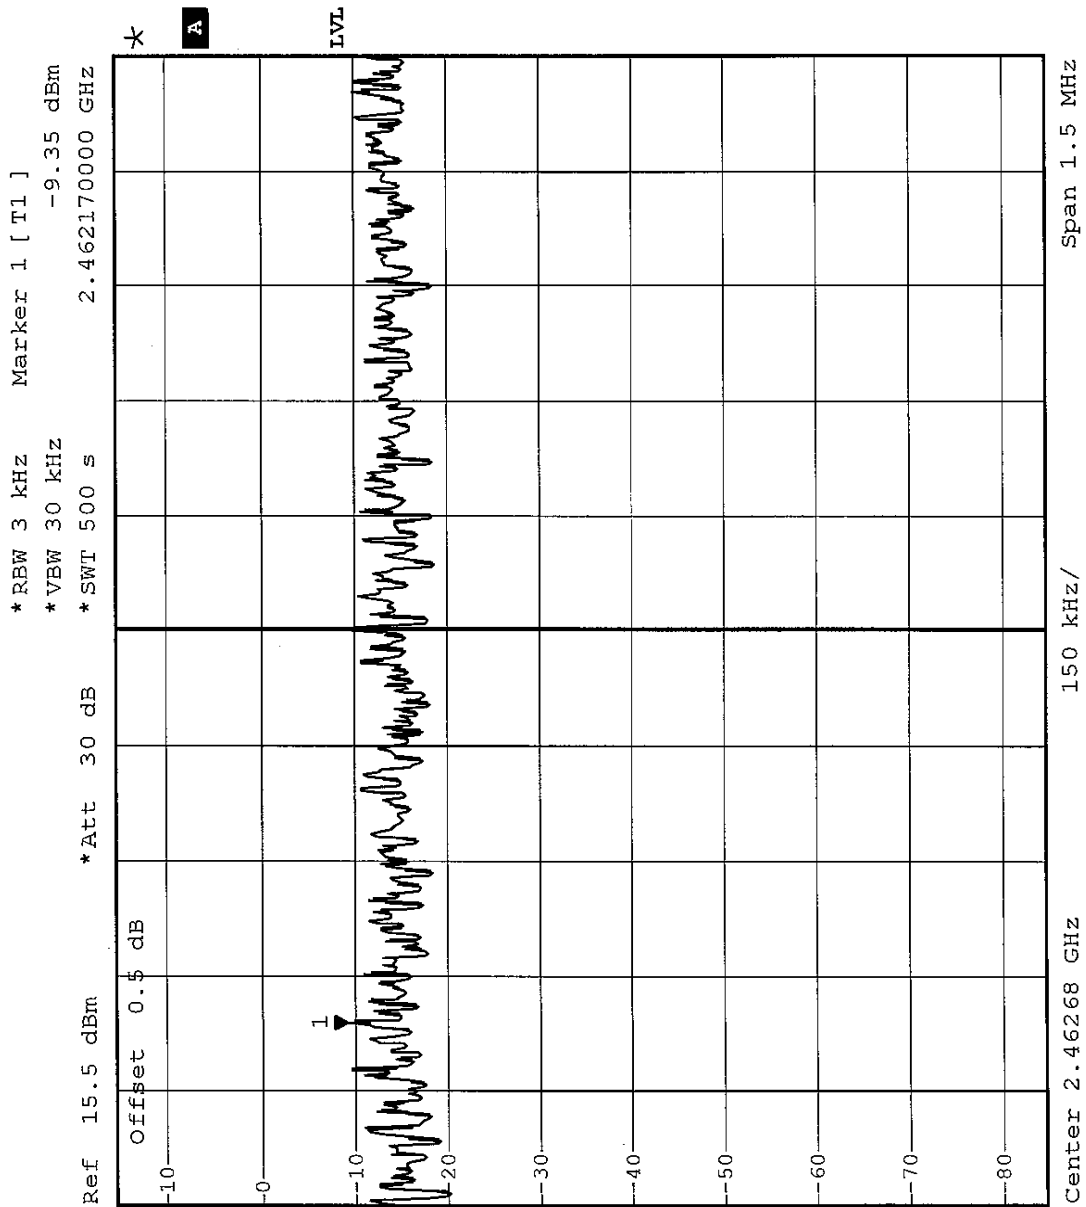





<b>EUT</b>	2.4GHz/54Mbps Wireless MINI PCI Card	<b>MODEL</b>	GL2454MP-0T
<b>MODE</b>	OFDM	<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 65%RH, 991hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY:</b> Steven Lu	

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-11.87	8	PASS
6	2437	-12.75	8	PASS
11	2462	-12.68	8	PASS




CH1

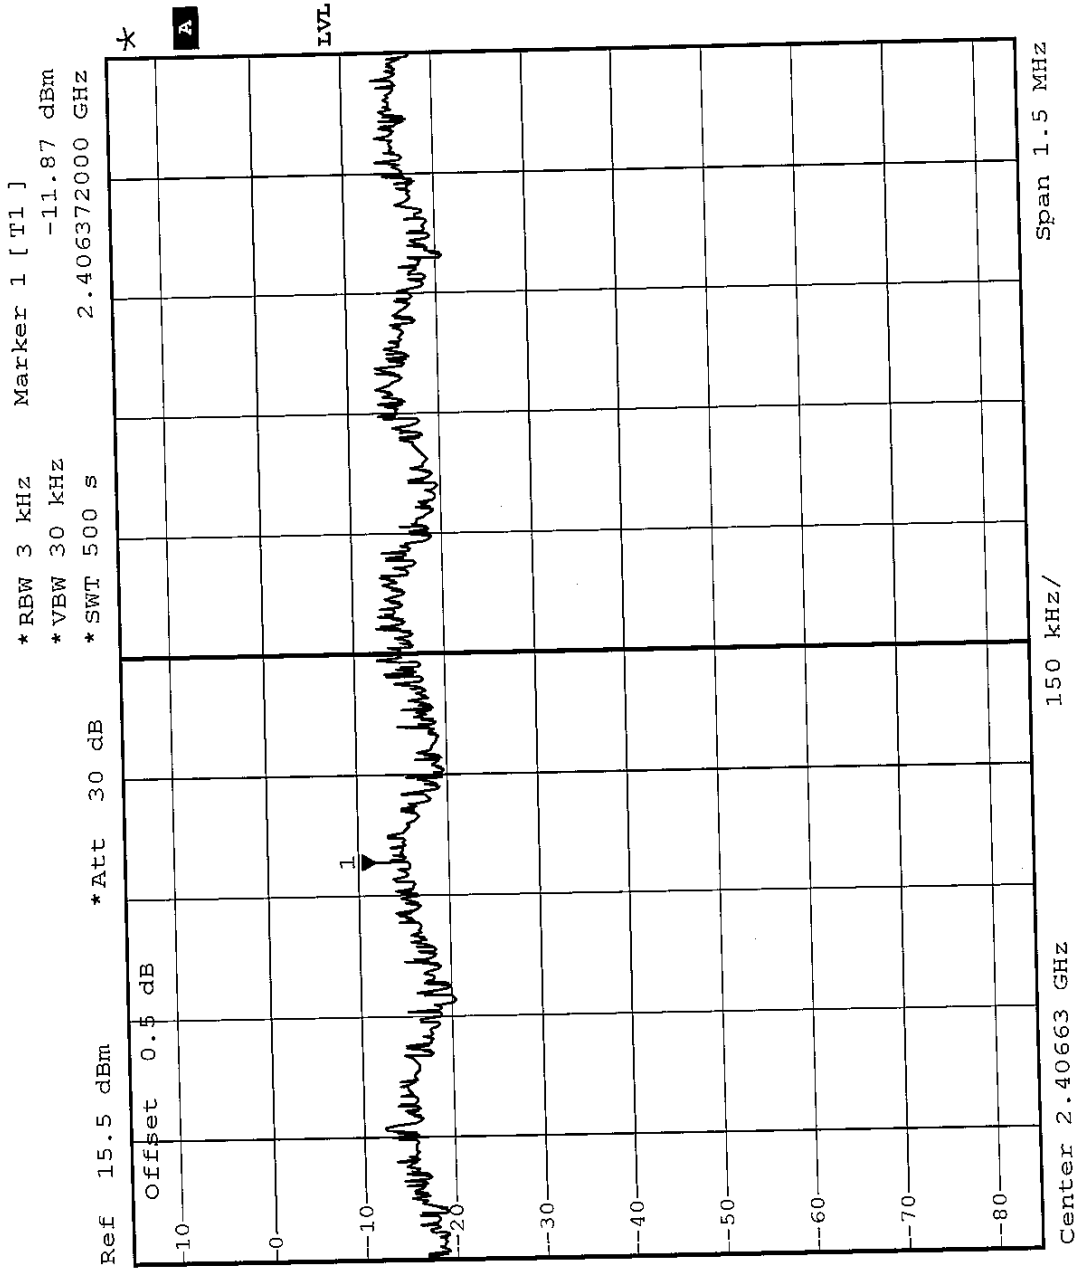






CH6

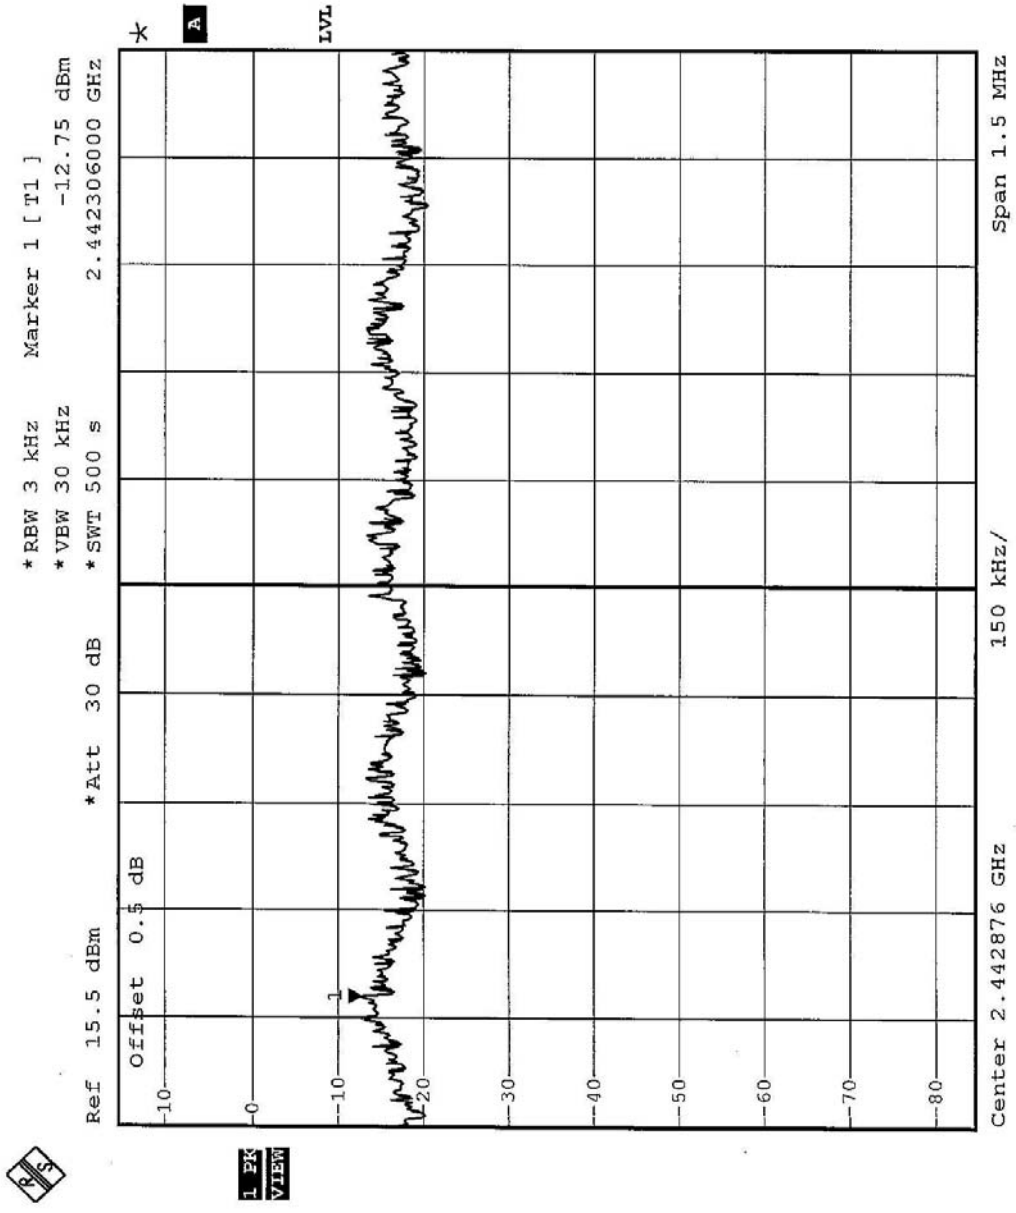



CH11

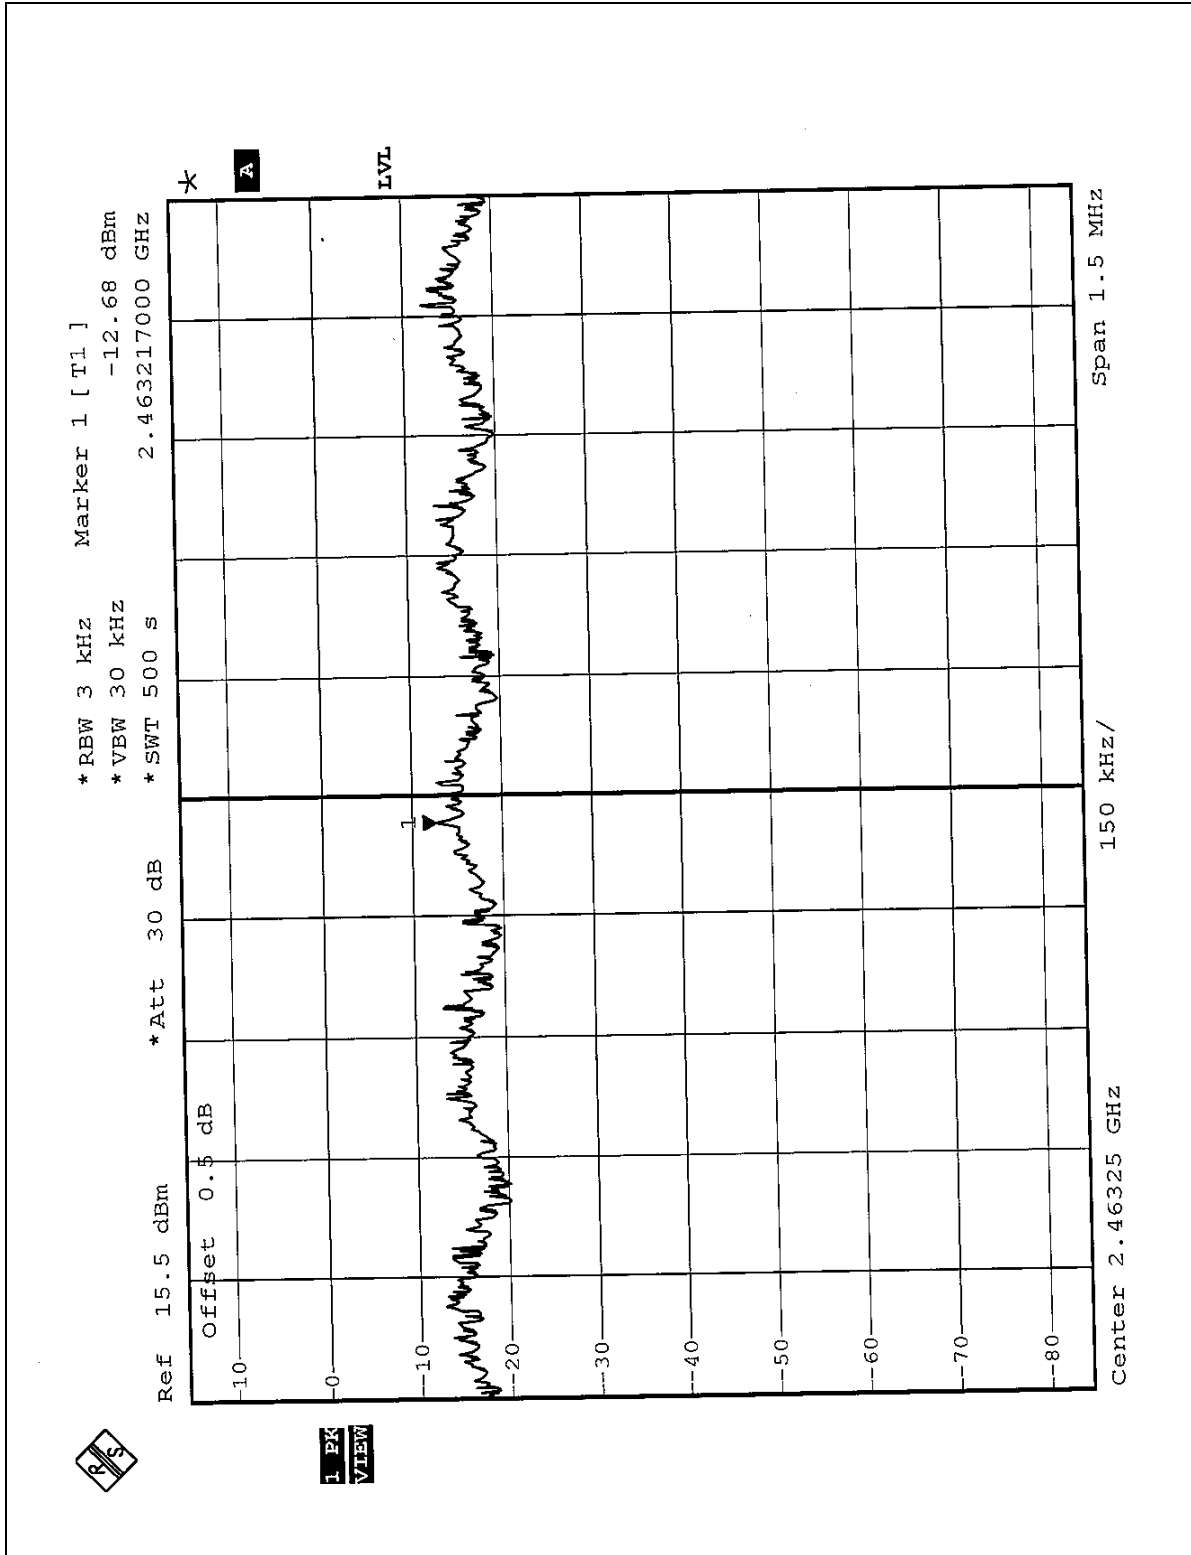



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz for CCK technique and 1MHz and 300Hz for OFDM technique with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


#### 4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


**NOTE 1:** The band edge emission plot on the following 1-2 pages shows 56.84dB / 56.28dB delta between carrier maximum power and local maximum emission in restrict band (2.3896GHz / 2.4912GHz). The emission of carrier strength list in the test result of channel 11 of CCK technique at the item 4.2.9 is 105.4dBuV/m, so the maximum field strength in restrict band is  $105.4 - 56.28 = 49.12$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the following 3-4 pages shows 51.92dB / 50.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 11 of OFDM technique at the item 4.2.9 is 99.0dBuV/m, so the maximum field strength in restrict band is  $99.0 - 50.99 = 48.01$ dBuV/m which is under 54dBuV/m limit.

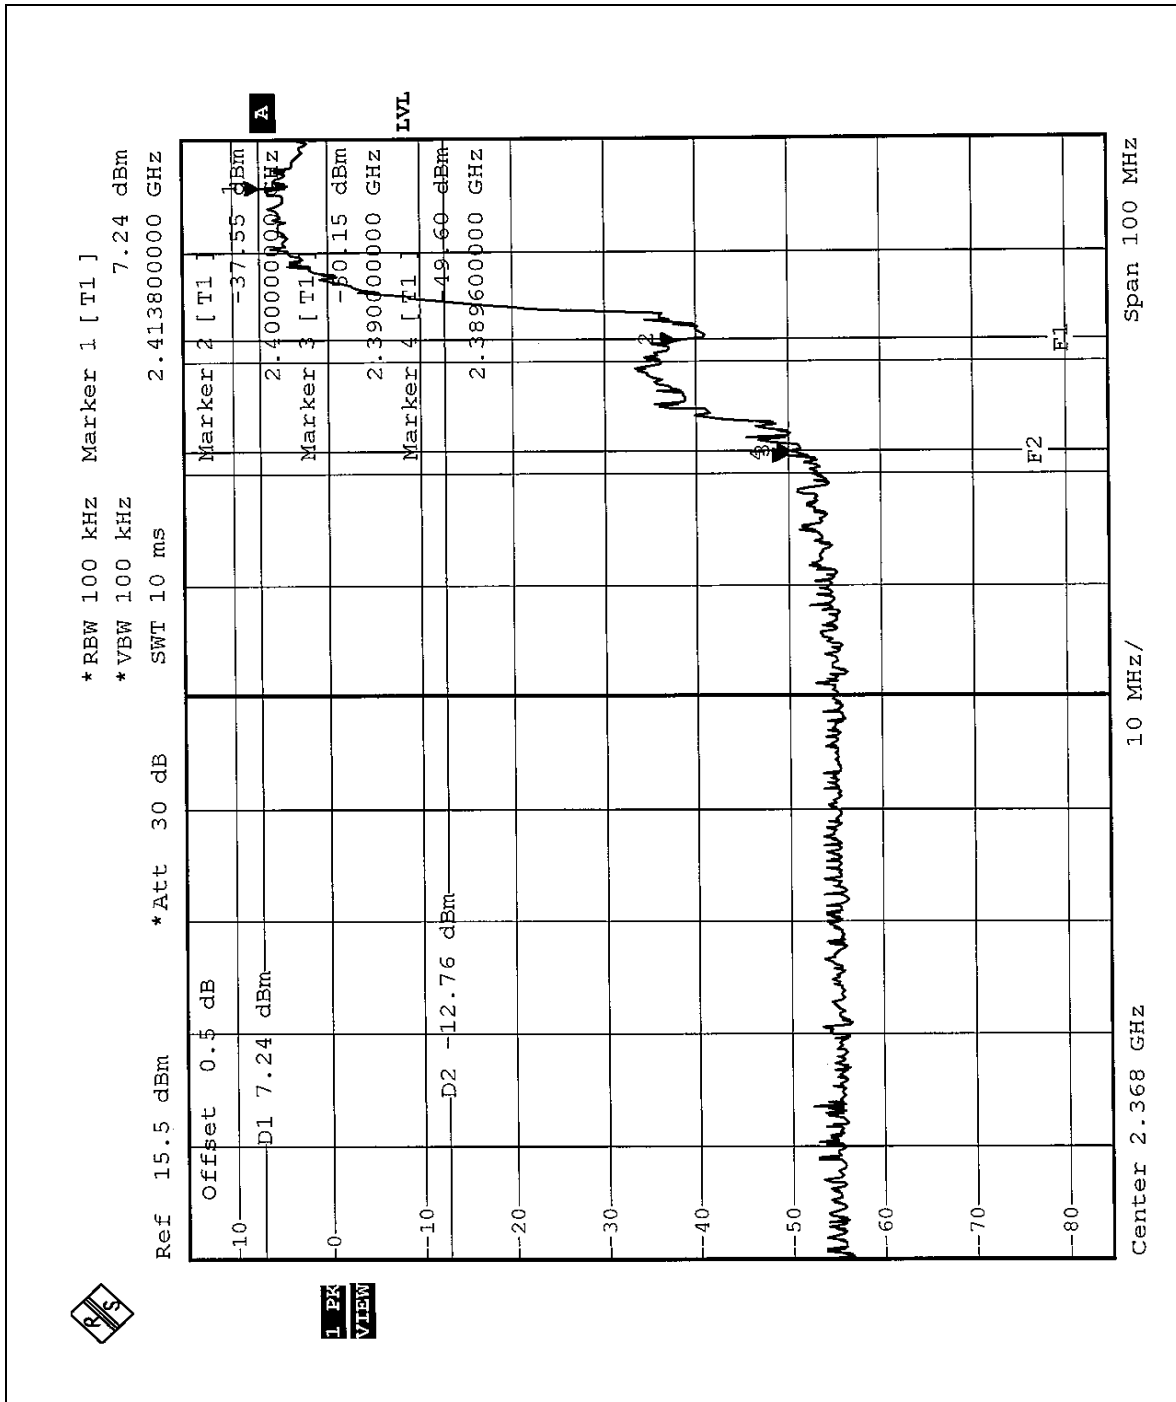

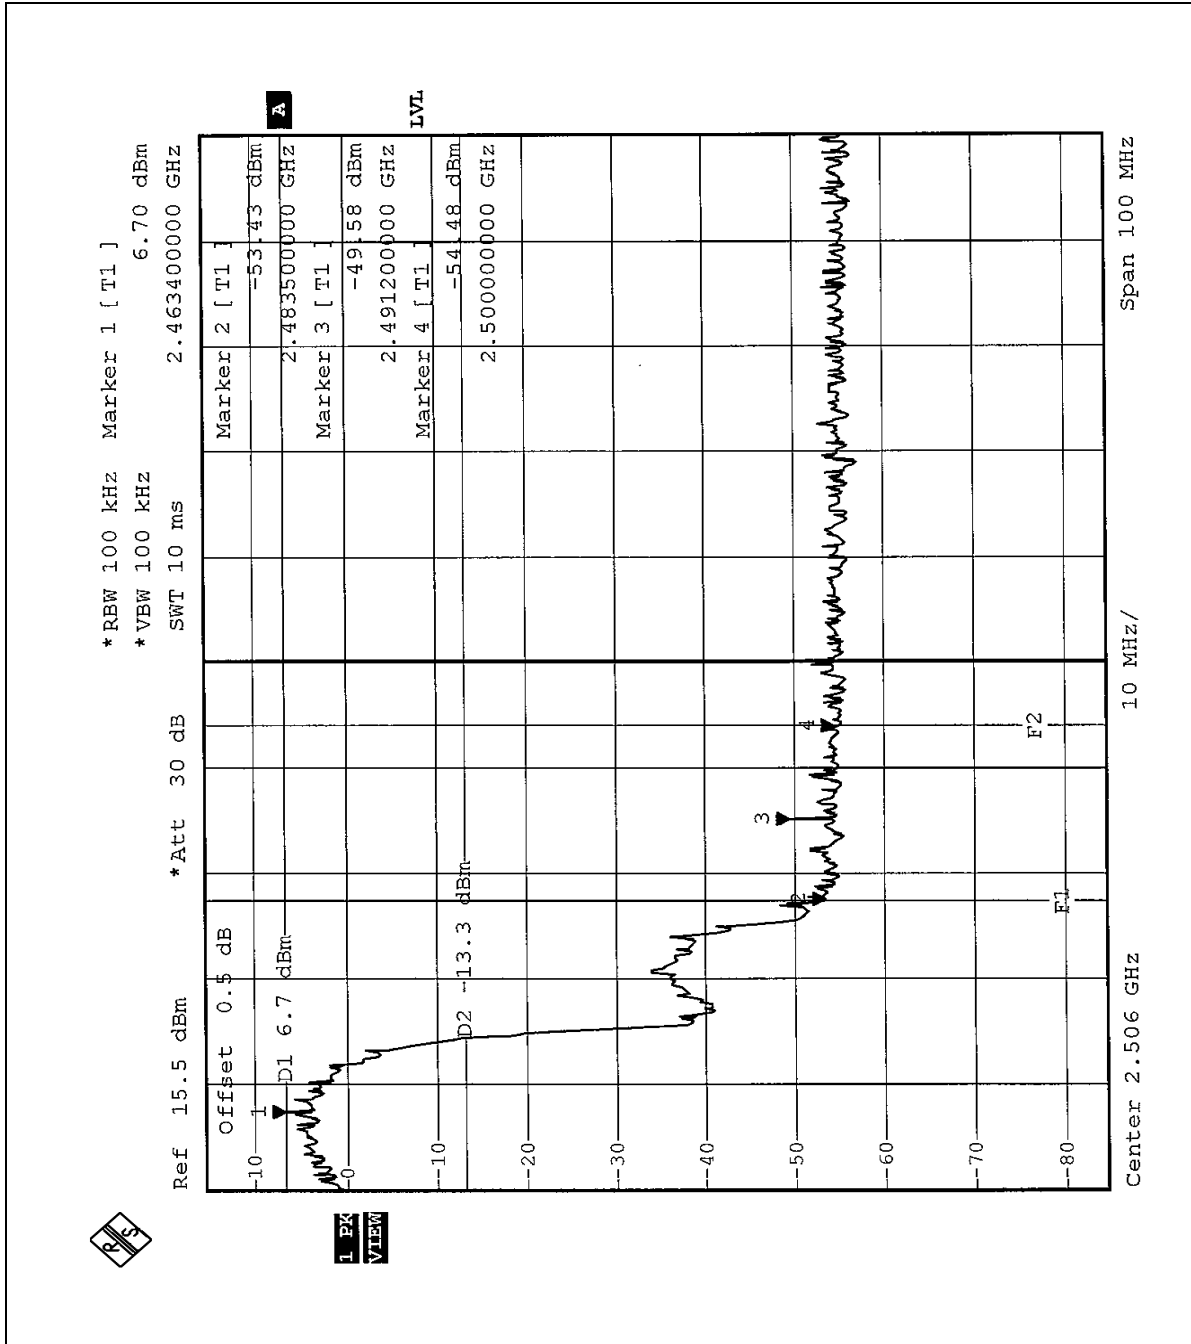

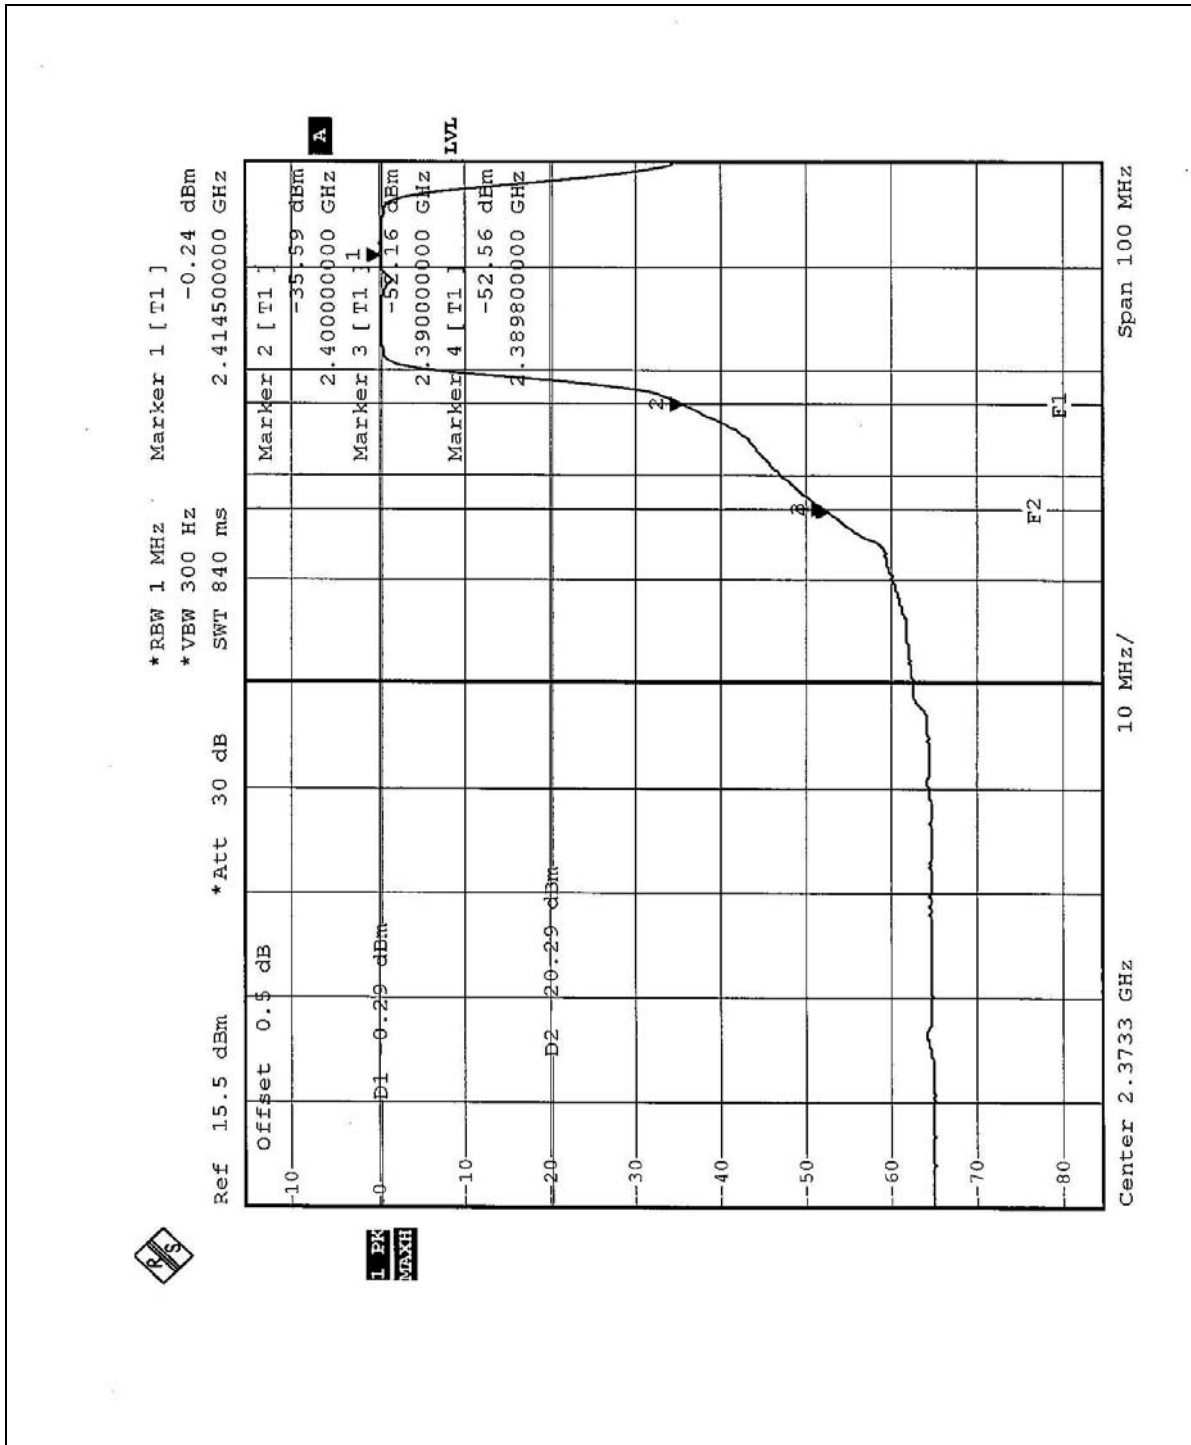

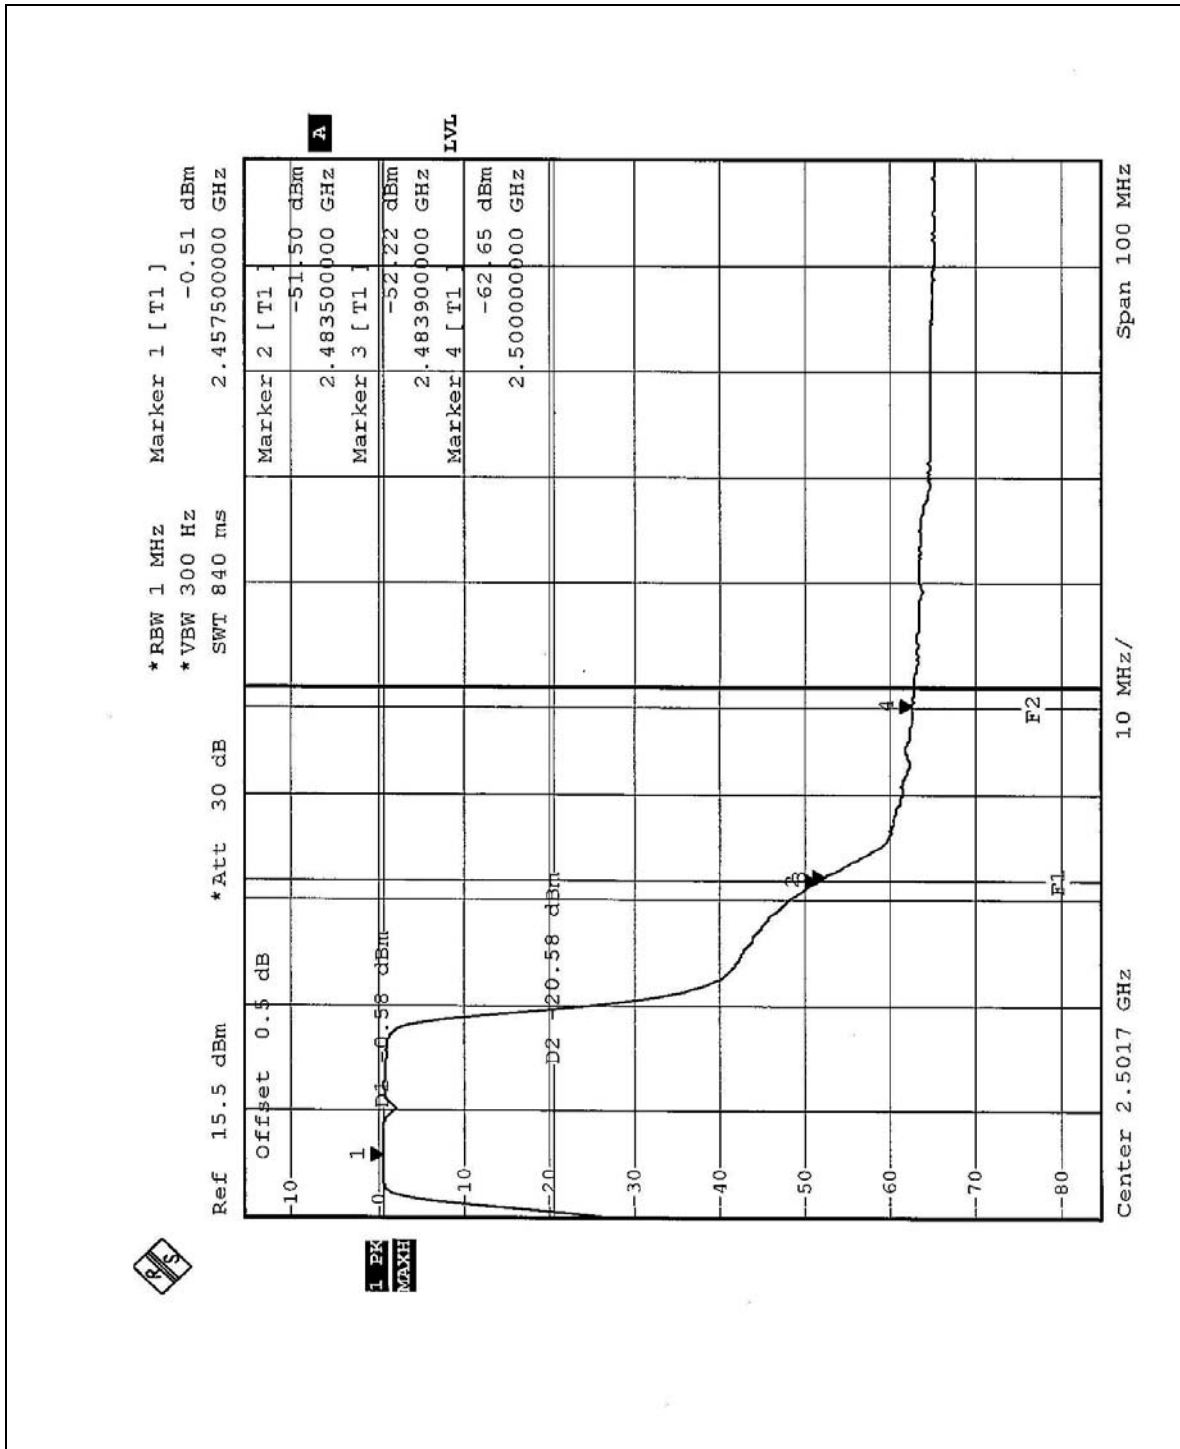





## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna types used in this product are Dipole and patch antennas with UFL connector. The maximum Gain of this antenna is 5dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



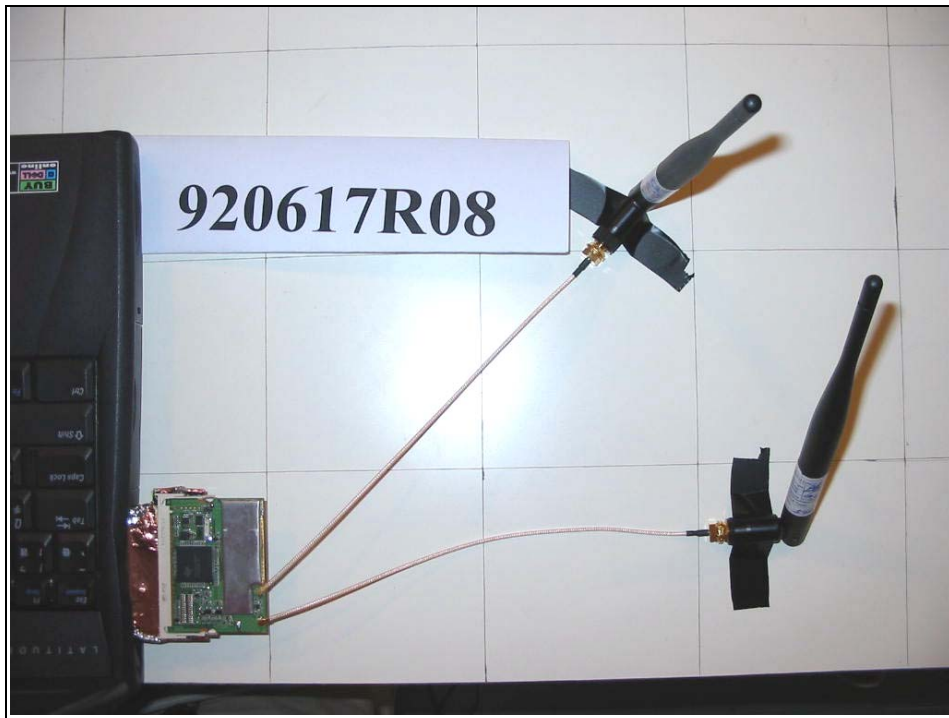

### RADIATED EMISSION TEST







## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.