



FCC TEST REPORT

REPORT NO.: RF941005H01E

MODEL NO.: WUA-1340, WUS-G07

RECEIVED: May 25, 2006

TESTED: May 29 to June 08, 2006

ISSUED: June 14, 2006

APPLICANT: D-LINK Corporation

ADDRESS: No.8, Li-shing Road VII, Science-based Industrial Park, Hsinchu, Taiwan.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 52 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.





Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5	DESCRIPTION OF SUPPORT UNITS	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST	13
4	TEST TYPES AND RESULTS	14
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS.....	14
4.1.3	TEST PROCEDURES	15
4.1.4	TEST SETUP	15
4.1.5	EUT OPERATING CONDITIONS	16
4.1.6	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	23
4.2.4	TEST SETUP	24
4.2.5	EUT OPERATING CONDITIONS	24
4.2.6	TEST RESULTS	25
4.2.7	TEST RESULTS – DSSS	27
4.2.8	TEST RESULTS – OFDM.....	30
4.3	MAXIMUM PEAK OUTPUT POWER.....	33
4.3.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	33
4.3.2	TEST INSTRUMENTS.....	33
4.3.3	TEST PROCEDURES	34
4.3.4	TEST SETUP	34
4.3.5	EUT OPERATING CONDITIONS	34
4.3.6	TEST RESULTS – DSSS	35
4.3.7	TEST RESULTS – OFDM.....	36
4.4	BAND EDGES MEASUREMENT	37
4.4.1	LIMITS OF BAND EDGES MEASUREMENT	37
4.4.2	TEST INSTRUMENTS.....	37
4.4.3	TEST PROCEDURE.....	37
4.4.4	EUT OPERATING CONDITION	37




4.4.5	TEST RESULTS – DSSS	38
4.4.6	TEST RESULTS –OFDM.....	42
4.5	ANTENNA REQUIREMENT	46
4.5.1	STANDARD APPLICABLE	46
4.5.2	ANTENNA CONNECTED CONSTRUCTION	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	47
6	INFORMATION ON THE TESTING LABORATORIES	51
	APPENDIX-A	A-1




1 CERTIFICATION

PRODUCT : IEEE802.11g Wireless USB Adapter
BRAND NAME : D-Link, Alpha
MODEL NO. : WUA-1340, WUS-G07
TESTED: May 29 to June 08, 2006
APPLICANT : D-LINK Corporation
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WUA-1340) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** June 14, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE :  , **DATE:** June 14, 2006
Responsible for RF (Hank Chung)

APPROVED BY :  , **DATE:** June 14, 2006
(May Chen, Deputy Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -3.09 dB at 0.575 MHz
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.5dB at 132.03MHz
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: This report is prepared for FCC class II permissive change. Only conducted emission, radiated emission, Maximum Peak Output Power and Band Edge Measurement were presented in this test report.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE802.11g Wireless USB Adapter
MODEL NO.	WUA-1340, WUS-G07
FCC ID	KA2WUA1340A1
POWER SUPPLY	DC 5V from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 71.121mW 802.11g: 63.096mW
ANTENNA TYPE	Printed antenna with -2dBi antenna gain
DATA CABLE	USB Cable(Shielded , 1.5m) for cradle
INTERFACE	USB
ASSOCIATED DEVICES	Cradle

NOTE:

1. This report is prepared for FCC class II permissive change. The difference compared with the Report No.:RF941005H01B design is as the following:

- ◆ Change the PA.
- ◆ Change the Cradle's color from gray to black.

2. The EUT has two model names which are identical to each other in all aspects except for the followings:

Brand	Model Name	Description
D-Link	WUA-1340	for marketing requirement
Alpha	WUS-G07	

From the above models, model: **WUA-1340** was selected as representative model for the test and its data was recorded in this report.

3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.



5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	DSSS	CCK	11

- The EUT was tested under the following test modes, and its data were recorded in this report:

Pre-Test Mode	Description
Mode 1	With cradle
Mode 2	Without cradle

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	DSSS	CCK	11

- The EUT was tested under the following test modes, and its data were recorded in this report:

Pre-Test Mode	Description
Mode 1	With cradle
Mode 2	Without cradle

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

- The EUT was pre-tested under the following test modes in chamber:

Pre-Test Mode	Description
Mode A	With cradle
Mode B	Without cradle

The worst emission level was found in **Mode B**.

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an IEEE802.11g Wireless USB Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	IBM	X21	B2USED800206	NA
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026778	IFAXDM1414

No.	Signal cable description
1	NA
2	1.6 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.6 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core


Note: 1. All power cords of the above support units are unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

Without cradle

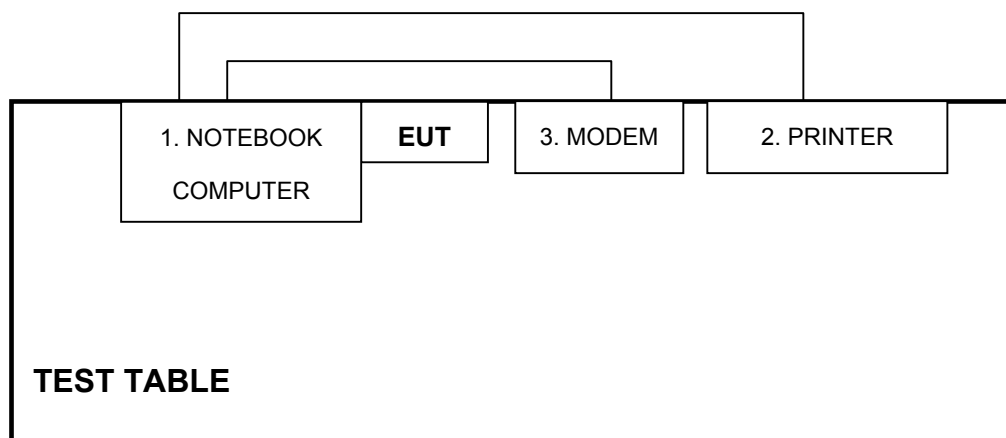

With cradle

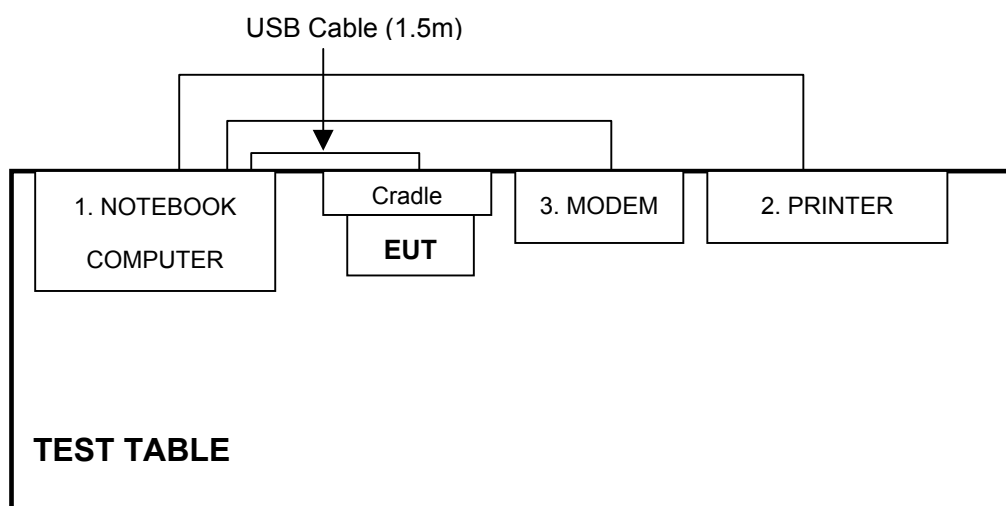

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	KNW-407	8/1395/12	Jul. 19, 2006
RF Signal Cable	RG233/U	Cable_CA_02	Dec. 10, 2006
Terminator(for KYORITSU)	50	2	Oct. 08, 2006
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

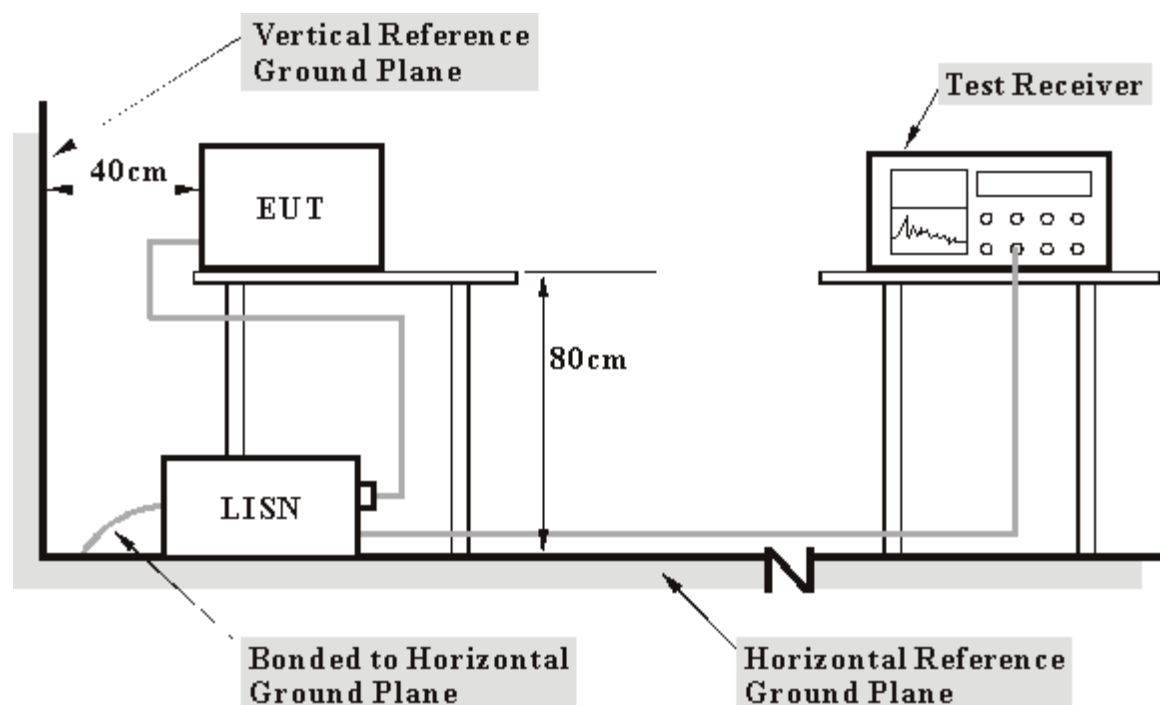

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared other computer systems to act as a communication partner and placed them outside of testing area.
- c. The communication partners run test program “QAU2571W.exe ” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable and wireless.

4.1.6 TEST RESULTS

MODE	With Cradle	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 969hPa	PHASE	Line (L)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	9.60	37.00	-	46.60	-	65.38	55.38	-18.78	-
2	0.283	9.60	32.59	-	42.19	-	60.73	50.73	-18.54	-
3	0.513	9.60	34.70	-	44.30	-	56.00	46.00	-11.70	-
4	0.576	9.60	35.66	-	45.26	-	56.00	46.00	-10.74	-
5	1.443	9.64	33.02	-	42.66	-	56.00	46.00	-13.34	-
6	4.957	9.73	26.33	-	36.06	-	56.00	46.00	-19.94	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

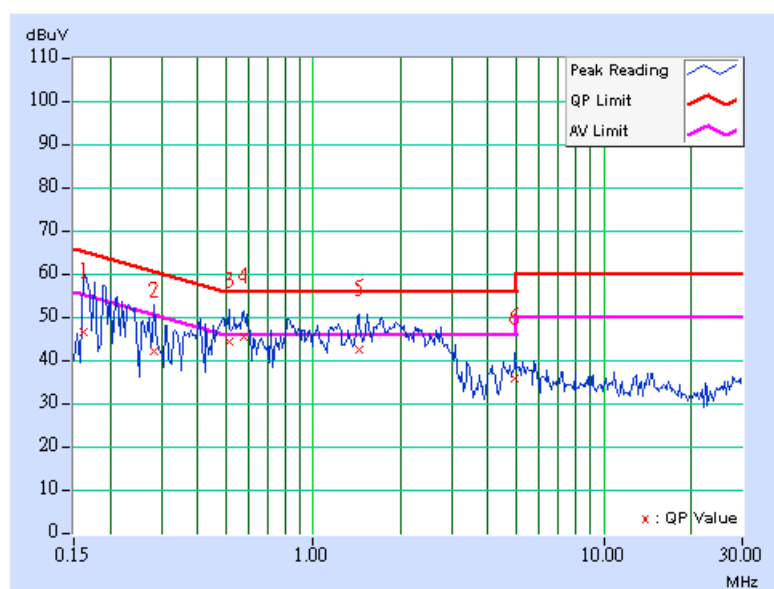

MODE	With Cradle	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 969hPa	PHASE	Neutral (N)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.190	9.60	36.44	-	46.04	-	64.04	54.04	-18.00	-
2	0.404	9.60	35.46	-	45.06	-	57.77	47.77	-12.71	-
3	0.574	9.60	42.67	32.87	52.27	42.47	56.00	46.00	-3.73	-3.53
4	0.814	9.60	34.85	-	44.45	-	56.00	46.00	-11.55	-
5	1.431	9.64	34.91	-	44.55	-	56.00	46.00	-11.45	-
6	6.141	9.77	23.13	-	32.90	-	60.00	50.00	-27.10	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

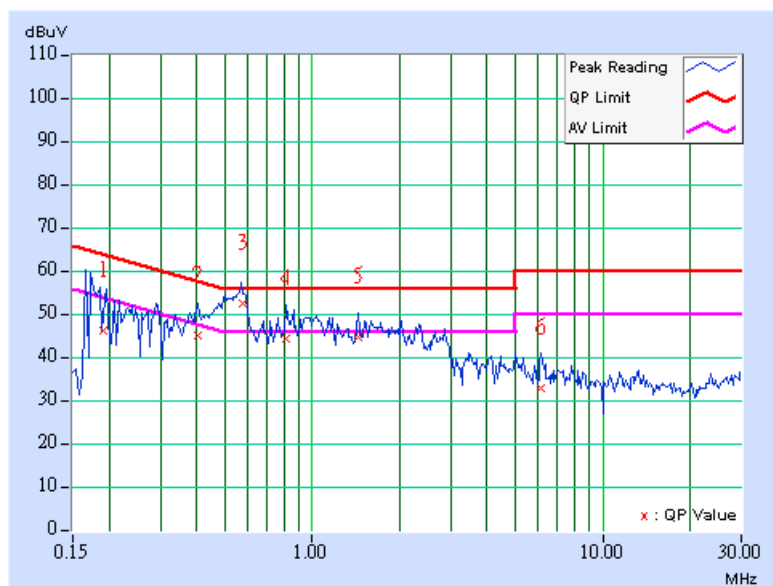

MODE	Without Cradle	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 969hPa	PHASE	Line (L)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	9.60	38.91	-	48.51	-	65.79	55.79	-17.28	-
2	0.509	9.60	35.23	-	44.83	-	56.00	46.00	-11.17	-
3	0.568	9.60	34.23	-	43.83	-	56.00	46.00	-12.17	-
4	1.525	9.65	31.78	-	41.43	-	56.00	46.00	-14.57	-
5	1.728	9.67	34.23	-	43.90	-	56.00	46.00	-12.10	-
6	5.469	9.75	25.61	-	35.36	-	60.00	50.00	-24.64	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

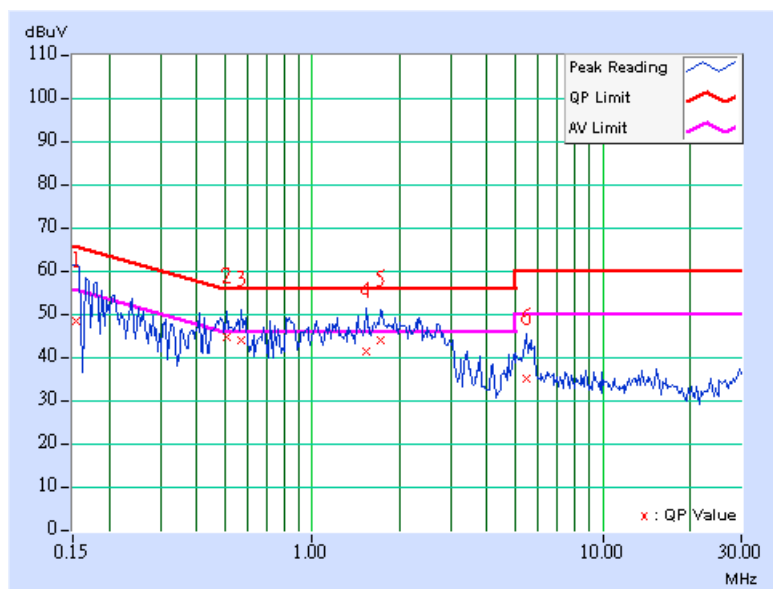

MODE	Without Cradle	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 969hPa	PHASE	Neutral (N)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	9.60	37.40	-	47.00	-	65.79	55.79	-18.79	-
2	0.525	9.60	38.67	21.76	48.27	31.36	56.00	46.00	-7.73	-14.64
3	0.575	9.60	42.35	33.31	51.95	42.91	56.00	46.00	-4.05	-3.09
4	0.920	9.60	34.74	-	44.34	-	56.00	46.00	-11.66	-
5	1.435	9.64	36.13	-	45.77	-	56.00	46.00	-10.23	-
6	5.328	9.74	26.25	-	35.99	-	60.00	50.00	-24.01	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

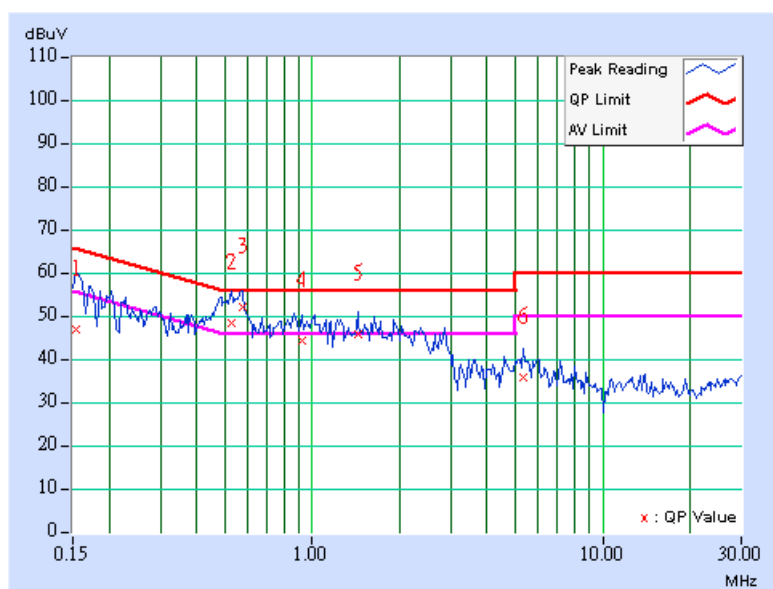

4.2 Radiated Emission Measurement

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 16. 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

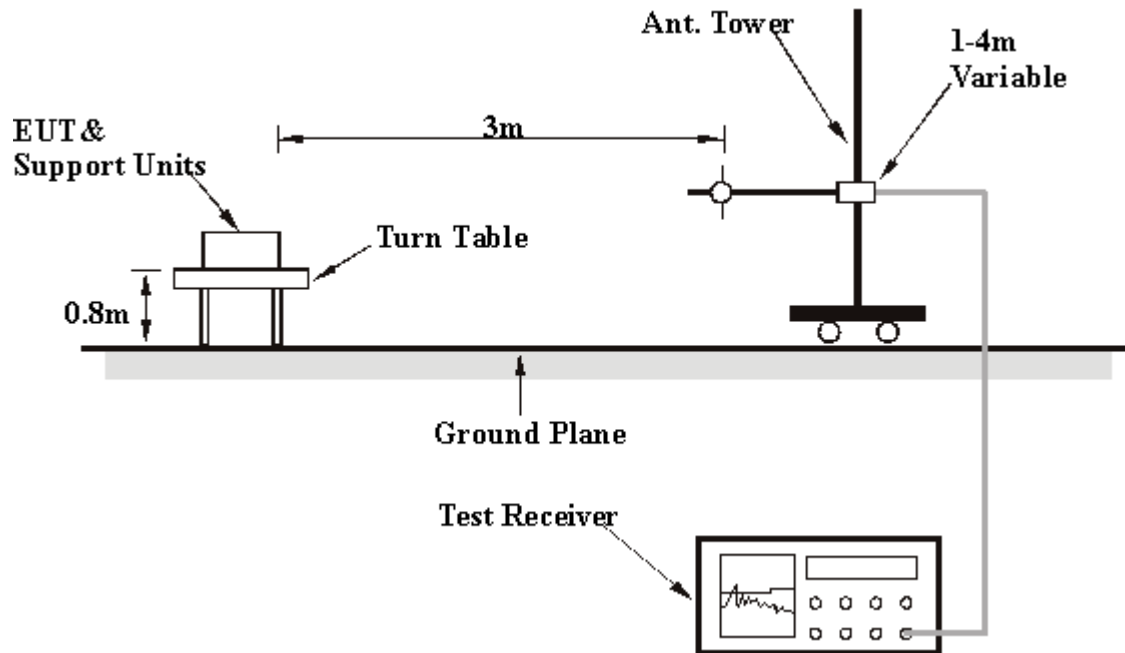

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODE	With Cradle	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODE	Channel 11
ENVIRONMENTAL CONDITIONS	24 deg. C, 73%RH, 969hPa	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.01	29.40 QP	40.00	-10.60	3.29 H	342	17.60	11.80
2	120.03	39.50 QP	43.50	-4.00	2.64 H	340	28.00	11.50
3	132.03	43.00 QP	43.50	-0.50	2.32 H	340	30.60	12.40
4	144.03	37.60 QP	43.50	-5.90	2.12 H	3	24.40	13.20
5	156.04	33.90 QP	43.50	-9.60	1.84 H	3	20.30	13.60
6	168.04	31.40 QP	43.50	-12.10	1.75 H	21	18.10	13.30
7	180.04	31.90 QP	43.50	-11.60	1.55 H	21	19.30	12.60
8	216.04	28.70 QP	46.00	-17.30	1.67 H	235	16.80	11.90
9	228.04	32.10 QP	46.00	-13.90	1.53 H	231	19.70	12.40
10	240.03	35.50 QP	46.00	-10.50	1.33 H	235	22.60	12.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.01	33.80 QP	40.00	-6.20	1.00 V	357	22.00	11.80
2	120.02	34.30 QP	43.50	-9.20	1.02 V	252	22.80	11.50
3	132.01	34.80 QP	43.50	-8.70	1.00 V	265	22.40	12.40
4	144.02	25.70 QP	43.50	-17.80	1.00 V	294	12.50	13.20
5	192.04	23.80 QP	43.50	-19.70	1.00 V	103	12.00	11.70
6	240.03	30.30 QP	46.00	-15.70	1.00 V	1	17.40	12.90
7	288.03	27.00 QP	46.00	-19.00	1.10 V	1	11.30	15.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

MODE	Without Cradle	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODE	Channel 11
ENVIRONMENTAL CONDITIONS	25 deg. C, 63%RH, 969hPa	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
TESTED BY	Rex Huang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.01	29.30 QP	40.00	-10.70	3.18 H	295	17.50	11.80
2	120.02	38.70 QP	43.50	-4.80	2.76 H	328	27.20	11.50
3	132.02	42.60 QP	43.50	-0.90	2.43 H	284	30.20	12.40
4	144.01	37.10 QP	43.50	-6.40	2.06 H	241	23.90	13.20
5	240.01	35.70 QP	46.00	-10.30	1.54 H	132	22.80	12.90
6	288.06	31.10 QP	46.00	-14.90	1.27 H	94	15.40	15.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.02	33.40 QP	40.00	-6.60	1.00 V	324	21.60	11.80
2	120.01	34.50 QP	43.50	-9.00	1.00 V	273	23.00	11.50
3	132.01	34.70 QP	43.50	-8.80	1.00 V	249	22.30	12.40
4	144.02	26.10 QP	43.50	-17.40	1.00 V	301	12.90	13.20
5	240.03	30.60 QP	46.00	-15.40	1.00 V	343	17.70	12.90
6	288.02	26.50 QP	46.00	-19.50	1.00 V	6	10.80	15.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.7 TEST RESULTS – DSSS

802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2334.00	20.30 PK	74.00	-53.70	1.43 H	243	-9.20	29.50
1	2334.00	41.50 AV	54.00	-12.50	1.43 H	243	12.00	29.50
2	2390.00	51.50 PK	74.00	-22.50	1.42 H	244	21.70	29.80
2	2390.00	41.10 AV	54.00	-12.90	1.42 H	244	11.30	29.80
3	*2412.00	103.70 PK			1.42 H	244	73.80	29.90
3	*2412.00	96.30 AV			1.42 H	244	66.40	29.90
4	4824.00	46.90 PK	74.00	-27.10	1.04 H	21	11.90	35.00
4	4824.00	38.20 AV	54.00	-15.80	1.04 H	21	3.10	35.00
5	7236.00	51.40 PK	74.00	-22.60	1.05 H	256	10.30	41.10
5	7236.00	38.80 AV	54.00	-15.20	1.05 H	256	-2.30	41.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2334.00	45.10 PK	74.00	-28.90	1.10 V	241	15.60	29.50
1	2334.00	36.10 AV	54.00	-17.90	1.10 V	241	6.60	29.50
2	2390.00	43.70 PK	74.00	-30.30	1.22 V	220	13.90	29.80
2	2390.00	33.20 AV	54.00	-20.80	1.22 V	220	3.40	29.80
3	*2412.00	95.90 PK			1.22 V	220	66.00	29.90
3	*2412.00	88.40 AV			1.22 V	220	58.50	29.90
4	4824.00	49.50 PK	74.00	-24.50	1.04 V	93	14.50	35.00
4	4824.00	43.40 AV	54.00	-10.60	1.04 V	93	8.40	35.00
5	7236.00	51.10 PK	74.00	-22.90	1.25 V	21	9.90	41.10
5	7236.00	39.50 AV	54.00	-14.50	1.25 V	21	-1.70	41.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.30 PK			1.46 H	242	74.30	30.00
1	*2437.00	96.70 AV			1.46 H	242	66.70	30.00
2	4874.00	46.90 PK	74.00	-27.10	1.35 H	248	11.70	35.20
2	4874.00	38.10 AV	54.00	-15.90	1.35 H	248	2.90	35.20
3	7311.00	50.10 PK	74.00	-23.90	1.10 H	267	8.70	41.40
3	7311.00	38.90 AV	54.00	-15.10	1.10 H	267	-2.40	41.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.90 PK			1.22 V	214	67.80	30.00
1	*2437.00	88.40 AV			1.22 V	214	58.40	30.00
2	4874.00	48.40 PK	74.00	-25.60	1.28 V	203	13.20	35.20
2	4874.00	41.00 AV	54.00	-13.00	1.28 V	203	5.90	35.20
3	7311.00	50.40 PK	74.00	-23.60	1.05 V	241	9.00	41.40
3	7311.00	39.70 AV	54.00	-14.30	1.05 V	241	-1.70	41.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.70 PK			1.41 H	245	75.60	30.10
1	*2462.00	98.20 AV			1.41 H	245	68.00	30.10
2	2483.50	53.40 PK	74.00	-20.60	1.41 H	245	23.20	30.20
2	2483.50	42.50 AV	54.00	-11.50	1.41 H	245	12.30	30.20
3	4924.00	46.20 PK	74.00	-27.80	1.04 H	321	10.90	35.40
3	4924.00	37.90 AV	54.00	-16.10	1.04 H	321	2.50	35.40
4	7386.00	50.20 PK	74.00	-23.80	1.05 H	41	8.60	41.60
4	7386.00	39.20 AV	54.00	-14.80	1.05 H	41	-2.40	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.30 PK			1.43 V	266	66.20	30.10
1	*2462.00	89.00 AV			1.43 V	266	58.90	30.10
2	2483.50	44.00 PK	74.00	-30.00	1.43 V	266	13.80	30.20
2	2483.50	33.30 AV	54.00	-20.70	1.43 V	266	3.10	30.20
3	4924.00	47.70 PK	74.00	-26.30	1.08 V	37	12.30	35.40
3	4924.00	40.30 AV	54.00	-13.70	1.08 V	37	4.90	35.40
4	7386.00	50.80 PK	74.00	-23.20	1.11 V	247	9.20	41.60
4	7386.00	39.20 AV	54.00	-14.80	1.11 V	247	-2.40	41.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.8 TEST RESULTS – OFDM

802.11g OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2338.00	49.30 PK	74.00	-24.70	1.40 H	220	19.80	29.50
1	2338.00	37.80 AV	54.00	-16.20	1.40 H	220	8.30	29.50
2	2390.00	55.70 PK	74.00	-18.30	1.43 H	242	25.90	29.80
2	2390.00	41.00 AV	54.00	-13.00	1.43 H	242	11.20	29.80
3	*2412.00	101.00 PK			1.43 H	242	71.10	29.90
3	*2412.00	92.00 AV			1.43 H	242	62.20	29.90
4	4824.00	44.40 PK	74.00	-29.60	1.24 H	145	9.40	35.00
4	4824.00	31.50 AV	54.00	-22.50	1.24 H	145	-3.60	35.00
5	7236.00	50.70 PK	74.00	-23.30	1.12 H	54	9.60	41.10
5	7236.00	37.70 AV	54.00	-16.30	1.12 H	54	-3.40	41.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2338.00	45.40 PK	74.00	-28.60	1.24 V	258	15.90	29.50
1	2338.00	33.10 AV	54.00	-20.90	1.24 V	258	3.60	29.50
2	2390.00	49.40 PK	74.00	-24.60	1.20 V	208	19.60	29.80
2	2390.00	34.50 AV	54.00	-19.50	1.20 V	208	4.70	29.80
3	*2412.00	94.70 PK			1.20 V	208	64.80	29.90
3	*2412.00	85.50 AV			1.20 V	208	55.60	29.90
4	4824.00	42.60 PK	74.00	-31.40	1.08 V	341	7.60	35.00
4	4824.00	31.30 AV	54.00	-22.70	1.08 V	341	-3.70	35.00
5	7236.00	51.40 PK	74.00	-22.60	1.12 V	147	10.30	41.10
5	7236.00	37.90 AV	54.00	-16.10	1.12 V	147	-3.30	41.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.40 PK			1.42 H	244	71.40	30.00
1	*2437.00	92.20 AV			1.42 H	244	62.20	30.00
2	4874.00	45.10 PK	74.00	-28.90	1.51 H	230	9.90	35.20
2	4874.00	31.80 AV	54.00	-22.20	1.51 H	230	-3.40	35.20
3	7311.00	51.90 PK	74.00	-22.10	1.12 H	254	10.60	41.40
3	7311.00	38.60 AV	54.00	-15.40	1.12 H	254	-2.80	41.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.50 PK			1.18 V	211	65.50	30.00
1	*2437.00	86.30 AV			1.18 V	211	56.30	30.00
2	4874.00	45.70 PK	74.00	-28.30	1.05 V	291	10.50	35.20
2	4874.00	32.30 AV	54.00	-21.70	1.05 V	291	-2.90	35.20
3	7311.00	51.70 PK	74.00	-22.30	1.24 V	263	10.40	41.40
3	7311.00	38.50 AV	54.00	-15.50	1.24 V	263	-2.80	41.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 969hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.80 PK			1.41 H	241	72.70	30.10
1	*2462.00	93.50 AV			1.41 H	241	63.40	30.10
2	2483.50	57.20 PK	74.00	-16.80	1.41 H	241	27.00	30.20
2	2483.50	42.70 AV	54.00	-11.30	1.41 H	241	12.50	30.20
3	4924.00	45.90 PK	74.00	-28.10	1.15 H	203	10.50	35.40
3	4924.00	32.00 AV	54.00	-22.00	1.15 H	203	-3.40	35.40
4	7386.00	52.00 PK	74.00	-22.00	1.24 H	221	10.40	41.60
4	7386.00	38.50 AV	54.00	-15.50	1.24 H	221	-3.10	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.60 PK			1.13 V	210	67.50	30.10
1	*2462.00	88.40 AV			1.13 V	210	58.30	30.10
2	2483.50	52.00 PK	74.00	-22.00	1.13 V	210	21.80	30.20
2	2483.50	37.60 AV	54.00	-16.40	1.13 V	210	7.40	30.20
3	4924.00	46.00 PK	74.00	-28.00	1.07 V	241	10.70	35.40
3	4924.00	32.60 AV	54.00	-21.40	1.07 V	241	-2.80	35.40
4	7386.00	52.80 PK	74.00	-21.20	1.24 V	25	11.20	41.60
4	7386.00	39.00 AV	54.00	-15.00	1.24 V	25	-2.60	41.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency

4.3 MAXIMUM PEAK OUTPUT POWER

4.3.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Jun. 15, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.3.4 TEST SETUP

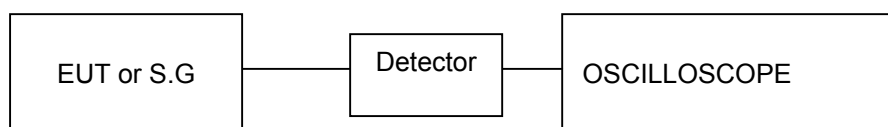

4.3.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.3.6 TEST RESULTS – DSSS

802.11b DSSS modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 67%RH, 969hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	71.121	18.52	30	PASS
6	2437	55.590	17.45	30	PASS
11	2462	54.954	17.40	30	PASS



4.3.7 TEST RESULTS – OFDM

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 67%RH, 969hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	63.096	18.00	30	PASS
6	2437	50.234	17.01	30	PASS
11	2462	53.827	17.31	30	PASS

4.4 BAND EDGES MEASUREMENT

4.4.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.4.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.4.5 TEST RESULTS – DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 52.22dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 103.7dBuV/m, so the maximum field strength in restrict band is $103.7-52.22=51.48$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 52.26dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 105.7dBuV/m, so the maximum field strength in restrict band is $105.7-52.26=53.44$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 55.24dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 96.3dBuV/m, so the maximum field strength in restrict band is $96.3-55.24=41.06$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.70dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 98.20dBuV/m, so the maximum field strength in restrict band is $98.20-55.70=42.50$ dBuV/m which is under 54 dBuV/m limit.


CH1

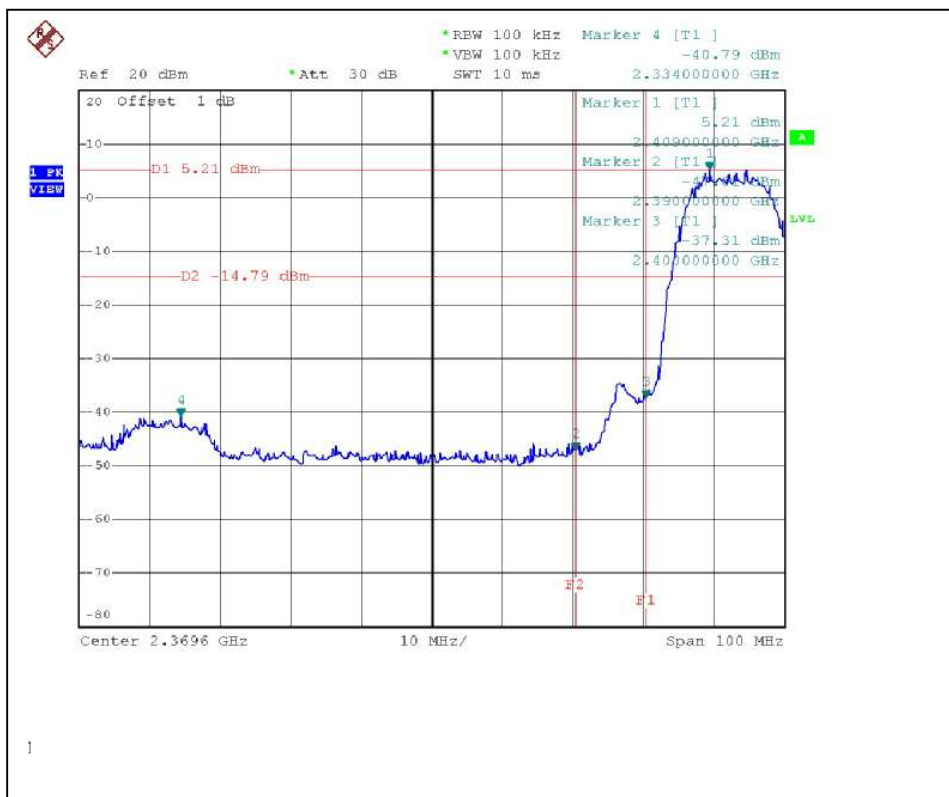


CH11

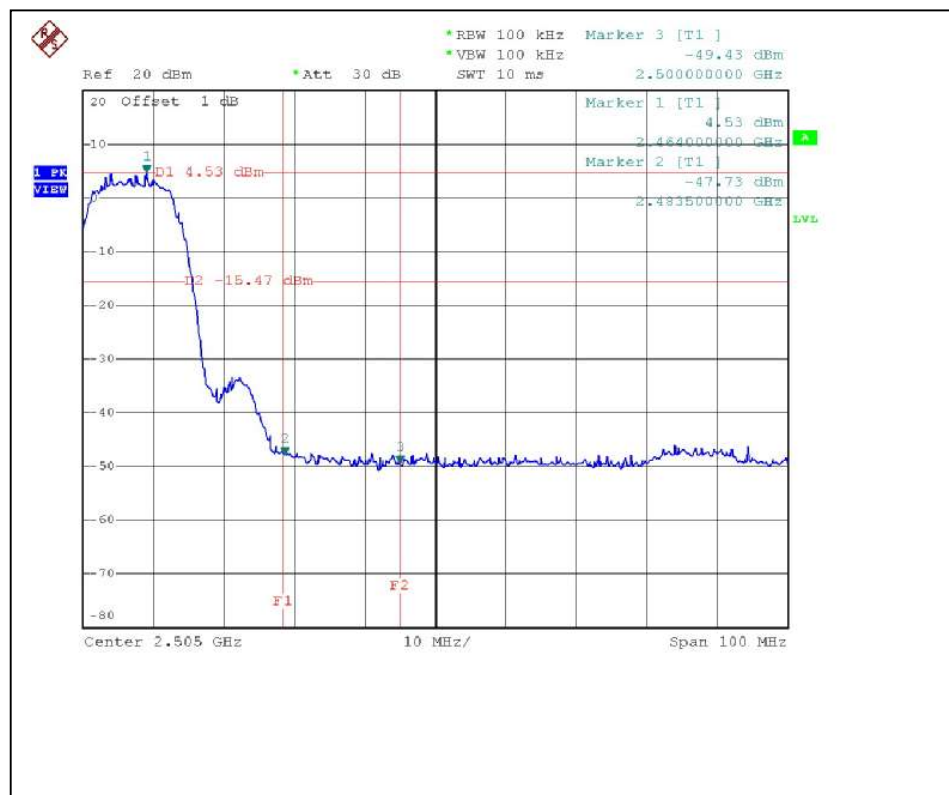


CH1

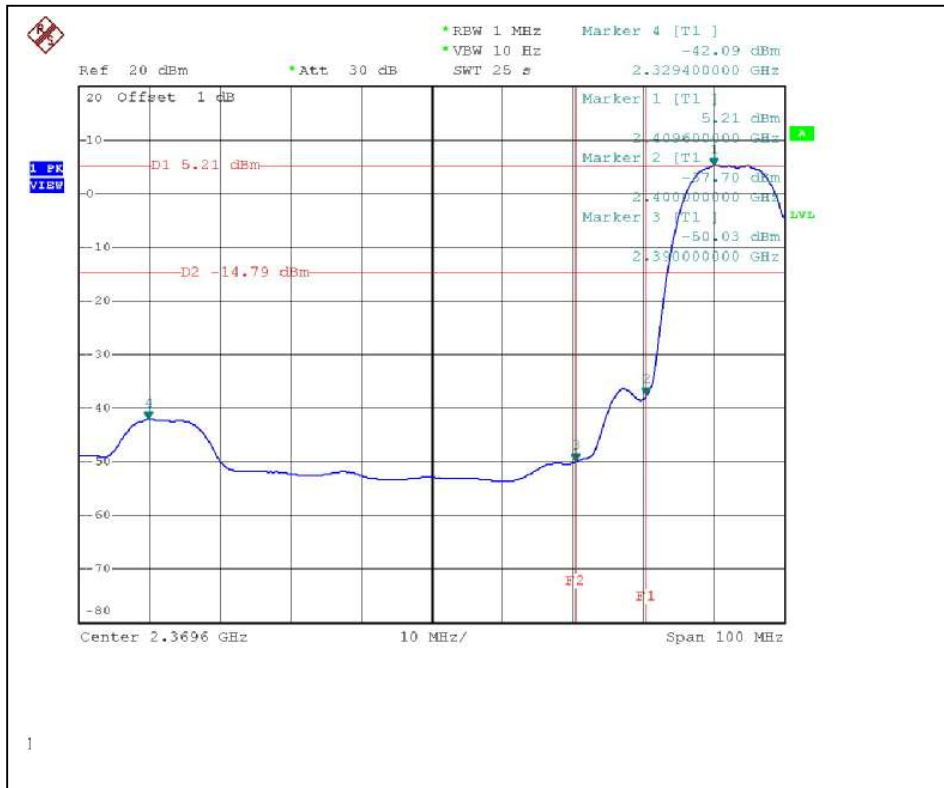


CH11

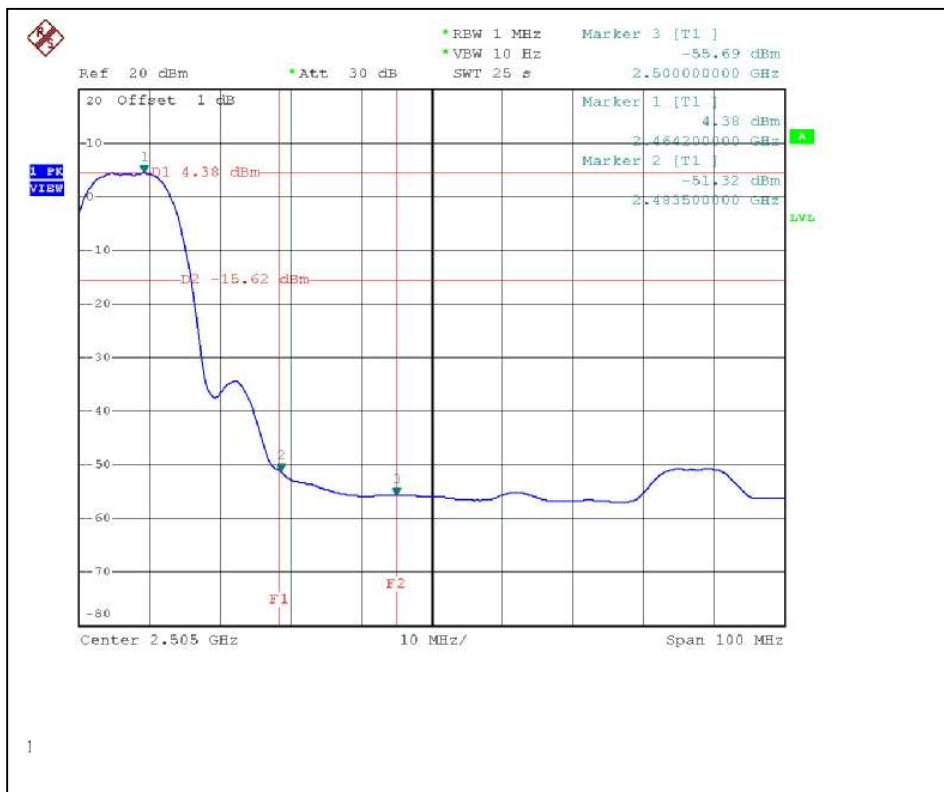

CH1

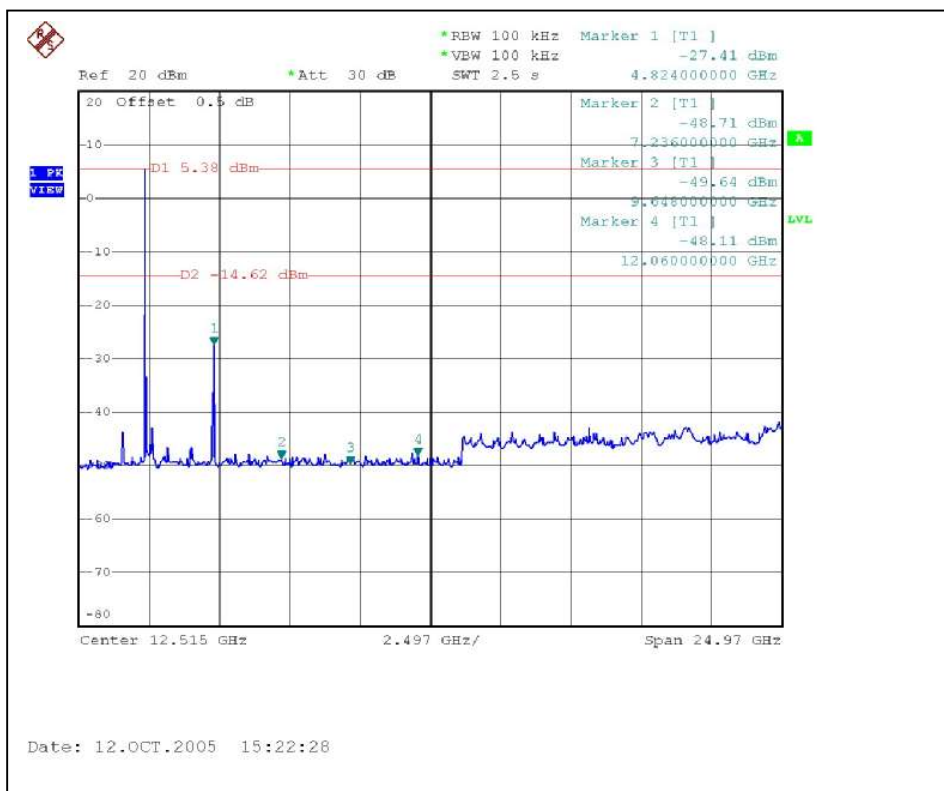

CH11

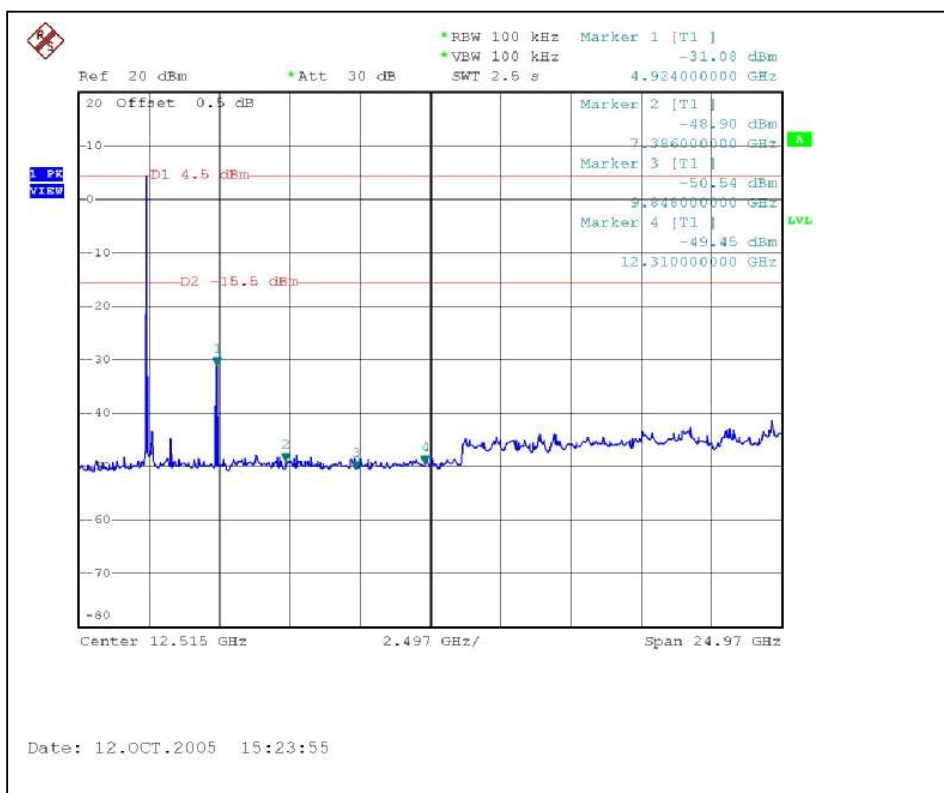

4.4.6 TEST RESULTS –OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 45.33dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 101.0dBuV/m, so the maximum field strength in restrict band is $101.0-45.33=55.67$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 45.56dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 102.8dBuV/m, so the maximum field strength in restrict band is $102.8-45.56=57.24$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 51.0dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 92.0dBuV/m, so the maximum field strength in restrict band is $92.0-51.0=41.0$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 50.76dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 93.50dBuV/m, so the maximum field strength in restrict band is $93.50-50.76=42.74$ dBuV/m which is under 54 dBuV/m limit.


CH1

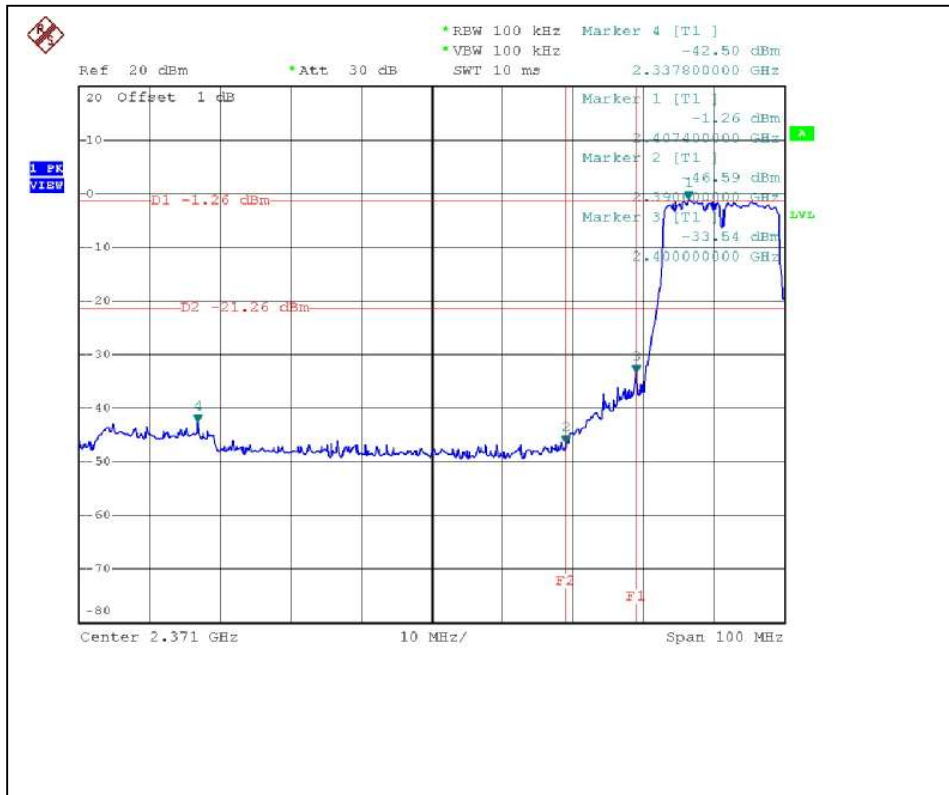


CH11

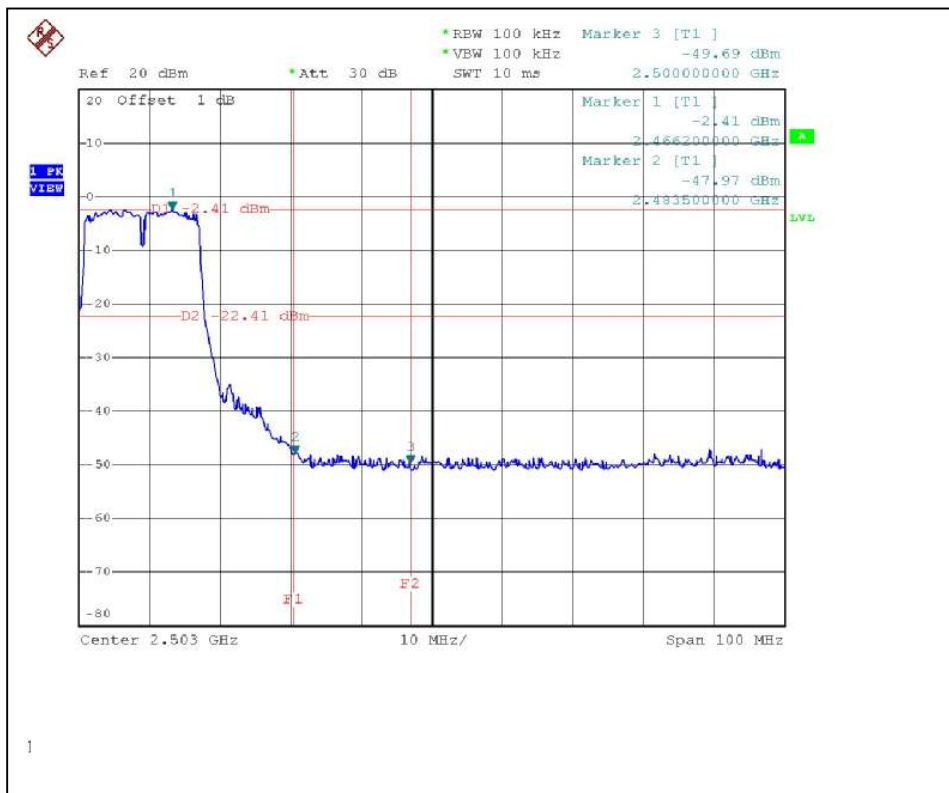


CH1

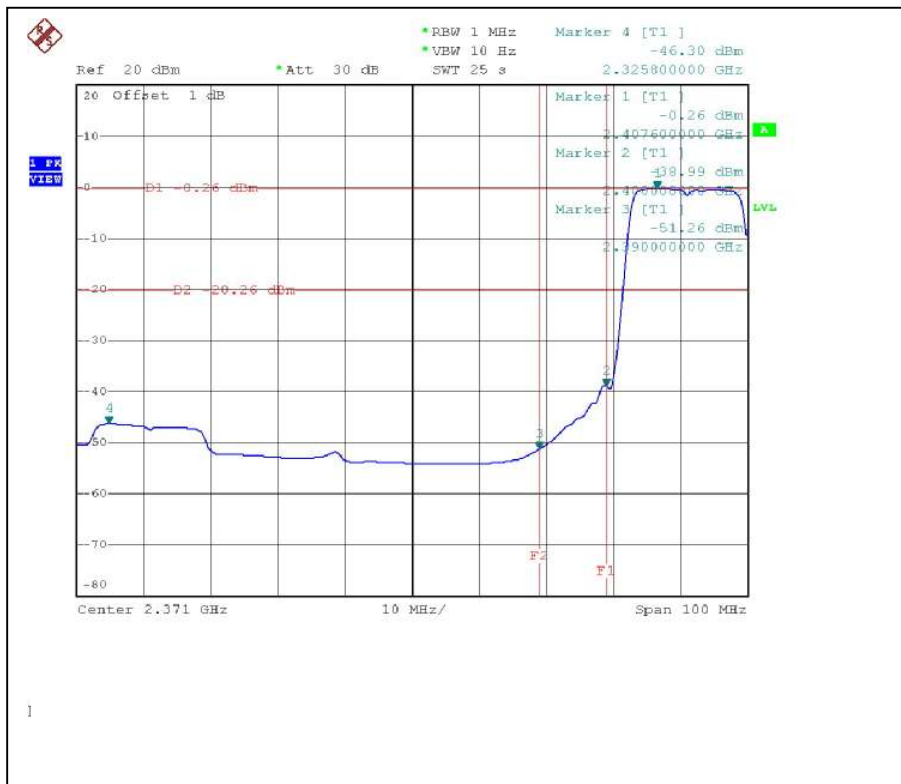


CH11

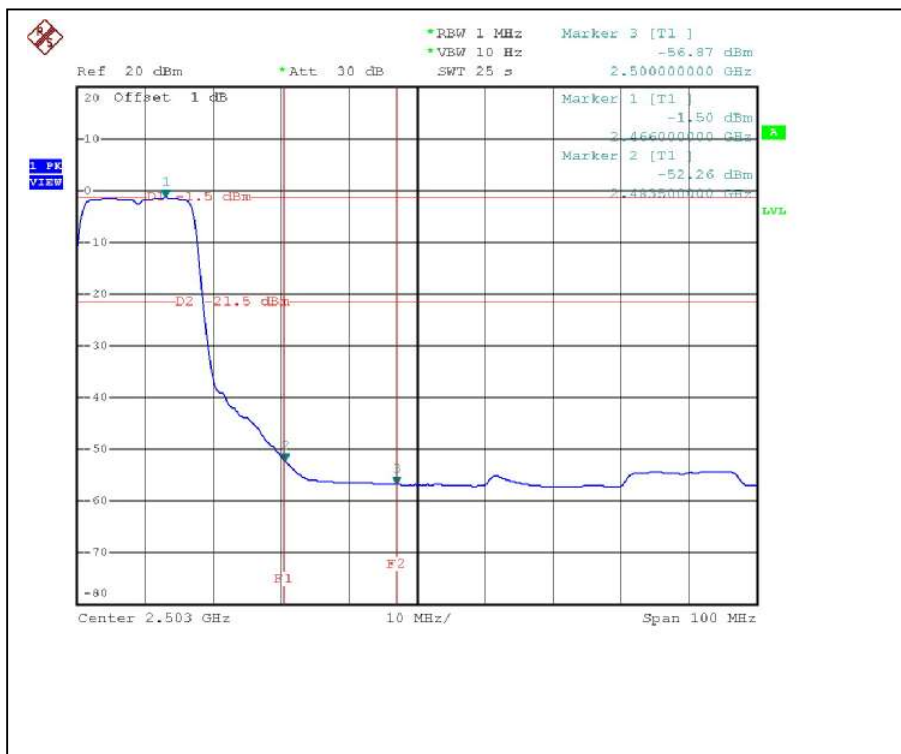

CH1

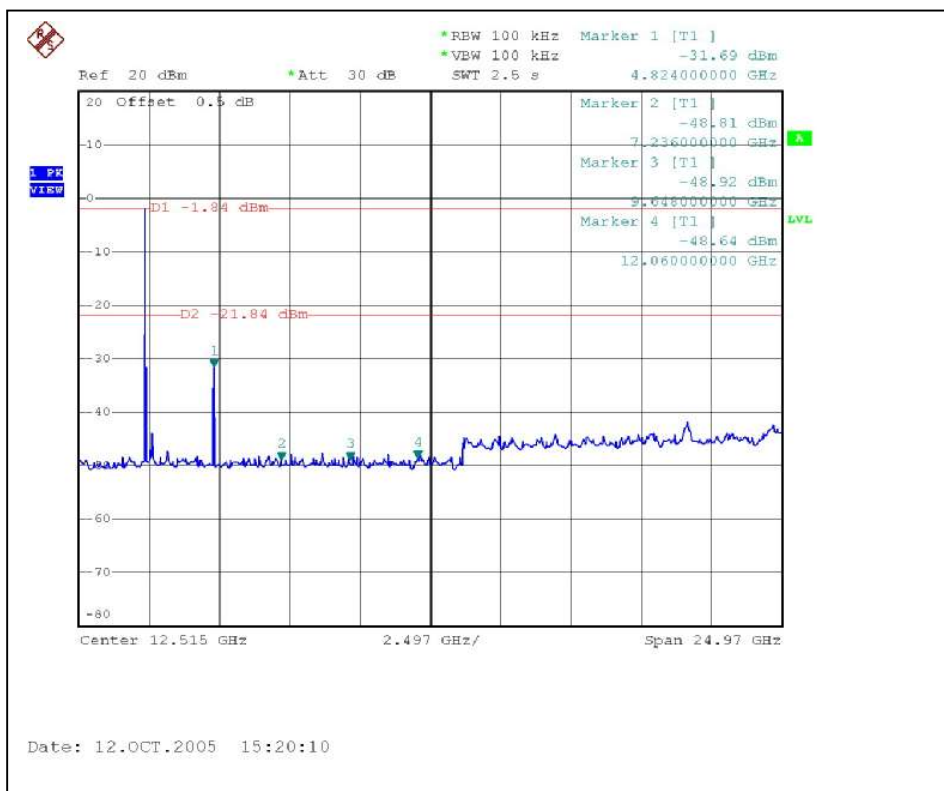

CH11

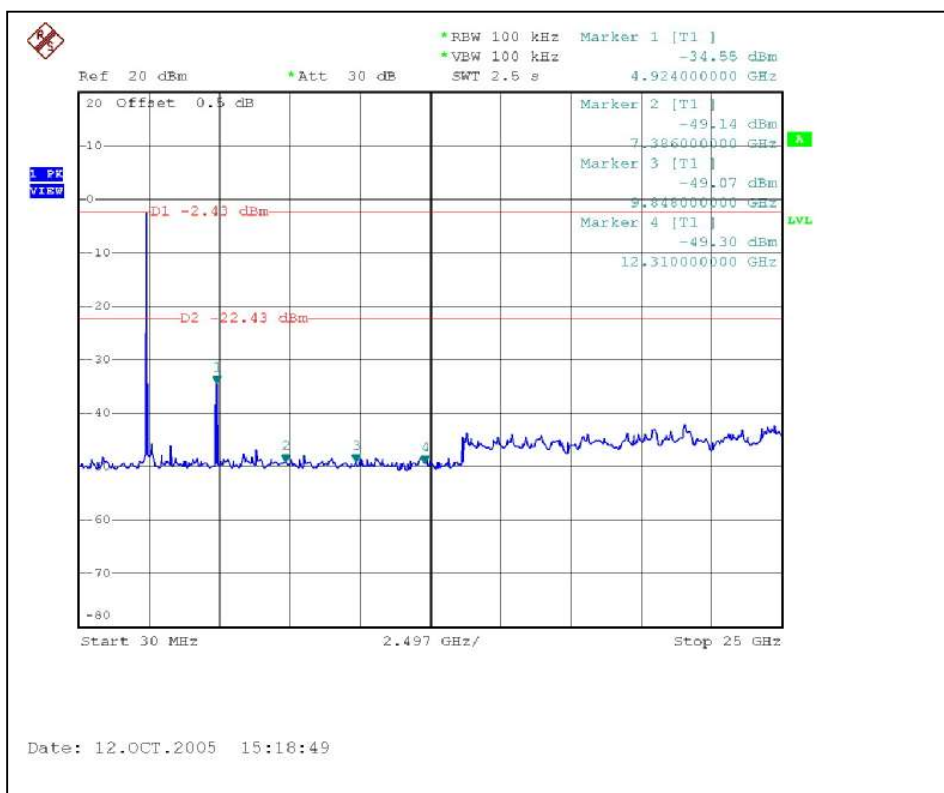

4.5 ANTENNA REQUIREMENT

4.5.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.5.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is -2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST – With cradle



CONDUCTED EMISSION TEST – Without cradle



RADIATED EMISSION TEST – With cradle



RADIATED EMISSION TEST – Without cradle





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.