



Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
Type of Evaluation:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**RF EXPOSURE EVALUATION**

**SPECIFIC ABSORPTION RATE**

**SAR TEST REPORT**

FOR

**ITRONIX CORPORATION**

**MODEL: IX325-AC860IWL**

**IX325 SERIES RUGGED TABLET PC**

WITH

**DUAL-BAND GSM/GPRS/EDGE/UMTS PCMCIA MODEM**

**FCC ID: KBCIX325-AC860IWL**

**IC: 1943A-IX325g**

<b>TEST STANDARD(S) &amp; PROCEDURE(S) APPLIED</b>
FCC OET Bulletin 65, Supplement C (01-01)
Industry Canada RSS-102 Issue 2

**Test Report Serial No.**

**042406KBC-T741-S24GWC**

**Test Report Revision No.**

**Revision 1.0 (Initial Release)**

**Test Lab and Location**

**Celltech Compliance Testing & Engineering Lab  
(Celltech Labs Inc.)  
1955 Moss Court  
Kelowna, BC  
Canada  
V1Y 9L3**

<b><u>Test Report Prepared By:</u></b> <b>Cheri Frangiadakis Test Report Writer Celltech Labs Inc.</b>	<b><u>Test Report Reviewed By:</u></b> <b>Jonathan Hughes General Manager Celltech Labs Inc.</b>
---	---

<b>Company:</b> Itronix Corporation	<b>FCC ID:</b> KBCIX325-AC860IWL	<b>IC ID:</b> 1943A-IX325g	<b>ITRONIX®</b> <small>A GENERAL DYNAMICS COMPANY</small>
<b>Model:</b> IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 1 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<b>Test Lab and Location</b>		<b>Company Information</b>					
<b>CELLTECH LABS INCORPORATED</b> Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: info@celltechlabs.com web site: www.celltechlabs.com		<b>ITRONIX CORPORATION</b> 12825 E. Mirabeau Parkway Spokane Valley, WA 99216 United States					
<b>FCC IDENTIFIER:</b>	KBCIX325-AC860IWL						
<b>IC IDENTIFIER:</b>	1943A-IX325g						
<b>Model(s):</b>	IX325-AC860IWL						
<b>Rule Part(s):</b>	FCC	47 CFR §2.1093			IC	Health Canada Safety Code 6	
<b>Test Procedure(s):</b>	FCC	OET Bulletin 65, Supplement C (01-01)			IC	RSS-102 Issue 2	
<b>Device Classification(s):</b>	FCC	PCS Licensed Transmitter (PCB)			47 CFR Part 24 Subpart E		
	IC	2 GHz Personal Communication Services			RSS-133 Issue 3		
		800 MHz Cellular Telephones Employing New Technologies			RSS-132 Issue 2		
<b>Device Description:</b>	Rugged Tablet PC						
<b>Internal Transmitter Type:</b>	Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem			Sierra Wireless Model: AirCard 860			
<b>User Display Orientation(s):</b>	0 Degrees Landscape			-90 Degrees Portrait			
<b>Transmit Frequency Range(s):</b>	1850.2 - 1909.8 MHz		PCS GSM/GPRS/EDGE		824.2 - 848.8 MHz		Cellular GSM/GPRS/EDGE
	1852.4 - 1907.5 MHz		PCS UMTS		826.4 - 846.6 MHz		Cellular UMTS
<b>Max. RF Output Power Tested:</b>	Conducted	PCS GPRS	28.71 dBm	0.743 Watts	Cellular GPRS	32.27 dBm	1.69 Watts
	Conducted	PCS EDGE	25.72 dBm	0.373 Watts	Cellular EDGE	26.91 dBm	0.491 Watts
	Conducted	PCS UMTS	23.00 dBm	0.200 Watts	Cellular UMTS	24.00 dBm	0.251 Watts
<b>Max. RF Output Power Tested: (Source-Based Time Averaged)</b>	Conducted	PCS GPRS	22.69 dBm	0.186 Watts	Cellular GPRS	25.80 dBm	0.380 Watts
	Conducted	PCS EDGE	19.70 dBm	0.093 Watts	Cellular EDGE	20.89 dBm	0.123 Watts
<b>GSM Transmit Class:</b>	Class B can be connected to GPRS and GSM services using only one service at a time						
<b>GSM Multislot Class:</b>	Class 10	2 Uplink Slots		Max. Source-Based Time-Averaged Duty Cycle:		25%	
<b>GSM Power Class:</b>	GPRS 850: 1		GPRS 1900: 1		EDGE 850: E2		EDGE 1900: E2
<b>WCDMA Power Class:</b>	UMTS 850: 3		UMTS 1900: 3		Max. Duty Cycle:		100%
<b>WCDMA Uplink Channel(s):</b>	1 DPCCH Channel			1 DPDCCH Channel			
<b>Antenna Type(s) Tested:</b>	External Hinged Monopole		Sierra Wireless		attached to AirCard 860		
<b>Battery Type(s) Tested:</b>	Lithium-ion		11.1 V, 3600 mAh		Model: T8M-E		
<b>Max. SAR Level(s) Evaluated:</b>	Body (1g)	<b>PCS Band</b>	<b>GPRS:</b>	<b>0.624 W/kg</b>	<b>EDGE:</b>	<b>0.306 W/kg</b>	<b>UMTS:</b> <b>0.252 W/kg</b>
		<b>Cellular Band</b>	<b>GPRS:</b>	<b>0.332 W/kg</b>	<b>EDGE:</b>	<b>0.0919 W/kg</b>	<b>UMTS:</b> <b>0.251 W/kg</b>


Celltech Labs Inc. declares under its sole responsibility that this wireless device was compliant with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

**Test Report Approved By:**  
**Sean Johnston**  
 SAR Lab Manager  
 Celltech Labs Inc.



<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 58

<b>TABLE OF CONTENTS</b>	
1.0 INTRODUCTION	4
2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 MEASUREMENT SUMMARY	6
MEASUREMENT SUMMARY (Cont.)	7
5.0 DETAILS OF SAR EVALUATION	8
6.0 EVALUATION PROCEDURES	9
7.0 SYSTEM PERFORMANCE CHECK	10
8.0 SIMULATED EQUIVALENT TISSUES	11
9.0 SAR SAFETY LIMITS	11
10.0 ROBOT SYSTEM SPECIFICATIONS	12
11.0 PROBE SPECIFICATION (ET3DV6)	13
12.0 PLANAR PHANTOM	13
13.0 DEVICE HOLDER	13
14.0 TEST EQUIPMENT LIST	14
15.0 MEASUREMENT UNCERTAINTIES	15
MEASUREMENT UNCERTAINTIES (Cont.)	16
16.0 REFERENCES	17
APPENDIX A - SAR MEASUREMENT DATA	18
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	34
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	45
APPENDIX D - SAR TEST SETUP PHOTOGRAPHS	52
APPENDIX E - SYSTEM VALIDATION	56
APPENDIX F - PROBE CALIBRATION	57
APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY	58


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


## 1.0 INTRODUCTION

This measurement report demonstrates that ITRONIX CORPORATION Model: IX325-AC860IWL Rugged Tablet PC FCC ID: KBCIX325-AC860IWL, incorporating the Sierra Wireless AirCard 860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem, complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

## 2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)

<b>FCC Rule Part(s)</b>	47 CFR §2.1093		<b>IC Rule Part(s)</b>		Health Canada Safety Code 6				
<b>Test Procedure(s)</b>	FCC OET Bulletin 65, Supplement C (01-01)			Industry Canada RSS-102 Issue 2					
<b>RF Exposure Category</b>	General Population / Uncontrolled Environment								
<b>FCC Device Classification</b>	PCS Licensed Transmitter (PCB)				47 CFR Part 24 Subpart E				
<b>IC Device Classification</b>	2 GHz Personal Communication Services				RSS 133 Issue 3				
	800MHz Cellular Telephones Employing New Technologies				RSS-132 Issue 2				
<b>Device Description</b>	Rugged Tablet PC		<b>Model(s)</b>		IX325-AC860IWL				
<b>Internal Transmitter(s)</b>	Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem				Sierra Wireless Model: AirCard 860				
<b>User Orientation(s)</b>	0 Degrees Landscape			-90 Degrees Portrait					
<b>FCC IDENTIFIER</b>	KBCIX325-AC860IWL		<b>IC IDENTIFIER</b>		1943A-IX325g				
<b>Test Sample Serial No.(s)</b>	ZZGEG5073ZZ9784		IX325 Tablet PC			Production Unit			
	357806000465210		AirCard 860 Modem			Production Unit			
<b>Transmitter Frequency Range(s)</b>	1850.2 - 1909.8 MHz		PCS GSM/GPRS/EDGE		824.2 - 848.8 MHz		Cellular GSM/GPRS/EDGE		
	1852.4 - 1907.5 MHz		PCS UMTS		826.4 - 846.6 MHz		Cellular UMTS		
<b>Max. RF Conducted Output Power Level(s) Measured</b>	<b>Band</b>	<b>Freq.</b>	<b>GPRS</b>		<b>EDGE</b>		<b>Freq.</b>	<b>W-CDMA</b>	
		<b>MHz</b>	<b>dBm</b>	<b>Watts</b>	<b>dBm</b>	<b>Watts</b>	<b>MHz</b>	<b>dBm</b>	<b>Watts</b>
	<b>Cellular</b>	<b>824.2</b>	31.70	1.48	26.74	0.472	<b>826.4</b>	23.80	0.240
		<b>836.6</b>	31.82	1.52	26.91	0.491	<b>836.4</b>	23.90	0.245
		<b>848.8</b>	32.27	1.69	26.85	0.484	<b>846.6</b>	24.00	0.251
	<b>PCS</b>	<b>1850.2</b>	28.62	0.728	25.61	0.364	<b>1852.4</b>	22.33	0.171
<b>1880.0</b>		28.71	0.743	25.72	0.373	<b>1880.0</b>	23.00	0.200	
<b>1909.8</b>		28.50	0.708	25.52	0.356	<b>1907.5</b>	22.70	0.186	
<b>Max. Conducted Source-Based Time Averaged RF Output Power Tested</b>	<b>Cellular</b>	<b>836.6</b>	25.80	0.380	20.89	0.123	-		
	<b>PCS</b>	<b>1880.0</b>	22.69	0.186	19.70	0.093	-		
<b>GSM Transmit Class</b>	Class B		can be connected to both GPRS and GSM services using one service at a time						
<b>GSM Multislot Class</b>	Class 10		2 Uplink Slots		Max. Source-Based Time-Averaged Duty Cycle:			25%	
<b>GSM Power Class</b>	GPRS 850:	1	GPRS: 1900:	1	EDGE 850:	E2	EDGE 1900:	E2	
<b>WCDMA Power Class</b>	UMTS 850:	3	UMTS 1900:	3	Source-Based Time-Averaged Duty Cycle:			100%	
<b>WCDMA Uplink Channel(s)</b>	1 DPCCH Channel				1 DPDCH Channel				
<b>Modulation Type(s)</b>	GPRS: GMSK			EDGE: 8-PSK		UMTS: WCDMA			
<b>Antenna Type(s) Tested</b>	External		Hinged Monopole		attached to AirCard 860				
<b>Antenna Position(s) Tested</b>	Position 1	Closed 180°		Pivot Closed		Antenna 180° to PCMCIA Card			
	Position 2	Open 180°		Pivot Open		Antenna 180° to PCMCIA Card			
	Position 3	Open 90°		Pivot Open		Antenna 90° to PCMCIA Card			
<b>Battery Type(s) Tested</b>	Internal Lithium-ion Battery			11.1 V, 3600 mAh		Model: T8M-E			
<b>Additional Battery Type(s) Testing Not Performed</b>	External Second Lithium-ion Battery			11.1 V, 3600 mAh		Model: T8S-E			
	Note: The external second lithium-ion battery was not evaluated for SAR due to the fact that it has exactly the same power specifications as the internal battery and provides additional separation distance from tablet to user.								

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 58


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

### 3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with planar phantom

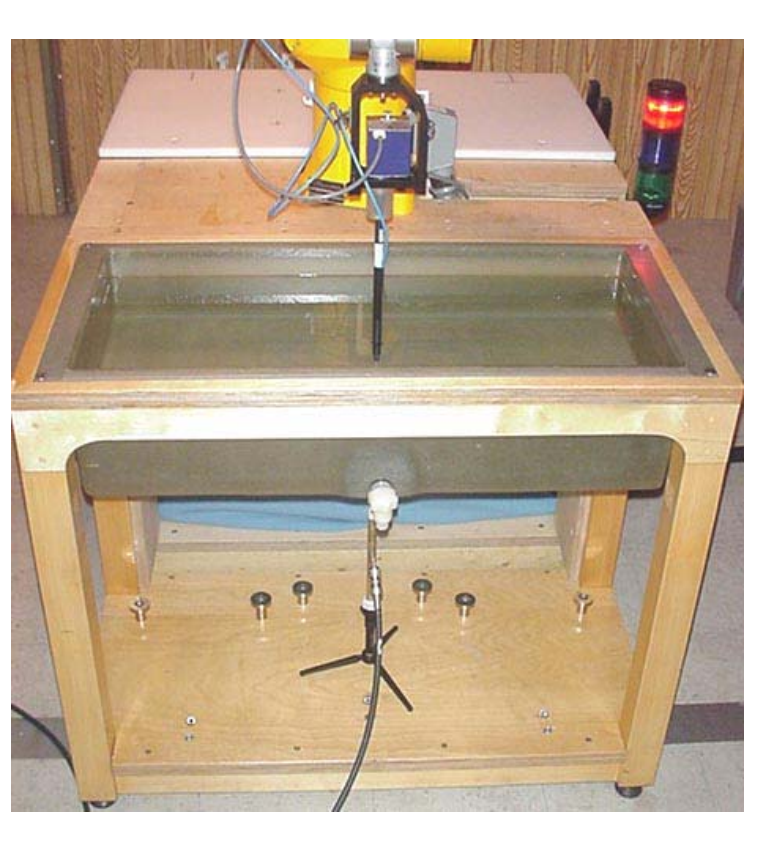


DASY4 SAR Measurement System with planar phantom and validation dipole

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## 4.0 MEASUREMENT SUMMARY


BODY SAR EVALUATION RESULTS														
Cellular Band														
Test Date	Test Mode			Freq. (MHz)	Chan.	Antenna Position	Battery Type	DUT Position to Planar Phantom	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	SAR Drift During Test (dB)	Measured SAR 1g (W/kg)		
May 2	GPRS	2 Slots	Script	836.6	190	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	31.82	0.0131	0.332		
May 2	GPRS	2 Slots	Script	836.6	190	Open 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	31.82	-0.0280	0.0569		
May 2	GPRS	2 Slots	Script	836.6	190	Open 90°	Internal Li-ion	Bottom Side	0.0 (Touch)	31.82	-0.0955	0.0207		
May 3	EDGE	2 Slots	Script	836.6	190	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	26.91	0.0106	0.0919		
May 11	UMTS	WCDMA	Air-link	836.4	4182	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	23.90	0.009	0.251		
ANSI / IEEE C95.1 1999 - SAFETY LIMIT				BODY: 1.6 W/kg (averaged over 1 gram)				Spatial Peak - Uncontrolled Exposure / General Population						
Test Date(s)			May 2, 2006		May 3, 2006		May 11, 2006		Test Date(s)		May 2	May 3	May 11	Unit
Dielectric Constant $\epsilon_r$	Fluid Type		835 MHz Body		835 MHz Body		835 MHz Body		Relative Humidity		30	30	30	%
	IEEE Target		Meas.	Dev.	Meas.	Dev.	Meas.	Dev.	Atmospheric Pressure		101.6	102.9	102.7	kPa
	55.2	± 5%	53.2	-3.6%	53.1	-3.8%	52.7	-4.5%	Ambient Temperature		22.4	22.5	23.2	°C
Conductivity $\sigma$ (mho/m)	Fluid Type		835 MHz Body		835 MHz Body		835 MHz Body		Fluid Temperature		22.2	22.0	21.5	°C
	IEEE Target		Meas.	Dev.	Meas.	Dev.	Meas.	Dev.	Fluid Depth		≥ 15	≥ 15	≥ 15	cm
	0.97	± 5%	0.95	-2.1%	0.97	0.0%	0.95	-2.1%	$\rho$ (Kg/m <sup>3</sup> )		1000			
Note(s)	1.	The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.												
	2.	If the SAR levels measured at the mid channel were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).												
	3.	GPRS and EDGE modes were evaluated for SAR at maximum power using the proprietary Sierra Wireless Procomm Plus Test Script.												
	4.	UMTS mode was evaluated for SAR at maximum power via air-link using the Anritsu MT8820A communications test set.												
	5.	EDGE and UMTS modes were evaluated for SAR in the worst-case antenna configuration evaluated in GPRS mode.												
	6.	The power drift of the DUT measured by the DASY4 system during the SAR evaluations was <5% from the start power.												
	7.	The DUT battery was fully charged prior to the SAR evaluations.												
	8.	The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported in the table above were consistent for all measurement periods.												
	9.	The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).												
	10.	The SAR evaluations were performed within 24 hours of the system performance check.												


Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

## MEASUREMENT SUMMARY (Cont.)

BODY SAR EVALUATION RESULTS												
PCS Band												
Test Date	Test Mode			Freq. (MHz)	Chan.	Antenna Position	Battery Type	DUT Position to Planar Phantom	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	SAR Drift During Test (dB)	Measured SAR 1g (W/kg)
May 4	GPRS	2 Slots	Script	1880.0	661	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	28.71	-0.135	0.624
May 4	GPRS	2 Slots	Script	1880.0	661	Open 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	28.71	0.039	0.0626
May 4	GPRS	2 Slots	Script	1880.0	661	Open 90°	Internal Li-ion	Bottom Side	0.0 (Touch)	28.71	-0.040	0.0806
May 4	EDGE	2 Slots	Script	1880.0	661	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	25.72	-0.012	0.306
May 11	UMTS	WCDMA	Air-link	1880.0	9400	Closed 180°	Internal Li-ion	Bottom Side	0.0 (Touch)	23.0	-0.207	0.252
ANSI / IEEE C95.1 1999 - SAFETY LIMIT				BODY: 1.6 W/kg (averaged over 1 gram)				Spatial Peak - Uncontrolled Exposure / General Population				
Test Date(s)			May 4, 2006		May 11, 2006		Test Date(s)		May 4	May 11	Unit	
Dielectric Constant $\epsilon_r$	Fluid Type		1880 MHz Body		1880 MHz Body		Relative Humidity		30	30	%	
	IEEE Target		Meas.	Dev.	Meas.	Dev.	Atmospheric Pressure		101.6	102.9	kPa	
	53.3	± 5%	51.5	-3.4%	51.2	-3.9%	Ambient Temperature		24.0	24.3	°C	
Conductivity $\sigma$ (mho/m)	Fluid Type		1880 MHz Body		1880 MHz Body		Fluid Temperature		23.5	23.7	°C	
	IEEE Target		Meas.	Dev.	Meas.	Dev.	Fluid Depth		≥ 15	≥ 15	cm	
	1.52	± 5%	1.55	+2.0%	1.46	-3.9%	$\rho$ (Kg/m <sup>3</sup> )		1000			
Note(s)	1.	The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.										
	2.	If the SAR levels measured at the mid channel were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).										
	3.	GPRS and EDGE modes were evaluated for SAR at maximum power using the proprietary Sierra Wireless Procomm Plus Test Script.										
	4.	UMTS mode was evaluated for SAR at maximum power via air-link using the Anritsu MT8820A communications test set.										
	5.	EDGE and UMTS modes were evaluated for SAR in the worst-case antenna configuration evaluated in GPRS mode.										
	6.	The power drifts measured by the DASY4 system for the duration of the SAR evaluations were <5% from the start power.										
	7.	The DUT battery was fully charged prior to the SAR evaluations.										
	8.	The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported in the table above were consistent for all measurement periods.										
	9.	The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).										
	10.	The SAR evaluations were performed within 24 hours of the system performance check.										

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## 5.0 DETAILS OF SAR EVALUATION

The ITRONIX CORPORATION Model: IX325-AC860IWL Rugged Tablet PC with internal Sierra Wireless AirCard 860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

### Test Configuration(s)

- The DUT was tested for body SAR (lap-held) with the bottom side of the Tablet PC placed parallel to, and touching, the outer surface of the planar phantom. The DUT was evaluated for SAR with the AirCard 860 antenna placed in the "Closed 180°" position, "Open 180°" position, and "Open 90°" position (see placement photos on next page).

### Test Modes & Power Settings

- For the SAR evaluations in GPRS and EDGE modes the proprietary Sierra Wireless Procomm Plus Test Script installed in the DUT was utilized. The DUT was transmitting at maximum power in 2 time slots (25% duty cycle with a crest factor of 2).
- For the SAR evaluations in UMTS mode an air-link communication was established using the Anritsu MT8820A communications test set. The DUT was transmitting at maximum power with "all-up bits" (see below settings table).

#### PROCEDURES USED TO ESTABLISH TEST SIGNAL

The following settings were used to configure the Anritsu MT8820A Communications Test Set:

##### Instrument Information

Application: WCDMA  
Standard: MX88200B 4.41 #003  
Scenario: MX882050A  
Serial Number: 6200241241


##### Call Parameters

Preset: 3GPP  
Test Loop Mode: Mode 1  
Channel Coding: Reference Measurement Channel 12.2 kbps  
DTCH Data Pattern: PN9  
Power Control Algorithm: Algorithm 1  
TPC Step size: 1dB  
Power Control Bit Pattern: All-Up Bits  
UL Channel: 9262 / 9400 / 9538    4132 / 4182 / 4233  
DL Channel: 9662 / 9800 / 9938    4357 / 4407 / 4458


- The conducted power levels of the AC860 were measured at the PC card antenna connector prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter in Burst Average Power mode (GPRS/EDGE) and Modulated Average Power mode (WCDMA) according to the procedures described in FCC 47 CFR §2.1046.
- The power drift of the DUT during the SAR evaluations was measured by the DASY4 system.

### Test Conditions

- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 58



	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## 6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.


An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

### Antenna Test Positions

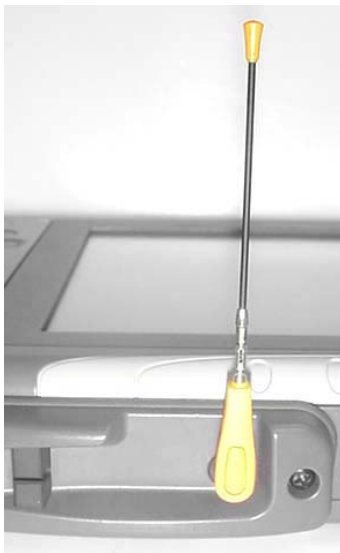


Antenna "Open 90°" Position



Antenna "Closed 180°" Position



Antenna "Open 180°" Position

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 58

## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a planar phantom with an 835MHz dipole and a 1900MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixtures were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system performance check test plots). See Table 1 below for the SAR system manufacturer's reference body SAR values from the DASY4 Operation Manual (see reference [6]).

### SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue Body (MHz)	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
5/1/06	835	2.43 $\pm 10\%$	2.45	+0.8%	55.2 $\pm 5\%$	53.0	-4.0%	0.97 $\pm 5\%$	0.96	-1.0%	1000	25.5	22.8	$\geq 15$	30	101.8
5/3/06	835	2.43 $\pm 10\%$	2.24	-7.8%	55.2 $\pm 5\%$	53.1	-3.8%	0.97 $\pm 5\%$	0.97	0.0%	1000	22.5	22.0	$\geq 15$	30	102.9
5/4/06	1900	9.95 $\pm 10\%$	10.2	+2.5%	53.3 $\pm 5\%$	51.5	-3.4%	1.52 $\pm 5\%$	1.56	-2.6%	1000	24.0	23.5	$\geq 15$	30	101.6
5/11/06	835	2.43 $\pm 10\%$	2.48	+2.1%	55.2 $\pm 5\%$	52.7	-4.5%	0.97 $\pm 5\%$	0.95	-2.1%	1000	23.2	21.5	$\geq 15$	30	102.7
5/11/06	1900	9.95 $\pm 10\%$	9.71	-2.4%	53.3 $\pm 5\%$	51.1	-4.1%	1.52 $\pm 5\%$	1.47	-3.3%	1000	24.3	23.7	$\geq 15$	30	102.9

**Note(s)**

- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.
- The SAR evaluations were performed within 24 hours of the system performance check.

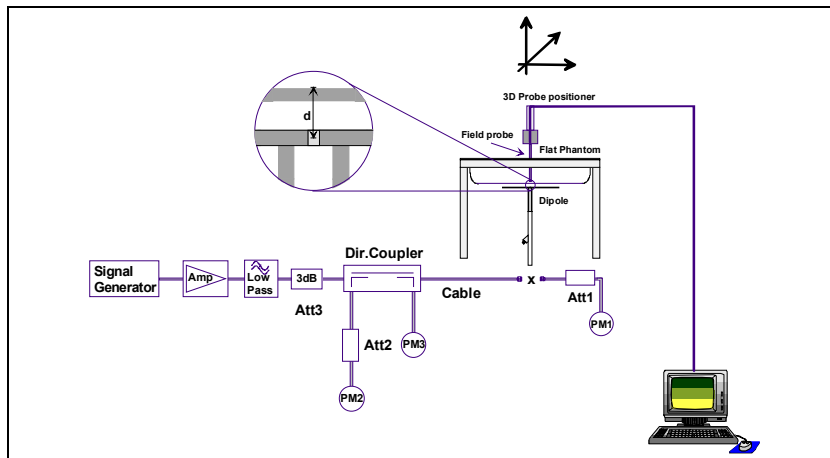


Figure 1. System Performance Check Measurement Setup



835MHz Dipole Setup

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

Table 1. SAR System Manufacturer's Reference Body SAR Values



1900MHz Dipole Setup

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## 8.0 SIMULATED EQUIVALENT TISSUES

The 1880/1900MHz simulated equivalent tissue mixture consisted of Glycol-monobutyl, water, and salt. The 835MHz simulated equivalent tissue mixture consisted of a viscous gel using saline solution. Preservation with a bactericide was added and visual inspection was made to ensure air bubbles were not trapped during the mixing process. The fluids were prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

1880/1900MHz TISSUE MIXTURE		
INGREDIENT	1900 MHz Body	1880 MHz Body
	System Performance Check	DUT Evaluation
Water	69.85 %	69.85 %
Glycol Monobutyl	29.89 %	29.89 %
Salt	0.26 %	0.26 %


835MHz TISSUE MIXTURE		
INGREDIENT	835 MHz Body	835 MHz Body
	System Performance Check	DUT Evaluation
Water	53.79 %	53.79 %
Sugar	45.13 %	45.13 %
Salt	0.98 %	0.98 %
Bactericide	0.10 %	0.10 %

## 9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.


Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.


Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


## 10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1590
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Fiberglass
<b>Thickness</b>	2.0 ±0.1 mm
<b>Volume</b>	Approx. 70 liters


<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


## 11.0 PROBE SPECIFICATION (ET3DV6)


<p><b>Construction:</b> Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p><b>Calibration:</b> In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm 8\%</math>)</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.2</math> dB in brain tissue (rotation around probe axis) <math>\pm 0.4</math> dB in brain tissue (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB</p> <p><b>Surface Detect:</b> <math>\pm 0.2</math> mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p><b>Dimensions:</b> Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p><b>Application:</b> General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	
<p><b>ET3DV6 E-Field Probe</b></p>	

## 12.0 PLANAR PHANTOM

<p>The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix G for dimensions and specifications of the planar phantom).</p>	
<p><b>Planar Phantom</b></p>	

## 13.0 DEVICE HOLDER


<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices such as Laptop and Tablet PCs, a Plexiglas platform is attached to the device holder.</p>	
<p><b>Device Holder</b></p>	

<b>Company:</b> Itronix Corporation	<b>FCC ID:</b> KBCIX325-AC860IWL	<b>IC ID:</b> 1943A-IX325g	
<b>Model:</b> IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 13 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

## 14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
USED	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
x	-DAE4	00019	353	15Jun05	15Jun06	15Jun06
	-DAE3	00018	370	08Feb06	08Feb07	08Feb07
	-ET3DV6 E-Field Probe	00016	1387	16Mar06	16Mar07	16Mar07
x	-ET3DV6 E-Field Probe	00017	1590	20May05	20May06	20May06
	-EX3DV4 E-Field Probe	00125	3547	14Feb06	14Feb07	14Feb07
	-300MHz Validation Dipole	00023	135	25Oct05	25Oct06	25Oct06
	-450MHz Validation Dipole	00024	136	25Oct05	25Oct06	25Oct06
	-835MHz Validation Dipole	00022	411	Brain	28Mar06	28Mar07
x				Body	27Mar06	27Mar07
	-900MHz Validation Dipole	00020	054	Brain	10Jun05	10Jun06
				Body	10Jun05	10Jun06
	-1800MHz Validation Dipole	00021	247	Brain	14Jun05	14Jun06
				Body	14Jun05	14Jun06
	-1900MHz Validation Dipole	00032	151	Brain	17Jun05	17Jun06
x				Body	25Apr06	25Apr07
	-2450MHz Validation Dipole	00025	150	Brain	20Sep05	20Sep06
				Body	24Apr06	24Apr07
	-5800MHz Validation Dipole	00126	1031	Brain	15Mar06	15Mar07
	-SAM Phantom V4.0C	00154	1033	N/A	N/A	N/A
x	-Barski Planar Phantom	00155	03-01	N/A	N/A	N/A
	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A	N/A
	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A	N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A	N/A
x	Gigatronics 8652A Power Meter	00110	1835801	12Apr06	12Apr07	12Apr07
	Gigatronics 8652A Power Meter	00007	1835272	03Feb06	03Feb07	03Feb07
	Gigatronics 80701A Power Sensor	00011	1833542	03Feb06	03Feb07	03Feb07
x	Gigatronics 80701A Power Sensor	00012	1834350	12Sep05	12Sep06	12Sep06
x	Gigatronics 80701A Power Sensor	00013	1833713	03Feb06	03Feb07	03Feb07
	Gigatronics 80701A Power Sensor	00014	1833699	07Sep05	07Sep06	07Sep06
x	HP 8753ET Network Analyzer	00134	US39170292	18Apr06	18Apr07	18Apr07
x	HP 8648D Signal Generator	00005	3847A00611	N/A	N/A	N/A
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	06Apr06	06Apr07	06Apr07
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A	N/A	N/A


Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## 15.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	5.5	Normal	1	1	5.5	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
<b>Combined Standard Uncertainty</b>					<b>10.58</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>21.16</b>	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 58


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	5.5	Normal	1	1	5.5	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
<b>Combined Standard Uncertainty</b>					<b>8.79</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>17.57</b>	


Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])




	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


## 16.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] Schmid & Partner Engineering AG - "DASY4 Manual", V4.5 March 2005.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX A - SAR MEASUREMENT DATA**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 58

Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093
			IC RSS-102 Issue 2

Date Tested: 05/02/2006

**Body SAR - Cellular Band - GPRS Mode - 836.6 MHz - Bottom Side of DUT - Antenna “Closed 180°”**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 22.4 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 31.82 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: Cellular GPRS (2 Time Slots)
- Frequency: 836.6 MHz; Channel 190; Duty Cycle: 1:4.16
- Medium: M835 ( $\sigma = 0.95$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>)
- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 190 - 836.6 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm


**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 190 - 836.6 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 19.6 V/m; Power Drift = 0.0131 dB  
 Peak SAR (extrapolated) = 0.453 W/kg  
**SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.228 mW/g**

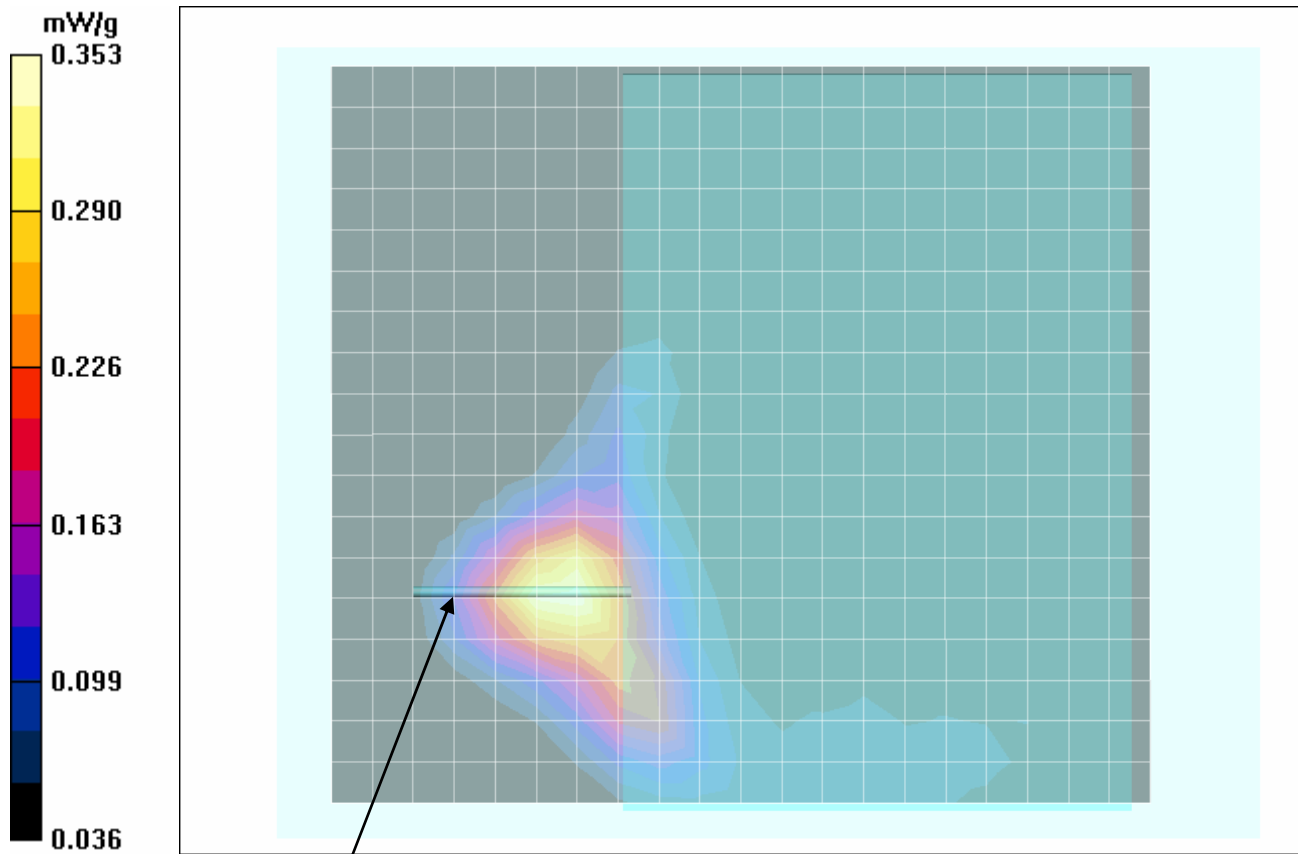


AirCard 860 Antenna “Closed 180°”

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**Z-Axis Scan**

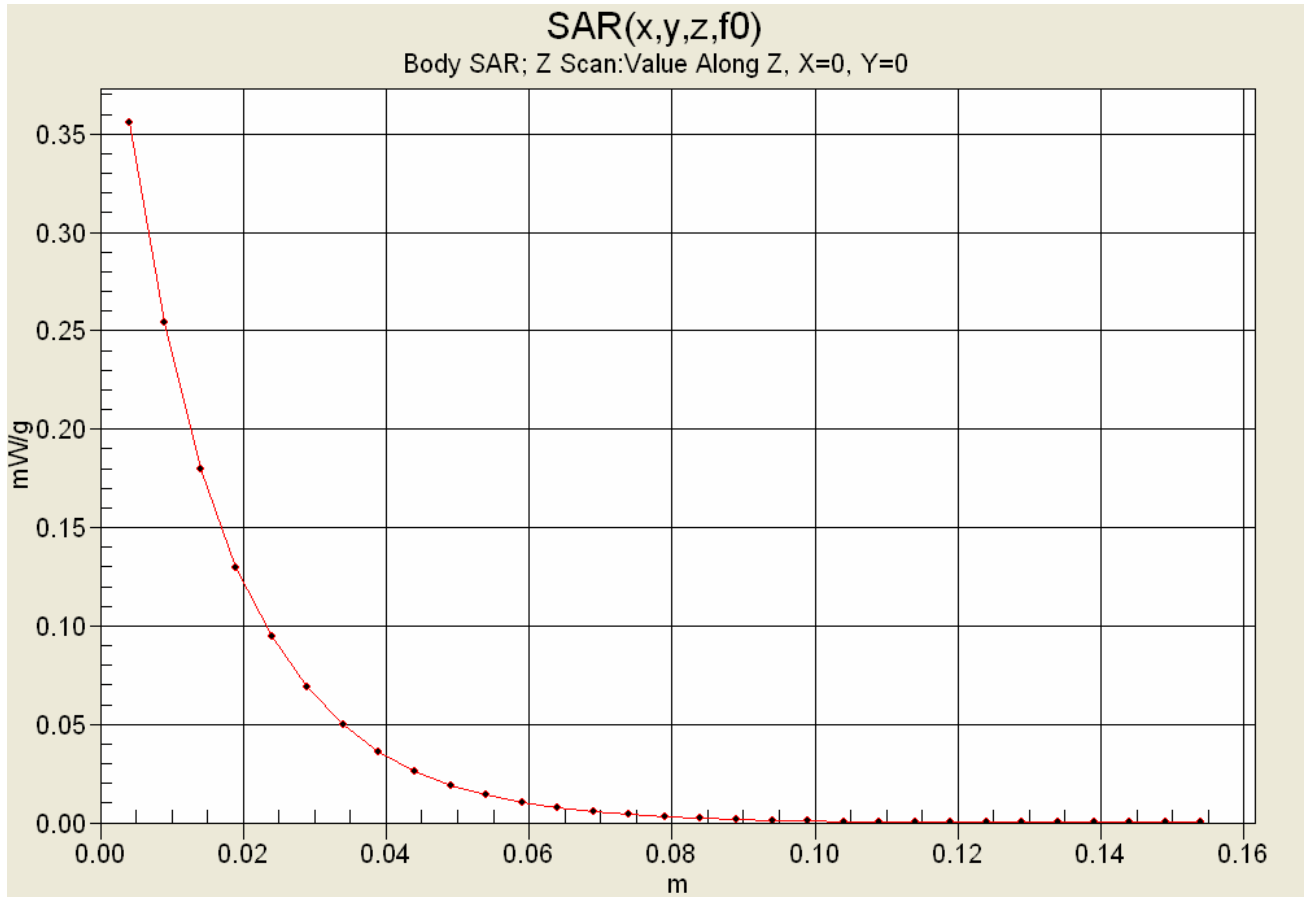

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/02/2006

**Body SAR - Cellular Band - GPRS Mode - 836.6 MHz - Bottom Side of DUT - Antenna “Open 180°”**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 22.4 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 31.82 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: Cellular GPRS (2 Time Slots)
- Frequency: 836.6 MHz; Channel 190; Duty Cycle: 1:4.16
- Medium: M835 ( $\sigma = 0.95$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>)
- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 180 - Channel 190 - 836.6 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 180 - Channel 190 - 836.6 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 8.16 V/m; Power Drift = -0.0280 dB  
 Peak SAR (extrapolated) = 0.075 W/kg  
**SAR(1 g) = 0.0569 mW/g; SAR(10 g) = 0.041 mW/g**

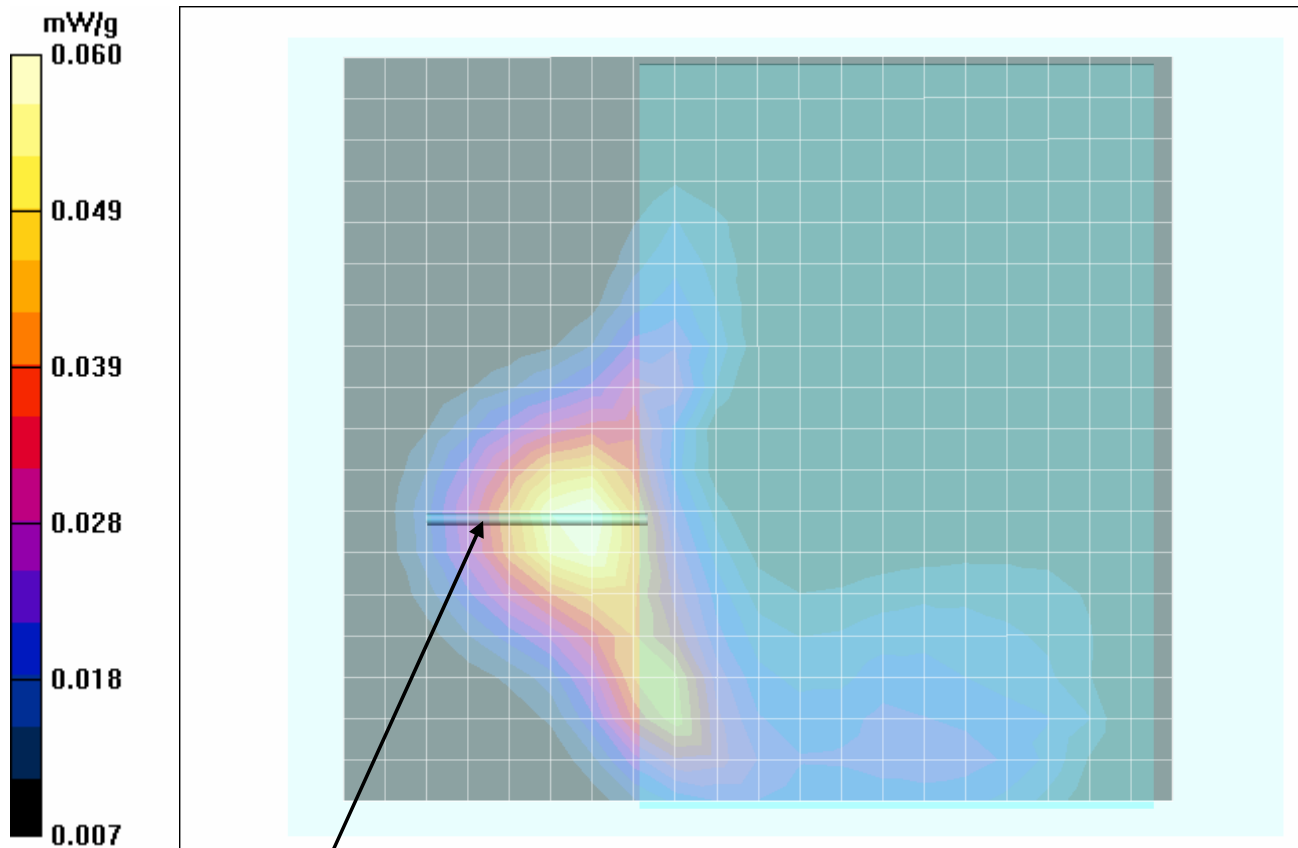

AirCard 860 Antenna “Open 180°”

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 58

Date Tested: 05/02/2006

**Body SAR - Cellular Band - GPRS Mode - 836.6 MHz - Bottom Side of DUT - Antenna "Open 90°"**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**


Ambient Temp: 22.4 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%

- RF Output Power: 31.82 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: Cellular GPRS (2 Time Slots)
- Frequency: 836.6 MHz; Channel 190; Duty Cycle: 1:4.16
- Medium: M835 ( $\sigma = 0.95$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>)
- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 90 - Channel 190 - 836.6 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - Cellular GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 90 - Channel 190 - 836.6 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.94 V/m; Power Drift = -0.0955 dB  
 Peak SAR (extrapolated) = 0.029 W/kg  
**SAR(1 g) = 0.0207 mW/g; SAR(10 g) = 0.015 mW/g**

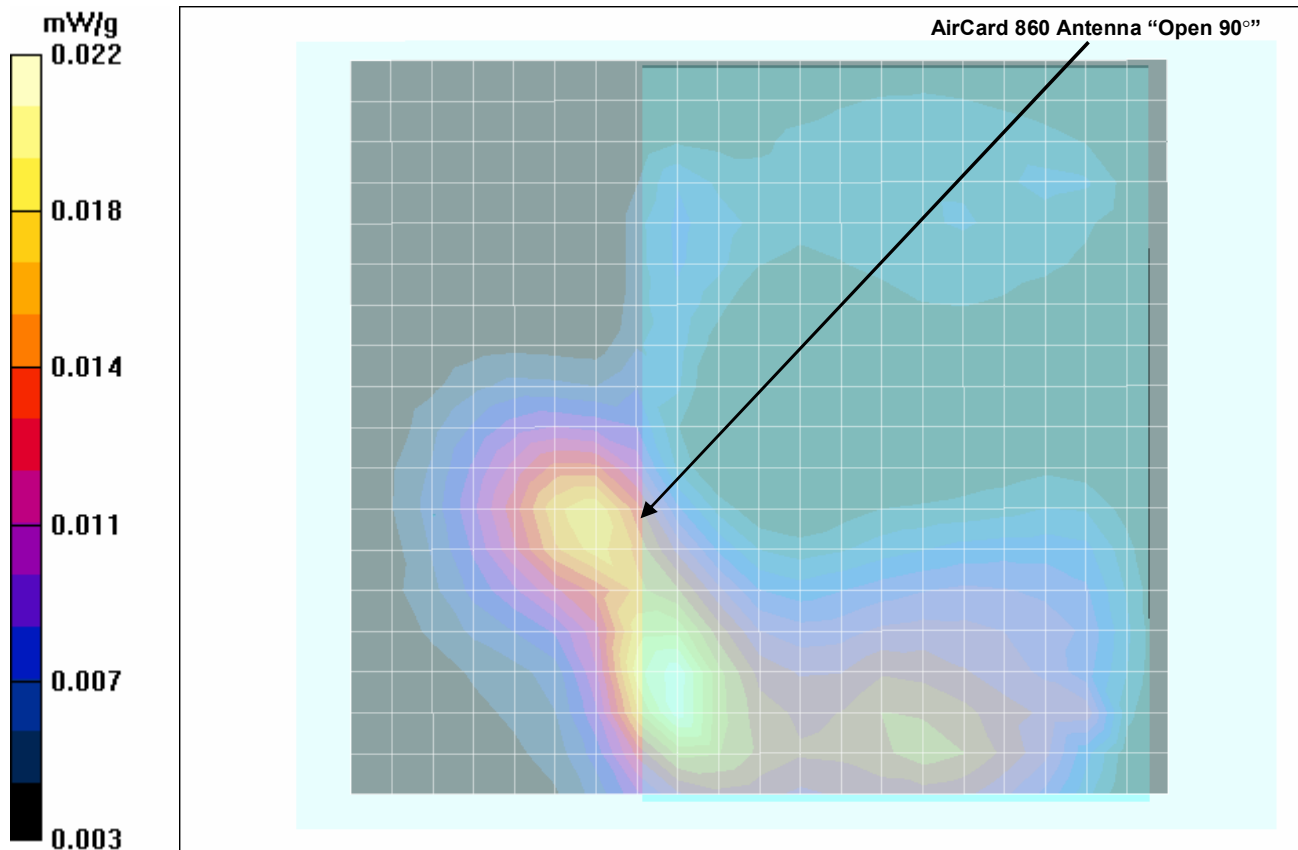

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/03/2006

**Body SAR - Cellular Band - EDGE Mode - 836.6 MHz - Bottom Side of DUT - Antenna “Closed 180°”**

**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 22.5 °C; Fluid Temp: 22.0 °C; Barometric Pressure: 102.9 kPa; Humidity: 30%

RF Output Power: 26.91 dBm (Conducted)

11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)

Communication System: Cellular EDGE (2 Time Slots)

Frequency: 836.6 MHz; Channel 190; Duty Cycle: 1:4.16

Medium: M835 ( $\sigma = 0.97$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 15/06/2005

- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


**Body SAR - Cellular EDGE - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 190 - 836.6 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - Cellular EDGE - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 190 - 836.6 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 10.2 V/m; Power Drift = 0.0106 dB


Peak SAR (extrapolated) = 0.124 W/kg

**SAR(1 g) = 0.0919 mW/g; SAR(10 g) = 0.064 mW/g**

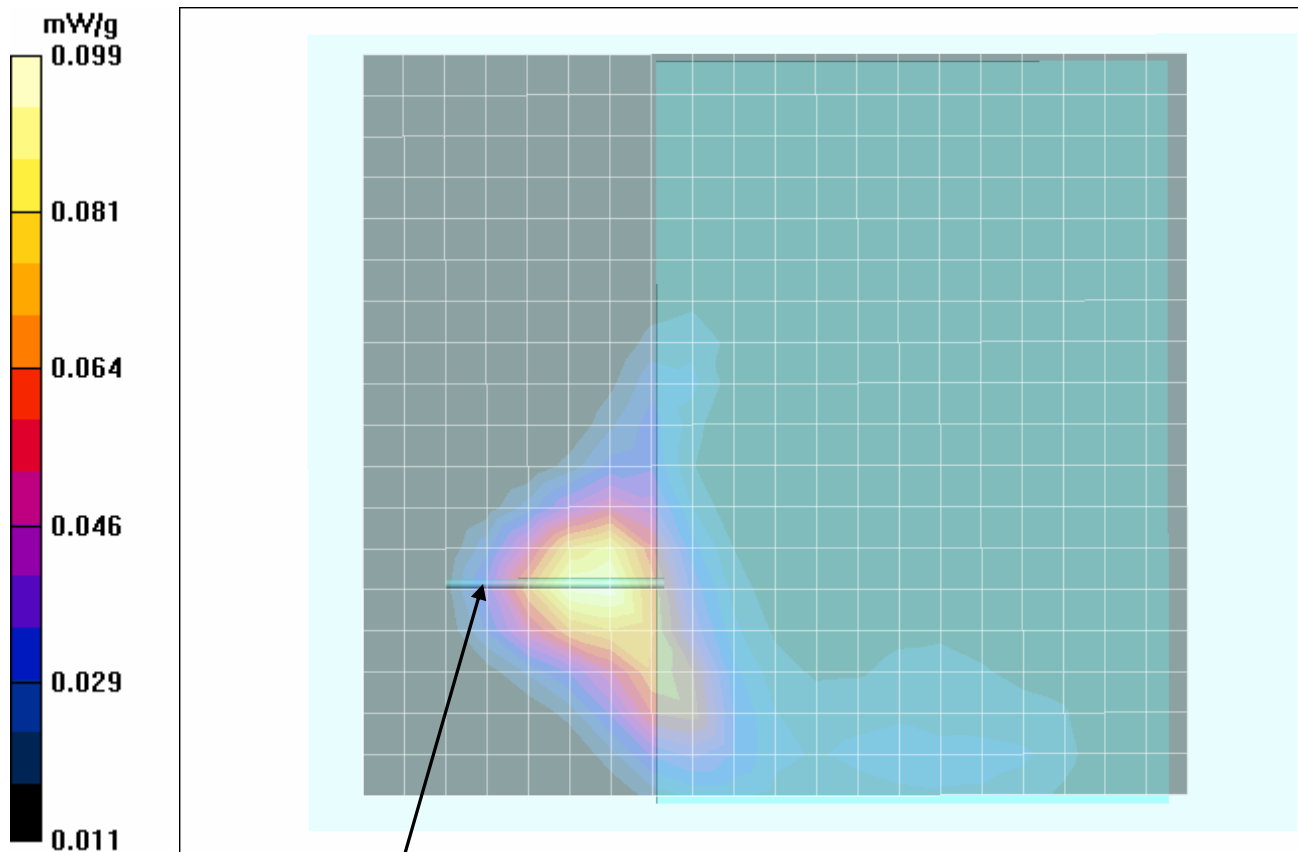


AirCard 860 Antenna “Closed 180°”


Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

### Z-Axis Scan

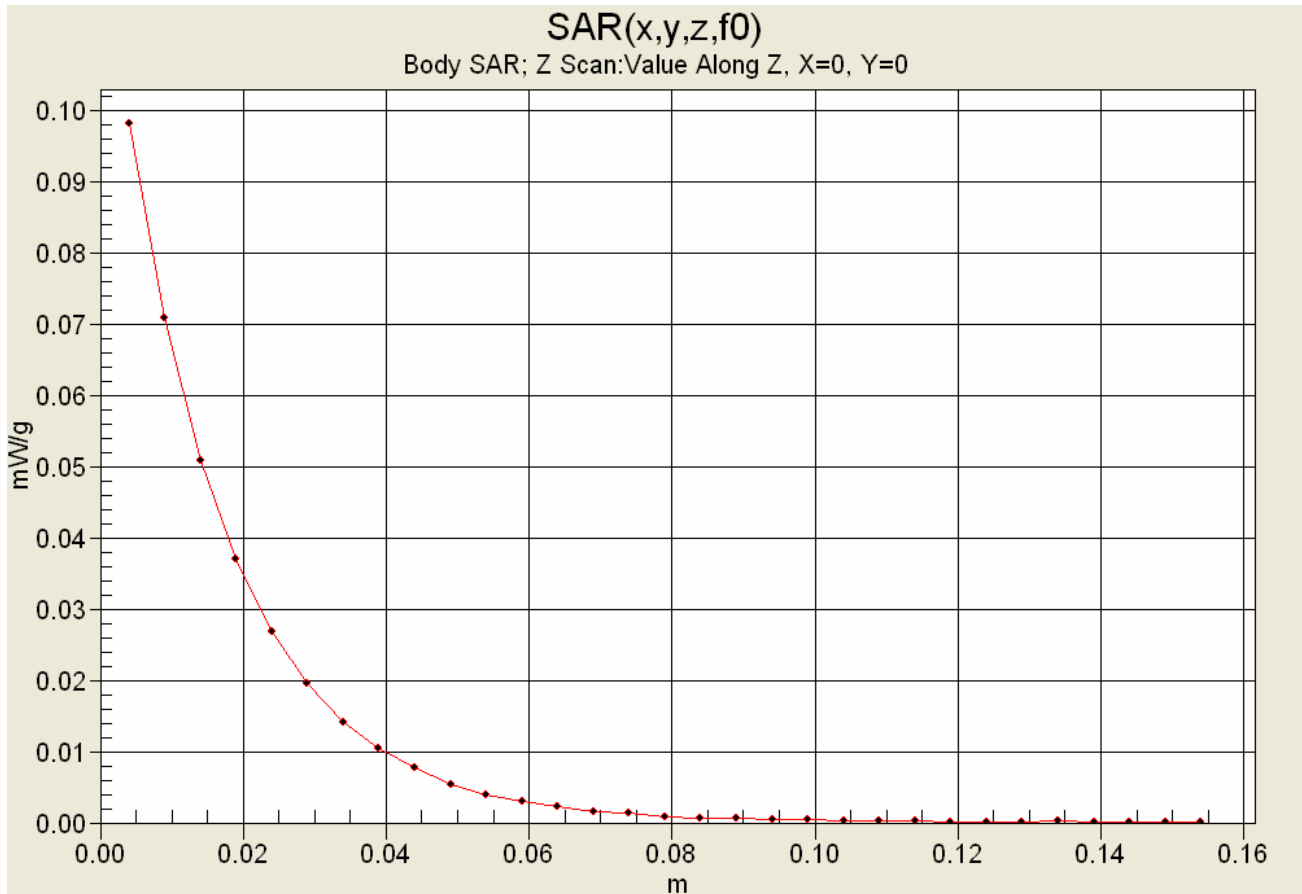



	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/11/2006

**Body SAR - Cellular Band - UMTS Mode - 836.4 MHz - Bottom Side of DUT - Antenna “Closed 180°”**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 23.2 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%


RF Output Power: 23.90 dBm (Conducted)  
 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)  
 Communication System: Cellular UMTS (WCDMA)  
 Frequency: 836.4 MHz; Channel 4182; Duty Cycle: 1:1  
 Medium: M835 ( $\sigma = 0.95$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>)  
 - Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005  
 - Sensor-Surface: 4mm (Mechanical Surface Detection)  
 - Electronics: DAE4 Sn353; Calibrated: 15/06/2005  
 - Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01  
 - Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171


**Body SAR - Cellular UMTS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 4182 - 836.4 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - Cellular UMTS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 4182 - 836.4 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 16.8 V/m; Power Drift = 0.009 dB  
 Peak SAR (extrapolated) = 0.340 W/kg  
**SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.173 mW/g**

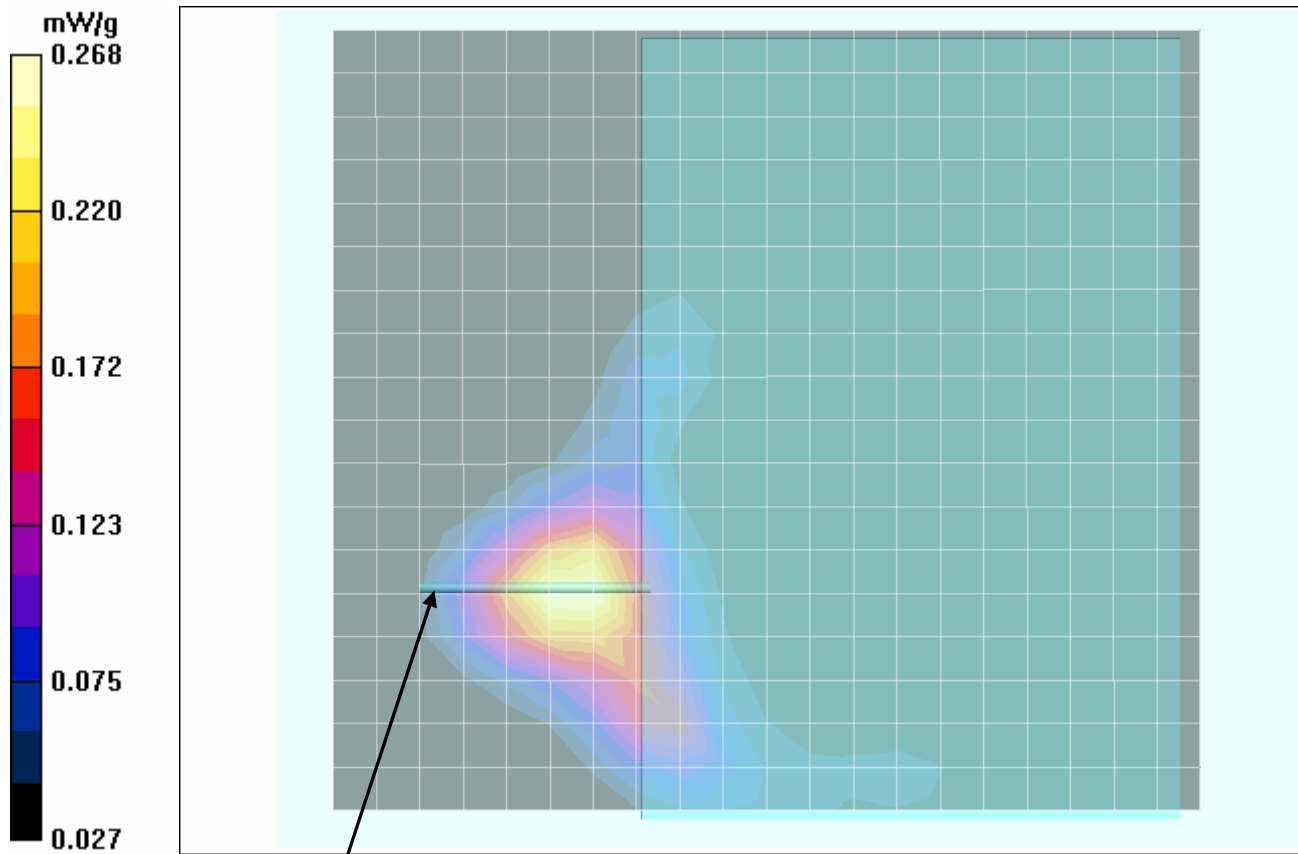



**AirCard 860 Antenna “Closed 180°”**


<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## Z-Axis Scan

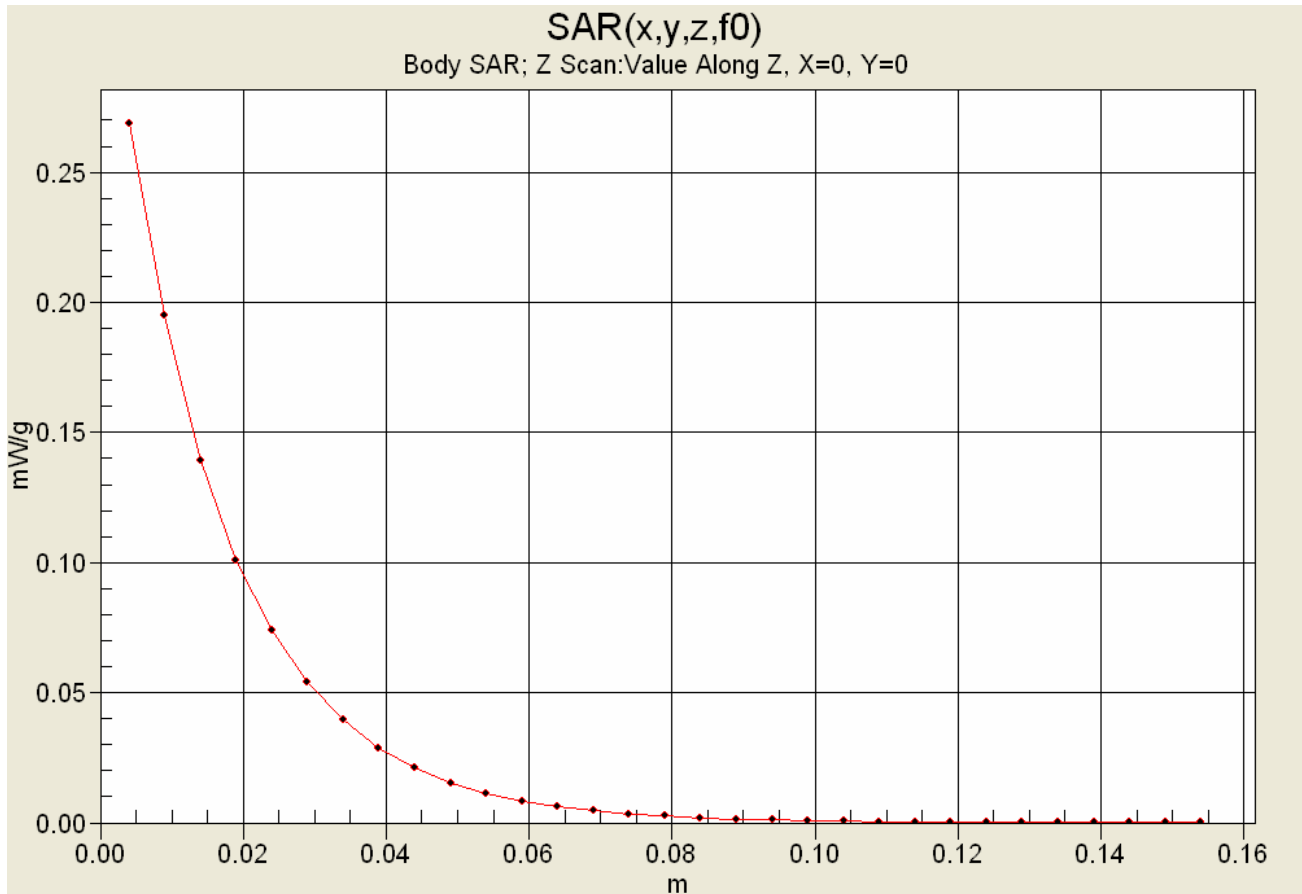

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/04/2006

**Body SAR - PCS Band - GPRS Mode - 1880.0 MHz - Bottom Side of DUT - Antenna “Closed 180°”**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 24.0 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 28.71 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: PCS GPRS (2 Time Slots)
- Frequency: 1880.0 MHz; Channel 661; Duty Cycle: 1:4.16
- Medium: M1900 ( $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)
- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 661 - 1880 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 661 - 1880 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 20.2 V/m; Power Drift = -0.135 dB  
Peak SAR (extrapolated) = 1.25 W/kg  
**SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.364 mW/g**

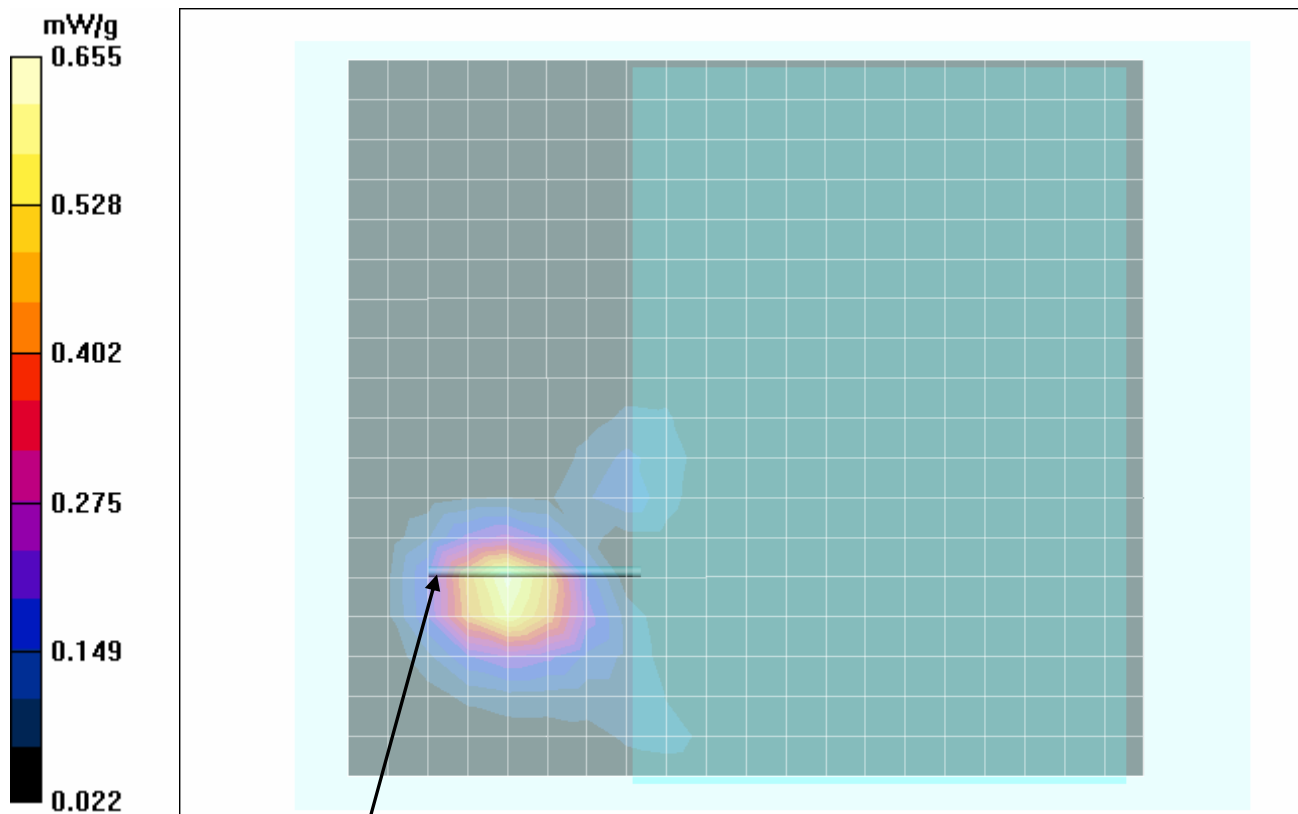



AirCard 860 Antenna “Closed 180°”

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

**Z-Axis Scan**

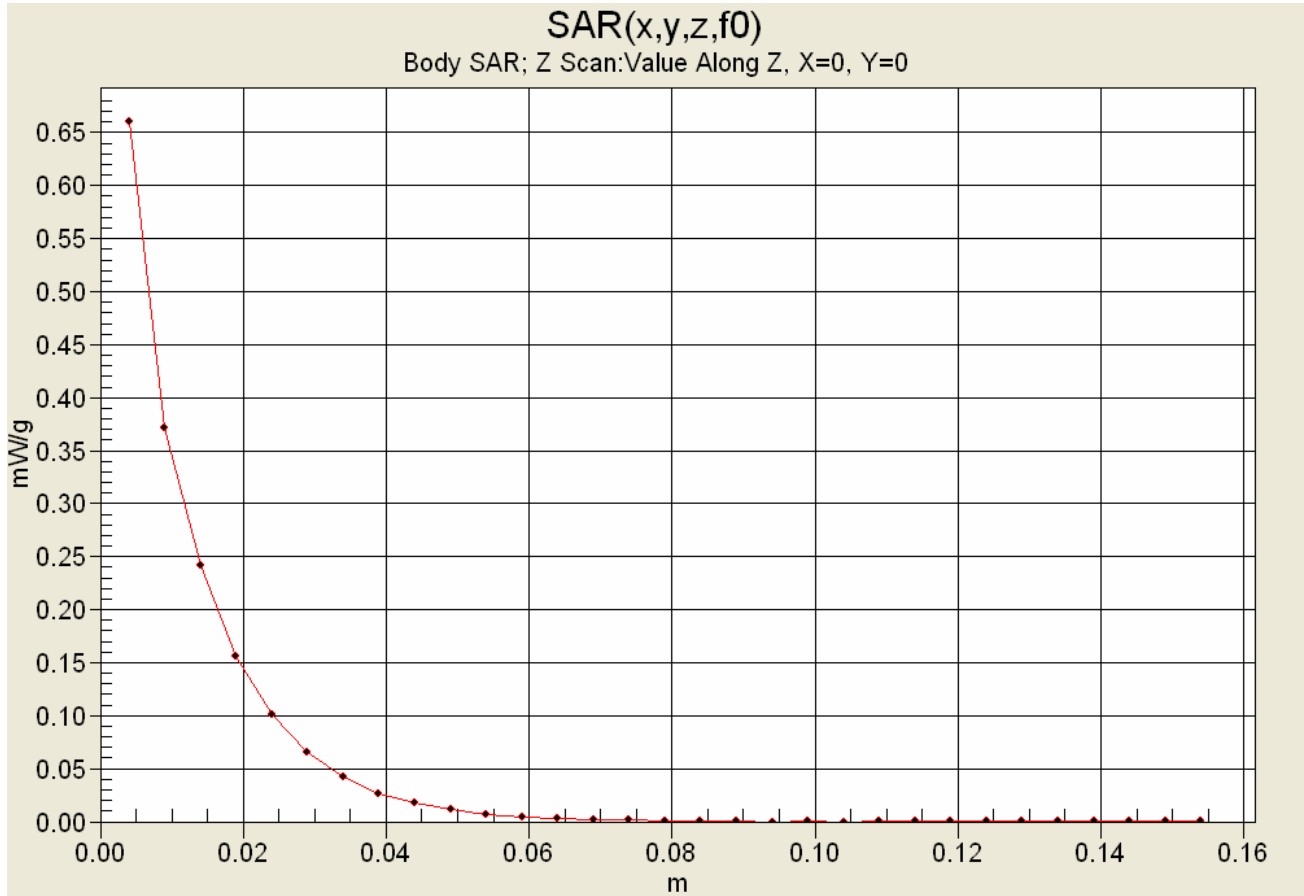

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/04/2006

**Body SAR - PCS Band - GPRS Mode - 1880.0 MHz - Bottom Side of DUT - Antenna “Open 180°”**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 24.0 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 28.71 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: PCS GPRS (2 Time Slots)
- Frequency: 1880.0 MHz; Channel 661; Duty Cycle: 1:4.16
- Medium: M1900 ( $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 51.5$ ;  $\rho = 1000 \text{ kg/m}^3$ )
- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 180 - Channel 661 - 1880 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 180 - Channel 661 - 1880 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.42 V/m; Power Drift = 0.039 dB  
Peak SAR (extrapolated) = 0.119 W/kg  
**SAR(1 g) = 0.0626 mW/g; SAR(10 g) = 0.040 mW/g**

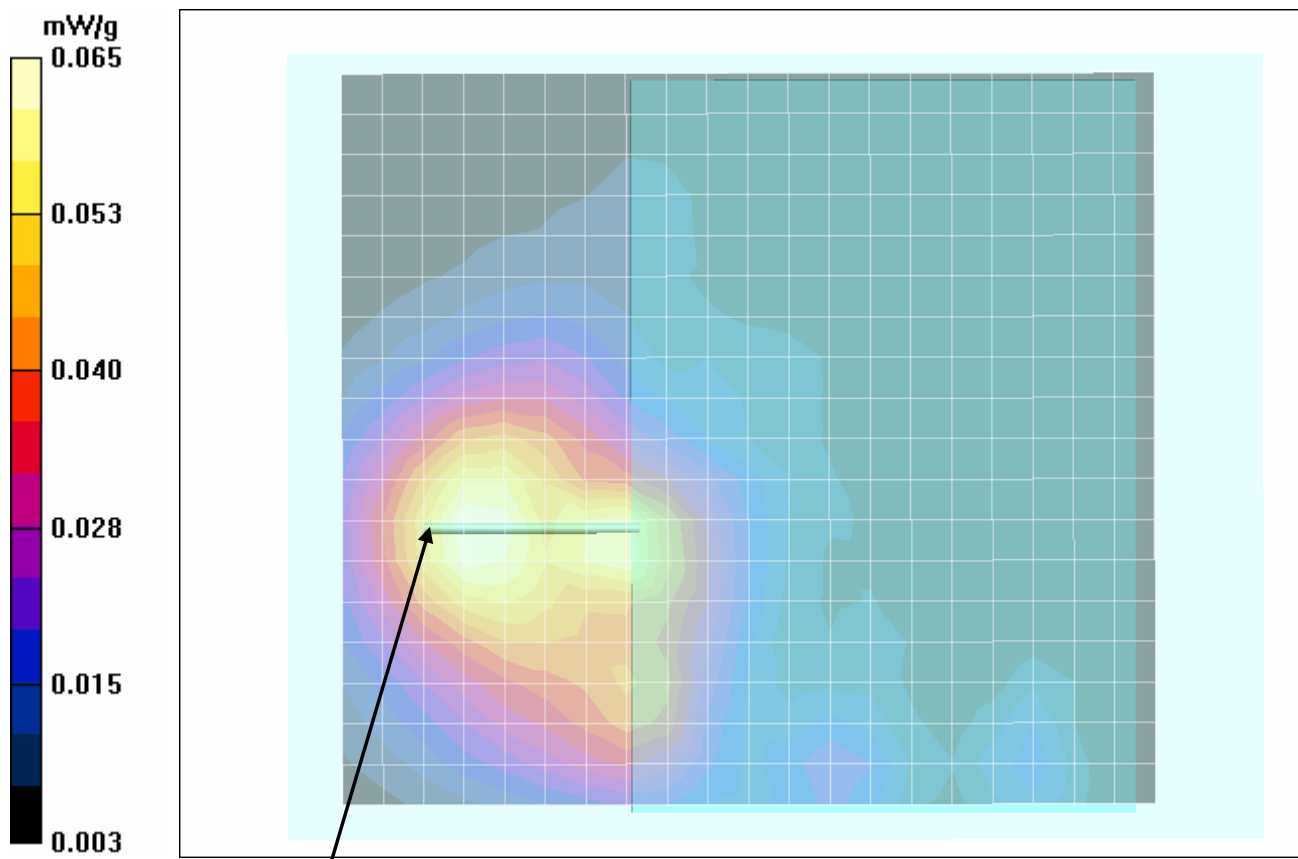

AirCard 860 Antenna “Open 180°”

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 05/04/2006

**Body SAR - PCS Band - GPRS Mode - 1880.0 MHz - Bottom Side of DUT - Antenna "Open 90°"**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**


Ambient Temp: 24.0 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 28.71 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: PCS GPRS (2 Time Slots)
- Frequency: 1880.0 MHz; Channel 661; Duty Cycle: 1:4.16
- Medium: M1900 ( $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 51.5$ ;  $\rho = 1000 \text{ kg/m}^3$ )
- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 90 - Channel 661 - 1880 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - PCS GPRS - Bottom Side of DUT Touching Planar Phantom - Antenna Open 90 - Channel 661 - 1880 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.20 V/m; Power Drift = -0.040 dB  
 Peak SAR (extrapolated) = 0.159 W/kg  
**SAR(1 g) = 0.0806 mW/g; SAR(10 g) = 0.047 mW/g**

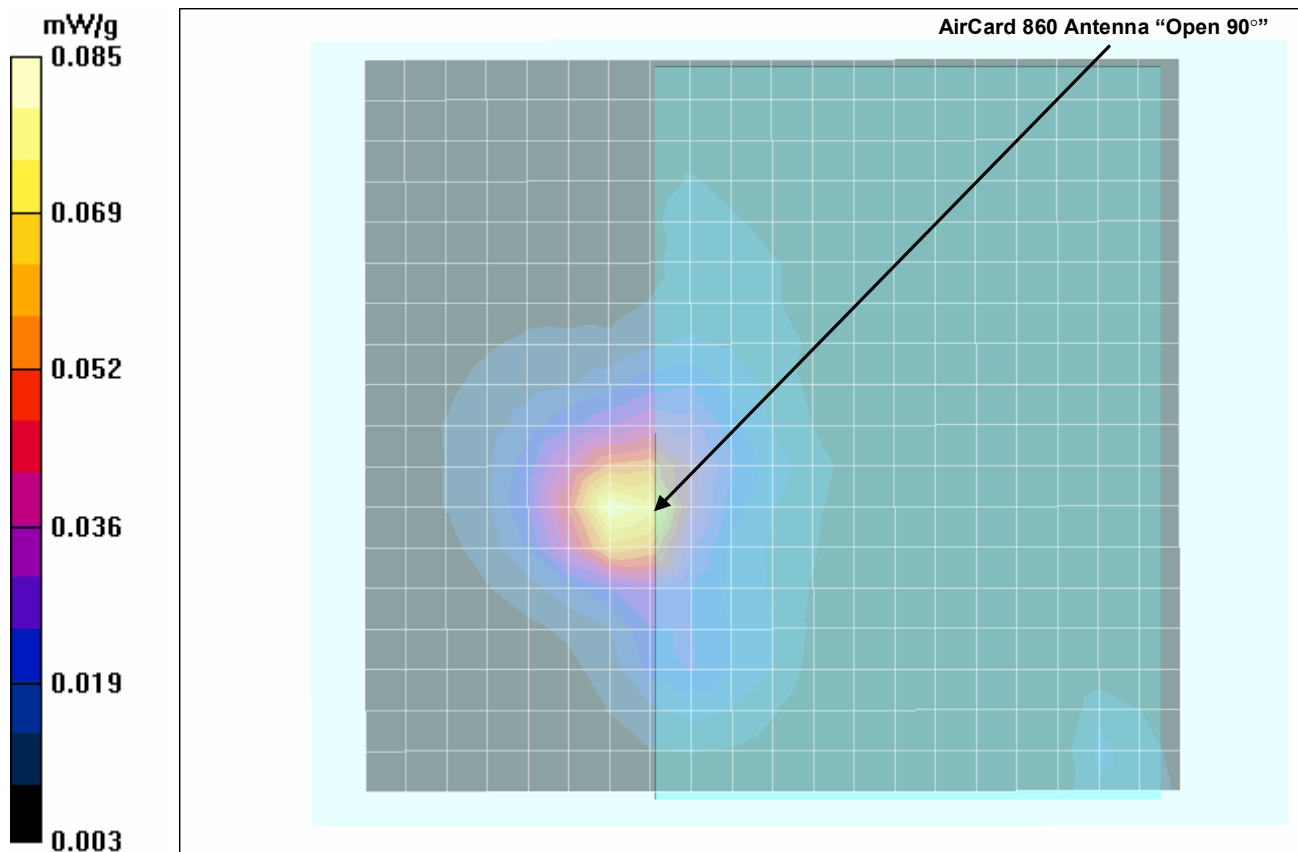

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/04/2006

**Body SAR - PCS Band - EDGE Mode - 1880.0 MHz - Bottom Side of DUT - Antenna "Closed 180°"**


**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 24.0 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%


- RF Output Power: 25.72 dBm (Conducted)
- 11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)
- Communication System: PCS EDGE (2 Time Slots)
- Frequency: 1880.0 MHz; Channel 661; Duty Cycle: 1:4.16
- Medium: M1900 ( $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 51.5$ ;  $\rho = 1000 \text{ kg/m}^3$ )
- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171


**Body SAR - PCS EDGE - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 661 - 1880 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - PCS EDGE - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 661 - 1880 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 14.5 V/m; Power Drift = -0.012 dB  
 Peak SAR (extrapolated) = 0.601 W/kg  
**SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.180 mW/g**

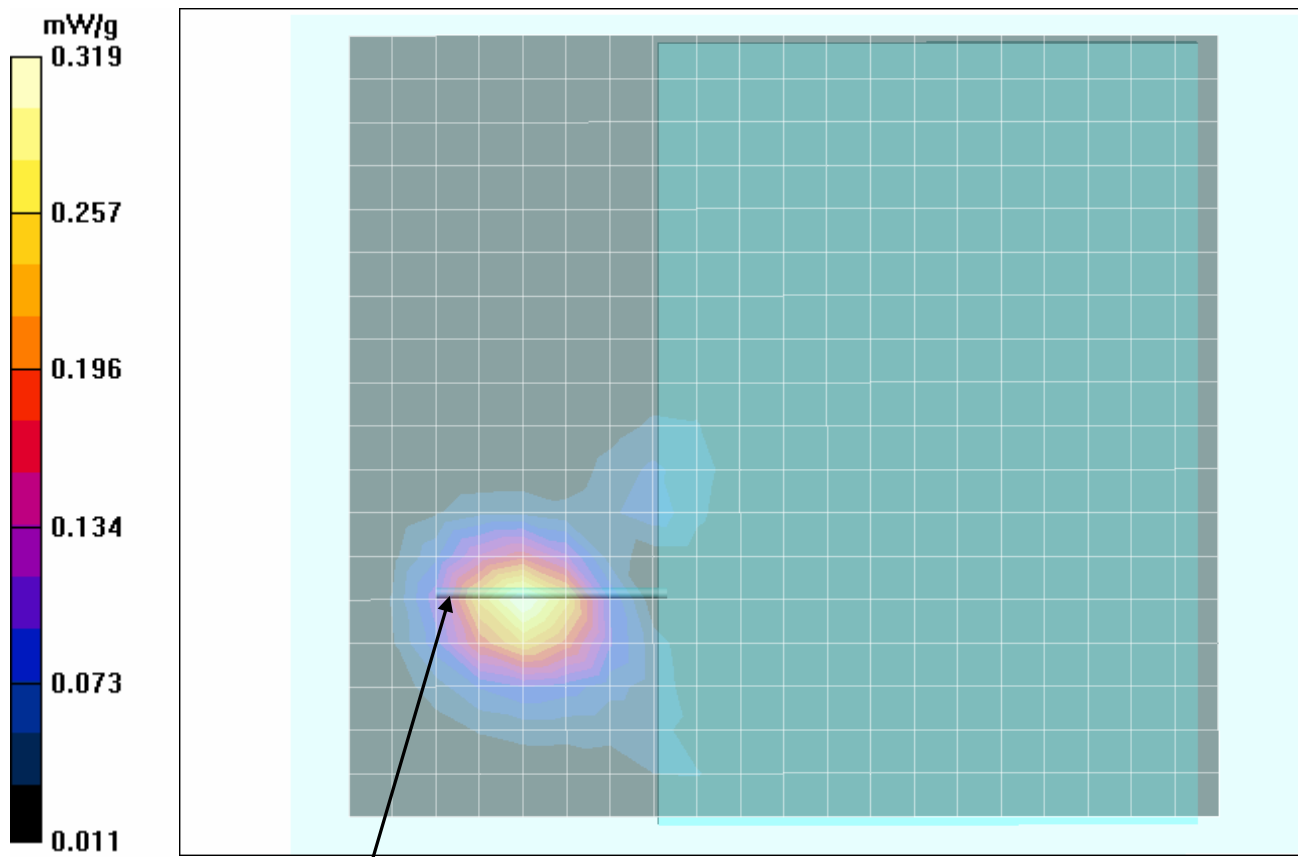

AirCard 860 Antenna "Closed 180°"

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

Date Tested: 05/11/2006

**Body SAR - PCS Band - UMTS Mode - 1880.0 MHz - Bottom Side of DUT - Antenna "Closed 180"**

**DUT: Itronix Model: IX325-AC860IWL; Type: Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS; Serial: ZZGEG5073ZZ9784**

Ambient Temp: 24.3 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.9 kPa; Humidity: 30%

RF Output Power: 23.00 dBm (Conducted)

11.1V, 3600mAh Lithium-ion Battery (Model: T8M-E)

Communication System: PCS UMTS (WCDMA)

Frequency: 1880 MHz; Channel 9400; Duty Cycle: 1:1

Medium: M1880 ( $\sigma = 1.46 \text{ mho/m}$ ;  $\epsilon_r = 51.2$ ;  $\rho = 1000 \text{ kg/m}^3$ )

- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 15/06/2005

- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01

- Measurement SW: DASy4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171


**Body SAR - PCS UMTS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 9400 - 1880 MHz Area Scan (19x21x1):** Measurement grid: dx=15mm, dy=15mm

**Body SAR - PCS UMTS - Bottom Side of DUT Touching Planar Phantom - Antenna Closed 180 - Channel 9400 - 1880 MHz Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 13.5 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.503 W/kg

**SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.148 mW/g**

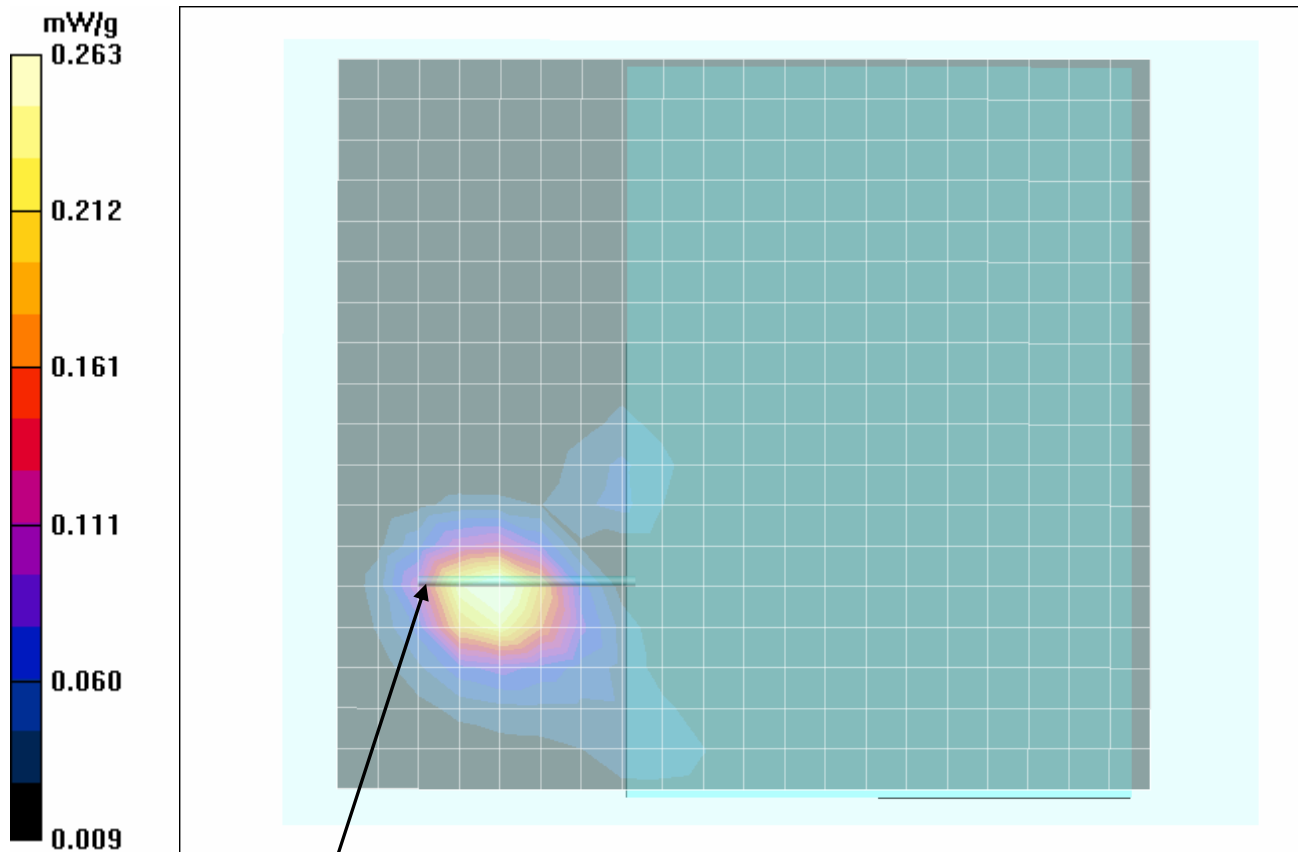



AirCard 860 Antenna "Closed 180"

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 58




### Z-Axis Scan

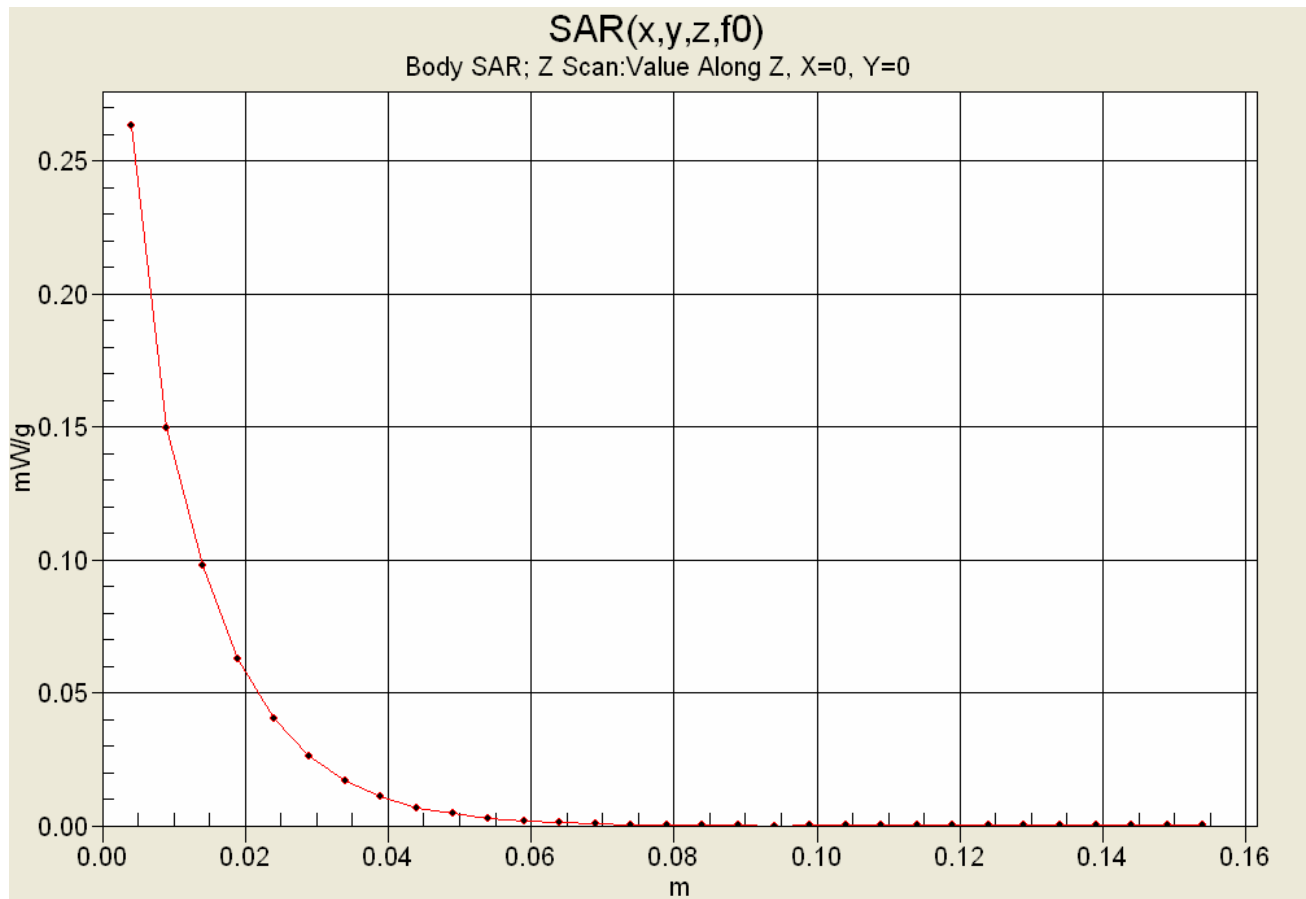

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX B - SYSTEM PERFORMANCE CHECK DATA**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 58

Date Tested: 05/01/2006

### System Performance Check (Body) - 835 MHz Dipole

**DUT: Dipole 835 MHz; Model: D835V2; Type: System Performance Check; Serial: 411; Validation: 03/27/2006**

Ambient Temp: 25.5 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: M835 ( $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 53.0$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


#### 835 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


#### 835 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 53.8 V/m; Power Drift = -0.047 dB  
 Peak SAR (extrapolated) = 3.58 W/kg  
**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.61 mW/g**

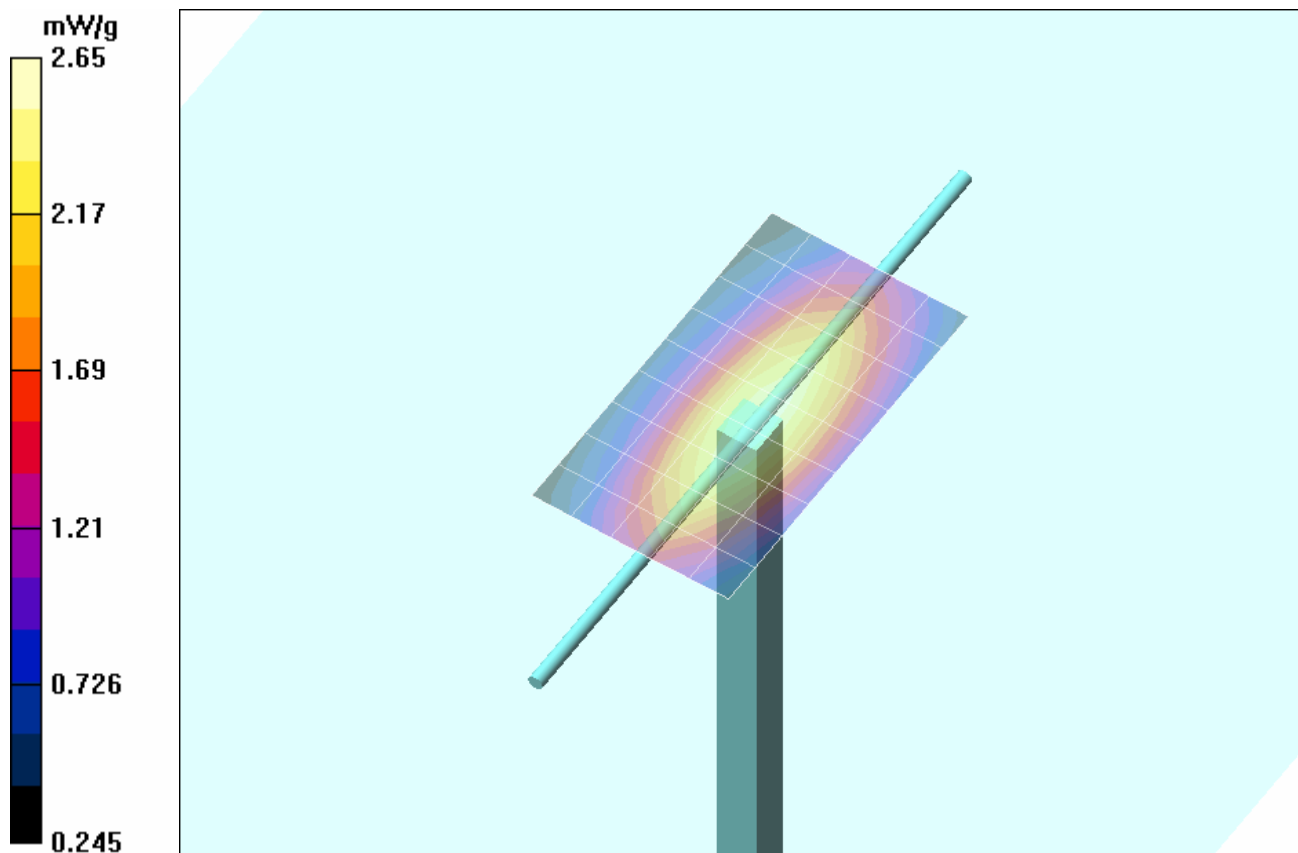


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

## Z-Axis Scan

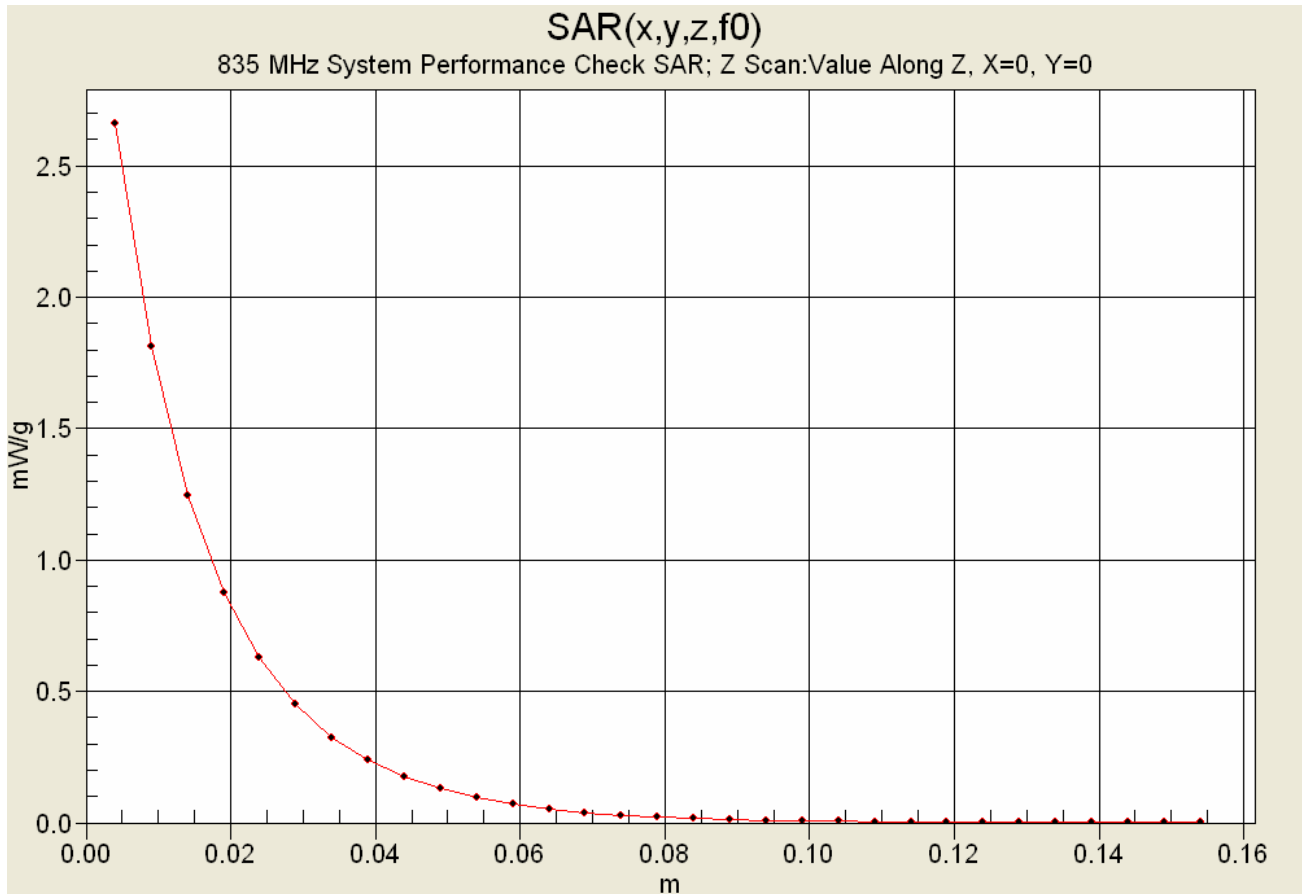

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 05/03/2006

### System Performance Check (Body) - 835 MHz Dipole

**DUT: Dipole 835 MHz; Model: D835V2; Type: System Performance Check; Serial: 411; Validation: 03/27/2006**

Ambient Temp: 22.5 °C; Fluid Temp: 22.0 °C; Barometric Pressure: 102.9 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: M835 ( $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 53.1$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


#### 835 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


#### 835 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 50.8 V/m; Power Drift = -0.068 dB  
 Peak SAR (extrapolated) = 3.24 W/kg  
**SAR(1 g) = 2.24 mW/g; SAR(10 g) = 1.47 mW/g**

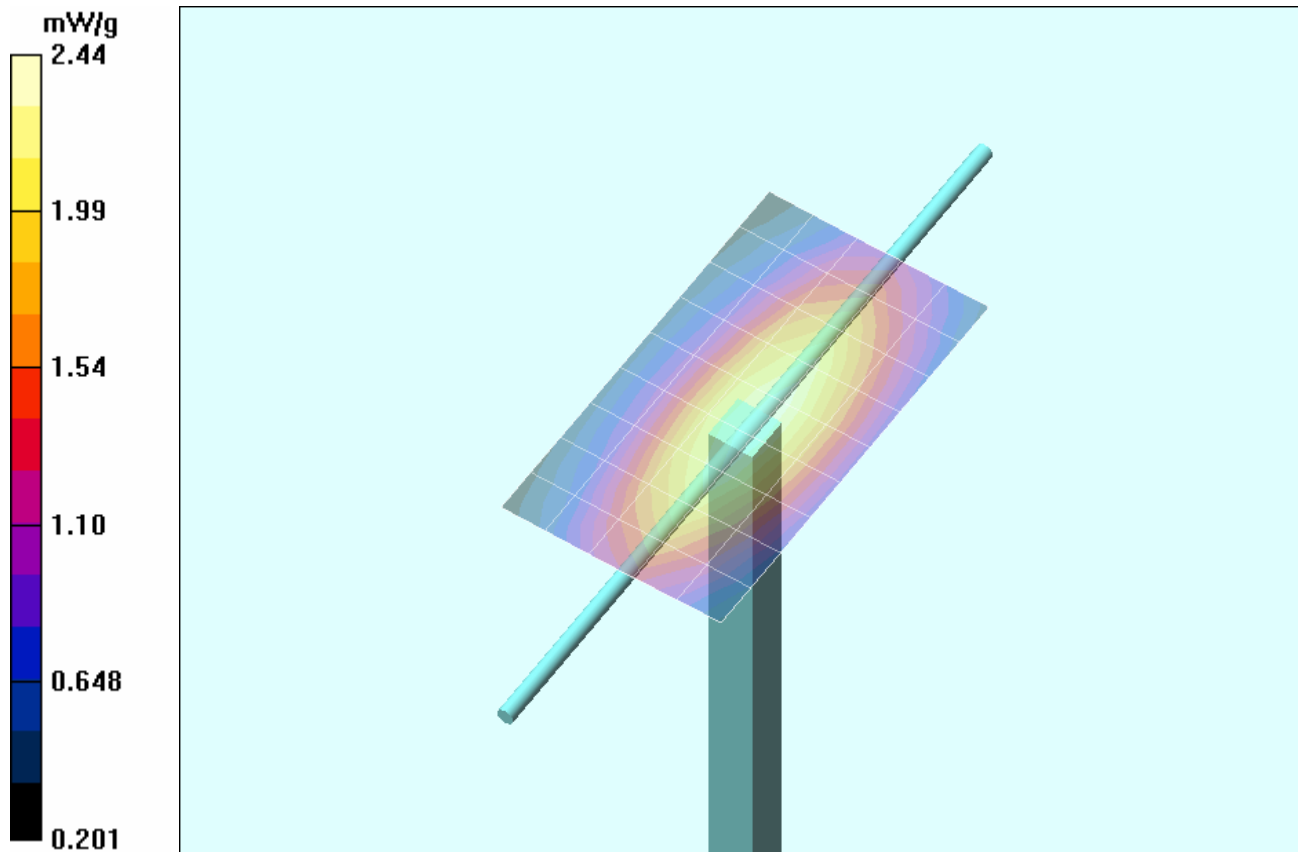

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 58

### Z-Axis Scan

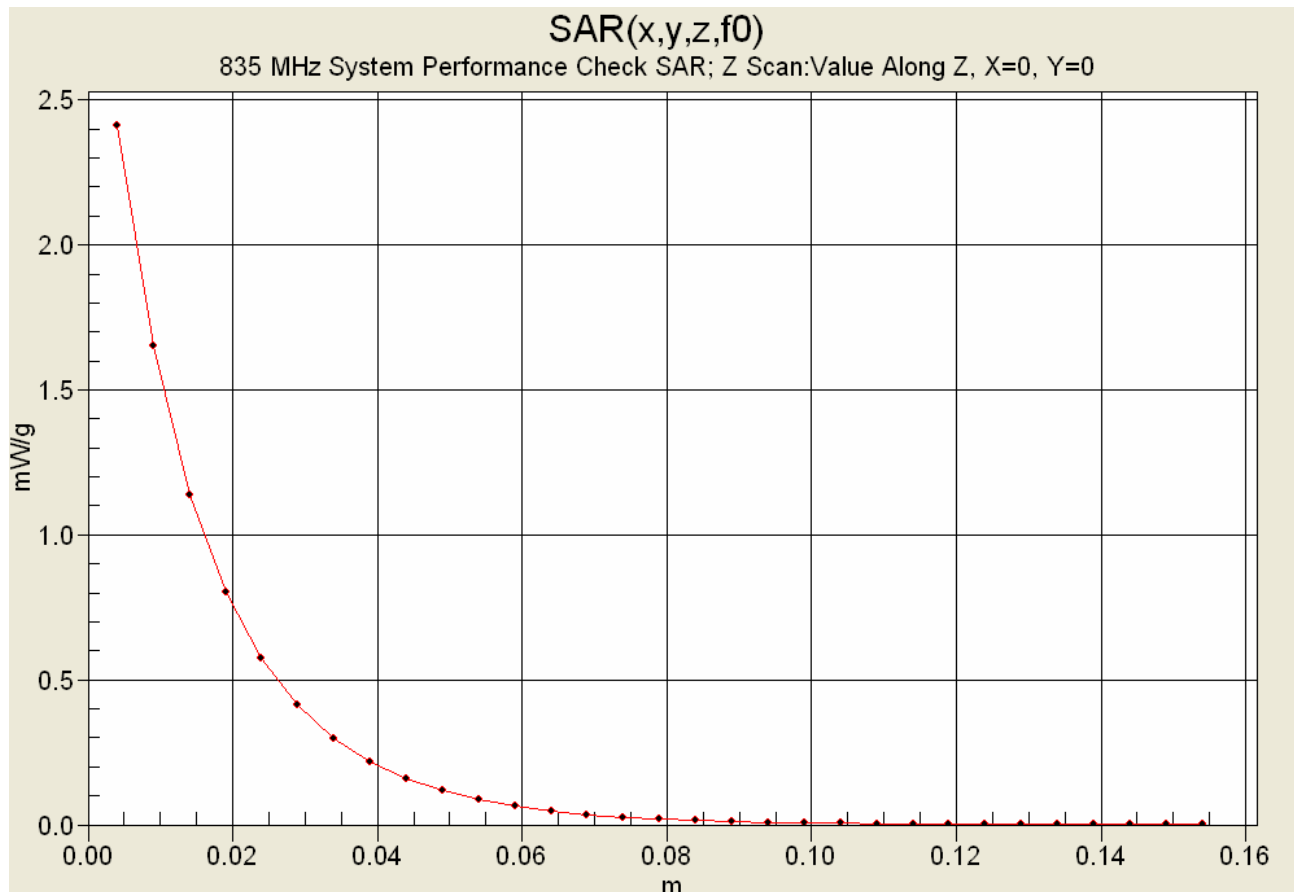

Date Tested: 05/04/2006

### System Performance Check (Body) - 1900 MHz Dipole

**DUT: Dipole 1900 MHz; Model: D1900V2; Type: System Performance Check; Serial: 151; Validation: 04/25/2006**

Ambient Temp: 24.0 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium: M1900 ( $\sigma = 1.56 \text{ mho/m}$ ;  $\epsilon_r = 51.5$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

#### 1900 MHz Dipole - System Performance Check/Area Scan (5x8x1):


Measurement grid: dx=15mm, dy=15mm

#### 1900 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 89.1 V/m; Power Drift = -0.070 dB  
 Peak SAR (extrapolated) = 17.7 W/kg  
**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.42 mW/g**

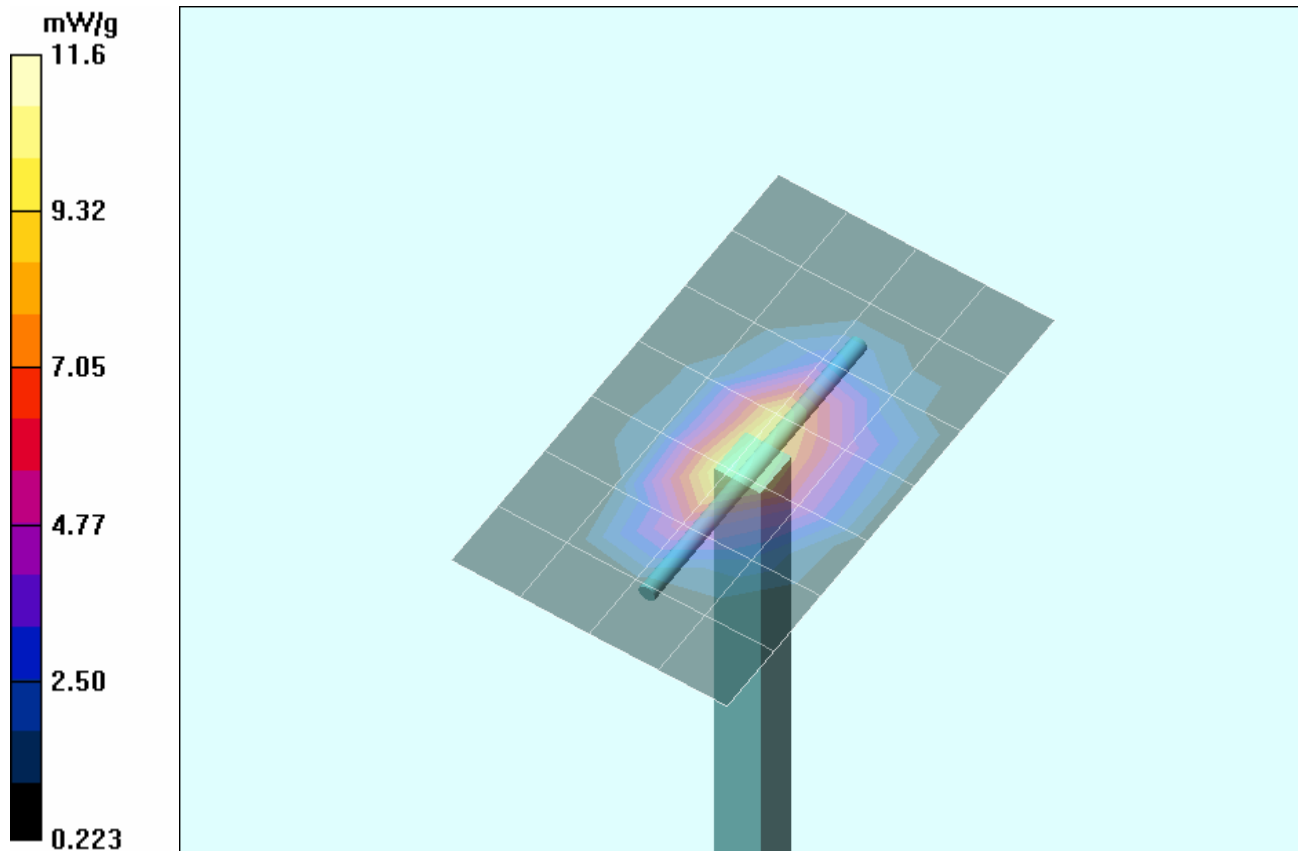

### Z-Axis Scan

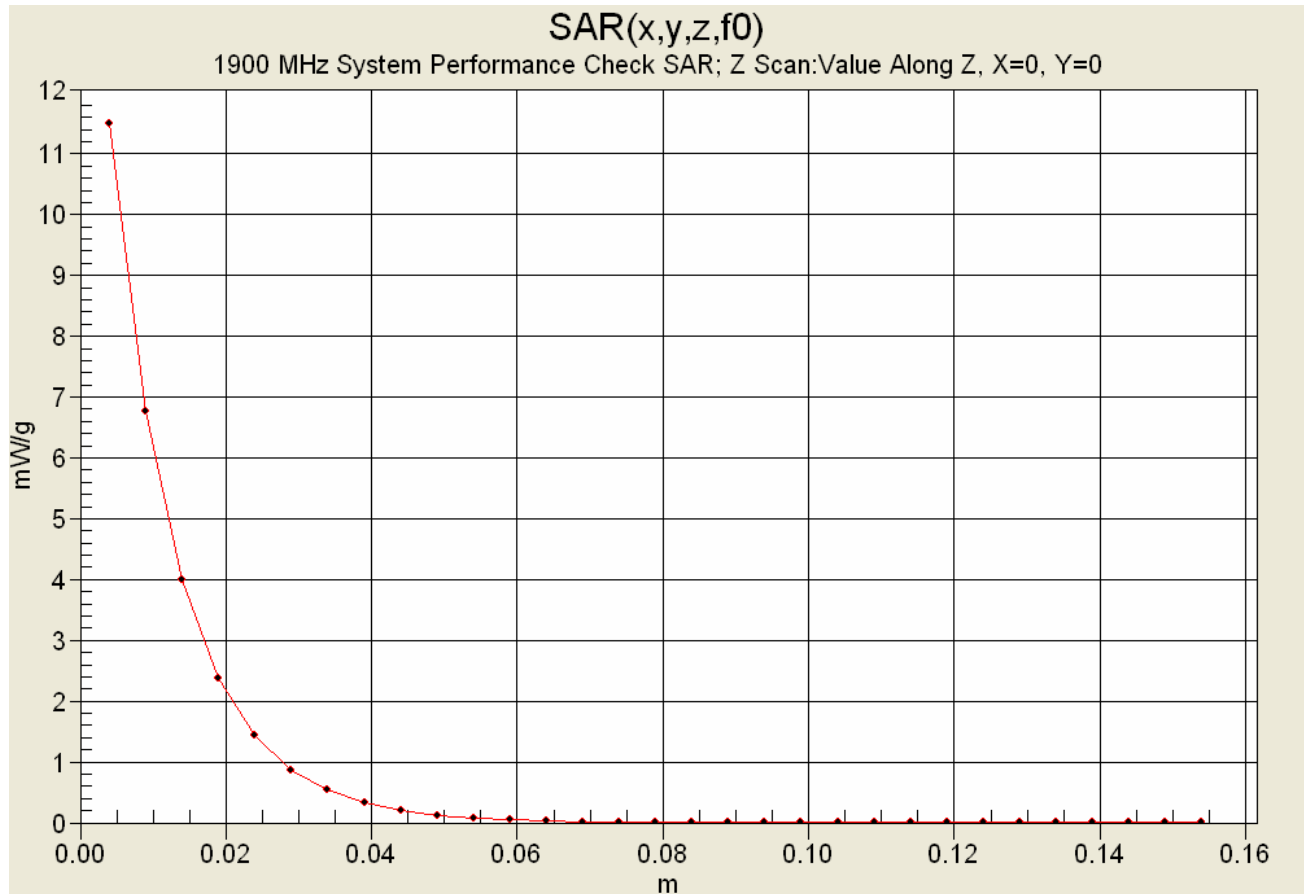



Date Tested: 05/11//2006

### System Performance Check (Body) - 835 MHz Dipole

**DUT: Dipole 835 MHz; Model: D835V2; Type: System Performance Check; Serial: 411; Validation: 03/27/2006**

Ambient Temp: 23.2 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: M835 ( $\sigma = 0.95 \text{ mho/m}$ ;  $\epsilon_r = 52.7$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171


#### 835 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


#### 835 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 53.3 V/m; Power Drift = -0.085 dB  
 Peak SAR (extrapolated) = 3.63 W/kg  
**SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.63 mW/g**

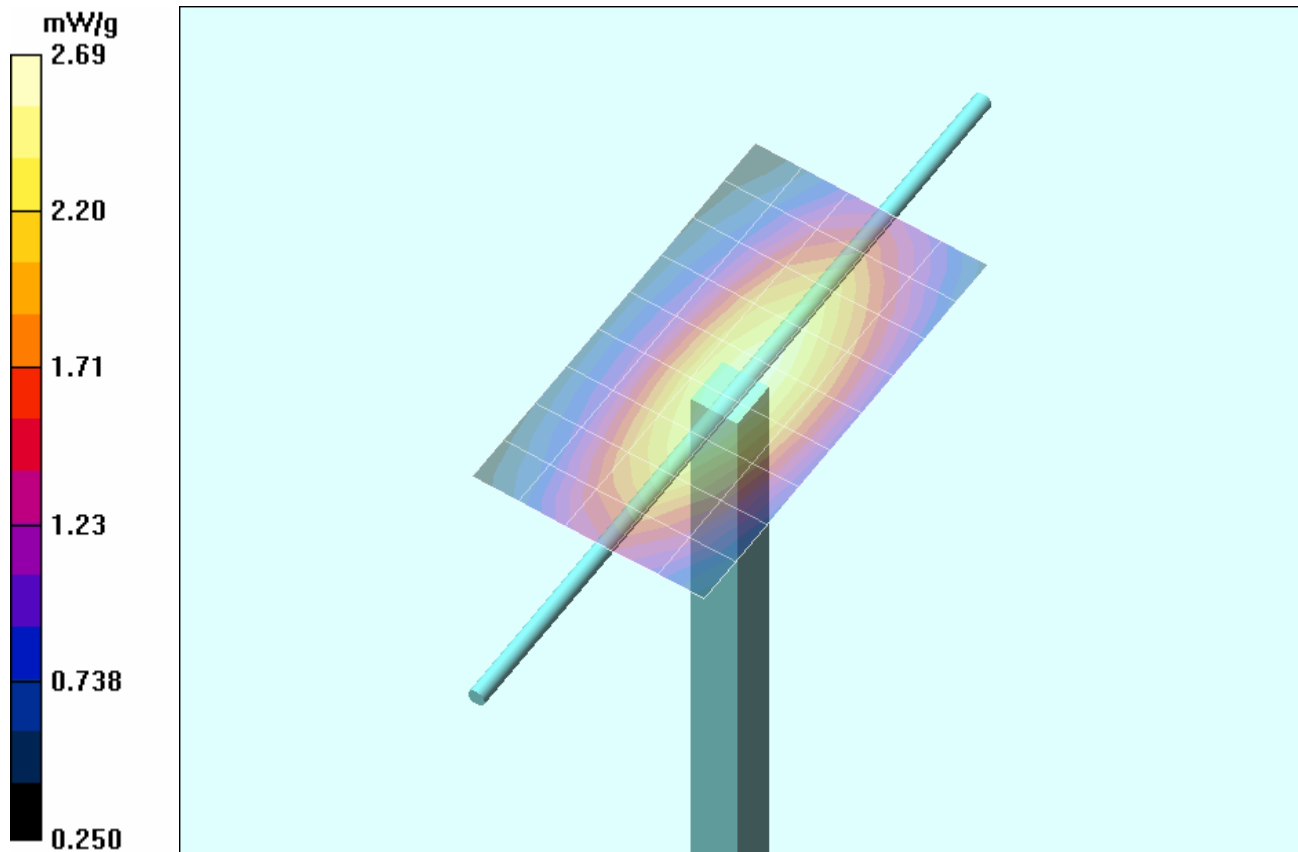

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

**Z-Axis Scan**

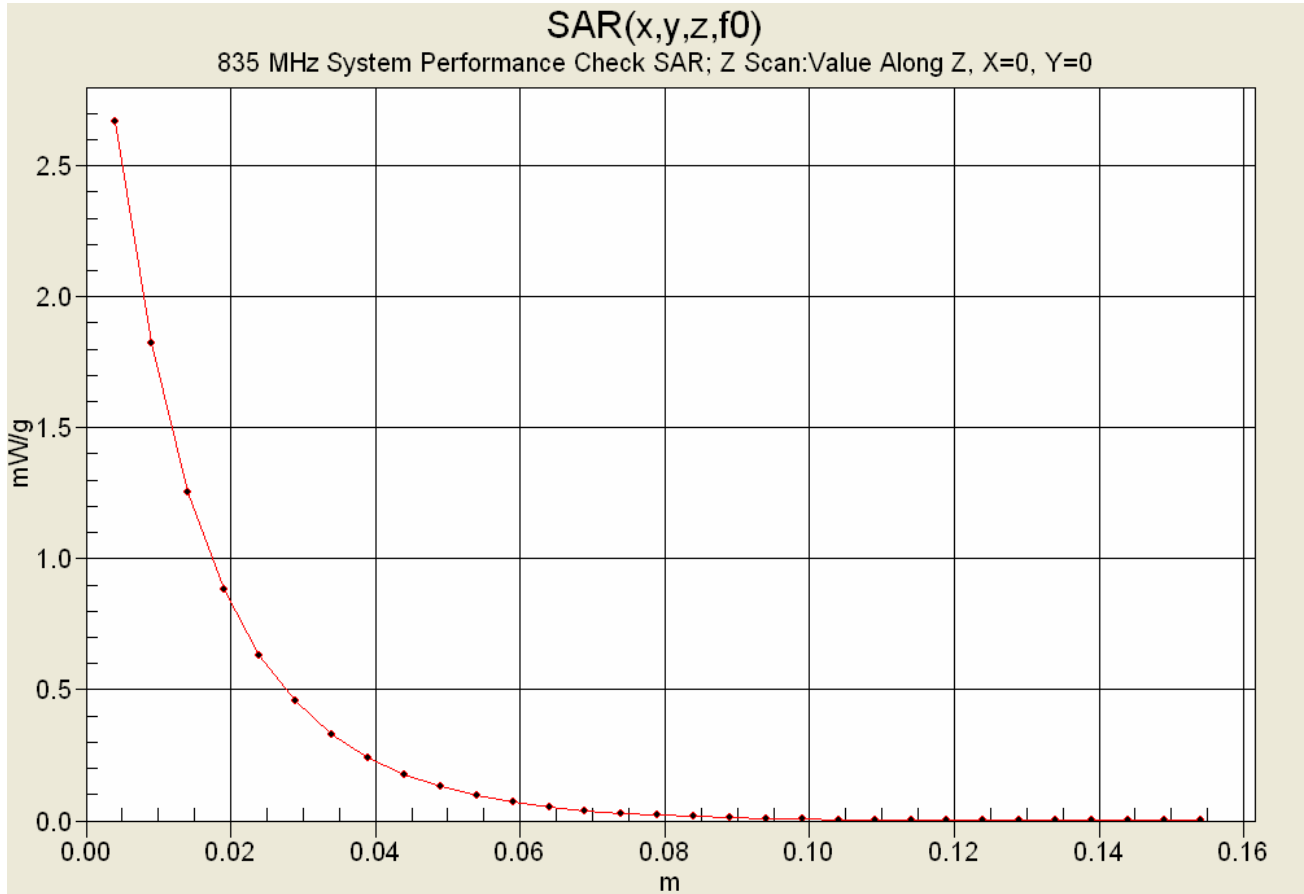

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 58

Date Tested: 05/11/2006

### System Performance Check (Body) - 1900 MHz Dipole

**DUT: Dipole 1900 MHz; Model: D1900V2; Type: System Performance Check; Serial: 151; Validation: 04/25/2006**

Ambient Temp: 24.3 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.9 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250 mW  
 Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium: M1900 ( $\sigma = 1.47$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)


- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


#### 1900 MHz Dipole - System Performance Check/Area Scan (5x8x1):

Measurement grid: dx=15mm, dy=15mm


#### 1900 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 90.3 V/m; Power Drift = -0.047 dB  
 Peak SAR (extrapolated) = 16.9 W/kg  
**SAR(1 g) = 9.71 mW/g; SAR(10 g) = 5.13 mW/g**

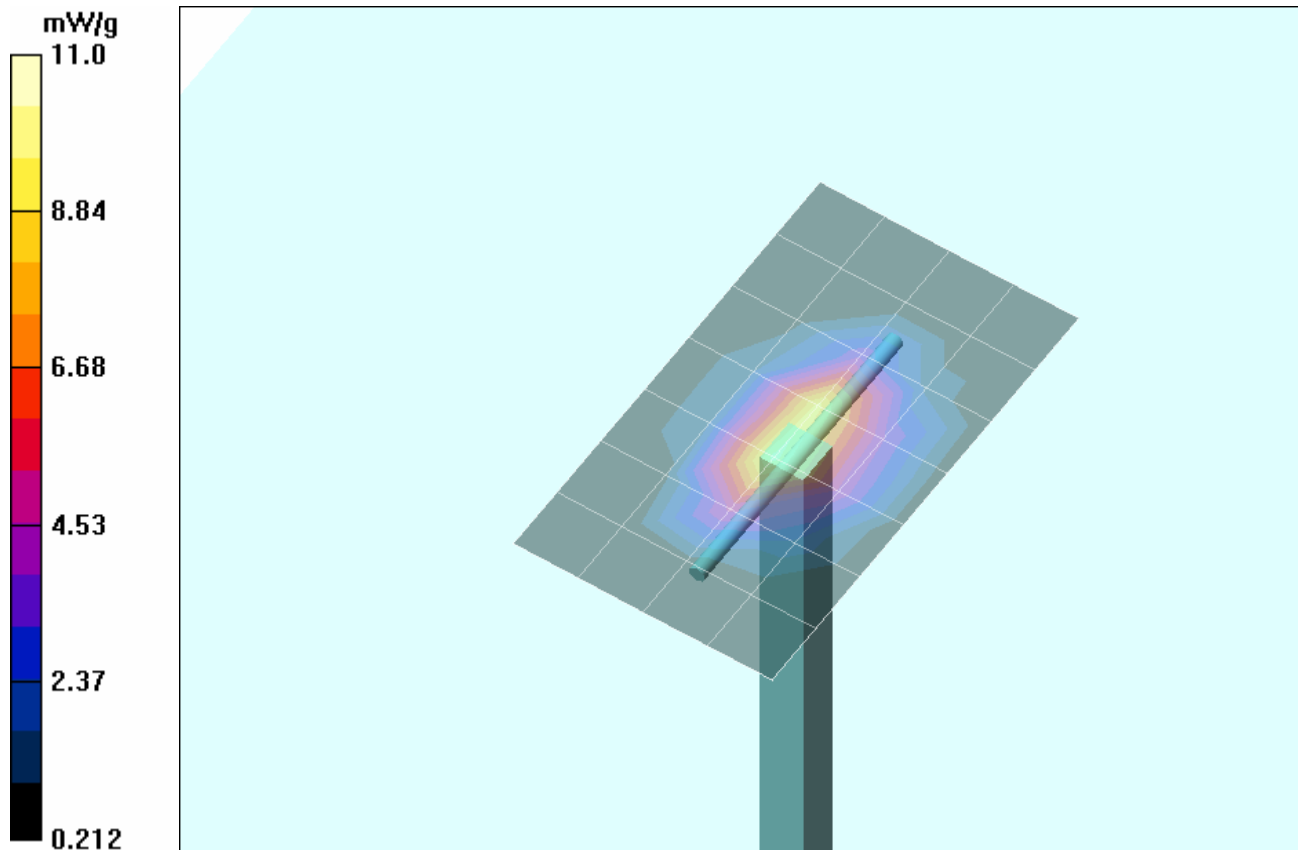


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


### Z-Axis Scan

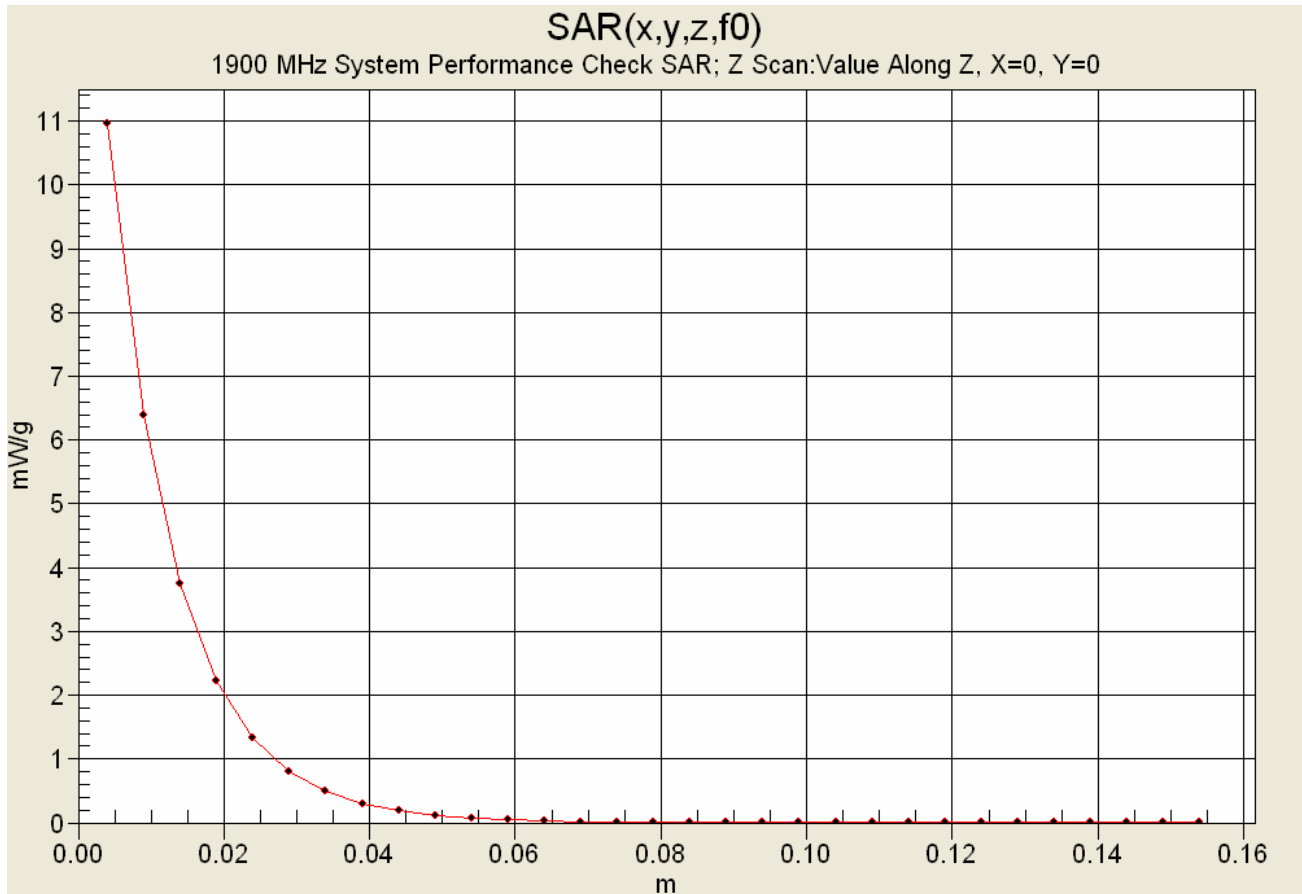


Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 45 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

### 835 MHz System Performance Check (Body)


\*\*\*\*\*


Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Mon 01/May/2006  
 Frequency (GHz)

FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	53.78	0.87
0.7450	55.55	0.96	53.76	0.88
0.7550	55.51	0.96	53.70	0.88
0.7650	55.47	0.96	53.71	0.89
0.7750	55.43	0.97	53.43	0.91
0.7850	55.39	0.97	53.44	0.92
0.7950	55.36	0.97	53.49	0.92
0.8050	55.32	0.97	53.34	0.93
0.8150	55.28	0.97	53.33	0.94
0.8250	55.24	0.97	53.20	0.95
0.8350	55.20	0.97	52.99	0.96
0.8450	55.17	0.98	53.08	0.97
0.8550	55.14	0.99	52.87	0.98
0.8650	55.11	1.01	52.82	0.99
0.8750	55.08	1.02	52.63	0.99
0.8850	55.05	1.03	52.55	1.00
0.8950	55.02	1.04	52.61	1.02
0.9050	55.00	1.05	52.46	1.02
0.9150	55.00	1.06	52.35	1.03
0.9250	54.98	1.06	52.25	1.04
0.9350	54.96	1.07	52.20	1.05

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

### 835 MHz DUT Evaluation (Body)


\*\*\*\*\*


Celltech Labs Inc  
 Test Result for UIM Dielectric Parameter  
 Tue 02/May/2006  
 Frequency (GHz)

FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	54.21	0.86
0.7450	55.55	0.96	53.90	0.87
0.7550	55.51	0.96	53.87	0.87
0.7650	55.47	0.96	53.75	0.88
0.7750	55.43	0.97	53.63	0.88
0.7850	55.39	0.97	53.47	0.89
0.7950	55.36	0.97	53.51	0.91
0.8050	55.32	0.97	53.32	0.92
0.8150	55.28	0.97	53.34	0.92
0.8250	55.24	0.97	53.23	0.94
0.8350	55.20	0.97	53.18	0.95
0.8450	55.17	0.98	53.10	0.96
0.8550	55.14	0.99	52.97	0.96
0.8650	55.11	1.01	52.96	0.97
0.8750	55.08	1.02	52.97	0.98
0.8850	55.05	1.03	52.81	0.98
0.8950	55.02	1.04	52.69	1.00
0.9050	55.00	1.05	52.69	1.00
0.9150	55.00	1.06	52.59	1.01
0.9250	54.98	1.06	52.34	1.02
0.9350	54.96	1.07	52.47	1.03

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 47 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093


### 835 MHz System Performance Check & DUT Evaluation (Body)

\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Wed 03/May/2006  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	53.88	0.87
0.7450	55.55	0.96	53.95	0.88
0.7550	55.51	0.96	53.82	0.89
0.7650	55.47	0.96	53.69	0.90
0.7750	55.43	0.97	53.53	0.91
0.7850	55.39	0.97	53.59	0.92
0.7950	55.36	0.97	53.44	0.93
0.8050	55.32	0.97	53.35	0.94
0.8150	55.28	0.97	53.29	0.95
0.8250	55.24	0.97	53.24	0.97
0.8350	55.20	0.97	53.14	0.97
0.8450	55.17	0.98	52.99	0.98
0.8550	55.14	0.99	52.73	0.99
0.8650	55.11	1.01	52.66	1.01
0.8750	55.08	1.02	52.69	1.02
0.8850	55.05	1.03	52.50	1.02
0.8950	55.02	1.04	52.41	1.03
0.9050	55.00	1.05	52.26	1.05
0.9150	55.00	1.06	52.22	1.06
0.9250	54.98	1.06	52.05	1.06
0.9350	54.96	1.07	52.06	1.07

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 48 of 58





Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093
			IC RSS-102 Issue 2

## 1900 MHz System Performance Check & 1880 MHz DUT Evaluation (Body)


\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Thu 04/May/2006  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8000	53.30	1.52	51.84	1.47
1.8100	53.30	1.52	51.88	1.47
1.8200	53.30	1.52	51.79	1.47
1.8300	53.30	1.52	51.64	1.49
1.8400	53.30	1.52	51.67	1.51
1.8500	53.30	1.52	51.71	1.52
1.8600	53.30	1.52	51.64	1.52
1.8700	53.30	1.52	51.60	1.54
1.8800	53.30	1.52	51.45	1.55
1.8900	53.30	1.52	51.44	1.56
1.9000	53.30	1.52	51.50	1.56
1.9100	53.30	1.52	51.35	1.57
1.9200	53.30	1.52	51.38	1.60
1.9300	53.30	1.52	51.32	1.60
1.9400	53.30	1.52	51.22	1.61
1.9500	53.30	1.52	51.22	1.61
1.9600	53.30	1.52	51.19	1.63
1.9700	53.30	1.52	51.13	1.64
1.9800	53.30	1.52	51.22	1.65
1.9900	53.30	1.52	51.12	1.66
2.0000	53.30	1.52	51.08	1.67

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 49 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093


### 835 MHz System Performance Check & DUT Evaluation (Body)


\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Thu 11/May/2006  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	53.54	0.86
0.7450	55.55	0.96	53.37	0.88
0.7550	55.51	0.96	53.35	0.88
0.7650	55.47	0.96	53.30	0.89
0.7750	55.43	0.97	53.34	0.90
0.7850	55.39	0.97	52.91	0.91
0.7950	55.36	0.97	52.73	0.92
0.8050	55.32	0.97	52.73	0.93
0.8150	55.28	0.97	52.60	0.93
0.8250	55.24	0.97	52.55	0.95
0.8350	55.20	0.97	52.68	0.95
0.8450	55.17	0.98	52.54	0.96
0.8550	55.14	0.99	52.33	0.98
0.8650	55.11	1.01	52.36	0.99
0.8750	55.08	1.02	52.10	0.99
0.8850	55.05	1.03	52.11	1.00
0.8950	55.02	1.04	51.94	1.01
0.9050	55.00	1.05	51.89	1.02
0.9150	55.00	1.06	51.75	1.03
0.9250	54.98	1.06	51.57	1.04
0.9350	54.96	1.07	51.56	1.05

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 50 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093


## 1900 MHz System Performance Check & 1880 MHz DUT Evaluation (Body)


\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Thu 11/May/2006  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM


\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8000	53.30	1.52	51.51	1.38
1.8100	53.30	1.52	51.53	1.39
1.8200	53.30	1.52	51.37	1.39
1.8300	53.30	1.52	51.40	1.41
1.8400	53.30	1.52	51.24	1.41
1.8500	53.30	1.52	51.29	1.43
1.8600	53.30	1.52	51.34	1.43
1.8700	53.30	1.52	51.24	1.44
1.8800	53.30	1.52	51.21	1.46
1.8900	53.30	1.52	51.25	1.46
1.9000	53.30	1.52	51.13	1.47
1.9100	53.30	1.52	51.08	1.48
1.9200	53.30	1.52	51.19	1.49
1.9300	53.30	1.52	51.06	1.50
1.9400	53.30	1.52	51.01	1.51
1.9500	53.30	1.52	51.09	1.53
1.9600	53.30	1.52	51.08	1.53
1.9700	53.30	1.52	51.02	1.54
1.9800	53.30	1.52	50.95	1.56
1.9900	53.30	1.52	50.95	1.57
2.0000	53.30	1.52	50.90	1.58

Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 51 of 58


	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX D - SAR TEST SETUP PHOTOGRAPHS**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 52 of 58


**BODY SAR TEST SETUP PHOTOGRAPHS**  
**0.0 cm Separation Distance from Bottom of DUT to Planar Phantom**  
**AirCard 860 Antenna "Closed 180°"**




	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2


**BODY SAR TEST SETUP PHOTOGRAPHS**  
**0.0 cm Separation Distance from Bottom of DUT to Planar Phantom**  
**AirCard 860 Antenna "Open 180°"**





Company:	Itronix Corporation	FCC ID:	KBCIX325-AC860IWL	IC ID:	1943A-IX325g	
Model:	IX325-AC860IWL	Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem				
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 54 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure	SAR	FCC 47 CFR §2.1093

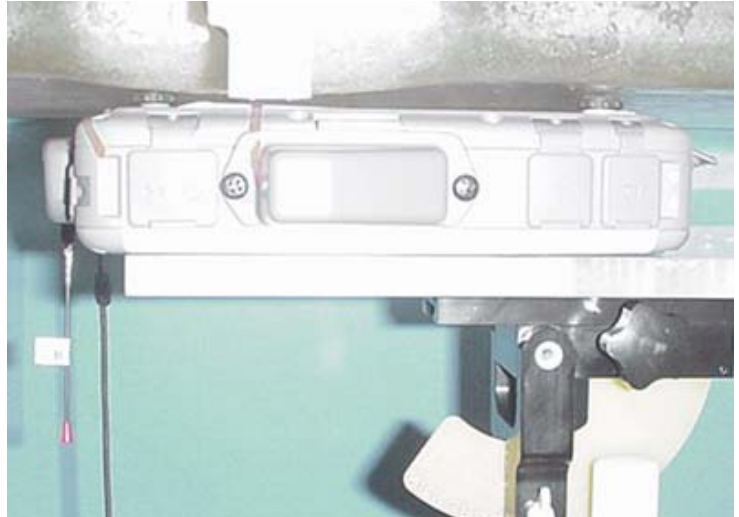
**BODY SAR TEST SETUP PHOTOGRAPHS**  
**0.0 cm Separation Distance from Bottom of DUT to Planar Phantom**  
**AirCard 860 Antenna "Open 90°"**




<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 55 of 58

	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX E - SYSTEM VALIDATION**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 56 of 58



	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

## 835 MHz SYSTEM VALIDATION DIPOLE

Type:

**835 MHz Validation Dipole**

Asset Number:

**00022**

Serial Number:

**411**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**March 27, 2006**

**Celltech Labs Inc. hereby certifies that the 835 MHz System Validation (Body) was performed on the date indicated above.**

Performed by:

**Sean Johnston**


Approved by:

**Spencer Watson**



## 1. Validation Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Standard “Annex G (informative) Reference dipoles for use in system validation”. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 835MHz	$Re\{Z\} = 47.627\Omega$
	$Im\{Z\} = -0.67188\Omega$
Return Loss at 835MHz	-31.954dB

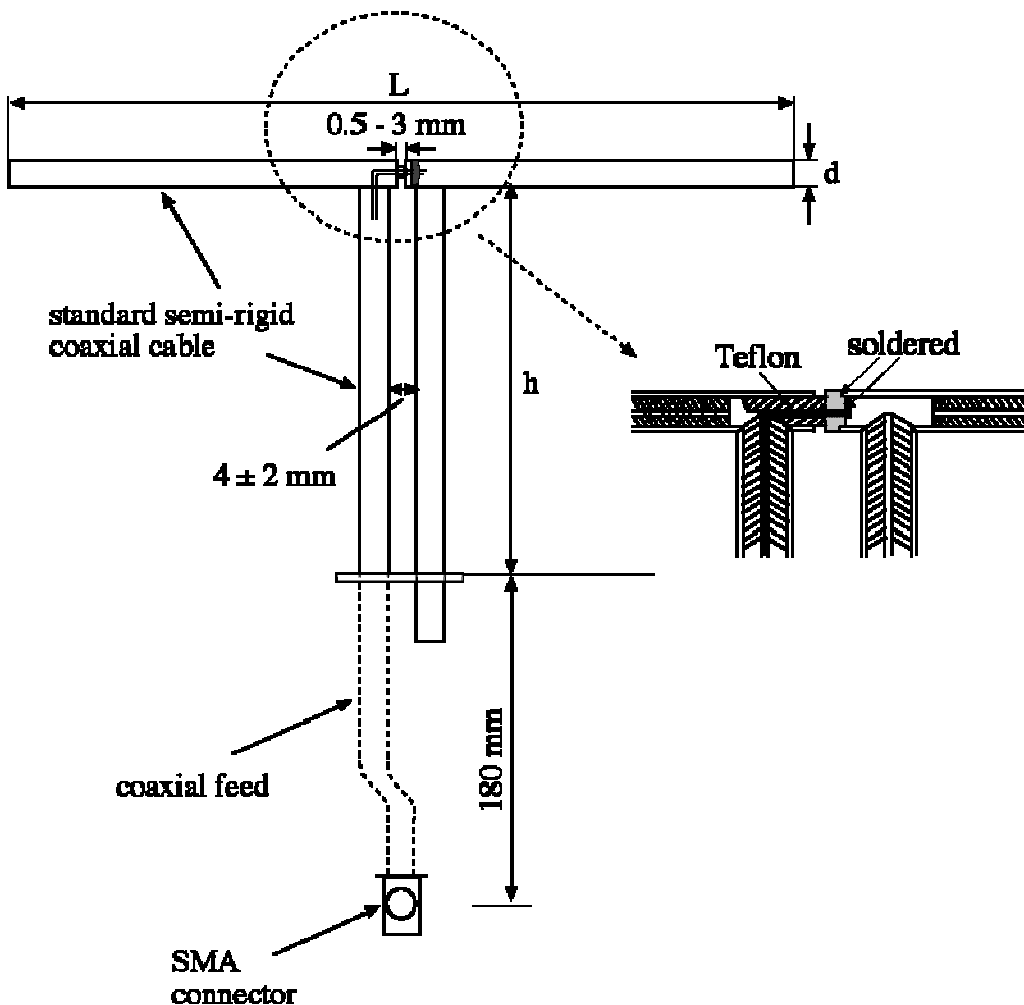

## 2. Validation Dipole VSWR Data

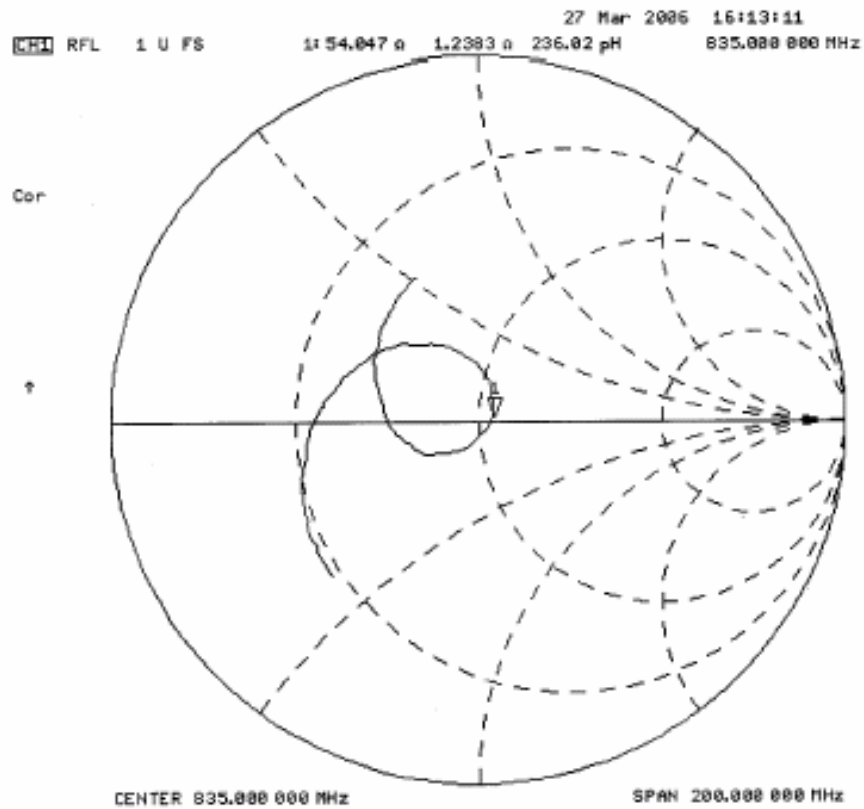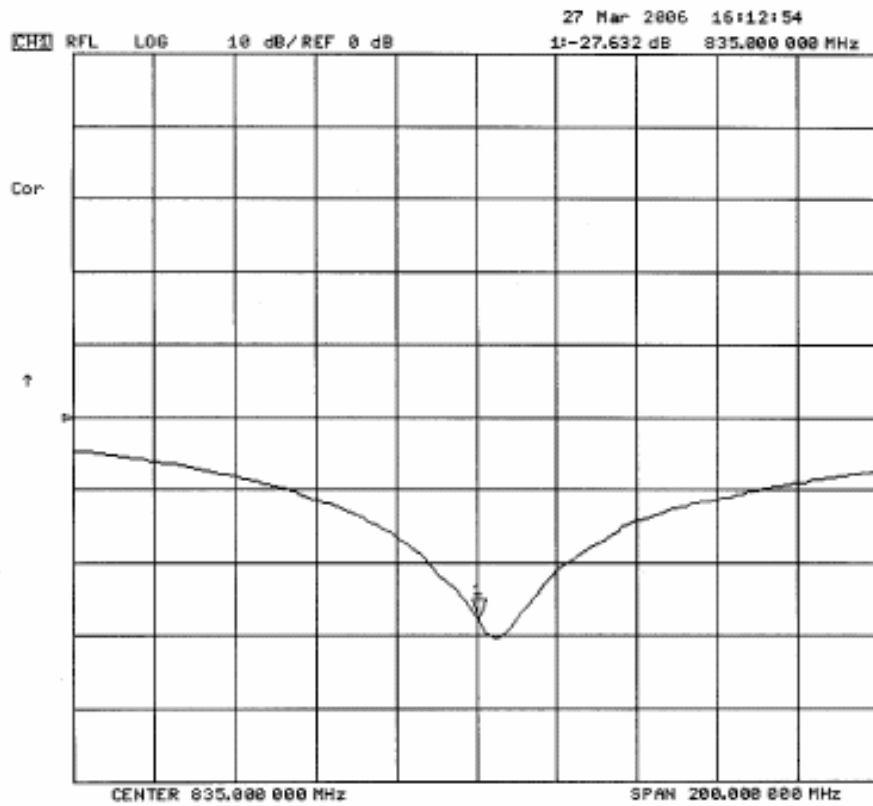


### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom


The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

**Shell Thickness:** 2.0 ± 0.1 mm  
**Filling Volume:** Approx. 25 liters  
**Dimensions:** 50 cm (W) x 100 cm (L)

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body


## 5. 835 MHz System Validation Setup



	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

## 6. 835 MHz Validation Dipole Setup



	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

## 7. Measurement Conditions

The SAM phantom was filled with 835 MHz body tissue simulant with the following parameters:

Relative Permittivity: 53.7 (-2.7% from target)  
 Conductivity: 0.94 mho/m (-3% from target)  
 Fluid Temperature: 20.8 °C  
 Fluid Depth: ≥ 15.0 cm


Environmental Conditions:  
 Ambient Temperature: 22.6 °C  
 Barometric Pressure: 101.8 kPa  
 Humidity: 30 %

The 835 MHz body tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight
Water	53.79%
Sugar	45.13%
Salt	0.98%
Dowicil 75	0.10%
Target Dielectric Parameters at 22 °C	$\epsilon_r = 55.2 (+/- 5\%)$ $\sigma = 0.97 \text{ S/m } (+/- 5\%)$

## 8. SAR Measurement

Measurements were made at the planar section of the SAM phantom using a dosimetric E-field probe ET3DV5 (S/N: 1590, conversion factor 6.47). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

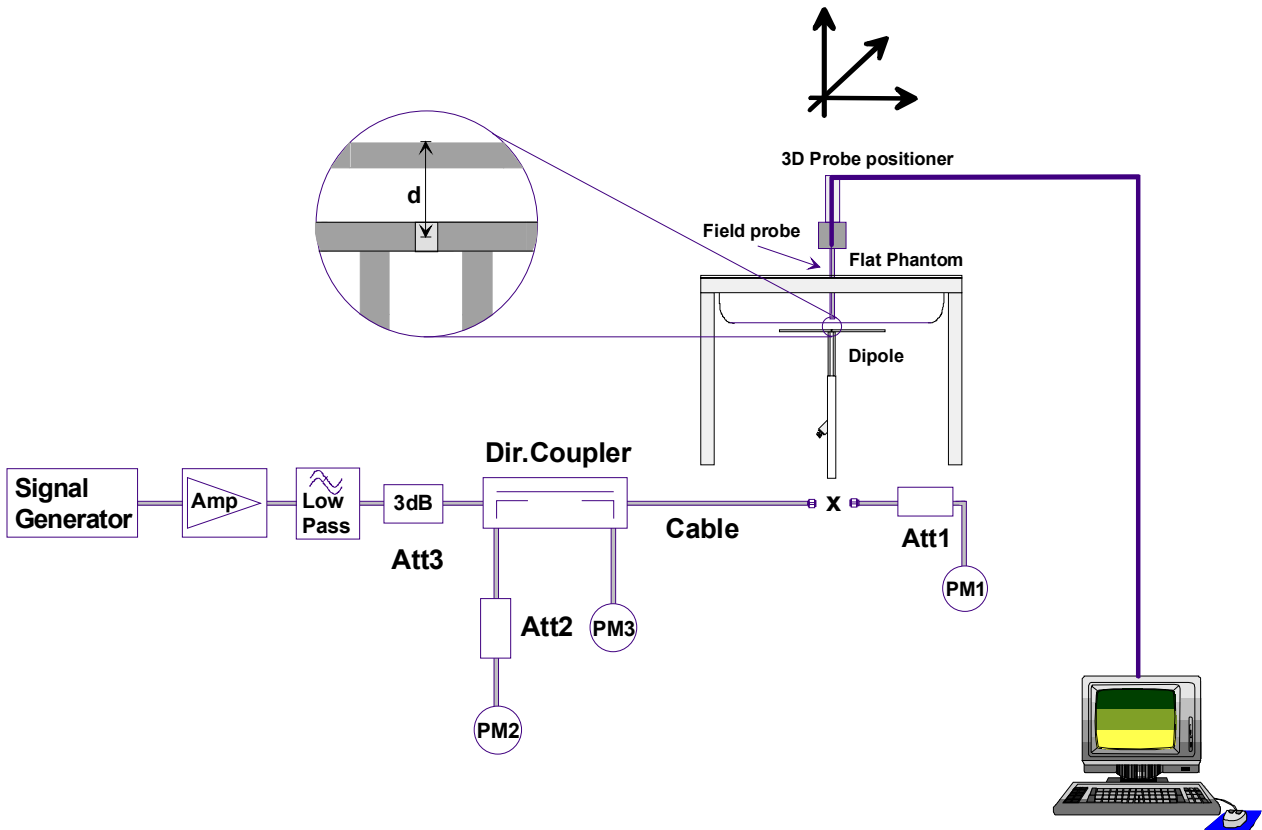

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.



## 9. Validation Dipole SAR Test Results


Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value (W/kg).

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Max SAR @ 0.25W Input
Test 1	2.46	9.84	1.62	6.48	2.65
Test 2	2.46	9.84	1.62	6.48	2.66
Test 3	2.46	9.84	1.62	6.48	2.67
Test 4	2.47	9.88	1.62	6.48	2.68
Test 5	2.43	9.72	1.60	6.40	2.64
Test 6	2.43	9.72	1.59	6.36	2.63
Test 7	2.42	9.68	1.59	6.36	2.59
Test 8	2.46	9.84	1.62	6.48	2.64
Test 9	2.47	9.88	1.62	6.48	2.65
Test 10	2.45	9.80	1.62	6.48	2.61
<b>Average SAR</b>	<b>2.451</b>	<b>9.804</b>	<b>1.612</b>	<b>6.448</b>	<b>2.642</b>

IEEE Target SAR @ 1 Watt Input averaged over 1 gram (W/kg)		Measured SAR @ 1 Watt Input averaged over 1 gram (W/kg)	Deviation from Target (%)	IEEE Target SAR @ 1 Watt Input averaged over 10 grams (W/kg)		Measured SAR @ 1 Watt Input averaged over 10 grams (W/kg)	Deviation from Target (%)
9.71	+/- 10%	9.804	+1.0%	6.38	+/- 10%	6.448	+1.1%

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

### 835 MHz Dipole System Validation (Body) - March 27, 2006

DUT: Dipole 835 MHz; Model: D835V2; Serial: 411; Calibrated: 03/27/2006  
Ambient Temp: 22.6 °C; Fluid Temp: 20.8 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%  
Communication System: CW  
Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: M835 ( $\sigma = 0.94$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>)  
- Probe: ET3DV6 - SN1590; ConvF(6.47, 6.47, 6.47); Calibrated: 20/05/2005  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005  
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033  
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

**835 MHz Dipole System Validation/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

**835 MHz Dipole System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 55.0 V/m; Power Drift = 0.027 dB  
**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.65 mW/g

**835 MHz Dipole System Validation/Zoom Scan 3 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.8 V/m; Power Drift = 0.029 dB  
**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.66 mW/g

**835 MHz Dipole System Validation/Zoom Scan 4 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.5 V/m; Power Drift = 0.075 dB  
**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.67 mW/g

**835 MHz Dipole System Validation/Zoom Scan 5 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.9 V/m; Power Drift = 0.010 dB  
**SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.68 mW/g

**835 MHz Dipole System Validation/Zoom Scan 6 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 55.0 V/m; Power Drift = -0.087 dB  
**SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.6 mW/g**  
Maximum value of SAR (measured) = 2.64 mW/g


**835 MHz Dipole System Validation/Zoom Scan 7 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.6 V/m; Power Drift = -0.017 dB  
**SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.59 mW/g**  
Maximum value of SAR (measured) = 2.63 mW/g

**835 MHz Dipole System Validation/Zoom Scan 8 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.1 V/m; Power Drift = -0.023 dB  
**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g**  
Maximum value of SAR (measured) = 2.59 mW/g


**835 MHz Dipole System Validation/Zoom Scan 9 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.6 V/m; Power Drift = -0.004 dB  
**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.64 mW/g


**835 MHz Dipole System Validation/Zoom Scan 10 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.5 V/m; Power Drift = 0.012 dB  
**SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.65 mW/g

**835 MHz Dipole System Validation/Zoom Scan 11 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.5 V/m; Power Drift = -0.005 dB  
**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.62 mW/g**  
Maximum value of SAR (measured) = 2.61 mW/g

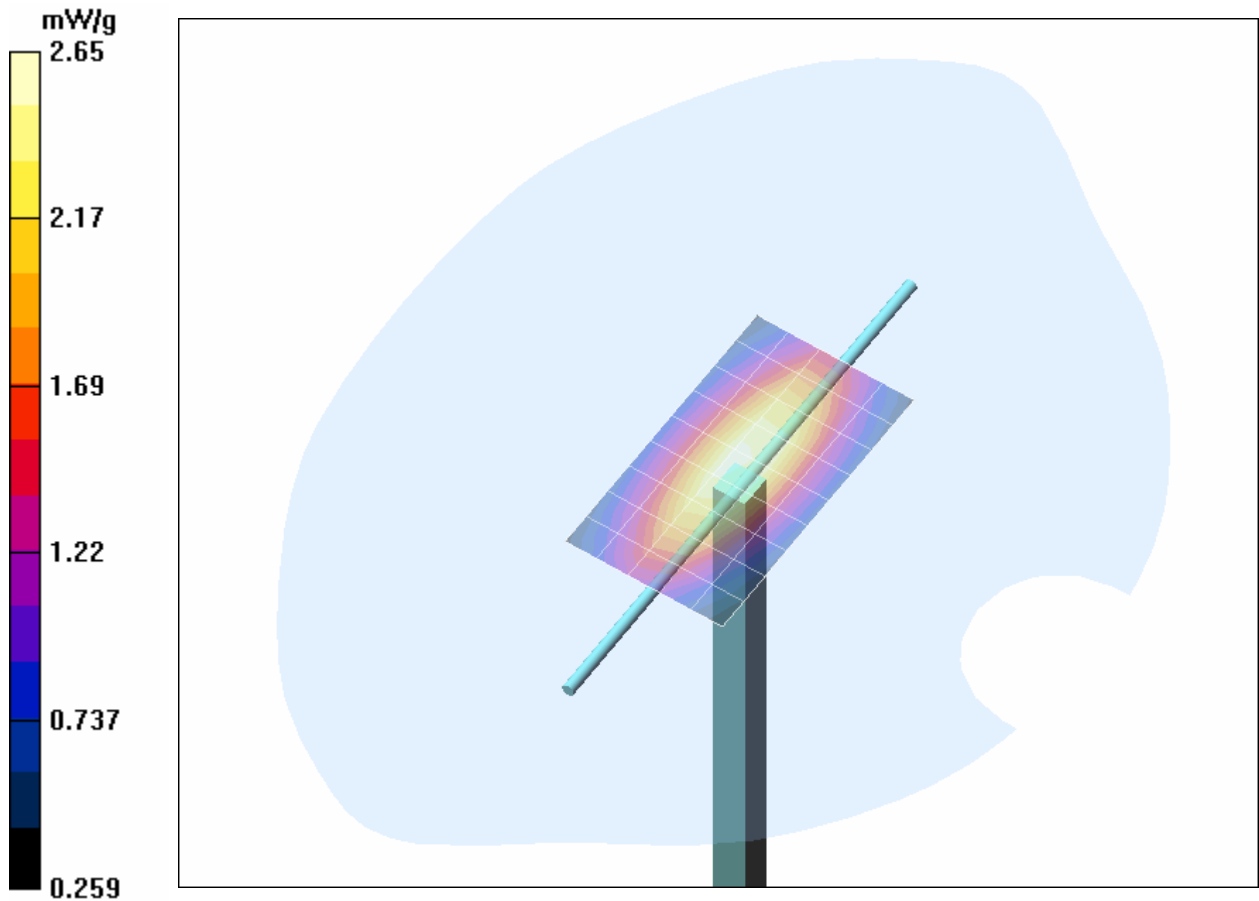

1 g average of 10 measurements: 2.451 mW/g  
 10 g average of 10 measurements: 1.612 mW/g

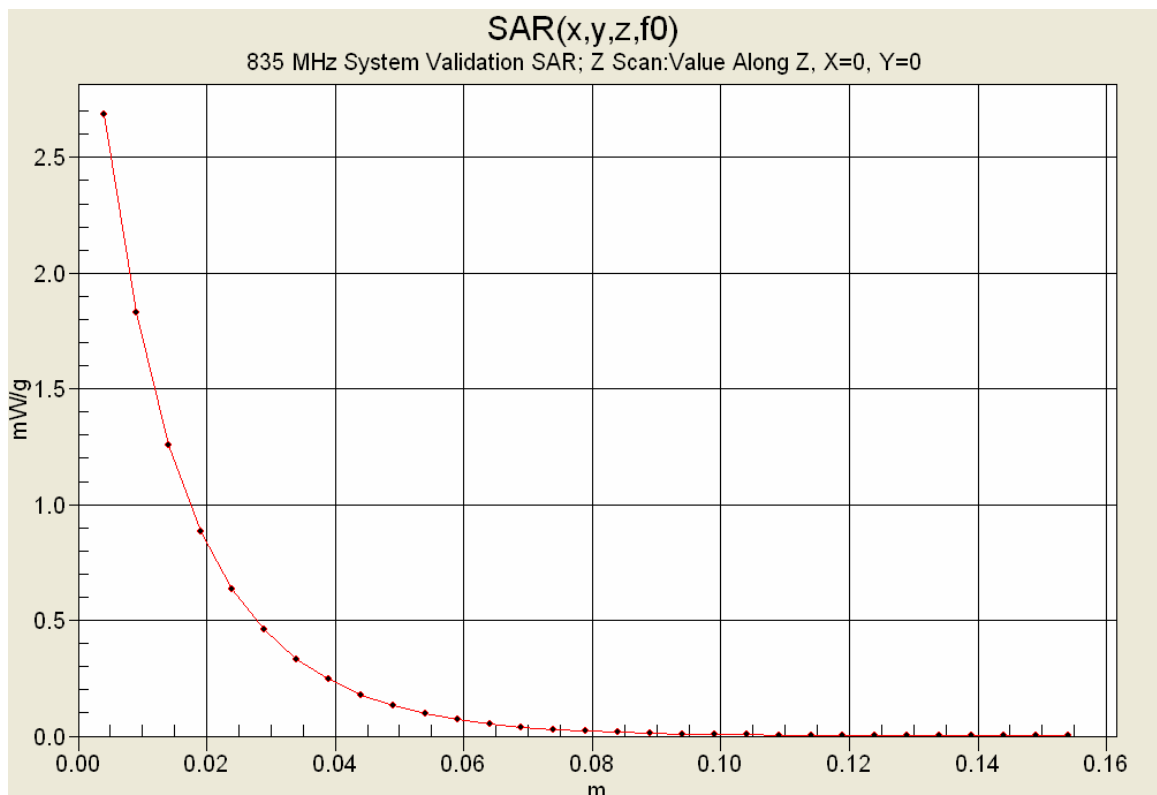

	Date of Evaluation:	March 27, 2006	Document Serial No.:	SV835B-032706-R1	
	Evaluation Type:	System Validation	Validation Dipole:	835 MHz	Body

## 10. Measured Fluid Dielectric Parameters

### **835 MHz System Validation (Body)**

\*\*\*\*\*

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 27/Mar/2006

Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon


FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	54.23	0.86
0.7450	55.55	0.96	54.00	0.87
0.7550	55.51	0.96	54.00	0.88
0.7650	55.47	0.96	54.04	0.89
0.7750	55.43	0.97	53.97	0.90
0.7850	55.39	0.97	54.01	0.90
0.7950	55.36	0.97	53.96	0.91
0.8050	55.32	0.97	53.85	0.92
0.8150	55.28	0.97	53.79	0.93
0.8250	55.24	0.97	53.69	0.94
<b>0.8350</b>	<b>55.20</b>	<b>0.97</b>	<b>53.68</b>	<b>0.94</b>
0.8450	55.17	0.98	53.35	0.95
0.8550	55.14	0.99	53.18	0.96
0.8650	55.11	1.01	53.25	0.98
0.8750	55.08	1.02	53.26	0.98
0.8850	55.05	1.03	53.11	0.99
0.8950	55.02	1.04	53.11	1.00
0.9050	55.00	1.05	52.96	1.01
0.9150	55.00	1.06	52.91	1.02
0.9250	54.98	1.06	52.93	1.03
0.9350	54.96	1.07	52.58	1.03

	Date of Evaluation:	April 25, 2006	Document Serial No.:	SV1900B-042506-R0	
	Evaluation Type:	System Validation	Validation Dipole:	1900 MHz	Body

## 1900 MHz SYSTEM VALIDATION DIPOLE

Type:

**1900 MHz Validation Dipole**

Asset Number:

**00032**

Serial Number:

**151**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**April 25, 2006**

**Celltech Labs Inc. hereby certifies that the 1900 MHz System Validation (Body) was performed on the date indicated above.**

Performed by:

**Sean Johnston**

Approved by:


**Spencer Watson**

## 1. Dipole Construction & Electrical Characteristics



The validation dipole was constructed in accordance with the IEEE Standard “Annex G (informative) Reference dipoles for use in system validation”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 1900MHz       $\text{Re}\{Z\} = 48.715\Omega$   
 $\text{Im}\{Z\} = 9.412\Omega$

Return Loss at 1900MHz                      -20.371dB

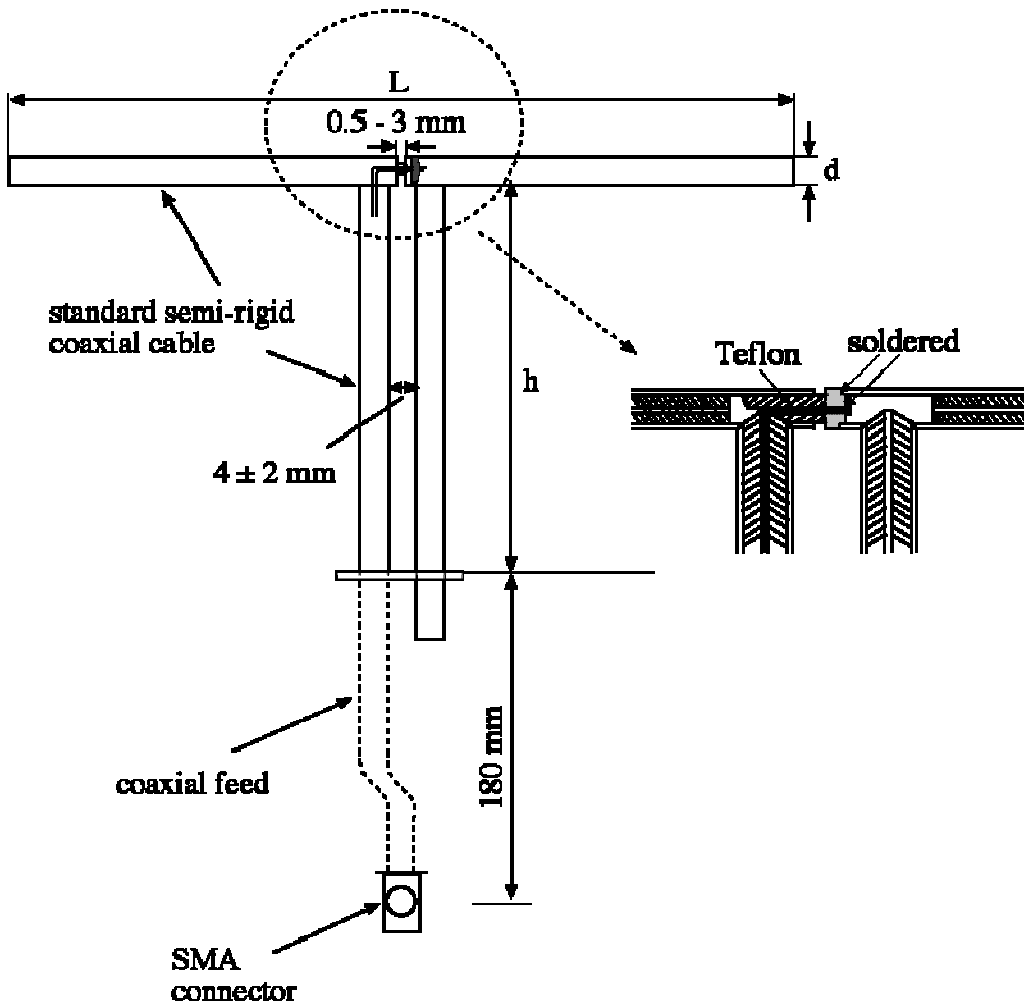

## 2. Validation Dipole VSWR Data

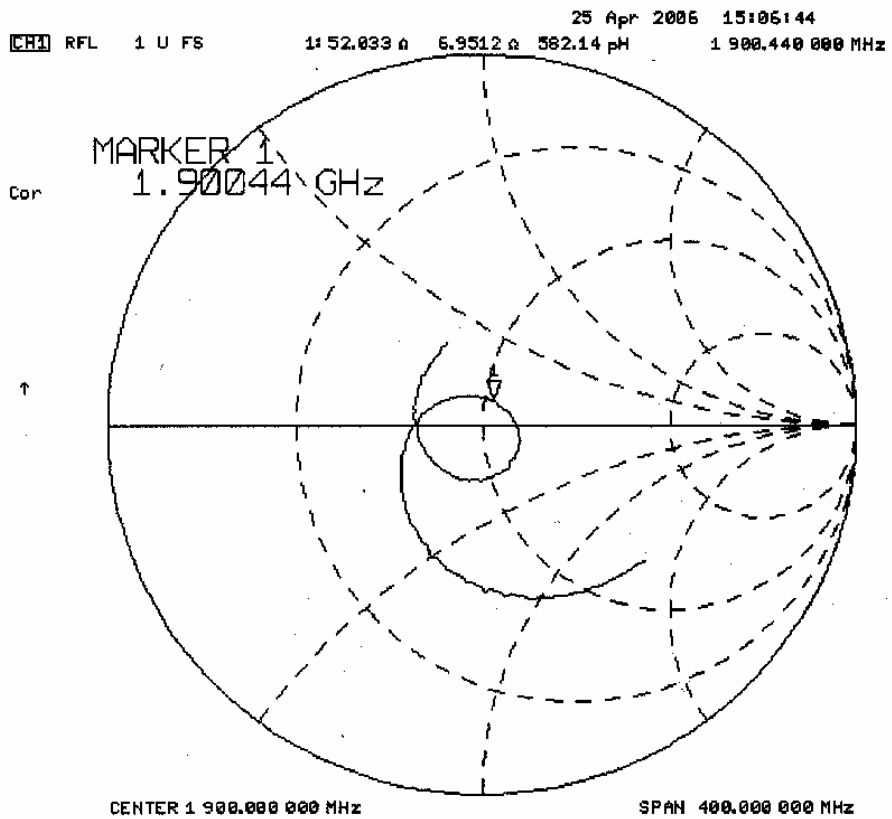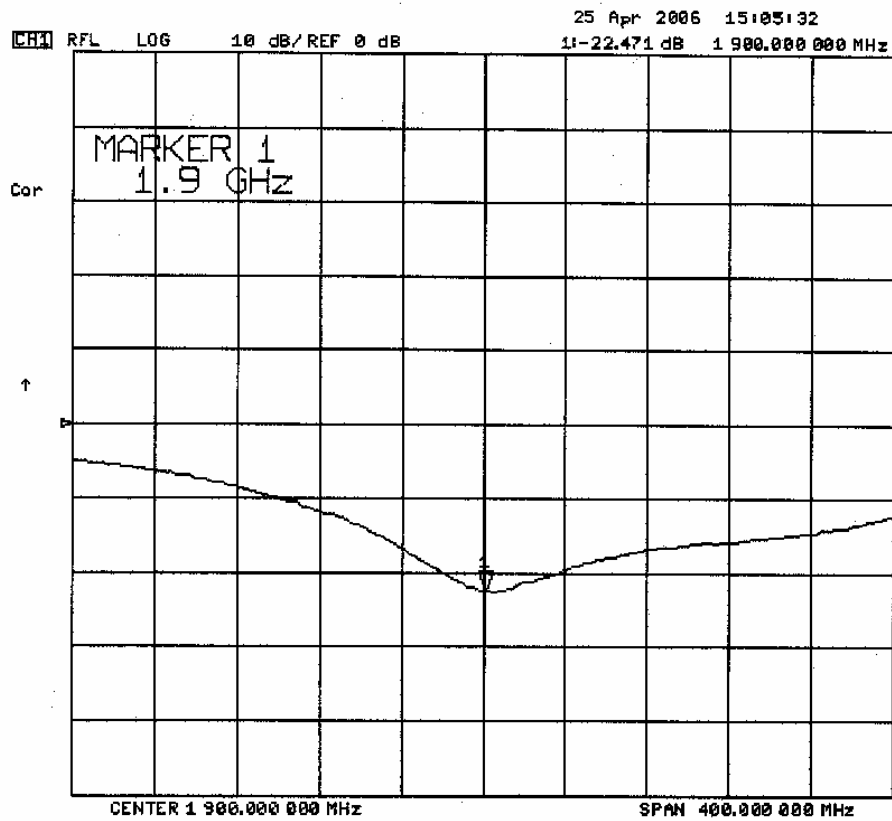

### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom

The validation phantom is a Fiberglass shell planar phantom manufactured by Barski Industries Ltd. The phantom is in conformance with the requirements defined by IEEE SCC34-SC2 for the dosimetric evaluations of body-worn and lap-held operating configurations. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids.

**Shell Thickness:** 2.0 ± 0.1 mm  
**Filling Volume:** Approx. 72 liters  
**Dimensions:** (L) 94 cm x (W) 44 cm x (H) 22 cm




### 5. 1900 MHz System Validation Setup



### 6. 1900 MHz System Validation Dipole



	Date of Evaluation:	April 25, 2006	Document Serial No.:	SV1900B-042506-R0	
	Evaluation Type:	System Validation	Validation Dipole:	1900 MHz	Body

## 7. Measurement Conditions

The phantom was filled with 1900 MHz Body tissue simulant:

Relative Permittivity: 51.2 (-3.9% from target)  
 Conductivity: 1.57 mho/m (+3.3% from target)  
 Fluid Temperature: 23.5 °C  
 Fluid Depth:  $\geq 15.0$  cm


Environmental Conditions:  
 Ambient Temperature: 24.1 °C  
 Barometric Pressure: 101.6 kPa  
 Humidity: 31%

The 1900 MHz Body tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight
Water	69.85%
Glycol	29.89%
Salt	0.26%
Target Dielectric Parameters at 22 °C	$\epsilon_r = 53.3 (+/- 5\%)$ $\sigma = 1.52 \text{ S/m } (+/- 5\%)$

## 8. SAR Measurement

Measurements were made using a dosimetric E-field probe ET3DV6 (S/N: 1590, conversion factor 4.85). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

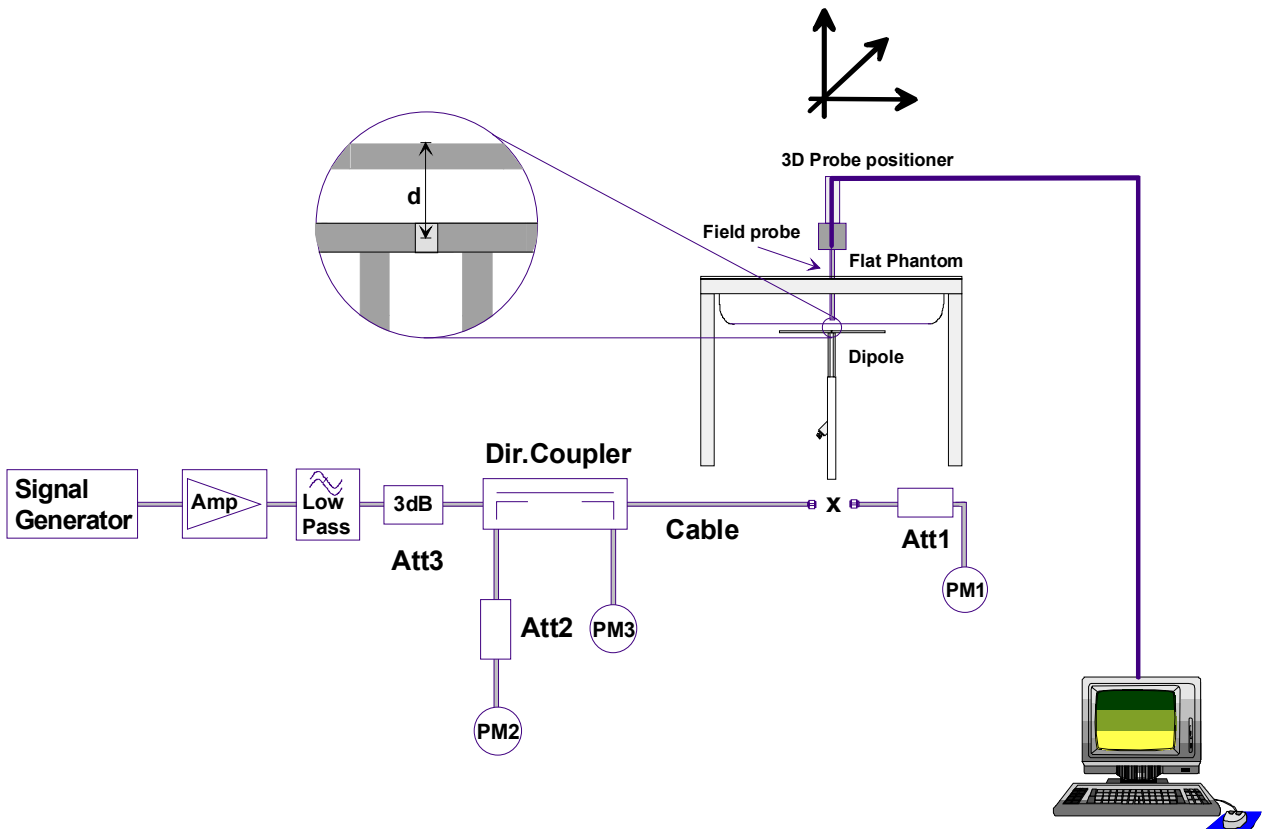

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 50dB below the forward power.

## 9. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.


Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	10.5	42.00	5.53	22.12	11.8
Test 2	10.4	41.60	5.53	22.12	11.7
Test 3	10.3	41.20	5.44	21.76	11.6
Test 4	10.5	42.00	5.53	22.12	11.6
Test 5	10.5	42.00	5.54	22.16	11.7
Test 6	10.4	41.60	5.47	21.88	11.6
Test 7	10.5	42.00	5.54	22.16	11.7
Test 8	10.2	40.80	5.39	21.56	11.4
Test 9	10.2	40.80	5.39	21.56	11.4
Test 10	10.5	42.00	5.54	22.16	11.7
<b>Average</b>	<b>10.40</b>	<b>41.60</b>	<b>5.49</b>	<b>21.96</b>	<b>11.62</b>

The results have been normalized to 1W (forward power) into the dipole.

Target SAR @ 1 Watt Input averaged over 1 gram (W/kg)		Measured SAR @ 1 Watt Input averaged over 1 gram (W/kg)	Deviation from Target (%)	Target SAR @ 1 Watt Input averaged over 10 grams (W/kg)		Measured SAR @ 1 Watt Input averaged over 10 grams (W/kg)	Deviation from Target (%)
39.8	+/- 10%	41.60	+4.52	20.8	+/- 10%	21.96	+5.58

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

	Date of Evaluation:	April 25, 2006	Document Serial No.:	SV1900B-042506-R0	
	Evaluation Type:	System Validation	Validation Dipole:	1900 MHz	Body

## System Validation (Body) - 1900 MHz Dipole - April 25, 2006

**DUT: Dipole 1900 MHz; Model: D1900V2; Serial: 151; Validation: 04/25/2006**

Ambient Temp: 24.1 °C; Fluid Temp: 23.5 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%  
Communication System: CW

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1900 ( $\sigma = 1.57$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.85, 4.85, 4.85); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 15/06/2005

- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**1900 MHz Dipole - System Validation/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

**1900 MHz Dipole - System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.3 V/m; Power Drift = 0.002 dB

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.53 mW/g**

Maximum value of SAR (measured) = 11.8 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 2 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.0 V/m; Power Drift = 0.027 dB

**SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.53 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 3 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.4 V/m; Power Drift = -0.026 dB

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.44 mW/g**

Maximum value of SAR (measured) = 11.6 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 4 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = -0.060 dB

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.53 mW/g**

Maximum value of SAR (measured) = 11.6 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 5 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = -0.033 dB

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.54 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 6 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.6 V/m; Power Drift = -0.060 dB

**SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.47 mW/g**

Maximum value of SAR (measured) = 11.6 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 7 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.9 V/m; Power Drift = 0.041 dB

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.54 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 8 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.074 dB

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.39 mW/g**

Maximum value of SAR (measured) = 11.4 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 9 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.051 dB

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.39 mW/g**


Maximum value of SAR (measured) = 11.4 mW/g

**1900 MHz Dipole - System Validation/Zoom Scan 10 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 87.0 V/m; Power Drift = -0.056 dB


**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.54 mW/g**

Maximum value of SAR (measured) = 11.7 mW/g

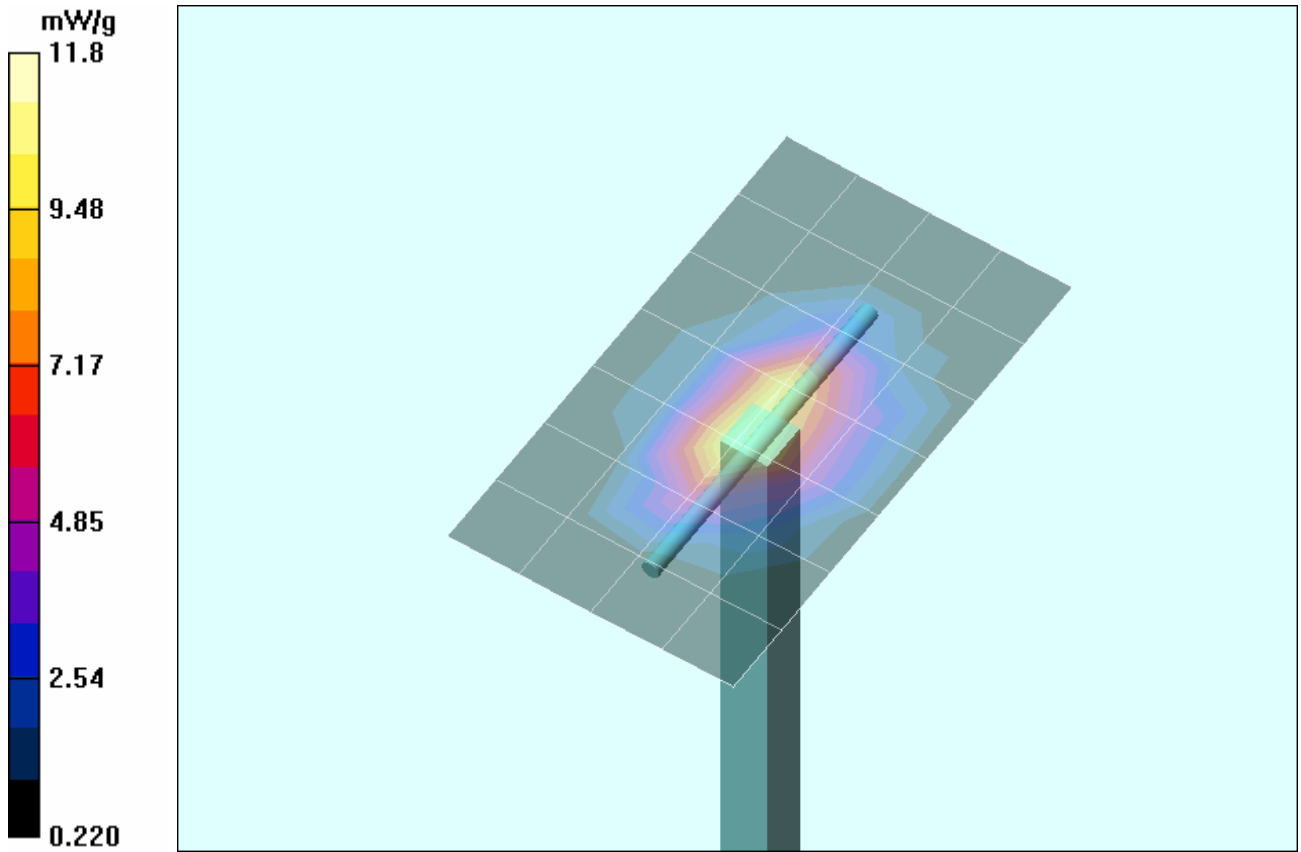

1 g average of 10 measurements: 10.40 mW/g  
 10 g average of 10 measurements: 5.49 mW/g

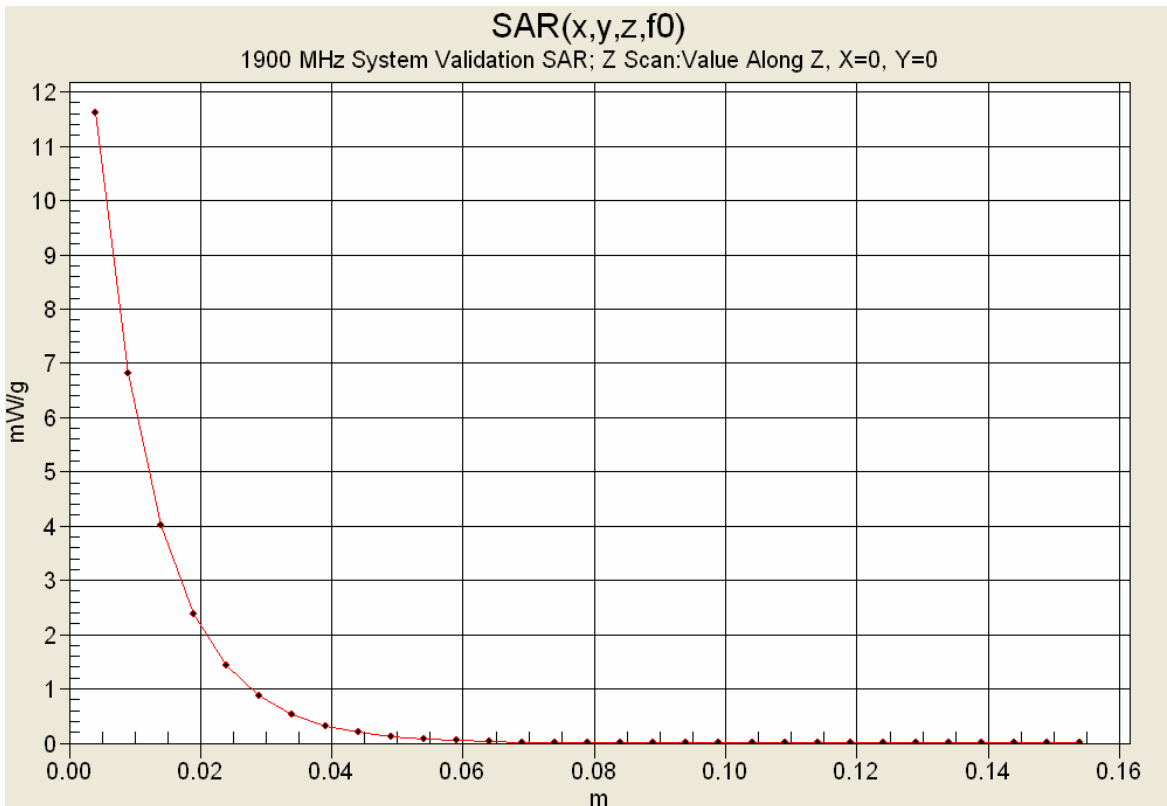

	Date of Evaluation:	April 25, 2006	Document Serial No.:	SV1900B-042506-R0	
	Evaluation Type:	System Validation	Validation Dipole:	1900 MHz	Body

## 10. Measured Fluid Dielectric Parameters

### **1900 MHz System Validation (Body)**

\*\*\*\*\*

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Tue 25/Apr/2006

Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma


Test\_e Epsilon of UIM

Test\_s Sigma of UIM


\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8000	53.30	1.52	51.68	1.46
1.8100	53.30	1.52	51.51	1.48
1.8200	53.30	1.52	51.45	1.49
1.8300	53.30	1.52	51.50	1.50
1.8400	53.30	1.52	51.34	1.50
1.8500	53.30	1.52	51.27	1.52
1.8600	53.30	1.52	51.21	1.53
1.8700	53.30	1.52	51.33	1.54
1.8800	53.30	1.52	51.22	1.55
1.8900	53.30	1.52	51.18	1.56
<b>1.9000</b>	<b>53.30</b>	<b>1.52</b>	<b>51.20</b>	<b>1.57</b>
1.9100	53.30	1.52	51.09	1.58
1.9200	53.30	1.52	51.18	1.59
1.9300	53.30	1.52	51.10	1.62
1.9400	53.30	1.52	50.95	1.62
1.9500	53.30	1.52	50.95	1.63
1.9600	53.30	1.52	50.91	1.64
1.9700	53.30	1.52	50.88	1.65
1.9800	53.30	1.52	50.81	1.67
1.9900	53.30	1.52	50.79	1.68
2.0000	53.30	1.52	50.66	1.70



	Test Report Serial No.:	042406KBC-T741-S24GWC	Test Report Issue Date:	October 18, 2006
	Date(s) of Evaluation:	May 01-04 & 11, 2006	Report Revision No.:	Revision 1.0
	Type of Evaluation:	RF Exposure      SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

**APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX325-AC860IWL	<b>IC ID:</b>	1943A-IX325g	
<b>Model:</b>	IX325-AC860IWL	<b>Rugged Tablet PC with Dual-Band GSM/GPRS/EDGE/UMTS Modem</b>				
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 58 of 58

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01  
Date: June 16, 2003  
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

#### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: \_\_\_\_\_

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

### Dimensions of Fiberglass Planar Phantom (Manufactured by Barski Industries Ltd. - Unit# 03-01)

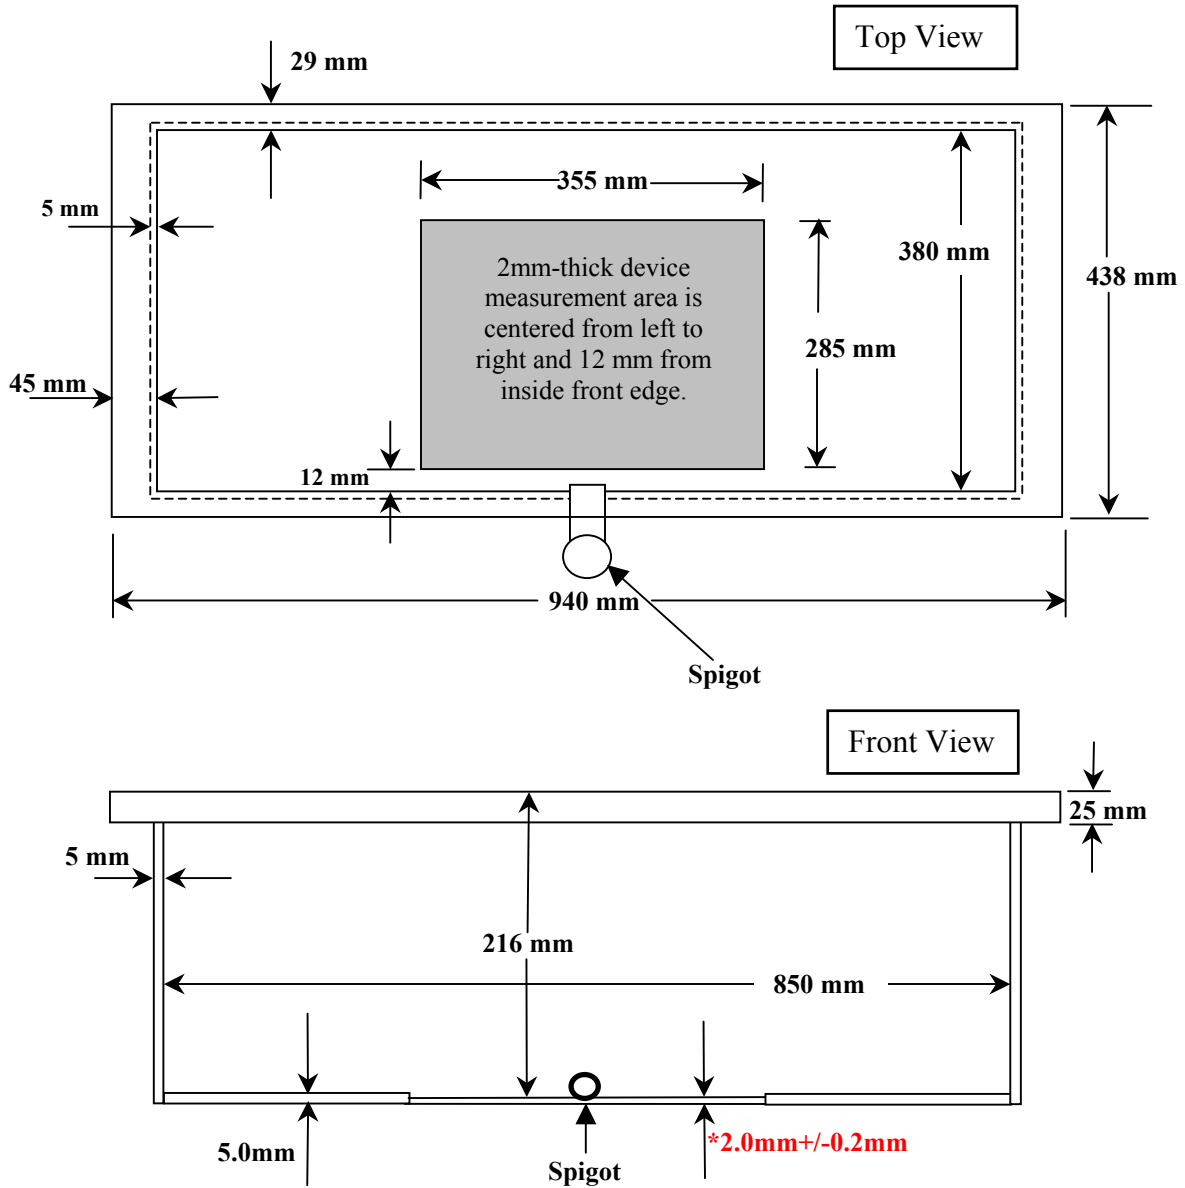

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**