


|   |                         |                                |                    |                           |
|---|-------------------------|--------------------------------|--------------------|---------------------------|
|  | Test Report Serial No.: | 060605KBC-T646-S24G            | Report Issue Date: | Dec. 08, 2005             |
|   | Dates of Evaluation:    | April 13-14, May 03 & 09, 2005 | Report Rev. No.:   | Revision 0                |
|   | Type of Evaluation:     | RF Exposure                    | SAR                | FCC §2.1093<br>IC RSS-102 |

**APPENDIX F - PROBE CALIBRATION**

|  |  |                |                   |               |              |               |   |  |
|--|--|----------------|-------------------|---------------|--------------|---------------|---|--|
| <b>Applicant:</b>  | Itronix Corporation  | <b>FCC ID:</b> | KBCIX325A775IWLBT | <b>IC ID:</b> | 1943A-IX325e | <b>Model:</b> | IX325A775IWLBT  |  |
| IX325 Rugged Tablet PC with PCS/Cellular GSM GPRS/EDGE PCMCIA Modem and co-located Bluetooth |  |                |                   |               |              |               |  |  |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                   |               |              |               | Page 59 of 61   |  |

**Client**      **Celltech Labs**

## CALIBRATION CERTIFICATE

Object(s)      **ET3DV6 - SN:1590**

Calibration procedure(s)      **QA CAL-01.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date:      **May 24, 2004**



Condition of the calibrated item      **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type                        | ID #           | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|-----------------------------------|----------------|---|------------------------|
| Power meter EPM E4419B            | GB41293874     | 5-May-04 (METAS, No 251-00388)            | May-05                 |
| Power sensor E4412A               | MY41495277     | 5-May-04 (METAS, No 251-00388)            | May-05                 |
| Reference 20 dB Attenuator        | SN: 5086 (20b) | 3-May-04 (METAS, No 251-00389)            | May-05                 |
| Fluke Process Calibrator Type 702 | SN: 6295803    | 8-Sep-03 (Sintrel SCS No. E-030020)       | Sep-04                 |
| Power sensor HP 8481A             | MY41092180     | 18-Sep-02 (SPEAG, in house check Oct-03)  | In house check: Oct 05 |
| RF generator HP 8684C             | US3642U01700   | 4-Aug-99 (SPEAG, in house check Aug-02)   | In house check: Aug-05 |
| Network Analyzer HP 8753E         | US37390585     | 18-Oct-01 (SPEAG, in house check Oct-03)  | In house check: Oct 05 |

|                | Name          | Function            | Signature   |
|----------------|---------------|---------------------|---|
| Calibrated by: | Nico Vetterli | Technician          |  |
| Approved by:   | Katja Pokovic | Laboratory Director |  |

Date issued: May 24, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

# Probe ET3DV6

SN:1590

|                  |                |
|------------------|----------------|
| Manufactured:    | March 19, 2001 |
| Last calibrated: | May 15, 2003   |
| Recalibrated:    | May 24, 2004   |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ET3DV6 SN:1590

| Sensitivity in Free Space |  | Diode Compression <sup>A</sup> |       |
|---------------------------|--|--------------------------------|-------|
| NormX                     | 1.85 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X                          | 91 mV |
| NormY                     | 2.01 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y                          | 91 mV |
| NormZ                     | 1.73 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z                          | 91 mV |

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

### Boundary Effect

Head                    900 MHz    Typical SAR gradient: 5 % per mm

|   |                              |        |        |
|---|------------------------------|--------|--------|
| Sensor Center to Phantom Surface Distance |                              | 3.7 mm | 4.7 mm |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 8.0    | 4.4    |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.1    | 0.2    |

Head                    1800 MHz    Typical SAR gradient: 10 % per mm

|   |                              |        |        |
|---|------------------------------|--------|--------|
| Sensor Center to Phantom Surface Distance |                              | 3.7 mm | 4.7 mm |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 12.2   | 8.5    |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.2    | 0.1    |

### Sensor Offset


|                            |              |
|----------------------------|--------------|
| Probe Tip to Sensor Center | 2.7 mm       |
| Optical Surface Detection  | in tolerance |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.




<sup>A</sup> numerical linearization parameter: uncertainty not required

# Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)


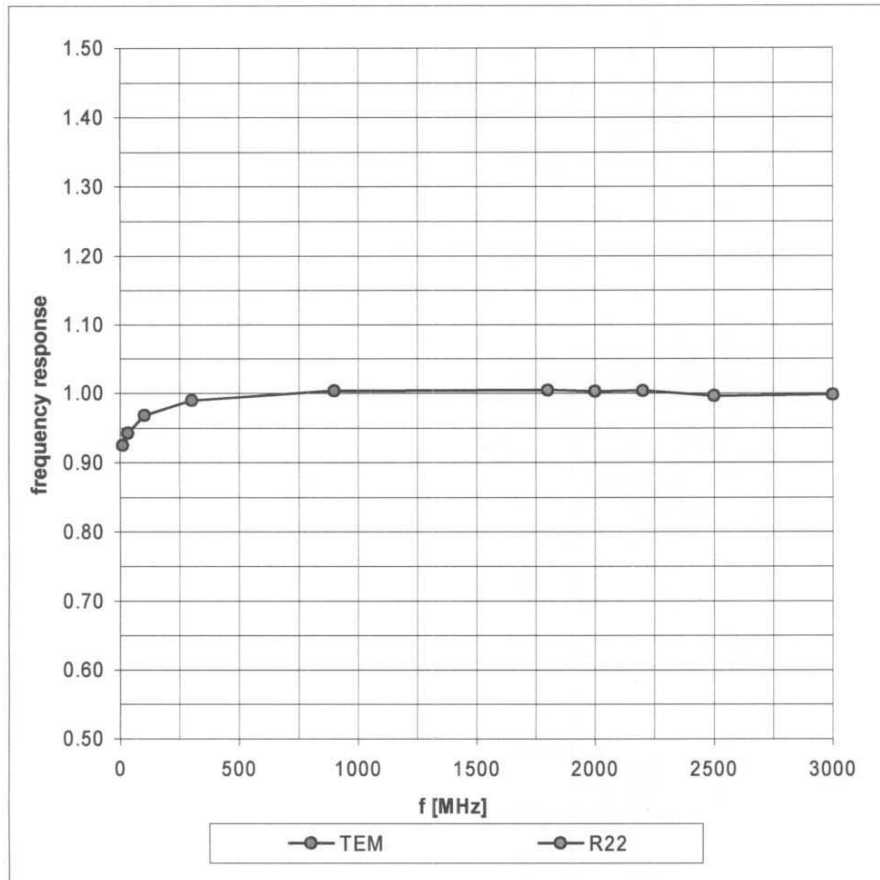


### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

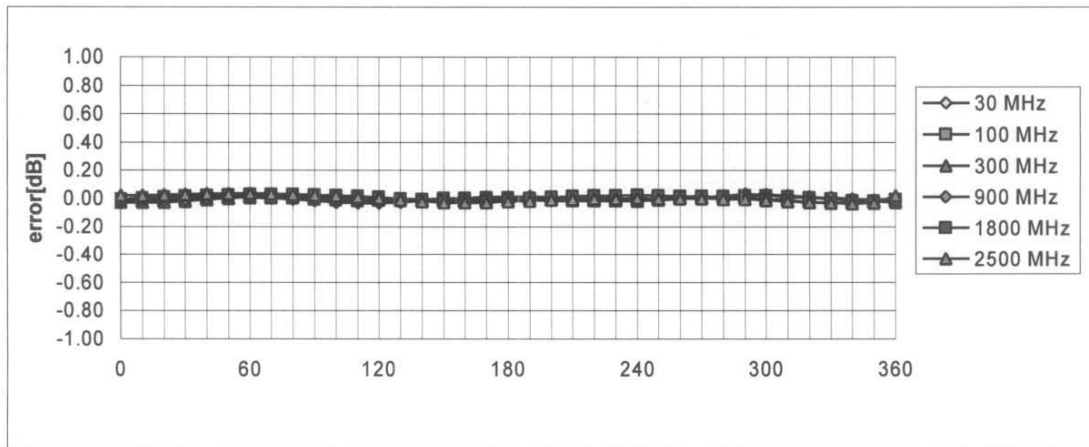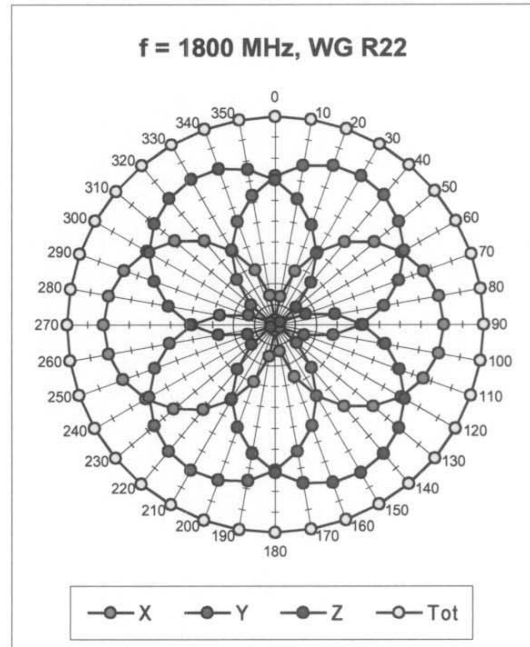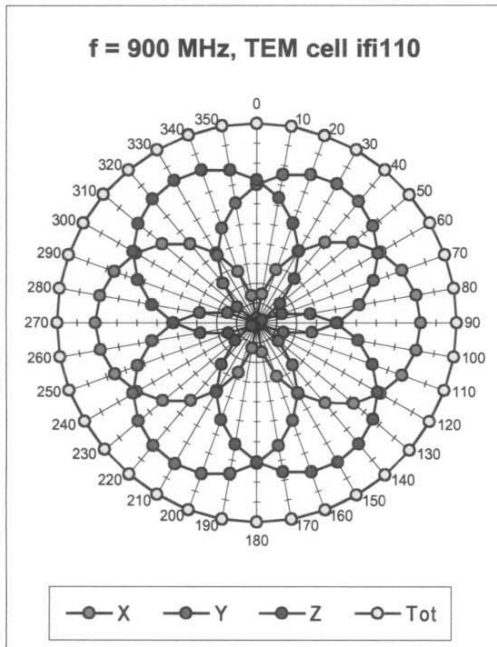



**Axial Isotropy Error <math>\lt; \pm 0.2 \text{ dB}</math>**

### Dynamic Range f(SAR<sub>head</sub>) ( Waveguide R22 )

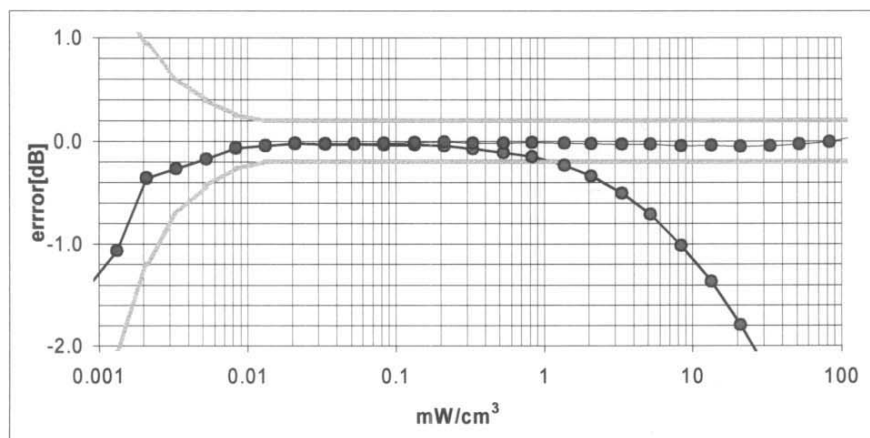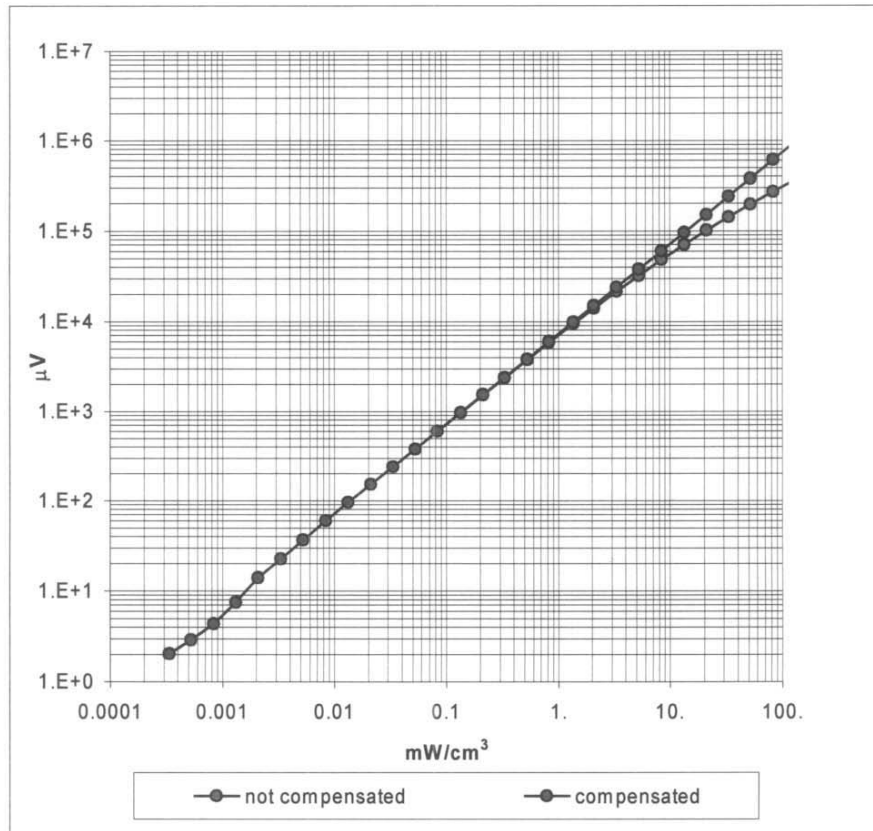

Probe Linearity Error < ± 0.2 dB

### Conversion Factor Assessment

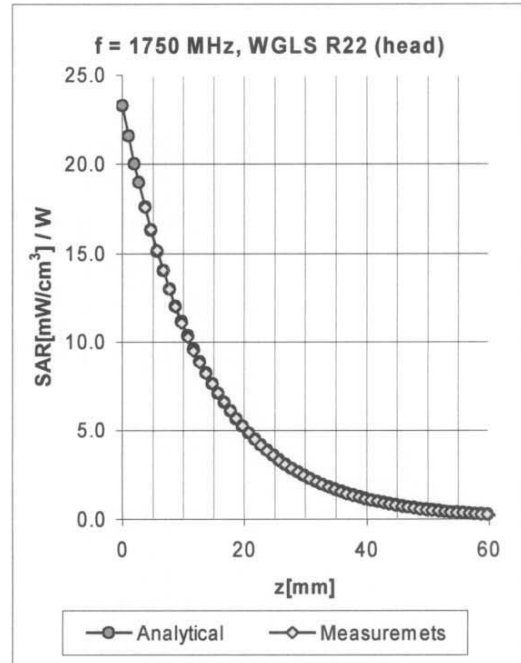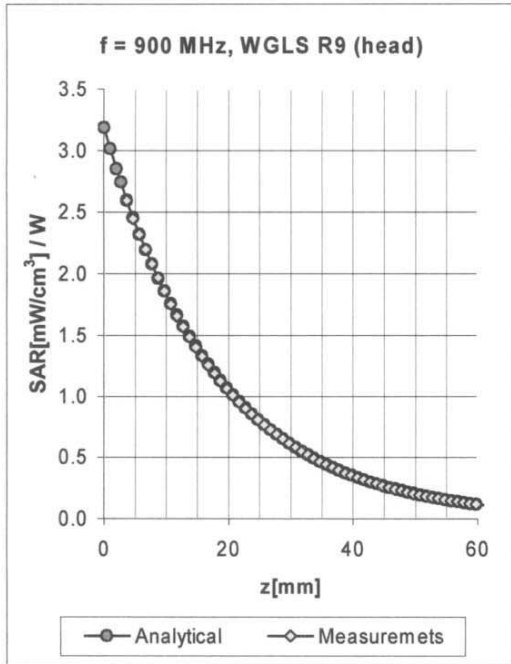


| f [MHz] | Validity [MHz] <sup>B</sup> | Tissue | Permittivity | Conductivity | Alpha | Depth | ConvF        | Uncertainty |
|---------|-----------------------------|--------|--------------|--------------|-------|-------|--------------|-------------|
| 835     | 750-950                     | Head   | 41.5 ± 5%    | 0.90 ± 5%    | 0.68  | 1.64  | 6.71 ± 11.9% | (k=2)       |
| 1750    | 1700-1800                   | Head   | 40.0 ± 5%    | 1.40 ± 5%    | 0.43  | 2.67  | 5.28 ± 9.7%  | (k=2)       |
| 1900    | 1850-1950                   | Head   | 40.0 ± 5%    | 1.40 ± 5%    | 0.46  | 2.81  | 5.03 ± 9.7%  | (k=2)       |
| 2450    | 2400-2500                   | Head   | 39.2 ± 5%    | 1.80 ± 5%    | 0.81  | 1.95  | 4.44 ± 9.7%  | (k=2)       |
| 835     | 750-950                     | Body   | 55.2 ± 5%    | 0.97 ± 5%    | 0.49  | 1.99  | 6.54 ± 11.9% | (k=2)       |
| 1750    | 1700-1800                   | Body   | 53.3 ± 5%    | 1.52 ± 5%    | 0.50  | 2.87  | 4.68 ± 9.7%  | (k=2)       |
| 1900    | 1850-1950                   | Body   | 53.3 ± 5%    | 1.52 ± 5%    | 0.52  | 2.93  | 4.58 ± 9.7%  | (k=2)       |
| 2450    | 2400-2500                   | Body   | 52.7 ± 5%    | 1.95 ± 5%    | 0.91  | 1.78  | 4.22 ± 9.7%  | (k=2)       |

<sup>B</sup> The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.



### Deviation from Isotropy in HSL

Error ( $\theta, \phi$ ),  $f = 900$  MHz

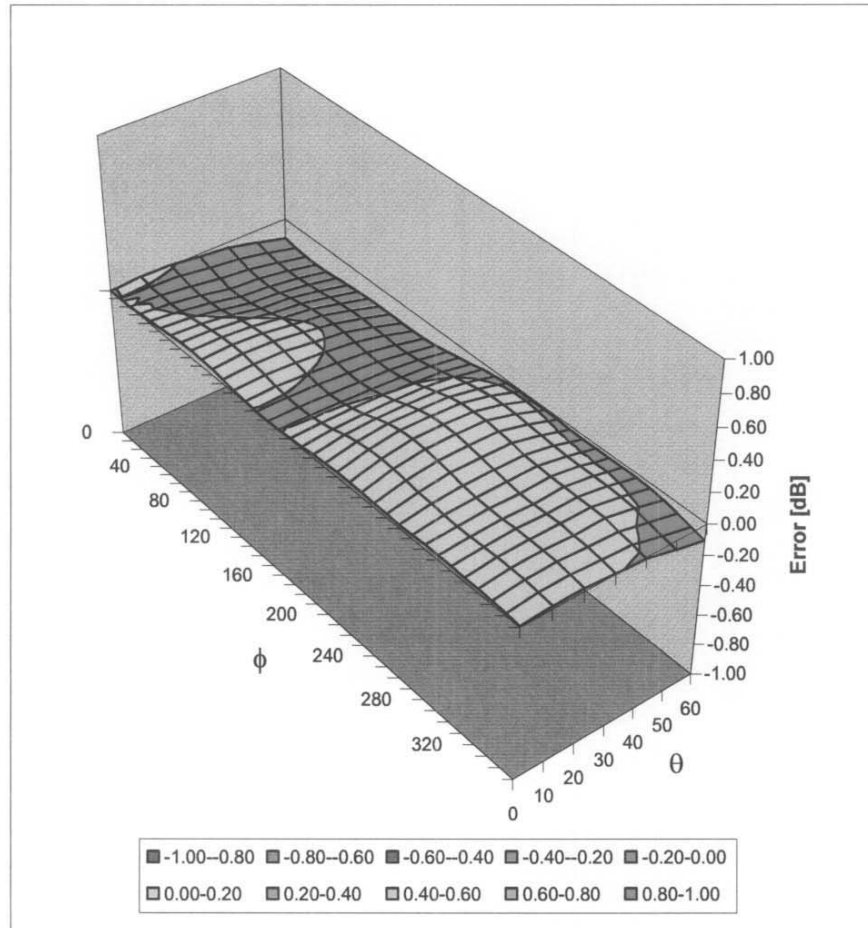

Spherical Isotropy Error  $< \pm 0.4$  dB

## Additional Conversion Factors for Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1590**

Place of Assessment:

**Zurich**

Date of Assessment:


**May 25, 2004**

Probe Calibration Date:

**May 24, 2004**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



**Dosimetric E-Field Probe ET3DV6 SN:1590**Conversion factor ( $\pm$  standard deviation)

|                |       |                                |   |
|----------------|-------|--------------------------------|---|
| <b>150 MHz</b> | ConvF | <b>9.1 <math>\pm</math> 8%</b> | $\epsilon_r = 52.3 \pm 5\%$<br>$\sigma = 0.76 \pm 5\%$ mho/m<br>(head tissue) |
| <b>300 MHz</b> | ConvF | <b>7.9 <math>\pm</math> 8%</b> | $\epsilon_r = 45.3 \pm 5\%$<br>$\sigma = 0.87 \pm 5\%$ mho/m<br>(head tissue) |
| <b>450 MHz</b> | ConvF | <b>7.5 <math>\pm</math> 8%</b> | $\epsilon_r = 43.5 \pm 5\%$<br>$\sigma = 0.87 \pm 5\%$ mho/m<br>(head tissue) |
| <b>150 MHz</b> | ConvF | <b>8.8 <math>\pm</math> 8%</b> | $\epsilon_r = 61.9 \pm 5\%$<br>$\sigma = 0.80 \pm 5\%$ mho/m<br>(body tissue) |
| <b>450 MHz</b> | ConvF | <b>7.7 <math>\pm</math> 8%</b> | $\epsilon_r = 56.7 \pm 5\%$<br>$\sigma = 0.94 \pm 5\%$ mho/m<br>(body tissue) |

**Important Note:**

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.