

**Test Report
for
FCC Part 15 Subpart B & C & E**

*of
Product Name*

Notebook Personal Computer
(with Intel PRO/Wireless 2915ABG Network Connection inside)

Model

IX600
(Brand: Itronix)

Applied by:

Itronix Corporation
801 South Stevens Street
Spokane Washington, 99204
U. S. A.

Test Performed by:

International Standards Laboratory
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-05LR008FCMPE

Issue Date: 2005/05/06

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

- 1. General 1
 - 1.1 Certification of Accuracy of Test Data 1
- 2. Description of Equipment Under Test (EUT) 2
 - 2.1 General Test Conditions 5
- 3. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)] 6
 - 3.1 Applied Standards 6
 - 3.2 Test Procedure 6
 - 3.3 Test Setup 6
 - 3.4 Calculation for Maximum Permissible Exposure (MPE) 6
- 4. Appendix : Test Equipment 9
 - 4.1 Test Equipment List 9

1. General

1.1 Certification of Accuracy of Test Data

Standards: CFR 47 Part 15 Subpart B Class B
 CFR 47 Part 15 Subpart C (Section 15.247)
 CFR 47 Part 15 Subpart E (Section 15.407)

Test Procedure: ANSI C63.4:2003

Equipment Tested: Notebook Personal Computer

Model: IX600

Applied by: Itronix Corporation

Sample received Date: 2005/04/18

Final test Date : 2005/04/11-2005/04/29

Test Result PASS

Test Site: Chamber 02, Conduction 02

Temperature Refer to each site test data

Humidity: Refer to each site test data



Test Engineer: Mailes Hsieh

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature



 Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 11 pages, including 1 cover page, 1 contents page, and 9 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Description of Equipment Under Test (EUT)

EUT

Description: Notebook Personal Computer
(with Intel PRO/Wireless 2915ABG Network Connection inside)

Condition: Pre-Production

Model: IX600

FCC ID: KBCIX600-IWL

Serial Number: N/A

Brand: Itronix

Wireless LAN Module: Intel, Model: WM3B2915ABG

Frequency Range 802.11a: 5150~5350 MHz, 5725~5825 MHz

Frequency Range 802.11b/g: 2400 - 2483.5 MHz

Support channel:

802.11a Normal mode 12 Channels

802.11b 11 Channels

802.11g 11 Channels

Modulation Skill:

802.11a Normal mode OFDM (6 Mbps – 54 Mbps)

802.11b DBPSK(1Mbps), DQPSK(2Mbps),
CCK(5.5/11Mbps)

802.11g OFDM (6M - 54Mbps)

Antennas Type:

Main antenna PIFA(P/N: 25.90215.001), made by Wistron NeWeb Corp.

Aux antenna PIFA(P/N: 25.90216.001), made by Wistron NeWeb Corp.

Antenna Connected:

Connected to RF connector on the PCB of the 802.11a/b/g WLAN Adapter. The user is not possible to change the antenna without disassembling the notebook computer.

Antenna peak Gain:

Main antenna 2.41 dBi (11b/g), 2.26 dBi (11a)

Aux antenna 1.53 dBi (11b/g), 0.59 dBi (11a)

Power Type of LAN module: 3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The channel and the operation frequency of 802.11a Normal Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5180	07	5300
02	5200	08	5320
03	5220	09	5745
04	5240	10	5765
05	5260	11	5785
06	5280	12	5805

- Power Supply Type: Auto Switching AC Adapter
Delta (Model: SADP-65KB D) or
Liteon(Model: PA-1700-02)
- CPU Type: Pentium M Dothan 1.8GHz
- Hard Disk Device: HGST (Model: HTS424040M9AT00)
- DDR: 512MB
Hynix (Model: HYMP564S64P6-C4) or
Micron (Model: MT8HTF6464HDY-53EA3)
1024 MB
Infineon (Model: HYS64T128021HDL-3.7-A)
- DVD-Multi: TEAC (Model: DW-224E-B83)
- DVD-RAM: TEAC(Model: DV-W28EA)
- MDC modem: Liteon (Model: MDC-003#/A1A)
- DC-In: one
- VGA Port: one
- USB2.0 Connector: two
- LAN Connector: one
- Modem Port: one
- PCIMCIA Connector: one
- Docking Connector: one
- Line in: one
- Line out: one

RS-232 Port: one
Smart Connector : one
Express Connector : one
Battery: Simplo 6 cell
Simplo 9 cell
LCD: Enhanced 14.1" XGA TFT (Model: LTD121EC5S)
Inverter: Sumida (Model : IV12087/T)
Maximum display Resolution: 1024X786 Non-interlaced

EMI Noise Source:

Crystal: 14.318M (X1),32.768M (X2),32.768M(X3), 24.576M(X4),25M(X5),24.576M(X6)
Clock Generator: U44

EMI Solution:

- 1.Heatsink add two gaskets
- 2.HDD DOOR add seven gaskets

2.1 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99%.for 802.11a.
2. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99%.for 802.11b.
3. The EUT was set in continuously transmitting mode with a duty cycle of 99%.for 802.11g.
4. The channel 1, 6, 11 of 802.11b/g of EUT were all tested.

3. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


3.1 Applied Standards

FCC PART 1.1307, 1.1310, 2.1091, 2.1093 RF EXPOSURE

3.2 Test Procedure

The Transmitter output of EUT was connected to the Peak Power Analyzer

3.3 Test Setup

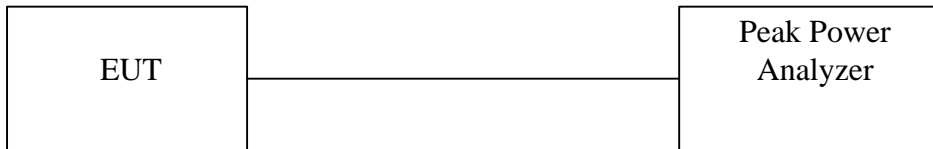

3.4 Calculation for Maximum Permissible Exposure (MPE)

From FCC 1.1310 Table 1B, the maximum permissible RF exposure for an uncontrolled environment is 1 mW/cm². The actual power density for the EUT with the antenna is calculated as shown below.

$$S = (P \times G) / (4 \times \pi \times d^2)$$

where:

S = power density

P = transmitter conducted power in (W)

G = antenna numeric gain

d = distance to radiation center (m)

802.11a

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m ²)	Power Density (mW/cm ²)
Wistron NeWeb Corp. P/N: 25.90215.001	PIFA	2.26	1.682674	5180 (Normal Mode)	12.72	18.71	20	0.0626	0.00626
				5240 (Normal Mode)	12.31	17.02	20	0.0570	0.00570
				5260 (Normal Mode)	18.38	68.87	20	0.2305	0.02305
				5320 (Normal Mode)	20.03	100.69	20	0.3371	0.03371
				5745 (Normal Mode)	17.34	54.20	20	0.1814	0.01814
				5805 (Normal Mode)	17.83	60.67	20	0.2031	0.02031

802.11b

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m2)	Power Density (mW/cm2)
Wistron NeWeb Corp. P/N: 25.90215.001	PIFA	2.41	1.74	2412	18.2	66.07	20	0.2289	0.02289
				2437	19.34	85.90	20	0.2977	0.02977
				2462	19.68	92.90	20	0.3219	0.03219

802.11g

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m2)	Power Density (mW/cm2)
Wistron NeWeb Corp. P/N: 25.90215.001	PIFA	2.41	1.74	2412	16.92	49.20	20	0.1705	0.01705
				2437	17.04	50.58	20	0.1753	0.01753
				2462	17.39	54.83	20	0.1900	0.01900

WARNING:

It is the responsibility of the installer to ensure that the EUT is a WLAN module and a specified antenna inside. Only the specified antennas listed above may be used. The use of any other antenna is expressly forbidden in accordance with FCC rules CFR 47 part 15.204.

NOTICE:

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits for an uncontrolled environment when installed as directed. This equipment should be installed and operated with the specified antenna listed in this report.

4. Appendix : Test Equipment

4.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1Ghz	Peak Power Analyzer	HP	8990A	3621A01269	01/02/2005	01/02/2006

Note: Calibration traceable to NIST or national or international standards.