

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B;
RSS-210 issue 9 Annex A, ICES-003 Issue 6:2016

FOR:

**Paradox Security Systems LTD.
Indoor Wireless PIR detector with
Anti Mask and Pet Immunity
Model: NV75MR
FCC ID: KDYNV75MR
IC: 2438A-NV75MR**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT.....	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions.....	11
7.3	Occupied bandwidth test.....	32
7.4	Antenna requirements.....	35
8	Unintentional emissions	36
8.1	Radiated emission measurements	36
9	APPENDIX A Test equipment and ancillaries used for tests.....	42
10	APPENDIX B Measurement uncertainties.....	43
11	APPENDIX C Test laboratory description	44
12	APPENDIX D Specification references	44
13	APPENDIX E Test equipment correction factors.....	45
14	APPENDIX F Abbreviations and acronyms.....	55
15	APPENDIX G Manufacturer’s declaration about periodic operation.....	56

1 Applicant information

Client name: Paradox Security Systems Ltd.
Address: 780 Industrial Boulevard, St.Eustache, Quebec J7R 5V3, Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik

2 Equipment under test attributes

Product name: Indoor Wireless PIR detector with Anti Mask and Pet Immunity
Product type: Transmitter
Model(s): NV75MR
Serial number: 059149
Hardware version: 575-5005-991
Software release: V1.00
Receipt date: 27-Dec-16

3 Manufacturer information

Manufacturer name: Paradox Security Systems Ltd.
Address: 780 Industrial Boulevard, St.Eustache, Quebec J7R 5V3, Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-Mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik





4 Test details

Project ID: 28739
Location: Primary: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Satellite: Hermon Laboratories Ltd. Hefetz-Haim 10, Tel Aviv 6744124, Israel
Test started: 21-Dec-16
Test completed: 25-Dec-16
Test specification(s): FCC 47CFR part 15, subpart C, §15.231 and subpart B;
RSS-210 issue 9 Annex A, ICES-003 issue 6:2016

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(a) / RSS-210, Section A1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	December 25, 2016	
	Mr.I. Zilberstein, test engineer		
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	December 29, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	January 31, 2017	


6 EUT description

6.1 General information

The EUT, model name NV75MR, is an Indoor Wireless PIR detector with Anti Mask and Pet Immunity. The EUT contains transmitter operating at 433.92 MHz.

The EUT is equipped with an integral antenna and is powered by two 1.5V Alkaline batteries type AA in series.

6.2 Test configuration

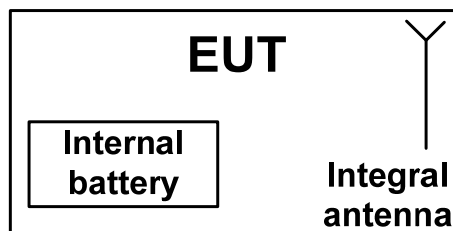

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment							
X	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Operating frequency		433.92 MHz					
Maximum rated output power		At transmitter 50 Ω RF output connector					
		Field strength at 3 m distance		86.4 dB(μV/m) – peak 69.0 dB(μV/m) -average			
Is transmitter output power variable?		X	No				
			Yes	continuous variable			
				stepped variable with stepsize		dB	
				minimum RF power		dBm	
	maximum RF power		dBm				
Antenna connection							
unique coupling		standard connector		X	integral		
				X	with temporary RF connector without temporary RF connector		
Antenna/s technical characteristics							
Type	Manufacturer	Model number		Gain			
Integral	LEVEN CO., Ltd.	Wire antenna 24AWG 105C 100X1.45MM, 0395-PH-00_B		0 dBi			
Transmitter aggregate data rate/s		1.67 kbps					
Type of modulation		OOK					
Modulating test signal (baseband)		ID code					
Transmitter power source							
X	Battery	Nominal rated voltage	2 x 1.5 VDC	Battery type	Alkaline type AA		
	DC	Nominal rated voltage	VDC				
	AC mains	Nominal rated voltage	VAC	Frequency			
Common power source for transmitter and receiver				X	yes	no	



Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

The transmission time was captured and shown in * Provided in Appendix G.

7.1.2.4 Plot 7.1.1.


7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test

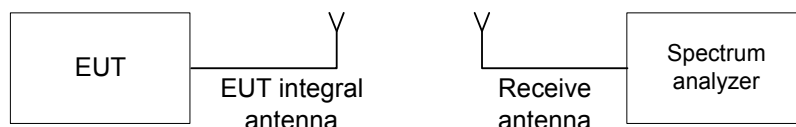




Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration*	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration*	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.2, Plot 7.1.3	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

* Provided in Appendix G.


Plot 7.1.1 Transmitter shut down test result

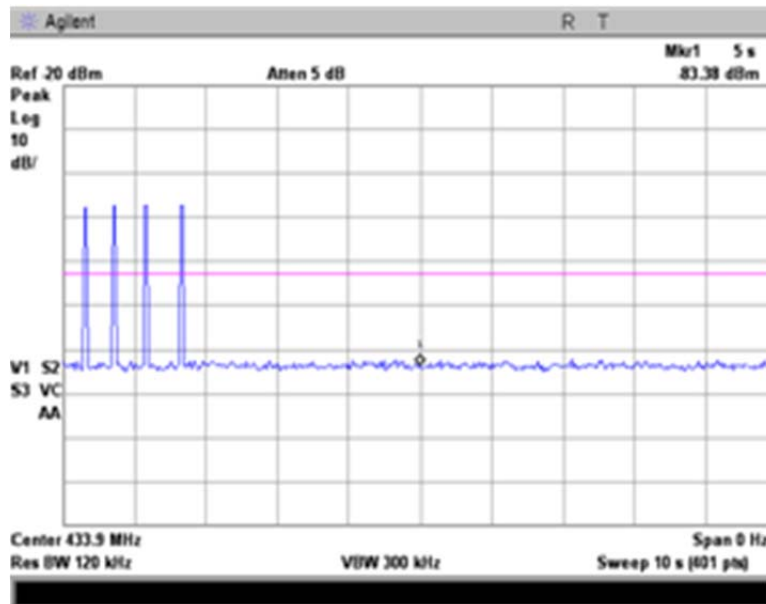




Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Plot 7.1.2 Polling / supervision transmission duration

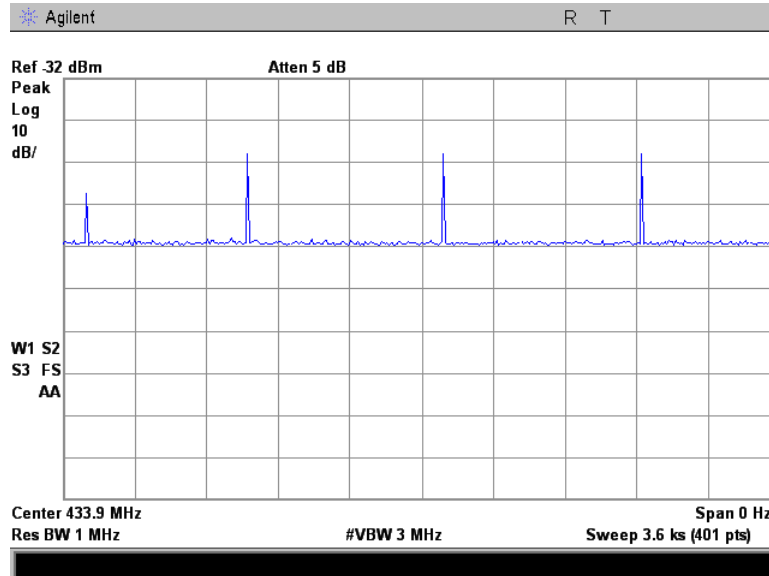

Plot 7.1.3 Polling / supervision pulse duration

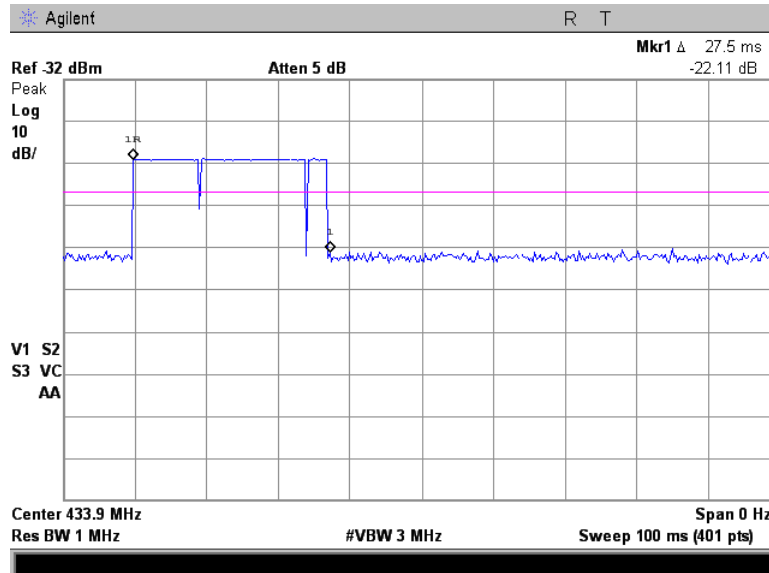



Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.1.2 Total duration of polling / supervision transmissions

Duration, ms	Repetition period, ms	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
27.5	NA	4x4	440

Reference numbers of test equipment used

HL 2909							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.92	100.8	80.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.8	60.8
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S_2} = Lim_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

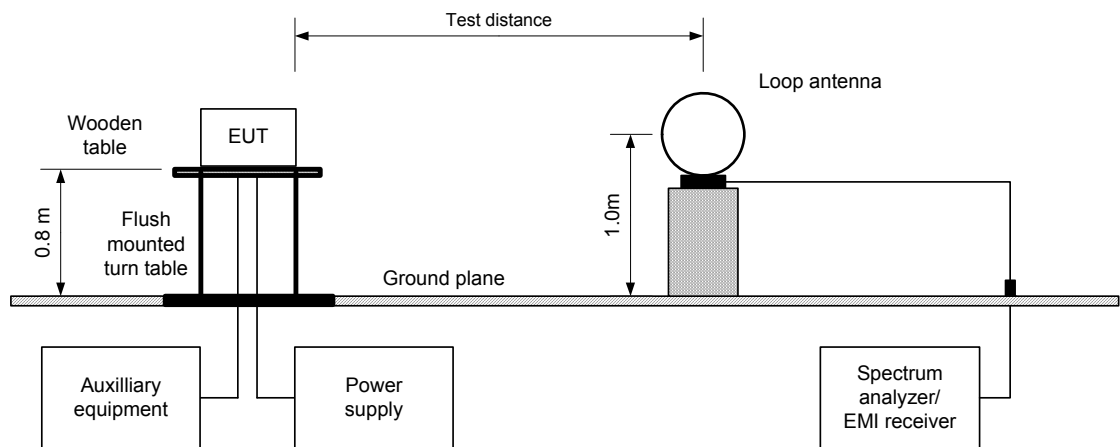



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz


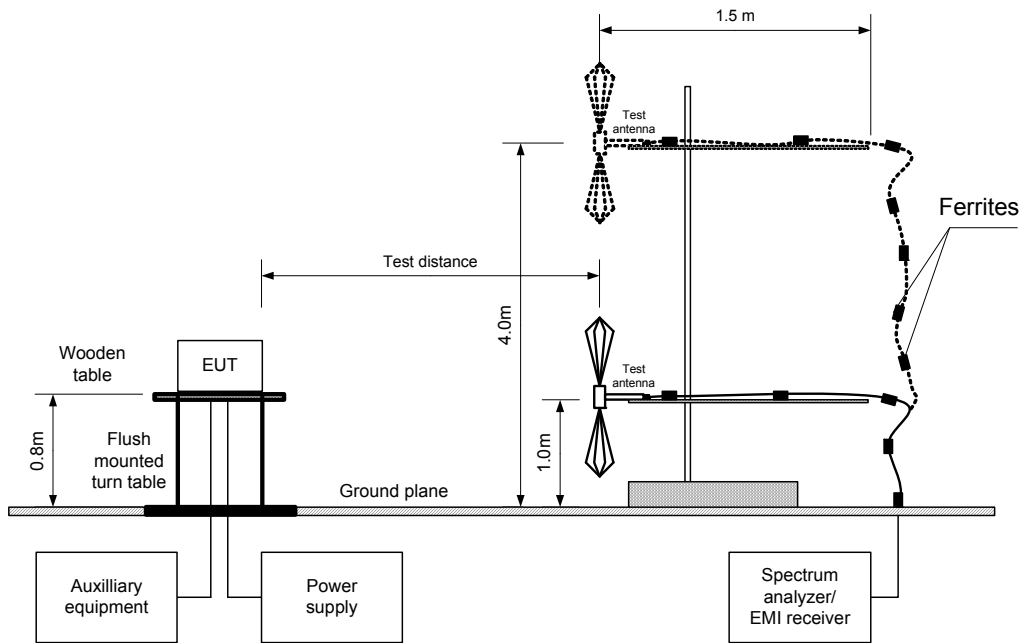


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz



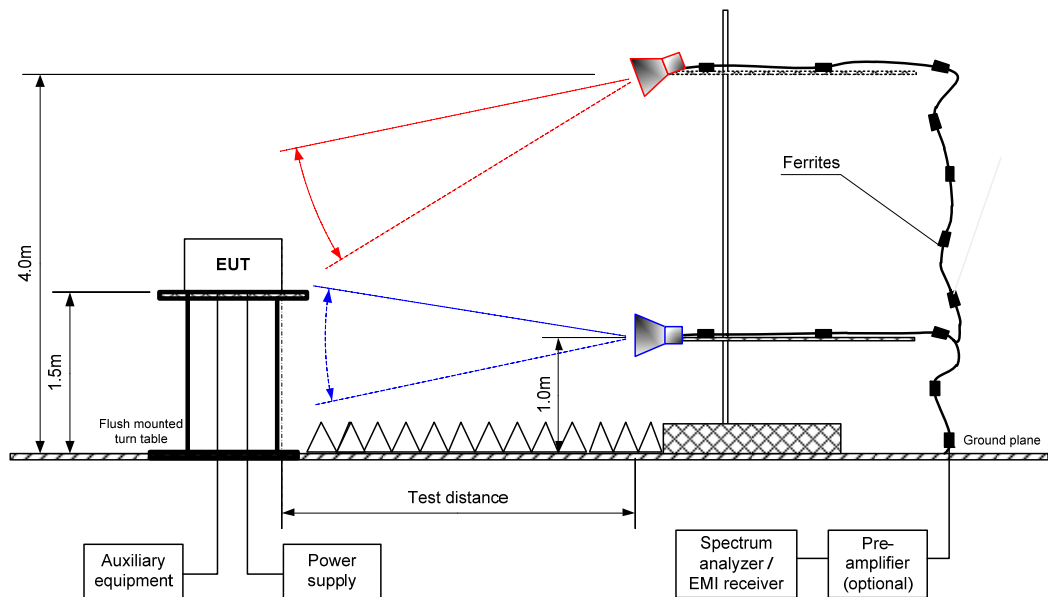

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: OOK
 MODULATING SIGNAL: ID code
 BIT RATE: 1.67 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 -4500.0 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 1.0 MHz (above 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission											
433.92	Vert	1.00	331	86.40	100.8	-14.4	86.40	69.04	80.8	-11.76	Pass
Spurious emissions											
867.855	Hor	1.00	67	62.06	80.8	-18.74	62.06	44.70	60.8	-16.10	Pass
1301.720	Hor	1.20	219	65.55	74.0	-8.45	65.55	48.19	54.0	-5.81	
2169.590	Hor	1.40	212	60.51	80.8	-20.29	60.51	43.15	60.8	-17.65	
3037.410	Vert.	1.40	5	54.93	80.8	-25.87	54.93	37.57	60.8	-23.23	
3905.295	Hor	1.32	5	49.82	74.0	-24.18	49.82	32.46	54.0	-21.54	
4339.125	Hor	1.54	105	40.68	74.0	-33.32	40.68	35.80	54.0	-25.00	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(μV/m)-Limit, dB(μV/m)

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
TxON Duration, ms	Period, 100 ms	Duration, ms	Period, ms		
13.552	1	N/A	N/A	NA	-17.36

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$$

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 1915	HL 3818	HL 4295	HL 4353	HL 4535
HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575	HL 4603	HL 4604
HL 5101							

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: OOK
 BIT RATE: 1.67 kbps
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1915	HL 3818	HL 4295	HL 4353	HL 4535	HL 4541
HL 4542	HL 4543	HL 4549	HL 4551	HL 4575	HL 4604	HL 5101	

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 – 0.11	8.37625 – 8.38675	73 – 74.6	399.9 – 410	2690 – 2900	10.6 – 12.7
0.495 – 0.505	8.41425 – 8.41475	74.8 – 75.2	608 – 614	3260 – 3267	13.25 – 13.4
2.1735 – 2.1905	12.290 – 12.293	108 – 121.94	960 – 1240	3332 – 3339	14.47 – 14.5
4.125 – 4.128	12.51975 – 12.52025	123 – 138	1300 – 1427	3345.8 – 3358	15.35 – 16.2
4.17725 – 4.17775	12.57675 – 12.57725	149.9 – 150.05	1435 – 1626.5	3600 – 4400	17.7 – 21.4
4.20725 – 4.20775	13.36 – 13.41	156.52475 – 156.52525	1645.5 – 1646.5	4500 – 5150	22.01 – 23.12
6.215 – 6.218	16.420 – 16.423	156.7 – 156.9	1660 – 1710	5350 – 5460	23.6 – 24
6.26775 – 6.26825	16.69475 – 16.69525	162.0125 – 167.17	1718.8 – 1722.2	7250 – 7750	31.2 – 31.8
6.31175 – 6.31225	16.80425 – 16.80475	167.72 – 173.2	2200 – 2300	8025 – 8500	36.43 – 36.5
8.291 – 8.294	25.5 – 25.67	240 – 285	2310 – 2390	9000 – 9200	Above 38.6
8.362 – 8.366	37.5 – 38.25	322 – 335.4	2483.5 – 2500	9300 – 9500	

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 – 0.11	8.291 – 8.294	16.80425 – 16.80475	399.9 – 410	3260 – 3267	10.6 – 12.7
2.1735 – 2.190	8.362 – 8.366	25.5 – 25.67	608 – 614	3332 – 3339	13.25 – 13.4
3.020 – 3.026	8.37625 – 8.38675	37.5 – 38.25	960 – 1427	3345.8 – 3358	14.47 – 14.5
4.125 – 4.128	8.41425 – 8.41475	73 – 74.6	1435 – 1626.5	3500 – 4400	15.35 – 16.2
4.17725 – 4.17775	12.290 – 12.293	74.8 – 75.2	1645.5 – 1646.5	4500 – 5150	17.7 – 21.4
4.20725 – 4.20775	12.51975 – 12.52025	108 – 138	1660 – 1710	5350 – 5460	22.01 – 23.12
5.677 – 5.683	12.57675 – 12.57725	156.52475 – 156.52525	1718.8 – 1722.2	7250 – 7750	23.6 – 24.0
6.215 – 6.218	13.36 – 13.41	156.7 – 156.9	2200 – 2300	8025 – 8500	31.2 – 31.8
6.26775 – 6.26825	16.42 – 16.423	240 – 285	2310 – 2390	9000 – 9200	36.43 – 36.5
6.31175 – 6.31225	16.69475 – 16.69525	322 – 335.4	2655 – 2900	9300 – 9500	Above 38.6




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

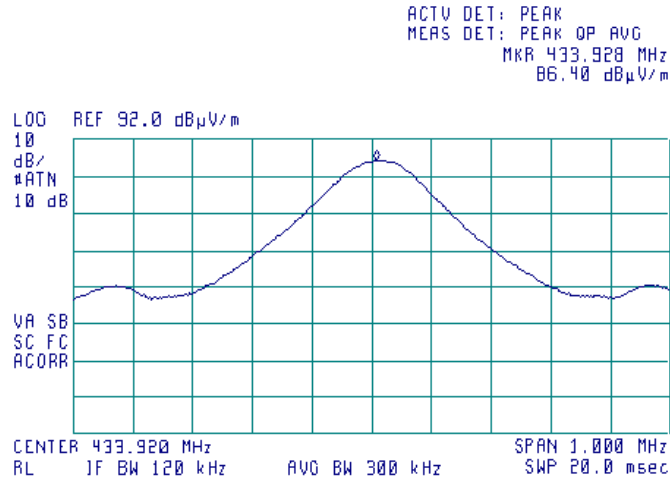

Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

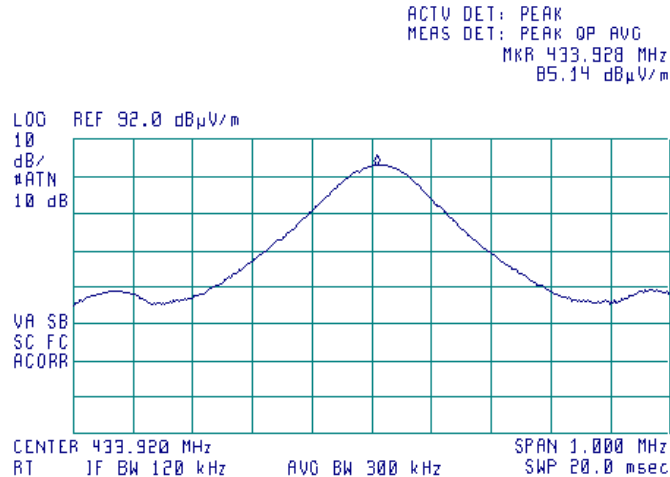




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

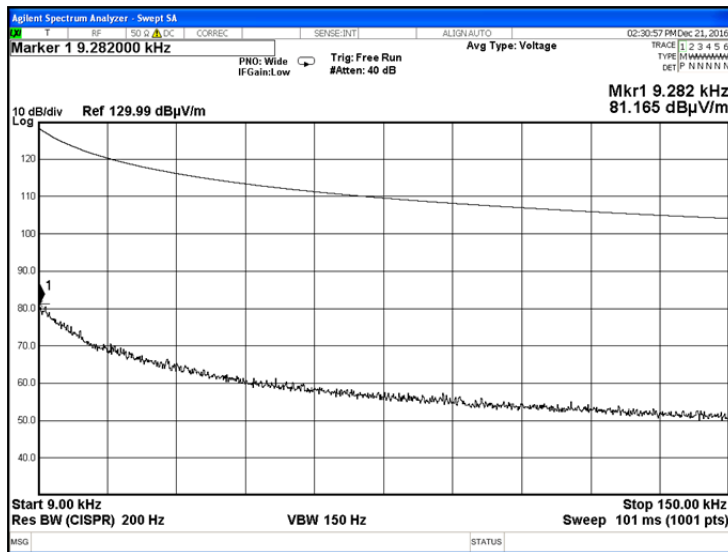






HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

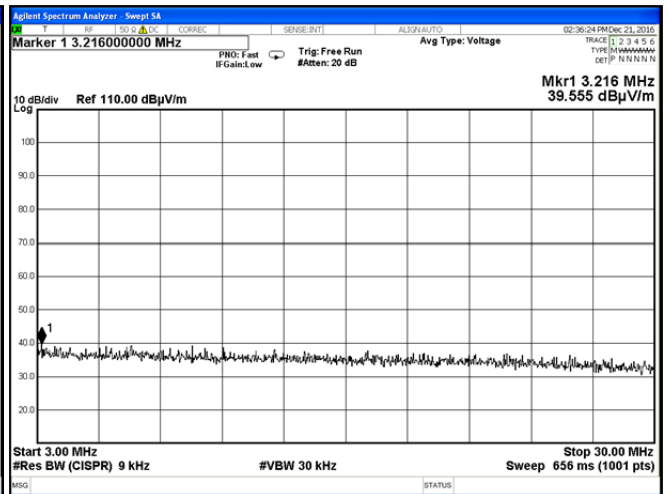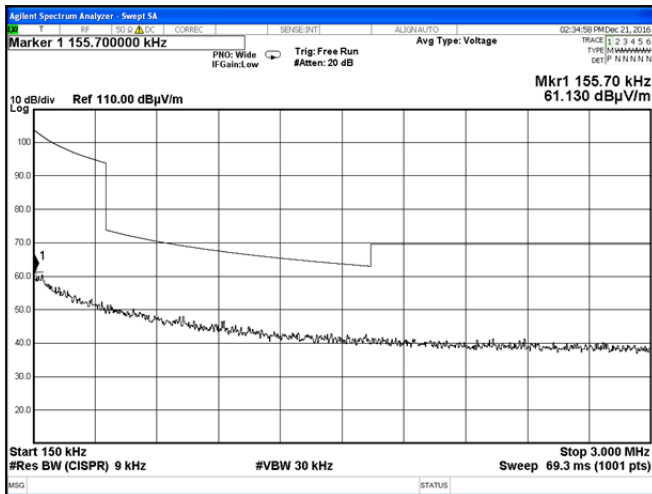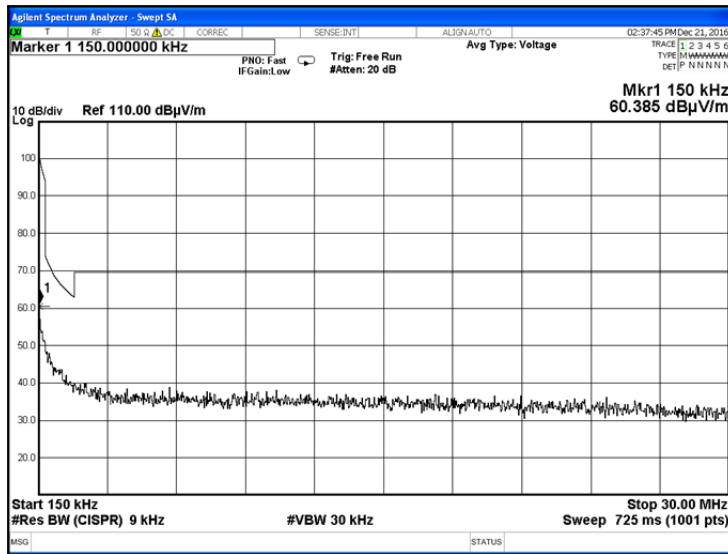





HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			



Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

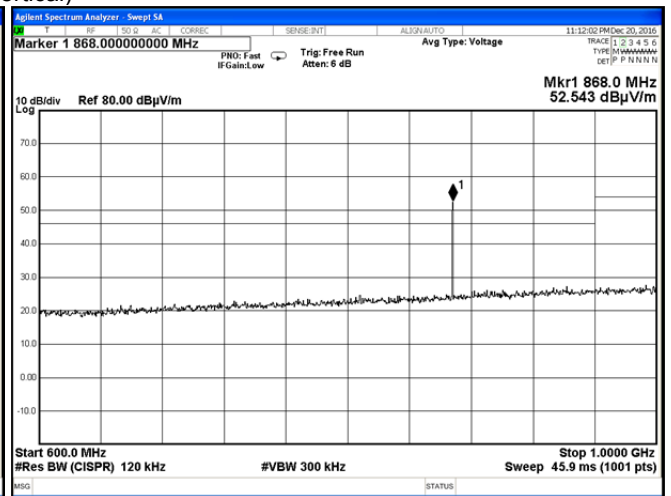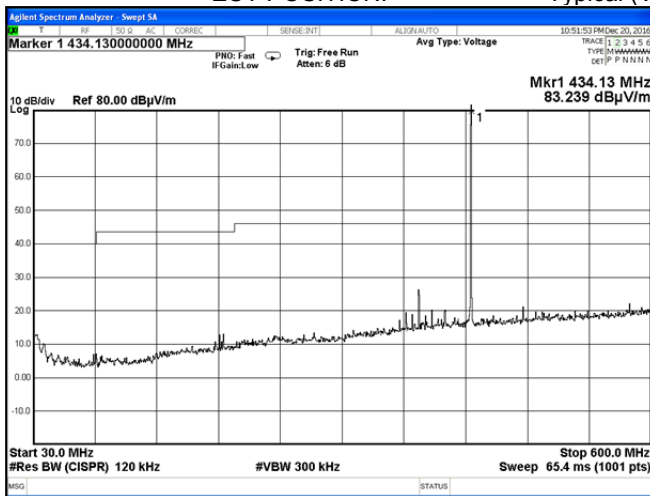

Plot 7.2.6 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

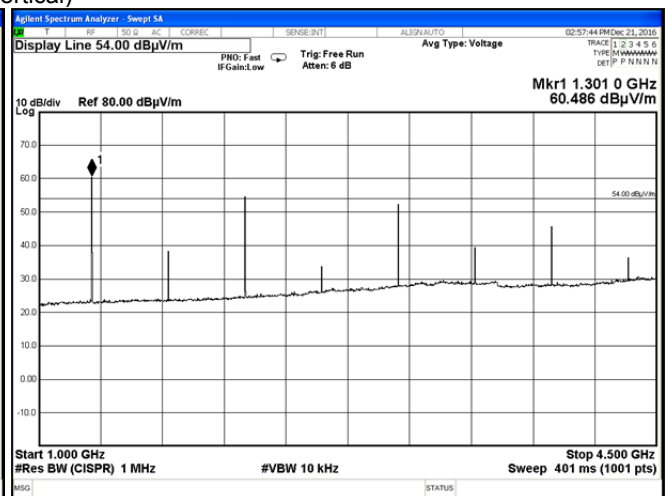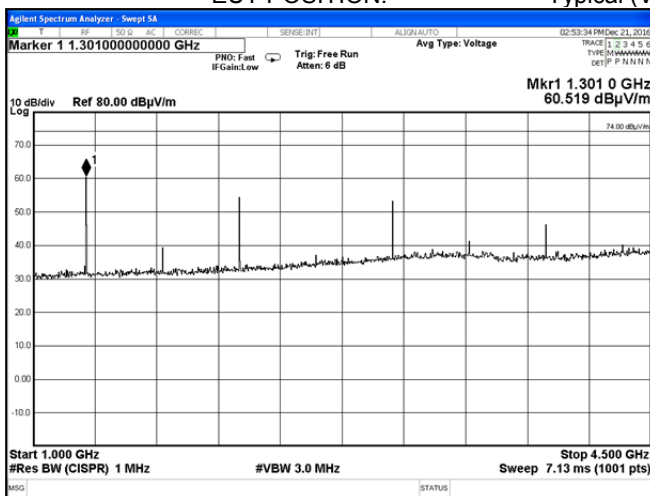




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.7 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

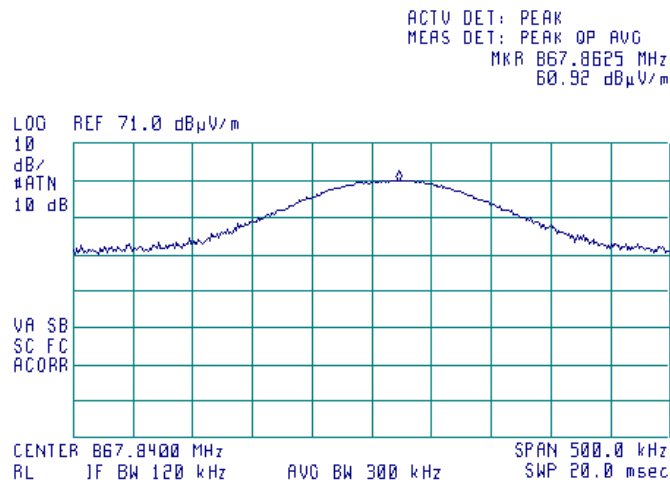

Plot 7.2.8 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

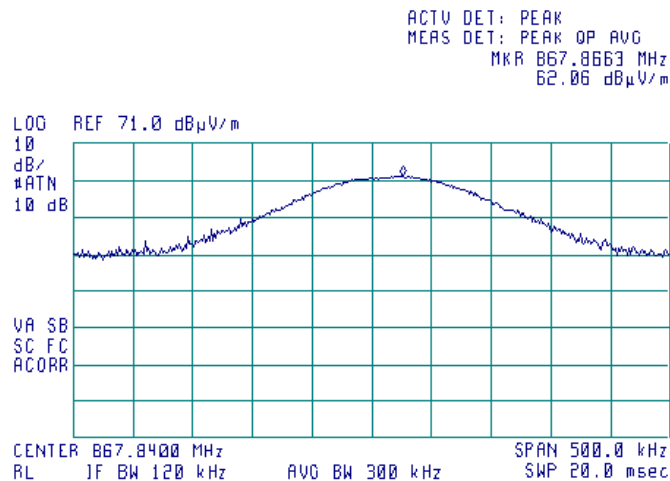




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.9 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

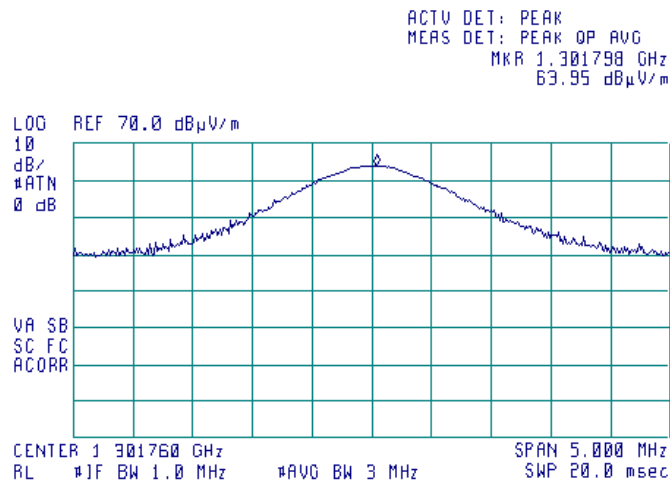

Plot 7.2.10 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

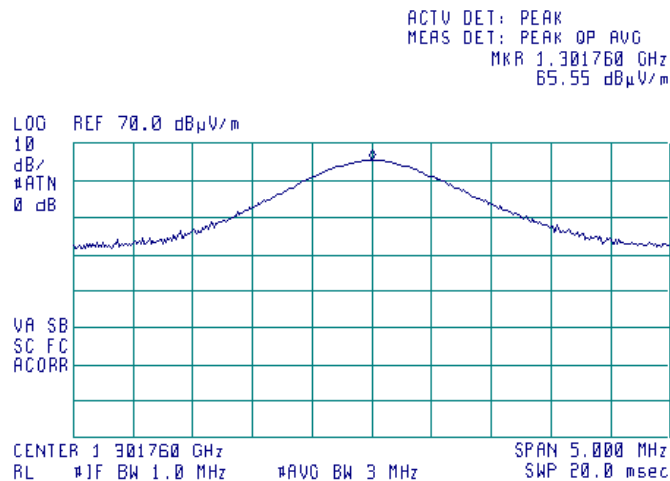




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.11 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

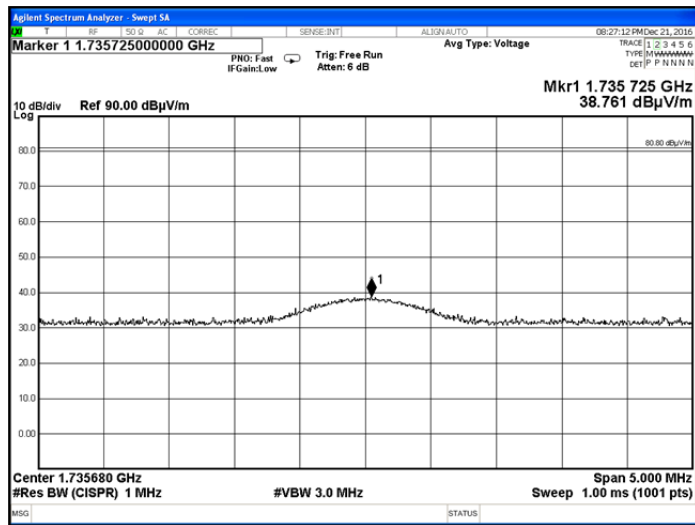

Plot 7.2.12 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

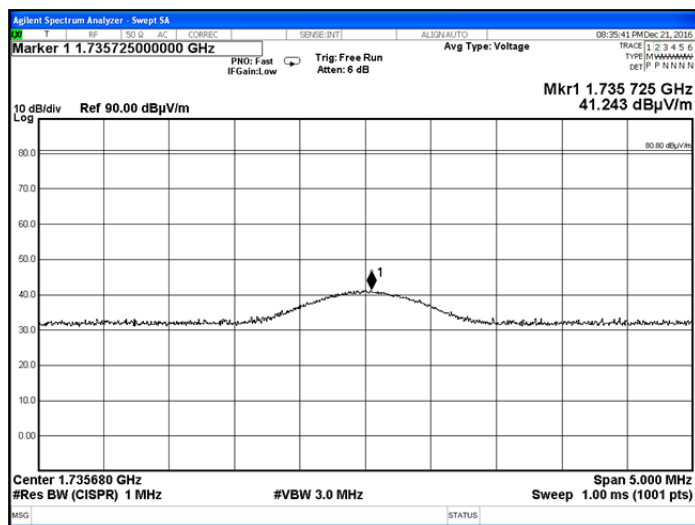




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.13 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

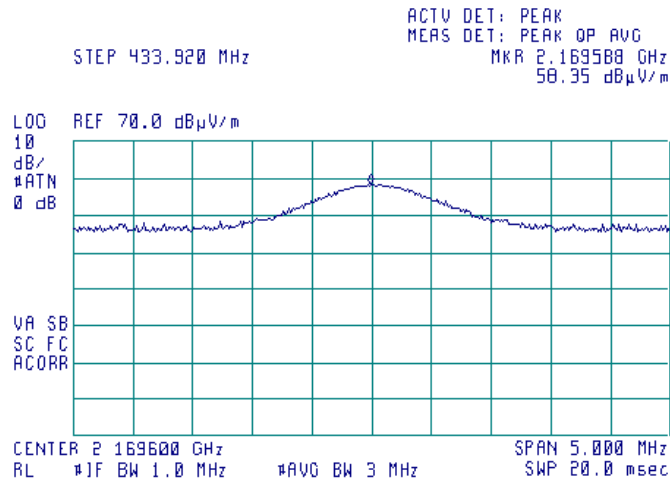

Plot 7.2.14 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

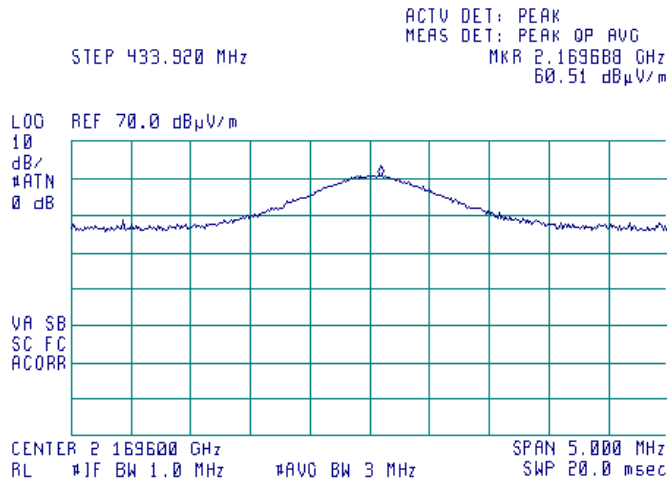




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.15 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

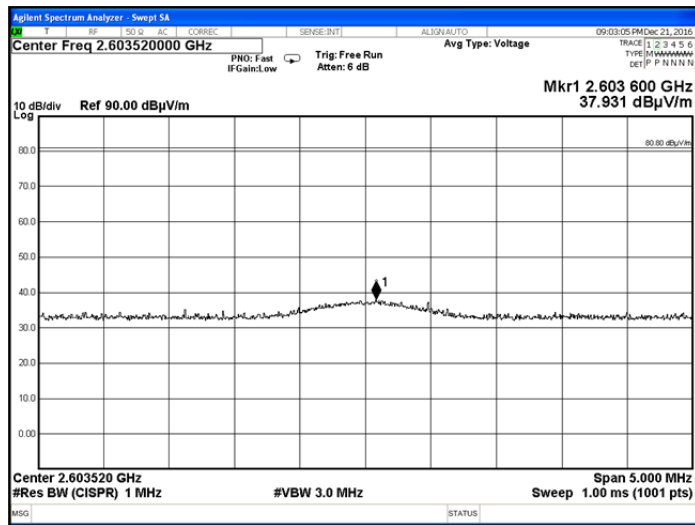

Plot 7.2.16 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

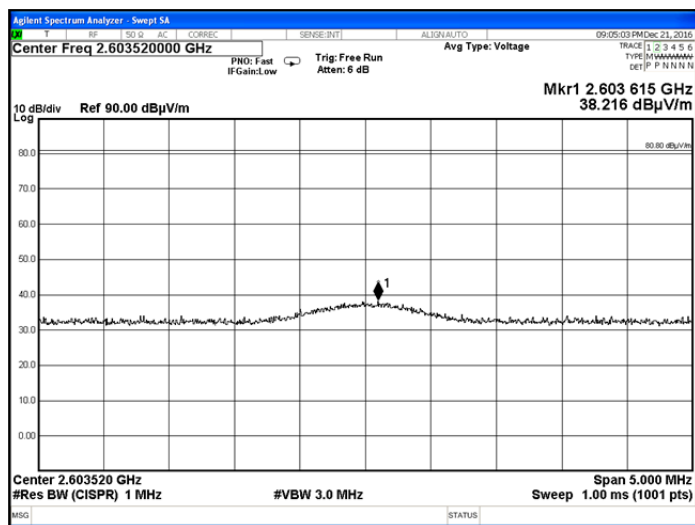




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.17 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

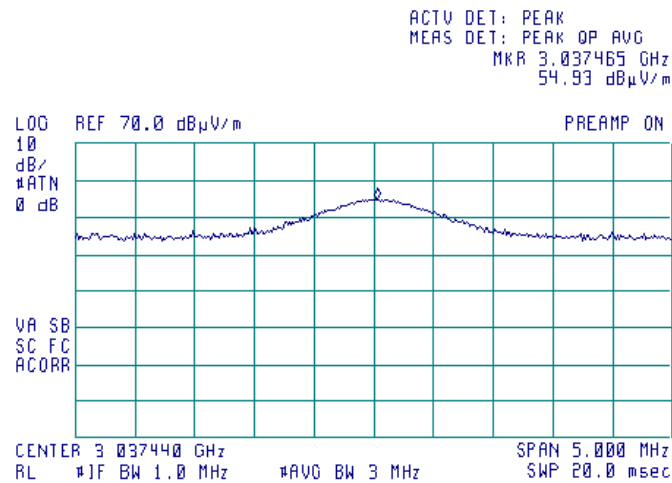

Plot 7.2.18 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

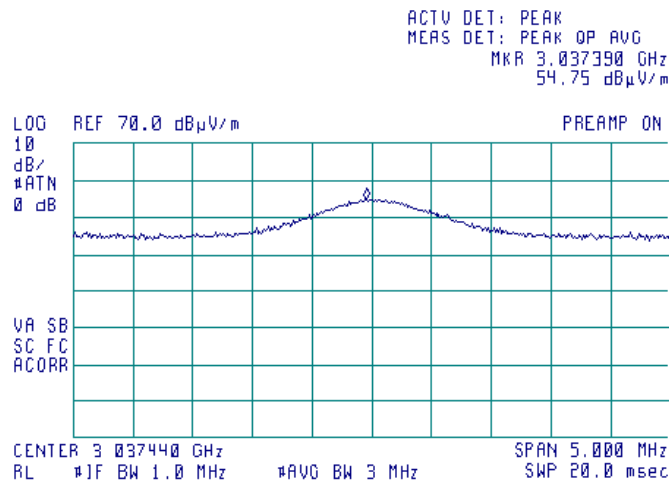




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.19 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

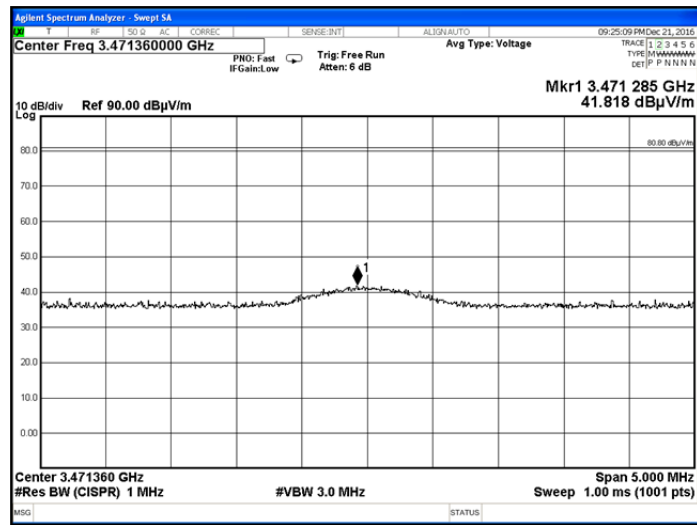

Plot 7.2.20 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

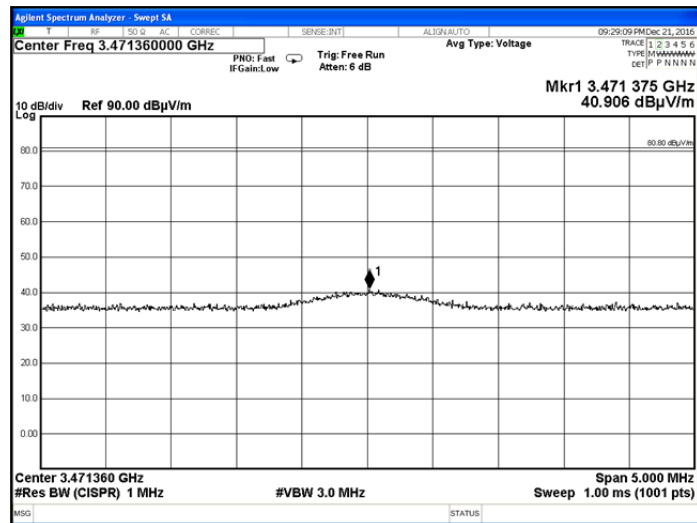




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.21 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

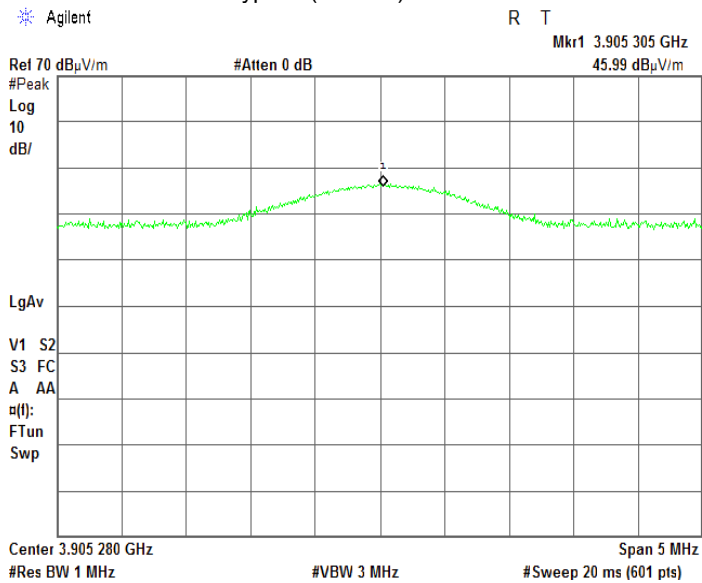

Plot 7.2.22 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

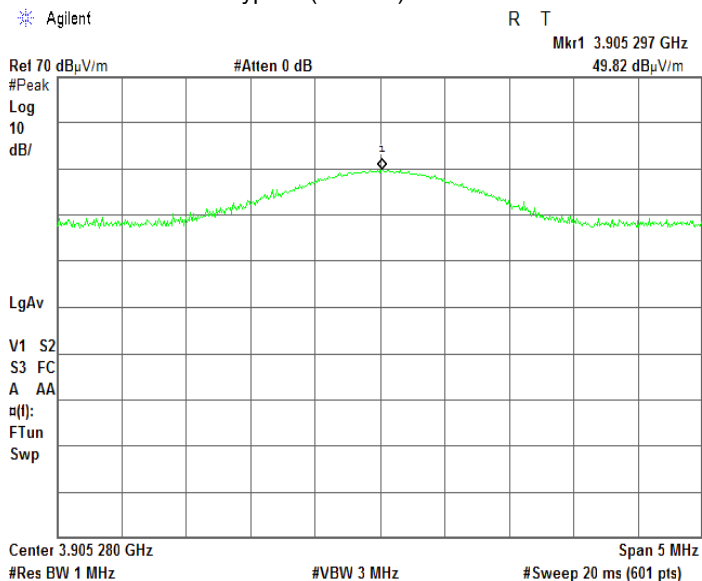




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.23 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

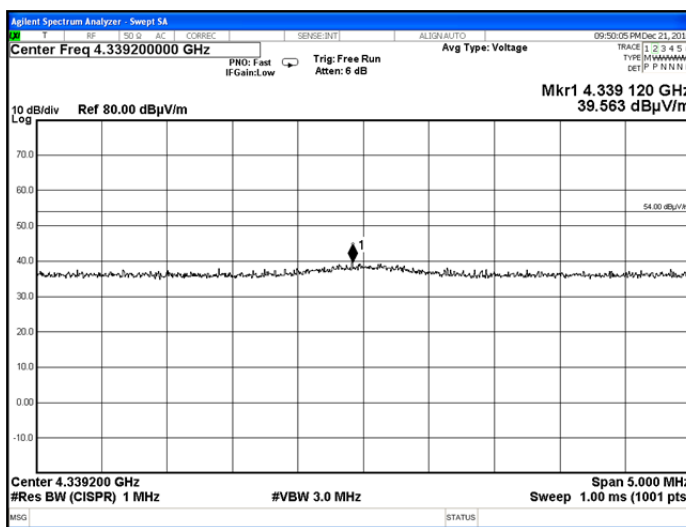

Plot 7.2.24 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)


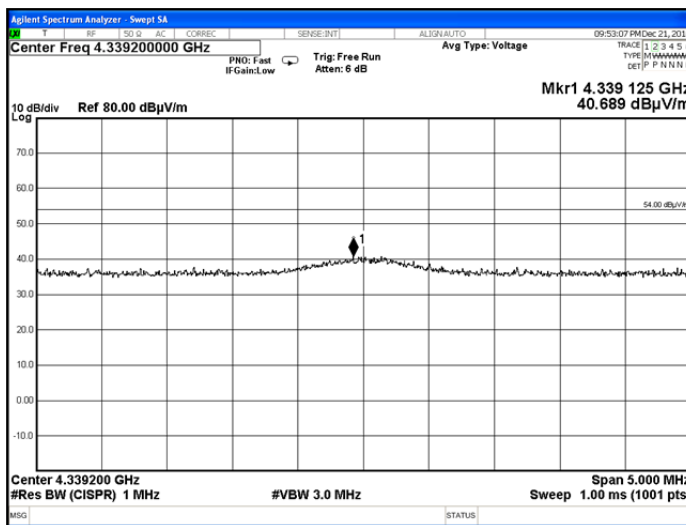




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions	
Test procedure: ANSI C63.10 sections 6.5, 6.6	
Test mode: Compliance	Verdict: PASS
Date(s): 21-Dec-16	
Temperature: 25.3 °C	Relative Humidity: 34 %
Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:	

Plot 7.2.25 Transmission pulse duration

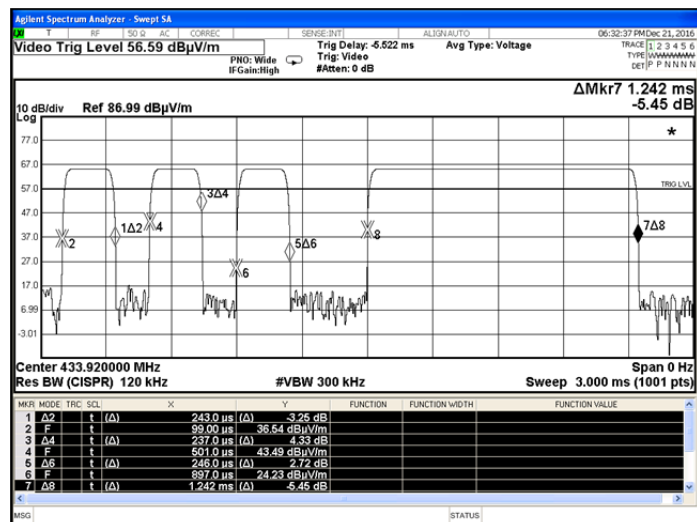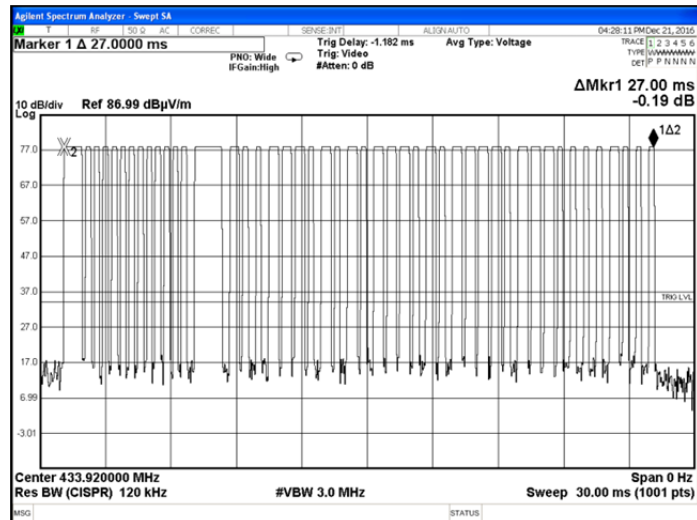


Tx ON duration = 1.242 ms x 2= 2.482 ms
 246.0 usec x 45= 11.070 ms
 11.070 ms+2.482 ms =13.552 ms



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.3 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.26 Transmission pulse period

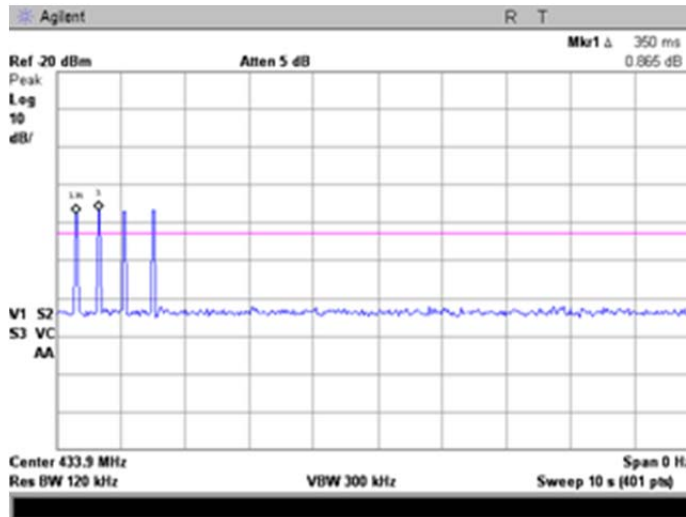



Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 – 900	20.0	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 MODULATION: OOK
 BIT RATE: 1.67 kbps

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	30.59	0.25	1084.8	-1054.21	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	42.417	0.25	1084.8	-1042.383	Pass

Reference numbers of test equipment used

HL 2909							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

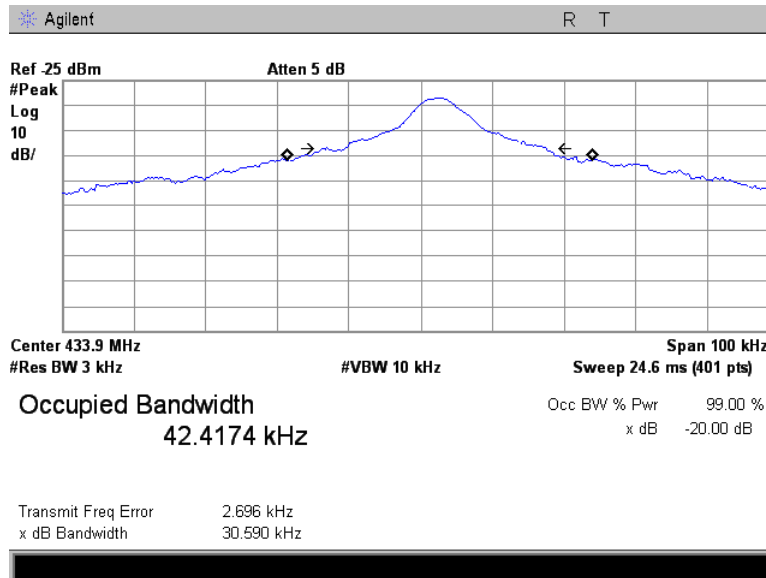



Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 25-Dec-16			
Temperature: 23 °C	Relative Humidity: 44 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

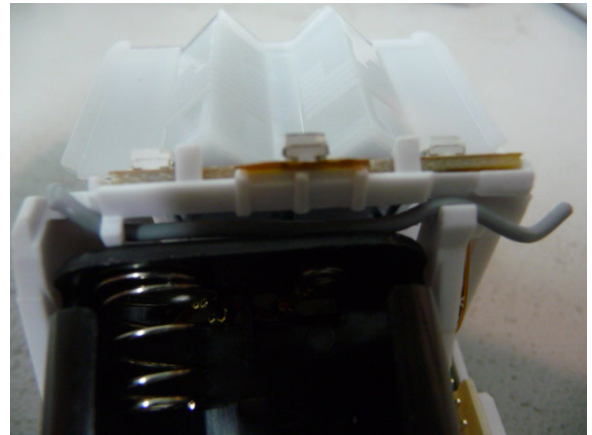



Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 – 88	29.5*	40.0	39.0	49.5*
88 – 216	33.0*	43.5	43.5	54.0*
216 – 960	35.5*	46.0	46.4	56.9*
960 – 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.


8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.



Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

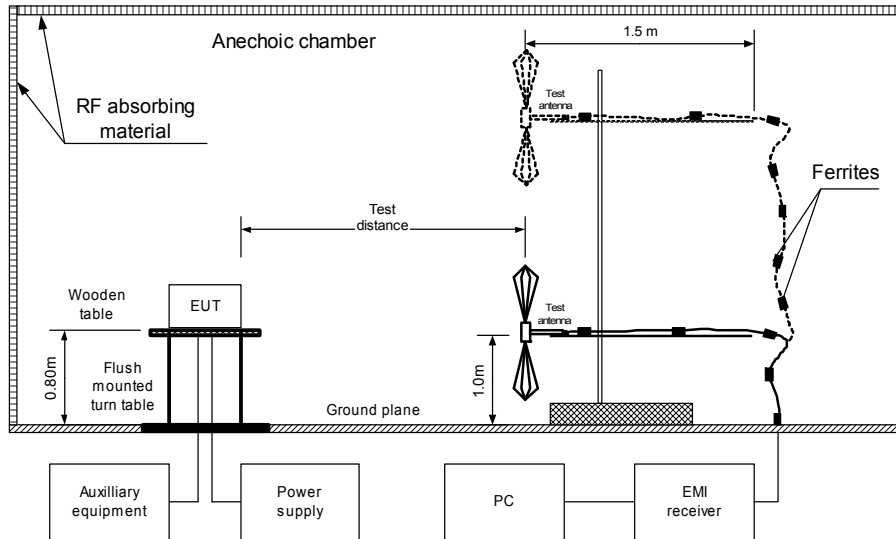



Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Photograph 8.1.1 Setup for final radiated emission measurements, general view



Photograph 8.1.2 Setup for final radiated emission measurements, EUT close view





Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 2500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission found										

*- Margin = Measured emission – specification limit.
**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575
HL 4603	HL 4604						

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 – 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by

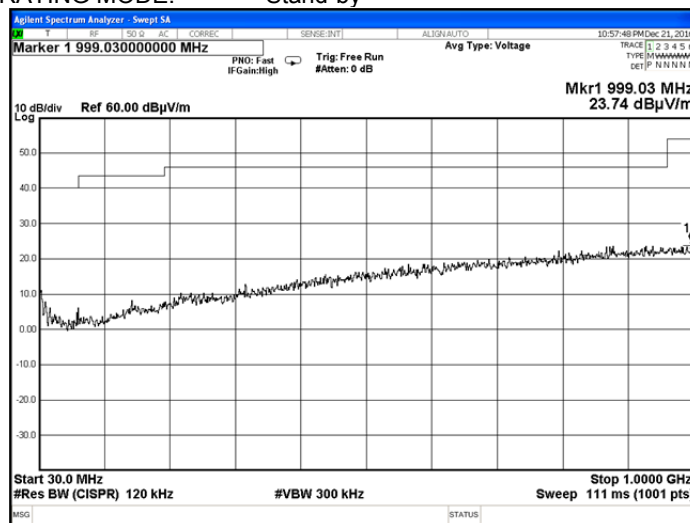

Plot 8.1.2 Radiated emission measurements in 30 – 1000 MHz range, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by

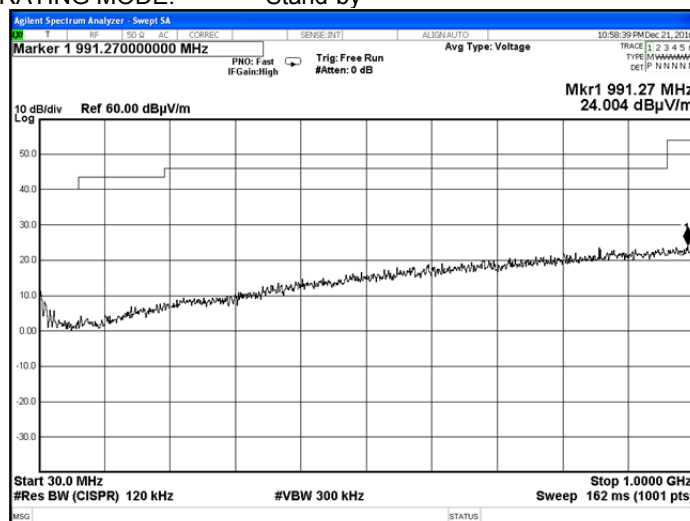





HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / ICES-003, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Dec-16			
Temperature: 25.6 °C	Relative Humidity: 34 %	Air Pressure: 1016 hPa	Power: 3 VDC
Remarks:			



Plot 8.1.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by

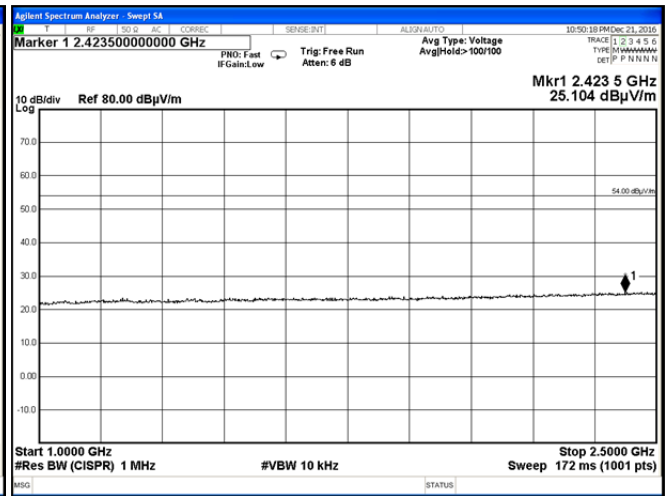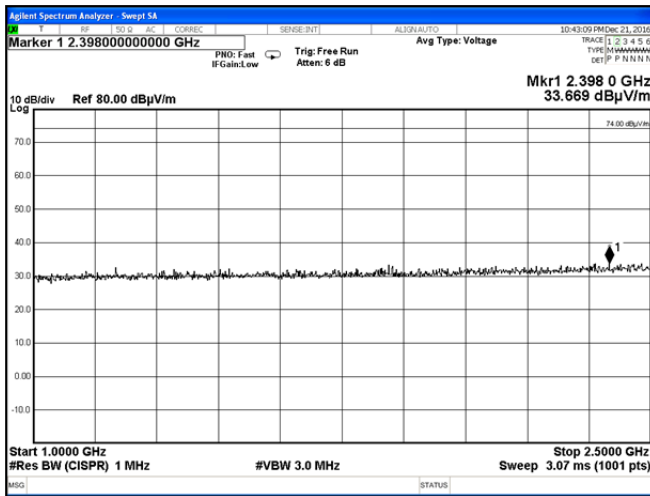

Plot 8.1.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by

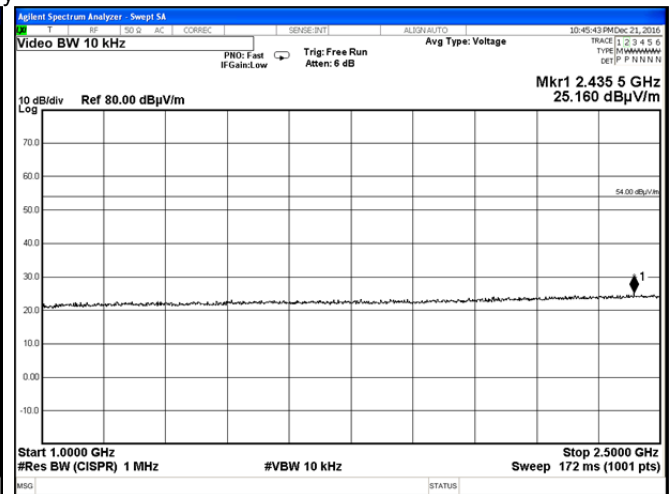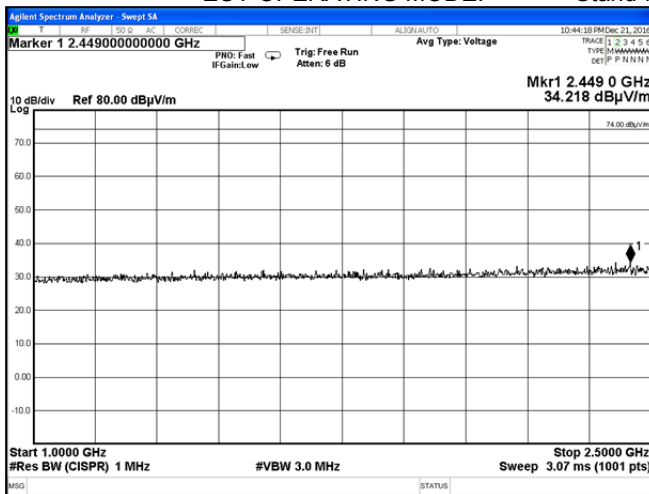



9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-16	27-Oct-17
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
1915	Antenna, Loop, Active Receiving, 1 kHz - 30 MHz	EMC Test Systems	6507	1457	18-Jan-16	18-Jan-17
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	21-Feb-16	21-Feb-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
4295	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	16-Oct-16	16-Oct-17
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4535	Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	30-May-16	30-May-17
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	25-Sep-16	25-Sep-17
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	10-Mar-16	10-Mar-17
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	03-Mar-16	03-Mar-17
4549	Cable RF, 6.8 m, N/N - type, up to 3 GHz	Suhner Switzerland	NA	07262	10-Mar-16	10-Mar-17
4551	Cable RF, 6.6 m, N/N - type, up to 18 GHz	Suhner Switzerland	Sucoflex 104E	22200/4E	10-Mar-16	10-Mar-17
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	17-Feb-16	17-Mar-17
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	14-Oct-16	14-Oct-17
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	10-May-16	10-May-17
5101	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500847/6A	26-Jul-16	26-Jul-17

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

47CFR part 15: 2015	Radio Frequency Devices.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 9: 2016	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 4: 2014	General Requirements for Compliance of Radio Apparatus
ICES-003: 2016, Issue 6	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
EMC Test Systems
Model 6507, S/N 1457, HL 1915

Frequency, kHz	Measured antenna factor, dBS/m
10	-22.7
20	-27.6
50	-31.3
75	-31.8
100	-32.2
150	-32.3
250	-32.6
500	-32.8
750	-33.0
1000	-33.1
2000	-33.4
3000	-33.7
4000	-34.0
5000	-34.3
10000	-34.9
15000	-35.6
20000	-35.9
25000	-36.1
30000	-36.7

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.



Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field strength in dB(μV/m).



Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Horn antenna
Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m



Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner, S/N 4295,
Sucoflex P103, HL 4295

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	5000	2.09	10200	2.97	15400	3.63
30	0.18	5100	2.12	10300	3.01	15500	3.65
50	0.23	5200	2.13	10400	3.00	15600	3.63
100	0.31	5300	2.16	10500	3.05	15700	3.64
200	0.38	5400	2.19	10600	3.09	15800	3.64
300	0.43	5500	2.21	10700	3.05	15900	3.66
400	0.52	5600	2.21	10800	3.09	16000	3.71
500	0.60	5700	2.24	10900	3.10	16100	3.67
600	0.67	5800	2.24	11000	3.08	16200	3.71
700	0.72	5900	2.25	11100	3.11	16300	3.70
800	0.78	6000	2.27	11200	3.12	16400	3.71
900	0.83	6100	2.25	11300	3.12	16500	3.72
1000	0.89	6200	2.29	11400	3.20	16600	3.84
1100	0.94	6300	2.34	11500	3.16	16700	3.78
1200	0.98	6400	2.37	11600	3.16	16800	3.85
1300	1.03	6500	2.33	11700	3.20	16900	3.88
1400	1.06	6600	2.34	11800	3.19	17000	3.85
1500	1.11	6700	2.39	11900	3.21	17100	3.88
1600	1.14	6800	2.46	12000	3.28	17200	3.92
1700	1.19	6900	2.45	12100	3.23	17300	3.90
1800	1.22	7000	2.44	12200	3.26	17400	4.00
1900	1.26	7100	2.43	12300	3.30	17500	4.02
2000	1.30	7200	2.44	12400	3.25	17600	4.00
2100	1.34	7300	2.51	12500	3.26	17700	3.96
2200	1.37	7400	2.54	12600	3.30	17800	4.01
2300	1.40	7500	2.49	12700	3.26	17900	4.02
2400	1.44	7600	2.52	12800	3.34	18000	4.08
2500	1.47	7700	2.59	12900	3.37		
2600	1.50	7800	2.57	13000	3.30		
2700	1.55	7900	2.55	13100	3.35		
2800	1.58	8000	2.57	13200	3.31		
2900	1.60	8100	2.58	13300	3.33		
3000	1.63	8200	2.64	13400	3.42		
3100	1.64	8300	2.70	13500	3.43		
3200	1.67	8400	2.65	13600	3.40		
3300	1.69	8500	2.66	13700	3.47		
3400	1.73	8600	2.68	13800	3.45		
3500	1.74	8700	2.70	13900	3.43		
3600	1.76	8800	2.74	14000	3.52		
3700	1.79	8900	2.74	14100	3.51		
3800	1.82	9000	2.76	14200	3.54		
3900	1.85	9100	2.82	14300	3.55		
4000	1.87	9200	2.79	14400	3.52		
4100	1.90	9300	2.82	14500	3.52		
4200	1.92	9400	2.83	14600	3.56		
4300	1.93	9500	2.83	14700	3.55		
4400	1.94	9600	2.86	14800	3.55		
4500	1.97	9700	2.93	14900	3.59		
4600	1.99	9800	2.89	15000	3.56		
4700	2.01	9900	2.91	15100	3.59		
4800	2.02	10000	2.94	15200	3.59		
4900	2.04	10100	2.94	15300	3.59		



Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



Cable loss
Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type
Suhner Switzerland, HL 4535

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	1700	1.79	4400	3.53
15	0.13	1800	1.86	4500	3.60
20	0.15	1900	1.93	4600	3.72
30	0.18	2000	2.00	4700	3.80
40	0.21	2100	2.06	4800	3.87
50	0.24	2200	2.13	4900	3.94
60	0.26	2300	2.19	5000	3.99
70	0.29	2400	2.25	5100	4.06
80	0.31	2500	2.32	5200	4.12
90	0.33	2600	2.38	5300	4.17
100	0.35	2700	2.45	5400	4.25
150	0.43	2800	2.51	5500	4.31
200	0.50	2900	2.57	5600	4.40
300	0.63	3000	2.64	5700	4.47
400	0.74	3100	2.73	5800	4.54
500	0.85	3200	2.79	5900	4.64
600	0.94	3300	2.86	6000	4.73
700	1.03	3400	2.91	6100	4.79
800	1.12	3500	2.97	6200	4.89
900	1.20	3600	3.02	6300	5.00
1000	1.28	3700	3.07	6400	5.06
1100	1.35	3800	3.14	6500	5.13
1200	1.43	3900	3.20		
1300	1.50	4000	3.25		
1400	1.58	4100	3.32		
1500	1.65	4200	3.38		
1600	1.72	4300	3.46		



Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		



Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,
SF106A/11N/11N/6000MM, S/N 500847/6A
HL 5101

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.42
50	0.22	6000	2.53
100	0.31	6500	2.65
200	0.43	7000	2.76
300	0.53	7500	2.86
400	0.62	8000	2.96
500	0.69	8500	3.06
600	0.76	9000	3.16
700	0.82	9500	3.26
800	0.87	10000	3.35
900	0.93	10500	3.44
1000	0.98	11000	3.54
1100	1.03	11500	3.62
1200	1.08	12000	3.70
1300	1.12	12500	3.80
1400	1.17	13000	3.88
1500	1.21	13500	3.97
1600	1.25	14000	4.04
1700	1.29	14500	4.13
1800	1.33	15000	4.22
1900	1.37	15500	4.31
2000	1.41	16000	4.39
2500	1.59	16500	4.47
3000	1.75	17000	4.54
3500	1.90	17500	4.61
4000	2.04	18000	4.68
4500	2.17		
5000	2.30		



14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration about periodic operation

P ▲ R ▲ D O X™

December 1st, 2016

To: Hermon Laboratories

Attention: Mr. Michael Nikishin and Ms. Ella Pitt

Manufacturer's Declaration

We, Paradox Security Systems Ltd. located in 780 Industriel Boulevard St.Eustache, Quebec J7R 5V3, Canada declare under our sole responsibility that the product Indoor Wireless PIR Detector NV75MR is operate on 433.92 MHz and designed to comply and satisfy periodic operational requirements.

NV75MR does not allow continuous transmitting (such as voice, video and radio control).

The detector NV75MR is not manually operated device.

The transmissions of NV75MR are not periodical and occur upon intrusion only.

NV75MR is an intrusion alarm system device and will send automatically its supervision status to control panel in a certain interval. This interval will be randomly selected between 17 minutes and 20 minutes.

Since, there is no periodical behavior except supervision transmissions, there are no predetermined intervals of any kind included in device's algorithm.



Alex Chaplik
Certification Engineer

Ref : FCC Declaration NV75MR_rev0

780 boul. Industriel, St-Eustache (Montréal), Québec, Canada J7R 5V3 Tel. : (450) 491-7444
PARADOX.COM

END OF DOCUMENT