

Tested By:Hong, Report No.:06096991

Scan Settings (1 Range)

----- Frequencies -----

----- Receiver Settings -----

Start

Stop

Step

IF BW

Detector

M-Time

Atten

Preamp

OpRge

150k

30M

5k

10k

PK+AV

10ms

AUTO

LN

OFF

60dB

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.

Start

Stop

Name

2

1

9k

30M


EW0699

12

9k

30M

EW0192

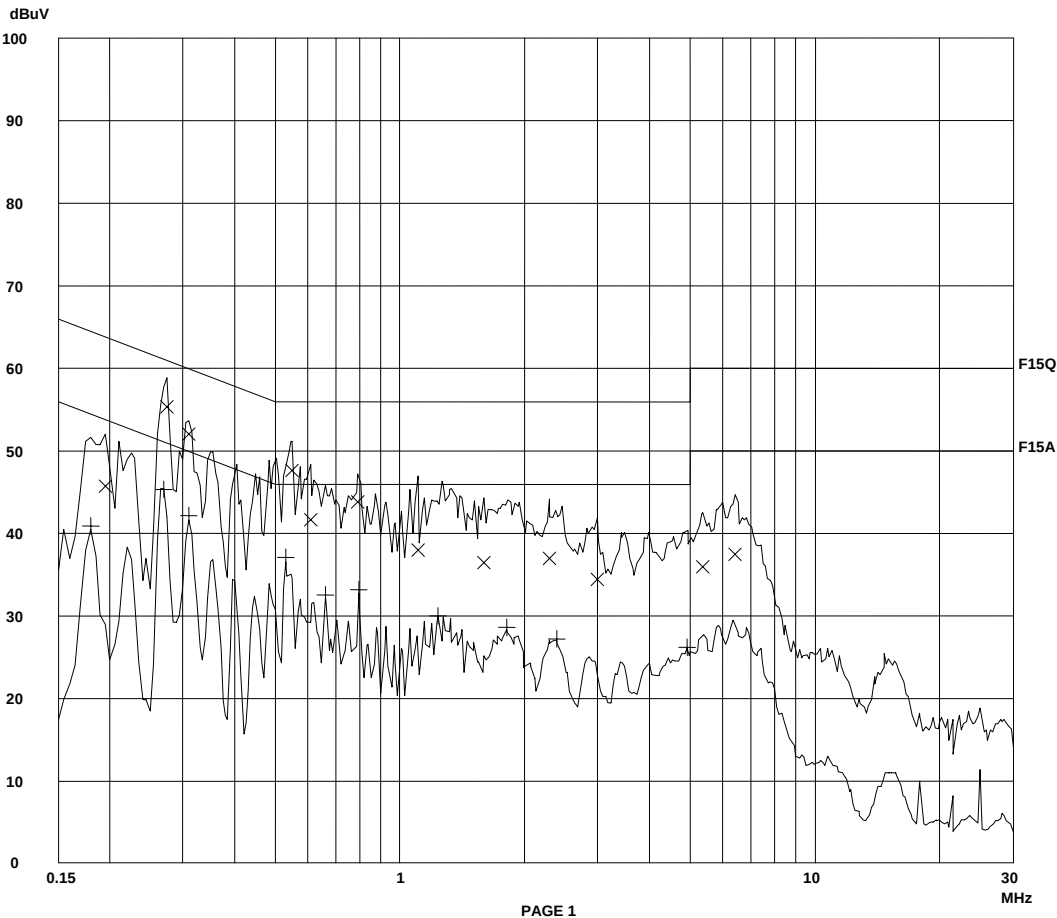

Report No.: 06096991
Talk Mode
AC Mains “L”

Tested By: Hong, Report No.: 06096991

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
------------------	------------------	------------------

0.19500	45.7	63.9
0.27500	55.3	61.0
0.31000	51.9	60.0
0.55000	47.5	56.0
0.61000	41.6	56.0
0.79000	43.8	56.0
1.10500	37.9	56.0
1.59500	36.4	56.0
2.29500	36.9	56.0
2.98500	34.4	56.0
5.37500	35.9	60.0
6.44000	37.4	60.0

Frequency MHz	AV Level dBuV	AV Limit dBuV
------------------	------------------	------------------

0.18000	40.8	57.1
0.27000	45.3	52.7
0.31000	42.1	51.2
0.53000	37.0	46.0
0.66000	32.4	46.0
0.79500	33.1	46.0
1.23500	29.9	46.0
1.80500	28.5	46.0
2.38500	27.2	46.0
4.92000	26.1	46.0

* limit