

## ***FCC 15.231***

### **Report**

***for***

**Chungear Industrial Co., Ltd**

**106 Kanho Rd., Taichung, Taiwan**

**Product Name : Ceiling Fan Remote Controller  
(Transmitter)**

**Model Name : TR240A**

**FCC ID : KUJCE10407**

## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION .....	3
<b>1. REPORT HISTORY.....</b>	<b>4</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. GENERAL INFORMATION .....</b>	<b>6</b>
3.1. Description of EUT .....	6
3.2. EUT Specifications Assessed in Current Report .....	7
3.3. Antenna Information .....	7
3.4. Test Configuration .....	8
3.5. Tested Supporting System List .....	9
3.6. Setup Configuration .....	9
3.7. Operating Condition of EUT .....	9
3.8. Description of Test Facility .....	10
3.9. Measurement Uncertainty .....	10
<b>4. MEASUREMENT EQUIPMENT LIST.....</b>	<b>11</b>
4.1. Radiated Emission Measurement .....	11
4.2. RF Conducted Measurement .....	11
<b>5. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>12</b>
<b>6. RADIATED EMISSION MEASUREMENT .....</b>	<b>13</b>
6.1. Block Diagram of Test Setup .....	13
6.2. Radiated Emission Limits .....	13
6.3. Test Procedure .....	15
6.4. Measurement Result Explanation .....	16
6.5. Test Results .....	16
<b>7. EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>20</b>
7.1. Block Diagram of Test Setup .....	20
7.2. Specification Limits .....	20
7.3. Test Procedure .....	20
7.4. Test Results .....	21
<b>8. PERIODIC OPERATED MEASUREMENT .....</b>	<b>22</b>
8.1. Block Diagram of Test Setup .....	22
8.2. Specification Limits .....	22
8.3. Test Procedure .....	22
8.4. Test Results .....	23
<b>9. DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>24</b>

### APPENDIX A TEST PHOTOGRAPHS

## TEST REPORT CERTIFICATION

Applicant : Chungear Industrial Co., Ltd  
Manufacturer #1 : Chungear Industrial Co., Ltd  
Manufacturer #2 : Satellite Electronic (Zhongshan) Ltd.  
Manufacturer #3 : Zhongshan Amity Electronic Ltd.  
Product Name : Ceiling Fan Remote Controller (Transmitter)  
Model No. : TR240A  
Serial No. : N/A  
Power Supply : DC 3V (Via Batteries)

Applicable Standards:

FCC Rules and Regulations Part 15 Subpart C, Oct. 2014  
ANSI C63.10:2013

**AUDIX Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2015. 09. 21 ~ 10. 01

Date of Report: 2015. 10. 02

Producer: Sabrina Wang  
(Sabrina Wang/Administrator)

Signatory: Ben Cheng  
(Ben Cheng/Manager)

## 1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2015. 10. 02	Original Report.	EM-F150599

## 2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	<b>PASS</b>
15.209/15.231(b)	Radiated Spurious Emission and Fundamental Frequency	<b>PASS</b>
15.231(c)	Emission Bandwidth	<b>PASS</b>
15.231(a)(1)	Periodic Operated	<b>PASS</b>
15.203	Antenna Requirement	<b>PASS</b>

### 3. GENERAL INFORMATION

#### 3.1. Description of EUT

Product	Ceiling Fan Remote Controller (Transmitter)
Model Number	TR240A
Serial Number	N/A
Applicant	Chungear Industrial Co., Ltd 106 Kanho Rd., Taichung, Taiwan
Manufacture#1	Chungear Industrial Co., Ltd 106 Kanho Rd., Taichung, Taiwan
Manufacture#2	Satellite Electronic (Zhongshan) Ltd. No.15, Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China
Manufacture#3	Zhongshan Amity Electronic Ltd. No. 16 Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China.
Fundamental Frequency	304.3MHz
Power Supply	DC 3V
Date of Receipt of Sample	2015. 09. 17
Ceiling Fan Remote Controller (Receiver) - Receiver	(1)Model No.: JY199, FCC by DoC (2)Model No.: JY326B, FCC by DoC (3)Model No.: JY326D, FCC by DoC (4)Model No.: MR36T, FCC by DoC (5)Model No.: MR36R, FCC by DoC (6)Model No.: MR58A, FCC by DoC (7)Model No.: MR56E, FCC by DoC (8)Model No.: MR101D, FCC by DoC (9)Model No.: MR101F, FCC by DoC (10)Model No.: MR101F-2, FCC by DoC (11)Model No.: MR62A, FCC by DoC (12)Model No.: MR76T, FCC by DoC (13)Model No.: MR101Z, FCC by DoC

### 3.2. EUT Specifications Assessed in Current Report

Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (bps)
304.3	1	ASK	---

### 3.3. Antenna Information

Manufacture	Antenna Type
N/A	Internal


### 3.4. Test Configuration

#### 3.4.1. Duty Cycle Correction Factor

Frequency (MHz)	Duty Cycle Correction Factor (dB)
304.3	-10.58

The complete envelope includes 2 types of frame A and B.


Frame A:

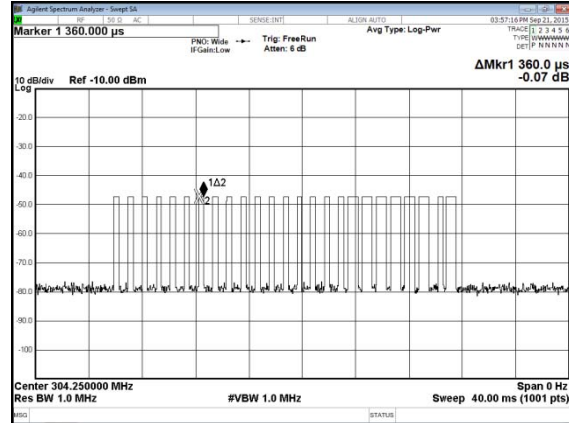

Frame B:



TX ON in 100ms:

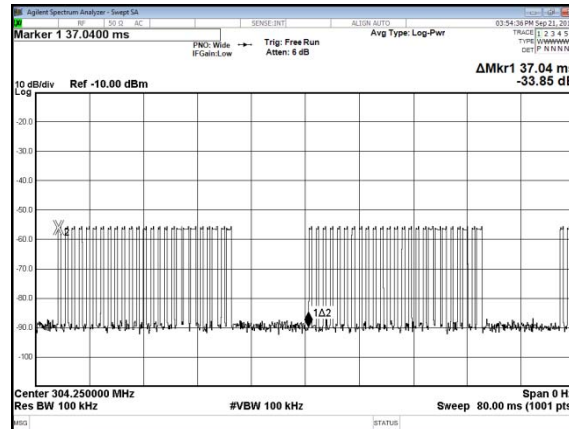

There are 18 A frames and 7 B frames in 37.04ms, so Duty Cycle Correction Factor  
 = 20log (cumulative on/T)  
 = 20log {[0.36(ms)\*18+0.64(ms)\*7]/37.04ms} = 20log [10.96ms/36.4ms] = -10.58



### 3.4.2. Test Case

AC Conduction	
Test Case	The EUT only employs battery power for operation, no conductive emission limits.

	Item	Test Channel
Radiated Test Case	Radiated Band Edge	1
	Radiated Spurious Emission (30MHz-1GHz) <sup>Note1</sup>	1
	Radiated Spurious Emission (Above 1GHz) <sup>Note1</sup>	1
Conducted Test Case	Fundamental	1
	Emission Bandwidth	1
	Periodic Operated	1

Note 1:

Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

- Lie
- Side
- Stand

### 3.5. Tested Supporting System List

None

### 3.6. Setup Configuration



### 3.7. Operating Condition of EUT

To Set EUT on RF function under continues transmitting and choosing channel.

### 3.8. Description of Test Facility

Test Firm Name	:	<b>AUDIX Technology Corporation</b> <b>EMC Department</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	<b>Semi-Anechoic Chamber</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan  <b>Fully Anechoic Chamber</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

### 3.9. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 4.70dB
	Above 1GHz	± 1.60dB

Remark : Uncertainty =  $ku_c(y)$ 

Test Item	Uncertainty
Emission Bandwidth (20dB)	± 0.2kHz
Periodic Operated	± 0.05s

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Radiated Emission Measurement

#### 4.1.1. Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2015. 02. 12	1 Year
4.	Bilog Antenna	TESEQ	CBL6112D	33821	2015. 02. 27	1 Year

#### 4.1.2. Frequency Range 30MHz~1000MHz (Fully Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2015. 08. 20	1 Year
2.	Amplifier	Sonoma	310N	187161	2015. 06. 17	1 Year
3.	Horn Antenna	ETS-Lindgren	3117	00135902	2015. 03. 06	1 Year

### 4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2014. 11. 08	1 Year
2.	Wide Band Antenna	Diamond	RH799	N/A	N.C.R	N.C.R

## **5. CONDUCTED EMISSION MEASUREMENT**


**【The EUT only employs Batteries power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】**

## 6. RADIATED EMISSION MEASUREMENT


### 6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of connection between EUT and simulators  
Indicated as section 3.5

6.1.2. Setup Diagram for 30-1000 MHz

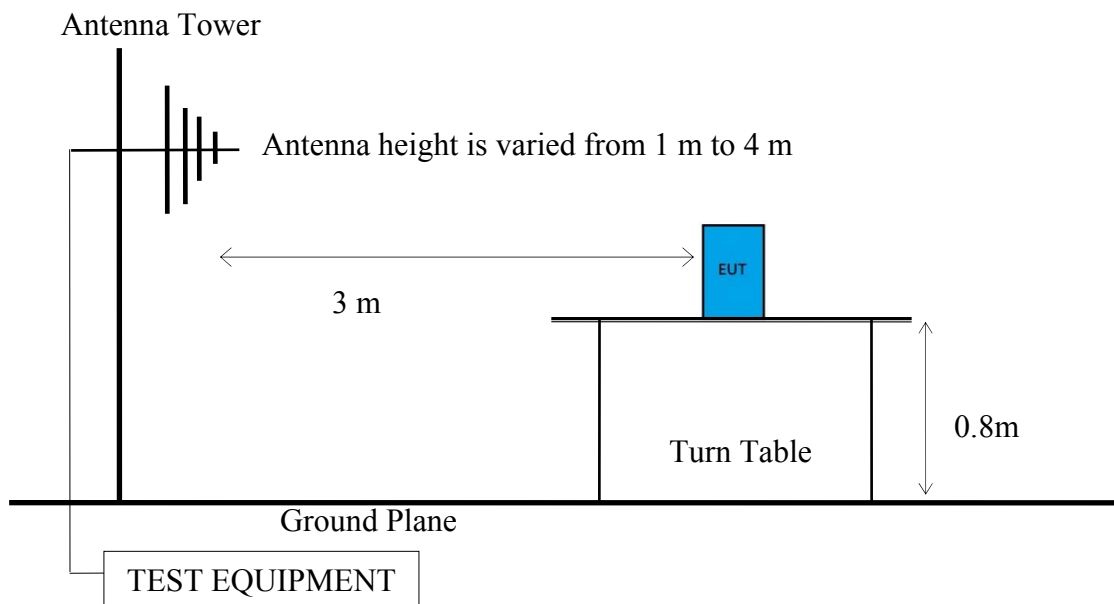

6.1.3. Fully Anechoic Chamber (3m) Setup Diagram for above 1GHz

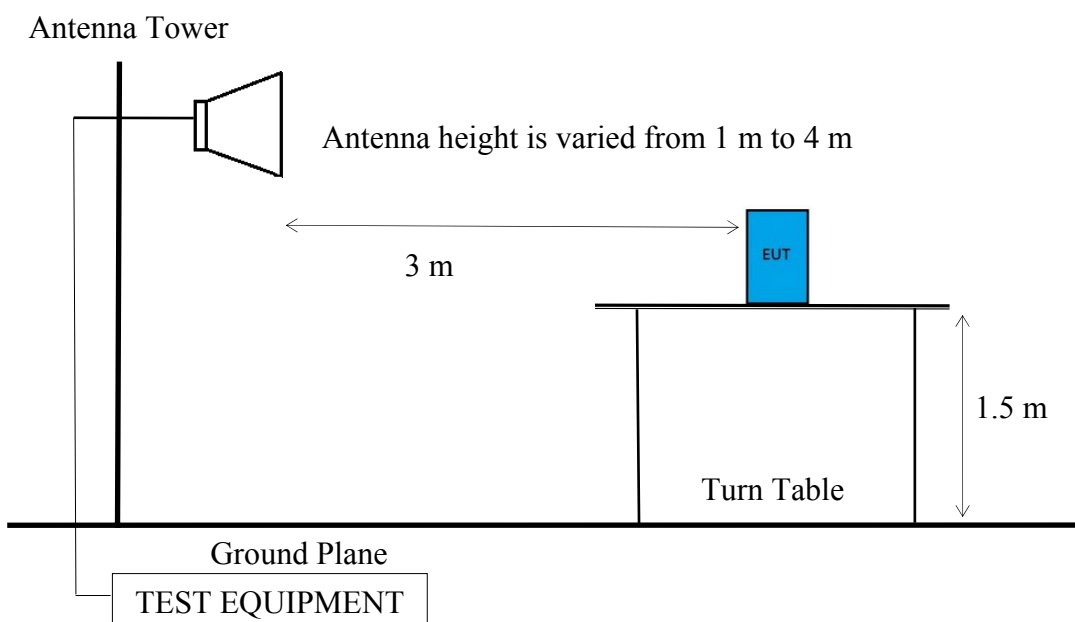

## 6.2. Radiated Emission Limits

### 6.2.1. General Limit

Any emission which falls in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1)  $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Where limit of frequency not fall in the restricted band by:  
 $41.6667 \times 304.3 - 7083.3333 = 5593.8438 \mu\text{V/m} = 74.96 \text{dB}\mu\text{V/m}$
- (6) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

### 6.2.2. Limite for Fundamental Frequency

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250
<sup>1</sup> :Linear Interpolations		

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Where limit of Fundamental Freq. is calculated by:  
 $41.6667 \times 304.3 - 7083.3333 = 5593.8438 \mu\text{V/m} = 74.96 \text{dB}\mu\text{V/m}$
- (5) The limits in this table are based on CFR 47 Part 15.231(b).

### 6.3. Test Procedure

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-2003 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq$  3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

**Peak Detector:**

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average detector for finally measurement.

**Average Measurement:**

**Option 1:**

- (1) RBW = 1 MHz
- (2) VBW = 1/T
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

**Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

## 6.4. Measurement Result Explanation

- Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading
- Average Emission Level = Antenna Factor + Cable Loss + Meter Reading
- Average Emission Level = Peak Emission Level + DCCF  
Duty Cycle Correction Factor (DCCF) =  $20 \log (TX_{on}/TX_{on+off})$  presented in section 3.4
- EPR = Peak Emission Level - 95.2dB - 2.14dBi

## 6.5. Test Results

**PASSED.**



## 6.5.1. Emissions Applied to General Requirement

## 6.5.1.1. Frequency Below 1 GHz

Test Date	2015/10/01	Temp./Hum.	22°C/58%
Test Voltage	DC 3V (Via Batteries)	Frequency	TX 304.3MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
609.09	18.37	6.53	17.36	42.26	46.00	3.74	Peak
*912.70	20.65	7.62	23.69	51.96	74.96	23.00	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
*912.70	51.96	-10.58	41.38	54.96	13.58	Average

Remark: “\*” is the frequency not fall in the restricted band.

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
609.09	18.37	6.53	15.99	40.89	46.00	5.11	Peak
*912.70	20.65	7.62	7.47	35.74	74.96	39.22	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
*912.70	35.74	-10.58	25.16	54.96	29.80	Average

Remark: “\*” is the frequency not fall in the restricted band.

6.5.1.2. Frequencies above 1 GHz:

Test Date	2015/10/01	Temp./Hum.	22°C/58%
Test Voltage	DC 3V (Via Batteries)	Frequency	TX 304.3MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1216.72	27.65	4.06	17.14	48.85	74.00	25.15	Peak
1522.48	27.88	4.56	22.45	54.89	74.00	19.11	Peak
1826.56	30.08	5.01	23.54	58.63	74.00	15.37	Peak
2130.64	31.37	5.62	11.37	48.36	74.00	25.64	Peak
2436.40	31.73	6.13	18.29	56.15	74.00	17.85	Peak
2739.40	32.05	6.54	11.74	50.33	74.00	23.67	Peak
3043.00	32.28	6.88	10.36	49.52	74.00	24.48	Peak
3347.92	32.16	7.44	9.11	48.71	74.00	25.29	Peak
3957.76	32.92	7.94	8.25	49.11	74.00	24.89	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1216.72	48.85	-10.58	38.27	54.00	15.73	Average
1522.48	54.89	-10.58	44.31	54.00	9.69	Average
1826.56	58.63	-10.58	48.05	54.00	5.95	Average
2130.64	48.36	-10.58	37.78	54.00	16.22	Average
2436.40	56.15	-10.58	45.57	54.00	8.43	Average
2739.40	50.33	-10.58	39.75	54.00	14.25	Average
3043.00	49.52	-10.58	38.94	54.00	15.06	Average
3347.92	48.71	-10.58	38.13	54.00	15.87	Average
3957.76	49.11	-10.58	38.53	54.00	15.47	Average

**Antenna at Vertical Polarization**


The emissions (up to 10th harmonics) not reported for there is no emission be found.

6.5.2. Emissions in Non-restricted Frequency Bands

All emission levels below the 15.209 general radiated emissions limits is not required.

6.5.3. Fundamental Frequency:

Test Date	2015/10/01	Temp./Hum.	22°C/58%
Test Voltage	DC 3V (Via Batteries)	Frequency	TX 304.3MHz

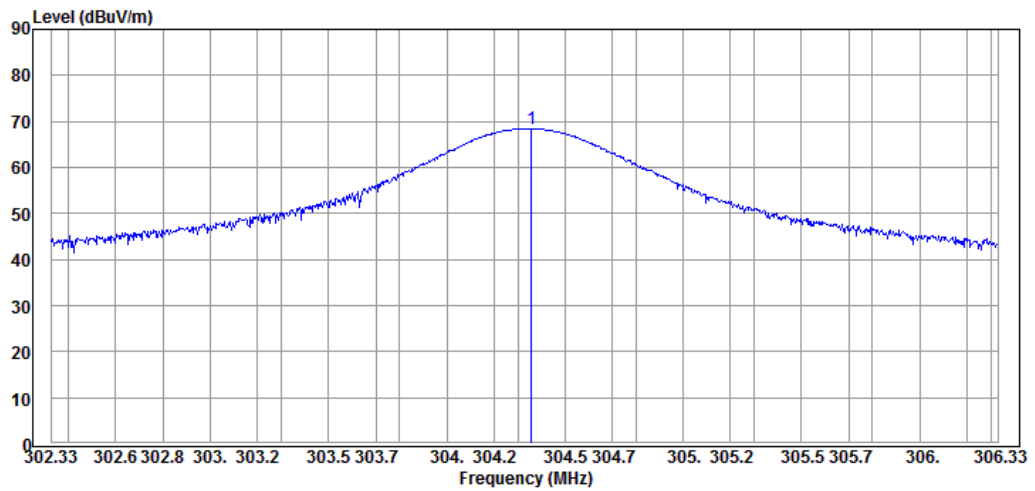


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
304.36	13.25	4.71	50.47	68.43	74.96	6.53	Peak

Remark: Horizontal is the strongest polarization and peak value has complied with limit, so vertical won't be listed in test report.

## 7. EMISSION BANDWIDTH MEASUREMENT

### 7.1. Block Diagram of Test Setup

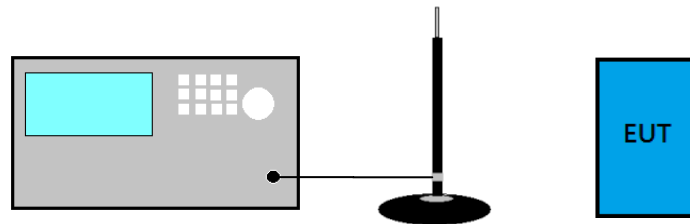

### 7.2. Specification Limits

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

### 7.3. Test Procedure

- (1) Set RBW close to 1-5 % of OBW.
- (2) Set  $VBW \geq RBW$ .
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.


### 7.4. Test Results

Test Date	2015/10/01	Temp./Hum.	25°C/45%
Test Voltage	DC 3V (Via Batteries)	Frequency	TX 304.3MHz

#### 7.4.1. Emission Bandwidth:


Center Frequency (MHz)	Occupied Bandwidth (MHz)	Tolerance (%)	Limit (%)
304.25	0.09133	0.030	0.25

#### 7.4.2. Measurement Plot:

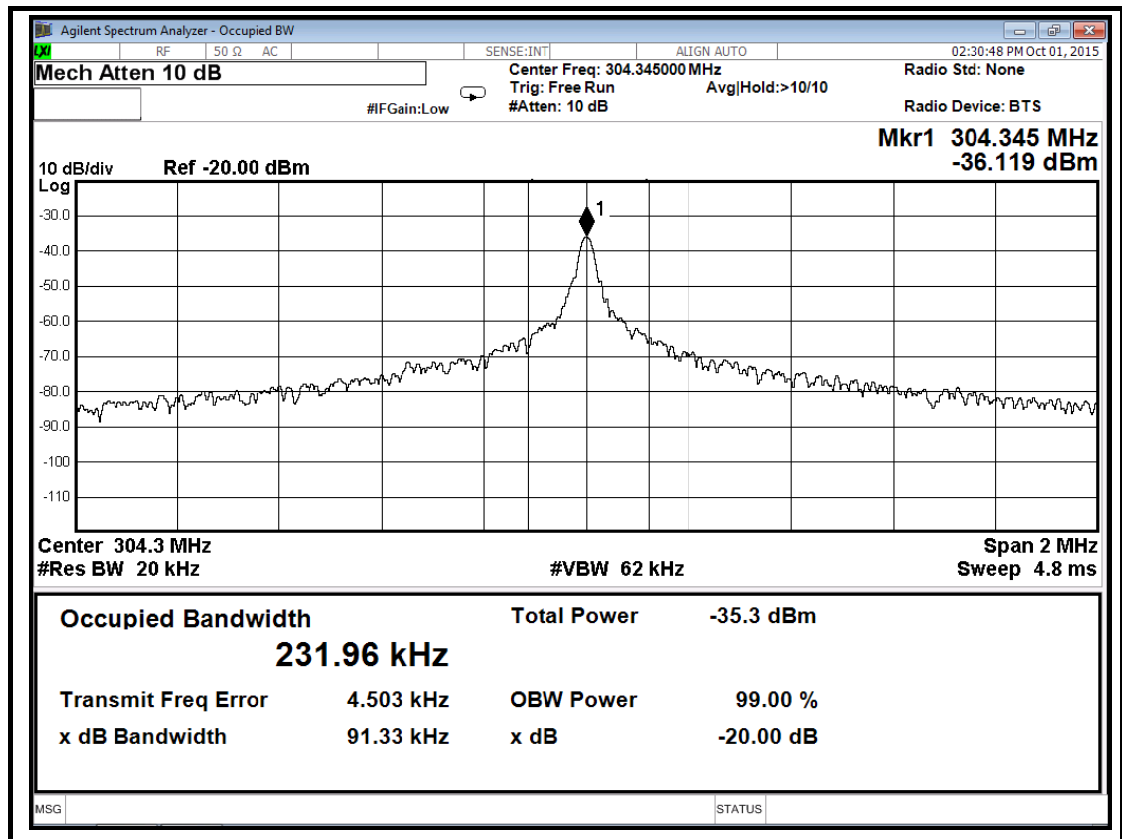

## 8. PERIODIC OPERATED MEASUREMENT

### 8.1. Block Diagram of Test Setup

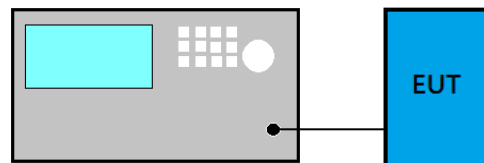

### 8.2. Specification Limits

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released

### 8.3. Test Procedure

- (1) Span = zero
- (2) RBW  $\geq$  100kHz
- (3) VBW  $\geq$  RBW
- (4) Sweep = 5s
- (5) Detector function = peak
- (6) Trace = single sweep


### 8.4. Test Results

Test Date	2015/09/21	Temp./Hum.	24°C/52%
Test Voltage	DC 3V (Via Batteries)	Frequency	TX 304.3MHz

#### 8.4.1. Periodic Operated:

Center Frequency (MHz)	Time (Sec.)	Limit (Sec.)
304.25	0.210	< 5

#### 8.4.2. Measurement Plot:

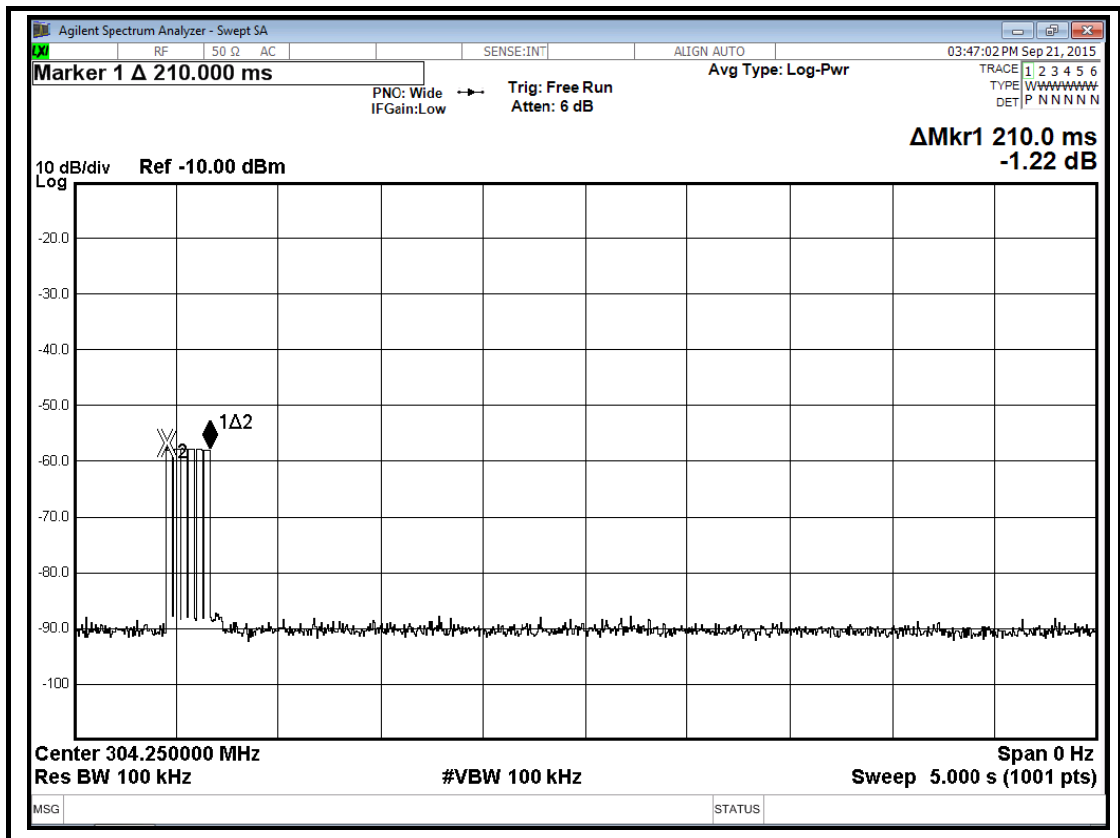

## **9. DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**