

TEST REPORT FOR CERTIFICATION
On Behalf of
Chungear Industrial Co., Ltd
Ceiling Fan Remote Controller (Transmitter)
Model No.: TR113A
FCC ID: KUJCE9909

Prepared for : Chungear Industrial Co., Ltd
106 Kanho Rd., Taichung, Taiwan

Prepared By : AUDIX Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax : (02) 2609-9303

File Number : C1M1104035
Report Number : EM-F100344
Date of Test : Apr. 12, 2011
Date of Report : Apr. 14, 2011

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. CONDUCTED EMISSION MEASUREMENT	6
3. RADIATED EMISSION MEASUREMENT	7
3.1. Test Equipment	7
3.2. Test Setup	7
3.3. Radiation Emission Limits (§15.209)	8
3.4. Operating Condition of EUT	8
3.5. Test Procedure	9
3.6. Radiated Emission Noise Measurement Results	9
3.7. Duty Cycle Factor	10
4. FUNDAMENTAL MEASUREMENT	12
4.1. Test Equipment	12
4.2. Test Setup	12
4.3. Radiation Emission Limits (15.231)	13
4.4. Operating Condition of EUT	13
4.5. Test Procedure	13
4.6. Fundamental Measurement Results	14
5. EMISSION BANDWIDTH MEASUREMENT	15
5.1. Test Equipment	15
5.2. Block Diagram of Test Setup	15
5.3. Specification Limits (§15.231-(c))	15
5.4. Emission Bandwidth Measurement Results	15
6. PERIODIC OPERATED MEASUREMENT	17
6.1. Test Equipment	17
6.2. Block Diagram of Test Setup	17
6.3. Specification Limits [§15.231-(a)-(1)]	17
6.4. Periodic Operated Measurement Results	17
7. DEVIATION TO TEST SPECIFICATIONS	19
8. PHOTOGRAPHS	20
8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)	20
8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)	22
8.3. Photo of Emission Bandwidth/ Periodic Operated/ Measurement	24

TEST REPORT CERTIFICATION

Applicant : Chungear Industrial Co., Ltd
 Manufacturer #1 : Chungear Industrial Co., Ltd
 Manufacturer #2 : Satellite Electronic (Zhongshan) Ltd.
 Manufacturer #3 : Zhongshan Amity Electronic Ltd.
 EUT Description : Ceiling Fan Remote Controller (Transmitter)
 FCC ID : KIJCE9909
 (A) Model No. : TR113A
 (B) Serial No. : N/A
 (C) Power Supply : DC 3V (Battery)
 (D) Test Voltage : DC 3V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, October 2009
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207, §15.209 and §15.231)


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Apr. 12, 2011 Date of Report : Apr. 14, 2011

Producer : 
 (Nita Lee/Administrator)

Review : 
 (Henning Chang/Supervisor)

Signatory: 
 (Ben Cheng/Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Ceiling Fan Remote Controller (Transmitter)
Model Number	:	TR113A
FCC ID	:	KUJCE9909
Applicant	:	Chungear Industrial Co., Ltd No.15, Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China
Manufacturer #1	:	Chungear Industrial Co., Ltd. 106 Kanho Rd., Taichung, Taiwan
Manufacturer #2	:	Satellite Electronic (Zhongshan)., Ltd No.15, Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China
Manufacturer #3	:	Zhongshan Amity Electronic Ltd. No. 16 Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China.
Fundamental Frequency	:	304MHz
Power Supply	:	DC 3V (Battery)
Date of Receipt of Sample	:	Apr. 06, 2011
Date of Test	:	Apr. 12, 2011

* Ceiling Fan Remote Controller (Transmitter) - Receiver

- (1)Model No.: JY199, FCC by DoC
- (2)Model No.: JY326B, FCC by DoC
- (3)Model No.: JY326D, FCC by DoC
- (4)Model No.: MR36T, FCC by DoC
- (5)Model No.: MR36R, FCC by DoC
- (6)Model No.: MR58A, FCC by DoC
- (7)Model No.: MR56E, FCC by DoC

Remark:

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

1.2. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation
EMC Department**
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan.

Test Facility & Location : **Semi-Anechoic Chamber**
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan.
May 14, 2009 Renewal on
Federal Communication Commission
Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB

Remark : Uncertainty = $ku_c(y)$

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission test:

3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 29, 10'	Jun. 28, 11'
2.	Test Receiver	R & S	ESCS30	100265	Sep. 01, 10'	Aug. 31, 11'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 10, 11'	Feb. 09, 12'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 08, 11'	Mar. 07, 12'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 08, 11'	Mar. 07, 12'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 01, 11'	Mar. 31, 12'

3.1.2. For Frequency Range above 1GHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 29, 10'	Jun. 28, 11'
2.	Amplifier	HP	8449B	3008A00529	Jun. 25, 10'	Jun. 24, 11'
3.	Horn Antenna	EMCO	3115	9112-3775	May 10, 10'	May 09, 11'


3.2. Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

CEILING FAN REMOTE CONTROLLER (TRANSMITTER) (EUT)

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

ANTENNA TOWER

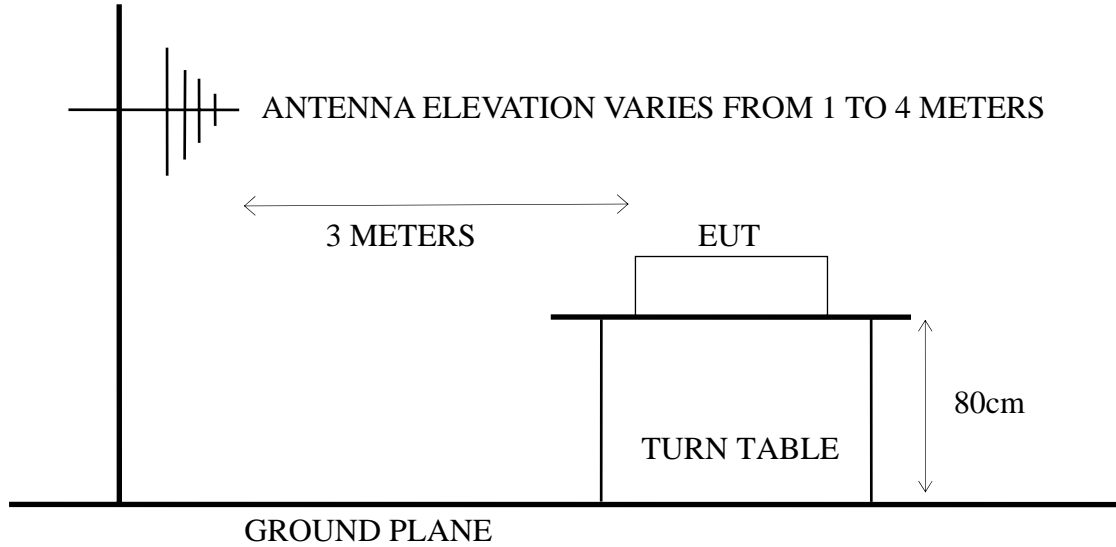

3.3. Radiation Emission Limits (§15.209)

3.3.1. Spurious Emission Limit (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	3	100	40.00
88 - 216	3	150	43.50
216 - 960	3	200	46.00
Above 960	3	500	54.00

- Remarks :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT and simulator as shown on 3.2.
- 3.4.2. Turn on the power.
- 3.4.3. The EUT {Ceiling Fan Remote Controller (Transmitter)} emitted the fundamental frequency with data code at the stand, side and lying conditions. (The worst mode is lying)
- 3.4.4. The EUT was operated on maximum transmitting status during all testing (lying condition).

3.5. Test Procedure

The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna is used as a receiving antenna. Both polarizations horizontal and vertical are set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz, resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to 3.1GHz was pre-scanned with Peak detector.

EUT with worst positions (Lying) was tested during radiated measurement and all the test results are listed in section 3.6.

***Note: This device contains 2 functions fan mode and light mode, the worst case is fan mode and all tests are performed in this mode except to periodic operated measurement.**

3.6. Radiated Emission Noise Measurement Results

Frequency (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Duty Cycle Factor (dB)	Average Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Polarization	Dector
609.40	21.45	6.20	1.55	29.20	N/A	N/A	46.00	-16.80	Horizontal	QP
609.40	21.45	6.20	-0.05	27.60	N/A	N/A	46.00	-18.40	Vertical	QP
911.80	24.99	7.40	13.52	45.91	-7.66	38.25	46.00	-7.75	Horizontal	QP
911.80	24.99	7.40	9.57	41.96	-7.66	34.30	46.00	-11.70	Vertical	QP
1221.76	24.93	4.63	14.09	43.65	-7.66	35.99	54.00	-18.01	Horizontal	Peak
1221.76	24.93	4.63	15.82	45.38	-7.66	37.72	54.00	-16.28	Vertical	Peak
1524.16	25.83	5.61	28.77	60.21	-7.66	52.55	54.00	-1.45	Horizontal	Peak
1524.16	25.83	5.61	28.11	59.55	-7.66	51.89	54.00	-2.11	Vertical	Peak
1826.56	27.03	6.77	18.87	52.67	-7.66	45.01	54.00	-8.99	Horizontal	Peak
1826.56	27.03	6.77	15.55	49.35	-7.66	41.69	54.00	-12.31	Vertical	Peak
2132.32	27.84	6.03	20.32	54.19	-7.66	46.53	54.00	-7.47	Horizontal	Peak
2132.32	27.84	6.03	19.40	53.27	-7.66	45.61	54.00	-8.39	Vertical	Peak
2434.72	28.13	6.39	15.58	50.10	-7.66	42.44	54.00	-11.56	Horizontal	Peak
2434.72	28.13	6.39	14.15	48.67	-7.66	41.01	54.00	-12.99	Vertical	Peak
2742.04	29.09	6.85	7.22	43.16	-7.66	35.50	54.00	-18.50	Horizontal	Peak
2742.04	29.09	6.85	10.98	46.92	-7.66	39.26	54.00	-14.74	Vertical	Peak

*Emission Level = Ant. Factor + Cable Loss + Reading

*Average Level = Peak Level + Duty Cycle Factor

Duty Cycle Factor = $20 \log [(0.7067 * 48 + 0.3251 * 23) / 100]$ Refer to Section 3.7


3.7. Duty Cycle Factor

3.7.1. For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.


3.7.2. Duty Cycle Factor Result

The complete envelope includes 2 types of frame A and B.


Frame A:

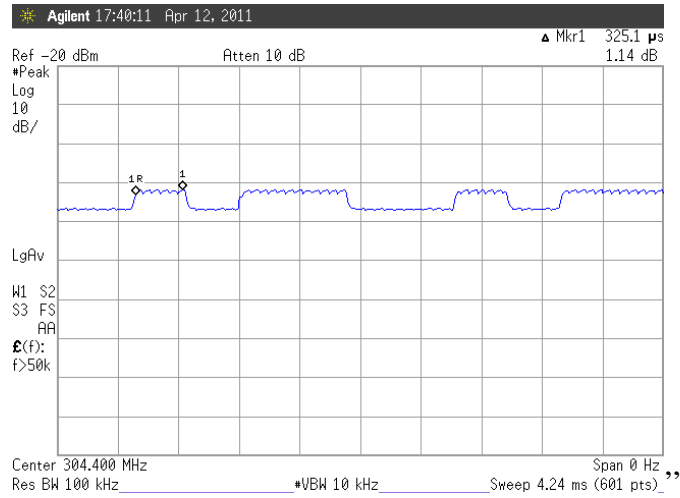

Frame B:

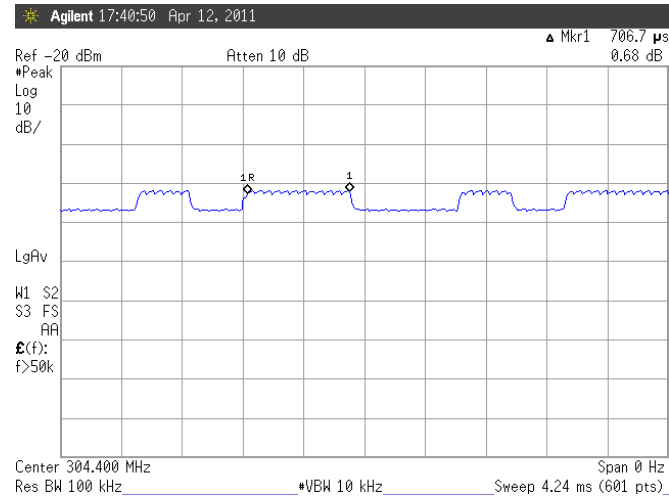

TX ON in 100ms:

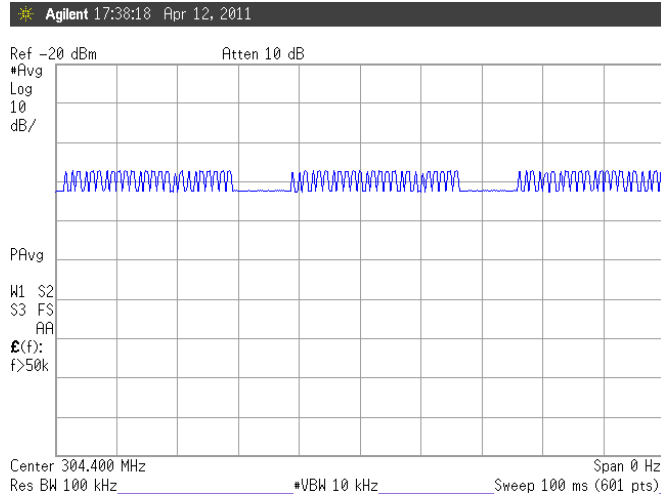

There are 23 A frames and 48 B frames in 100ms, so Duty Cycle Factor = $20 \log [(0.7067 * 48 + 0.3251 * 23) / 100] = -7.66$

4. FUNDAMENTAL MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission test:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 29, 10'	Jun. 28, 11'
2.	Test Receiver	R & S	ESCS30	100265	Sep. 01, 10'	Aug. 31, 11'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 10, 11'	Feb. 09, 12'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 08, 11'	Mar. 07, 12'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 08, 11'	Mar. 07, 12'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 01, 11'	Mar. 31, 12'


4.2. Test Setup

4.2.1. Block Diagram of connection between EUT and simulators



4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

ANTENNA TOWER

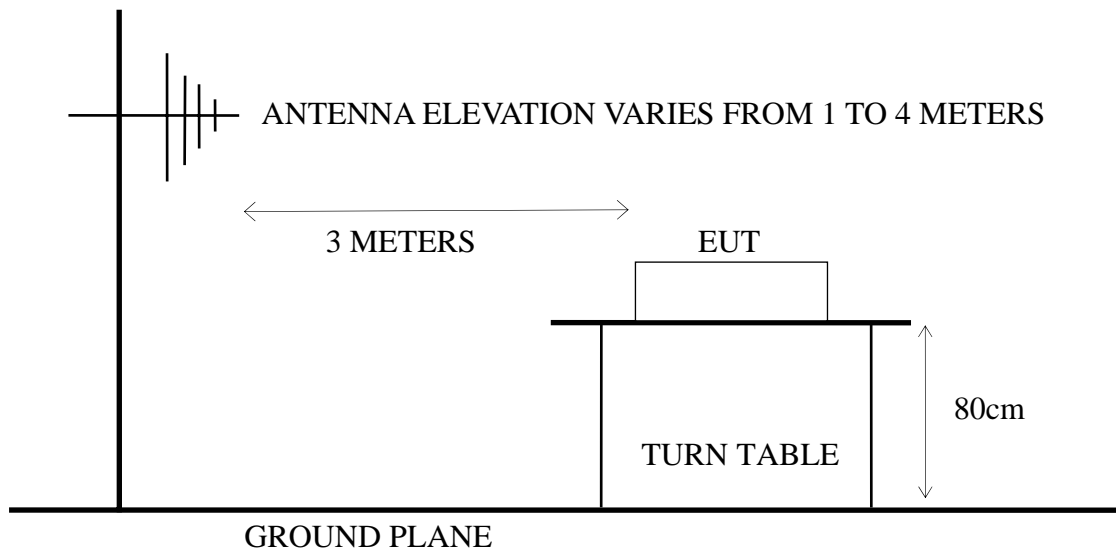

4.3. Radiation Emission Limits (15.231)

4.3.1. Fundamental Frequency Emission Limit (§15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		μV/m	dBμV/m
Fundamental Frequency	3	5583.3438	74.94 (Quasi-Peak)

- Remarks :
- (1) Emission level (dBμV/m) = 20 log Emission level (μV/m)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) Where limit of Fundamental Freq. is calculated by:
 $41.6667 \times 304.000 - 7083.3333 = 5583.3438 \mu\text{V/m} = 74.94 \text{ dB}\mu\text{V/m}$
 - (5) The limits in this table are based on CFR 47 Part 15.231(b).

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. Turn on the power.
- 4.4.3. The EUT {Ceiling Fan Remote Controller (Transmitter)} emitted the fundamental frequency with data code at the stand, side and lying conditions. (The worst mode is lying)
- 4.4.4. The EUT was operated on maximum transmitting status during all testing (lying condition).

4.5. Test Procedure


The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna is used as a receiving antenna. Both polarizations horizontal and vertical are set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

EUT with worst positions (Lying) was tested during radiated measurement and all the test results are listed in section 4.6.

4.6. Fundamental Measurement Results



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

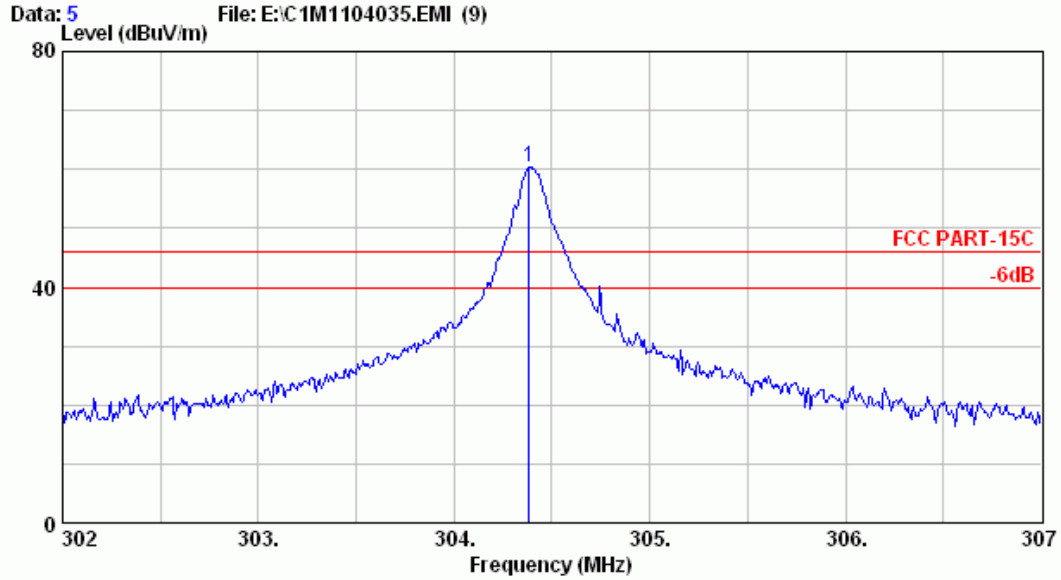

Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8593EM 24*C /48% Engineer : Jarwei Wang
 EUT : TR113A
 Power Rating : DC 3V
 Test Mode : TX

	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Remark
1	14.87	3.90	41.50	60.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Horizontal is the strongest polarization and peak value has complied with limit, so vertical won't be listed in test report.

Because RBW of spectrum is larger than PRF, thus PDCF is no need for finding true peak level.

5. EMISSION BANDWIDTH MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9020A	MY50200226	Aug. 01, 10'	Jul. 31, 11'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

5.2. Block Diagram of Test Setup



5.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

5.4. Emission Bandwidth Measurement Results

PASS.


Fundamental Frequency: 304MHz

Test Date: Apr. 12, 2011 Temperature: 24 Humidity: 62%

No.	Center Frequency	Bandwidth	Tolerance (%)
1.	304MHz	178.4kHz	0.0586%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.

Graph of Bandwidth Measurement

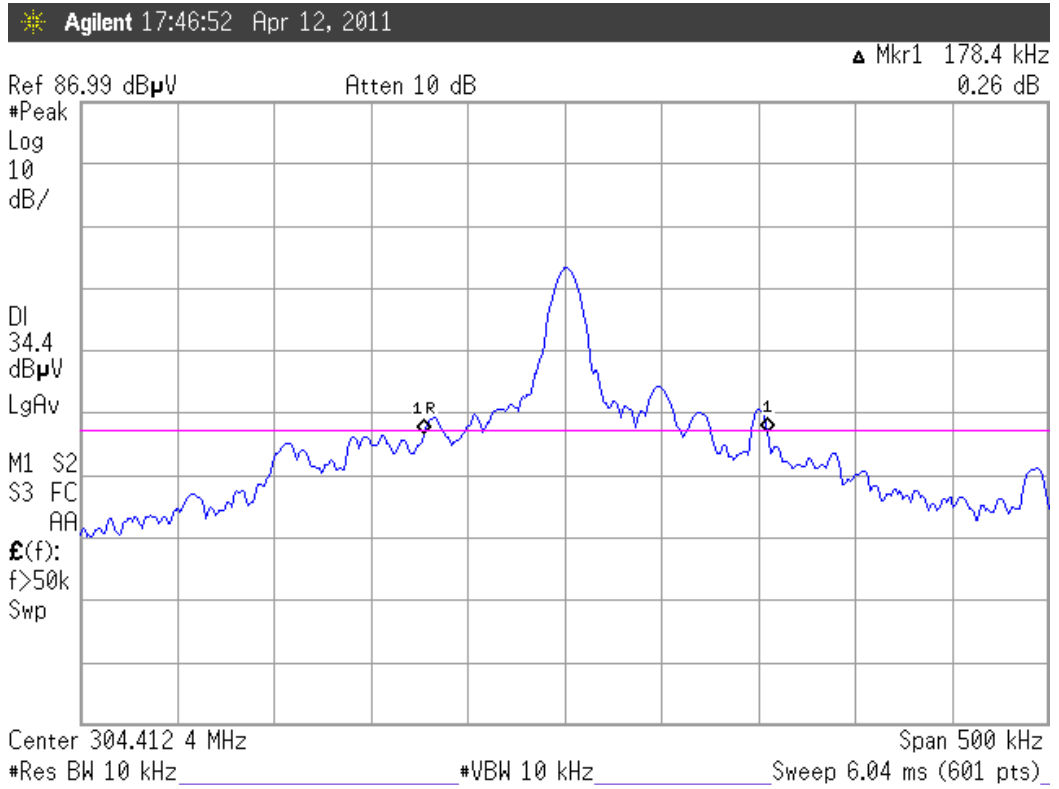

Note: “◇” The line is 20dB from the modulated carrier.


6. PERIODIC OPERATED MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9020A	MY50200226	Aug. 01, 10'	Jul. 31, 11'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

6.2. Block Diagram of Test Setup

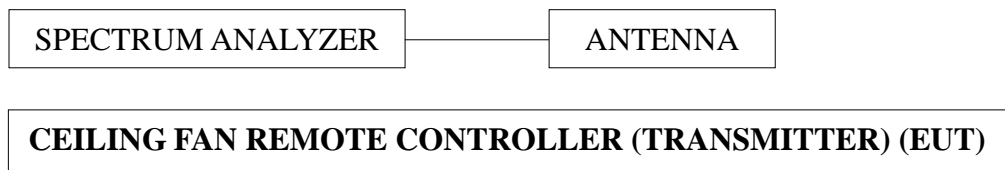

6.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

6.4. Periodic Operated Measurement Results

PASS.

FAN Mode: T = 0.2967s. (< 5sec.)

Light Mode: T = 0.2067s. (< 5sec.)


Fundamental Frequency: 304MHz

Test Date: Apr. 12, 2011 Temperature: 24 Humidity: 62%


The graph of testing is attached in next page.

Graph of Periodic Operated Measurement

FAN Mode

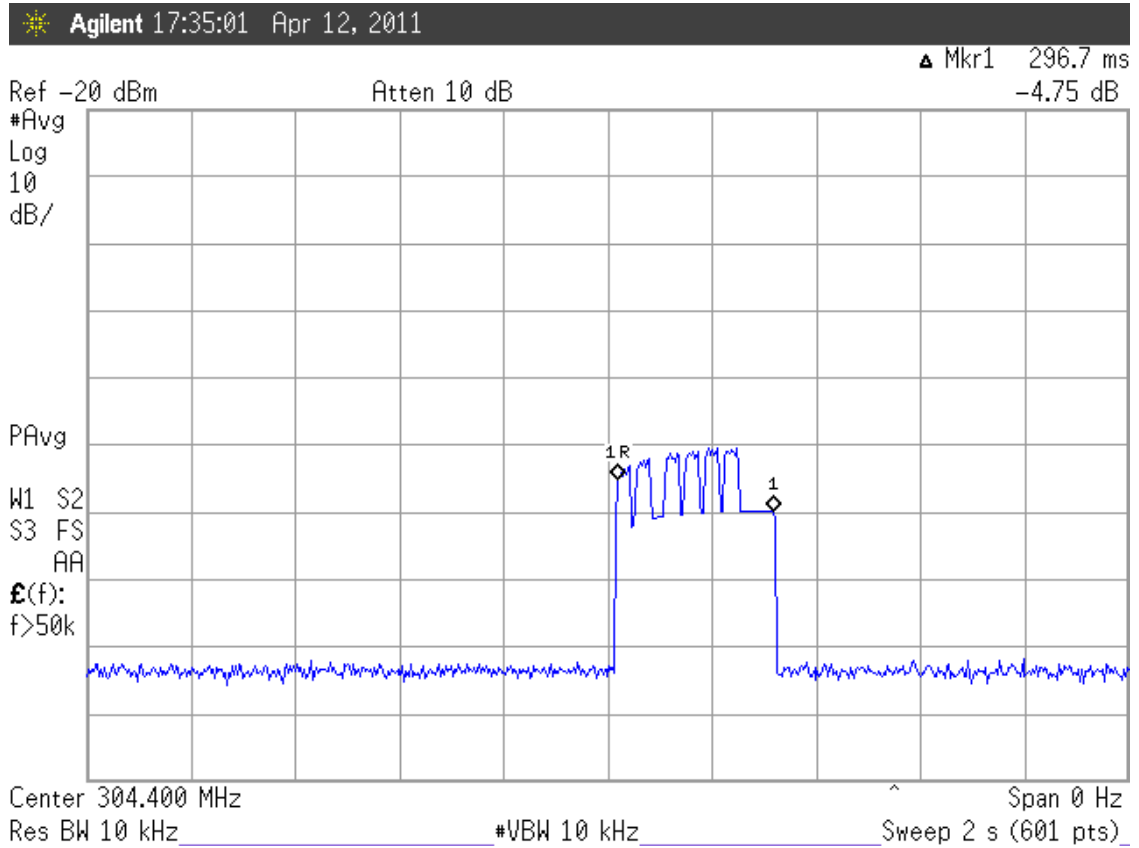

Light Mode

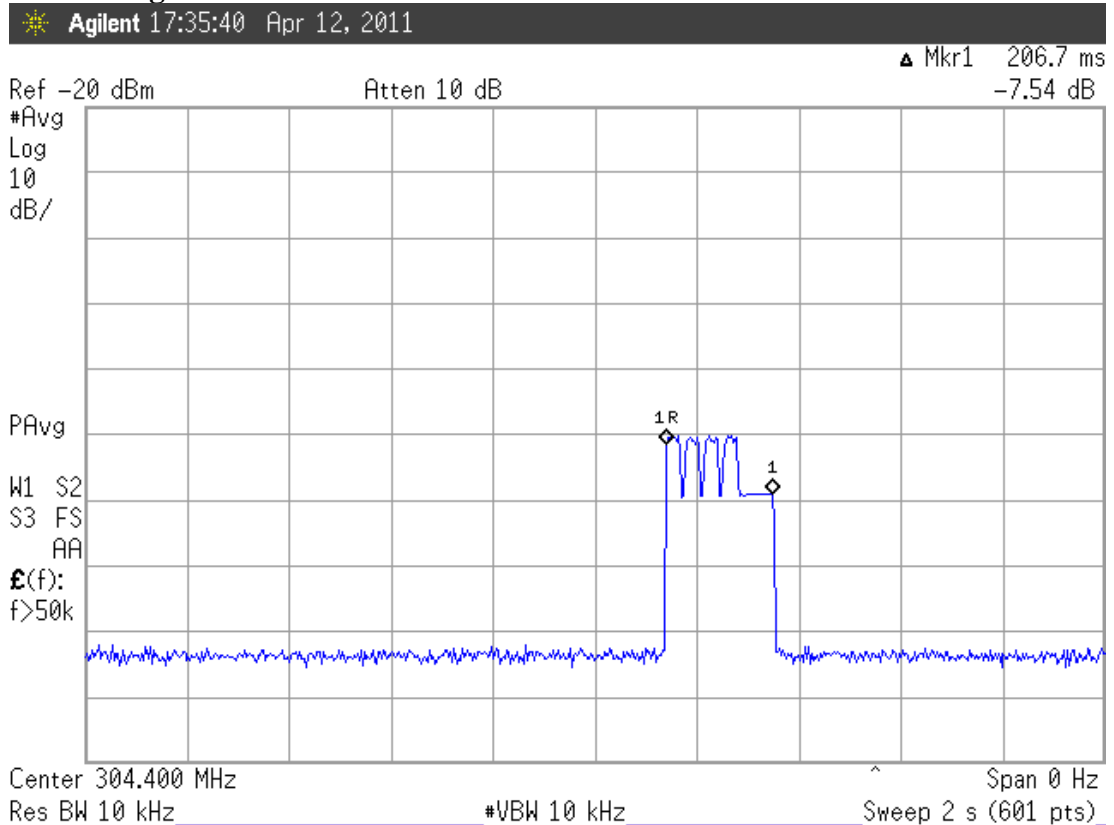

7. DEVIATION TO TEST SPECIFICATIONS

【NONE】

8. PHOTOGRAPHS

8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz) EUT on Stand



EUT on Side



EUT on Lying



8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)

EUT on Stand



EUT on Side



EUT on Lying



8.3.Photo of Emission Bandwidth/ Periodic Operated/ Measurement

