


- High Channel:

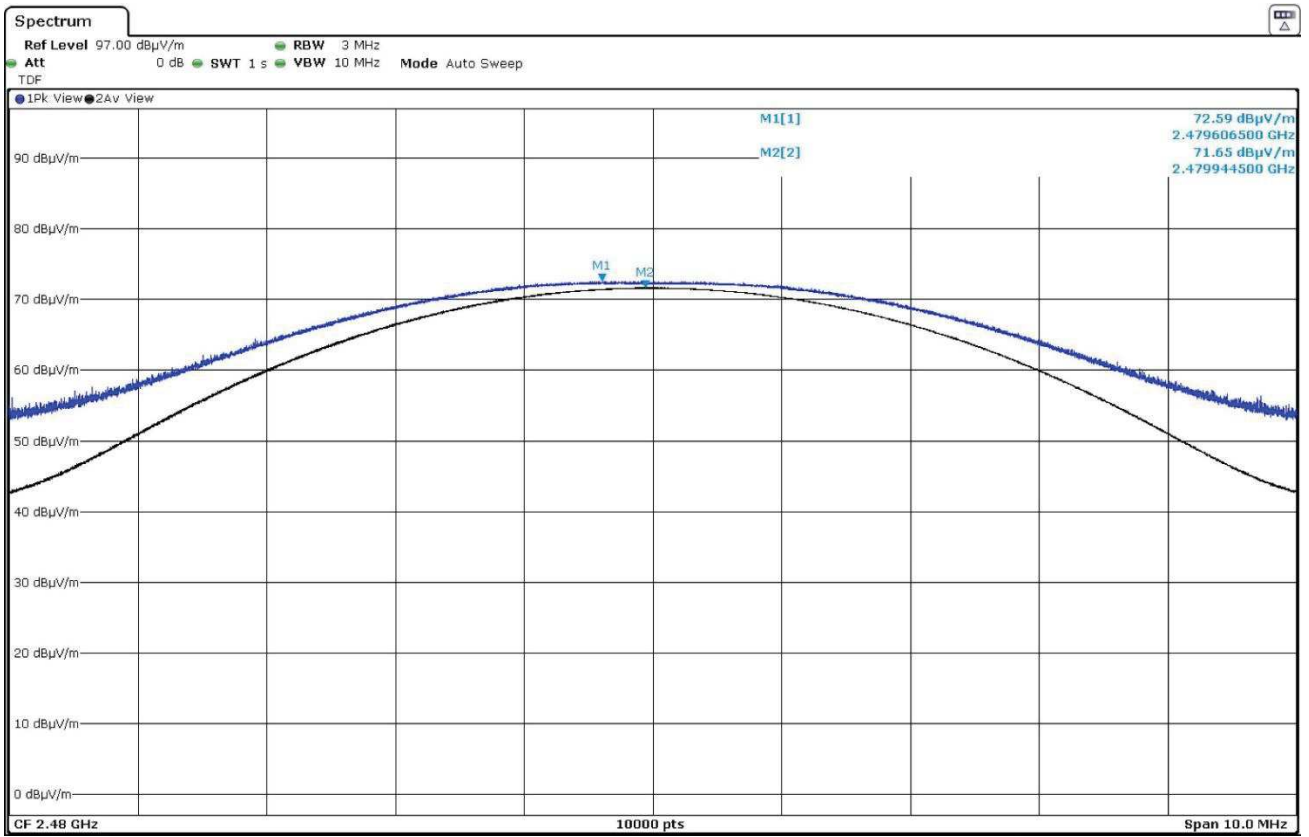

15.249 (d) / RSS-210 B.10 (b) Emissions radiated outside of the specific frequency bands

SPECIFICATION:

The field strength of harmonics from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of harmonics ($\mu\text{V/m}$)	Field strength of harmonics ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
902 - 928	500	54	3
2400 – 2483.5	500	54	3
5725 - 5875	500	54	3
24000-24250	2500	67.96	3

Emissions radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits specified in section 15.209:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

Whichever is the lesser attenuation.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz:

The spurious signals detected do not depend on the operating channel.

No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty (dB) $<\pm 5.17$

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

Duty cycle correction +3.01 dB


No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty:	1-3 GHz	$<\pm 4.11$ dB
	3-17 GHz	$<\pm 5.13$ dB
	17-26 GHz	$<\pm 4.81$ dB

Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz


The spurious frequencies detected do not depend on the operating channel.

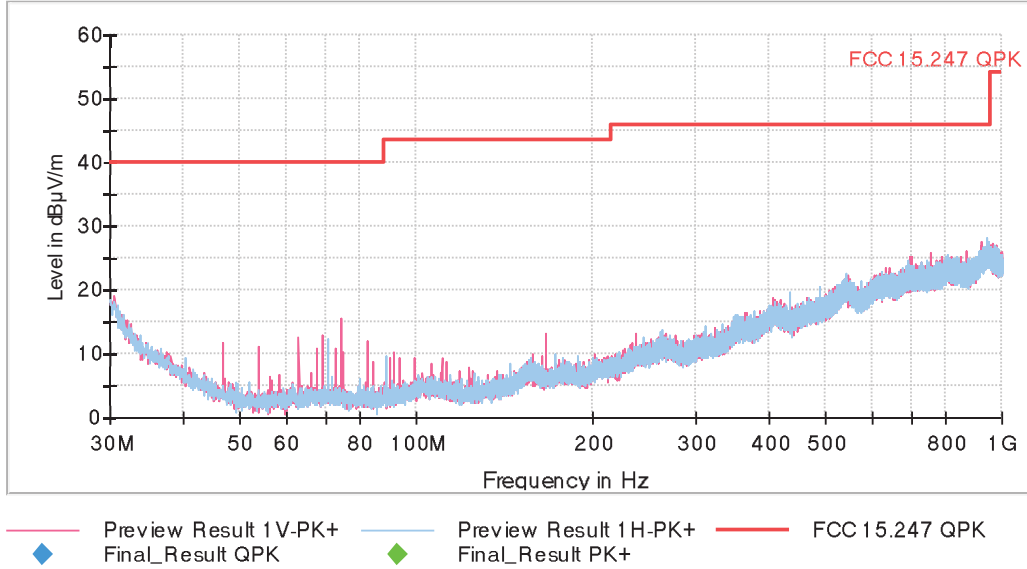

This plot is valid for the Low, Middle and High Channels.


FREQUENCY RANGE 1 - 3 GHz

- Low Channel:

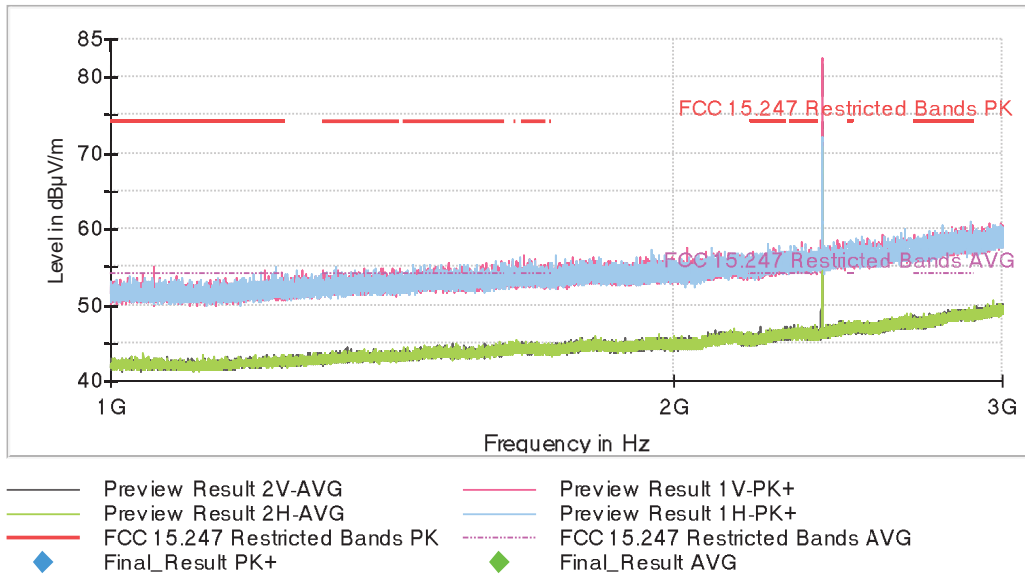


The peak above the limit is the carrier frequency.

- Middle Channel:

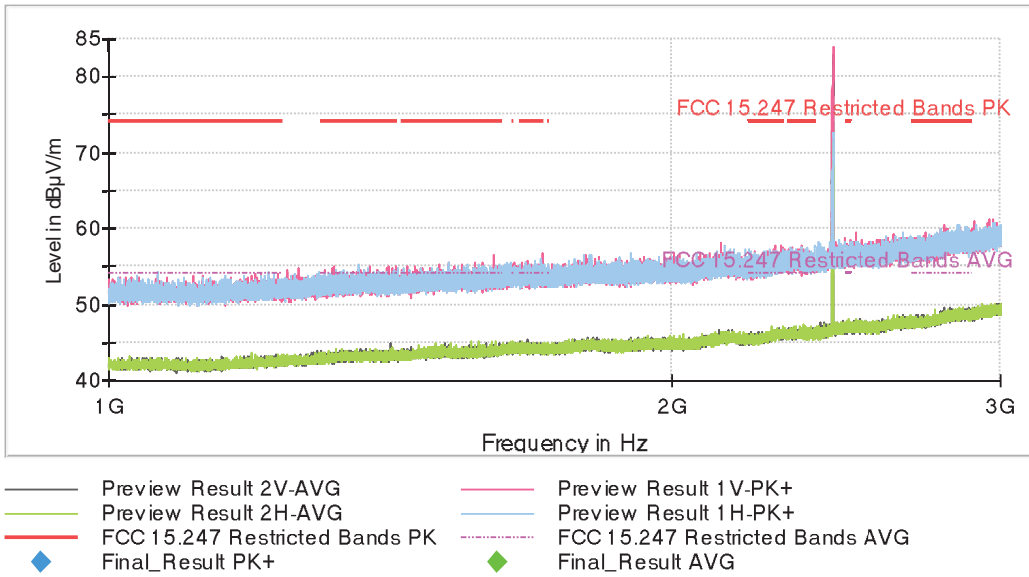

The peak above the limit is the carrier frequency.


- High Channel:

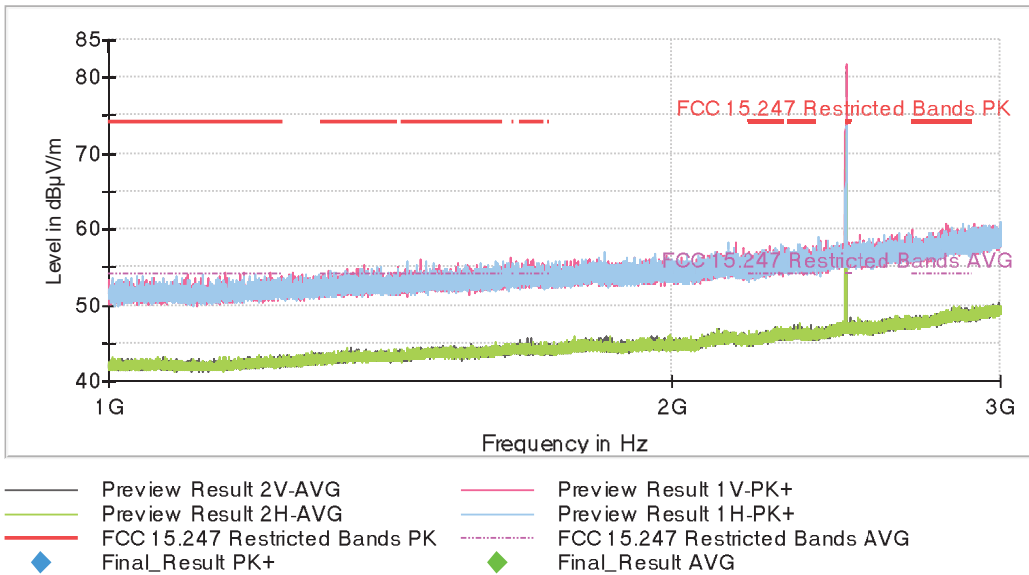


The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz


- Low Channel:

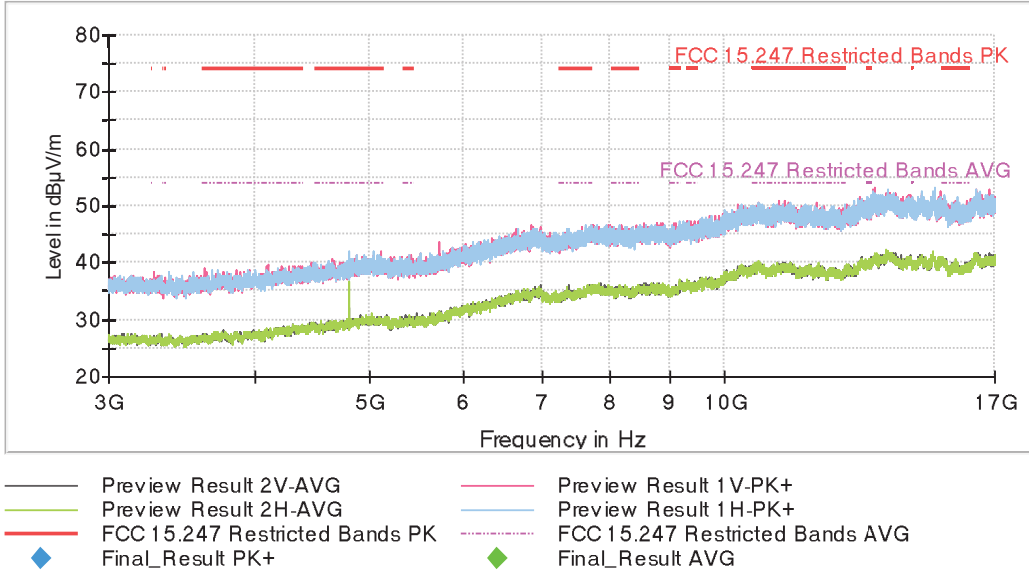

- Middle Channel:

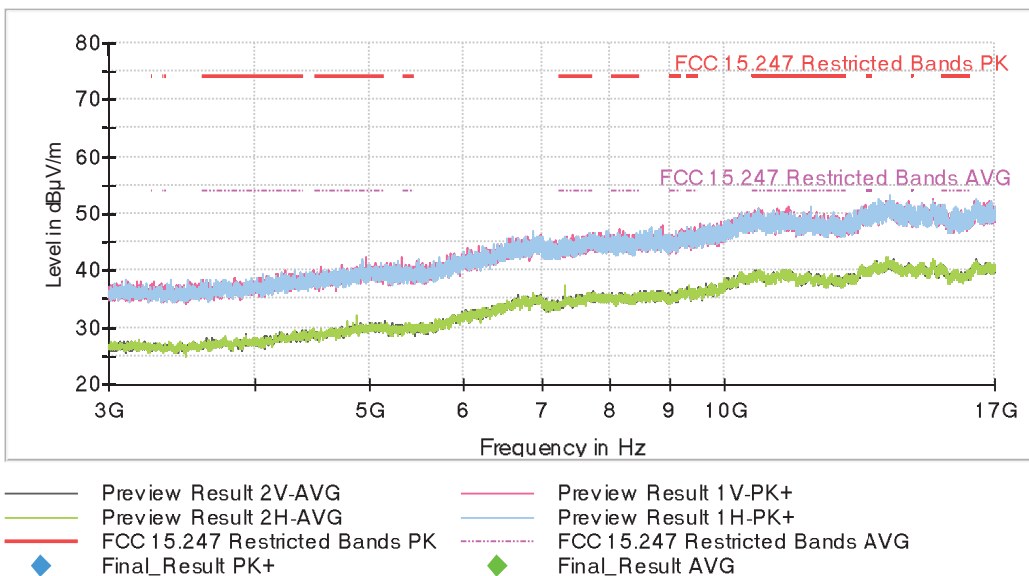


- High Channel:

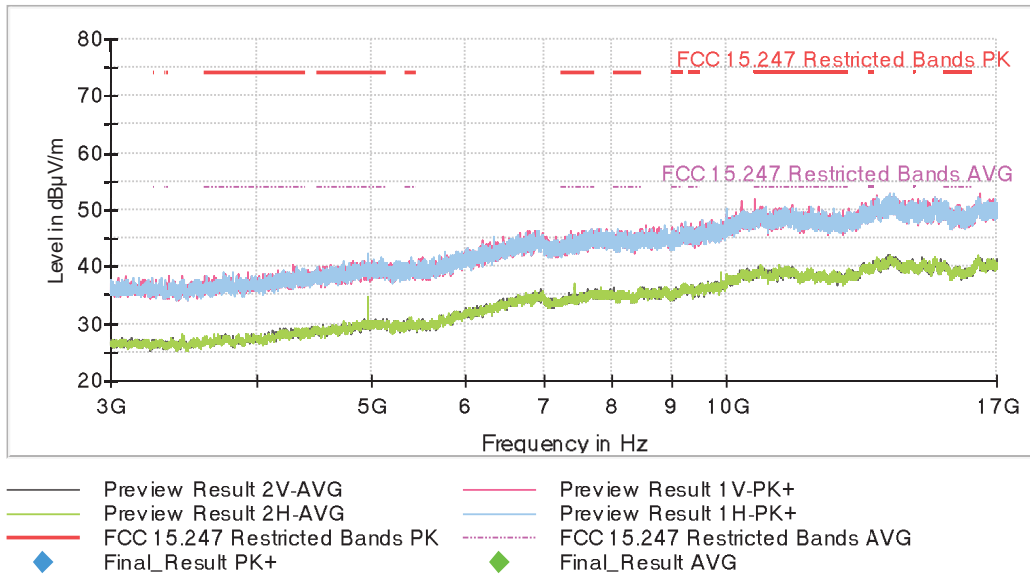

FREQUENCY RANGE 17 - 26 GHz

The spurious frequencies detected do not depend on the operating channel.

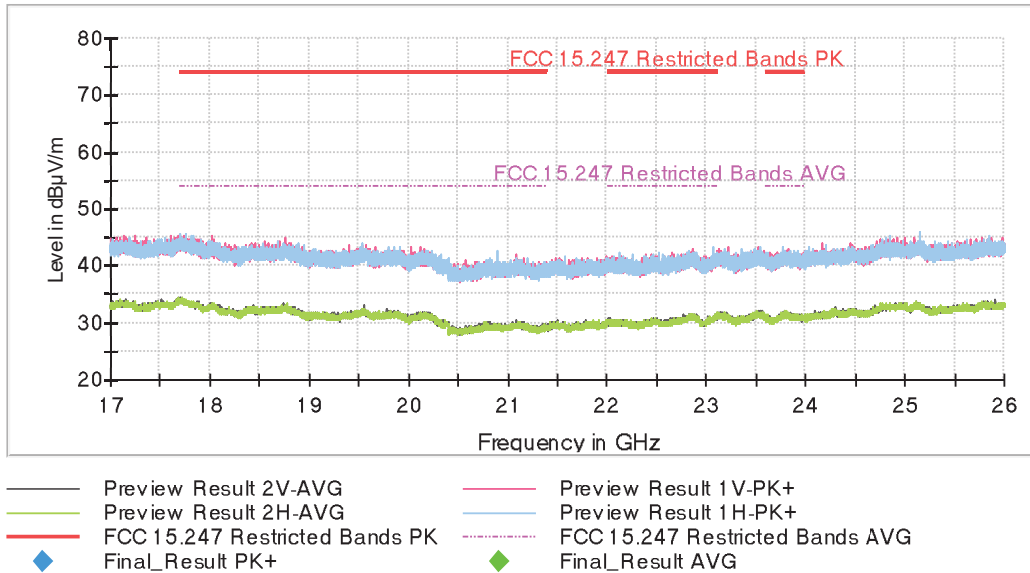


This plot is valid for the Low, Middle and High Channels.

FREQUENCY RANGE 2.31-2.39 GHZ


- Low Channel:

Full Spectrum

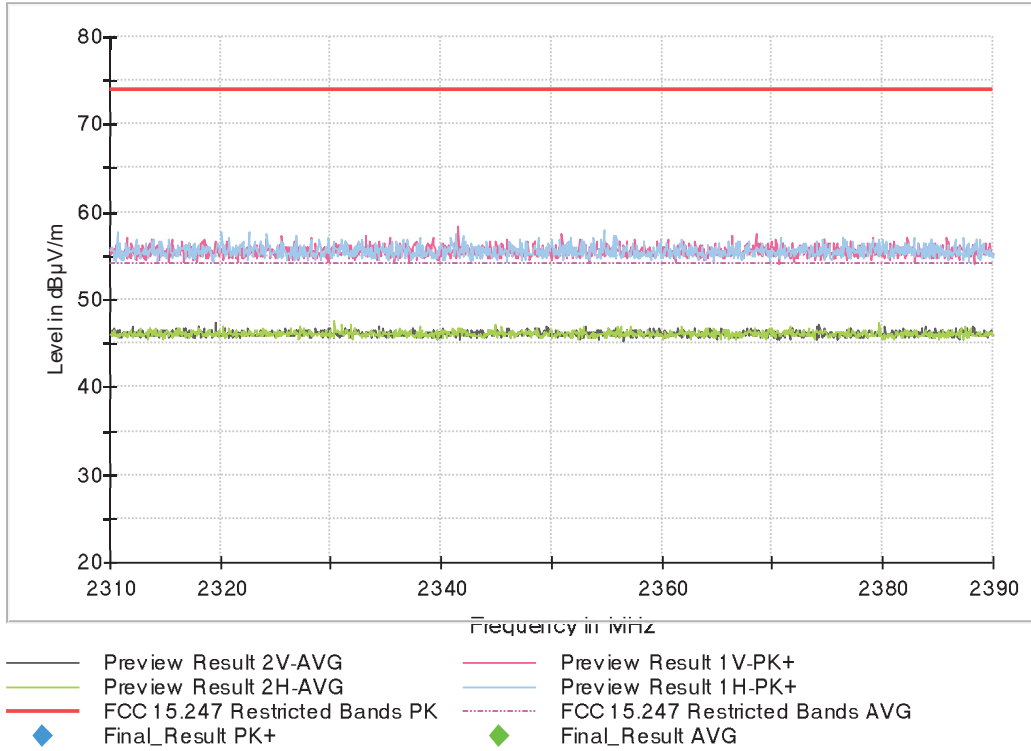


- Middle Channel:

Full Spectrum

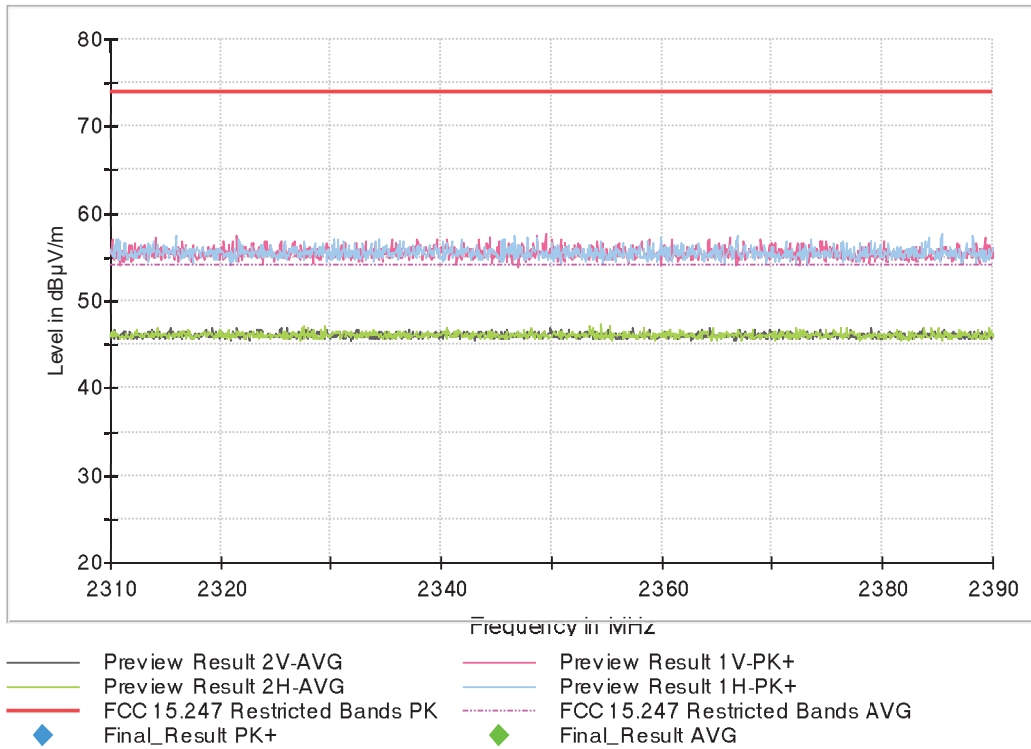

- High Channel:


Full Spectrum

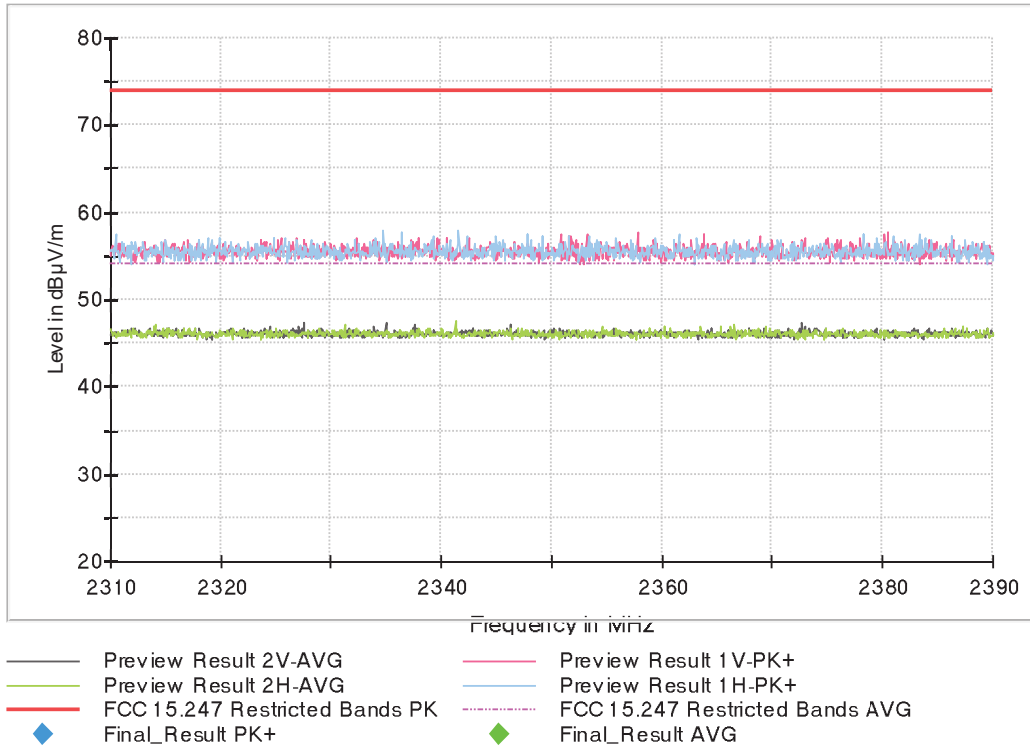

FREQUENCY RANGE 2.4835-2.5 GHz


- Low Channel:

Full Spectrum

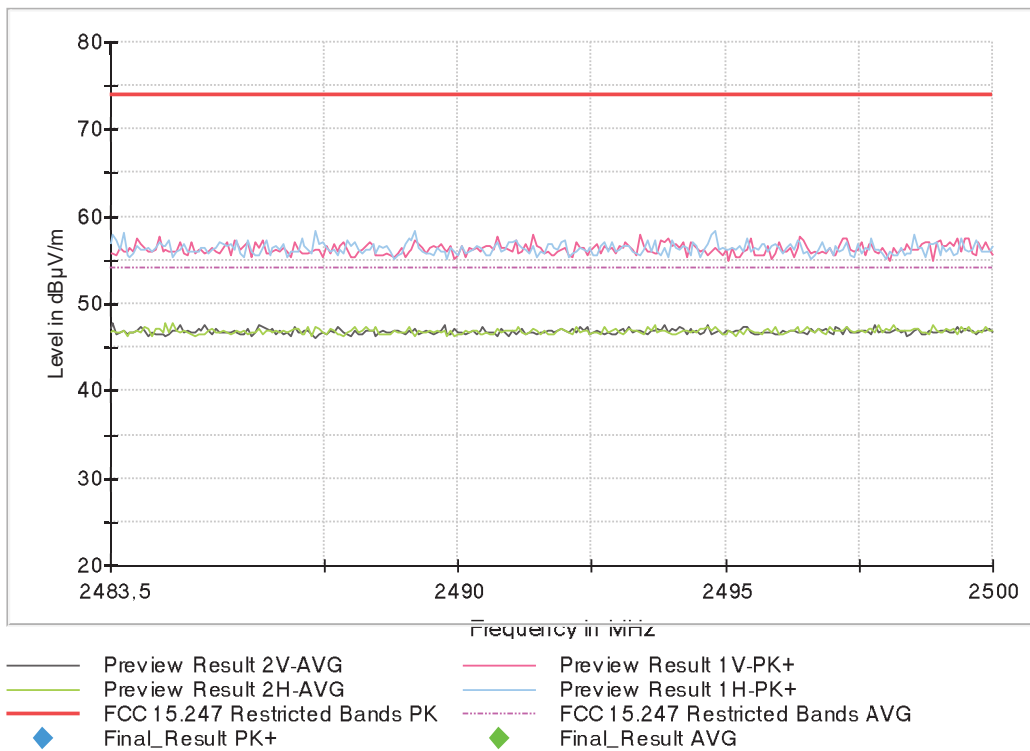


- Middle Channel:

Full Spectrum

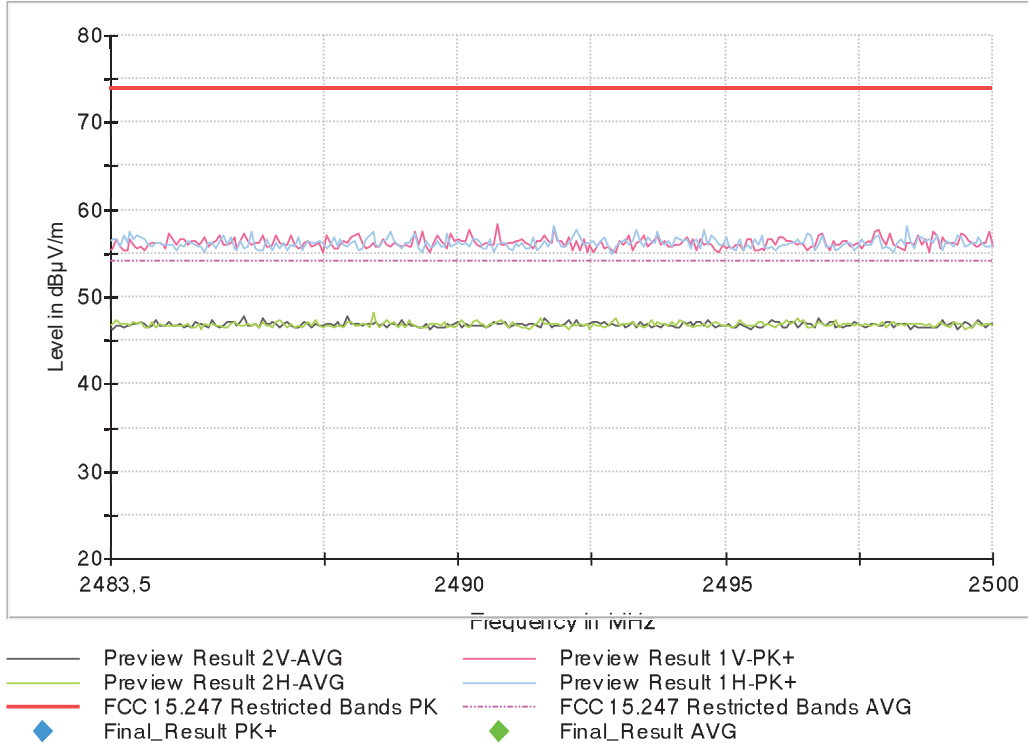

- High Channel:

Full Spectrum

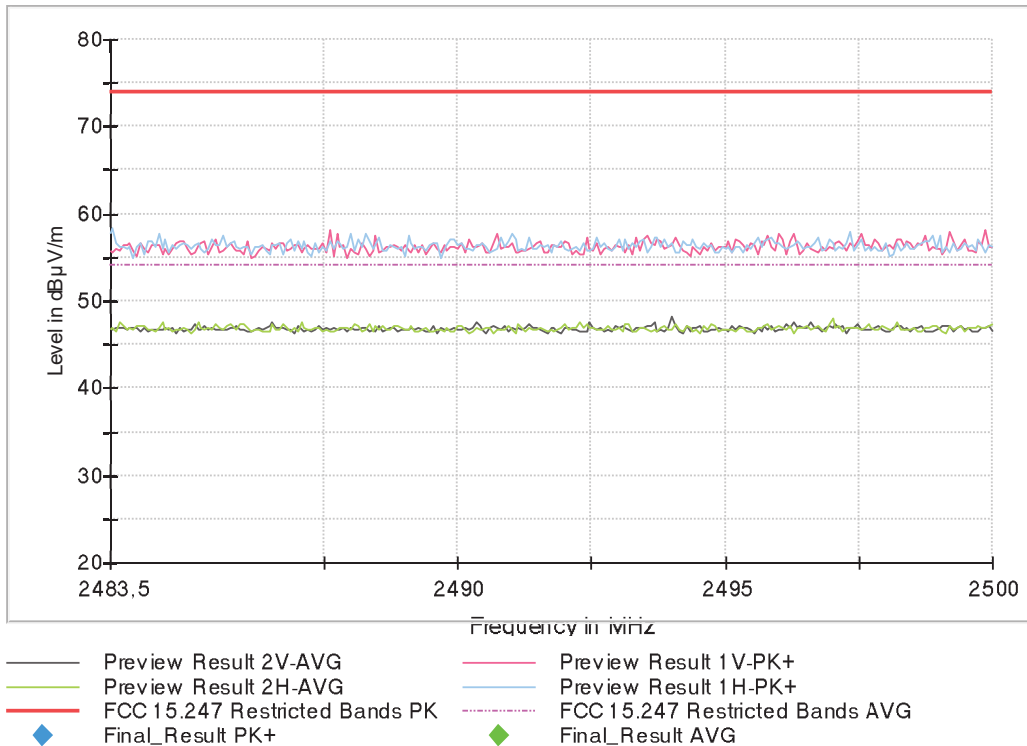

Appendix D: Test results. **Proprietary protocol Flora 2.4 GHz**

INDEX

TEST CONDITIONS	70
Occupied Bandwidth	73
15.249 (a) / RSS-210 B.10 (a) Field strength of fundamental and harmonics emissions	75
15.249 (d) / RSS-210 B.10 (b) Emissions radiated outside of the specific frequency bands	78

TEST CONDITIONS

POWER SUPPLY (V) and ANTENNA:

V nominal:	3.7 Vdc
Type of Power Supply:	Rechargeable battery
Type of Antenna:	Integral
Declared Antenna Gain:	-8.5 dBi

TEST FREQUENCIES:

Low Channel:	2402 MHz
Middle Channel:	2440 MHz
High Channel:	2480 MHz

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyser using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



The DC supply voltage is applied using an external power supply.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz/300 kHz was used for frequencies below 1 GHz and 1MHz/3MHz for frequencies above 1 GHz.

Radiated measurements setup $f < 1$ GHz:

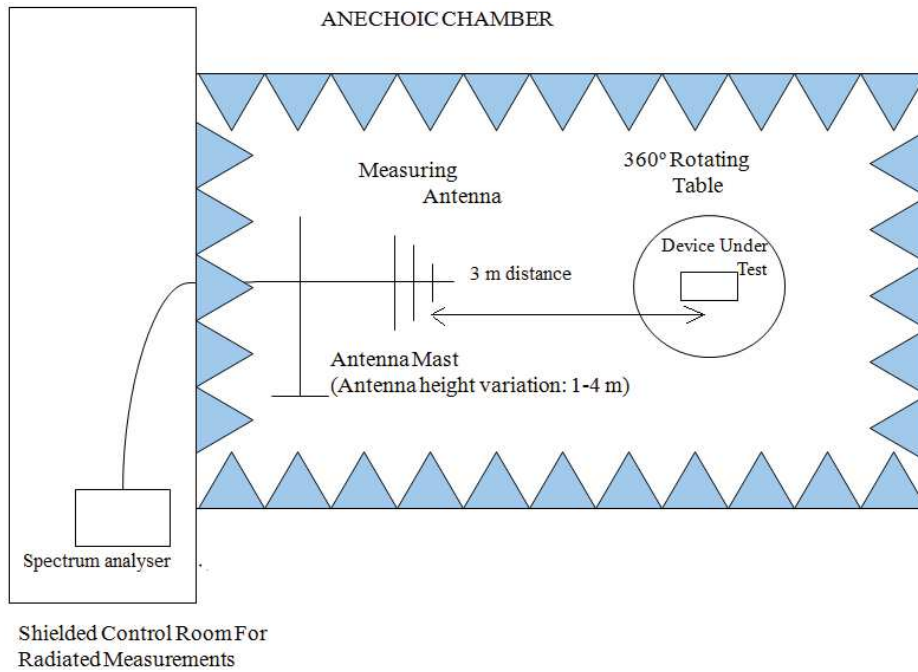

Radiated measurements setup from 1 GHz to 17 GHz:

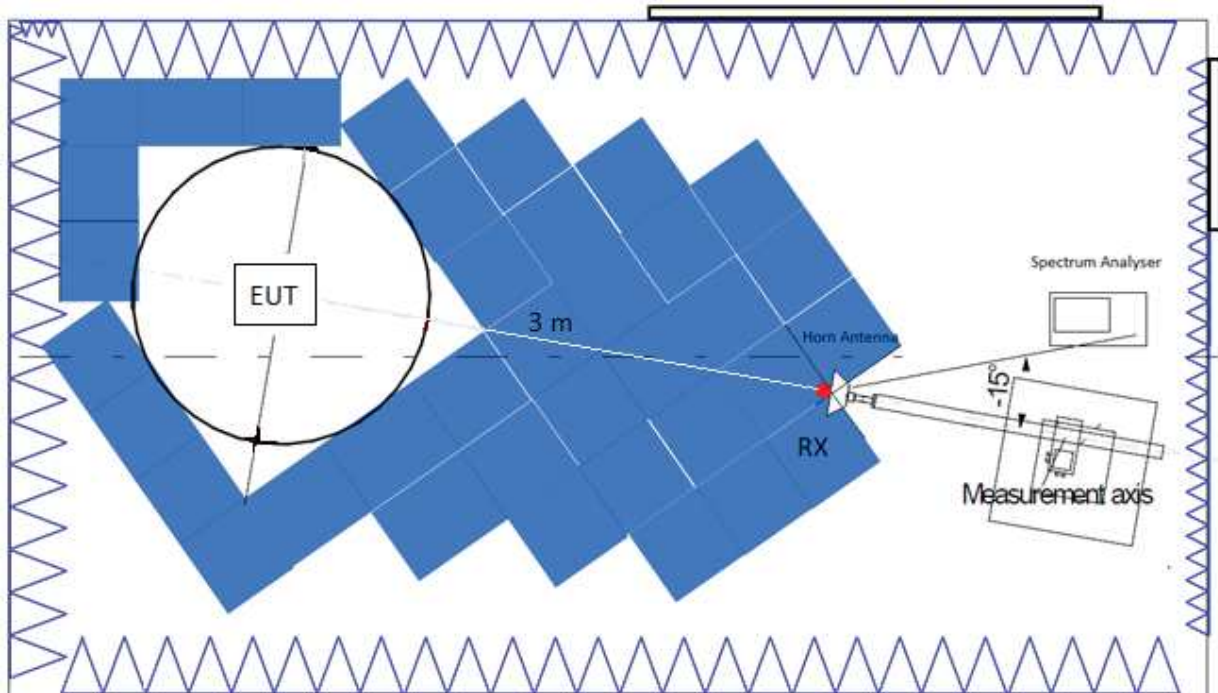

Radiated measurements setup $f > 17$ GHz:

