



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.

Part 15, Subpart C, Section 15.231

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Seeker Mobile Locating System  
Kind of Equipment: Hand-Held Seeker Tag  
Test Configuration: Plugs into CF Card port of Pocket PC (Tested at 120 vac, 60 Hz)  
Model Number(s): SKRCF01  
Model(s) Tested: SKRCF01  
Serial Number(s): 00000001  
Date of Tests: March 22, 2005  
Test Conducted For: RF Technologies, Inc.  
3125 N. 126th Street  
Brookfield, Wisconsin 53005

**NOTICE:** "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report. This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Arnom C. Rowe  
Test Engineer  
EMC-001375-NE

Reviewed By:

William Stumpf  
OATS Manager

Approved By:

Brian Mattson  
General Manager

Company Official:



RF Technologies, Inc.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

United States Department of Commerce  
National Institute of Standards and Technology

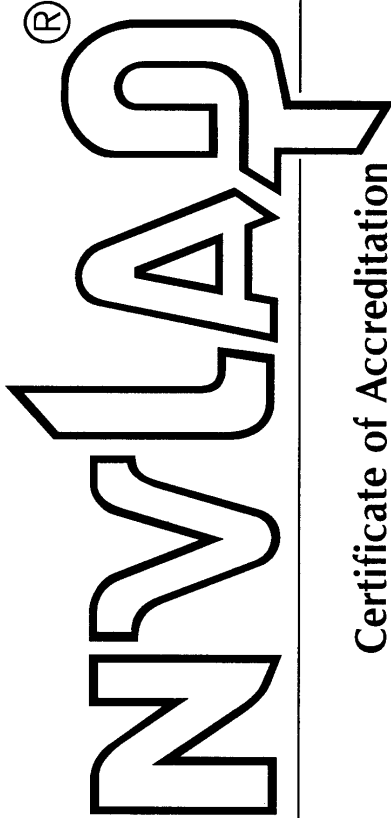

ISO/IEC 17025:1999  
ISO 9002:1994

**Certificate of Accreditation**

**D.L.S. ELECTRONIC SYSTEMS, INC.**  
WHEELING, IL

*is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

September 30, 2005

Effective through

For the National Institute of Standards and Technology  
NVLAP Lab Code: 100276-0

NVLAP-01C (06-01)



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 1 of 12

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

1250 Peterson Drive

Wheeling, IL 60090-6454

Mr. Brian J. Mattson

Phone: 847-537-6400 Fax: 847-537-6488

E-Mail: [bmattson@dlsemc.com](mailto:bmattson@dlsemc.com)

URL: <http://www.dlsemc.com>

**NVLAP Code Designation / Description**

**Emissions Test Methods:**

- |            |   |
|------------|---|
| 12/160D21  | RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy  |
| 12/300220a | EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods |
| 12/300386a | EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements  |
| 12/C63.17  | ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices  |

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 2 of 12

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/C6317a	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
12/CIS11	IEC/CISPR 11 + A1 (1997), EN 55011 (1998), AS/NZS CISPR 11 (2002), and CNS 13803 (1997): Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific, and Medical Radio-Frequency Equipment
12/CIS13	IEC/CISPR 13 (2001-04), EN 55013 (2001), AS/NZS CISPR 13 (2003), and CNS 13439 (2001): Sound and television broadcast receivers and associated equipment - Radio disturbance characteristics - Limits and methods of measurement
12/CIS14	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similiar Electrical Apparatus - Part 1: Emissions
12/CIS14a	EN 55014-1 (1993), A1 (1997), A2 (1999):
12/CIS14d	IEC/CISPR 14-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12/CIS14e	EN 55014-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 3 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS14f	AS/NZS 1044 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14g	CNS 13783-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS15	IEC/CISPR 15 (2000) + A1 (2001): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15a	AS/NZS CISPR 15 (2002): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15b	CNS 13439 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15c	EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS22	IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment
12/CIS22a	IEC/CISPR 22 (1993) and EN 55022 (1994): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 4 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A)
12/EM03	IEC 61000-3-3(1995); EN 61000-3-3(1995); AS/NZS 2279.3(1995): EMC - Part 3: Limits - Section 3. Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to 16A
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
12/FCC15c	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart C: Intentional Radiators
12/FCC15d	ANSI C63.4(2001) with FCC Method 47 CFR Part 15, Subpart D: Unlicensed Personal Communications Service Devices

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 5 of 12

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/FCC15e	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart E: Unlicensed National Information Infrastructure Service Devices
12/T51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment
12/VCCIa	Agreement of Voluntary Control Council for Interference by Information Technology Equipment - Technical Requirements: V-3/02.04

**Immunity Test Methods:**

12/1089a	GR-1089-CORE, Issue 3, October 2002: Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections 2, 3.3, and 3.5)
12/160D16	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 16 - Power Input
12/160D17	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 17 - Voltage Spike
12/160D18	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 18 - Audio Frequency Conducted Susceptibility - Power Inputs

September 30, 2005

Effective through

For the National Institute of Standards and Technology





Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 6 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/160D19	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 19 - Induced Signal Susceptibility
12/160D20	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 20 - Radio Frequency Susceptibility (Radiated and Conducted)
12/160D22	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 22 - Lightning Induced Transient Susceptibility
12/160D25	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 25 - Electrostatic Discharge (ESD)
12/I01	IEC 61000-4-2, Ed. 2.1 (2001), A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
12/I02	IEC 61000-4-3, Ed. 2.0 (2002-03); EN 61000-4-3 (2002): Radiated Radio-Frequency Electromagnetic Field Immunity Test
12/I03	IEC 61000-4-4(1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test
12/I04	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 7 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

**NVLAP Code    Designation / Description**

- 12/I05            IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
- 12/I06            IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test
- 12/I07            IEC 61000-4-11, Ed. 1.1 (2001-03); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests
- 12/J111324       SAE J1113/24: Immunity to radiated electromagnetic fields; 10 kHz to 200 MHz - Crawford TEM cell and 10 kHz to 5 GHz - Wideband TEM cell
- 12/J111341       SAE J1113/41 (1995-07): Limits and methods of measurement of radio disturbance characteristics of components and modules for the protection of receivers used on board vehicles

**Radio Test Methods**

- 12/RSS119       RSS-119, Issue 6 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
- 12/RSS123       RSS-123, Issue 1, Rev. 2 (November 6, 1999): Low Power Licensed Radiocommunication Devices

September 30, 2005

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 8 of 12


**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS125	RSS-125 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 1.705 to 50.0 MHz, Primarily Amplitude Modulated
12/RSS131	RSS-131, Issue 2 (July 2003): Zone Enhancers for the Land Mobile Service
12/RSS132	RSS-132, Issue 1 (August 2002): 800 MHz Cellular Telephones Employing New Technologies
12/RSS133	RSS-133, Issue 2, Rev. 1 (November 6, 1999): 2GHz Personal Communications Services
12/RSS134	RSS-134, Issue 1, Rev. 1 (March 25, 2000): 900 MHz Narrowband Personal Communication Service
12/RSS135	RSS-135, Issue 1 (October 26, 1996): Digital Scanner Receivers
12/RSS136	RSS-136, Issue 5 (October 2002): Land and Mobile Station Radiotelephone Transmitters and Receivers Operating in the 26.960 - 27.410 MHz General Radio Service Band
12/RSS137	RSS-137, Issue 1, Rev. 1 (September 25, 1999): Location and Monitoring Service (902 - 928 MHz)
12/RSS139	RSS-139, Issue 1 (February 5, 2000): Licensed Radiocommunications Devices in the Band 2400 - 2483.5 MHz

September 30, 2005



Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 9 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS141	RSS-141, Issue 1 (July 2003): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz
12/RSS142	RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands
12/RSS170	RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations
12/RSS191	RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands
12/RSS192	RSS-192, Issue 1 (November 6, 1999): Fixed Wireless Access Systems in the Band 3400 - 3700 MHz
12/RSS193	RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands
12/RSS210	RSS-210, Issue 5 (November 2001): Low Power Licence-Exempt Radiocommunication Devices
12/RSS212	RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 10 of 12

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

*NVLAP Code Designation / Description*

12/RSS213 RSS-213, Issue 1 (April 24, 1999): 2 GHz Licence-Exempt Personal Communications Service Devices (PCS)

12/RSS215 RSS-215, Issue 1 (November 6, 1999): Analogue Scanner Receivers

**Telecommunications Test Methods:**

12/FCC2a2 TIA/EIA 603A (2001) with 47 CFR Part 2: Public Mobile Services in 47 CFR Part 22

12/FCC2b2 TIA/EIA 603A (2001) with 47 CFR Part 2: Private Land Mobile Radio Services in 47 CFR Part 90

12/FCC2d1 TIA/EIA 603A (2001) with 47 CFR Part 2: Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services in 47 CFR Part 74

12/FCC2e1 TIA/EIA 603A (2001) with 47 CFR Part 2: International Fixed Public Radiocommunication Services in 47 CFR Part 23

12/CIS15c EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 11 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

*NVLAP Code Designation / Description*

**MIL-STD-462 : Conducted Emissions:**

- 12/A13 MIL-STD-462 Version D Method CE101
- 12/A14 MIL-STD-462 Version D Method CE102
- 12/A16 MIL-STD-461 Version E Method CE101
- 12/A17 MIL-STD-461 Version E Method CE102
- 12/A18 MIL-STD-461 Version E Method CE106

**MIL-STD-462 : Conducted Susceptibility:**

- 12/B12 MIL-STD-462 Version D Method CS101
- 12/B13 MIL-STD-462 Version D Method CS103
- 12/B25 MIL-STD-461 Version E Method CS114
- 12/B26 MIL-STD-461 Version E Method CS115
- 12/B27 MIL-STD-461 Version E Method CS116

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090



ISO/IEC 17025:1999  
 ISO 9002:1994

## Scope of Accreditation



Page: 12 of 12

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

*NVLAP Code Designation / Description*

**MIL-STD-462 : Radiated Emissions:**

- 12/D04 MIL-STD-462 Version D Method RE101
- 12/D05 MIL-STD-462 Version D Method RE102
- 12/D06 MIL-STD-462 Version D Method RE103

**MIL-STD-462 : Radiated Susceptibility:**

- 12/E08 MIL-STD-462 Version D Method RS101
- 12/E09 MIL-STD-462 Version D Method RS103

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

TABLE OF CONTENTS

i. Cover Page ..... 1

ii. Signature Page ..... 2

iii. NVLAP Certificate of Accreditation ..... 3

iv. NVLAP Scope of Accreditation ..... 4

v. Table of Contents ..... 16

1.0 Summary of Test Report ..... 18

2.0 Introduction ..... 18

3.0 Object ..... 18

4.0 Test Set-Up ..... 18

5.0 Test Equipment ..... 19

6.0 Ambient Measurements ..... 20

7.0 Description of Test Sample ..... 21

8.0 Additional Description of Test Sample ..... 23

9.0 Photo Information and Test Set-Up ..... 24

10.0 Radiated Photos Taken During Testing ..... 25

10.0 Conducted Photos Taken During Testing ..... 29

11.0 Results of Tests ..... 30

12.0 Conclusion ..... 30

TABLE 1 – EQUIPMENT LIST ..... 31





Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## TABLE OF CONTENTS

Appendix A – Electric Field Radiated Emissions Test.....	33
1.0 Conducted Emission Measurements.....	34
1.0 Conducted Data and Graph(s) taken during testing.....	35
2.0 Pulsed Operation (Duty Cycle Correction Factor).....	40
2.0 Graph(s) taken of the Pulsed Operation (DCCF).....	41
3.0 Bandwidths .....	44
3.0 Graph(s) taken of the Bandwidth Emissions .....	45
4.0 Field Strength of Spurious Emission Measurements.....	48
4.0 Data taken of the Fundamental and Spurious Emissions.....	49
5.0 Restricted Bands .....	51



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 1.0 SUMMARY OF TEST REPORT

It was found that the Seeker Mobile Locating System, Model Number(s) SKRCF01, "**meets**" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.231 for periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.

This test report relates only to the items tested and contains the following number of pages.

Text: 51

## 2.0 INTRODUCTION

On March 22, 2005, a series of radio frequency interference measurements was performed on Seeker Mobile Locating System, Model Number(s) SKRCF01, Serial Number: 00000001. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

## 3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.33, 15.35, 15.205, 15.209 & 15.231 for Intentional Radiators operating in the Band 40.66-40.70 and above 70 MHz.

## 4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

### 7.1 Description:

The seeker CF card is the mobile handheld unit for the seeker system. The CF card follows the Type II Compact Flash standard and incorporates a 433MHz transceiver for locating Seeker tags. Upon pushing the Find button the CF card transceiver transmits for less than 5 seconds. In that time, all tags in the area of the handheld unit wake up and determine if they need to reply back to the CF card. The tags only reply if the message was intended for them and the reply is displayed on the GUI of the pocket PC.

#### NOTE:

The transceiver card is powered from the Pocket PC battery, therefore a special version of the pocket pc software was written to keep the CF card port ON for an extended period of time. The transceiver card also is running a special version of firmware to keep the transceiver into continuous transmission for transmitter testing and continuous receive mode for the receiver testing.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

7.0 DESCRIPTION OF TEST SAMPLE: (CONT')

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 57mm Width: 43mm Height: 12mm

7.3 LINE FILTER USED:

None - Battery operated

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

NA

Clock Frequencies:

14.7456 MHz and 4.194304 MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. None



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:  
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

NOTE:

Transmitter Power Level Setting is set to 50.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: \_\_\_\_\_  
Signature Title

For: \_\_\_\_\_  
Company Date



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 Seeker Mobile Locating System

Model Number: SKRCF01; Serial Number: 00000001

Item 1 Koss Headphones

Item 2 Dell AC Adapter PN T2411



1250 Peterson Dr., Wheeling, IL 60090

## 10.0 RADIATED PHOTOS TAKEN DURING TESTING



1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING: (CON'T)




1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING: (CON'T)




1250 Peterson Dr., Wheeling, IL 60090

### 10.0 RADIATED PHOTOS TAKEN DURING TESTING

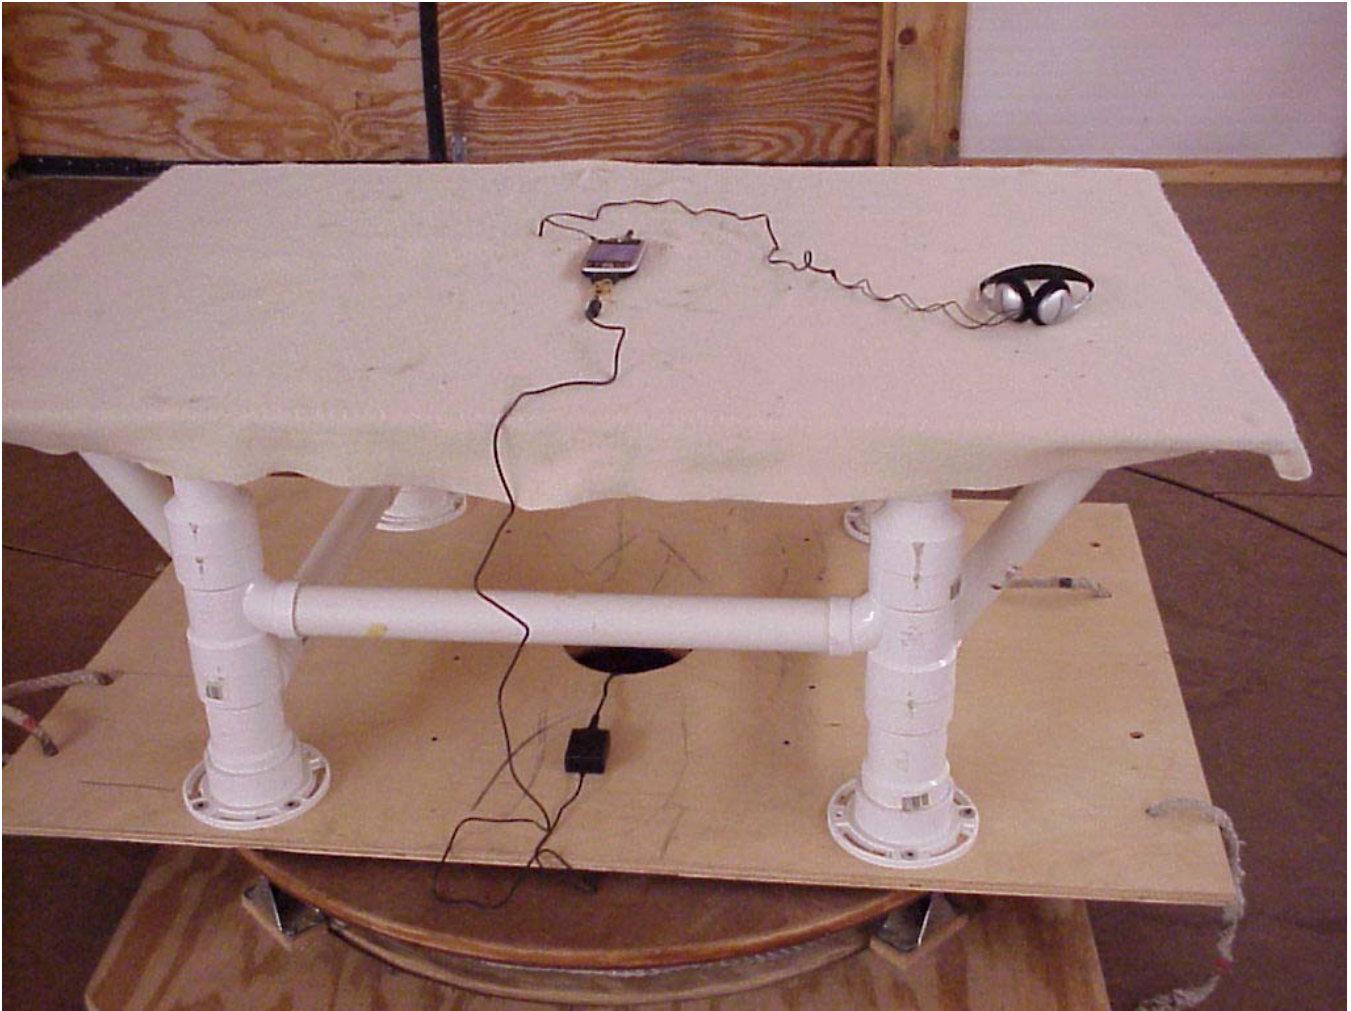

1250 Peterson Dr., Wheeling, IL 60090

### 10.0 CONDUCTED PHOTOS TAKEN DURING TESTING

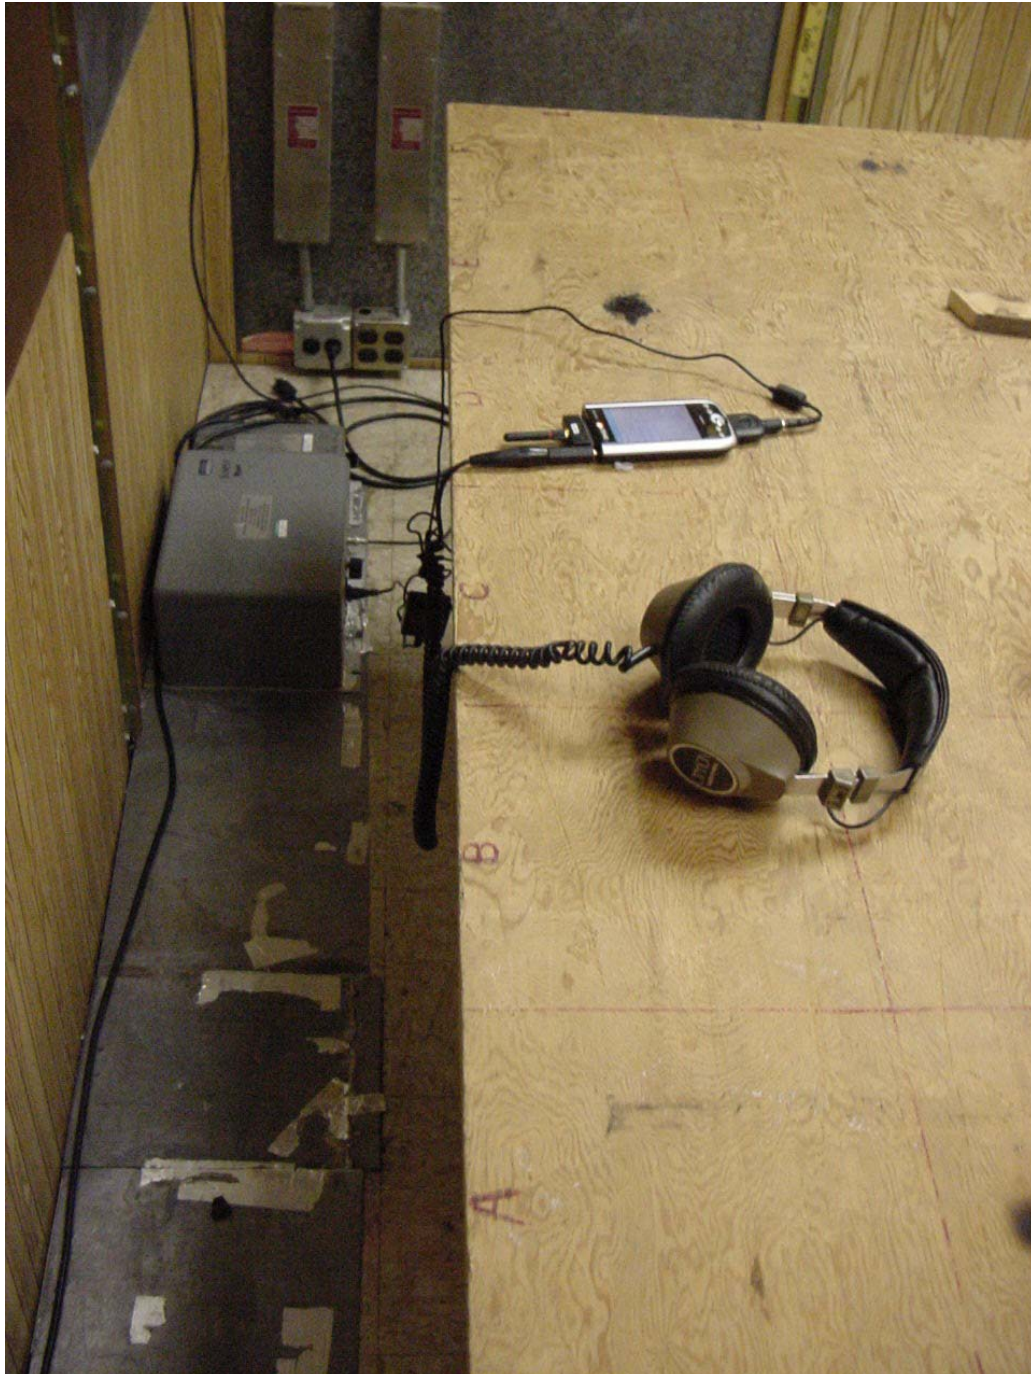



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## 11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

## 12.0 CONCLUSION

It was found that the Seeker Mobile Locating System, Model Number(s) SKRCF01 "meets" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.231 for periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Spectrum Analyzer	Hewlett/Packard	8566B	2240A002041	100 Hz – 22 GHz	10/05
Quasi-Peak Adapter	Hewlett/Packard	85650A	2043A00121	10 kHz – 1 GHz	10/05
Spectrum Analyzer	Hewlett/Packard	8566B	2421A00452	100 Hz – 22 GHz	2/06
Quasi-Peak Adapter	Hewlett/Packard	85650A	2043A00450	10 kHz – 1 GHz	2/06
Spectrum Analyzer	Hewlett/Packard	8591A	3009A00700	9 kHz – 1.8 GHz	3/06
Receiver	Electrometrics	EMC-30	44168	10 kHz – 1 GHz	9/05
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/05
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/05
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/05
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/06
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/06
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/06
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/05
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/05
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/06
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/05
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/05
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/05
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/05
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/05
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/05

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.





Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

Part 15, Subpart C, Section 15.231 (a-d)

ELECTRIC FIELD RADIATED EMISSIONS TEST



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

##### 1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to connected to the public utility (AC) power line shall not exceed 250 uV (47.96 dBuV) from 150 kHz to 30 MHz

##### **NOTE:**

All test measurements were made at a screen room temperature of «COND\_TEMP\_EMISSIONS»°F at «COND\_HUMID\_EMISSIONS»% relative humidity.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

ELECTRIC FIELD RADIATED EMISSIONS TEST

**CONDUCTED DATA AND GRAPH(S) TAKEN  
DURING TESTING**

**PART 15.207**


**FCC Part 15 Class B**

**Voltage Mains Test**

EUT: Seeker CF card  
 Manufacturer: RF Technolgies  
 Operating Condition: 71 deg. F, 28% R.H.  
 Test Site: DLS O.F. Screen Room  
 Operator: Tim o  
 Test Specification: 120 VAC @ 60 Hz  
 Comment: Line 1 - Tx Frequency - 433 MHz  
 Date: 03-22-2005

**SCAN TABLE: "FCC ClassB Voltage"**

Short Description:			FCC Class B Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			

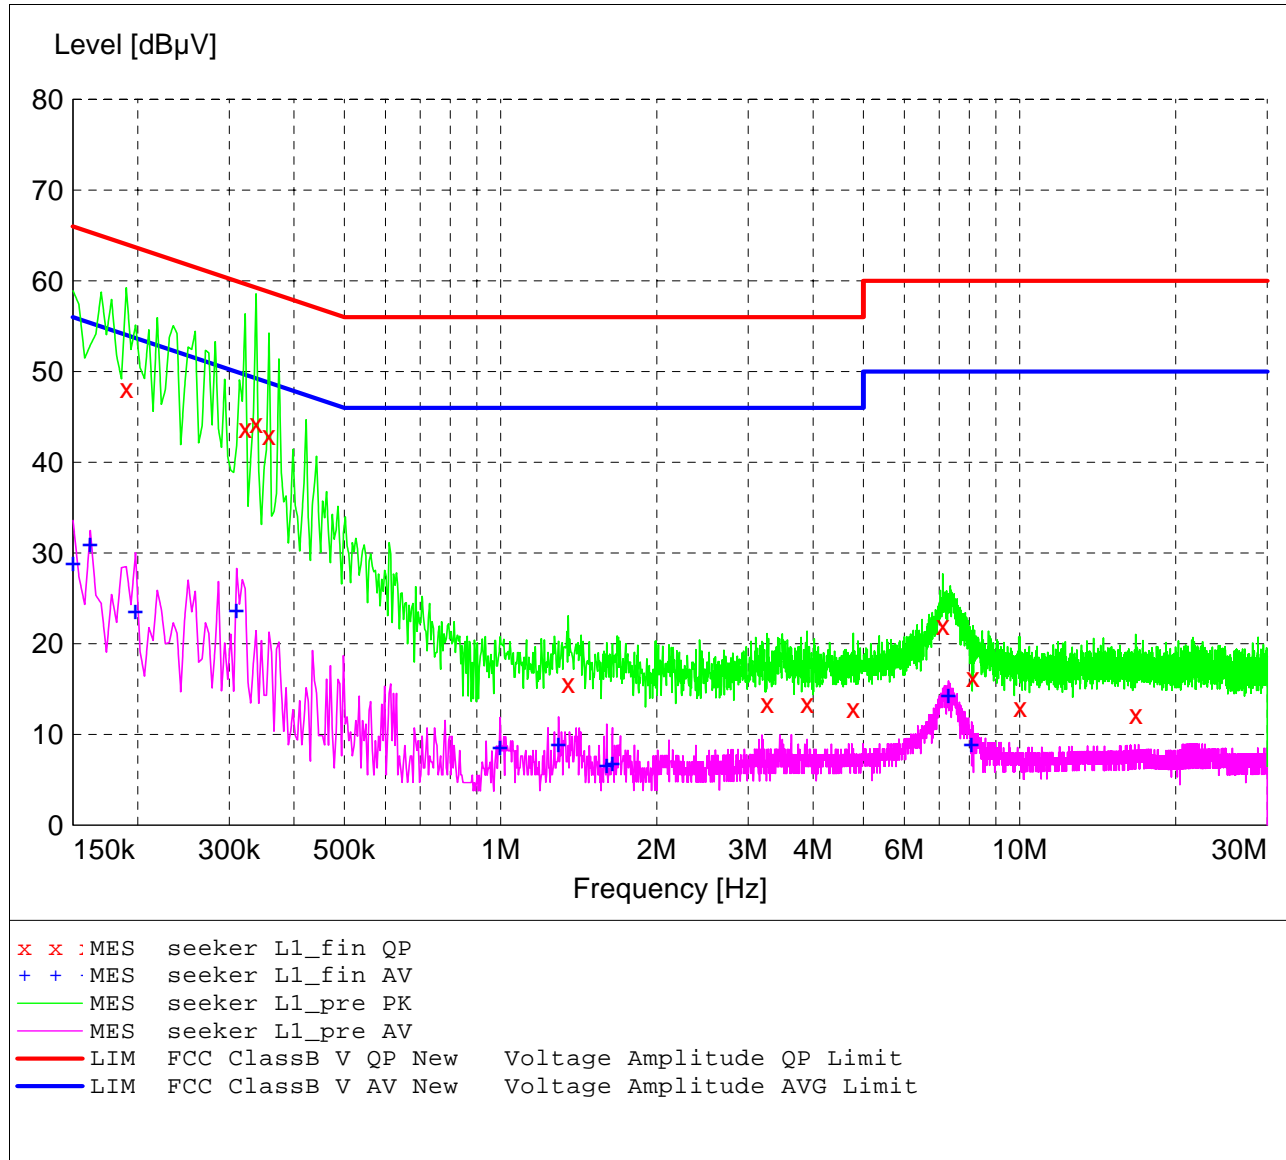

**MEASUREMENT RESULT: "seeker L1\_fin QP"**

3/22/2005 12:34PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.190000	48.20	11.0	64	15.9	---	---
0.322000	43.80	10.4	60	15.8	---	---
0.338000	44.30	10.4	59	14.9	---	---
0.358000	43.00	10.3	59	15.7	---	---
1.350000	15.60	10.3	56	40.4	---	---
3.262000	13.50	10.4	56	42.5	---	---
3.894000	13.50	10.4	56	42.5	---	---
4.782000	12.90	10.5	56	43.1	---	---
7.110000	22.00	10.6	60	38.0	---	---
8.134000	16.30	10.5	60	43.7	---	---
10.022000	13.00	10.6	60	47.0	---	---
16.738000	12.20	10.9	60	47.8	---	---

**MEASUREMENT RESULT: "seeker L1\_fin AV"**

3/22/2005 12:34PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	29.00	11.5	56	27.0	---	---
0.162000	31.10	11.3	55	24.3	---	---
0.198000	23.70	10.9	54	30.0	---	---
0.310000	23.80	10.5	50	26.2	---	---
0.998000	8.70	10.2	46	37.3	---	---
1.294000	9.00	10.3	46	37.0	---	---
1.602000	6.70	10.3	46	39.3	---	---
1.642000	6.90	10.3	46	39.1	---	---
7.294000	14.40	10.6	50	35.6	---	---
8.082000	9.00	10.5	50	41.0	---	---


**FCC Part 15 Class B**

**Voltage Mains Test**

EUT: Seeker CF card  
 Manufacturer: RF Technolgies  
 Operating Condition: 71 deg. F, 28% R.H.  
 Test Site: DLS O.F. Screen Room  
 Operator: Tim o  
 Test Specification: 120 VAC @ 60 Hz  
 Comment: Line 2 - Tx Frequency - 433 MHz  
 Date: 03-22-2005

**SCAN TABLE: "FCC ClassB Voltage"**

Short Description:			FCC Class B Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			

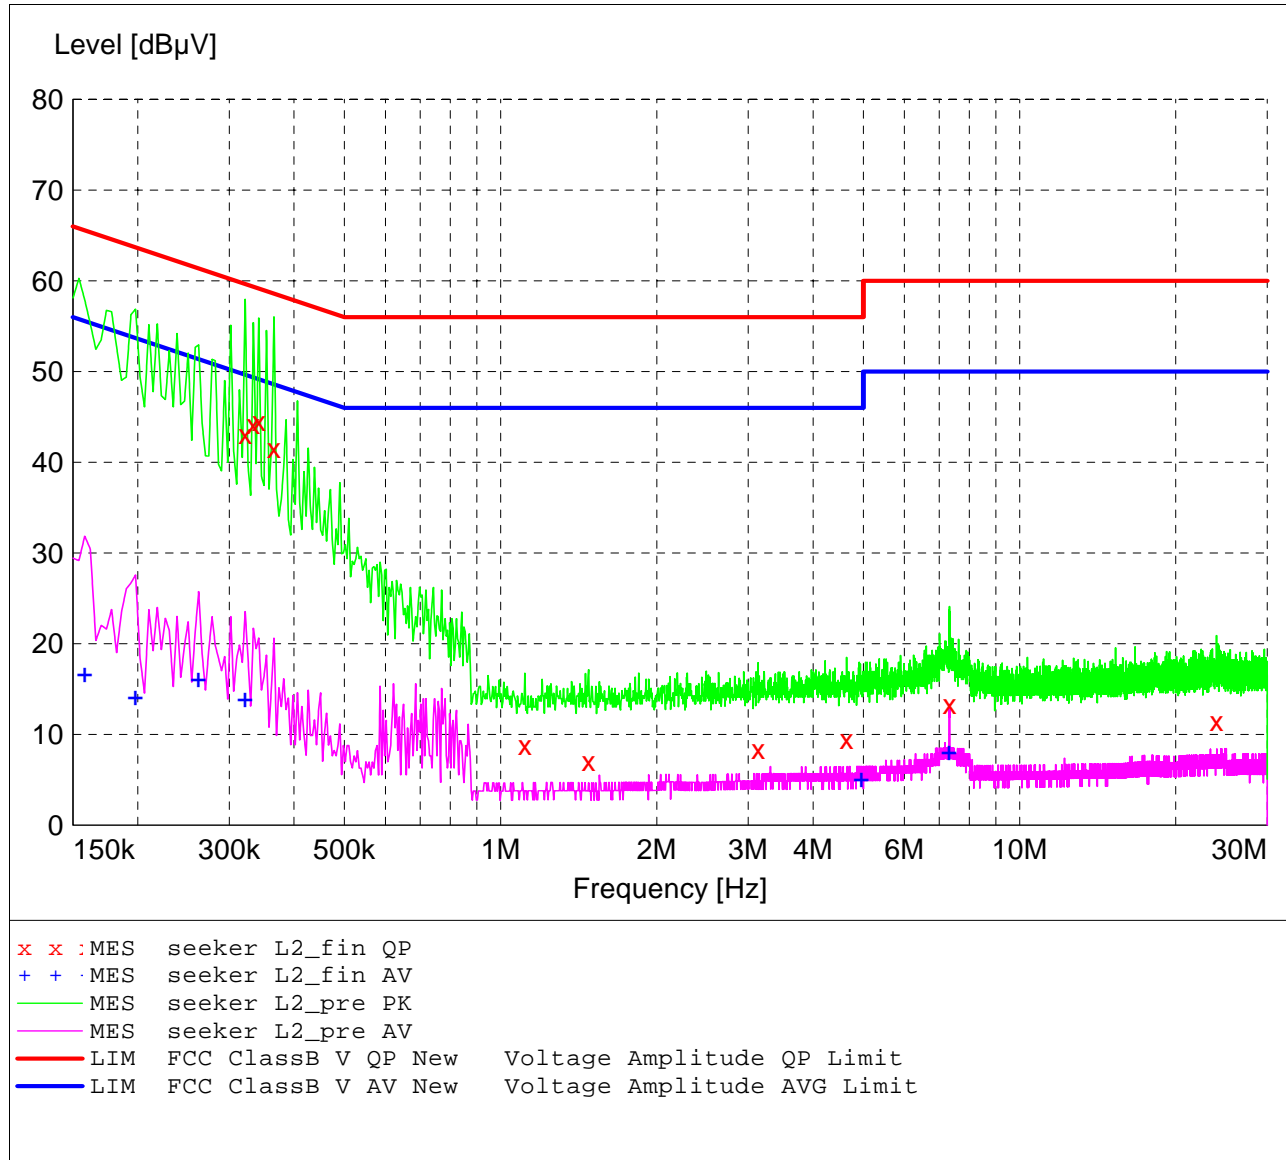

**MEASUREMENT RESULT: "seeker L2\_fin QP"**

3/22/2005 12:40PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.322000	43.10	10.4	60	16.6	---	---
0.334000	44.20	10.4	59	15.2	---	---
0.342000	44.50	10.4	59	14.7	---	---
0.366000	41.50	10.3	59	17.1	---	---
1.114000	8.80	10.3	56	47.2	---	---
1.478000	7.00	10.2	56	49.0	---	---
3.134000	8.40	10.4	56	47.6	---	---
4.642000	9.50	10.4	56	46.5	---	---
7.330000	13.30	10.6	60	46.7	---	---
23.962000	11.50	11.0	60	48.5	---	---

**MEASUREMENT RESULT: "seeker L2\_fin AV"**

3/22/2005 12:40PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.158000	16.70	11.4	56	38.9	---	---
0.198000	14.20	10.9	54	39.5	---	---
0.262000	16.20	10.7	51	35.1	---	---
0.322000	14.00	10.4	50	35.7	---	---
4.962000	5.20	10.5	46	40.8	---	---
7.314000	8.10	10.6	50	41.9	---	---



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

##### 2.0 PULSED OPERATION (Duty Cycle Correction Factor)

The radiated emission tests made at D.L.S. Electronic Systems, Inc. for the Seeker Mobile Locating System, Model Number SKRCF01, are shown by the graphs on the following pages. The actual total "on time" during the 100 msec is 52.9056 msec with a total "off time" of 94.71 msec resulting in a **5.53 Duty Cycle Correction Factor**.

To find the actual "on time" during the 100 msec period, the data word is multiplied by the number of data words per 100 msec, yielding actual on time. Taking this number and dividing it by the 100 msec period gives us the Duty Cycle. We then take the Log of the Duty Cycle and multiply it by 20. This gives us the Duty Cycle Correction Factor. The following method was used to determine the Duty Cycle Correction Factor:

Total on time during 100 msec.

$220.44 \text{ usec/pulse on time} * 240 \text{ pulses} = 52905.6 \text{ usec (data word on time)}$

$0 \text{ usec/pulse on time} * 0 \text{ pulses} = 0 \text{ usec (data word on time)}$

$52905.6 \text{ usec (data on time)} + 0 \text{ usec (data on time)} = 52905.6 \text{ usec total "on time"}$

$52.9056 \text{ msec (total "on time")} / 100 \text{ msec} = 529056 \text{ Duty Cycle}$

$20 * \text{LOG}_{10} 529056 = \mathbf{5.53 \text{ dB Duty Cycle Correction Factor}}$

NOTE:

For pulsed operation, the switches were set to generate their maximum "on" time, and measurements were made with the peak detector. As stated in Docket 86-422, the duty cycle of the pulse is determined from the total "on" time for the worst case condition during 100 msec. Using the percentage of the total "on" time over a 100 msec period, the total absolute average value was determined. As stated in Section 3, a maximum of 20 dB can be used.

See the following pages for the graphs of the actual measurements that were made:





Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## GRAPH(S) TAKEN OF THE PULSED OPERATION

PART 15.231

### GRAPHS TAKEN OF THE PULSE TRAIN SHOWING THE FOLLOWING:

1. Number of Bits per Data Word
2. Number of Pulses per 100 msec
3. Off Time between Data Words
4. Data Word On Time




Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 03-22-2005  
 Company: RF Technologies  
 EUT: SKRCF01  
 Test: Duty Cycle  
 Operator: Craig Brandt  
 Comment: 24 pulses at 220.44 μs each = 5.29 ms ON  
 during a 10 ms period.

$$20 \log (5.29/10) = -5.53$$

**duty cycle correction factor = 5.5 dB**

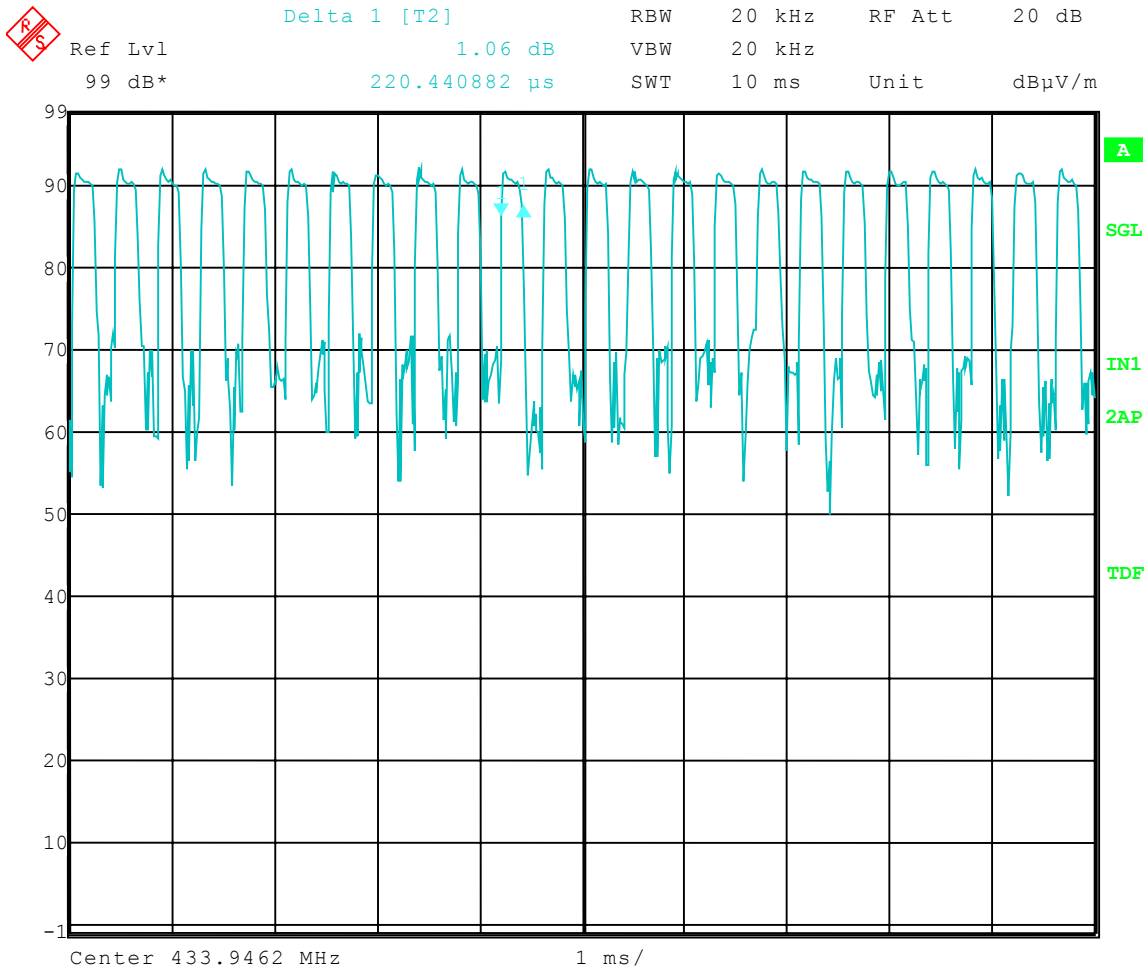


Date: 22.MAR.2005 08:42:32



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 03-22-2005  
Company: RF Technologies  
EUT: SKRCF01  
Test: Duty Cycle  
Operator: Craig Brandt  
Comment: 100 ms sweep

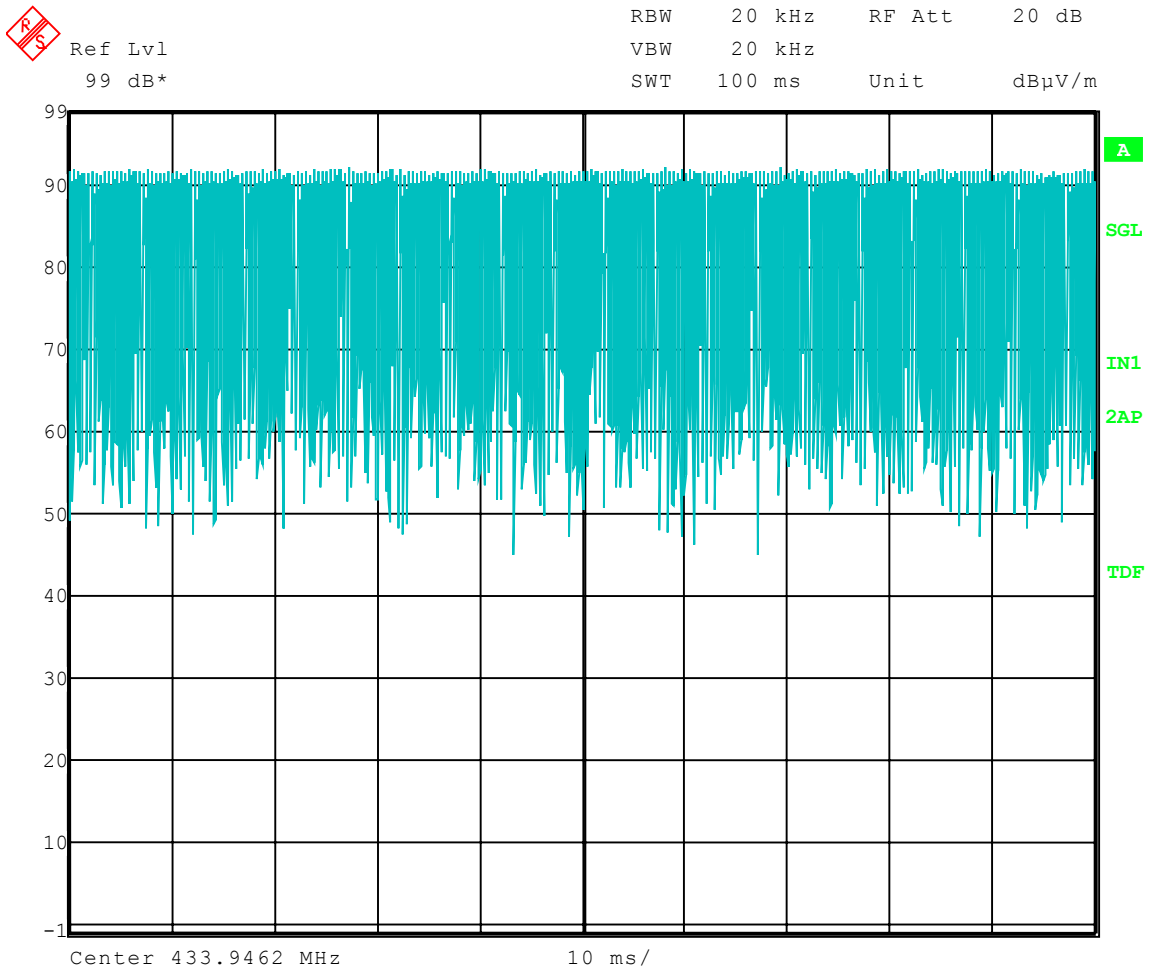

Date: 22.MAR.2005 08:46:25



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

#### 3.0 BANDWIDTHS

The bandwidth of the transmitter shall be confined to the following specifications as specified in Section 15.231c & d:

40.66 MHz to 40.7 MHz	±.01% within the band edges
70 MHz to 900 MHz	.25% of the center frequency
Above 900 MHz	.50% of the center frequency

The bandwidth is determined at the points 20 dB down from the modulated carrier.

As shown by the graph(s) on the following page(s), the bandwidth for the Seeker Mobile Locating System was measured at 111.63 kHz, which meets the above specification. With a fundamental frequency of 433.9164 MHz, the FCC Bandwidth limit is 1.084791 MHz when multiplying the fundamental by 0.0025%, with a margin of 973.161 kHz.



Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## GRAPH(S) TAKEN OF THE BANDWIDTH EMISSIONS

PART 15.231c & d




Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 03-22-2005  
 Company: RF Technologies  
 EUT: SKRCF01  
 Test: 20 dB Bandwidth  
 Operator: Craig Brandt  
 Comment: Frequency – 433.92 MHz

**20 dB Bandwidth = 111.63 kHz**

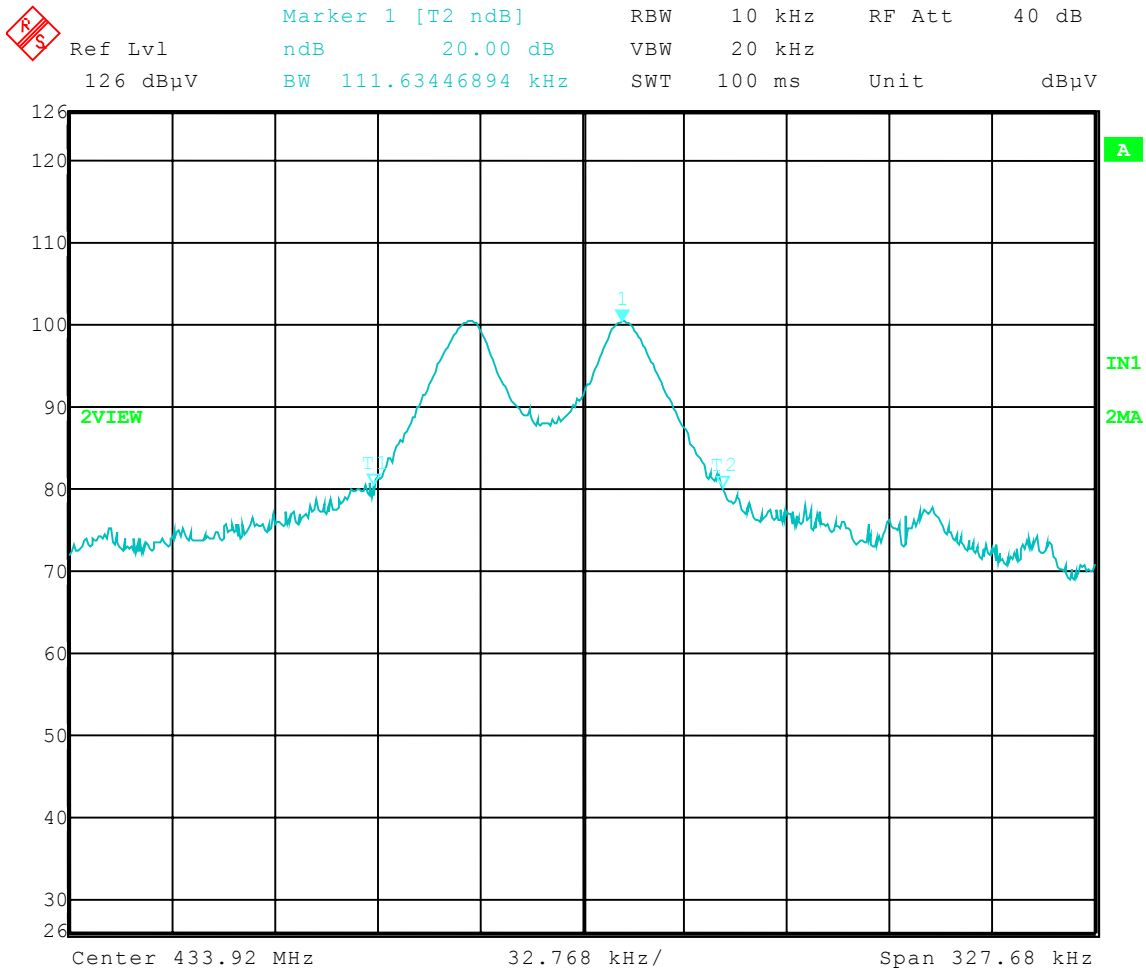

Date: 22.MAR.2005 08:51:13




Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 03-22-2005  
Company: RF Technologies  
EUT: SKRCF01  
Test: 20 dB Bandwidth  
Operator: Craig Brandt  
Comment: Frequency – 433.92 MHz, 1.5 MHz SPAN

20 dB Bandwidth = 114.23 kHz

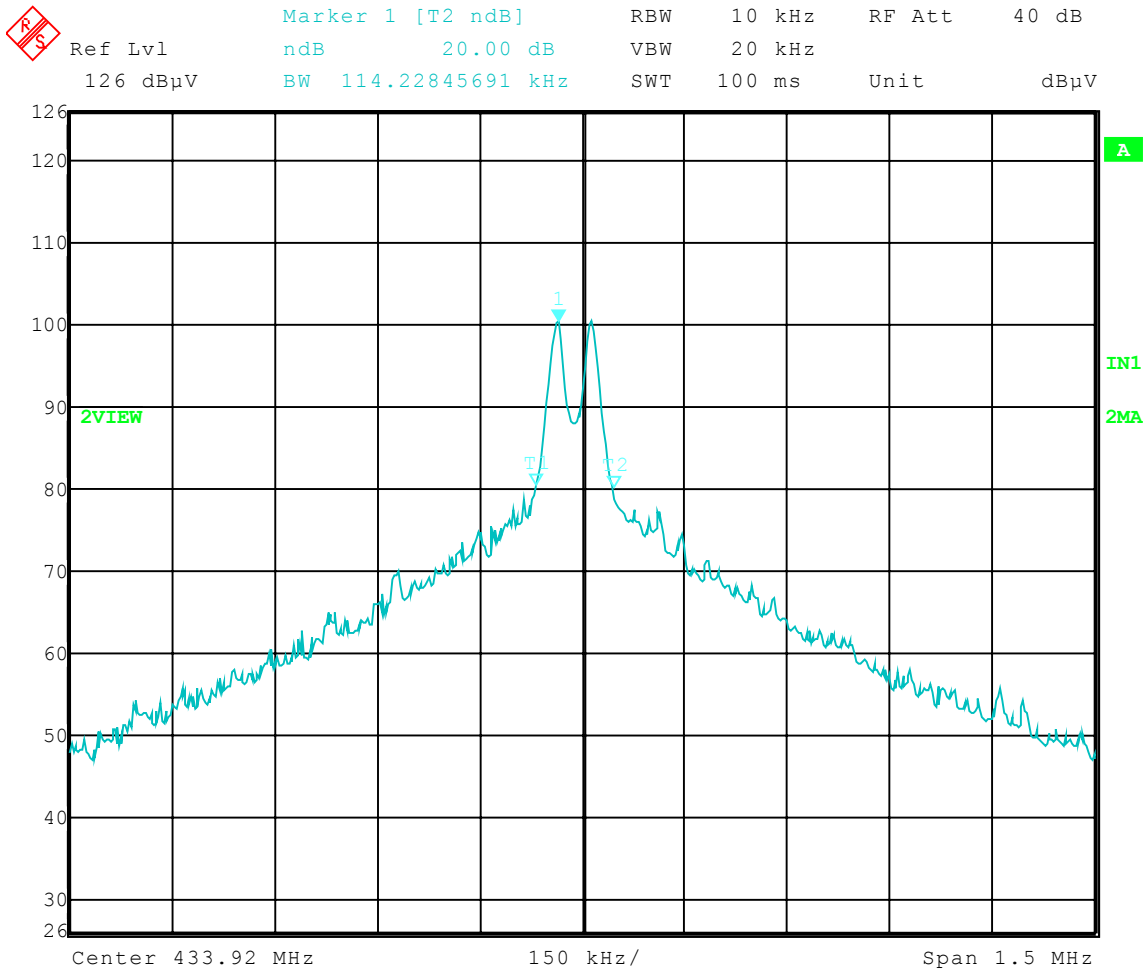

Date: 22.MAR.2005 08:52:42



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

ELECTRIC FIELD RADIATED EMISSIONS TEST

4.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS - SECTION 15.231(b)

For operation in the band 40.66 to 40.70 MHz and above 70 MHz the field strength of any emissions within this band shall not exceed the following table at a distance of 3 meters as specified in FCC, Part 15, Section 15.231(b), based on the average value of the measured emissions. The limits are shown in the following table.

Fundamental Frequency in MHz	Field Strength of Fundamental (uV/m at 3m)	Field Strength of Harmonics (uV/m at 3m)
40.66 to 40.70	2250 (67.04 dBuV)	225 (47.04 dBuV)
70 to 130	1250 (61.94 dBuV)	125 (41.94 dBuV)
130 to 174	1250 (61.94 dBuV) to 3750 (71.48 dBuV)	125 (41.94 dBuV) to 375 (51.48 dBuV)
174 to 260	3750 (71.48 dBuV)	375 (51.48 dBuV)
260 to 470	3750 (71.48 dBuV) to 12500 (81.84 dBuV)	375 (51.48 dBuV) to 1250 (61.94 dBuV)
470 and above	12500 (81.84 dBuV)	1250 (61.94 dBuV)

**NOTE:**

Preliminary radiation measurements may have been performed at a 3 meter or ten meter test distance. The frequency range from 30 MHz to 1000 MHz was scanned at receive antenna heights from one to four meters, and with a 360° rotation of the EUT. Plots were made and the worst-case emissions were recorded.

As stated in 15.35b the 20 dB peak-to-average limit is applicable to all devices measured using an average detector.





Company: RF Technologies, Inc.  
Model Tested: SKRCF01  
Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

## DATA TAKEN OF FUNDAMENTAL AND SPURIOUS EMISSIONS

PART 15.231b



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

**Radiated Fundamental and Spurious Emissions – 30 MHz to 5 GHz**

EUT: SKRCF01  
 Operating Condition: 70 deg F; 29% R.H.  
 Test Site: Site 3, Tested at 3 meters  
 Operator: Craig Brandt  
 Comment: Continuous Transmit  
 Date: 03/22/2005

Notes: (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.  
 (2) All other emissions at least 20 dB under the limit.

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
176.96	Max Peak	Horz	29.59	15.61	-22.8	22.4	-5.5	16.9	60.8	43.9	2.2	315	Spurious
221.19	Max Peak	Vert	37.65	11.28	-22.5	26.4	-5.5	20.9	60.8	39.9	1.0	270	Spurious
221.19	Max Peak	Horz	36.26	11.28	-22.5	25.0	-5.5	19.5	60.8	41.3	1.3	180	Spurious
235.93	Max Peak	Horz	38.53	11.75	-22.4	27.8	-5.5	22.3	60.8	38.5	1.2	90	Spurious
294.91	Max Peak	Vert	50.33	14.42	-22.0	42.8	-5.5	37.3	60.8	23.5	1.6	270	Spurious
294.91	Max Peak	Horz	53.92	14.42	-22.0	46.4	-5.5	40.9	60.8	19.9	1.0	225	Spurious
309.66	Max Peak	Vert	34.05	16.48	-21.9	28.7	-5.5	23.2	60.8	37.6	1.4	270	Spurious
324.41	Quasi-Peak	Vert	46.24	15.26	-21.8	39.7	NA	39.7	46.0	6.3	1.6	270	Res. Band
324.41	Quasi-Peak	Horz	45.4	15.26	-21.8	38.9	NA	38.9	46.0	7.1	1.0	225	Res. Band
353.89	Max Peak	Vert	39.17	14.98	-21.7	32.5	-5.5	27.0	60.8	33.8	1.4	250	Spurious
353.89	Max Peak	Horz	40.83	14.98	-21.7	34.1	-5.5	28.6	60.8	32.2	1.0	225	Spurious
383.38	Max Peak	Horz	34.79	15.35	-21.5	28.6	-5.5	23.1	60.8	37.7	1.0	315	Spurious
433.91	Max Peak	Vert	88.71	16.14	-21.2	83.6	-5.5	78.1	80.8	2.5	1.1	225	Fundamental
433.91	Max Peak	Horz	84.20	16.14	-21.2	79.1	-5.5	73.6	80.8	7.2	1.0	270	Fundamental
867.79	Max Peak	Vert	46.09	22.48	-18.8	49.8	-5.5	44.3	60.8	16.5	1.1	225	Harmonic
867.79	Max Peak	Horz	42.11	22.48	-18.8	45.8	-5.5	40.3	60.8	20.5	1.0	180	Harmonic
1301.74	Max Peak	Vert	53.09	24.96	-40.4	37.6	-5.5	32.1	54.0	21.9	1.1	0	Res. Band
1301.74	Max Peak	Horz	53.09	24.96	-40.4	37.6	-5.5	32.1	54.0	21.9	1.0	30	Res. Band
1735.65	Max Peak	Vert	54.41	26.44	-40.1	40.7	-5.5	35.2	60.8	25.6	1.1	0	Harmonic
1735.65	Max Peak	Horz	56.96	26.44	-40.1	43.3	-5.5	37.8	60.8	23.0	1.0	30	Harmonic
2169.56	Max Peak	Vert	55.76	27.94	-38.9	44.8	-5.5	39.3	60.8	21.5	1.1	135	Harmonic
2169.56	Max Peak	Horz	55.49	27.94	-38.9	44.6	-5.5	39.1	60.8	21.7	1.0	315	Harmonic
2603.46	Max Peak	Horz	50.53	28.91	-39.6	39.8	-5.5	34.3	60.8	26.5	1.0	180	Harmonic



Company: RF Technologies, Inc.  
 Model Tested: SKRCF01  
 Report Number: 11263

1250 Peterson Dr., Wheeling, IL 60090

5.0 RESTRICTED BANDS

As stated in Section 15.205a, the fundamental emission from the Seeker Mobile Locating System shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

**NOTE:**

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.