



# FCC PART 15.249 & IC RSS-210 900 MHz Test Report

<b>APPLICANT</b>	APTIV SERVICES US, LLC.
<b>ADDRESS</b>	2151 E. LINCOLN ROAD M/S C4W KOKOMO INDIANA 46902 USA
<b>FCC ID</b>	L2C0083TR
<b>IC</b>	3432A-0083TR
<b>MODEL NUMBER</b>	FO1-TR903BDA
<b>PRODUCT DESCRIPTION</b>	TIRE PRESSURE MONITORING RF TRANSCEIVER
<b>DATE SAMPLE RECEIVED</b>	2/5/2020
<b>FINAL TEST DATE</b>	2/10/2020
<b>TESTED BY</b>	Tim Royer
<b>Approved By</b>	Franklin Rose
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
291UT20_15249_TestReport	Rev1	Initial Issue	02/7/2020
291UT20_15249_TestReport	Rev2	Updated Radiated Emissions Data	2/24/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

**This report relates only to the Equipment Under Test (EUT) sample(s) tested.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS .....</b>	<b>1</b>
<b>GENERAL INFORMATION .....</b>	<b>2</b>
EUT INFORMATION .....	2
PERIPHERALS USED IN TESTING .....	2
FREQUENCY RANGE OF EUT.....	2
TEST RESULTS SUMMARY .....	3
DEFINITION OF EUT.....	4
<b>MEASUREMENT STANDARDS.....</b>	<b>5</b>
<b>FREQUENCY RANGE OF RADIATED MEASUREMENTS .....</b>	<b>6</b>
<b>METHOD OF MEASUREMENT.....</b>	<b>7</b>
TEST DATA: 99% OCCUPIED BANDWIDTH MEASUREMENT TABLE.....	8
TEST DATA: 902.38 MHZ 20 dB OCCUPIED BANDWIDTH MEASUREMENT PLOT .....	9
TEST DATA: 902.38 MHZ 99% OCCUPIED BANDWIDTH MEASUREMENT PLOT .....	10
TEST DATA: 903.43 MHZ 20 dB OCCUPIED BANDWIDTH MEASUREMENT PLOT .....	11
TEST DATA: 903.43 MHZ 99% OCCUPIED BANDWIDTH MEASUREMENT PLOT .....	12
<b>BANDEDGE.....</b>	<b>13</b>
TEST DATA: 902.38 MHZ BANDEDGE MEASUREMENT TABLE .....	13
903.43 MHZ BANDEDGE MEASUREMENT TABLE.....	13
TEST DATA: 902.38 MHZ LOW END OF BAND LOWER BAND EDGE PLOT .....	14
TEST DATA: 902.38 MHZ UPPER BAND EDGE PLOT.....	15
TEST DATA: 903.43 MHZ LOW END OF BAND LOWER BAND EDGE PLOT .....	16
TEST DATA: 903.43 MHZ UPPER BAND EDGE PLOT.....	17
<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>18</b>
TEST DATA: FIELD STRENGTH OF THE FUNDAMENTAL.....	22
TEST DATA: 902.38 MHZ FIELD STRENGTH TABLE.....	23
TEST DATA: 903.43 MHZ FIELD STRENGTH TABLE.....	24
<b>POWER LINE CONDUCTED INTERFERENCE.....</b>	<b>25</b>
TEST DATA: N/A.....	25
<b>TEST EQUIPMENT LIST .....</b>	<b>26</b>
<b>STATE OF THE MEASUREMENT UNCERTAINTY.....</b>	<b>27</b>

## GENERAL REMARKS

### Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**



Sr. EMC Engineer  
EMC-003838-NE



#### **Tested by:**

Name and Title: Tim Royer, Project Manager/Testing Engineer

**Date: 02/7/2020**

#### **Reviewed and approved by:**



Name and Title: Franklin Rose, Project Manager/EMC Specialist

**Date: 02/7/2020**

Applicant: APTIV SERVICES US, LLC.  
FCC ID: L2C0083TR  
IC: 3432A-0083TR  
Report: 291UT20\_15249\_TestReport\_Rev2

## GENERAL INFORMATION

### EUT Information

<b>EUT Description</b>	TIRE PRESSURE MONITORING RF TRANSCEIVER		
<b>FCC ID</b>	L2C0083TR		
<b>IC</b>	3432A-0083TR		
<b>Model Number</b>	FO1-TR903BDA		
<b>EUT Power Source</b>	<input type="checkbox"/> 110-120Vac, 50-60Hz	<input checked="" type="checkbox"/> DC Power	<input type="checkbox"/> Battery Operated
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input checked="" type="checkbox"/> Mobile	<input type="checkbox"/> Portable
<b>Antenna Connector</b>	None		
<b>Test Conditions</b>	The temperature was 26°C Relative humidity of 50%.		
<b>Test Configuration</b>	Operational		
<b>Modification to the EUT</b>	No Modification to EUT.		
<b>Applicable Standards</b>	ANSI C63.10-2013 ANSI C63.4-2014 (Radiated Site Validation)		
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070 ISED Test Site Registration: 2056A		

### Peripherals Used in Testing

Description	Type	Connector	Length
n/a	n/a	n/a	n/a

### Frequency Range of EUT

<b>Test Frequencies</b>	902.38, 903.43 MHz
-------------------------	--------------------

## Test Results Summary

FCC Rule Part No.	IC Standard Ref.	Requirement	Test Item	Result
2.1049	RSS-GEN 6.6	Occupied Bandwidth	99% Bandwidth	<b>Pass</b>
15.249(a)(c)	RSS-210 § A2.9(a)	Fundamental and Harmonics	Radiated Spurious Emissions	<b>Pass</b>
15.249(d)(e)	RSS-247 § 5.5	Spurious Emissions	Bandedge	<b>Pass</b>
			Radiated Spurious Emissions	<b>Pass</b>
15.207(a)	RSS-GEN § 8.8	AC Conducted Emissions	AC Powerline Conducted Emissions	<b>N/A</b>

## Definition of EUT

### RULE PART NO.: FCC PART 15.3

(i) *Class B digital device.* A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.

NOTE: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.

(k) *Digital device.* (Previously defined as a computing device). An unintentional radiator (device or system) that generates and uses timing signals or pulses at a rate in excess of 9,000 pulses (cycles) per second and uses digital techniques; inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio frequency energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer. A radio frequency device that is specifically subject to an emanation requirement in any other FCC Rule part or an intentional radiator subject to subpart C of this part that contains a digital device is not subject to the standards for digital devices, provided the digital device is used only to enable operation of the radio frequency device and the digital device does not control additional functions or capabilities.

NOTE: Computer terminals and peripherals that are intended to be connected to a computer are digital devices.

(o) *Intentional radiator.* A device that intentionally generates and emits radio frequency energy by radiation or induction.

## MEASUREMENT STANDARDS

### RULE PART NO.: FCC PART 15.31

(a) The following measurement procedures are used by the Commission to determine compliance with the technical requirements in this part. Except where noted, copies of these procedures are available from the Commission's current duplicating contractor whose name and address are available from the Commission's Consumer and Governmental Affairs Bureau at 1-888-CALL-FCC (1-888-225-5322).

(2) Unlicensed Personal Communications Service (UPCS) devices are to be measured for compliance using ANSI C63.17-2013: "American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices" (incorporated by reference, see §15.38).

(3) Other intentional radiators are to be measured for compliance using the following procedure: ANSI C63.10-2013 (incorporated by reference, see §15.38).

(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(l) Measurements of radio frequency emissions conducted to the public utility power lines shall be performed using a 50 ohm/50 uH line-impedance stabilization network (LISN).

(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle.
1 to 10 MHz	2	1 near top and 1 near bottom.
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom.

(o) The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## FREQUENCY RANGE OF RADIATED MEASUREMENTS

**RULE PART NO.:** FCC PART 15.33

**§15.33 Frequency range of radiated measurements.**

(a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

Applicant: APTIV SERVICES US, LLC.  
FCC ID: L2C0083TR  
IC: 3432A-0083TR  
Report: 291UT20\_15249\_TestReport\_Rev2



## METHOD OF MEASUREMENT

### RULE PART NO.: FCC PART 15.35

#### §15.35 Measurement detector functions and bandwidths.

The conducted and radiated emission limits shown in this part are based on the following, unless otherwise specified in this part:

(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrumentation using the CISPR quasi-peak detector can be found in ANSI C63.4-2014, clause 4 (incorporated by reference, see §15.38). As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function as long as the same bandwidth as indicated for CISPR quasi-peak measurements are employed.

(b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, *e.g.*, see §§15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, *e.g.*, the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

(c) Unless otherwise specified, *e.g.*, §§15.255(b), and 15.256(l)(5), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to Supplier's Declaration of Conformity.

Applicant: APTIV SERVICES US, LLC.  
FCC ID: L2C0083TR  
IC: 3432A-0083TR  
Report: 291UT20\_15249\_TestReport\_Rev2

## OCCUPIED BANDWIDTH

**Rules Part No.:** FCC 2.1049, FCC 15.215(c), IC RSS GEN § 6.6

### Requirements:


#### §15.215 Additional provisions to the general radiated emission limitations.

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

**IC Requirements:** Reporting Only

**Test Method:** ANSI C63.10 § 6.9 Occupied Bandwidth  
ANSI C63.10 § 6.3 Radiated Emissions testing- Common

### Test Setup:

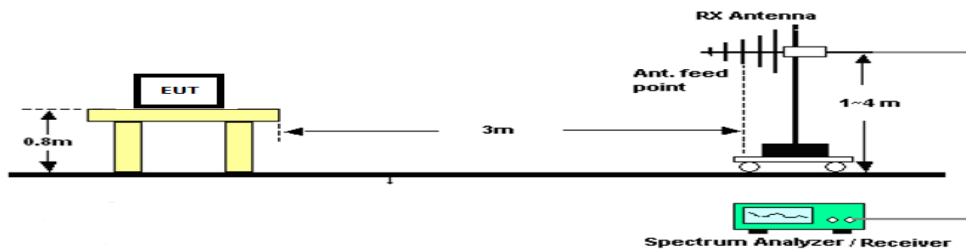

### Test Data: 99% Occupied Bandwidth Measurement Table

Tuned Frequency (MHz)	99% BW (kHz)	20dB BW (MHz)
902.38	59.29	18.9
903.43	52.24	17.94


**Note:** The receiver's automatic 99% Occupied Bandwidth function was used. The function is identical in operation to ANSI C63.26, 5.4.4, Step e).

### RESULTS: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
FCC ID: L2C0083TR  
IC: 3432A-0083TR  
Report: 291UT20\_15249\_TestReport\_Rev2

## OCCUPIED BANDWIDTH

### Test Data: 902.38 MHz 20 dB Occupied Bandwidth Measurement Plot

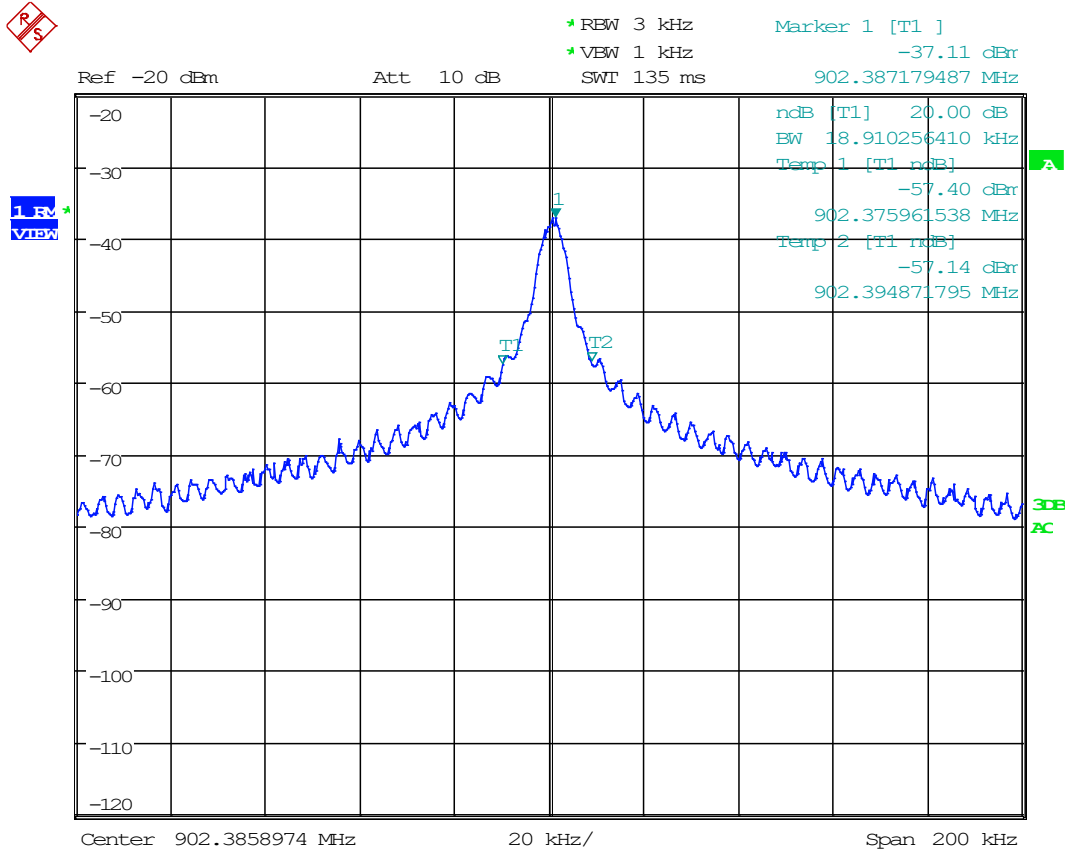


Date: 6.FEB.2020 12:38:34

**20 dB Occupied Bandwidth = 18.9 kHz**

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# OCCUPIED BANDWIDTH

## Test Data: 902.38 MHz 99% Occupied Bandwidth Measurement Plot

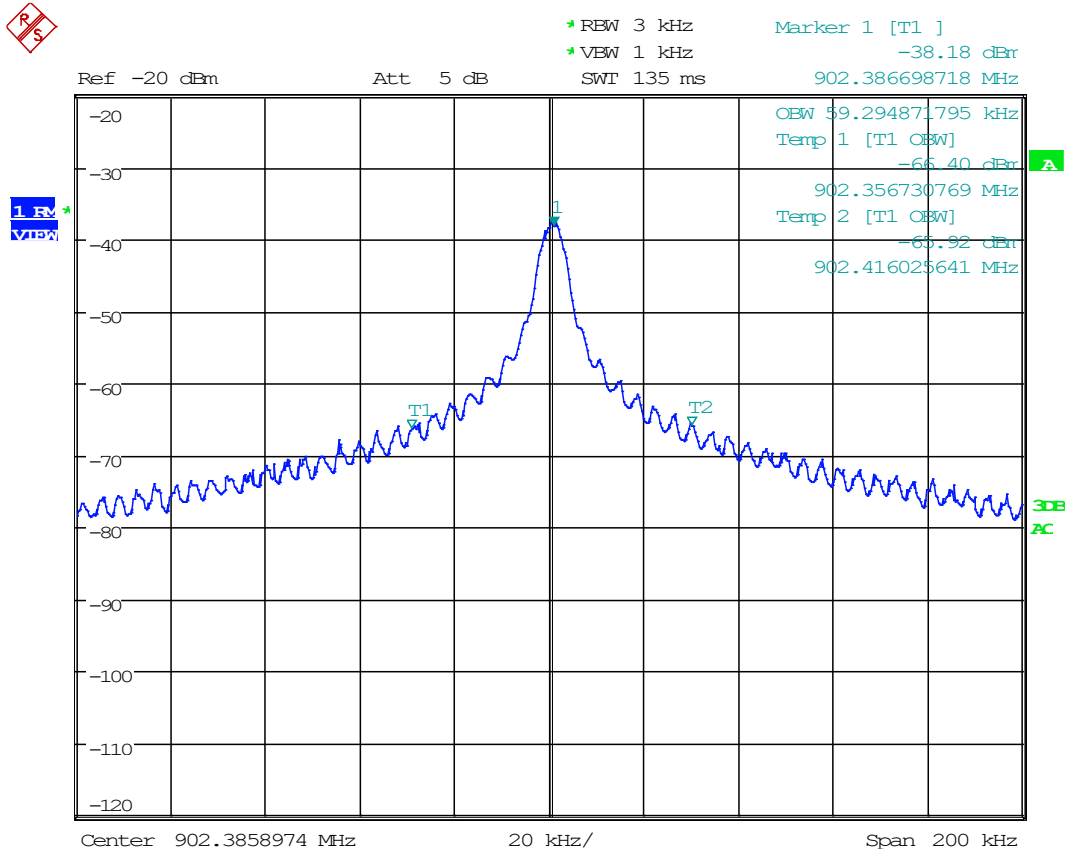


Date: 6.FEB.2020 12:38:09

**99% Occupied Bandwidth = 59.29 kHz**

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# OCCUPIED BANDWIDTH

## Test Data: 903.43 MHz 20 dB Occupied Bandwidth Measurement Plot

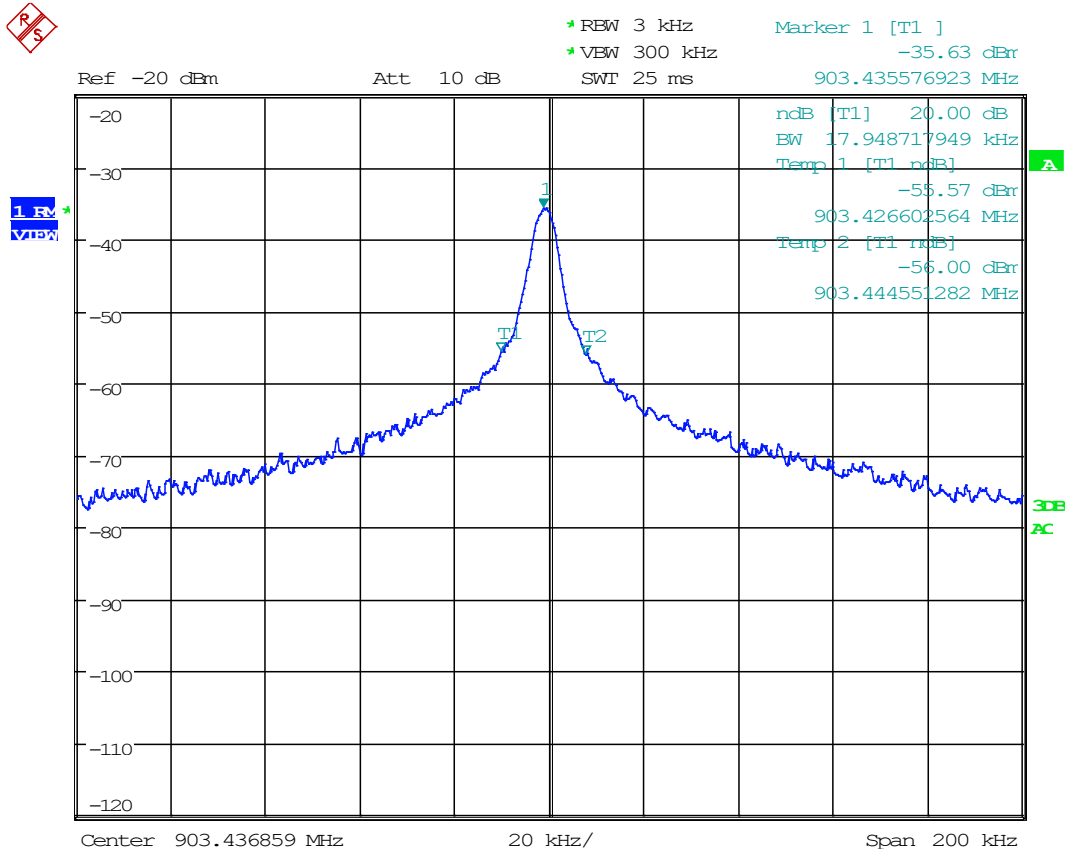


Date: 6.FEB.2020 12:39:57

**20 dB Occupied Bandwidth = 17.94 kHz**

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# OCCUPIED BANDWIDTH

## Test Data: 903.43 MHz 99% Occupied Bandwidth Measurement Plot

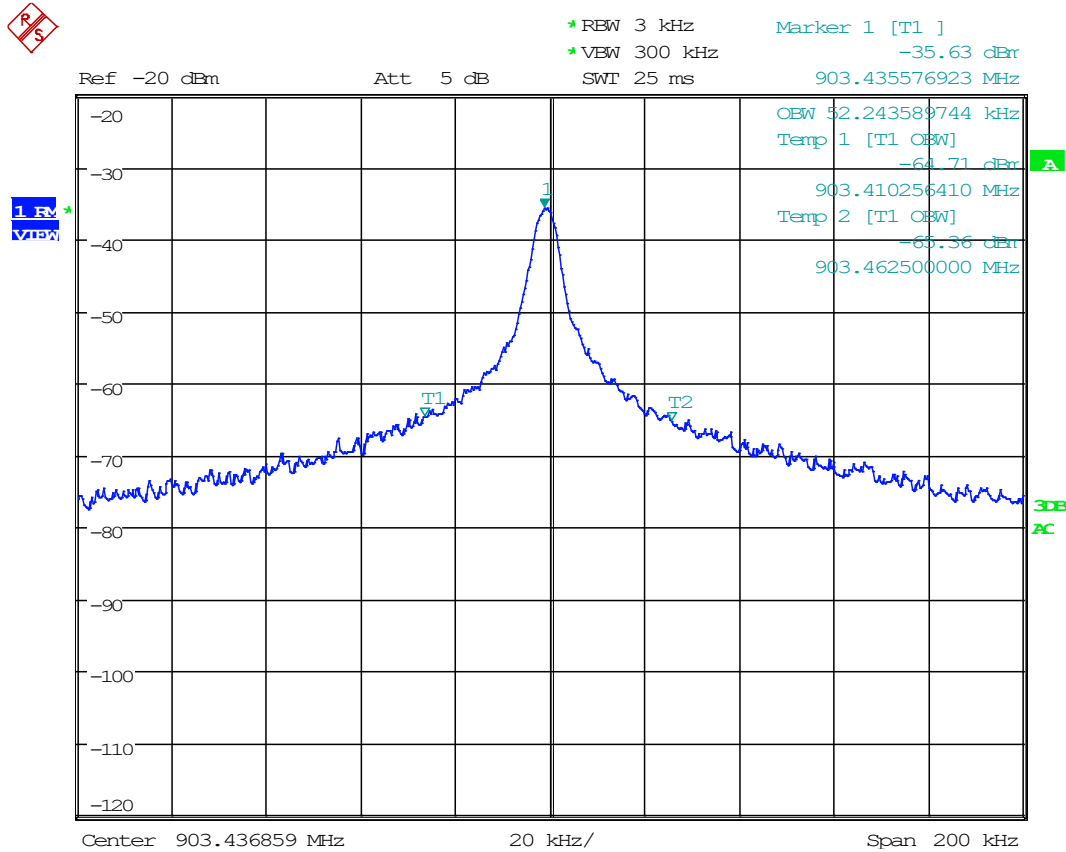

Date: 6.FEB.2020 12:40:18

**99% Occupied Bandwidth = 52.24 kHz**

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

## BANDEDGE


**Rule Part No.:** FCC 15.249(d), IC RSS 210 § A2.9(b)

### Requirements:

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

**Test Method:** ANSI C63.10 § 6.10.4 Authorized band-edge relative method

### Setup:

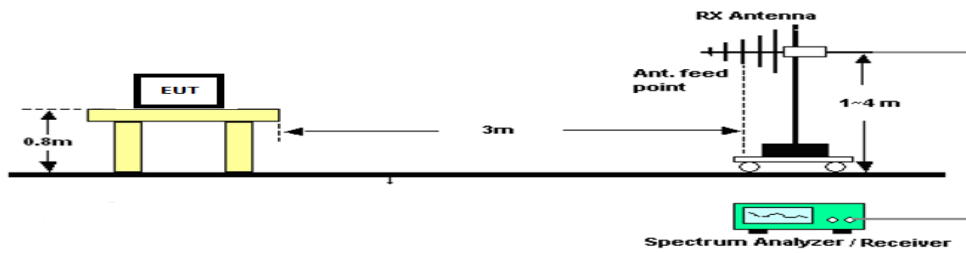

### Test Data: 902.38 MHz Bandedge Measurement Table

Bandedge	Measured Level (dBc)	Limit (dBc)	Margin (dB)
Lower	53.1	50	3.1
Upper	58.38	50	5.38

### 903.43 MHz Bandedge Measurement Table


Bandedge	Measured Level (dBc)	Limit (dBc)	Margin (dB)
Lower	67.06	50	17.06
Upper	58.72	50	8.72

### Results Meet Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# BANDEDGE

## Test Data: 902.38 MHz Low End of Band Lower Band Edge Plot

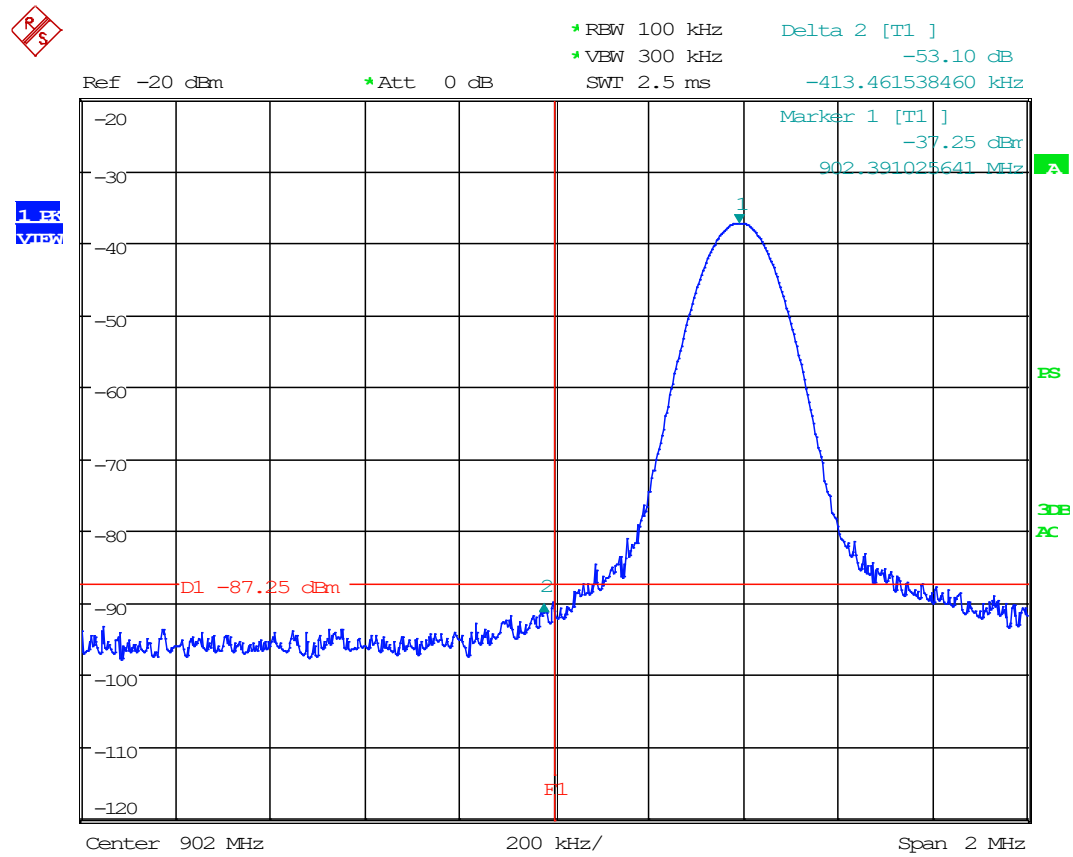

Date: 10.FEB.2020 17:07:13


### RESULTS: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2



# BANDEDGE

## Test Data: 902.38 MHz Upper Band Edge Plot

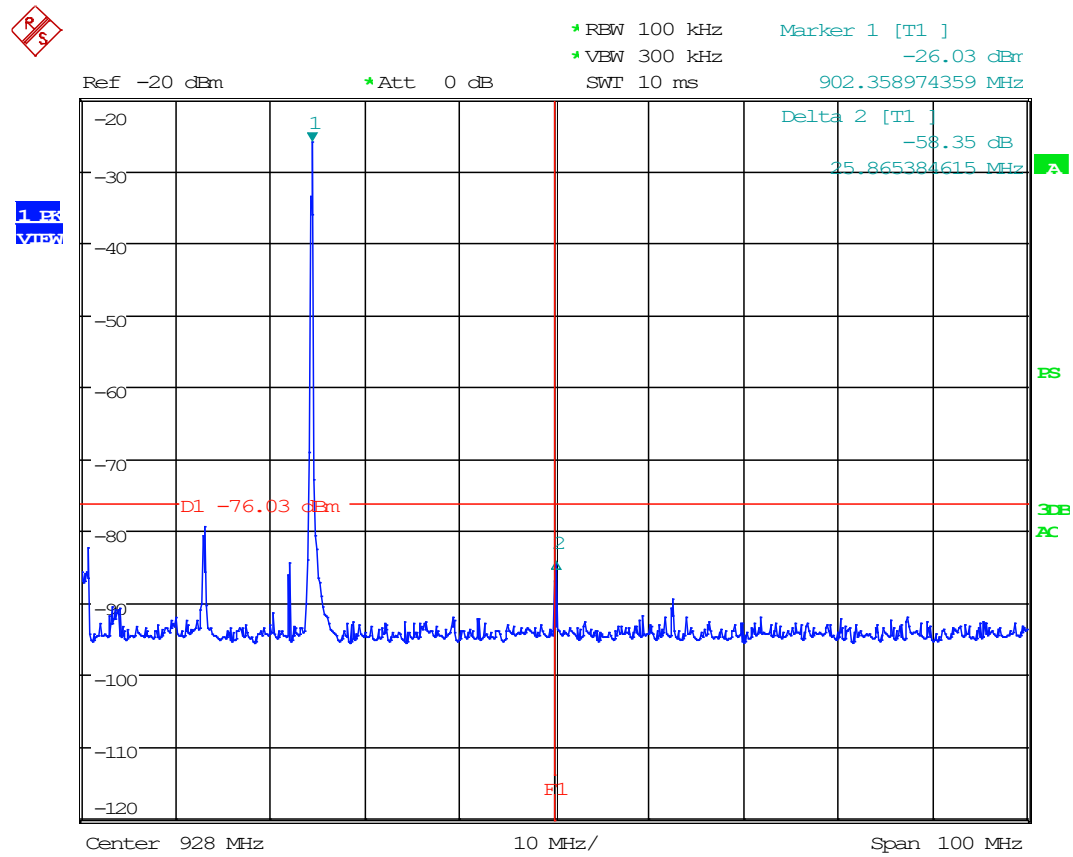


Date: 10.FEB.2020 17:11:25

### RESULTS: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# BANDEDGE

## Test Data: 903.43 MHz Low End of Band Lower Band Edge Plot

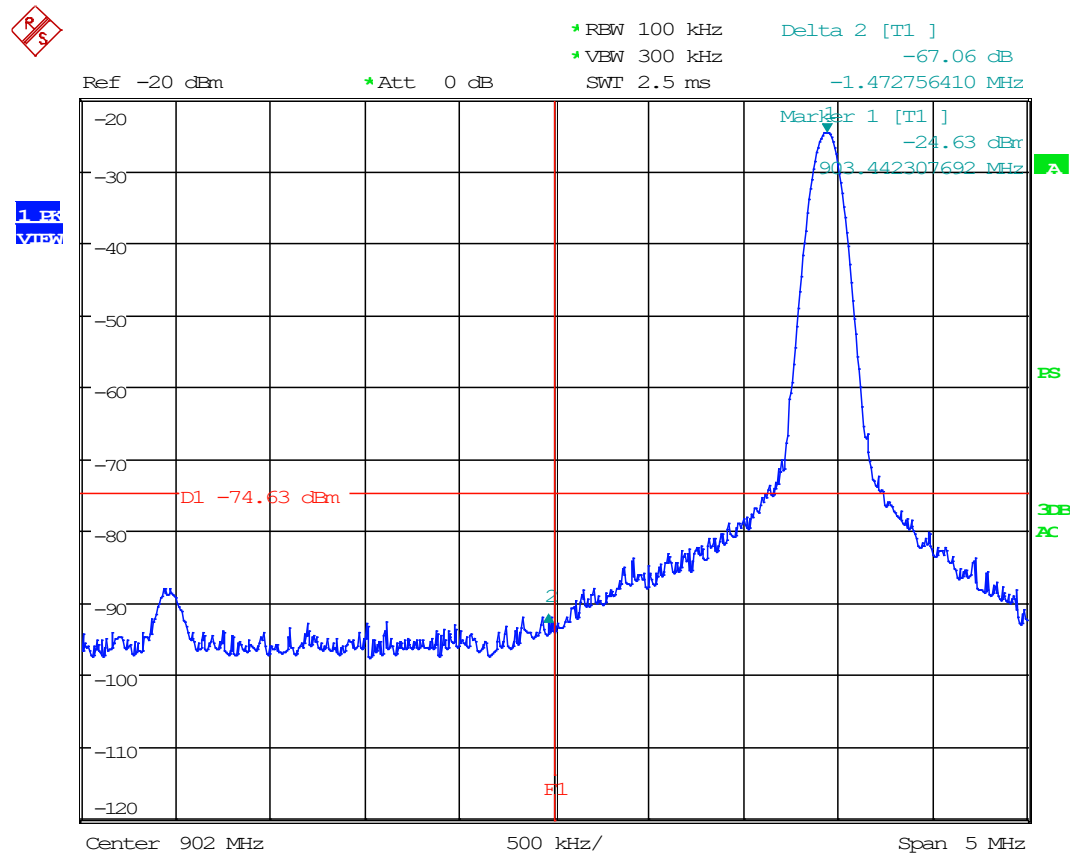


Date: 10.FEB.2020 17:08:29

### RESULTS: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

# BANDEDGE

## Test Data: 903.43 MHz Upper Band Edge Plot

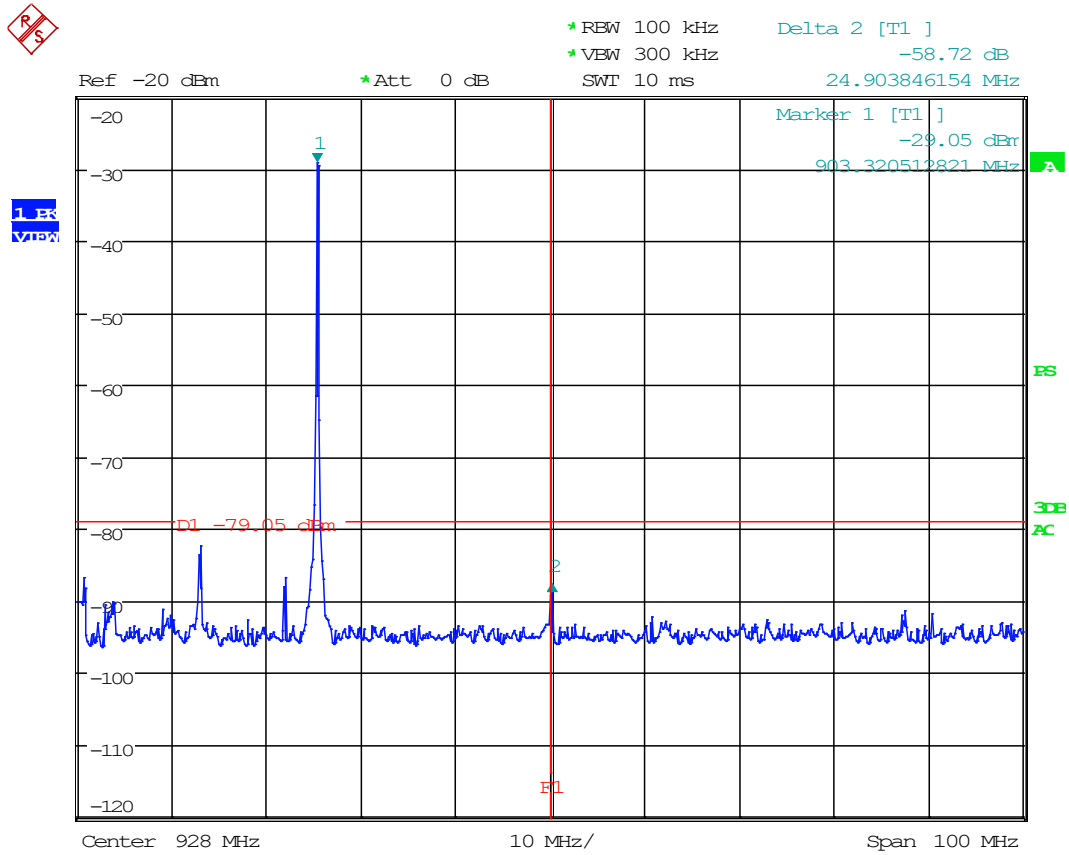

Date: 10.FEB.2020 17:10:33

### RESULTS: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

## RADIATED SPURIOUS EMISSIONS

**RULE PART NO.:** FCC part 15.249 (a)(c)(d)(e)

### Requirements:

#### §15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

#### §15.209 Radiated emission limits; general requirements.

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Limit ( $\mu\text{V}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ )
0.009 – 0.490	2400/F(in kHz) @ 300m	-
0.490 – 1.705	24000/F(in kHz) @ 30m	-
1.705 kHz – 30	30.0 @ 30 m	29.54 @ 30m
30 – 88	100.0	40.0
88 – 216	150.0	43.5
216 – 960	200.0	46.0
Above 960	500.0	54.0

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

**§15.35 Measurement detector functions and bandwidths.**

(b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

- Test Procedure:**
- ANSI C63.4 § Annex D Validation of radiated emissions standard test sites
  - ANSI C63.10 § 6.3 Common requirements radiated emissions
  - ANSI C63.10 § 6.4 Emissions below 30 MHz
  - ANSI C63.10 § 6.5 Emissions between 30 & 1000 MHz
  - ANSI C63.10 § 6.6 Emissions above 1 GHz


**Radiated Emissions Test Setup:**

EUT setup and arrangement was completed as described in ANSI C63.4. Exploratory measurements were taken following different peripheral placement and cable manipulations as described in ANSI C63.4. A photo is provided of the Test setup to record the exact peripheral equipment and cable manipulation arrangement found to produce the highest possible level of radiated emissions.

The test procedure used for radiated emissions is described ANSI C63.4 using a spectrum analyzer. The resolution bandwidth used was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. All cable loss and antenna factors were calibrated to provide plots with correction factors applied to results using the formula and example described below. The video bandwidth of the analyzer was always greater than or equal to the resolution bandwidth, and a peak detector with max hold was used.

The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The frequency was scanned from 30 MHz to 1.0 GHz. The EUT was measured in three parts of the tunable band of EUT and (3) orthogonal planes when necessary.

**EUT Orientation(s):**

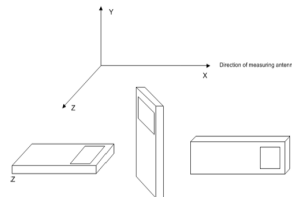

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

## RADIATED SPURIOUS EMISSIONS

### Formula of Conversion Factors:


The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

### Field Strength Correction Factor Conversion Example:


Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB/m	+0.40 dB	=30.76 dB $\mu$ V/m @ 3m

### Test Setup:

#### Emissions 30 – 1000 MHz

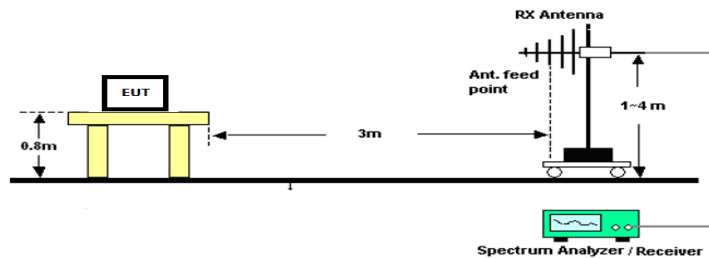

#### Emissions above 1 GHz

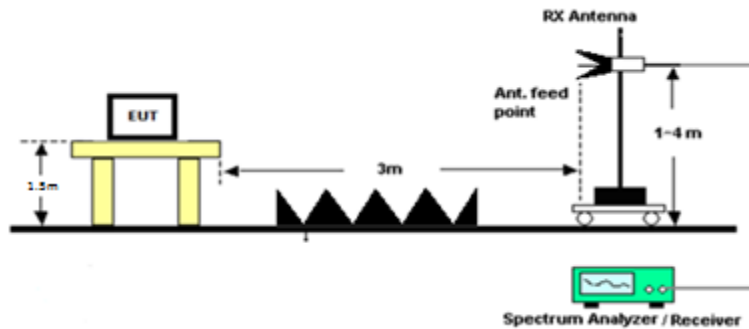

## RADIATED SPURIOUS EMISSIONS

**Notes:** The spectrum was measured from 9 KHz to 25 GHz. Six or more of the Spurious Emissions equal to or less than 20 dB from the limits are required to be reported, therefore the worst case data rate and output power which produced emissions within 30 dB of the limit are reported below.

### Test Data: Ant2 Field Strength of the Fundamental

Tuned Frequency (MHz)	Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Field Strength (dBµV/m)	15.249 Fundamental Limit	Margin (dBm)
902.38	PK	68.09	H	3.54	21.94	93.57	94.00	0.43
902.38	PK	55.73	V	3.54	21.94	81.21	94.00	12.79
903.43	PK	64.93	H	3.54	22.04	90.52	94.00	3.48
903.43	PK	67.79	V	3.54	22.04	93.38	94.00	0.62

### Test Data: Ant2 902.38 MHz Field Strength table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Antenna Polarity	15.205, 15.35 Detector	Meter Reading (dBµV)	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.249 Spurious Limit	Margin (dBm)
902.38	1804.76	H	PK	3.51	4.90	30.35	3.00	38.76	54.00	15.24
902.38	2707.14	H	AV	7.78	5.99	32.49	4.00	46.26	54.00	7.74
902.38	3609.52	H	PK	0.19	6.65	33.12	3.00	39.96	54.00	14.04
902.38	4511.90	H	PK	0.33	7.36	33.91	3.00	41.61	54.00	12.39
902.38	5414.28	H	PK	-0.95	8.15	34.39	3.00	41.59	54.00	12.41
902.38	6316.66	H	PK	-1.10	8.61	35.39	3.00	42.90	54.00	11.10
902.38	7219.04	H	PK	-0.32	9.53	36.37	3.00	45.58	54.00	8.42
902.38	8121.42	H	PK	-2.10	9.96	35.80	3.00	43.66	54.00	10.34
902.38	9023.80	H	PK	-1.25	10.69	36.12	3.00	45.56	54.00	8.44
902.38	1804.76	V	PK	7.08	4.90	30.35	3.00	42.33	54.00	11.67
902.38	2707.14	V	PK	11.68	5.99	32.49	3.00	50.16	54.00	3.84
902.38	3609.52	V	PK	5.39	6.65	33.12	3.00	45.16	54.00	8.84
902.38	4511.90	V	PK	-0.65	7.36	33.91	3.00	40.63	54.00	13.37
902.38	5414.28	V	PK	-0.05	8.15	34.39	3.00	42.49	54.00	11.51
902.38	6316.66	V	PK	-2.30	8.61	35.39	3.00	41.70	54.00	12.30
902.38	7219.04	V	PK	0.10	9.53	36.37	3.00	46.00	54.00	8.00
902.38	8121.42	V	PK	-1.40	9.96	35.80	3.00	44.36	54.00	9.64
902.38	9023.80	V	PK	-0.13	10.69	36.12	3.00	46.68	54.00	7.32

### Test Data: Ant2 903.43 MHz Field Strength table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Antenna Polarity	15.205, 15.35 Detector	Meter Reading (dBμV)	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	15.249 Spurious Limit	Margin (dBm)
903.43	1806.86	H	PK	8.76	4.90	30.37	3.00	44.03	54.00	9.97
903.43	2710.29	H	PK	12.88	6.00	32.48	3.00	51.36	54.00	2.64
903.43	3613.72	H	PK	6.44	6.64	33.13	3.00	46.21	54.00	7.79
903.43	4517.15	H	PK	4.10	7.38	33.92	3.00	45.40	54.00	8.60
903.43	5420.58	H	PK	0.59	8.15	34.40	3.00	43.14	54.00	10.86
903.43	6324.01	H	PK	-3.06	8.66	35.39	3.00	40.99	54.00	13.01
903.43	7227.44	H	PK	0.71	9.52	36.36	3.00	46.59	54.00	7.41
903.43	8130.87	H	PK	-1.73	9.95	35.80	3.00	44.02	54.00	9.98
903.43	9034.30	H	PK	-0.88	10.72	36.13	3.00	45.97	54.00	8.03
903.43	1806.86	V	PK	5.54	4.90	30.37	3.00	40.81	54.00	13.19
903.43	2710.29	V	PK	10.59	6.00	32.48	3.00	49.07	54.00	4.93
903.43	3613.72	V	PK	2.63	6.64	33.13	3.00	42.40	54.00	11.60
903.43	4517.15	V	PK	2.81	7.38	33.92	3.00	44.11	54.00	9.89
903.43	5420.58	V	PK	1.02	8.15	34.40	3.00	43.57	54.00	10.43
903.43	6324.01	V	PK	-2.45	8.66	35.39	3.00	41.60	54.00	12.40
903.43	7227.44	V	PK	-1.20	9.52	36.36	3.00	44.68	54.00	9.32
903.43	8130.87	V	PK	-2.79	9.95	35.80	3.00	42.96	54.00	11.04
903.43	9034.30	V	PK	-0.24	10.72	36.13	3.00	46.61	54.00	7.39

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2



### Test Data: Ant3 Field Strength of the Fundamental

Tuned Frequency (MHz)	Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.249 Fundamental Limit	Margin (dBm)
902.37	PK	63.13	H	3.54	21.94	3.00	88.61	94.00	5.39
902.37	PK	55.73	V	3.54	21.94	4.00	81.21	94.00	12.79
903.43	PK	63.02	H	3.54	22.04	5.00	88.61	94.00	5.39
903.43	PK	56.01	V	3.54	22.04	3.00	81.60	94.00	12.40

### Test Data: Ant3 902.38 MHz Field Strength table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Antenna Polarity	15.205, 15.35 Detector	Meter Reading (dBµV)	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.249 Spurious Limit	Margin (dBm)
902.38	1804.76	H	PK	5.80	4.90	30.35	3.00	41.05	54.00	12.95
902.38	2707.14	H	PK	11.94	5.99	32.49	3.00	50.42	54.00	3.58
902.38	3609.52	H	PK	1.89	6.65	33.12	3.00	41.66	54.00	12.34
902.38	4511.90	H	PK	1.74	7.36	33.91	3.00	43.02	54.00	10.98
902.38	5414.28	H	PK	1.95	8.15	34.39	3.00	44.49	54.00	9.51
902.38	6316.66	H	PK	1.48	8.61	35.39	3.00	45.48	54.00	8.52
902.38	7219.04	H	PK	1.78	9.53	36.37	3.00	47.68	54.00	6.32
902.38	8121.42	H	PK	0.63	9.96	35.80	3.00	46.39	54.00	7.61
902.38	9023.80	H	PK	1.08	10.69	36.12	3.00	47.89	54.00	6.11
902.38	1804.76	V	PK	5.27	4.90	30.35	3.00	40.52	54.00	13.48
902.38	2707.14	V	PK	7.42	5.99	32.49	3.00	45.90	54.00	8.10
902.38	3609.52	V	PK	1.77	6.65	33.12	3.00	41.54	54.00	12.46
902.38	4511.90	V	PK	2.12	7.36	33.91	3.00	43.40	54.00	10.60
902.38	5414.28	V	PK	1.81	8.15	34.39	3.00	44.35	54.00	9.65
902.38	6316.66	V	PK	1.00	8.61	35.39	3.00	45.00	54.00	9.00
902.38	7219.04	V	PK	1.74	9.53	36.37	3.00	47.64	54.00	6.36
902.38	8121.42	V	PK	0.83	9.96	35.80	3.00	46.59	54.00	7.41
902.38	9023.80	V	PK	1.93	10.69	36.12	3.00	48.74	54.00	5.26

### Result: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

### Test Data: Ant3 903.43 MHz Field Strength table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Antenna Polarity	15.205, 15.35 Detector	Meter Reading (dBµV)	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.249 Spurious Limit	Margin (dBm)
903.43	1806.86	H	PK	4.91	4.90	30.37	3.00	40.18	54.00	13.82
903.43	2710.29	H	PK	9.28	6.00	32.48	3.00	47.76	54.00	6.24
903.43	3613.72	H	PK	9.04	6.64	33.13	3.00	48.81	54.00	5.19
903.43	4517.15	H	PK	2.56	7.38	33.92	3.00	43.86	54.00	10.14
903.43	5420.58	H	PK	2.02	8.15	34.40	3.00	44.57	54.00	9.43
903.43	6324.01	H	PK	2.38	8.66	35.39	3.00	46.43	54.00	7.57
903.43	7227.44	H	PK	1.78	9.52	36.36	3.00	47.66	54.00	6.34
903.43	8130.87	H	PK	0.58	9.95	35.80	3.00	46.33	54.00	7.67
903.43	9034.30	H	PK	1.24	10.72	36.13	3.00	48.09	54.00	5.91
903.43	1806.86	V	PK	7.20	4.90	30.37	3.00	42.47	54.00	11.53
903.43	2710.29	V	PK	9.66	6.00	32.48	3.00	48.14	54.00	5.86
903.43	3613.72	V	PK	2.18	6.64	33.13	3.00	41.95	54.00	12.05
903.43	4517.15	V	PK	1.63	7.38	33.92	3.00	42.93	54.00	11.07
903.43	5420.58	V	PK	1.90	8.15	34.40	3.00	44.45	54.00	9.55
903.43	6324.01	V	PK	1.29	8.66	35.39	3.00	45.34	54.00	8.66
903.43	7227.44	V	PK	2.11	9.52	36.36	3.00	47.99	54.00	6.01
903.43	8130.87	V	PK	0.43	9.95	35.80	3.00	46.18	54.00	7.82
903.43	9034.30	V	PK	1.14	10.72	36.13	3.00	47.99	54.00	6.01

### Result: Meets Requirements

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2

## POWER LINE CONDUCTED INTERFERENCE

**Rule Part No.:** FCC Part 15.107 & ICES-003 § 6.1

### Requirements:

#### §15.107 Conducted limits.

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(d) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### Method of Measurement:

The procedure used was ANSI C63.4 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

The following plots represent the emissions for power line conducted. Both lines were observed.

**Test Data:** n/a

**NOTE:** This device is battery operated only.

## TEST EQUIPMENT LIST

Device	Manufacturer	Model	SN	Calibration Date	Cal Due Date
EMI Test Receiver R & S ESIB 40 firmware v 4.34.3 BIOS v3.3	Rohde & Schwarz	ESIB 40	100274	07/22/19	07/22/21
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Coaxial Cable - Chamber 3 cable set (backup)	Micro-Coax	Chamber 3 cable set (backup)	KMKM-0244- 02 KMKM- 0670-01 KFKF- 0197-00	02/27/19	02/27/21
CHAMBER	Panashield	3M	N/A	03/15/19	03/15/21
Antenna: Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/11/20
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/20
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/26/17	07/26/20
Ant: Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	01/30/17	01/30/20

### \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

## STATE OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	±0.93dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	±1.86dB	
Occupied Bandwidth	±2.65%	
Audio Frequency Response	±1.86dB	
Modulation limiting	±1.88%	
Radiated RF Power	±1.4dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	±1.88%	
Within 6kHz and 25kHz of audio Freq.	±2.04%	
Rad Emissions Sub Meth up to 26.5GHz	±2.14dB	
Adjacent channel power	±1.47dB	(1)
Transient Frequency Response	±1.88%	
Temperature	±1.0°C	(1)
Humidity	±5.0%	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## END OF REPORT

Applicant: APTIV SERVICES US, LLC.  
 FCC ID: L2C0083TR  
 IC: 3432A-0083TR  
 Report: 291UT20\_15249\_TestReport\_Rev2