



ETS Dr.GenZ Taiwan PS Co., LTD.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

A2LA Cert.No.: 2300.01

PTCRB Accredited Type Certification Test House

TEST - REPORT

FCC RULES PART 15 / SUBPART C

FCC ID: L2M001004

Test report no.:

ETSTWM0611-00008-C-1

FCC

ETS DR. GENZ TAIWAN PS CO., LTD
6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU, TAIPEI 114, TAIWAN, R.O.C.
PHONE 886-2-66068877 FAX 886-2-66068879

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

TABLE OF CONTENTS

1 GENERAL INFORMATION	2
1.1 NOTES	2
1.2 TESTING LABORATORY	3
1.2.1 Location	3
1.2.2 Details of accreditation status	3
1.3 DETAILS OF APPROVAL HOLDER	3
1.4 APPLICATION DETAILS	4
1.5 TEST ITEM	4
1.6 TEST STANDARDS	5
2 TECHNICAL TEST	5
2.1 SUMMARY OF TEST RESULTS	5
2.2 TEST ENVIRONMENT	5
2.3 TEST EQUIPMENT UTILIZED	6
2.4 GENERAL TEST PROCEDURE	8
3 TEST RESULTS (ENCLOSURE)	9
3.1 TRANSMISSION REQUIREMENTS	10
3.1.1 Limit of Transmission Time	10
3.1.2 Active Time	10
3.2 OUTPUT POWER (FIELD STRENGTH)	11
3.3 OUT OF BAND RADIATED EMISSIONS	12
3.4 TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	13
3.5 SPURIOUS EMISSION RADIATED, TRANSMITTER	14
3.6 CHANNEL BANDWIDTH	16
3.7 ANTENNA REQUIREMENT	17
3.8 DUTY CYCLE	18
3.9 CONDUCTED MEASUREMENT AT (AC) POWER LINE	19
APPENDIX	20

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.


The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.


The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD

Tester:

December 07, 2006	Jay Chaing	
_____	_____	_____
Date	ETS-Lab.	Name
		Signature

Technical responsibility for area of testing:

December 07, 2006	Steven Chuang	
_____	_____	_____
Date	ETS	Name
		Signature

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company

ETS DR. GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PTCRB Accredited Type Certification Test House

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name : Omega Research and Development Inc.

Street : 981 North Burnt Hickory Road

Town : Douglasville, Georgia 30134

Country : USA

Telephone : 800-554-4053

Fax : 770-942-5400

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

1.4 Application details

Date of receipt of application : November 24, 2006
Date of receipt of test item : November 24, 2006
Date of test : from November 25, 2006 to December 07, 2006

1.5 Test item

Description of test item : Remote Control
Type identification : TX-3BUTTON
Brand name : ./.
Serial number : Test sample without serial number
Transmitting frequency : 433.92 MHz
Operation mode : simplex
Voltage supply : 6 VDC (battery)

(If the device is using battery, please check if the device is tested under fresh battery condition.)

Highest clock frequency : 433.92 MHz
Antenna type : Printed loop antenna

Photos : see Appendix

Manufacturer (if applicable)

Name : ./.
Street : ./.
Town : ./.
Country : ./.

Additional information : ./.

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

1.6 Test standards

Technical standard : FCC RULES PART 15 / SUBPART B § 15.109/ SUBPART C
§ 15.203, § 15.209, § 15.231 (a) : February, 2006

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature	: 23 °C
Relative humidity content	: 20 ... 75 %
Air pressure	: 86 ... 103 kPa
Details of power supply	: 6 VDC (battery)

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2006/10/16	2007/10/15
ETSTW-CE 002	PREREULATOR MODE DC POWER SUPPLY	None	None		Function Test	
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2006/10/16	2007/10/15
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2006/10/16	2007/10/15
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	In House Certificate	
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTIONS-MESSWANDLER-ZANGE	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2006/8/17	2007/8/16
ETSTW-CE 012	Dual-Phase-V-Network	NNB-2/16Z	03/10201	Telemeter	2006/6/13	2007/6/12
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2006/10/20	2007/10/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2006/10/30	2007/10/29
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2006/10/12	2007/10/11
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	Function Test	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	2006/5/4	2008/5/3
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2006/10/11	2007/10/10
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2004/6/30	2007/6/29
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2006/5/26	2008/5/25
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/5/26	2008/5/25
ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2006/5/3	2008/5/2
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2006/10/11	2007/10/10
ETSTW-RE 033	4CH 1GHz 5GS/s DSO	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2006/7/27	2007/7/26
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2006/10/11	2007/10/10
ETSTW-RE 042	ANTENNA	HK116	100172	R&S	2005/1/14	2007/1/13
ETSTW-RE 043	ANTENNA	HL223	100166	R&S	2006/5/8	2008/5/7
ETSTW-RE 044	ANTENNA	HL050	100094	R&S	2006/5/29	2008/5/28
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2006/7/28	2007/7/27
ETSTW-EMS 002	Frequency Converter	YF-6020	308014	T-Power	Function Test	
ETSTW-EMS 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2005/12/8	2008/12/8
ETSTW-EMS 014	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T2-02	20241	FCC	2005/12/7	2007/12/7
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA	2006/7/26	2007/7/25
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	109439	R&S	2006/10/18	2007/10/17
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2006/6/26	2008/6/25
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2006/7/13	2008/7/12
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052652	Agilent	2006/7/16	2008/7/15
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052684	Agilent	2006/7/4	2008/4/3
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2006/7/12	2008/7/11
ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2006/7/6	2008/7/5
ETSTW-GSM 09	Controller PC	Dell GX 270	700F61J	Dell	Function Test	
ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	0053	Wessex / Anite	2006/7/13	2008/7/12
ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G	101087	R&S	2005/11/1	2007/4/30
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 13	Conditioning Amplifier	2690	2437856	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	2005/12/29	2006/12/28
ETSTW-GSM 18	AUDIO ANALYZER	UPL16	100173	R&S	2006/10/28	2007/10/27
ETSTW-GSM 23	SPLITTER	4901.19.A	None	SUHNER	Function Test	
ETSTW-GSM 24	Vibration Testing System	VS-100V	5494	Vibration	2005/12/20	2006/12/19
ETSTW-GSM 29	Microphone	4192	2458739	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 30	Ear Simulator	4195	2457416	Brüel&Kjær	2006/7/26	2007/7/25

Registration number: ETSTWM0611-00008-C-1

FCC ID: L2M001004

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 6.4 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dB μ V + 10.36 dB/m + 6 dB = 36.36 dB μ V/m @3m

ANSI STANDARD C63.4-2003 6.2.1 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

Measurements were made by ETS Dr. Genz Taiwan PS Co., Ltd. at the registered open field test site located at. The Registration Number: **930600**

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANTENNA & GROUND:

This unit uses **Printed loop antenna**. (see photo).

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3 Test results (enclosure)

1st test test after modification production test

TEST CASE	Para. Number	Required	Test passed	Test failed
Transmission Requirements	FCC 15.231(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission	FCC 15.231(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Bandwidth of Emission	FCC 15.231(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Tolerance	FCC 15.231(d)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Period Alternate Field Strength Requirements	FCC 15.231(e)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	FCC 15.203	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Receiver	FCC 15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	FCC 15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Measurement at (AC) Power Line	FCC 15.207	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

3.1 Transmission Requirements

FCC 15.231(a)

3.1.1 Limit of Transmission Time

- According to 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- According to 15.231(a)(2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

3.1.2 Active Time

- This manually operated transmitter employs a switch that automatically deactivate the transmitter within 1332.665 ms of being released.
- This transmitter is operated by automatic activation and active will cease transmission in __ ms after activation..

Comment: See attached appendix A.

Test equipment used : ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029,
ETSTW-RE 042, ETSTW-RE 043

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.2 Output Power (Field Strength)

Test condition		Transmitter field strength (dB μ V/m)	
T _{nom} = 23 °C	V _{nom} = 6V DC	PK	AV
		84.07	75.42
Measurement uncertainty		< 3 dB	

Limit 15.231(b)

Fundamental Frequency (MHz)	Field strength of fundamental, limit μ V/m
40.66 – 40.70	2,250
70 – 130	1,250
130 – 174	1,250 to 3,750
174 – 260	3,750
260 – 470	3,750 to 12,500** (433.92 MHz: 80.82 dB μ V/m = 10,996.68 μ V/m)
Above 470	12,500

** linear interpolation

Comments: See attached appendix B.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 042, ETSTW-RE 043

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

3.3 Out of Band Radiated Emissions

FCC Rule: 15.231(b) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max permitted average Limits = Max. reading – 20 dB

80.82 dB μ V/m- 20 dB= 60.82 dB μ V/m

Guidance on Measurement of pulsed emission: 815.231 (b), §15.35(c)

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction = 20 log (dwell time/100ms)

For frequencies above 1GHz (Peak measurements).

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

80.82 dB μ V/m

For frequencies above 1GHz (Average measurements).

Correction factor conform 15.35 (c) (Average measurements)

Duty cycle correction :

Max. reading – 20 dB – duty cycle correction

No duty cycle correction was added to the reading:

80.82 dB μ V/m- 20 dB= 60.82 dB μ V/m

Comments: See attached appendix C.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 028,
ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043,
ETSTW-RE 044

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.4 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.231 (b), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 8000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of pulsed emission:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

For frequencies above 1GHz (Average measurements).

The correction factor, based on the channel dwell tine in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/100ms)

No duty cycle correction was added to the reading

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Above 960 MHz

For mode DSSS CW: 54 dBμV/m + 20 dB = 74 dBμV/m

Comments: See attached appendix C

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.5 Spurious Emission radiated, Transmitter

Spurious emission was measured with modulation (declared by manufacturer).

The limits on the field strength of the spurious emission in the table § 15.231(b) are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

In addition, radiated emission which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

Summary table with radiated data of the test plots

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	868.534	42.55	25.69	PK	68.24	80.82	12.58	120	270
	868.534	28.90	25.69	AV	54.59	60.82	6.23	120	270
	1301.801	61.54	-8.02	PK	53.52	74	20.48	130	190
	1301.801	52.89	-8.02	AV	44.87	54	9.13	130	190
	1737.068	57.85	-6.56	PK	51.29	60.82	9.53	125	105
	2171.335	54.28	-3.20	PK	51.08	60.82	9.74	110	300

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	865.534	32.65	25.69	PK	58.34	60.82	2.48	115	145
	1301.801	63.41	-8.02	PK	55.39	74	18.61	125	200
	1301.801	54.76	-8.02	AV	46.74	54	7.26	125	200
	1737.068	61.81	-6.56	PK	55.25	60.82	5.57	130	300
	2171.335	57.01	-3.20	PK	53.81	60.82	7.01	125	290

- Note**
- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
 - 2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor**
 - 3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average**

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Freq. – Frequency Range:

- 1: 30 - 200 MHz
- 2: 200 - 1000MHz
- 3: 1 - 4 GHz
- 4: 4 - 8 GHz

All other not noted test plots do not contain significant test results in relation to the limits
Test results: The unit meet the FCC requirements.

Comment: See attached appendix C.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 028,
ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043,
ETSTW-RE 044

Registration number: ETSTWM0611-00008-C-1

FCC ID: L2M001004

3.6 Channel Bandwidth

Measurement of Necessary Bandwidth (BN)

Used frequency	Bandwidth	Limit
433.92 MHz	66.1323 kHz	1.0848 MHz
Measurement uncertainty	< 10 Hz	

Comments: The bandwidth fulfills the requirements of FCC § 15.231, see attached appendix D.

Limits:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 042, ETSTW-RE 043

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.7 Antenna requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Comment: This printed loop antenna is integral antenna which passes antenna requirement.

The equipment meets the requirements	yes <input checked="" type="checkbox"/>	no <input type="checkbox"/>
--------------------------------------	--	--------------------------------

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.8 Duty Cycle

The correction factor, based on the channel dwell time in a 100ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the measured value.

Average Reading = Peak Reading (dBuV/m) + Duty Cycle Correction

Duty Cycle Correction = 20 log (Cycle)

In order to determine the Duty Cycle, the EUT is measured as:

Testing Mode	T period (ms)	T on (ms)	Duty Cycle (%) (Ton/Tp)*100%	Duty Cycle Correction 20*log(Duty Cycle)
Mode	51.3	18.95	0.3694	-8.650

Comments: See attached appendix E.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 042, ETSTW-RE 043

Registration number: ETSTWM0611-00008-C-1
 FCC ID: L2M001004

3.9 Conducted Measurement at (AC) Power Line

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level	
	quasi-peak (dB μ V/m)	average (dB μ V/m)
-- kHz	--	--

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Comment: Test is not required because the sample is using a battery.

Test equipment used: ETSTW-CE 001, ETSTW-CE 003, ETSTW-CE 004, ETSTW-CE 006,
 ETSTW-EMS 013, ETSTW-EMS 014

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix

- A Active Time
- B Output Power
- C Spurious Emissions radiated
- D Bandwidth
- E Duty Cycle
- F Pictures


Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix A

Active Time



Delta 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 0.36 dB VBW 3 MHz
-20 dBm 1.332665 s SWT 5 s Unit dBm

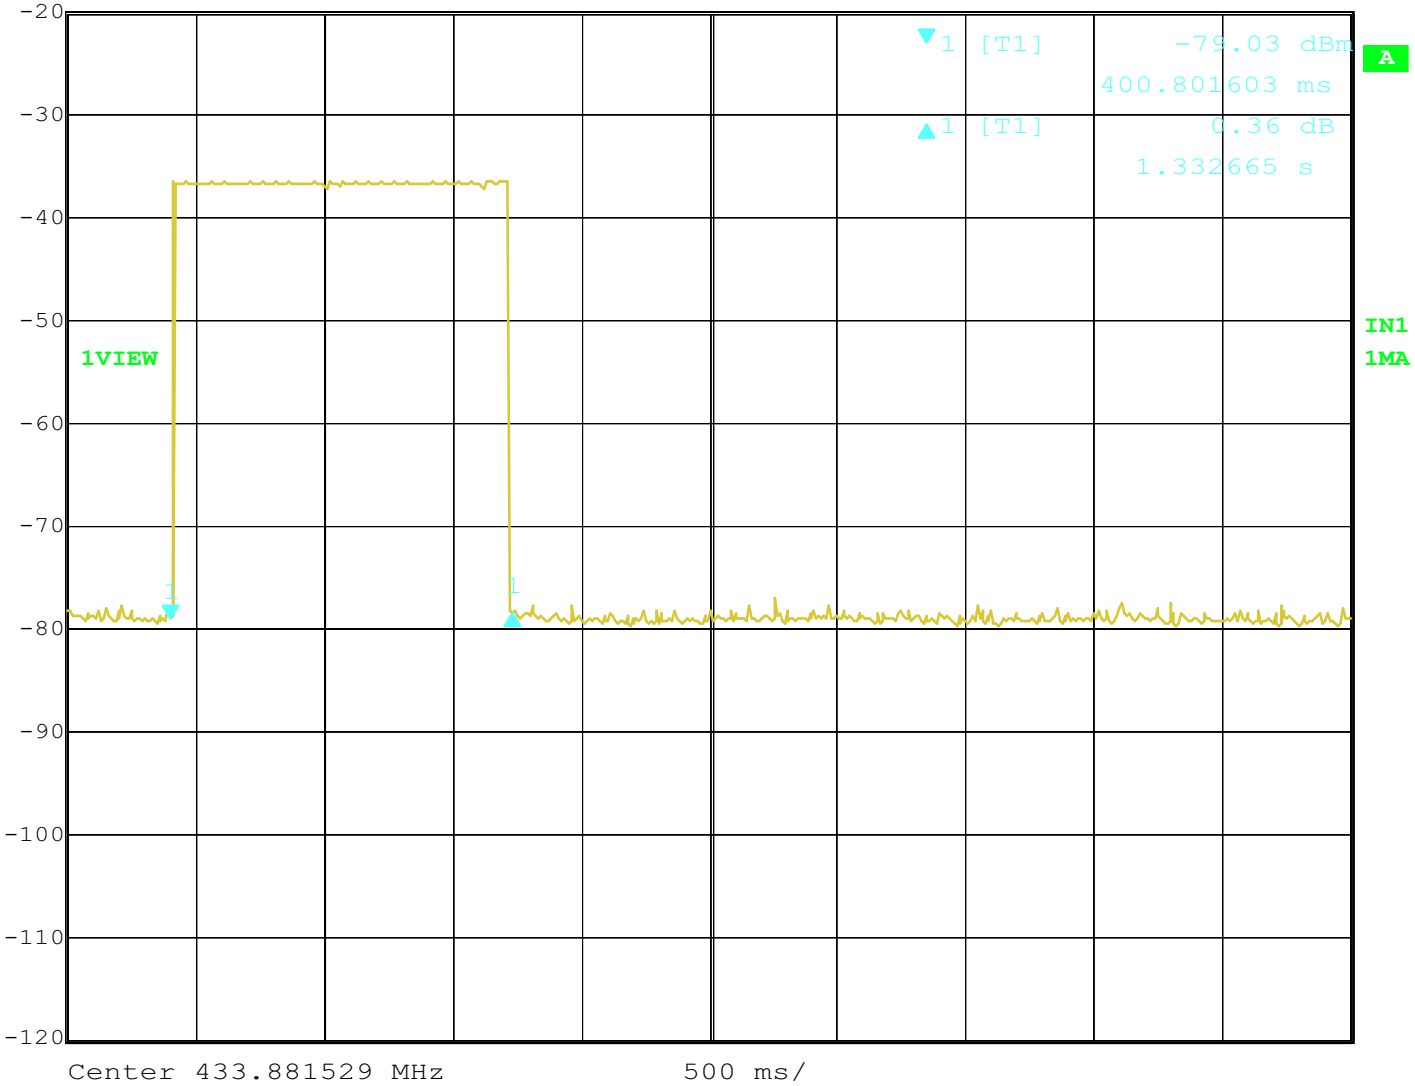

Title: Duration Time
Date: 27.NOV.2006 09:28:19

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004


Appendix B

Output Power

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : ESE WM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
according to Section15.231
Comment 1: Dist.: 3m, Ant.: HL223
Freq: 433.888MHz, Emax: 84.07dBμV/m, RBW: 100kHz

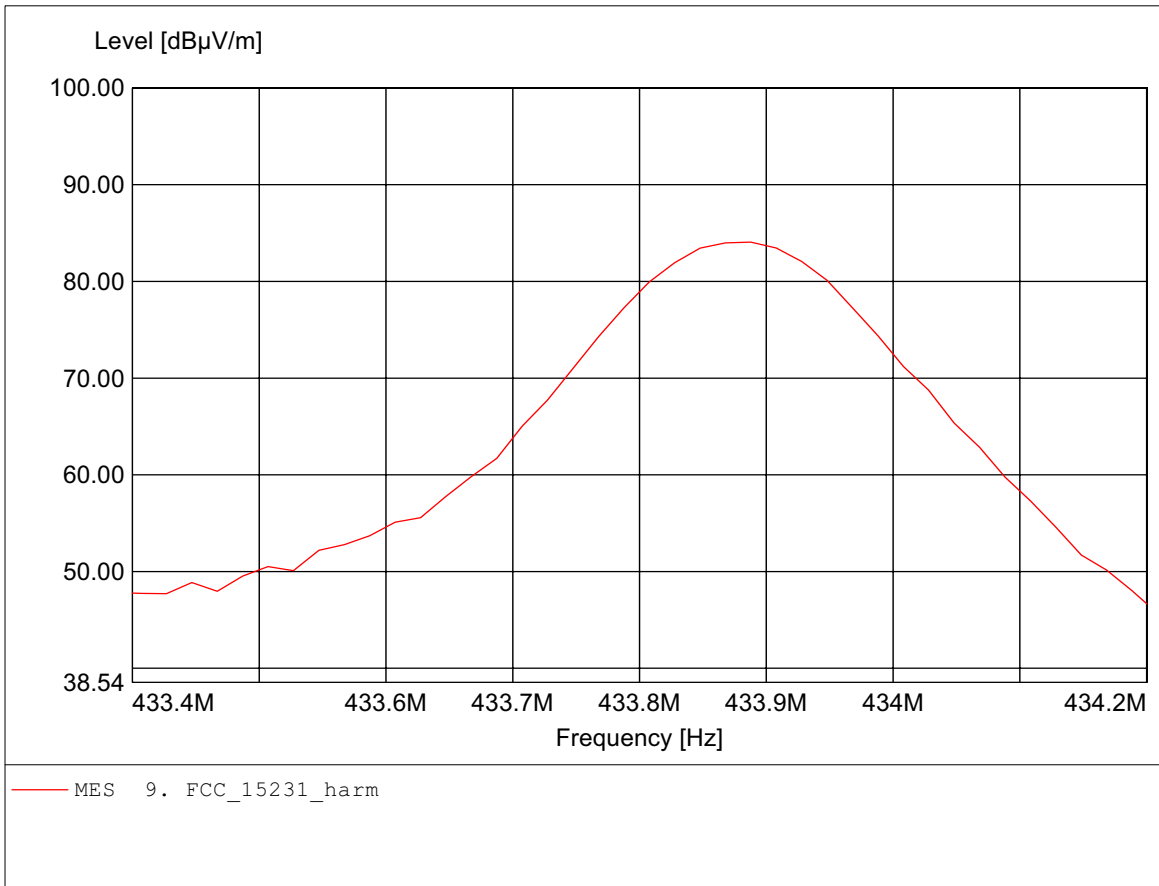

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002

Order Number : ESE WM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
according to Section15.231
Comment 1: Dist.: 3m, Ant.: HL223
Freq: 433.888MHz, Emax: 71.38dBμV/m, RBW: 100kHz

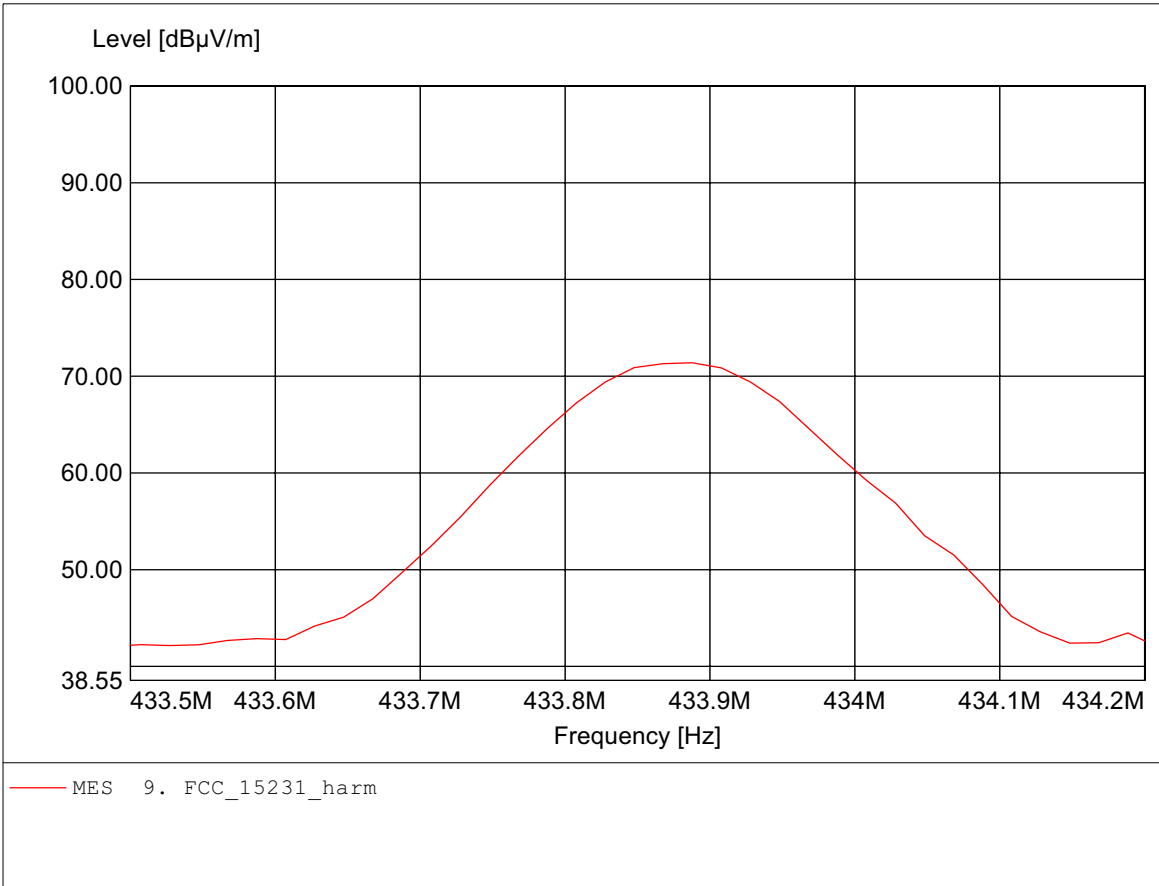

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix C


Spurious Emissions radiated

The measurement diagrams plots attached below are preliminary wideband scan with a peak detector for reference only. The final test results are listed on section 3.5

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP002


Order Number: ETSEWM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Ttest Specification: according to Section15.231
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 196.593MHz, Emax: 24.97dBμV/m, RBW: 100kHz

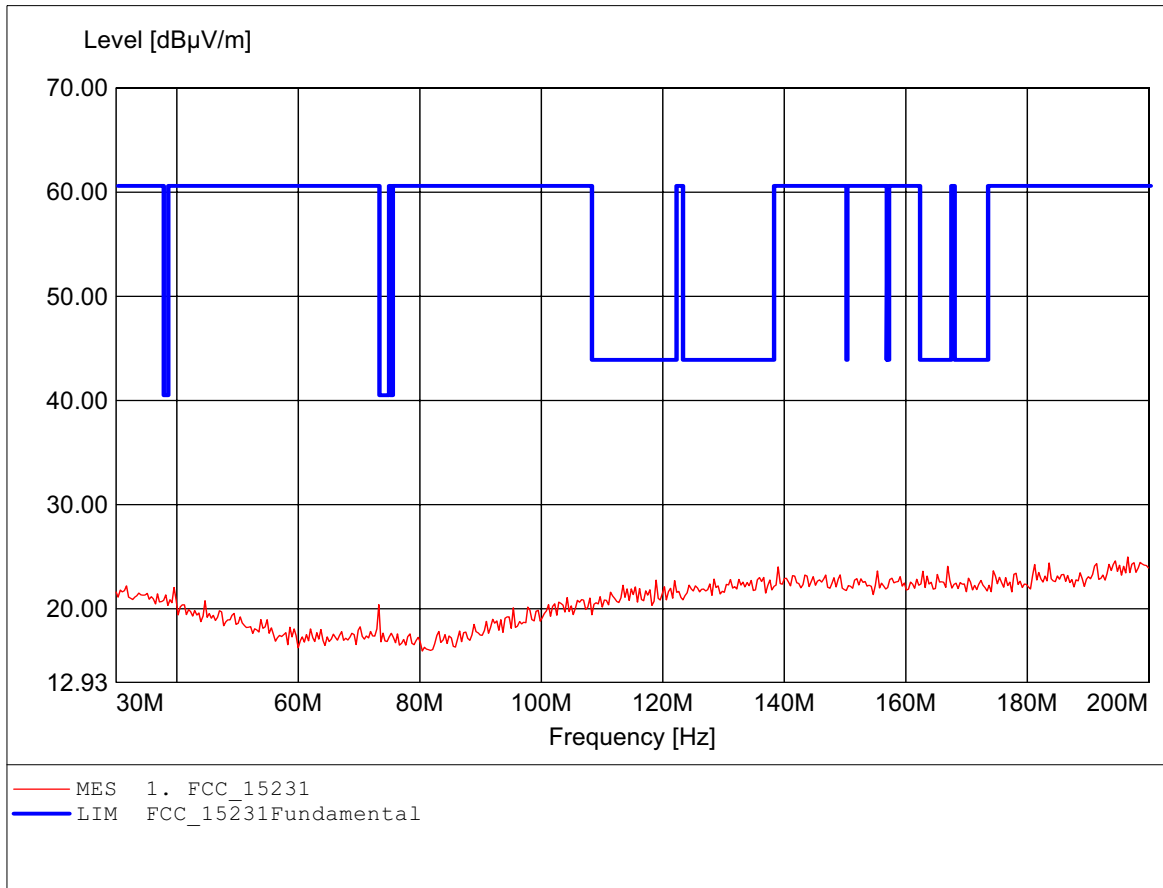

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP002


Order Number: ETSEWM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Ttest Specification: according to Section15.231
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 196.593MHz, Emax: 25.05dBμV/m, RBW: 100kHz

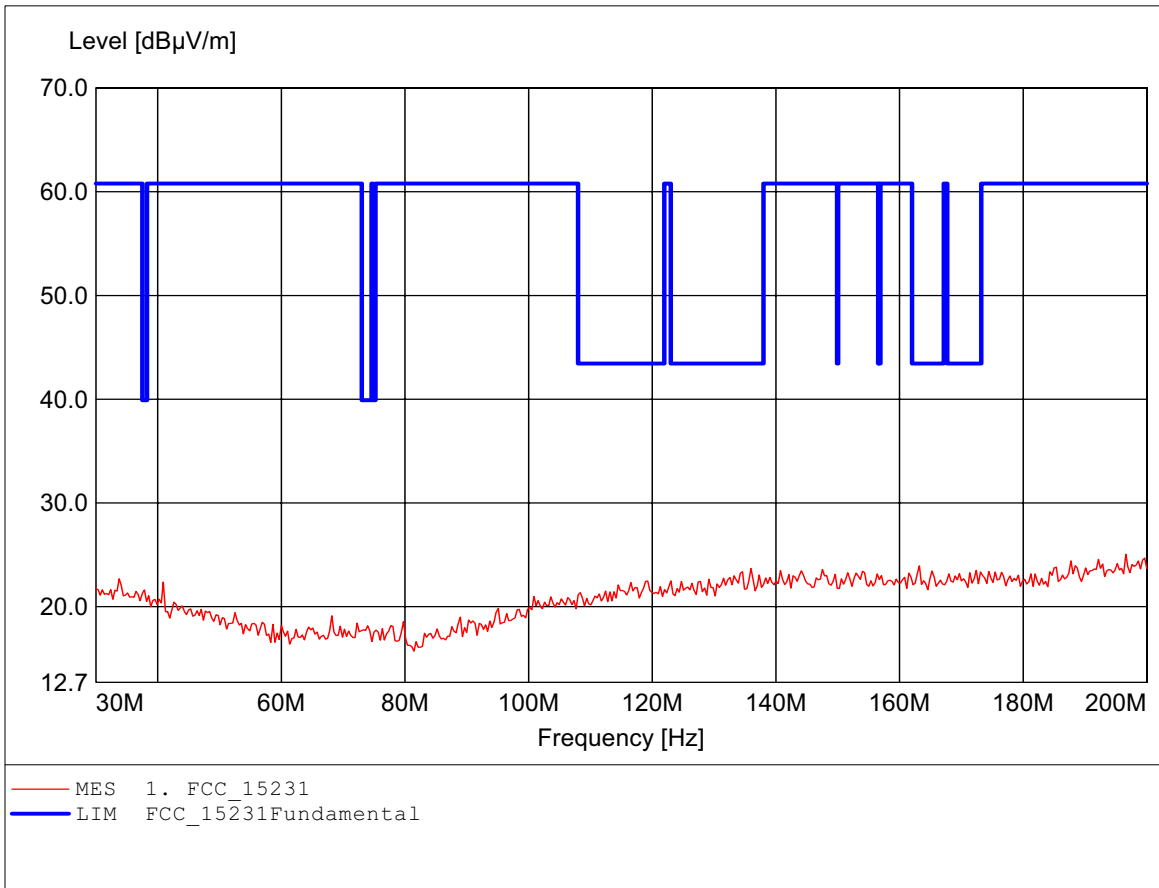

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : ESE WM0611-00008
Test Site / Operator: ES / Derek
Temperature: Temp: 23.9C
according to Section 15.231
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq 868.537MHz, Max 68.06dBu/m, RBW: 100kHz

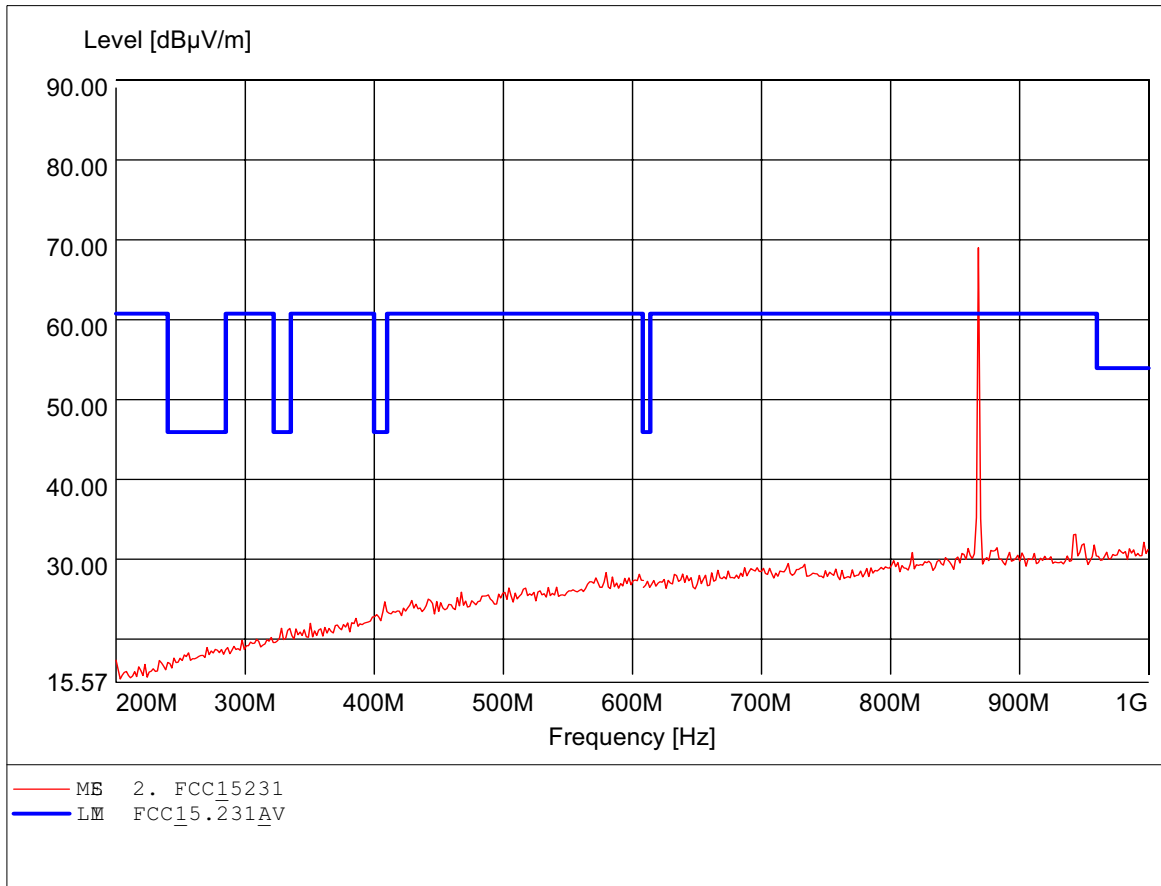

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : ETSEWM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
according to Section15.231
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 868.537MHz, Emax: 58.13dBμV/m, RBW: 100kHz

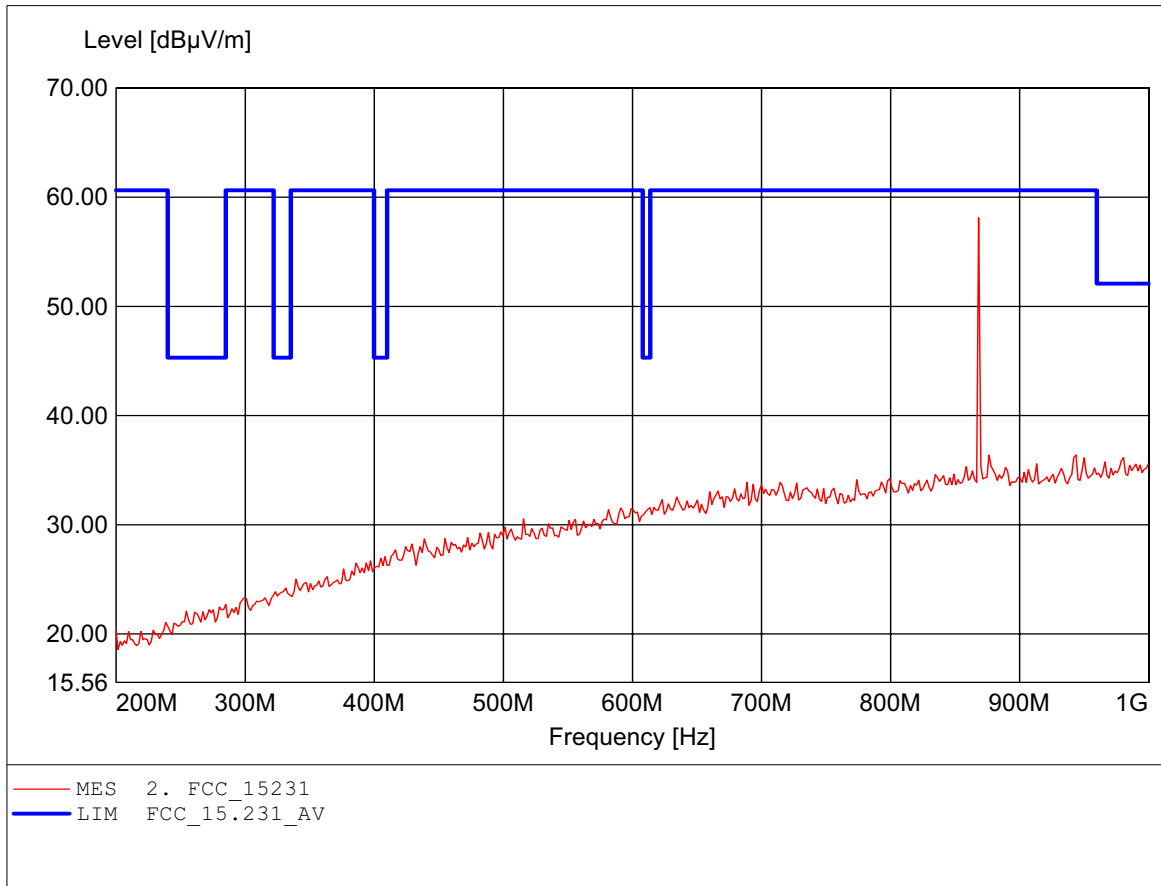

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP002


Order Number: ETSEWM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Ttest Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 1.301GHz, Emax: 53.10dBµV/m, RBW: 1MHz

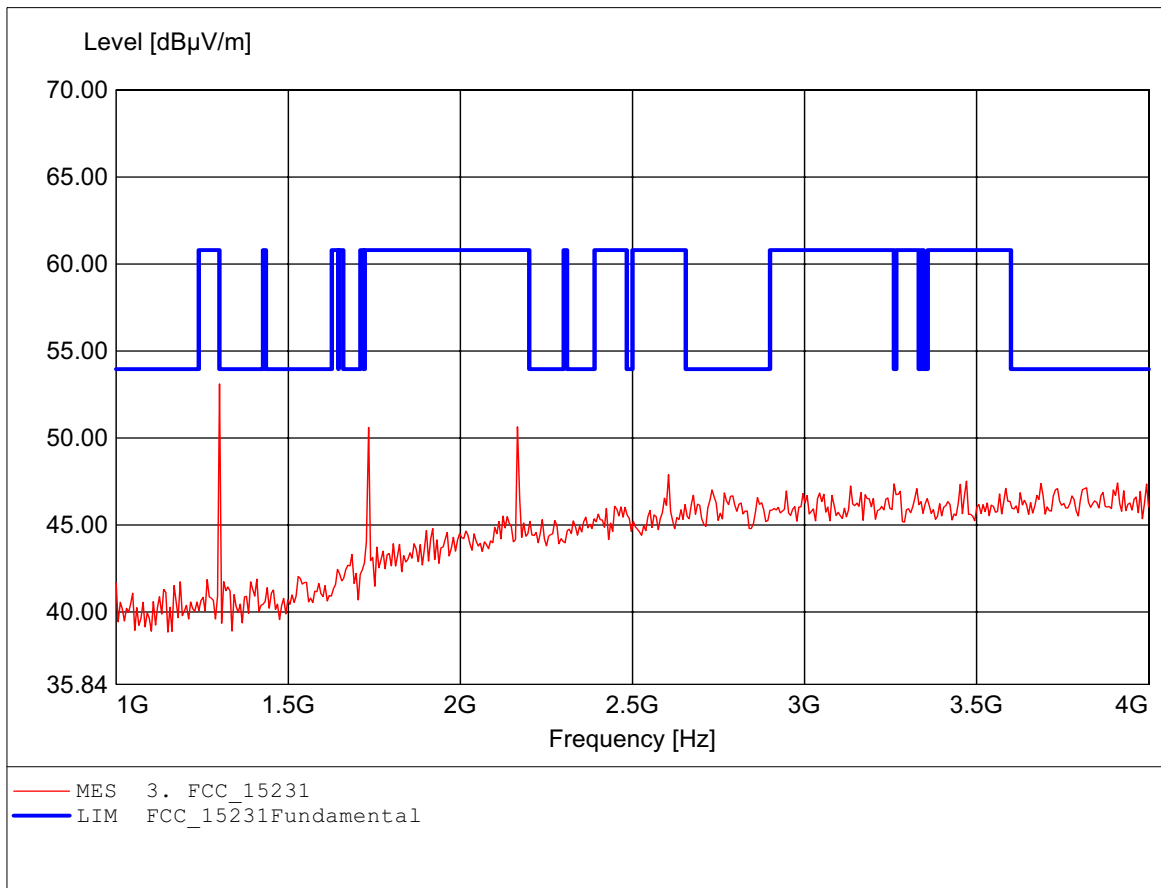

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP002

Order Number: ETSEWM0611-00008
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Ttest Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 1.301GHz, Emax: 54.91dBµV/m, RBW: 1MHz

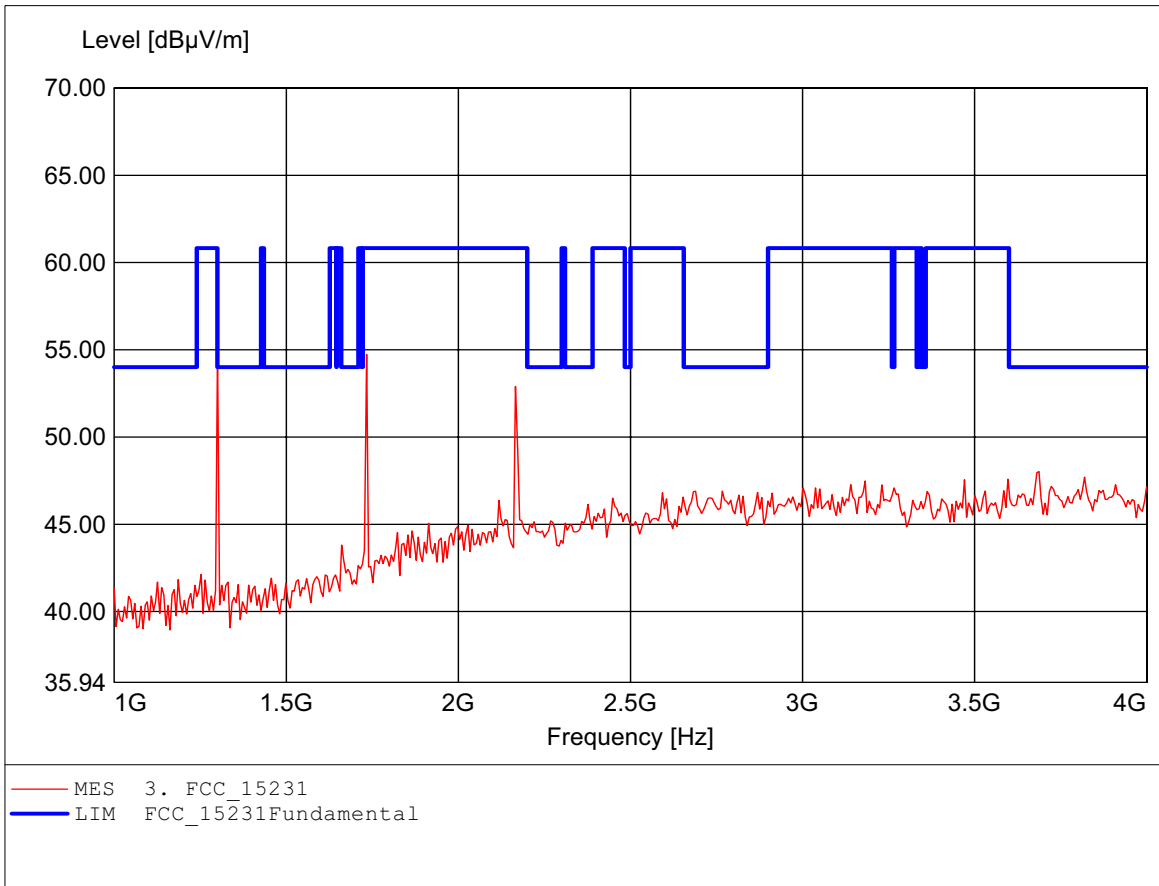


Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix D

Bandwidth



Marker 1 [T1 ndB] RBW 10 kHz RF Att 0 dB
 Ref Lvl ndB 20.00 dB VBW 30 kHz
 -20 dBm BW 66.13226453 kHz SWT 38 ms Unit dBm

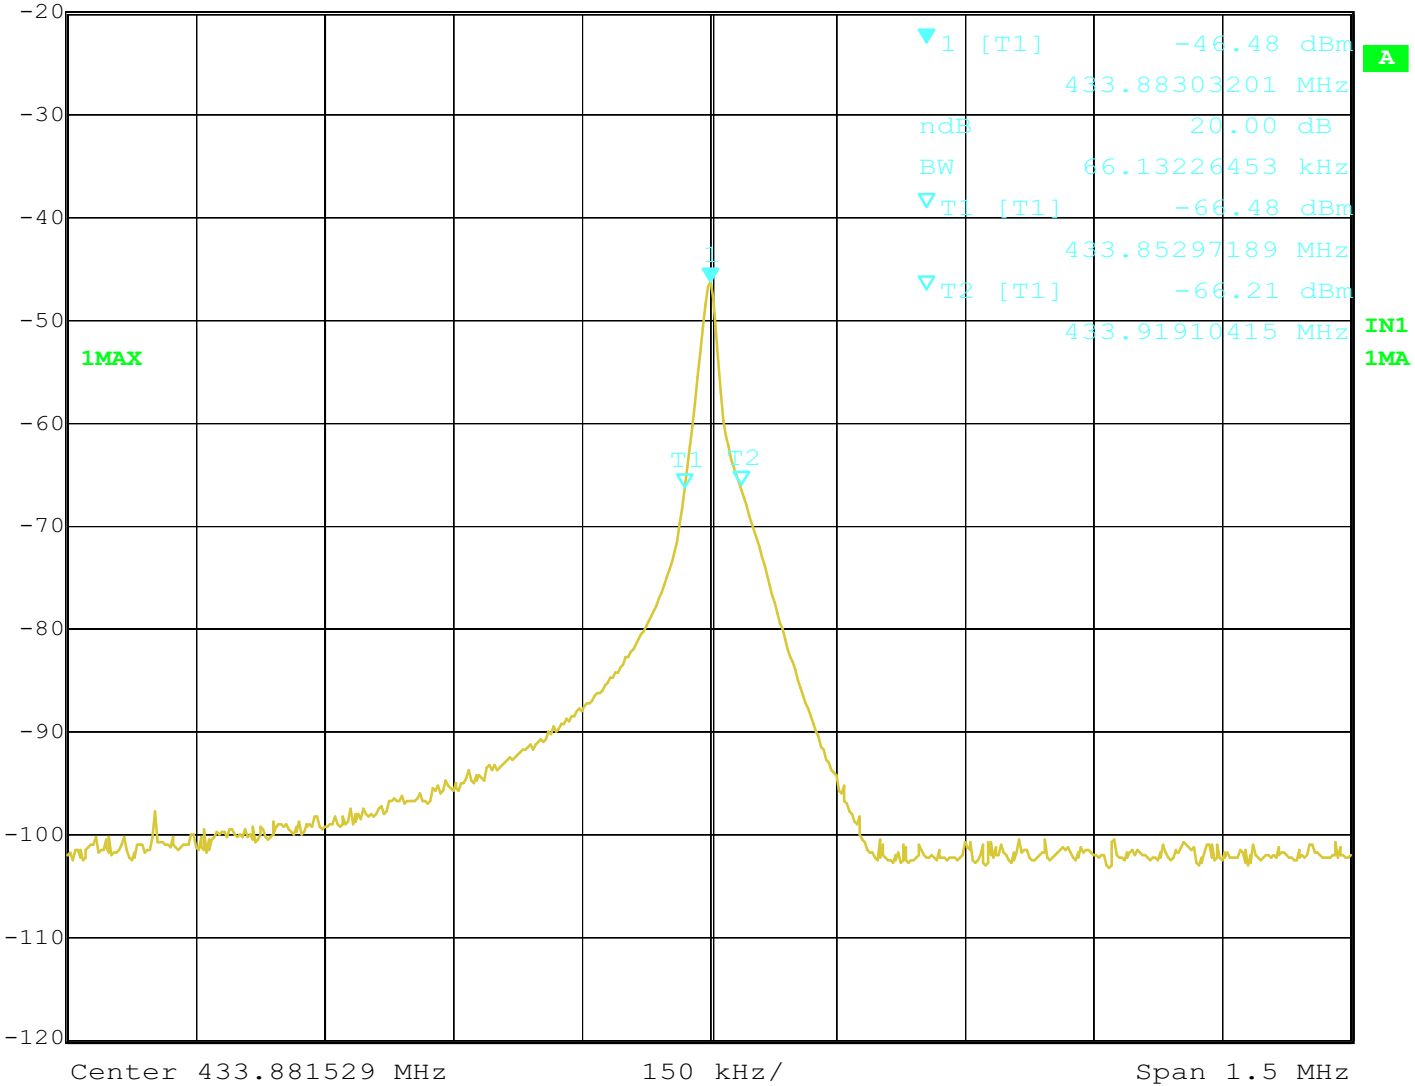

Title: 20dB bandwidth
 Date: 27.NOV.2006 09:32:31


Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix E

Duty Cycle




Delta 1 [T1] RBW 100 kHz RF Att 0 dB
Ref Lvl 55.89 dB VBW 100 kHz
-20 dBm 51.302605 ms SWT 100 ms Unit dBm

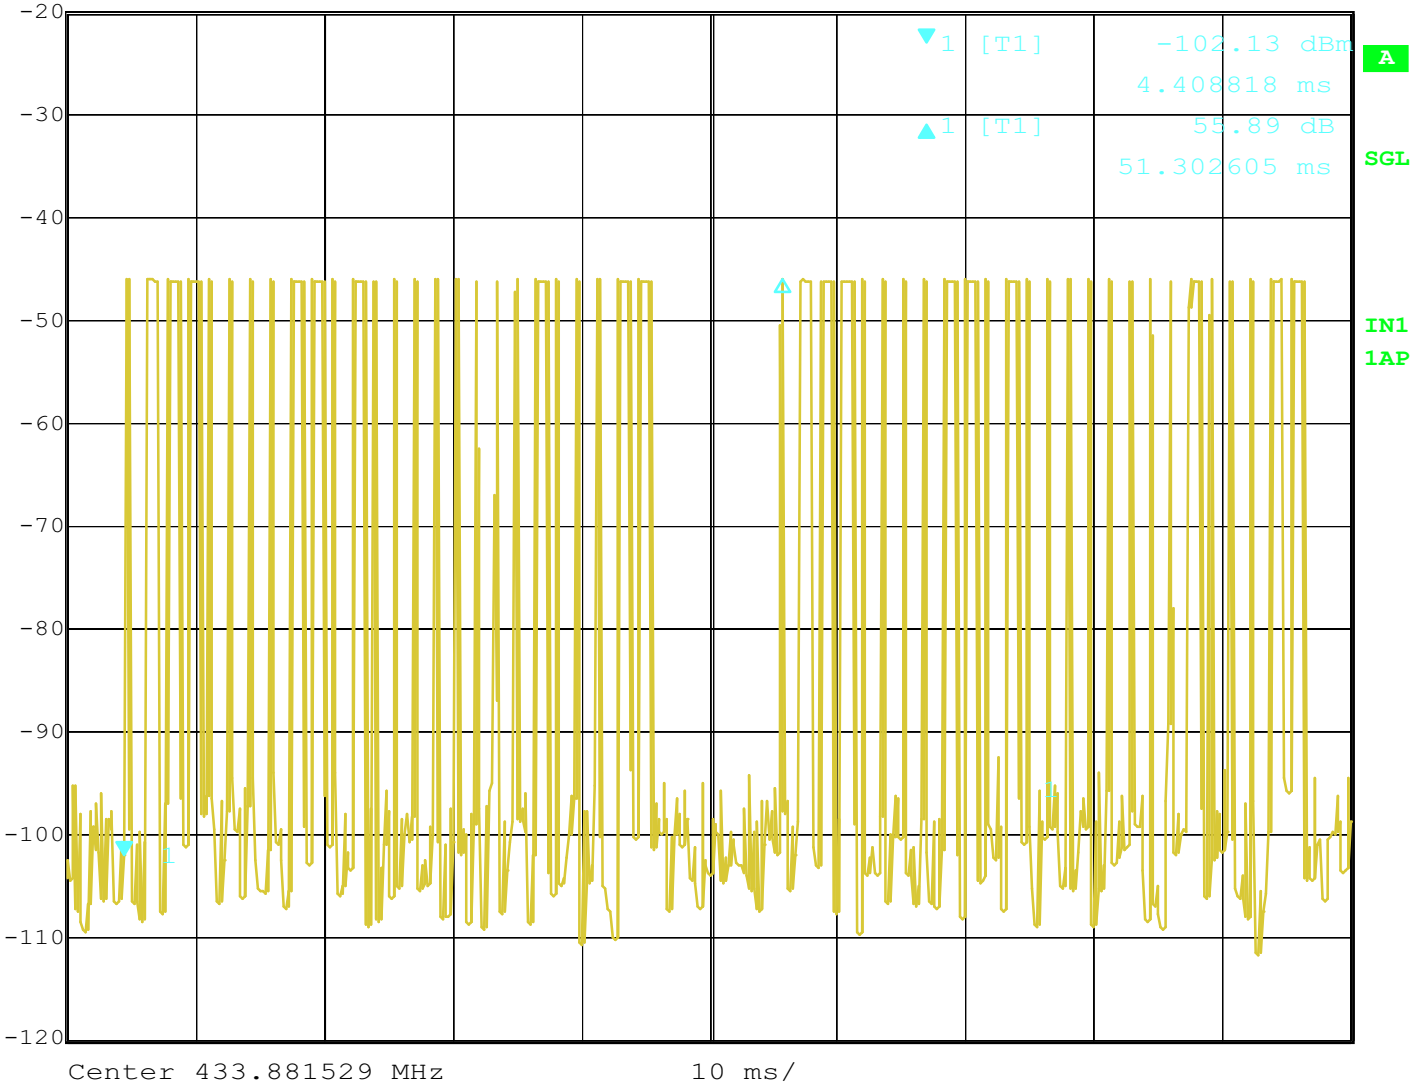

Title: Duty cycle
Date: 27.NOV.2006 09:18:42




Delta 1 [T1] RBW 100 kHz RF Att 0 dB
Ref Lvl 6.61 dB VBW 100 kHz
-20 dBm 41.242485 ms SWT 60 ms Unit dBm

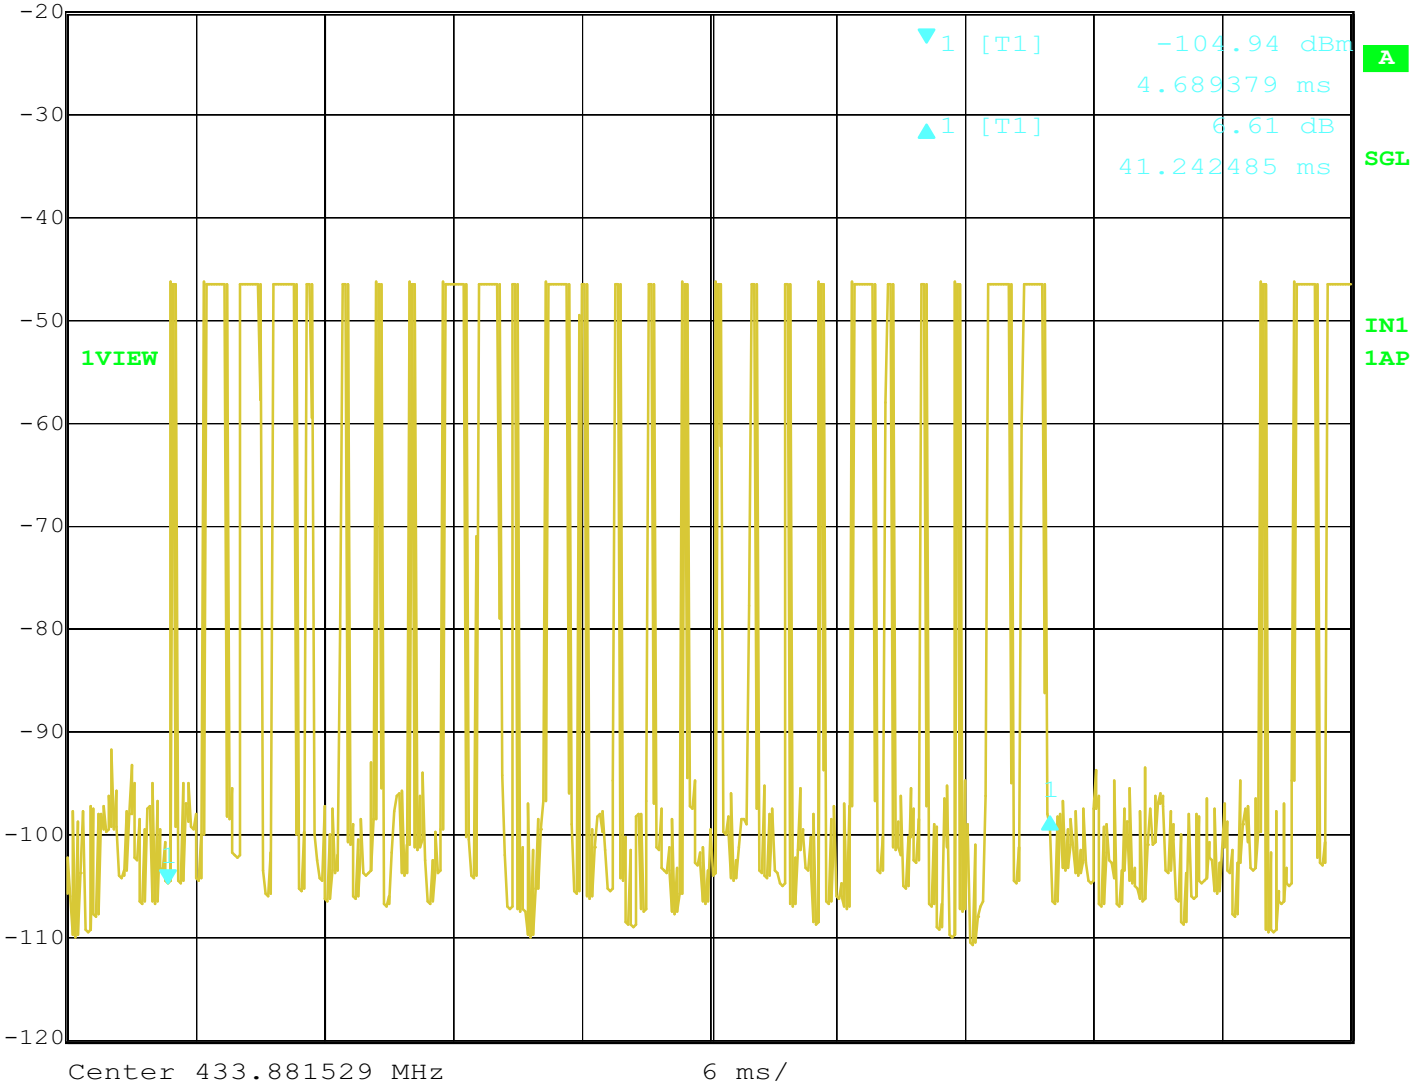

Title: Duty cycle
Date: 27.NOV.2006 09:21:24




Delta 1 [T1] RBW 100 kHz RF Att 0 dB
Ref Lvl 6.39 dB VBW 100 kHz
-20 dBm 456.913828 μ s SWT 15 ms Unit dBm

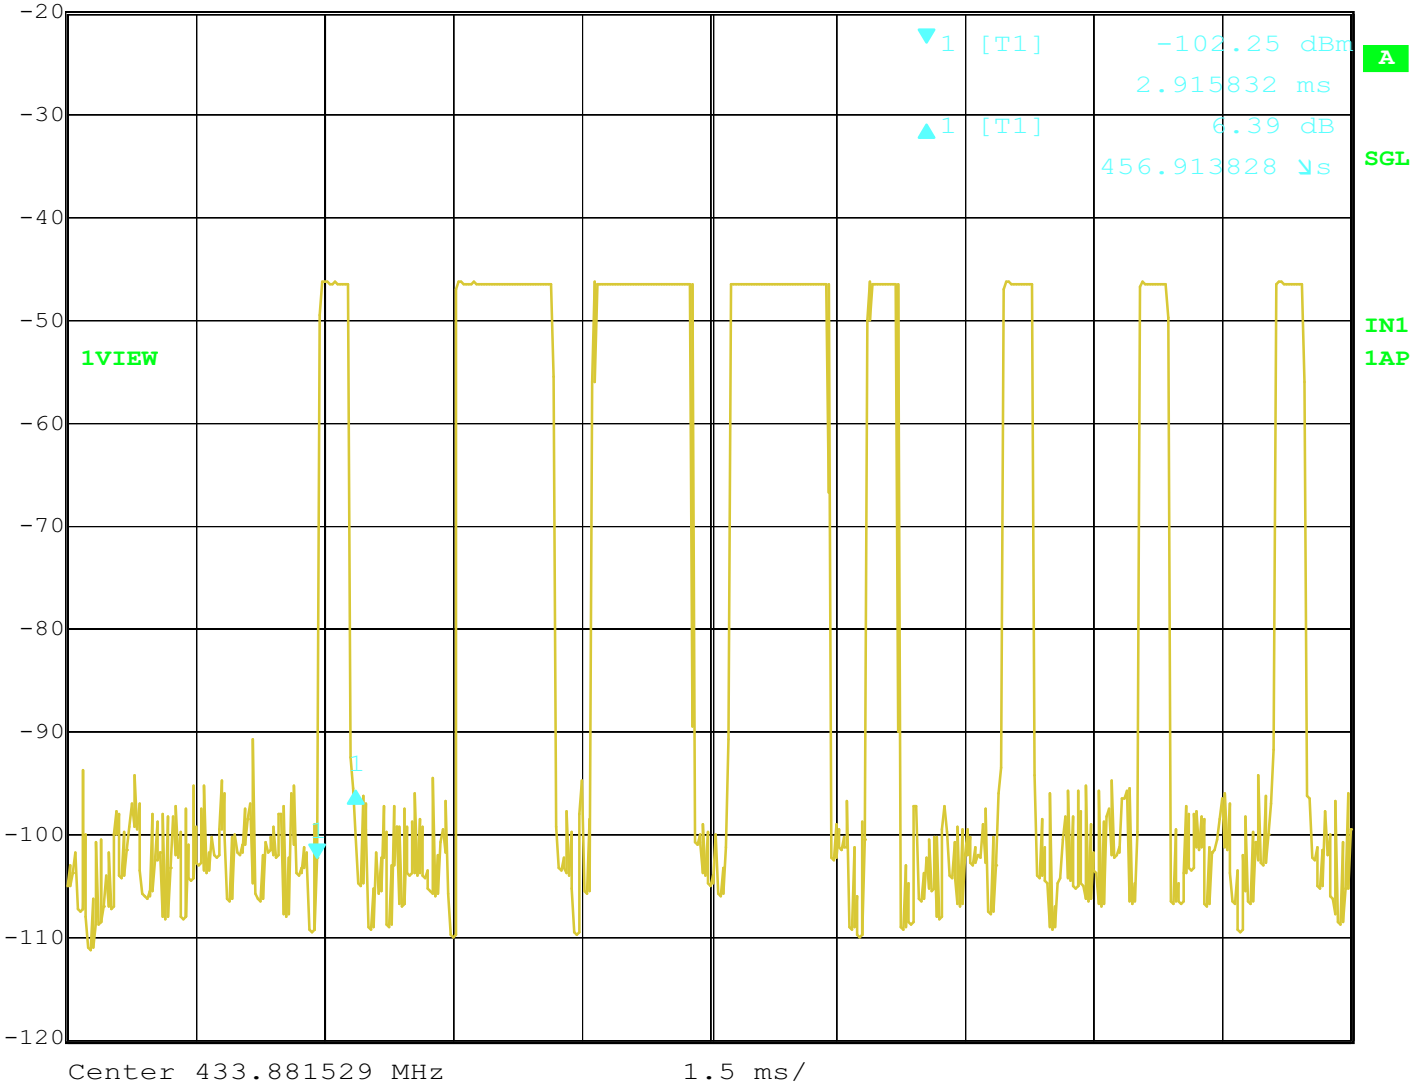

Title: Duty cycle
Date: 27.NOV.2006 09:22:48



Delta 1 [T1] RBW 100 kHz RF Att 0 dB
Ref Lvl 10.54 dB VBW 100 kHz
-20 dBm 1.238477 ms SWT 15 ms Unit dBm

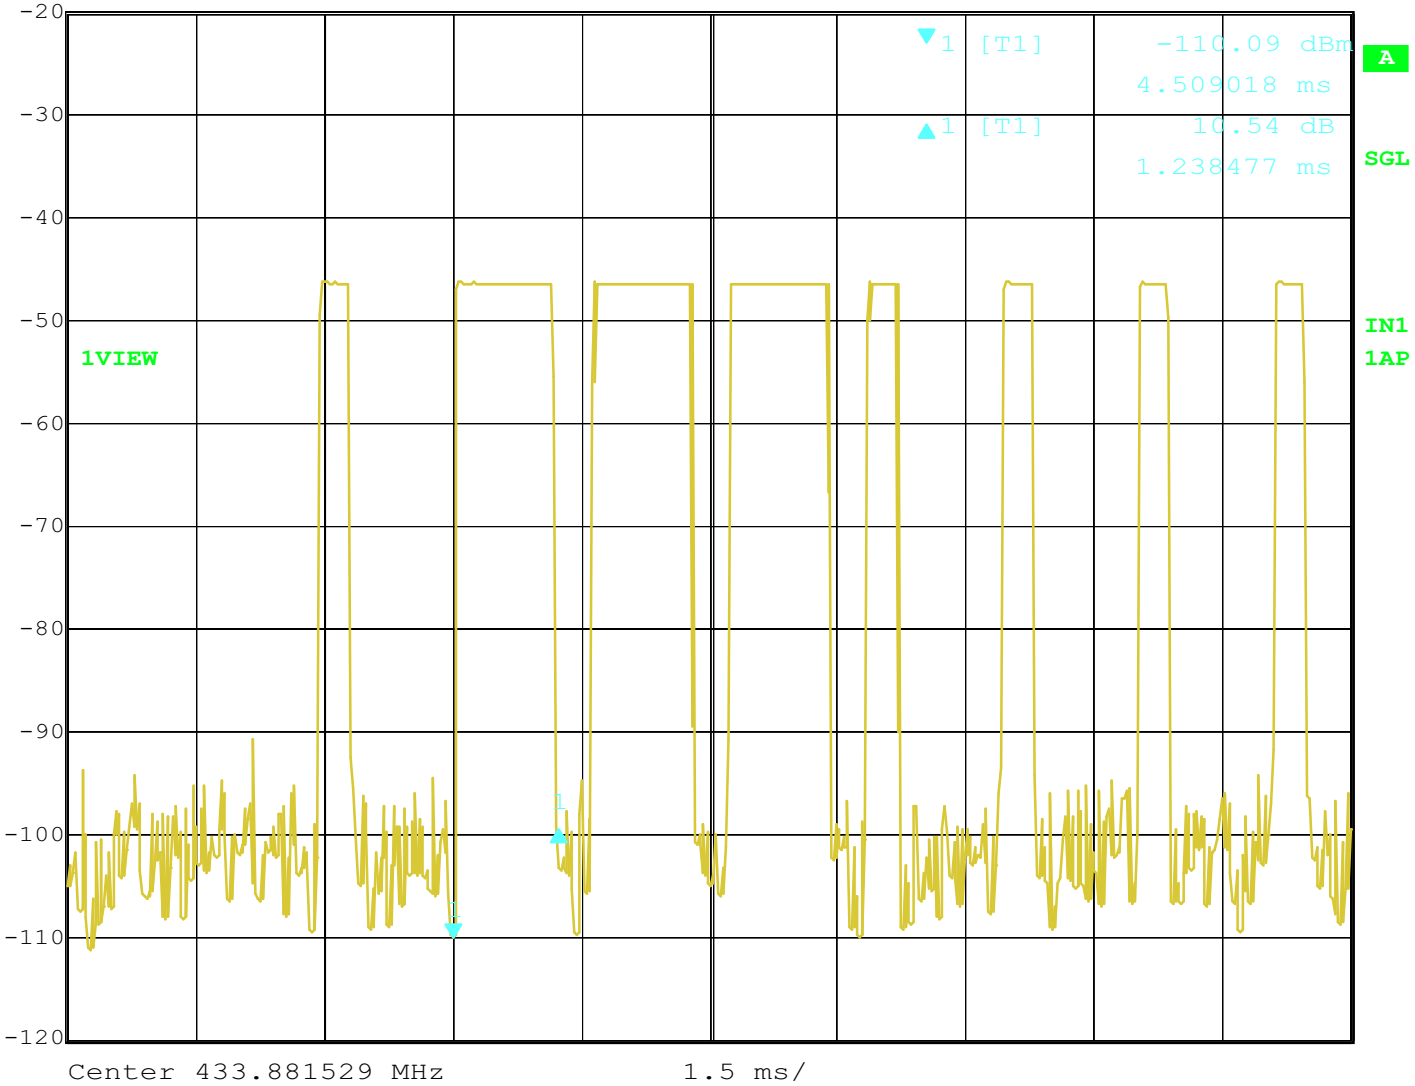

Title: Duty cycle
Date: 27.NOV.2006 09:23:21

Registration number: ETSTWM0611-00008-C-1
FCC ID: L2M001004

Appendix G

Pictures