

APPLICATION CERTIFICATION  
On Behalf of  
CHIA WEI ELECTRIC CO., LTD

REMOTE CONTROL  
Model No.: FAN-35T2

FCC ID: L3HFAN35T2

Prepared for : CHIA WEI ELECTRIC CO., LTD  
Address : No.27, Lane 24, Ta Lain North St., Taichung, TAIWAN

Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen,  
Guangdong P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20100946  
Date of Test : May 10-12, 2010  
Date of Report : May 13, 2010

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty .....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c).....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	15
<b>6. RELEASE TIME MEASUREMENT.....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a) .....	16
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Measurement Result .....	18
<b>7. AVERAGE FACTOR MEASUREMENT .....</b>	<b>19</b>
7.1. Block Diagram of Test Setup.....	19
7.2. Average factor Measurement according to ANSI 63.4: 2003.....	19
7.3. EUT Configuration on Measurement .....	20
7.4. Operating Condition of EUT .....	20
7.5. Test Procedure .....	20
7.6. Measurement Result .....	21

APPENDIX I ( TEST CURVES) (10 pages)

## Test Report Certification

Applicant : CHIA WEI ELECTRIC CO., LTD  
Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD  
EUT Description : REMOTE CONTROL  
(A) MODEL NO.: FAN-35T2  
(B) SERIAL NO.: N/A  
(C) POWER SUPPLY: 12V DC (“23A” battery 1×)

Measurement Procedure Used:

### **FCC Rules and Regulations Part 15 Subpart C Section 15.231 ANSI 63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : May 10-12, 2010

Prepared by : Joe  
(Engineer)

Approved & Authorized Signer : Seamless  
(Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT : REMOTE CONTROL

Model Number : FAN-35T2

Power Supply : 12V DC (“23A” battery 1×)

Operation Frequency : 303.9MHz

Applicant : CHIA WEI ELECTRIC CO., LTD  
Address : No.27, Lane 24, Ta Lain North St., Taichung, TAIWAN

Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD  
Address : 6th Industrial Area, Nan Lang Town, Zhong Shan City,  
Guang Dong Province, China

Date of sample received : May 7, 2010

Date of Test : May 10-12, 2010

## 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO., LTD  
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2011
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2011
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2011
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2011
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 9, 2011
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 9, 2011
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2011
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2011

### 3. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant

The product is a manually operated Remote Control transmitter.  
Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

## 4. THE FIELD STRENGTH OF RADIATION EMISSION


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

#### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

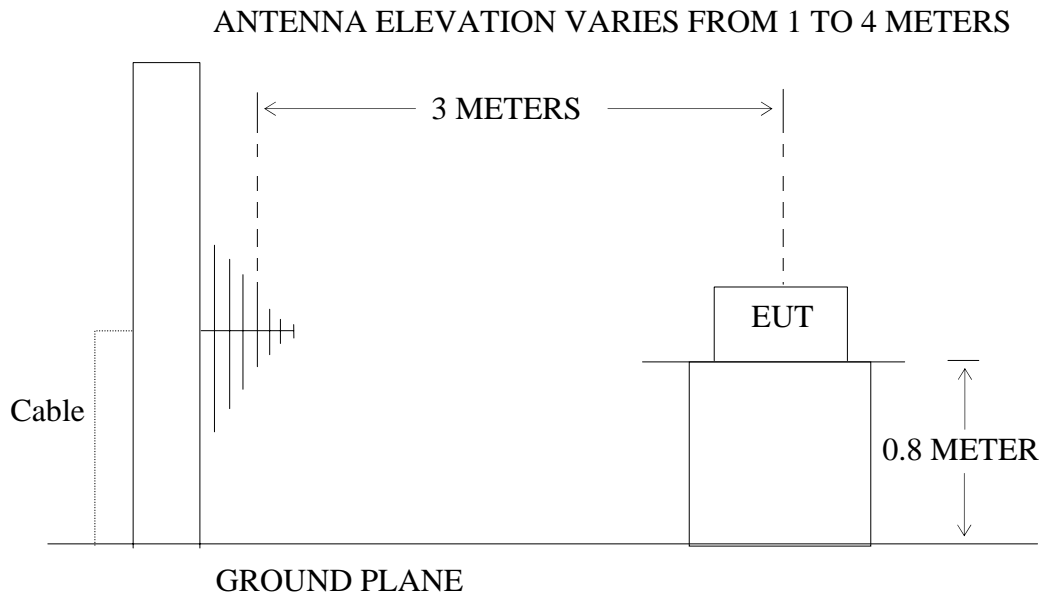

(EUT: REMOTE CONTROL)

## 4.2. The Field Strength of Radiation Emission Measurement Limits

### 4.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu\text{V}/\text{m}$ ]	Field Strength of Spurious Emission [Average] [ $\mu\text{V}/\text{m}$ ]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V}/\text{m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V}/\text{m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section 15.209.

## 4.3. Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. REMOTE CONTROL (EUT)

Model Number : FAN-35T2  
 Serial Number : N/A  
 Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD

## 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz, and 1MHz in 1000-4000MHz.

The frequency range from 30MHz to 4000MHz is checked.

#### 4.6. The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 4000MHz is investigated.

Date of Test:	May 10-12, 2010	Temperature:	25°C
EUT:	REMOTE CONTROL	Humidity:	50%
Model No.:	FAN-35T2	Power Supply:	12V DC ("23A" battery 1×)
Test Mode:	TX	Test Engineer:	Joe

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Average Factor (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	PEAK			AV	PEAK	AV	AV	PEAK		
<b>303.6963</b>	<b>62.32</b>	<b>18.80</b>	<b>-10.5</b>	<b>70.62</b>	<b>81.12</b>	<b>74.9</b>	<b>94.9</b>	<b>-4.28</b>	<b>-13.78</b>	Horizontal
607.3917	35.77	25.69	-10.5	50.96	61.46	54.9	74.9	-3.94	-13.44	
911.0859	32.22	28.84	-10.5	50.56	61.06	54.9	74.9	-4.34	-13.84	
*1214.788	73.11	-12.44	-10.5	50.17	60.67	54.0	74.0	-3.83	-13.33	
*1518.486	72.10	-11.31	-10.5	50.29	60.79	54.0	74.0	-3.71	-13.21	
1822.182	66.74	-9.82	-10.5	46.42	56.92	54.9	74.9	-8.48	-17.98	
2125.878	61.17	-8.47	-10.5	42.20	52.70	54.9	74.9	-12.70	-22.20	
<b>303.6963</b>	<b>59.06</b>	<b>18.80</b>	<b>-10.5</b>	<b>67.36</b>	<b>77.86</b>	<b>74.9</b>	<b>94.9</b>	<b>-7.54</b>	<b>-17.04</b>	
607.3917	35.33	25.69	-10.5	50.52	61.02	54.9	74.9	-4.38	-13.88	
911.0859	30.50	28.84	-10.5	48.84	59.34	54.9	74.9	-6.06	-15.56	
*1214.788	72.62	-12.44	-10.5	49.68	60.18	54.0	74.0	-4.32	-13.82	
*1518.486	72.28	-11.31	-10.5	50.47	60.97	54.0	74.0	-3.53	-13.03	
1822.182	65.12	-9.82	-10.5	44.80	55.30	54.9	74.9	-10.10	-19.60	
2125.878	61.21	-8.47	-10.5	42.24	52.74	54.9	74.9	-12.66	-22.16	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. \*: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4. FCC Limit for Average Measurement =  $41.6667(303.9) - 7083.3333 = 5579.17683 \mu\text{V/m} = 74.9 \text{dB}\mu\text{V/m}$
5. The spectral diagrams in appendix I display the measurement of peak values.

## 5. 20DB OCCUPIED BANDWIDTH


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

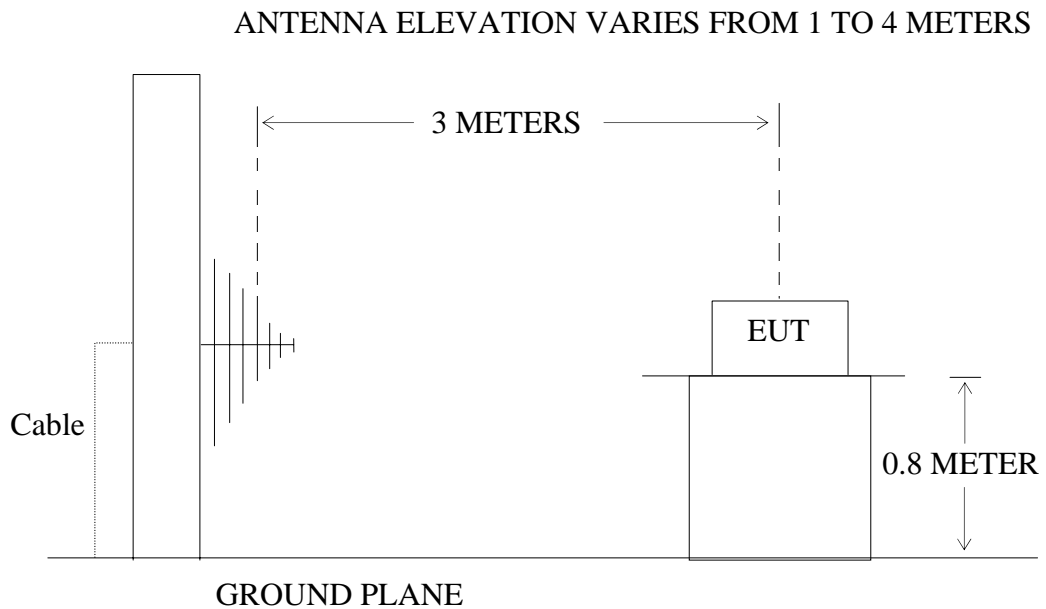

(EUT: REMOTE CONTROL)

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $303.9\text{MHz} \times 0.25\% = 759.75\text{kHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.REMOTE CONTROL (EUT)

Model Number : FAN-35T2  
Serial Number : N/A  
Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in TX mode measure it.

### 5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 1MHz.

5.5.2.Set SPA Max hold. Mark peak, -20dB

## 5.6.Measurement Result

**The EUT does meet the FCC requirement.**

-20dB bandwidth = 62kHz < 759.75kHz.

The spectral diagrams in appendix I.

## 6. RELEASE TIME MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

#### 6.1.2. Semi-Anechoic Chamber Test Setup Diagram

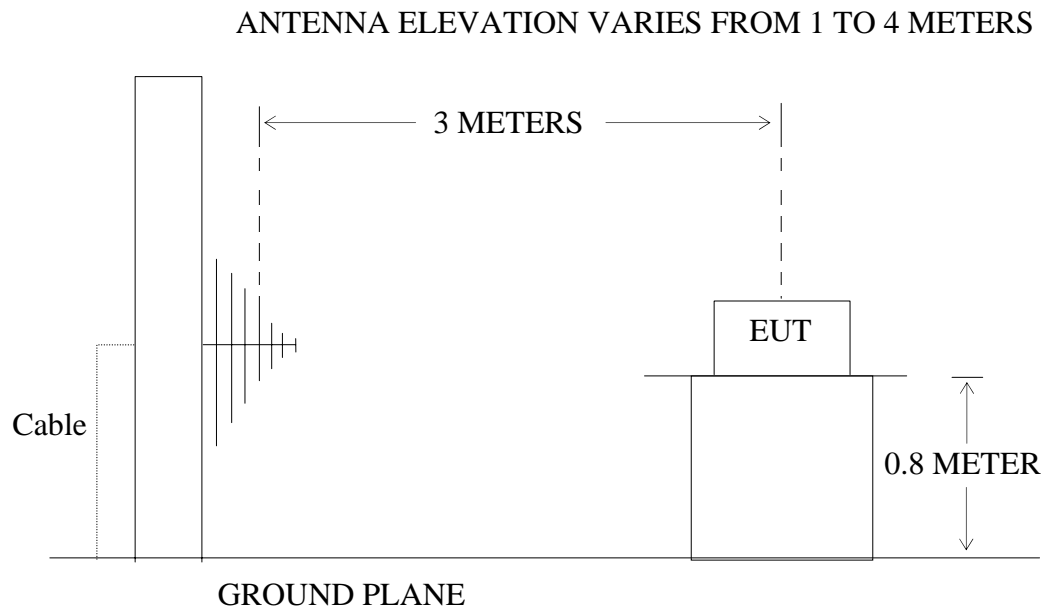

(EUT: REMOTE CONTROL)

### 6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1. REMOTE CONTROL (EUT)

Model Number : FAN-35T2  
Serial Number : N/A  
Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD

### 6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in TX mode measure it.

### 6.5.Test Procedure

6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz. Sweep time = 5 seconds.

6.5.2.Set EUT as normal operation and press Transmitter button.

6.5.3.Set SPA View. Delta Mark time.

## 6.6. Measurement Result

**The release time less than 5 seconds.**

Release Time= 690 ms

The spectral diagrams in appendix I.

## 7. AVERAGE FACTOR MEASUREMENT


### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

#### 7.1.2. Semi-Anechoic Chamber Test Setup Diagram

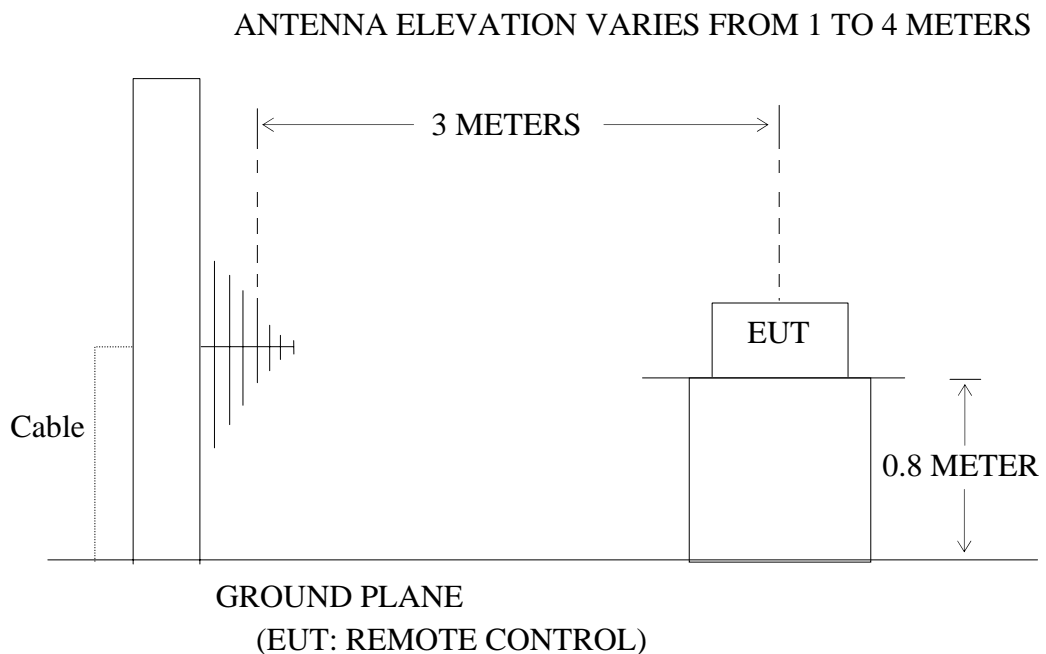

### 7.2. Average factor Measurement according to ANSI 63.4: 2003

**ANSI 63.4: 2003 Section 13.1.4.2** Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

**Average factor in dB =  $20 \log$  (duty cycle)**

### 7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.3.1. REMOTE CONTROL (EUT)

Model Number : FAN-35T2  
Serial Number : N/A  
Manufacturer : Chien Wei (Zhongshan) Electronic Co., LTD

### 7.4.Operating Condition of EUT

7.4.1.Setup the EUT and simulator as shown as Section 7.1.

7.4.2.Turn on the power of all equipment.

7.4.3.Let the EUT work in TX mode measure it.

### 7.5.Test Procedure

7.5.1.The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2.Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz.

7.5.3.Set EUT as normal operation.

7.5.4.Set SPA View. Delta Mark time.

## 7.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

The duration of one cycle = 20.6ms

Effective period of the cycle =  $(6 \times 0.32) + (7 \times 0.61)$  ms = 6.19ms

DC =  $6.19\text{ms} / 20.6\text{ms} = 0.300$

**Therefore, the average factor is found by  $20\log 0.300 = -10.5\text{dB}$**

The spectral diagrams in appendix I.

# APPENDIX I (Test Curves)



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4786  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: REMOTE CONTROL  
Mode: TX  
Model: FAN-35T2  
Manufacturer: Chien Wei

Polarization: Horizontal  
Power Source: DC 12V  
Date: 2010/05/10  
Time: 15:00:08  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:101046 Report No.:ATE20100946

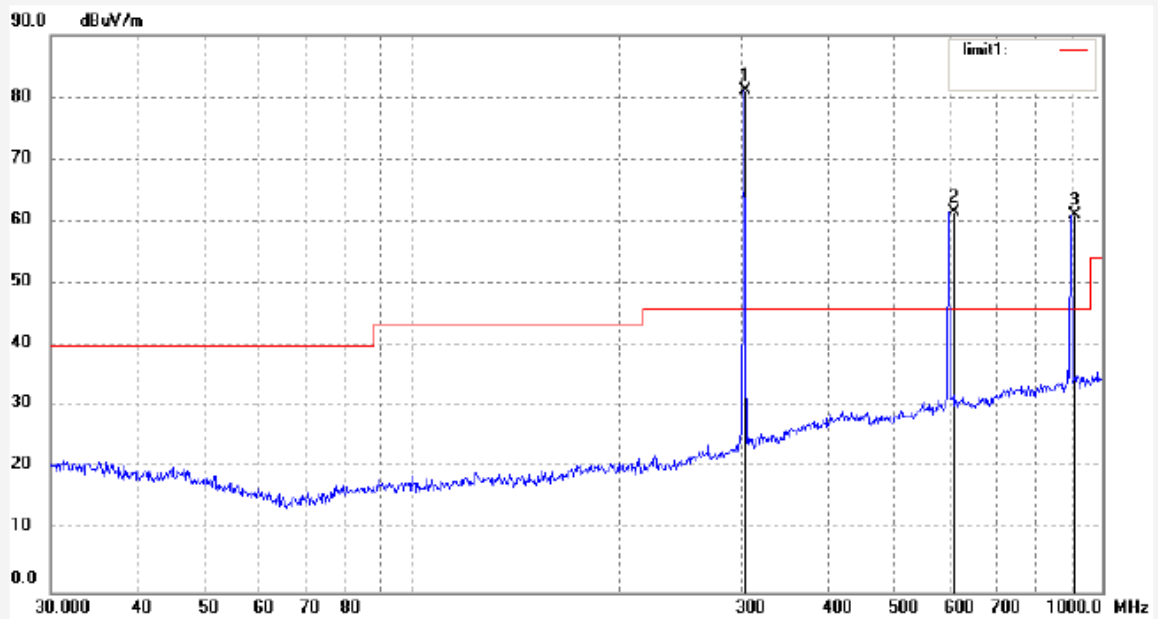

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	303.6963	62.32	18.80	81.12	94.90	-13.78	peak			
2	607.3917	35.77	25.69	61.46	74.90	-13.44	peak			
3	911.0859	32.22	28.84	61.06	74.90	-13.84	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4787  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: REMOTE CONTROL  
Mode: TX  
Model: FAN-35T2  
Manufacturer: Chien Wei

Polarization: Vertical  
Power Source: DC 12V  
Date: 2010/05/10  
Time: 15:04:33  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:101046 Report No.:ATE20100946

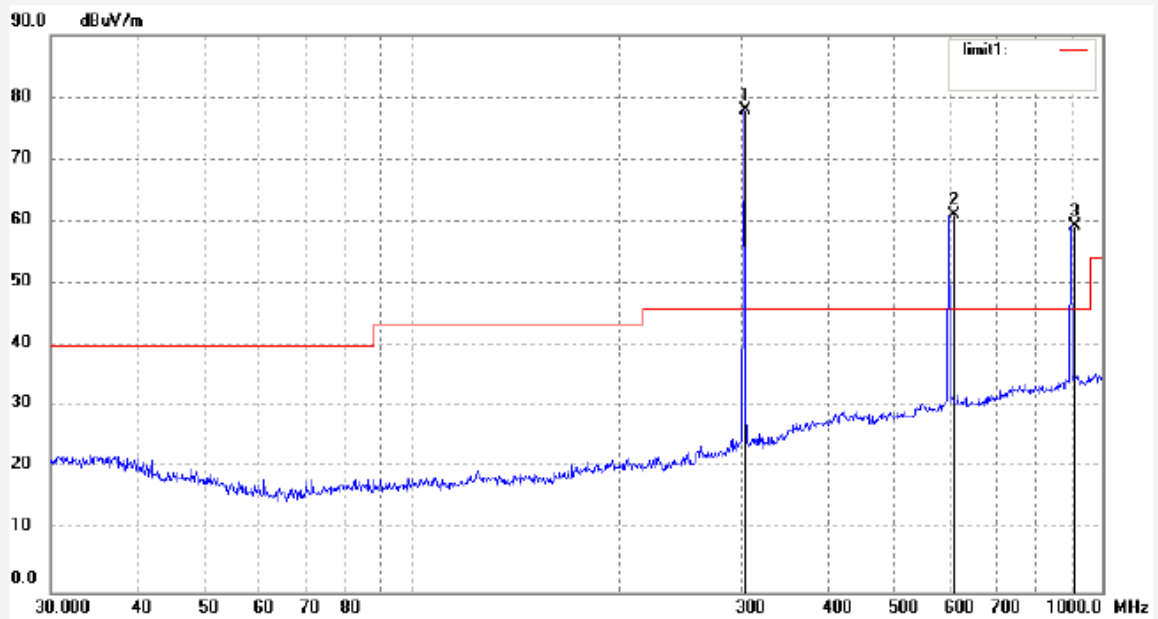

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	303.6963	59.06	18.80	77.86	94.90	-17.04	peak			
2	607.3917	35.33	25.69	61.02	74.90	-13.88	peak			
3	911.0859	30.50	28.84	59.34	74.90	-15.56	peak			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4801	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 2010/05/10
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:23:33
EUT: REMOTE CONTROL	Engineer Signature: Joe
Mode: TX	Distance: 3m
Model: FAN-35T2	
Manufacturer: Chien Wei	

Note: Sample No.:101046 Report No.:ATE20100946

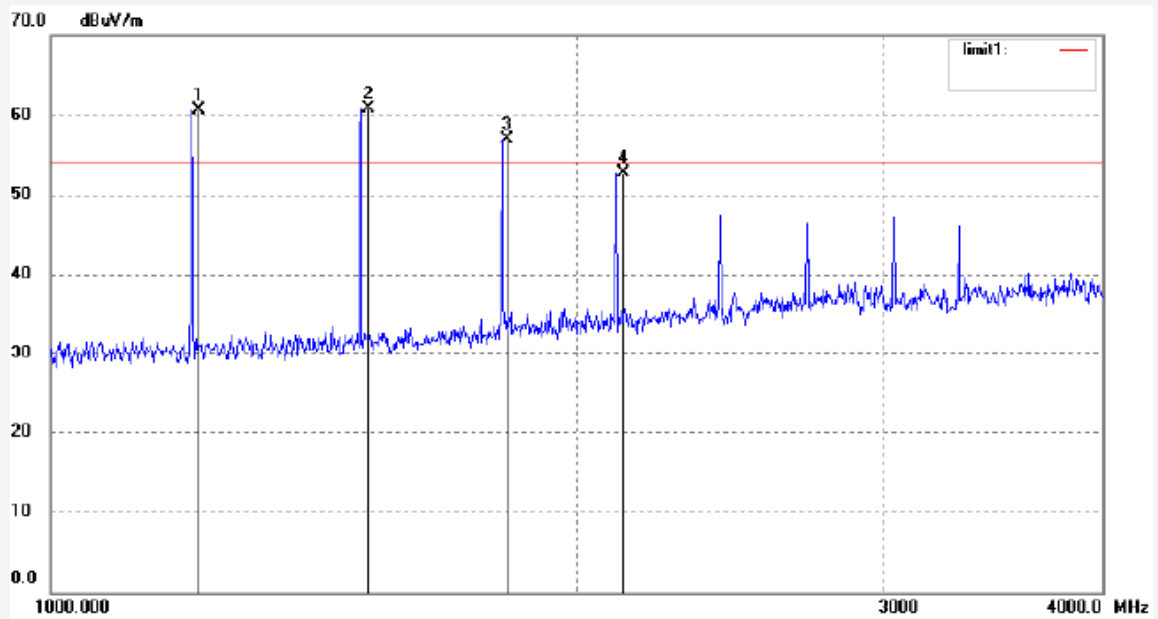

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1214.788	73.11	-12.44	60.67	74.00	-13.33	peak			
2	1518.486	72.10	-11.31	60.79	74.00	-13.21	peak			
3	1822.182	66.74	-9.82	56.92	74.90	-17.98	peak			
4	2125.878	61.17	-8.47	52.70	74.90	-22.20	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4800  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: REMOTE CONTROL  
Mode: TX  
Model: FAN-35T2  
Manufacturer: Chien Wei

Polarization: Vertical  
Power Source: DC 12V  
Date: 2010/05/10  
Time: 16:19:24  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:101046 Report No.:ATE20100946

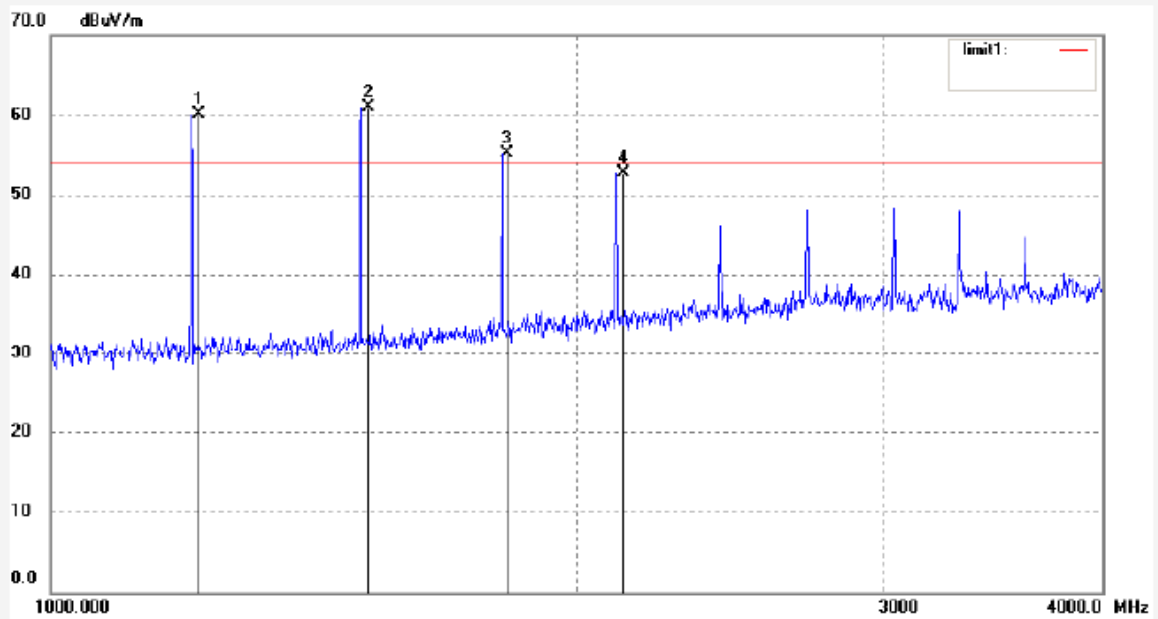

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1214.788	72.62	-12.44	60.18	74.00	-13.82	peak			
2	1518.486	72.28	-11.31	60.97	74.00	-13.03	peak			
3	1822.182	65.12	-9.82	55.30	74.90	-19.60	peak			
4	2125.878	61.21	-8.47	52.74	74.90	-22.16	peak			




\*RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz         77.77 dBμV  
SWT 10 ms         303.690000000 MHz

Ref 87 dBμV

Att 10 dB

1 PK  
MAXH

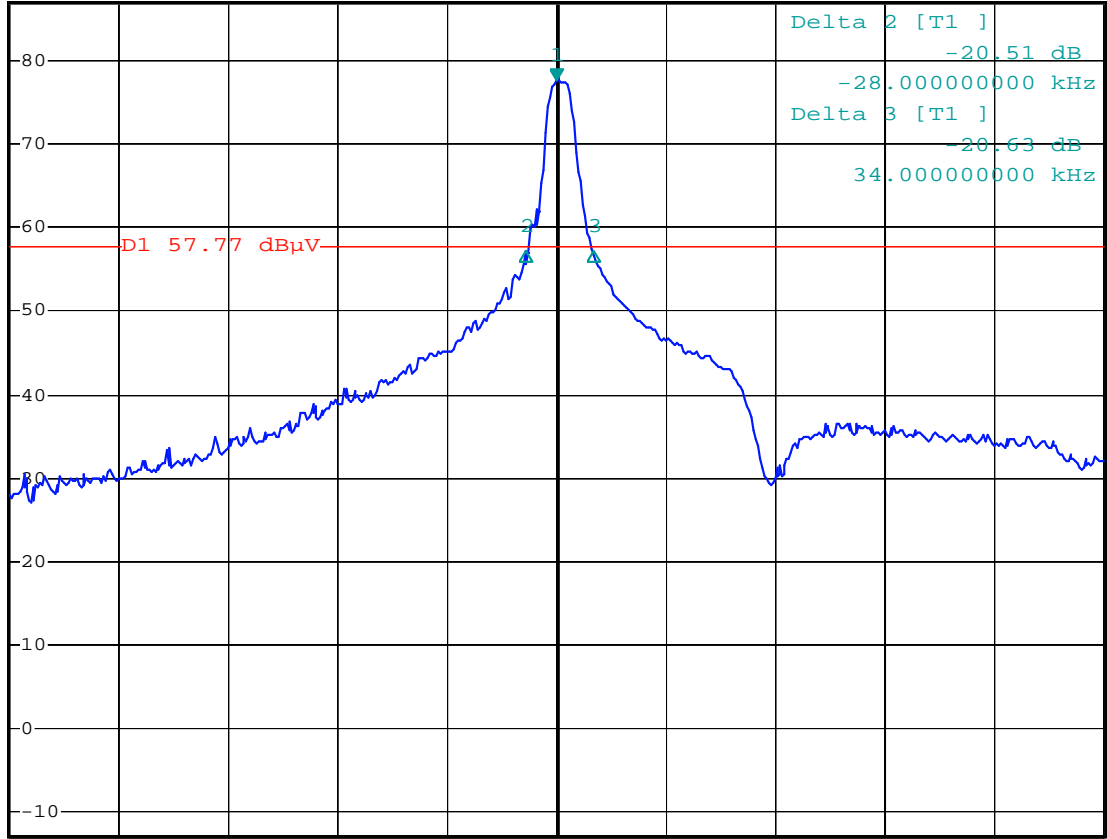

Center 303.69 MHz


100 kHz/

Span 1 MHz

Date: 12.MAY.2010 09:20:46




Ref 87 dBμV Att 10 dB RBW 100 kHz Delta 2 [T1 ]  
SWT 5 s VEW 300 kHz -0.13 dB  
690.000000 ms

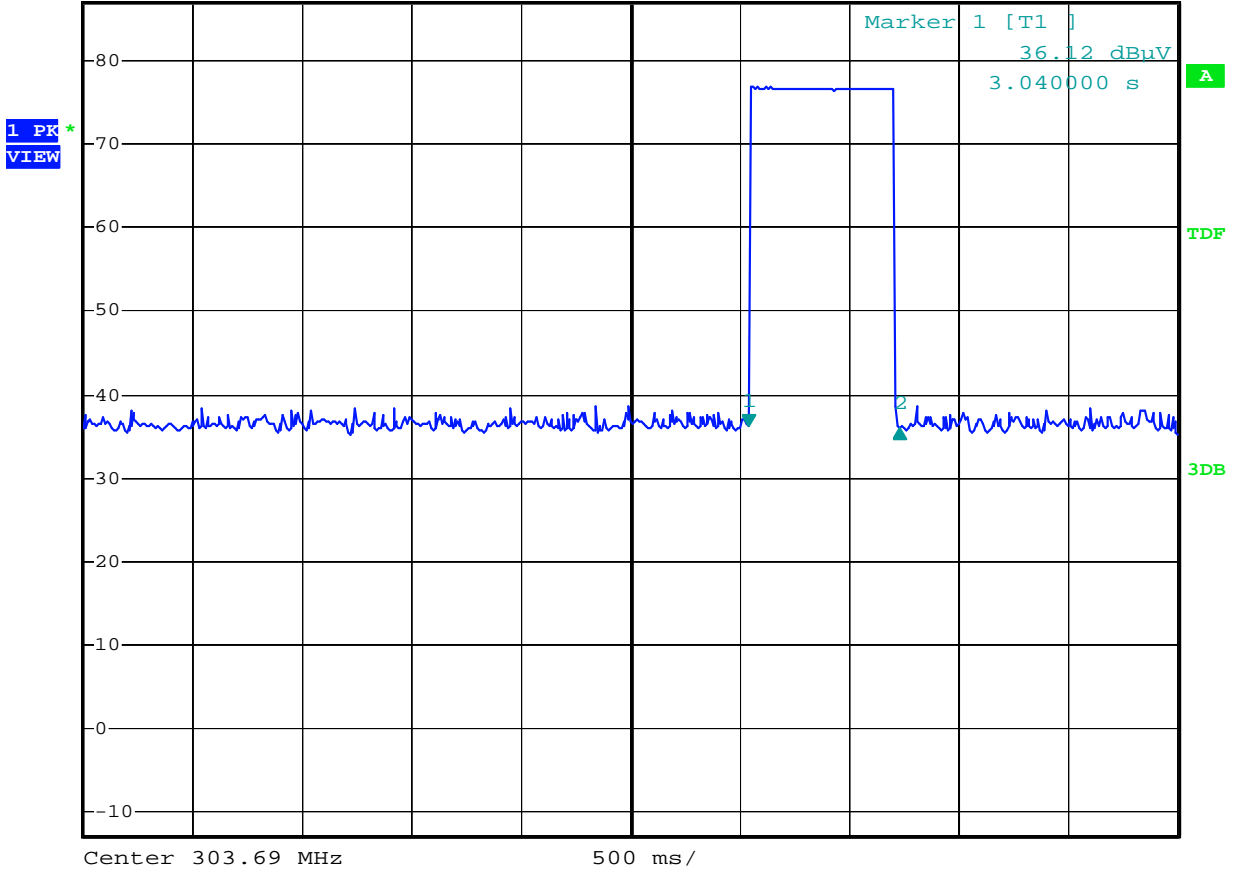

Date: 12.MAY.2010 09:28:51



Ref 87 dBμV Att 10 dB RBW 100 kHz Delta 2 [T1 ]  
VEW 300 kHz -42.15 dB  
SWT 100 ms 20.600000 ms

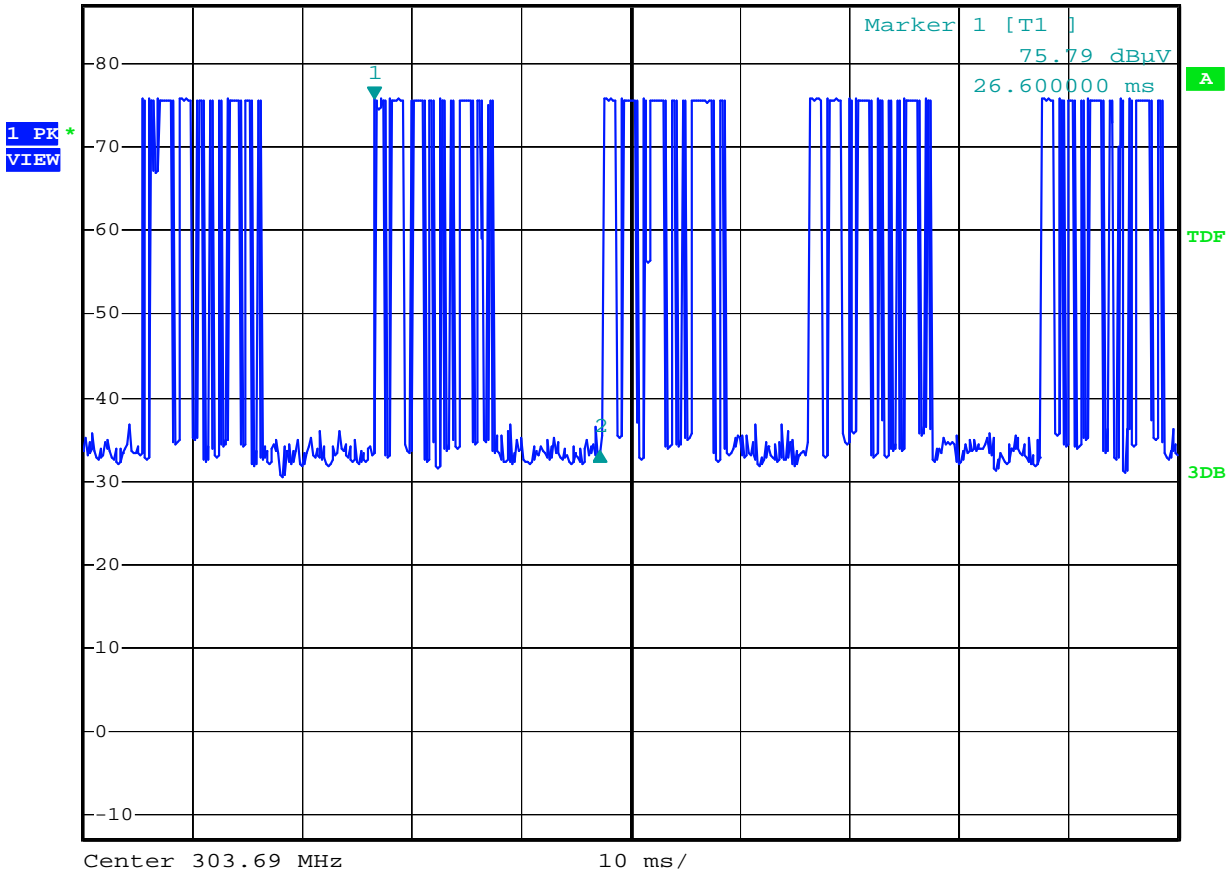


Date: 12.MAY.2010 09:31:54

The graph shows the pattern of coding during the signal transmission.  
The duration of one cycle = 20.6ms.



Ref 87 dB $\mu$ V      Att 10 dB      RBW 100 kHz  
VEW 300 kHz  
SWT 20 ms

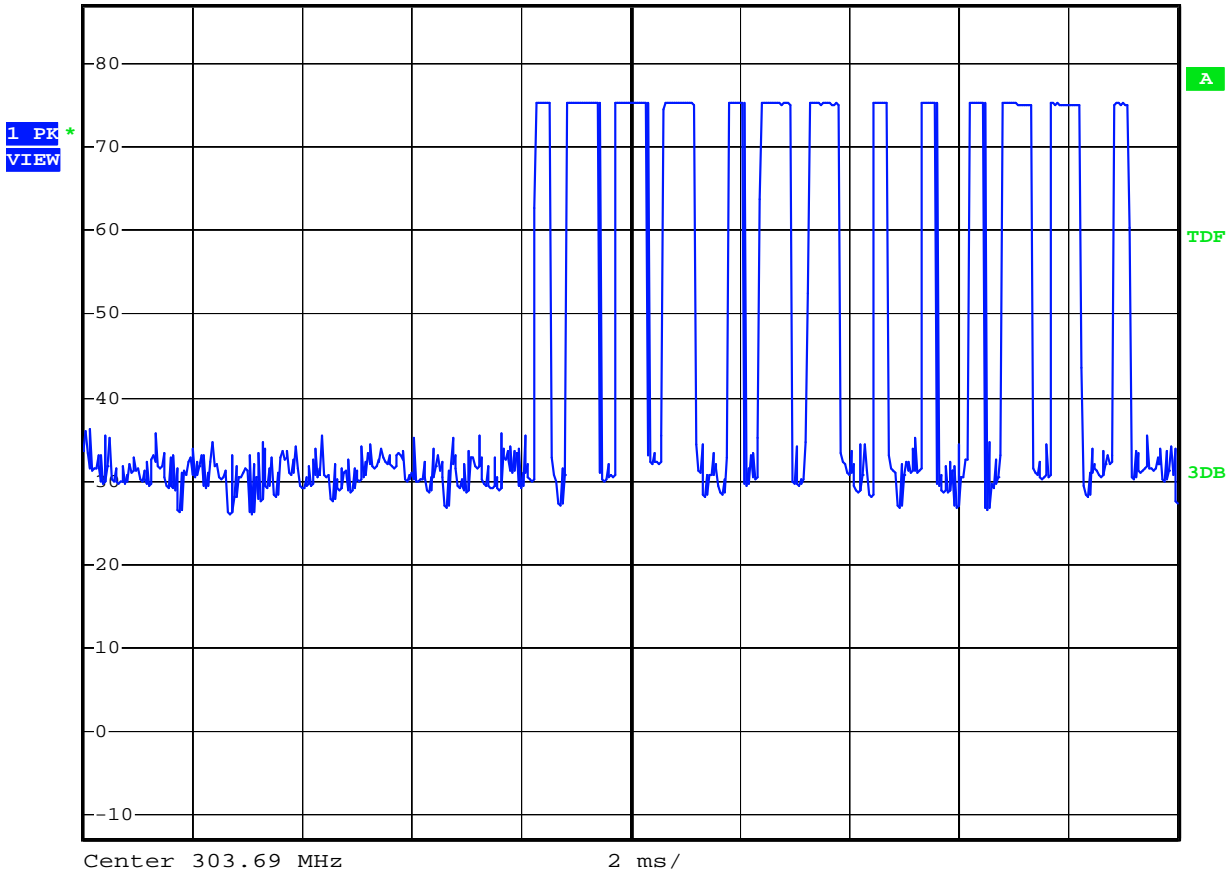


Date: 12.MAY.2010 09:34:40

The graph shows the pattern of coding during the signal transmission.  
It sums of 7 long 'on' signals and 6 short 'on' signals.



Ref 87 dB $\mu$ V Att 10 dB RBW 100 kHz Delta 2 [T1 ]  
VEW 300 kHz 1.86 dB  
SWT 5 ms 610.000000  $\mu$ s

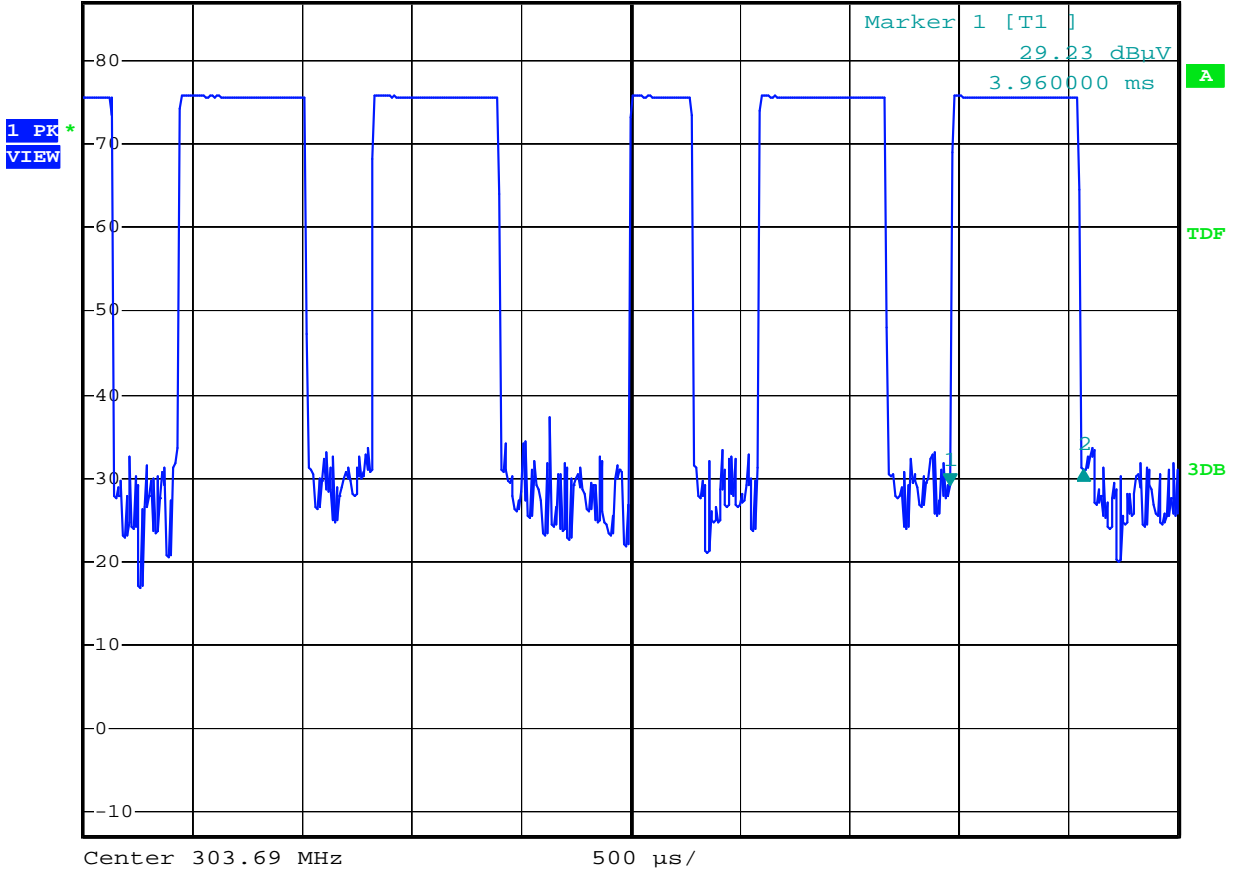


Date: 12.MAY.2010 09:37:33

The graph shows the duration of long 'on' signal. From marker 1 to marker 2, duration is 0.61ms.



Ref 87 dBμV Att 10 dB RBW 100 kHz Delta 2 [T1 ]  
VEW 300 kHz -0.96 dB  
SWT 5 ms 320.000000 μs

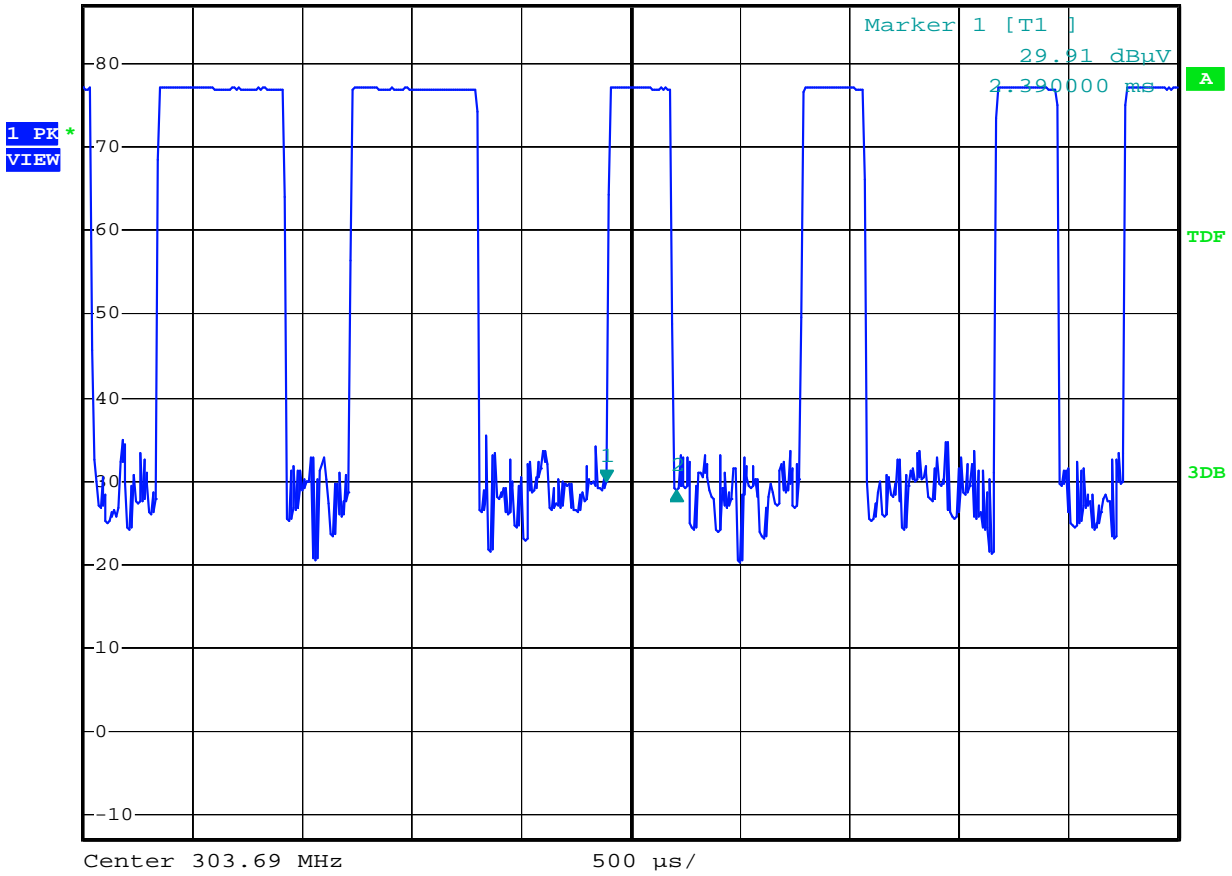

Date: 12.MAY.2010 09:39:37

The graph shows the duration of short 'on' signal. From marker 1 to marker 2, duration is 0.32ms.