FCC DFS Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15.407
&
Industry Canada (IC), RSS-210



A division of Research In Motion Limited

REPORT NO.: RTS-6012-1211-36

PRODUCT MODEL NO.: RFH121LW

TYPE NAME: BlackBerry[®] smartphone

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

DATE: November 26, 2012

RTS is accredited according to EN ISO/IEC 17025 by:



592

建料	Testing Services™
	Services [™]

Test Report No. RTS-6012-1211-36

Date of Test November 19 - 21, 2012

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Statement of Performance:

The BlackBerry[®] smartphone, model RFH121LW, part number CER-52836-001 Rev 2 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

<u>Documented by:</u>	Reviewed by:
Heng Lin	Feras Obeid
Regulatory Compliance Specialist	Regulatory Compliance Associate
Reviewed and Approved by:	
Masud S. Attayi, P.Eng. Manager, Regulatory Compliance	
managor, ragalatory compilario	

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012 Page 2 of 11



Test Report No. RTS-6012-1211-36

Date of Test November 19 - 21, 2012

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Table of Contents

A.	Scope	4
В.	Associated Documents	4
C.	Product Identification	4
D.	Support Equipment Used for the Testing of the EUT	5
E.	Test Results Chart – FCC Part 15, Client Device	6
F.	Summary of Result	6
G.	Compliance Test Equipment Used	6
APP	ENDIX 1 - DFS TEST PLOTS and DATA	7

Copyright 2005-2012 Page 3 of 11



Test Report No. RTS-6012-1211-36

Date of Test November 19 - 21, 2012

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Page 4 of 11

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15.407, October, 2011
- Industry Canada, RSS-210, Issue 8, December 2010, Licence-exempt Radio Apparatus

B. Associated Documents

None

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at: 295 Phillip Street

Waterloo, Ontario

Canada, N2L 3W8

Phone: 519 888 7465 Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services 440 Phillip Street Waterloo, Ontario Canada, N2L 5R9

Phone: 519 888 7465 Fax: 519 888 6906

Copyright 2005-2012

The testing was performed on November 19 - 21, 2012.

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

DFS	Test	Report	for the	BlackBerry	[®] smartphone	Model	RFH121I W
$\mathcal{L}_{\mathcal{L}}$	1031	ιτοροιτ	TOT LITE	DIGCKDCITY	Jillai tpiloilo	MOGCI	11112121

Test Report No. RTS-6012-1211-36 **Date of Test** November 19 - 21, 2012

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Page 5 of 11

BlackBerry® smartphone Samples Tested

SAMPLE	MODEL	CER NUMBER	PIN	SOFTWARE
1	RFH121LW	CER-52836-001 Rev 2	25B217A6	10.0.9.785

DFS testing was performed on sample 1.

The manufacturer declared modes for the EUT operational characteristics that affect DFS are as follows:

Operatin	Operating Modes (5250 -5350 MHz, 5470-5725MHz)					
	Master Device					
\boxtimes	Client Device (no In-Service Monitoring, no Ad – Hoc mode)					
	Client Device with In-Service Monitoring					
Channel	Protocol IP Based Frame Based Other					

D. Support Equipment Used for the Testing of the EUT

Manufacturer	Description	Model	Serial Number	FCC ID and IC
Cisco	Access Point	AIR-RM1252G-A-K9	FCW1336Z03R	LDK102061/2
				2461B-102061/2
Lenovo	Laptop	8742-C2U	L3-B3615 07/06	MCLJ07H081
				2878D-J07H081
D-Link	Router	WBR-1310	P10317B010096	KA2WBR1310
				4216A-WBR1310

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012



Test Report No. RTS-6012-1211-36

Date of Test November 19 - 21, 2012

FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

E. Test Results Chart - FCC Part 15, Client Device

SPECIF	FICATION	TEST TYPE	Meets	Test Data
FCC CFR 47	IC	IESTITE	Requirement	APPENDIX
Part 15.407	RSS-210, A9.3	Channel closing transmission time	Yes	1
Part 15.407	RSS-210, A9.3	Channel move time	Yes	1
Part 15.407	RSS-210, A9.3	Non-occupancy period - associated	Yes	1

F. Summary of Result

a). The BlackBerry[®] smartphone met the requirement of the Channel Closing Transmission and Time, Channel Move time and Non-occupancy period requirement as per FCC 15.407 and RSS 210. The measurement was performed on Channel 56 (5280 MHz) of the DFS band. Radar Type 1 of the Short Pulse Test waveform was used for tests.

See APPENDIX 1 for the test data.

Measurement Uncertainties:

Measurement	Measurement	Expanded
	Unit	Uncertainty
DFS Threshold (Conducted)	dBm	1.2

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	MODEL	<u>SERIAL</u> <u>NUMBER</u>	CAL DUE DATE (YY MM DD)	<u>USE</u>
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	12-12-03	DFS
DFS RF Modulator	National Instruments	PXIe-5611	EC157C	12-12-11	DFS
DFS I/Q Signal Generator	National Instruments	PXIe-5450	EC6BB1	12-12-11	DFS
DFS RF Signal Generator	National Instruments	PXIe-5620	ED2167	12-12-11	DFS
T/RH Meter	OMEGA	iTHX-SD	0380564	13-10-30	DFS

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012 Page 6 of 11

Para Testing Services™	DFS Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1		
Test Report No. RTS-6012-1211-36	Date of Test November 19 - 21, 2012	FCC ID: L6ARFH120LW	IC: 2503A-RFH120LW

APPENDIX 1 - DFS TEST PLOTS and DATA


Copyright 2005-2012 Page 7 of 11

Testing Services™	DFS Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1		
Test Report No. RTS-6012-1211-36	Date of Test November 19 - 21, 2012	FCC ID: L6ARFH120LW	IC: 2503A-RFH120LW

DFS Conducted Test Results

DFS Test Methods

Conducted Test Method

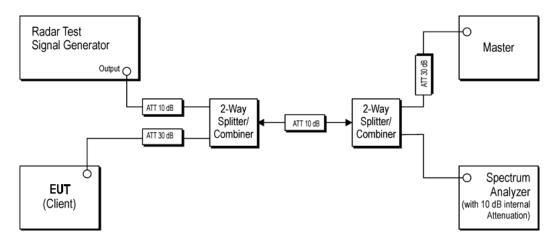

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the Channel Closing Transimission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel Move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012 Page 8 of 11

Testing Services™	DFS Test Report for the BlackBerry [®] smartphone Model RFH121LW APPENDIX 1				
Test Report No. RTS-6012-1211-36	Date of Test November 19 - 21, 2012	FCC ID: L6ARFH120LW	IC: 2503A-RFH120LW		

DFS Conducted Test Results Cont'd

Radar Waveforms

FCC Short Pulse Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Detection Percentage	Minimum Number of Trials		
1	1	1428	18	60%	30		
2	1-5	150-230	23-29	60%	30		
3	6-10	200-500	16-18	60%	30		
4	11-20	200-500	12-16	60%	30		
Aggregate	(Radar Types	80%	120				

FCC Long Pulse Radar Test Waveforms							
Radar	Pulse	Chirp	PRI	Number of	Number	Minimum	Minimum
Type	Width	Width	(µs)	Pulses per	of	Detection	Number
Турс	(µsec)	(MHz)	(μ3)	Burst	Bursts	Percentage	of Trials
5	50-100	5-20	1000- 2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012 Page 9 of 11

Testing Services™	DFS Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1				
Test Report No. RTS-6012-1211-36	Date of Test November 19 - 21, 2012	FCC ID: L6ARFH120LW	IC: 2503A-RFH120LW		

DFS Conducted Test Results Cont'd

The following tests were performed by Heng Lin


Date of the test: November 19 - 21, 2012

The environmental conditions were: Temperature: 24.2 – 24.5 °C

Humidity: 25.2 – 25.8 %

Wave form Type	Channel Closing Transmission Time		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 1	34.78 ms	260 ms	0.283 s	10 s	PASS

Channel Closing Transmission Time

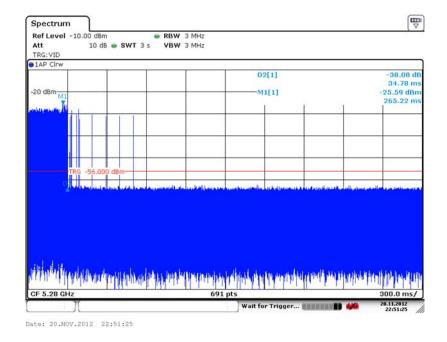

Copyright 2005-2012 Page 10 of 11

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.


Test Report No.
RTS-6012-1211-36

DFS Test Report for the BlackBerry® smartphone Model RFH121LW
APPENDIX 1


FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

DFS Conducted Test Results Cont'd

Channel Move Time

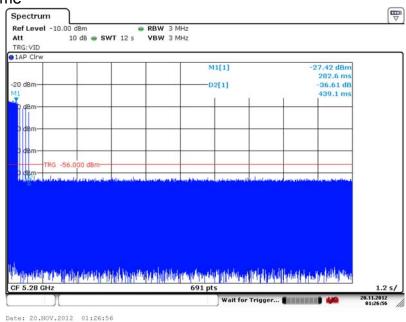

Non-Occupancy Period ≥ 30 min.

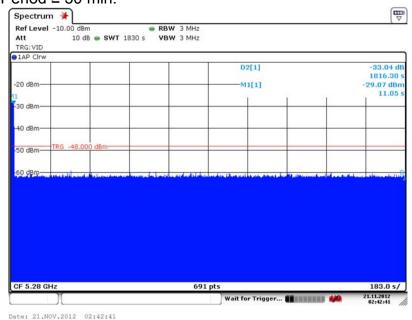

This report shall <u>NOT</u> be reproduced except in full without the written consent of RIM Testing Services - A division of Research in Motion Limited.

Copyright 2005-2012 Page 11 of 11