



FCC RF Test Report

APPLICANT : BlackBerry Limited
EQUIPMENT : Smartphone
BRAND NAME : BlackBerry
MODEL NAME : RHF141LW
MARKETING NAME : SQC100-3
FCC ID : L6ARHF140LW
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 15, 2014 and testing was completed on Oct. 29, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-328-4978
FCC ID : L6ARHF140LW

Page Number : 1 of 17
Report Issued Date : Nov. 24, 2014
Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification subjective to this standard 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode 7

 2.3 Connection Diagram of Test System..... 8

 2.4 Support Unit used in test configuration and system 8

3 TEST RESULT..... 9

 3.1 AC Conducted Emission Measurement..... 9

 3.2 Antenna Requirements 15

4 LIST OF MEASURING EQUIPMENT 16

5 UNCERTAINTY OF EVALUATION 17

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR471526C	Rev. 01	Initial issue of report	Nov. 24, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	≥ 0.5MHz	Pass	Please refer to Sporton Report No. : FR471420C
-	15.247(b)	RSS-210 A8.4	Power Output Measurement	≤ 30dBm	Pass	Please refer to Sporton Report No. : FR471420C
-	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	≤ 8dBm/3kHz	Pass	Please refer to Sporton Report No. : FR471420C
-	15.247(d)	RSS-210 A8.5	Conducted Band Edges	≤ 20dBc	Pass	Please refer to Sporton Report No. : FR471420C
-			Conducted Spurious Emission		Pass	Please refer to Sporton Report No. : FR471420C
-	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Please refer to Sporton Report No. : FR471420C
3.1	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 1.90 dB at 1.246 MHz
3.2	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

BlackBerry Limited
2300 University Street East, Waterloo, ON., CAN, N2K1A0

1.2 Manufacturer

FIH Mobile Limited
No.4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	BlackBerry
Model Name	RHF141LW
Marketing Name	SQC100-3
IMEI	990004609808484 004402242681074
FCC ID	L6ARHF140LW
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/CDMA/LTE/NFC WLAN 11b/g/n (HT20) WLAN 11a/n (HT20/HT40) Bluetooth v4.0 EDR/LE
HW Version	PVT 2
SW Version	10.3.1.1031 Radio 1032 /SR 10.3.1.663
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Antenna Type	PIFA Antenna type with gain -2.08 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	CO05-HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- KDB 648474 D03 Handset Wireless Chargers Battery Covers v01r02
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz).

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases	
AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN(2.4GHz) Link + GPS Rx + Earphone 1 + Charging from PMA

Remark:

All modes, data rates, and positions of Radiation spurious emission were investigated, and found that EUT without the wireless power charger as the worst case test configuration.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

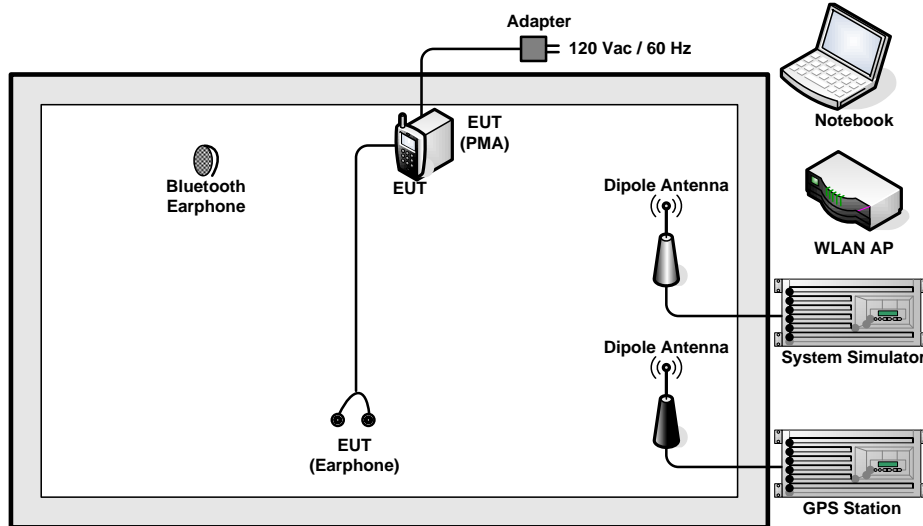

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



3 Test Result

3.1 AC Conducted Emission Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.1.4 Test Setup

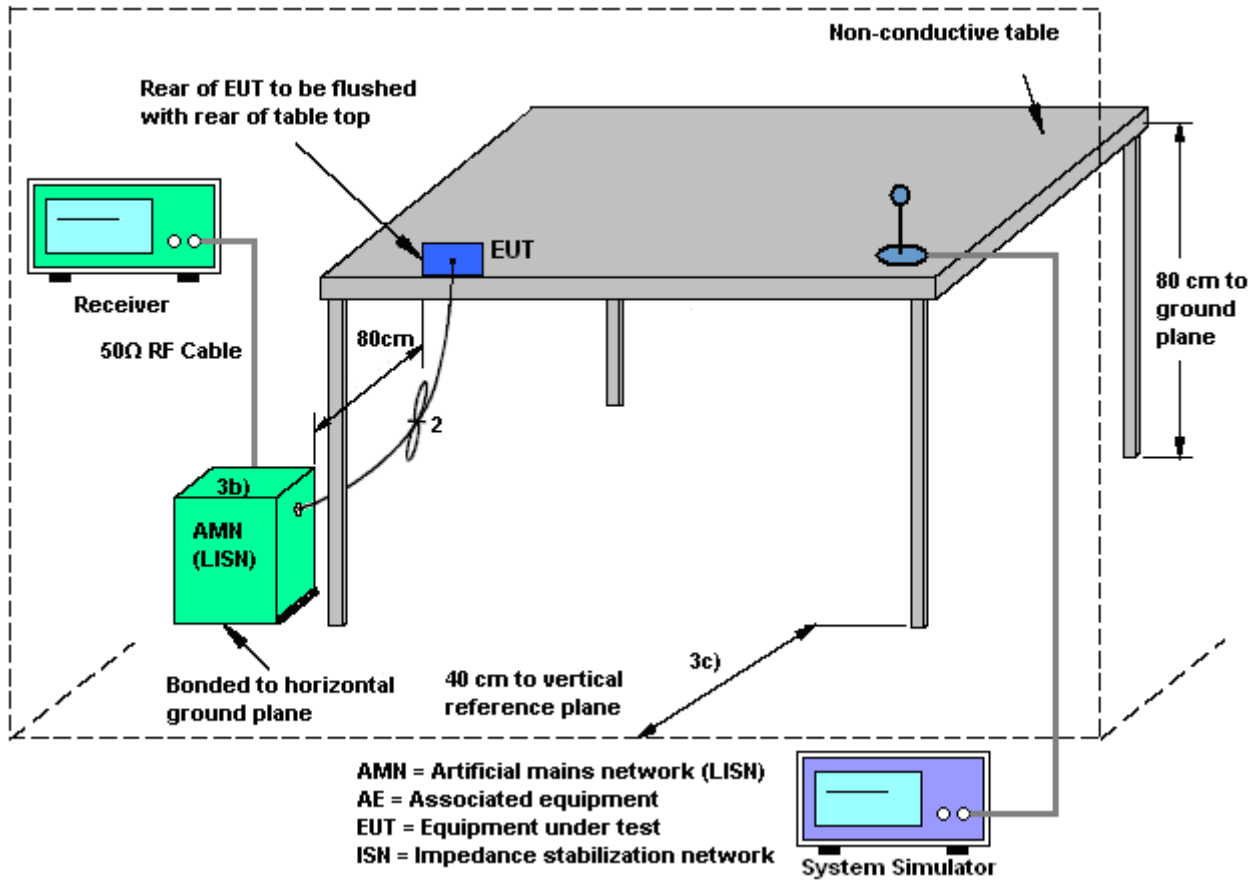



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN(2.4GHz) Link + GPS Rx + Earphone 1 + Charging from PMA		

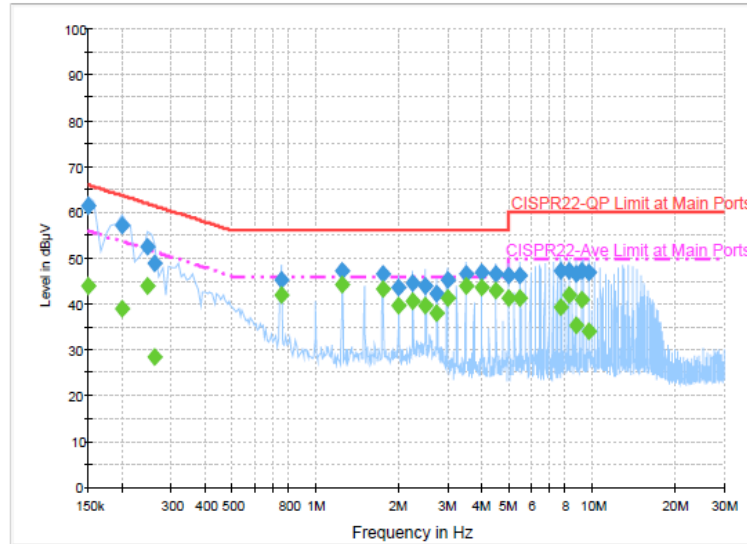


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	61.5	Off	L1	19.4	4.5	66.0
0.198000	57.1	Off	L1	19.5	6.6	63.7
0.246000	52.5	Off	L1	19.5	9.4	61.9
0.262000	48.7	Off	L1	19.5	12.7	61.4
0.750000	45.3	Off	L1	19.5	10.7	56.0
1.246000	47.3	Off	L1	19.5	8.7	56.0
1.742000	46.7	Off	L1	19.5	9.3	56.0
1.990000	43.7	Off	L1	19.5	12.3	56.0
2.238000	44.5	Off	L1	19.4	11.5	56.0
2.486000	43.8	Off	L1	19.5	12.2	56.0
2.742000	42.4	Off	L1	19.5	13.6	56.0
2.990000	45.1	Off	L1	19.6	10.9	56.0
3.486000	46.7	Off	L1	19.6	9.3	56.0
3.982000	46.9	Off	L1	19.6	9.1	56.0
4.478000	46.4	Off	L1	19.6	9.6	56.0
4.982000	46.4	Off	L1	19.6	9.6	56.0
5.478000	46.3	Off	L1	19.6	13.7	60.0
7.718000	47.1	Off	L1	19.7	12.9	60.0
8.214000	47.1	Off	L1	19.7	12.9	60.0
8.718000	46.4	Off	L1	19.7	13.6	60.0
9.206000	47.1	Off	L1	19.7	12.9	60.0
9.702000	46.8	Off	L1	19.7	13.2	60.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN(2.4GHz) Link + GPS Rx + Earphone 1 + Charging from PMA		

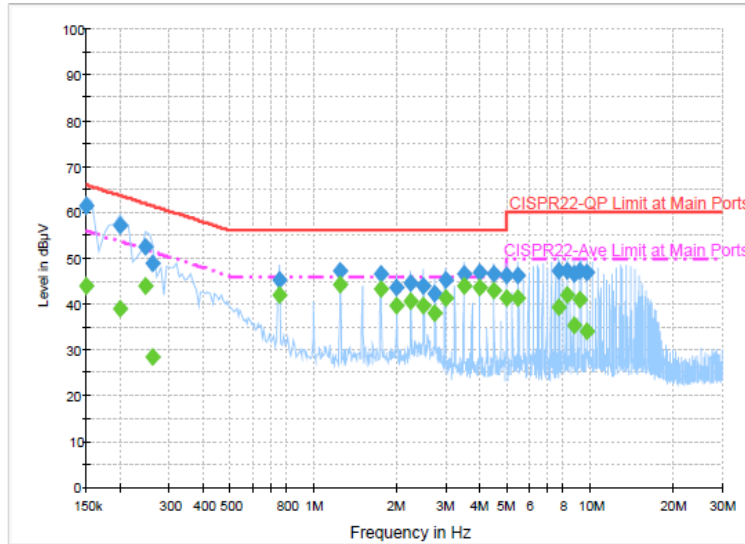


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.9	Off	L1	19.4	12.1	56.0
0.198000	39.0	Off	L1	19.5	14.7	53.7
0.246000	43.7	Off	L1	19.5	8.2	51.9
0.262000	28.3	Off	L1	19.5	23.1	51.4
0.750000	42.1	Off	L1	19.5	3.9	46.0
1.246000	44.1	Off	L1	19.5	1.9	46.0
1.742000	43.1	Off	L1	19.5	2.9	46.0
1.990000	39.8	Off	L1	19.5	6.2	46.0
2.238000	40.6	Off	L1	19.4	5.4	46.0
2.486000	39.5	Off	L1	19.5	6.5	46.0
2.742000	37.9	Off	L1	19.5	8.1	46.0
2.990000	41.2	Off	L1	19.6	4.8	46.0
3.486000	43.7	Off	L1	19.6	2.3	46.0
3.982000	43.5	Off	L1	19.6	2.5	46.0
4.478000	43.0	Off	L1	19.6	3.0	46.0
4.982000	41.3	Off	L1	19.6	4.7	46.0
5.478000	41.4	Off	L1	19.6	8.6	50.0
7.718000	39.3	Off	L1	19.7	10.7	50.0
8.214000	41.8	Off	L1	19.7	8.2	50.0
8.718000	35.3	Off	L1	19.7	14.7	50.0
9.206000	41.0	Off	L1	19.7	9.0	50.0
9.702000	33.9	Off	L1	19.7	16.1	50.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN(2.4GHz) Link + GPS Rx + Earphone 1 + Charging from PMA		

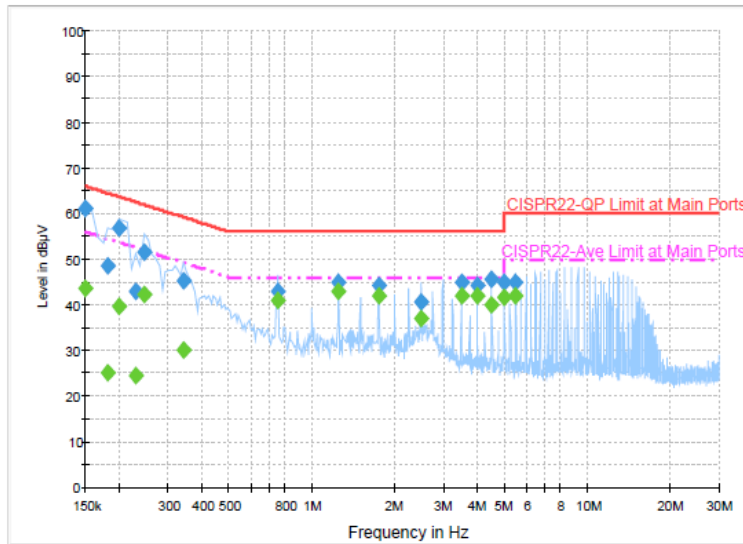


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	61.0	Off	N	19.5	5.0	66.0
0.182000	48.6	Off	N	19.5	15.8	64.4
0.198000	56.7	Off	N	19.5	7.0	63.7
0.230000	43.0	Off	N	19.5	19.4	62.4
0.246000	51.6	Off	N	19.5	10.3	61.9
0.342000	45.3	Off	N	19.5	13.9	59.2
0.750000	43.0	Off	N	19.5	13.0	56.0
1.246000	44.9	Off	N	19.5	11.1	56.0
1.742000	44.2	Off	N	19.5	11.8	56.0
2.494000	40.7	Off	N	19.5	15.3	56.0
3.486000	44.9	Off	N	19.6	11.1	56.0
3.990000	44.2	Off	N	19.6	11.8	56.0
4.486000	45.5	Off	N	19.6	10.5	56.0
4.982000	44.9	Off	N	19.6	11.1	56.0
5.478000	45.0	Off	N	19.6	15.0	60.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN(2.4GHz) Link + GPS Rx + Earphone 1 + Charging from PMA		

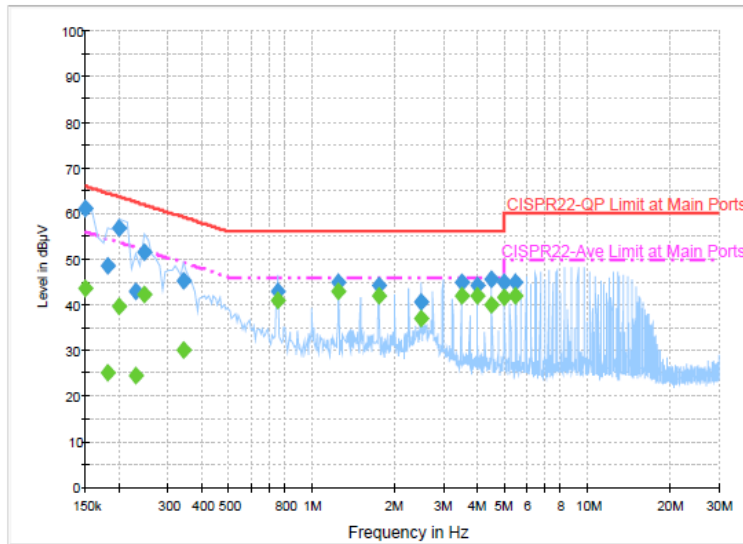

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.6	Off	N	19.5	12.4	56.0
0.182000	25.2	Off	N	19.5	29.2	54.4
0.198000	39.5	Off	N	19.5	14.2	53.7
0.230000	24.4	Off	N	19.5	28.0	52.4
0.246000	42.2	Off	N	19.5	9.7	51.9
0.342000	29.9	Off	N	19.5	19.3	49.2
0.750000	41.0	Off	N	19.5	5.0	46.0
1.246000	42.9	Off	N	19.5	3.1	46.0
1.742000	42.0	Off	N	19.5	4.0	46.0
2.494000	37.0	Off	N	19.5	9.0	46.0
3.486000	41.9	Off	N	19.6	4.1	46.0
3.990000	42.0	Off	N	19.6	4.0	46.0
4.486000	40.0	Off	N	19.6	6.0	46.0
4.982000	41.7	Off	N	19.6	4.3	46.0
5.478000	41.8	Off	N	19.6	8.2	50.0



3.2 Antenna Requirements

3.2.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Oct. 29, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Oct. 29, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Oct. 29, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 29, 2014	N/A	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------