

# FCC Test Report

**FCC Rule(s):** FCC Part 15.247

**Applicant:** Koss Corporation

**Product Name:** Bluetooth Headset

**Model:** BT190i

**FCC ID:** L76-BT190I

**Report No.:** ZKS161000134E

**Tested Date:** 2016-11-01 to 2016-11-18

**Issued Date:** 2016-11-28

**Tested By :** William Liu (Engineer)

**Approved By:** Lahm Peng (Manager)

**Prepared By:**

*William Liu*  
*Lahm Peng*

**Shenzhen ZRLK Testing Technology Co., Ltd.**

6F, Fuxinfa Industrial Park, Liuxiandong, Xili Street, Nanshan District, Shenzhen, China

Tel.: +86-755-29305110 Fax.: +86-755-36602376 Website: [www.zrklab.com](http://www.zrklab.com)

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen ZRLK Testing Technology Co., Ltd.

## CONTENTS

<b>1. General Information</b> .....	<b>3</b>
1.1 Product Information .....	3
1.2 Compliance Standards .....	4
1.3 Test Facilities .....	4
1.4 Test Setup Information .....	5
1.5 Measurement Uncertainty .....	6
1.6 List of Test and Measurement Instruments .....	6
<b>2. Summary of Test Results</b> .....	<b>7</b>
<b>3. RF Exposure</b> .....	<b>8</b>
3.1 Standard and Limit .....	8
3.2 Test Result .....	8
<b>4. Antenna Requirement</b> .....	<b>9</b>
4.1 Standard and Limit .....	9
4.2 Test Result .....	9
<b>5. Frequency Hopping System Requirements</b> .....	<b>10</b>
5.1 Standard and Limit .....	10
5.2 Frequency Hopping System .....	10
5.3 EUT Pseudorandom Frequency Hopping Sequence .....	11
<b>6. Quantity of Hopping Channels and Channel Separation</b> .....	<b>12</b>
6.1 Standard and Limit .....	12
6.2 Test Procedure .....	12
6.3 Test Data and Results .....	12
<b>7. Dwell Time of Hopping Channel</b> .....	<b>17</b>
7.1 Standard and Limit .....	17
7.2 Test Procedure .....	17
7.3 Test Data and Results .....	17
<b>8. 20dB Bandwidth</b> .....	<b>28</b>
8.1 Standard and Limit .....	28
8.2 Test Procedure .....	28
8.3 Test Data and Results .....	28
<b>9. RF Output Power</b> .....	<b>32</b>
9.1 Standard and Limit .....	32
9.2 Test Procedure .....	32
9.3 Test Data and Results .....	32
<b>10. Field Strength of Spurious Emissions</b> .....	<b>33</b>
10.1 Standard and Limit .....	33
10.2 Test Procedure .....	33
10.3 Test Data and Results .....	35
<b>11. Out of Band Emissions</b> .....	<b>39</b>
11.1 Standard and Limit .....	39
11.2 Test Procedure .....	39
11.3 Test Data and Results .....	40
<b>12. Conducted Emissions</b> .....	<b>43</b>
12.1 Standard and Limit .....	43
12.2 Test Procedure .....	43
12.3 Test Data and Results .....	43
<b>Annex A. EUT External Photos</b> .....	<b>46</b>
<b>Annex B. EUT Internal Photos</b> .....	<b>49</b>
<b>Annex C. Test Photos</b> .....	<b>52</b>
<b>Annex D. Label and Information</b> .....	<b>54</b>

## 1. General Information

### 1.1 Product Information

Applicant and Manufacturer	
Applicant:	Koss Coporation
Address of Applicant:	4129 North Port Washington Road Milwaukee WISCONSIN
	53212 United States
Manufacturer:	Dongguan Baizhenrong Limited
Address of Manufacturer:	3Xin Yuan Street, Ju-zhou No.2 Industrial Zone, Shijie Town,
	Dongguan, Guangdong Province, P.R.C

General Description of EUT	
Product Name:	Bluetooth Headset
Model No.:	BT190i
Trade Name:	KOSS
Adding Model(s):	--
Class of Equipment:	DSS
Rated Voltage:	DC 3.7V by battery
Hardware Version:	V1.0
Software Version:	V1.0
Frequency Range:	2402-2480MHz
Bluetooth Version:	V4.1 (BR+EDR)
Modulation:	GFSK, Pi/4 DQPSK, 8DPSK
Type of Antenna:	PCB Antenna
Antenna Gain:	1.7 dBi
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

## 1.2 Compliance Standards

Compliance Standards or Rules	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
FCC Part 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.
The objective of the manufacturer or applicant is to demonstrate compliance with the above standards.	
According to standards for test methodology	
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices Accredited Standards Committee C63®—Electromagnetic Compatibility
All measurements contained in this report were conducted with all above standards	
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

## 1.3 Test Facilities

<b>Testing Lab: Global United Technology Services Co., Ltd.</b>
The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is <b>L5775</b> .
The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are <b>600491</b> .
The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are <b>9079A-2</b> .
All measurement facilities used to collect the measurement data are located at No.301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

## 1.4 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Low Channel	2402MHz	
TM2	Middle Channel	2441MHz	
TM3	High Channel	2480MHz	
TM4	Hopping	2402-2480MHz	
TM5	Charging and Playing	Through USB Charging	
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
AC Adapter	FEREX	HK15-HASF0502000	--
Notebook	Lenovo	G405S	--
Conversion Board	IVT	Serial-USB	--
Note 1: The equipment under test (EUT) was configured to measure its highest possible emission level. Note 2: The test modes were adapted according to the operation manual for use. Note 3: The equipment under test (EUT) was tested under fully-charged battery.			

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021
Note 1: The Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case. Note 2: The Bluetooth has been tested under continuous transmission mode. Note 3: The Bluetooth is connected to notebook through a serial to USB conversion board, and to use a test set software to control the Bluetooth device work in different modes, e.g. GFSK, Pi/4 DQPSK, 8DPSK etc.			

### 1.5 Measurement Uncertainty

Parameter	Conditions	Uncertainty
Conducted Emissions	9kHz ~30MHz	± 2.79 dB
Radiated Emissions	9kHz ~ 30MHz	± 4.12 dB
	30MHz ~ 1GHz	± 4.16 dB
	1GHz ~ 18GHz	± 5.97dB
	18GHz ~ 26.5GHz	± 6.71dB

### 1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI 7	June. 29 2016	June. 28 2017
Coaxial Switch	ANRITSU CORP	MP59B	June. 29 2016	June. 28 2017
Artificial Mains Network	SCHWARZBECK	NSLK8127	June. 29 2016	June. 28 2017
ESU EMI Test Receiver	R&S	ESU26	June. 29 2016	June. 28 2017
BiConiLog Antenna	SCHWARZBECK	VULB9163	June. 29 2016	June. 28 2017
Double-ridged horn antenna	SCHWARZBECK	9120D	June. 29 2016	June. 28 2017
Horn Antenna	ETS-LINDGREN	3160-09	June. 29 2016	June. 28 2017
Loop Antenna	SCHWARZBECK	FMZB 1519	June. 29 2016	June. 28 2017
RF Amplifier	HP	8347A	June. 29 2016	June. 28 2017
Broadband Preamplifier	SCHWARZBECK	BBV9718	June. 29 2016	June. 28 2017
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	9kHz-1GHz	June. 29 2016	June. 28 2017
Coaxial Cable	GTS	1GHz-18GHz	June. 29 2016	June. 28 2017
Coaxial Cable	GTS	18GHz-40GHz	June. 29 2016	June. 28 2017
Spectrum Analyzer	Agilent	E4407B	July. 20 2016	July. 19 2017
Temporary Antenna Connector	ZRLK	SMA-01	July. 20 2016	July. 19 2017

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 2. Summary of Test Results

FCC Rules	Description of Test Items	Result
FCC Part 2.1093	RF Exposure	Passed
FCC Part 15.203, FCC Part 15.247(b)(4)(i)	Antenna Requirement	Passed
FCC Part 15.205	Restricted Band of Operation	Passed
FCC Part 15.207(a)	Conducted Emission	Passed
FCC Part 15.209(a)	Radiated Spurious Emissions	Passed
FCC Part 15.247(a)(1)(iii)	Quantity of Hopping Channel	Passed
FCC Part 15.247(a)(1)	Channel Separation	Passed
FCC Part 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Passed
FCC Part 15.247(a)	20dB Bandwidth	Passed
FCC Part 15.247(b)(1)	RF Power Output	Passed
FCC Part 15.247(d)	Band Edge (Out of Band Emissions)	Passed
FCC Part 15.247(a)(1)	Frequency Hopping Sequence	Passed
FCC Part 15.247(g), (h)	Frequency Hopping System	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

### **3. RF Exposure**

---

#### **3.1 Standard and Limit**

According to FCC Part 1.1307 and FCC Part 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, Please see the RF Exposure Report.



## **4. Antenna Requirement**

---

### **4.1 Standard and Limit**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Test Result**

This product has a permanent antenna (PCB antenna), fulfill the requirement of this section.

---

## 5. Frequency Hopping System Requirements

---

### 5.1 Standard and Limit

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 5.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with a bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements FCC Part 15.247 rule.

### **5.3 EUT Pseudorandom Frequency Hopping Sequence**

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 34, 51, 72, 09, 01, 64, 22, 33, 41, 32, 47, 65, 73, 53, 69, 06, 17, 04, 20, 36, 52, 38, 66, 70, 78, 68, 76, 21, 29, 10, 26, 49, 00, 58, 44, 59, 75, 13, 03, 14, 11, 35, 43, 37, 50, 61, 77, 55, 71, 02, 23, 07, 27, 39, 54, 46, 48, 15, 63, 62, 67, 25, 31, 12, 28, 19, 60, 42, 57, 74, 16, 05, 18, 30, 45, etc.

The system receiving have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

---

## 6. Quantity of Hopping Channels and Channel Separation

---

### 6.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 6.2 Test Procedure

According to the ANSI C63.10, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span


Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto; Detector function = peak; Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


### 6.3 Test Data and Results

No. of Channel = 79 (GFSK mode)

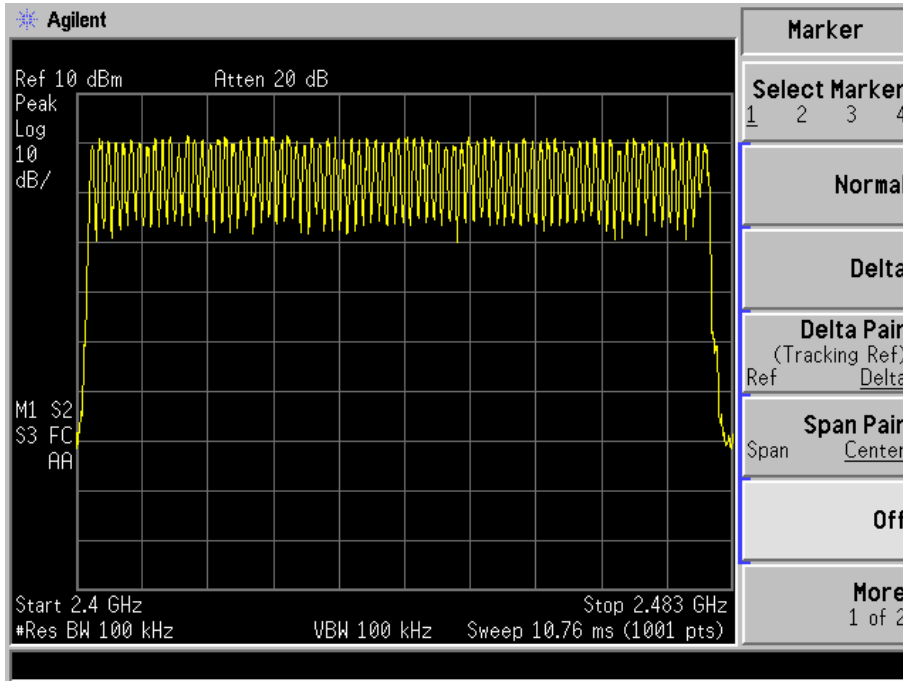


For GFSK mode


Channel Spacing (Low CH=1MHz)

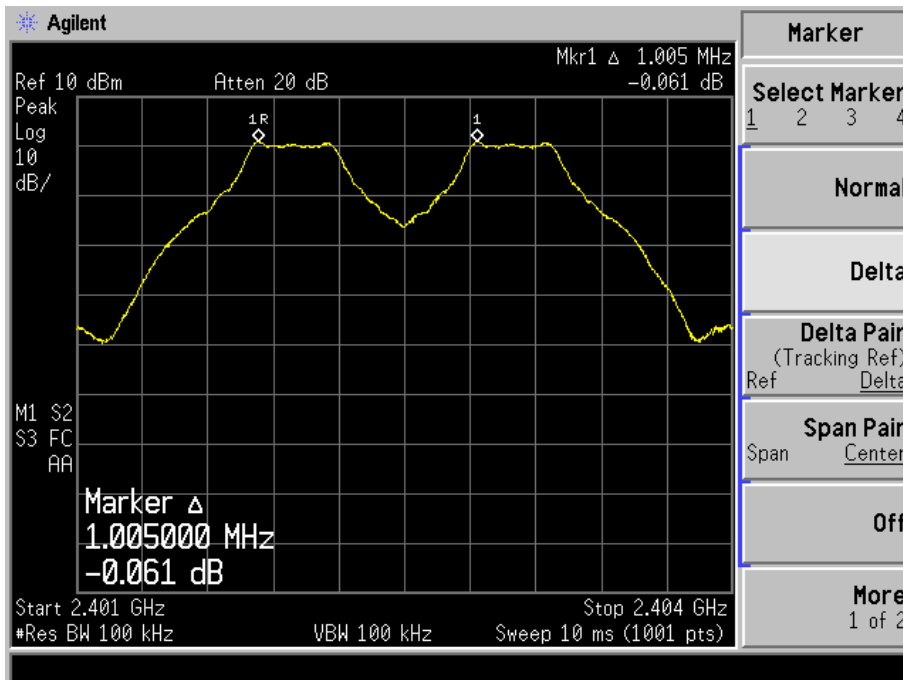

## Channel Spacing (Middle CH=1MHz)

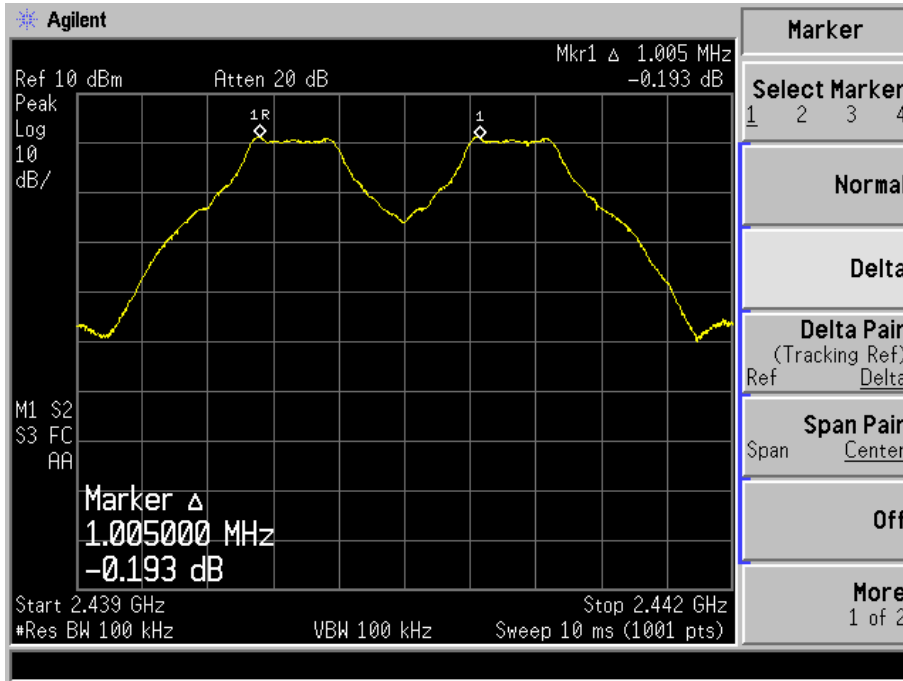


## Channel Spacing (High CH=1MHz)

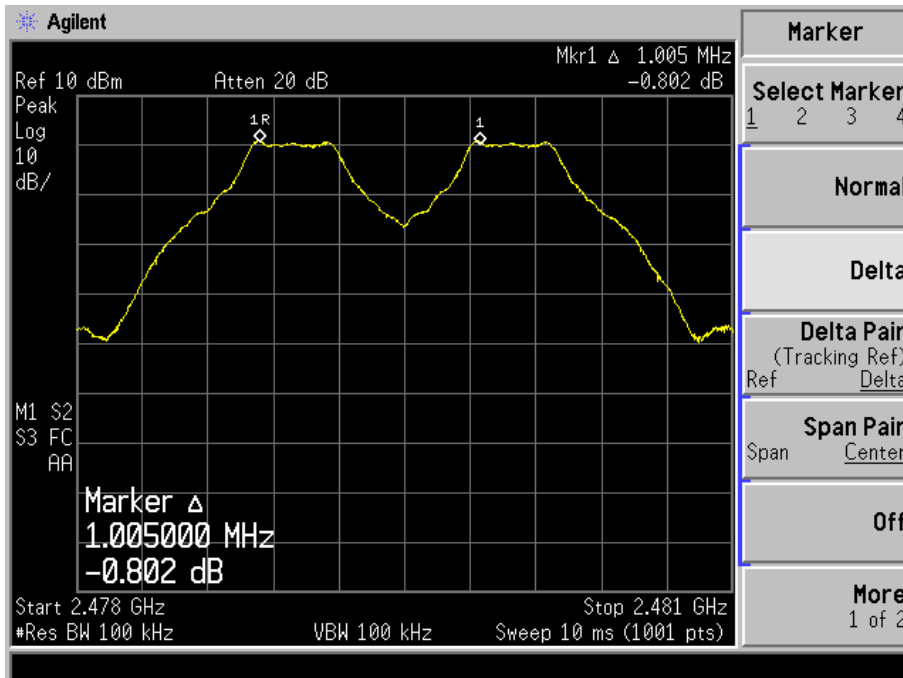


For 8DPSK mode


Channel Spacing (Low CH=1MHz)

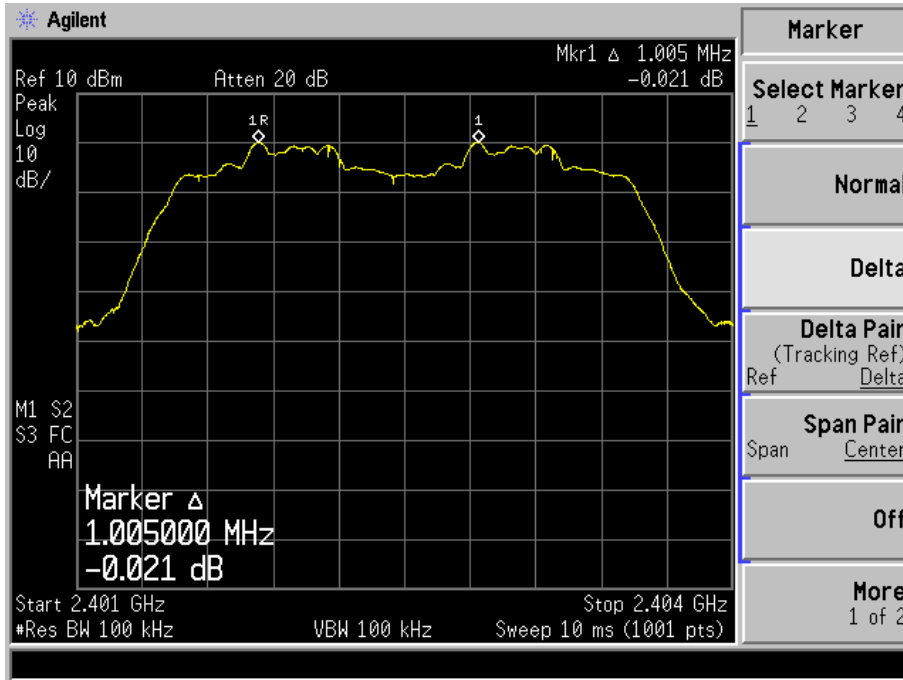

Channel Spacing (Middle CH=1MHz)

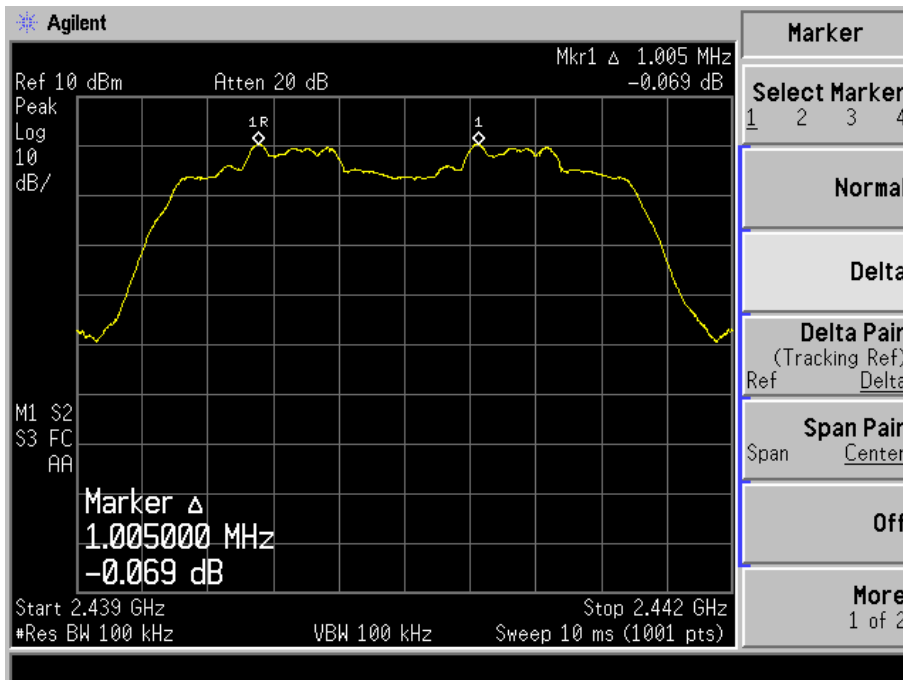

## Channel Spacing (High CH=1MHz)

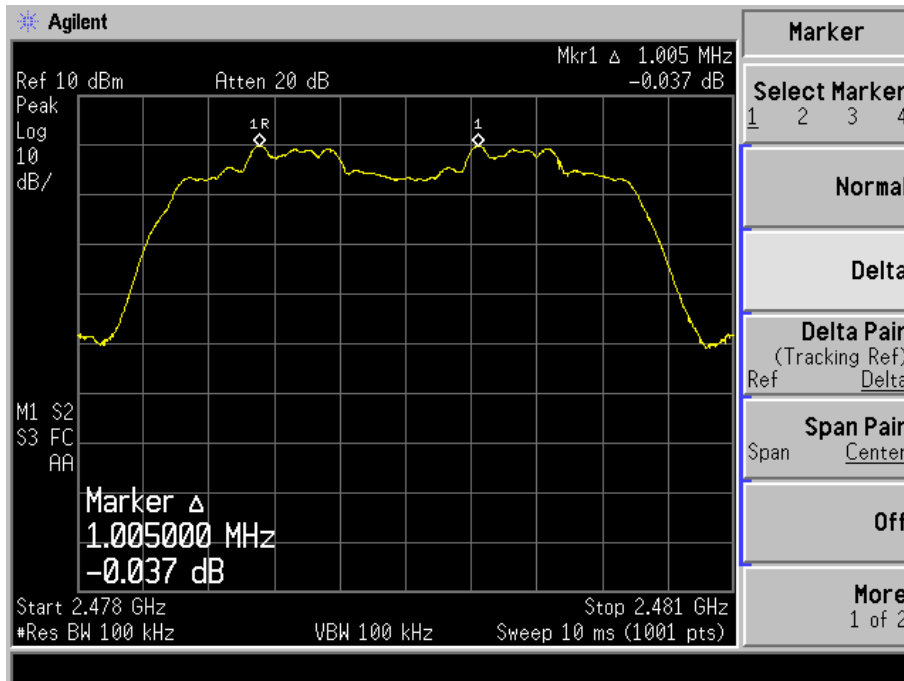



## 7. Dwell Time of Hopping Channel

---

### 7.1 Standard and Limit

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2 Test Procedure

According to the ANSI C63.10, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

### 7.3 Test Data and Results

The dwell time within a period in data mode is independent from the packet type (packet length).

Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.



The test period:  $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$


Dwell time = time slot length \* (Hopping rate / Number of hopping channels) \* Period

Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.370	118.400	400
		DH3	1.620	259.200	400
		DH5	2.870	306.133	400
	2441MHz	DH1	0.370	118.400	400
		DH3	1.620	259.200	400
		DH5	2.870	306.133	400
	2480MHz	DH1	0.370	118.400	400
		DH3	1.620	259.200	400
		DH5	2.870	306.133	400
8DPSK	2402MHz	3DH1	0.380	121.600	400
		3DH3	1.620	259.200	400
		3DH5	2.870	306.133	400
	2441MHz	3DH1	0.380	121.600	400
		3DH3	1.620	259.200	400
		3DH5	2.870	306.133	400
	2480MHz	3DH1	0.380	121.600	400
		3DH3	1.620	259.200	400
		3DH5	2.870	306.133	400


*Please refer to the test plots as below:*



DH1 time slot (Low, Middle, High Channels)

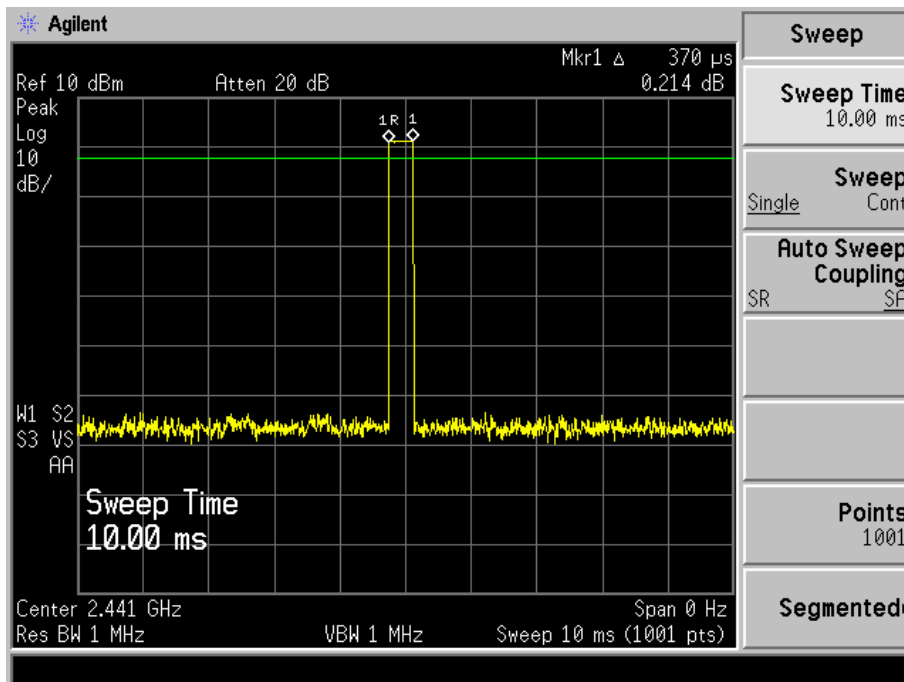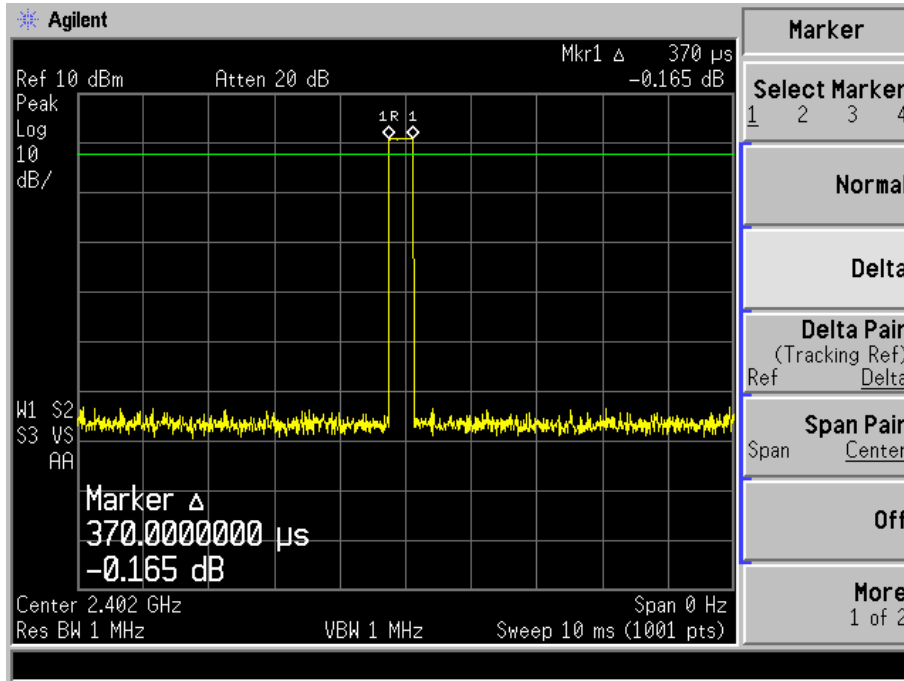


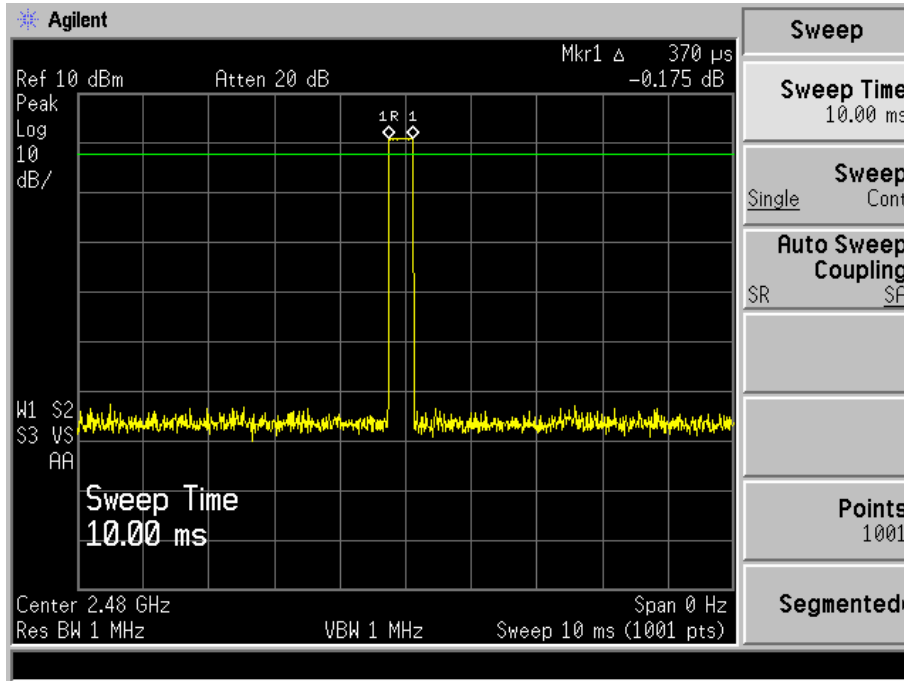



DH3 time slot (Low, Middle, High Channels)

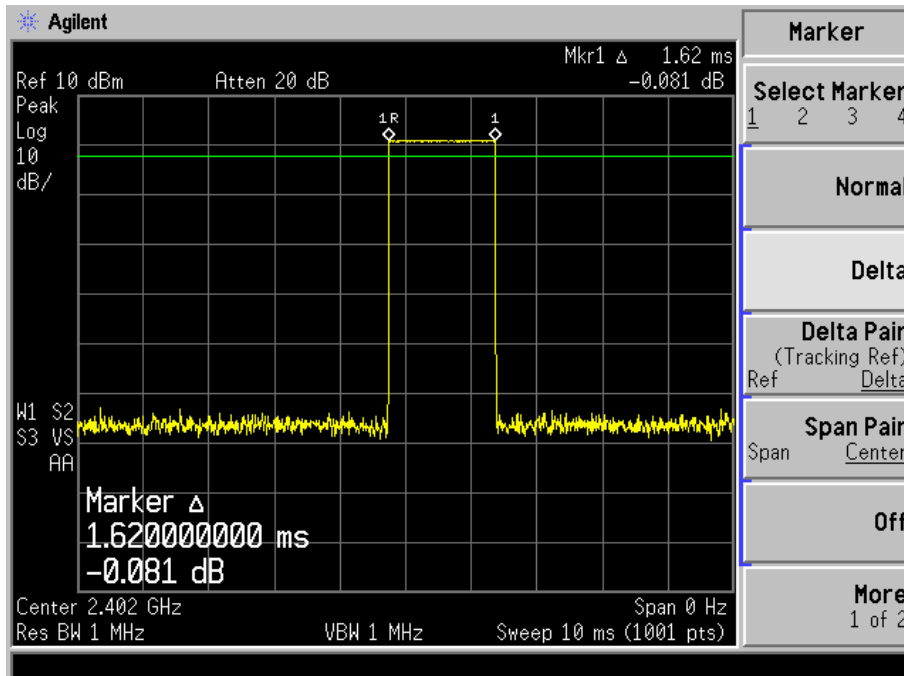

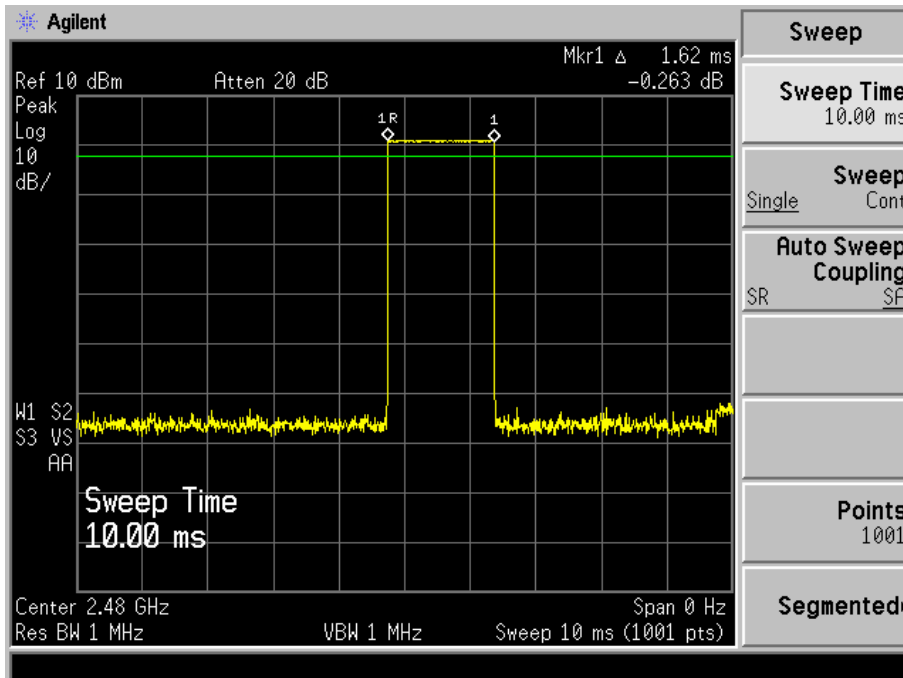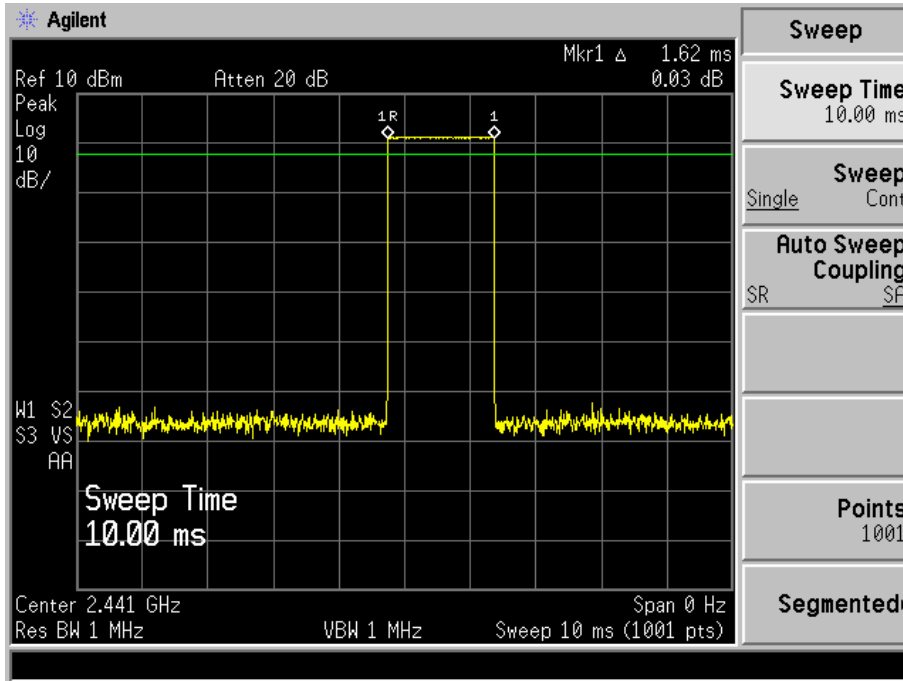




DH5 time slot (Low, Middle, High Channels)

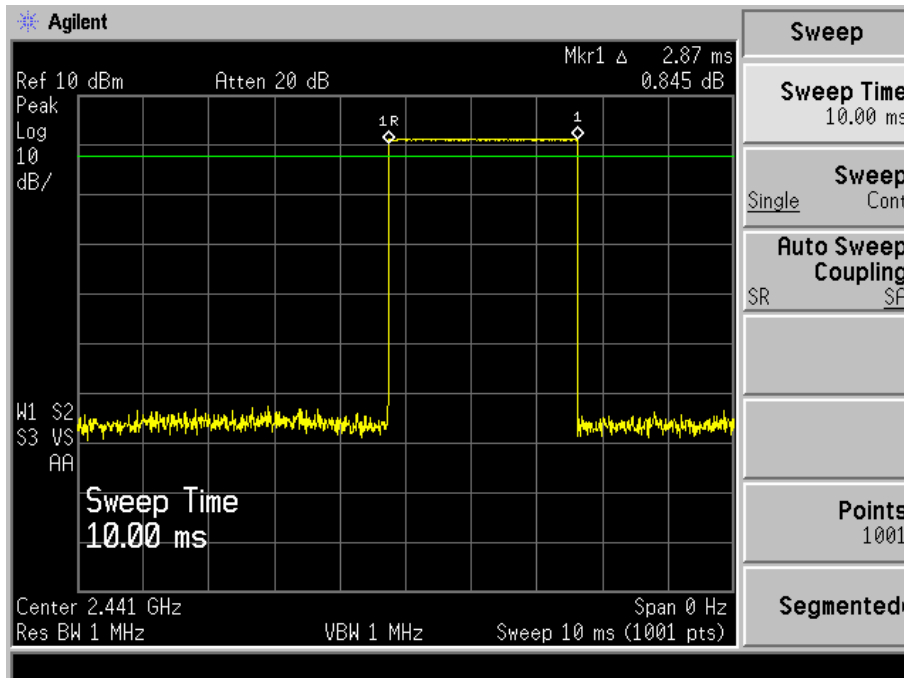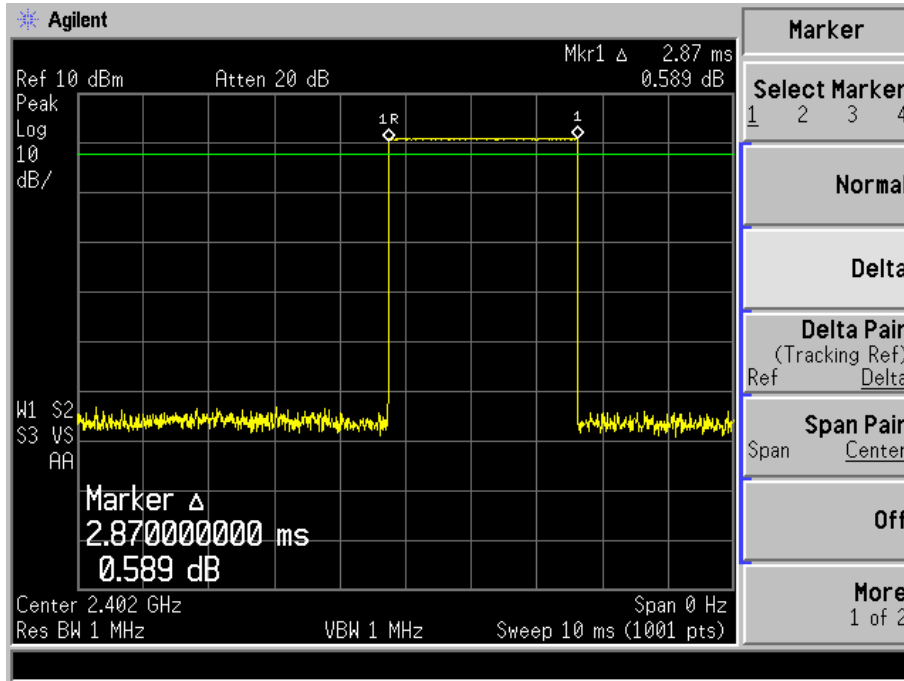

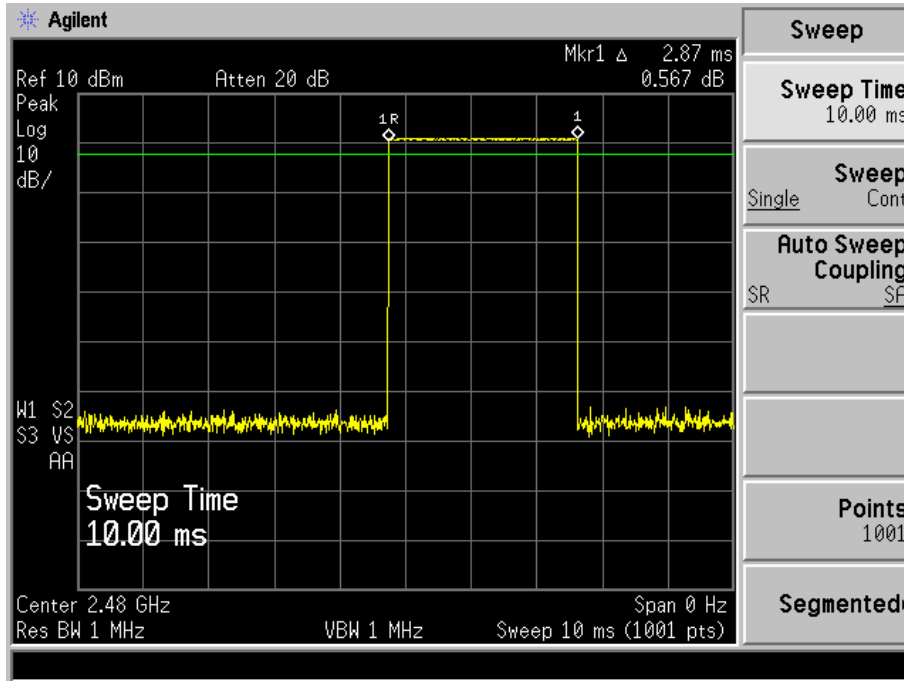



3DH1 time slot (Low, Middle, High Channels)

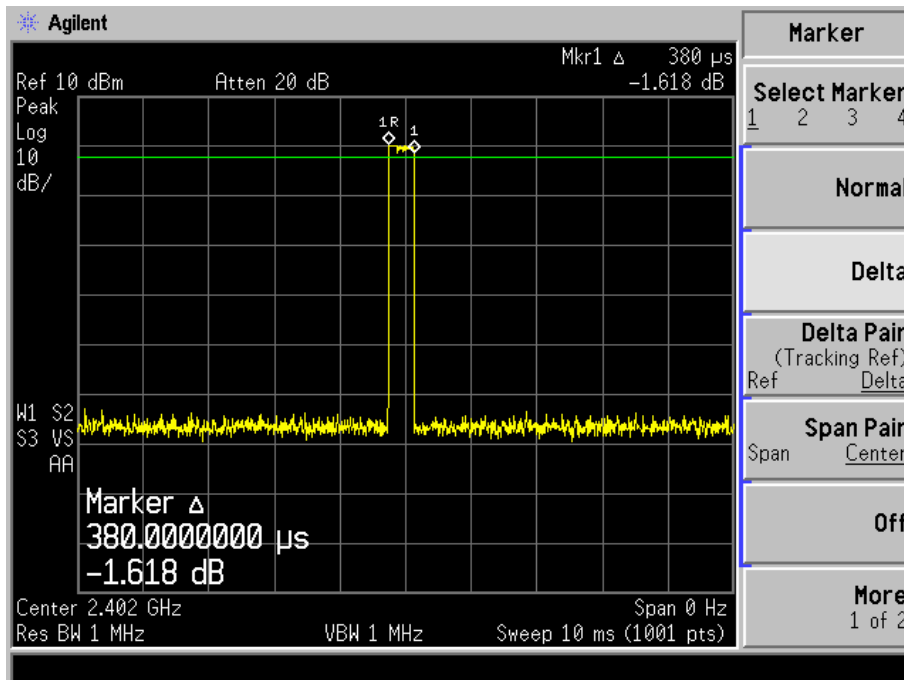


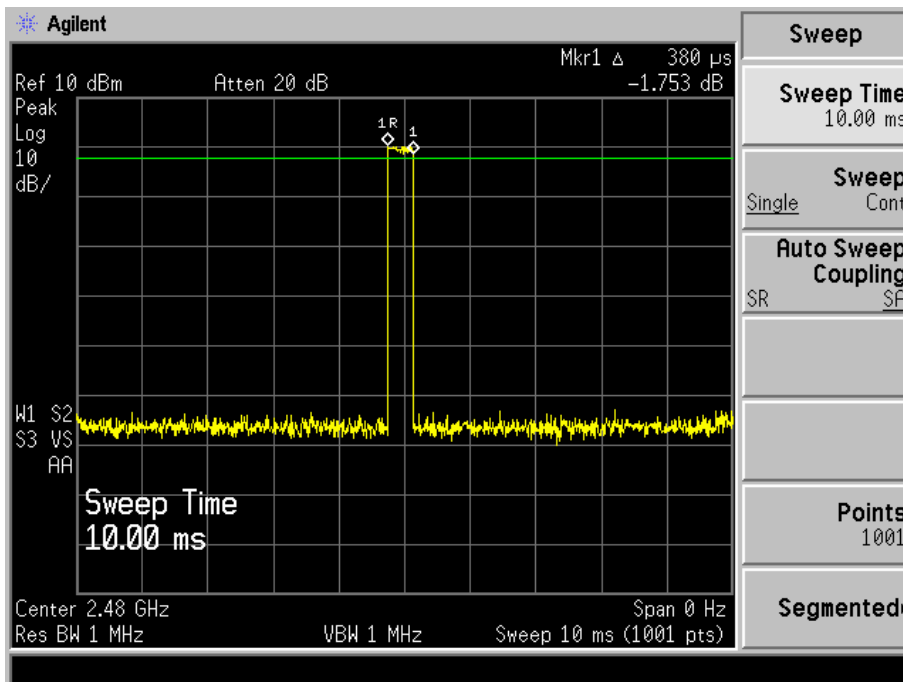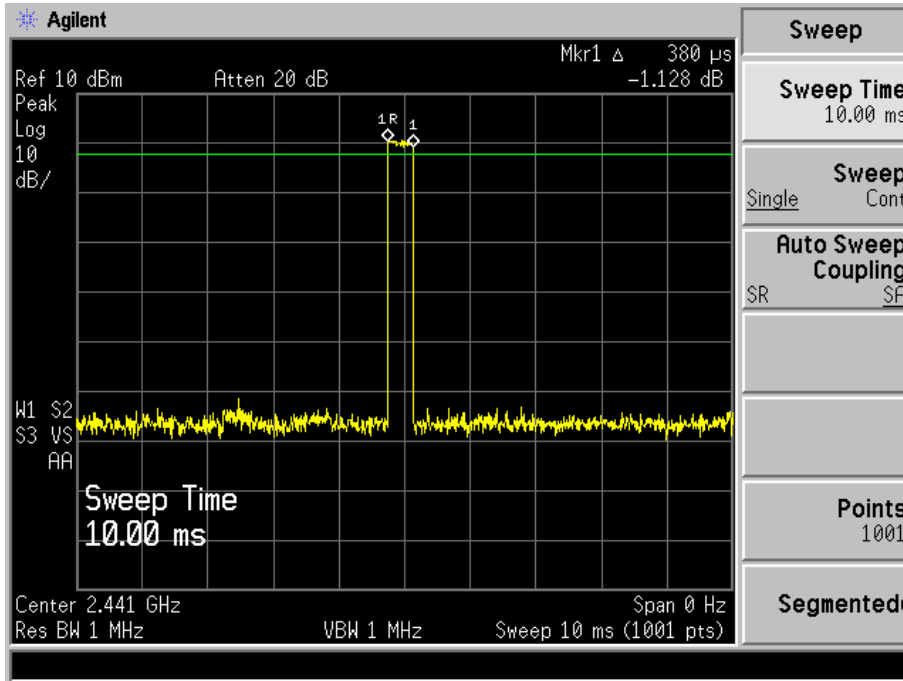






3DH3ime slot (Low, Middle, High Channels)

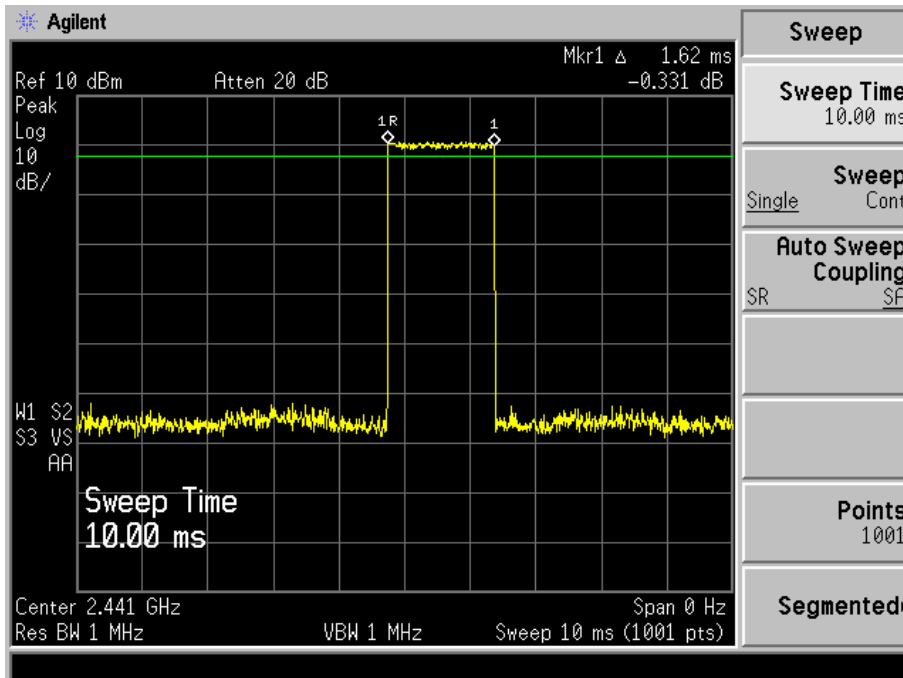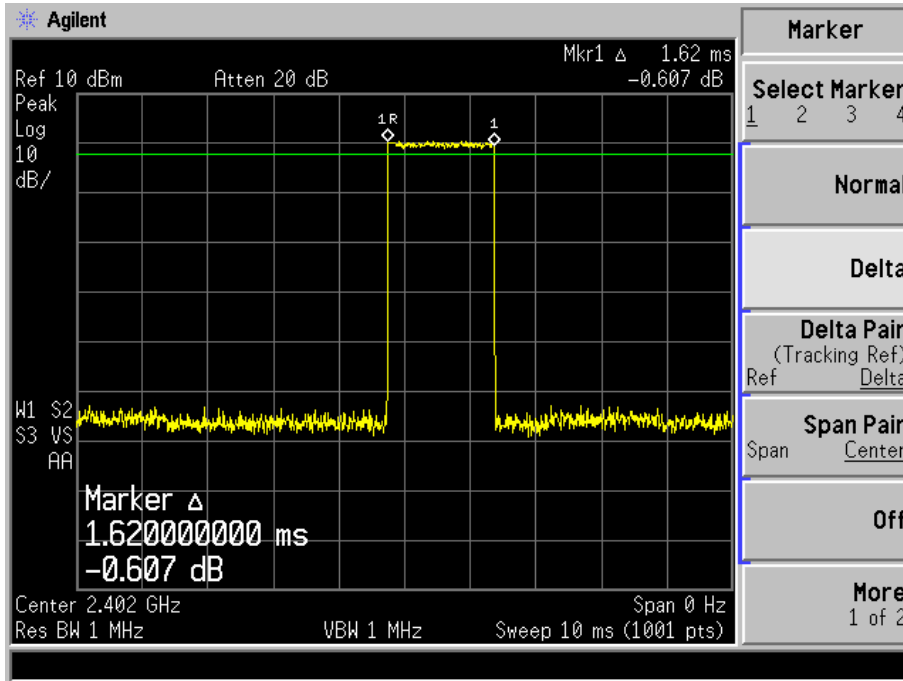

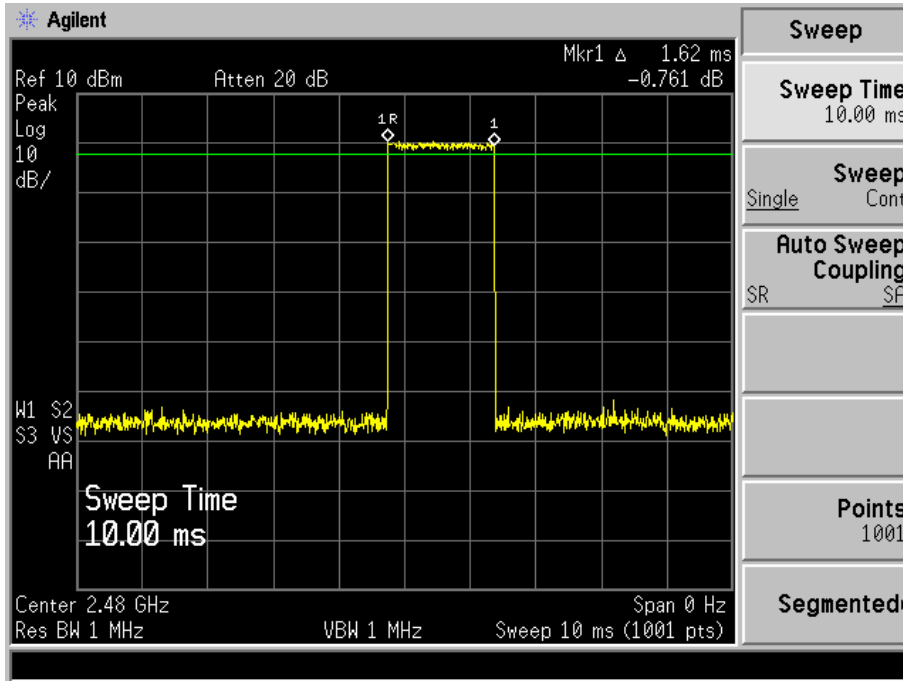

3DH5 time slot (Low, Middle, High Channels)

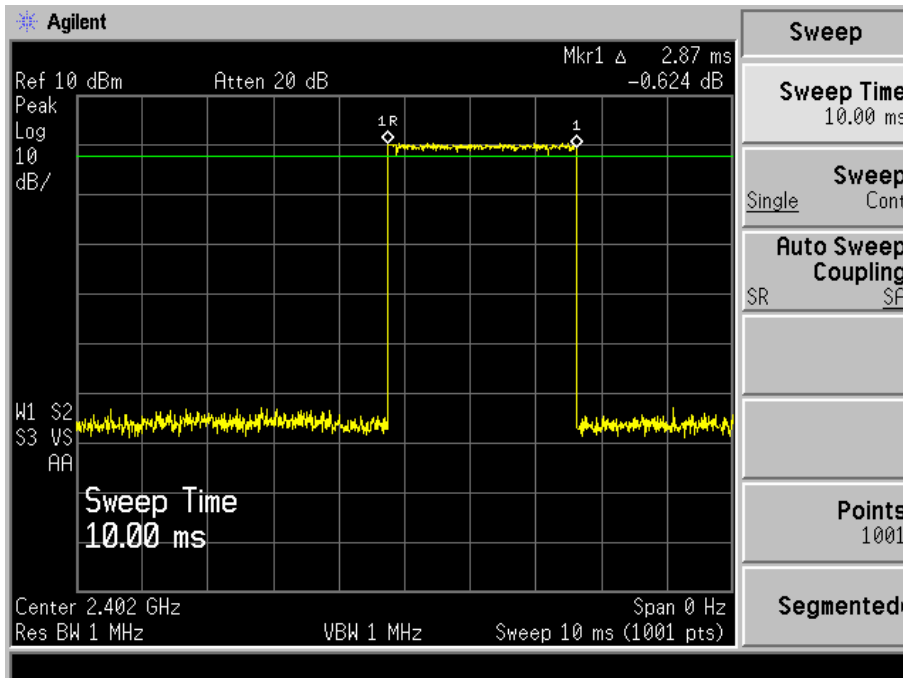

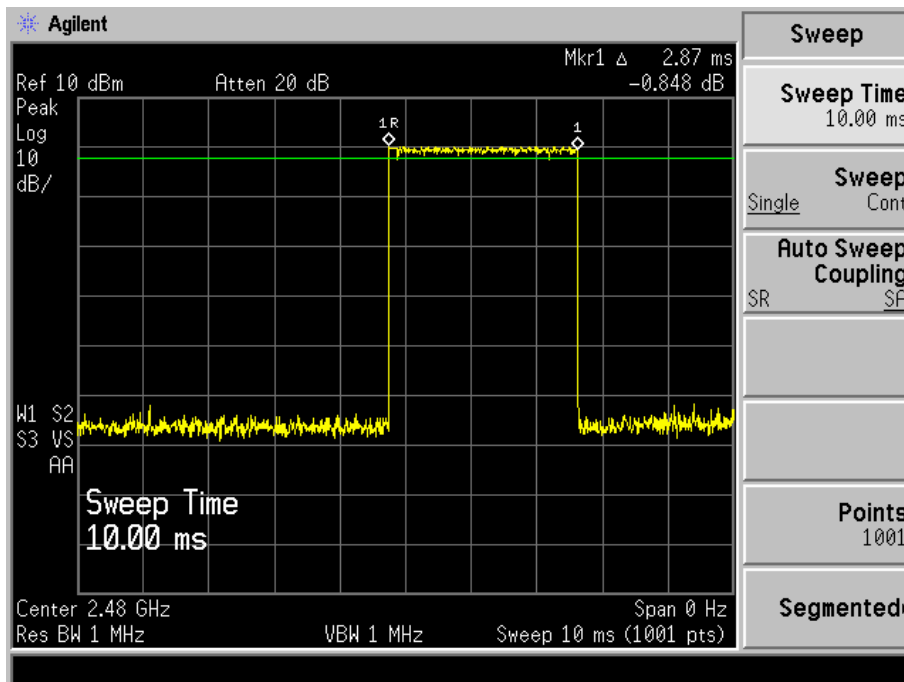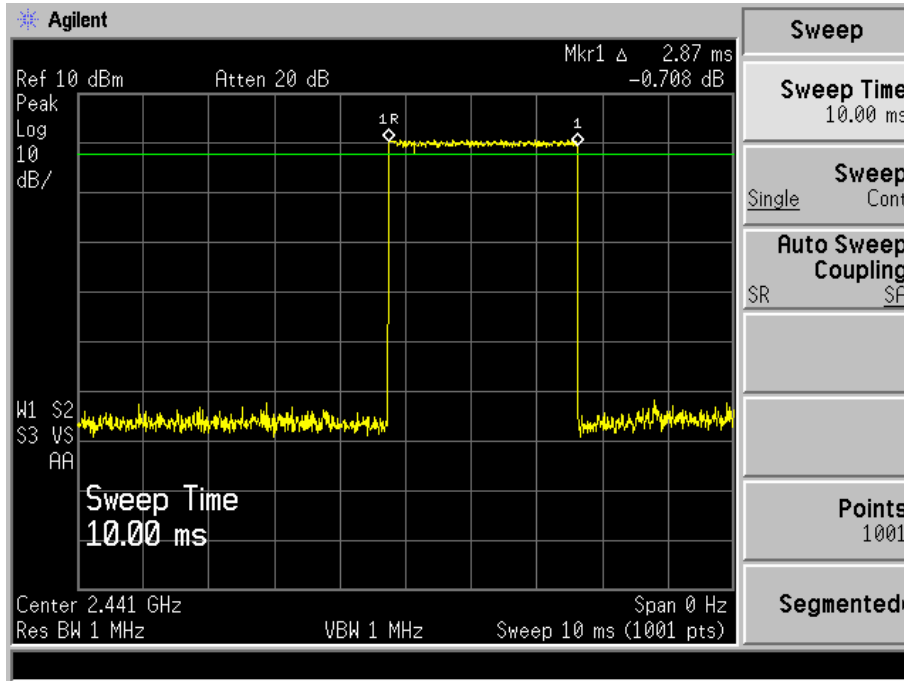

## 8. 20dB Bandwidth

---

### 8.1 Standard and Limit

According to 15.247(a) (1) (iii). For frequency hopping systems operating in the 2400~2483.5 MHz, no limit for 20dB bandwidth.

### 8.2 Test Procedure

According to the ANSI C63.10, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto; Detector function = peak

Trace = max hold


All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

### 8.3 Test Data and Results


Test Mode	Test Channel MHz	20 dB Bandwidth kHz	99% Bandwidth kHz
GFSK	2402	930.473	846.3953
	2441	936.498	877.2585
	2480	965.366	863.1888
8DPSK	2402	1285	1178.6
	2441	1297	1204.5
	2480	1293	1182.5

For GFSK


Low Channel:

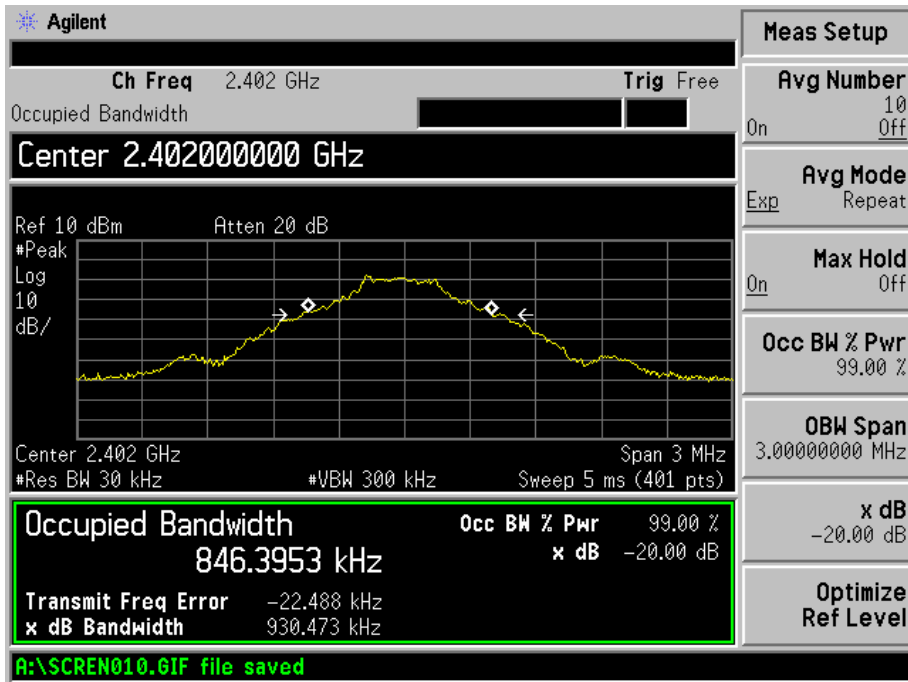


Middle Channel:

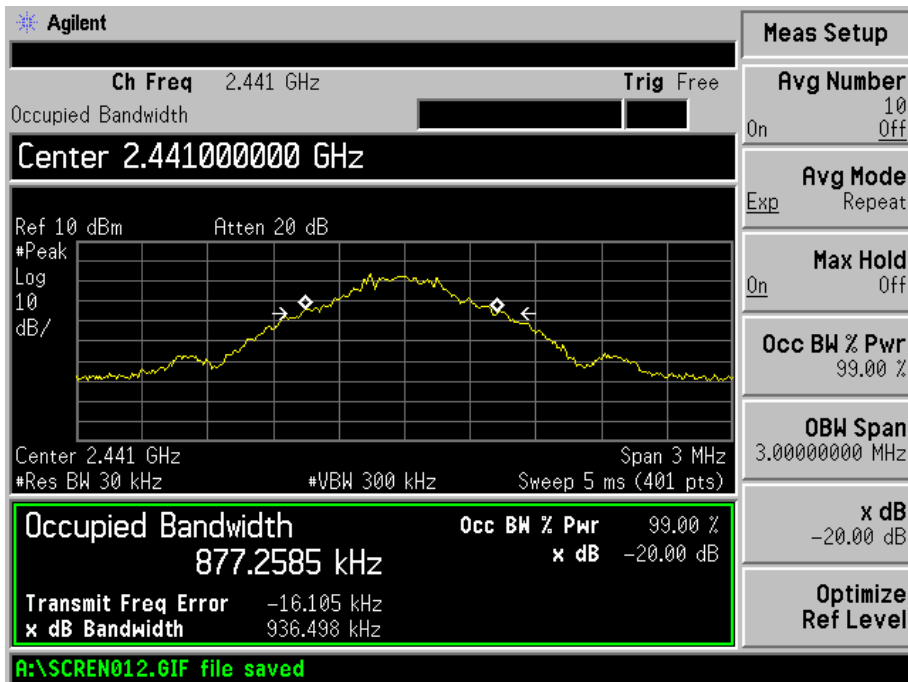


High Channel:

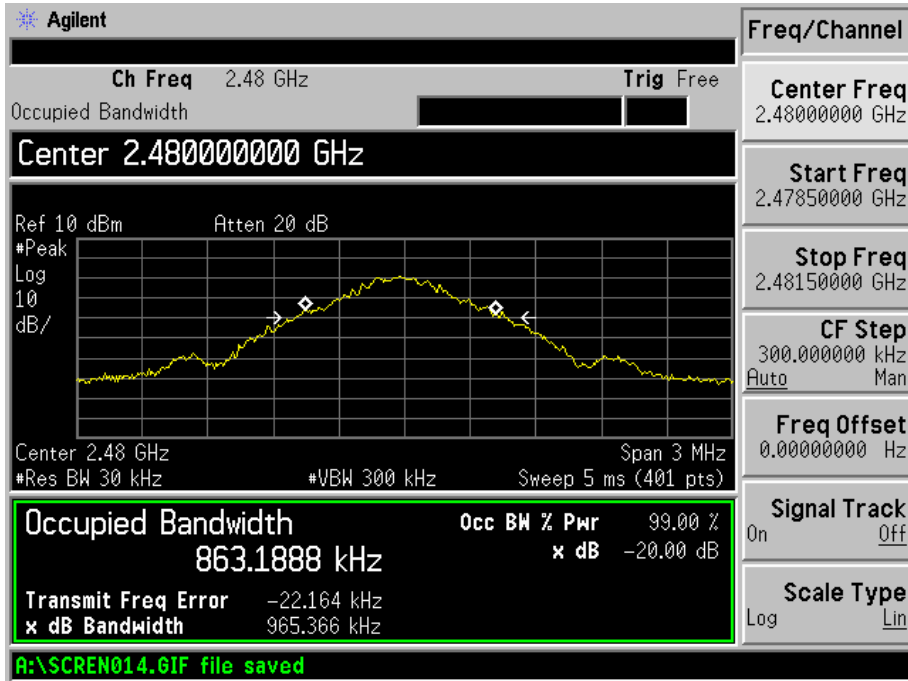


For 8DPSK  
Low Channel:

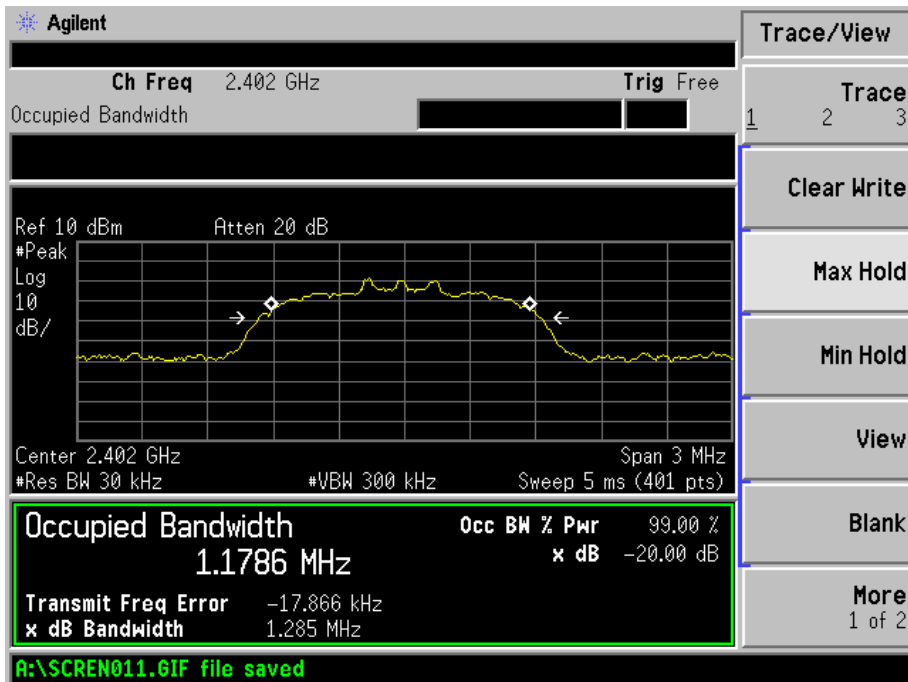

Middle Channel:

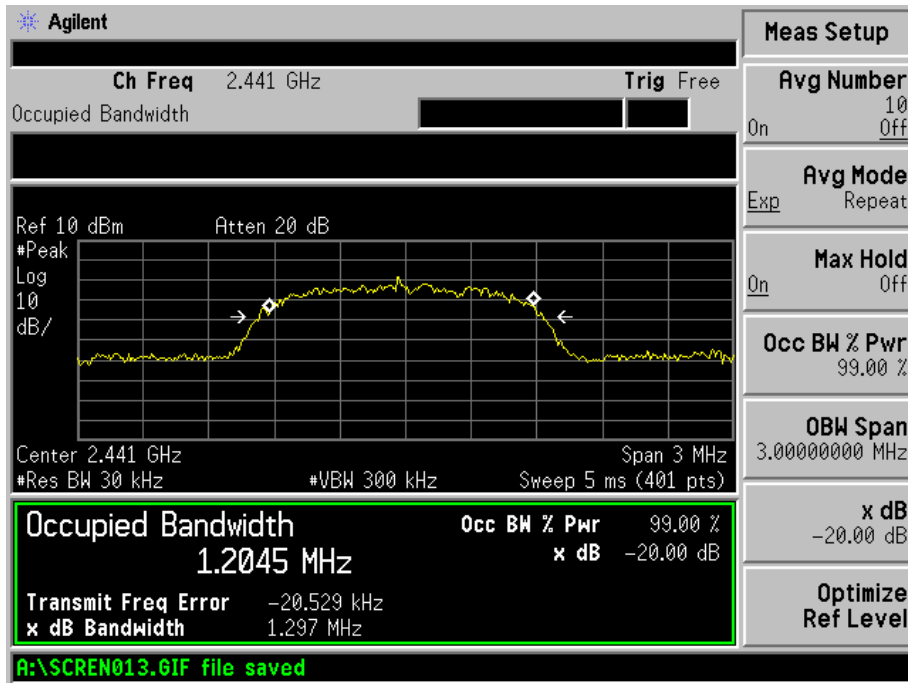

High Channel:

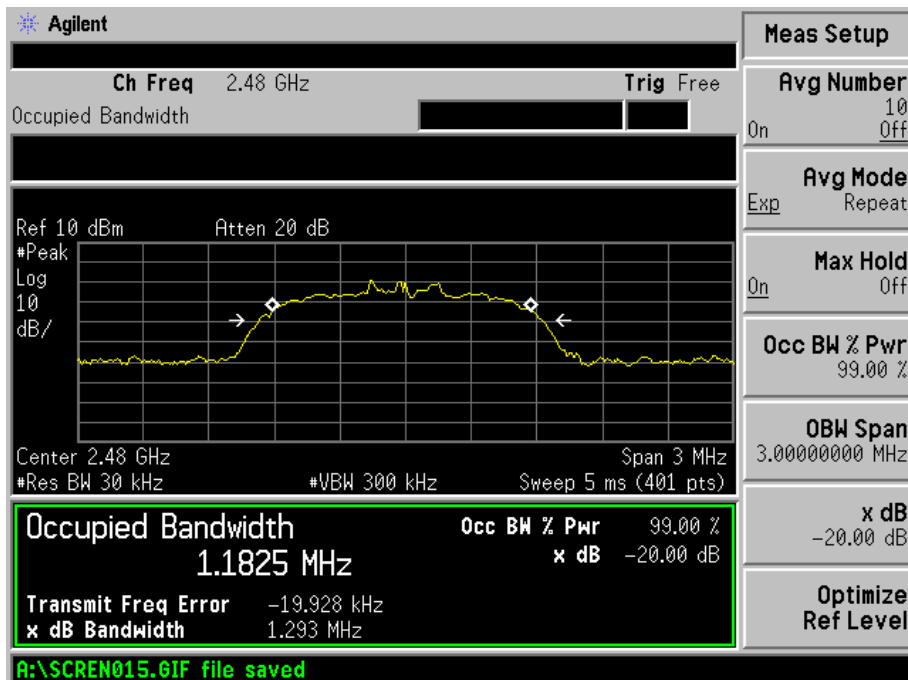

## 9. RF Output Power

### 9.1 Standard and Limit

According to 15.247(b)(1). For frequency hopping systems operating in the 2400~2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725~5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400~2483.5 MHz band: 0.125 watts.

### 9.2 Test Procedure

According to the ANSI C63.10, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

### 9.3 Test Data and Results

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
GFSK				
Low Channel	2402	-1.712	0.67	125
Middle Channel	2441	0.15	1.04	125
High Channel	2480	-2.307	0.59	125
Pi/4 DQPSK				
Low Channel	2402	-1.667	0.68	125
Middle Channel	2441	0.081	1.02	125
High Channel	2480	-2.236	0.60	125
8DPSK				
Low Channel	2402	-2.051	0.62	125
Middle Channel	2441	-0.69	0.85	125
High Channel	2480	-2.839	0.52	125
<i>Note: the antenna gain of 1.7dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.</i>				



## 10. Field Strength of Spurious Emissions

### 10.1 Standard and Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious radiated emissions measurements starting below or at the lowest crystal frequency.

The general limits in FCC Part 15.209


Frequency of Emission (MHz)	Field Strength (uV/m)		Field Strength (dBuV/m)	
	QP		QP	AV
30-88	100		40	--
88-216	150		43.5	--
216-960	200		46	--
Above 960	500		54	74
Limits at a measurement distance of 3 m				

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious radiated emissions measurements starting below or at the lowest crystal frequency.


Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

### 10.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

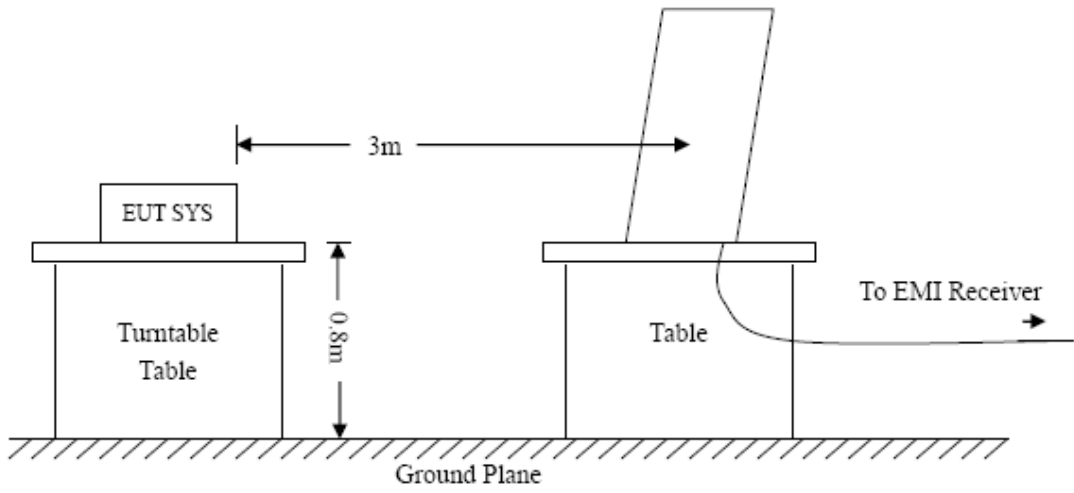

Test Setup Block Diagram below 30MHz

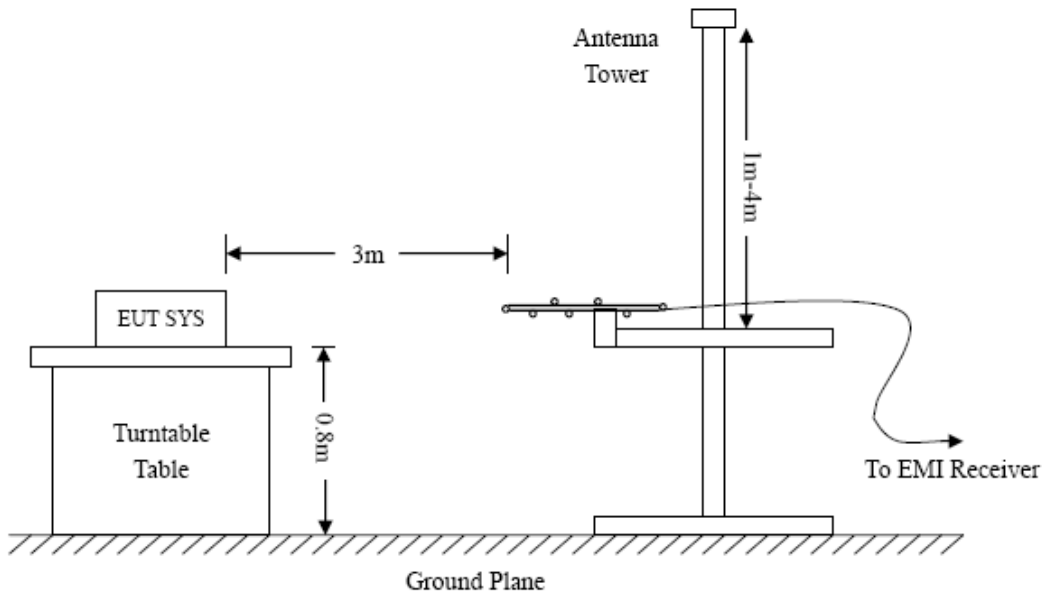

Test Setup Block Diagram for 30MHz-1GHz

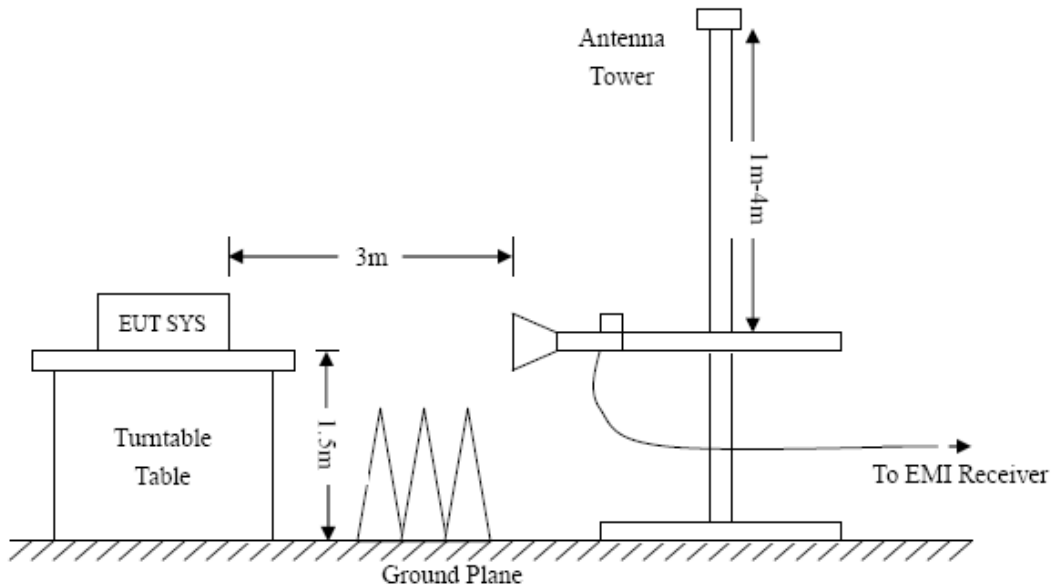

Test Setup Block Diagram above 1GHz

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Frequency: 9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency: 30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency: Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV


### 10.3 Test Data and Results

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst case:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


## Worst case\_GFSK mode (TM1)

Test Plots and Data of Radiated Emissions (30MHz to 1GHz)	
Tested Model:	BT190i
Tested Mode:	TM1
Test Power Specification:	DC 3.7V
Test Antenna Polarization:	Horizontal

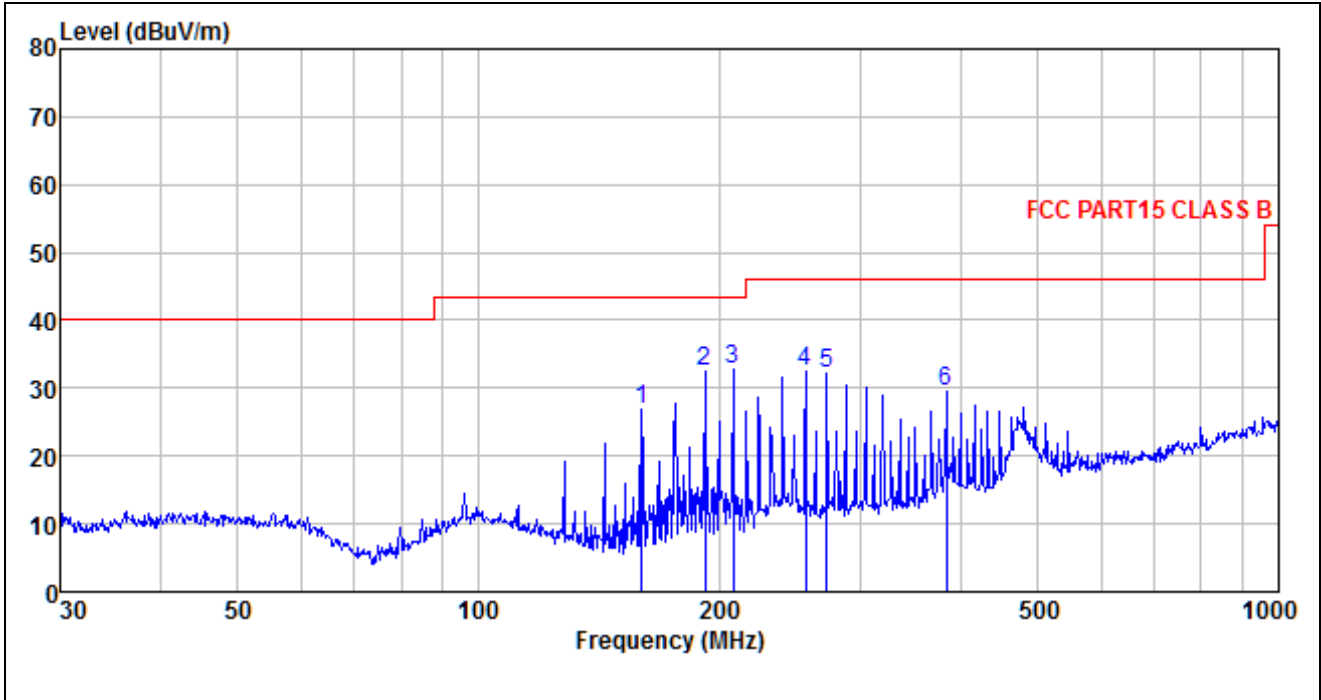

	Read	Antenna	Preamp	Cable	Limit	Over			
Freq	Level	Factor	Factor	Loss	Line	Limit	Remark		
-----	-----	-----	-----	-----	-----	-----	-----		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	159.784	44.04	10.64	29.36	1.63	26.95	43.50	-16.55	QP
2	191.745	47.41	12.56	29.23	1.80	32.54	43.50	-10.96	QP
3	207.850	47.35	12.80	29.28	1.89	32.76	43.50	-10.74	QP
4	256.521	45.87	14.06	29.70	2.16	32.39	46.00	-13.61	QP
5	272.278	45.41	14.46	29.81	2.24	32.30	46.00	-13.70	QP
6	383.932	39.63	16.68	29.57	2.78	29.52	46.00	-16.48	QP

Test Plots and Data of Radiated Emissions (30MHz to 1GHz)	
Tested Model:	BT190i
Tested Mode:	TM1
Test Power Specification:	DC 3.7V
Test Antenna Polarization:	Vertical

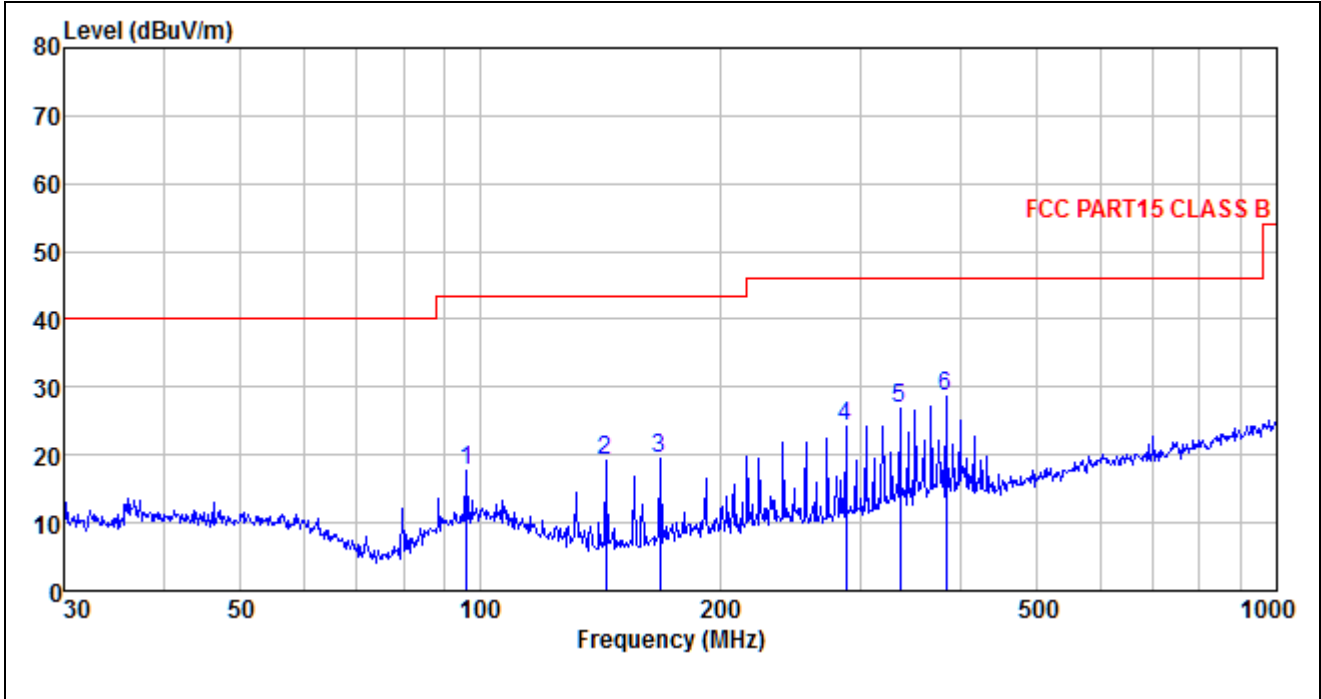

	Read Freq	Antenna Level	Preamp Factor	Cable Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	96.099	31.46	14.90	29.72	1.16	17.80	43.50	-25.70	QP
2	143.830	36.77	10.22	29.44	1.53	19.08	43.50	-24.42	QP
3	167.824	36.12	10.90	29.33	1.67	19.36	43.50	-24.14	QP
4	287.990	37.01	14.84	29.92	2.31	24.24	46.00	-21.76	QP
5	336.035	38.19	15.99	29.80	2.55	26.93	46.00	-19.07	QP
6	383.932	38.69	16.68	29.57	2.78	28.58	46.00	-17.42	QP

Test Plots and Data of Radiated Emissions (1GHz to 25GHz)	
Tested Model:	BT190i
Tested Mode:	TM1/TM2/TM3
Test Power Specification:	DC 3.7V
Remark:	Worst cases (GFSK)

Frequency (MHz)	Result (dBuV/m)	Correct dB/m	Limit (dBuV/m)	Margin (dB)	Detector PK/AV	Polar H/V
GFSK_Low Channel (2402MHz)						
4804	47.93	8.29	74	-26.07	PK	H
4804	36.32	8.29	54	-17.68	AV	H
4804	46.33	8.29	74	-27.67	PK	V
4804	35.42	8.29	54	-18.58	AV	V
GFSK_Middle Channel (2441MHz)						
4882	48.25	8.40	74	-25.75	PK	H
4882	37.58	8.40	54	-16.42	AV	H
4882	43.88	8.40	74	-30.12	PK	V
4882	33.49	8.40	54	-20.51	AV	V
GFSK_High Channel (2480MHz)						
4960	47.62	8.50	74	-26.38	PK	H
4960	36.95	8.50	54	-17.05	AV	H
4960	44.15	8.50	74	-29.85	PK	V
4960	33.71	8.50	54	-20.29	AV	V

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

---

## 11. Out of Band Emissions

---

### 11.1 Standard and Limit

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 11.2 Test Procedure

According to the ANSI C63.10, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 3MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the ANSI C63.10, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold


All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

### 11.3 Test Data and Results

Radiated Bandedge (Worst case)

Test Mode: 8DPSK


Lowest Bandedge (Horizontal)

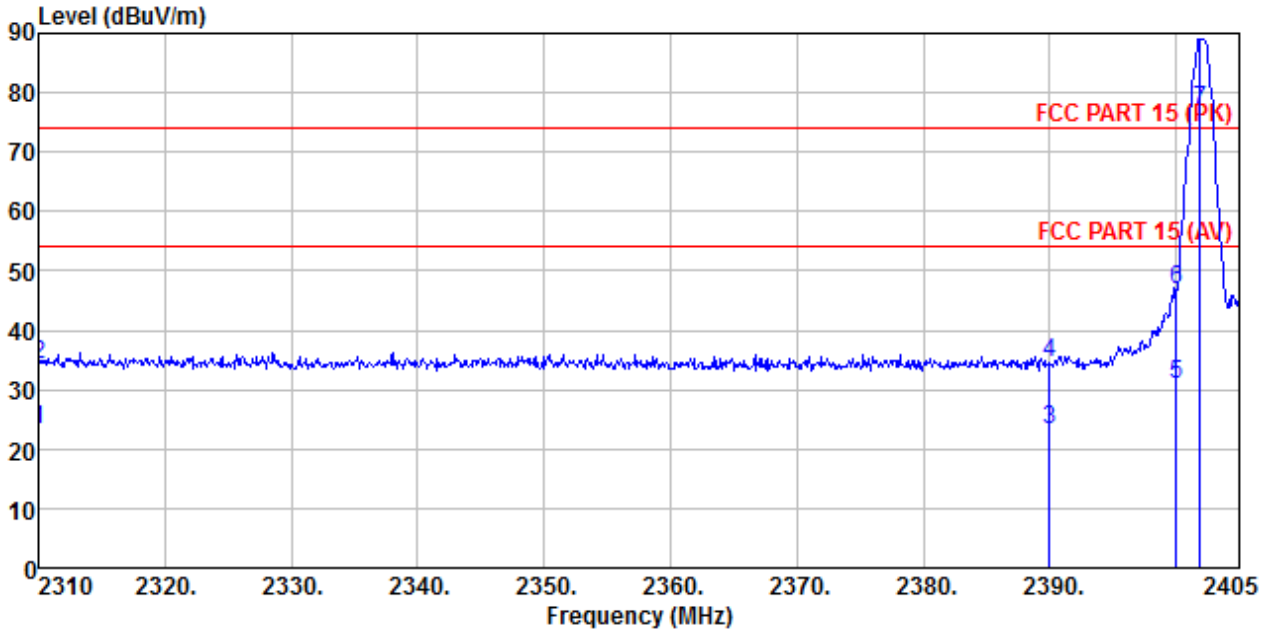

No.	Frequency (MHz)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2310.0	34.26	74.00	-39.74	Peak Detector
2	2310.0	23.37	54.00	-30.63	Average Detector
3	2390.0	34.38	74.00	-39.62	Peak Detector
4	2390.0	23.34	54.00	-30.66	Average Detector
5	2400.0	46.92	74.00	-27.08	Peak Detector
6	2400.0	30.88	54.00	-23.12	Average Detector
7	2402.0	89.04	-	-	Peak Detector
8	2402.0	77.00	-	-	Average Detector



## Highest Bandedge (Horizontal)

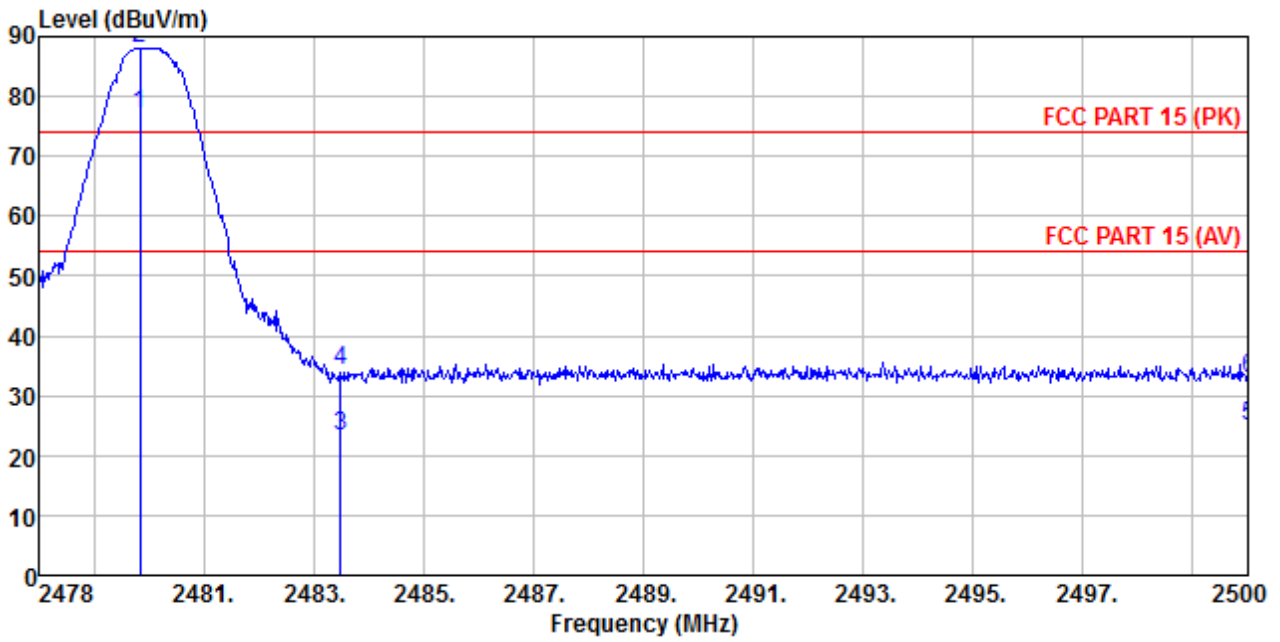


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.0	88.09	-	-	Peak Detector
2	2480.0	77.16	-	-	Average Detector
3	2483.5	34.06	74.00	-39.94	Peak Detector
4	2483.5	23.14	54.00	-30.86	Average Detector
5	2500.0	32.81	74.00	-41.19	Peak Detector
6	2500.0	24.95	54.00	-29.05	Average Detector


Conducted Bandedge

Test Mode: 8DPSK

Lowest Bandedge

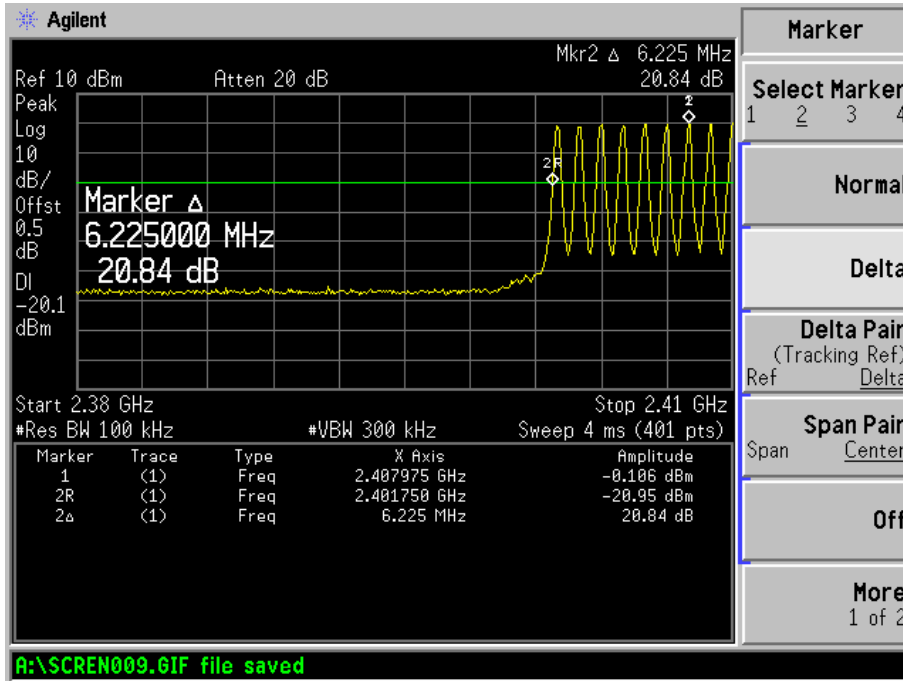

Highest Bandedge

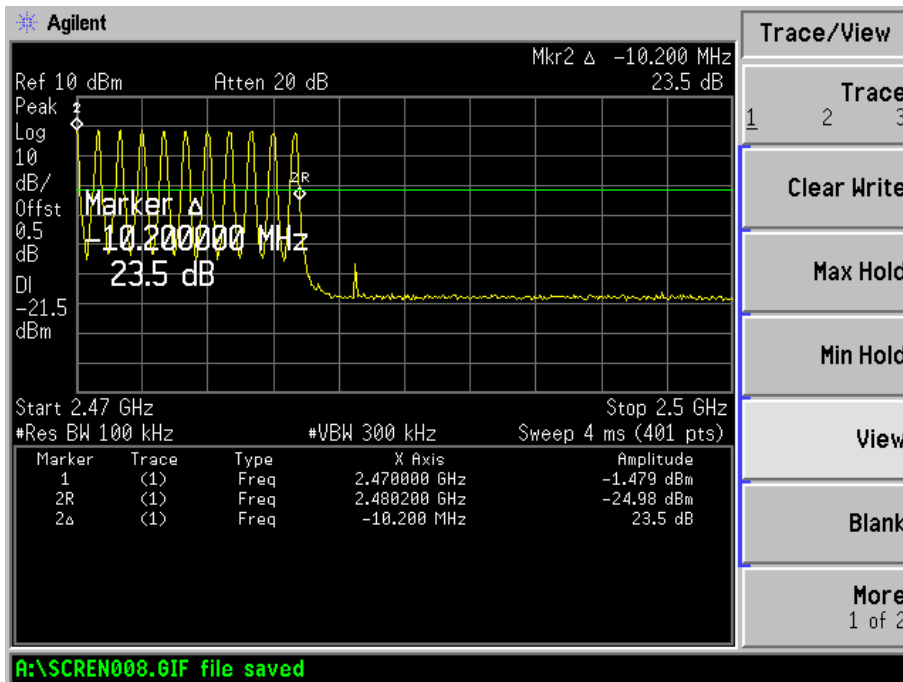

## 12. Conducted Emissions

### 12.1 Standard and Limit

According to the rule FCC Part 15.207, Conducted limit, the limit for a class B device as below:


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

AC Power Line

### 12.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2013 measurement procedure.

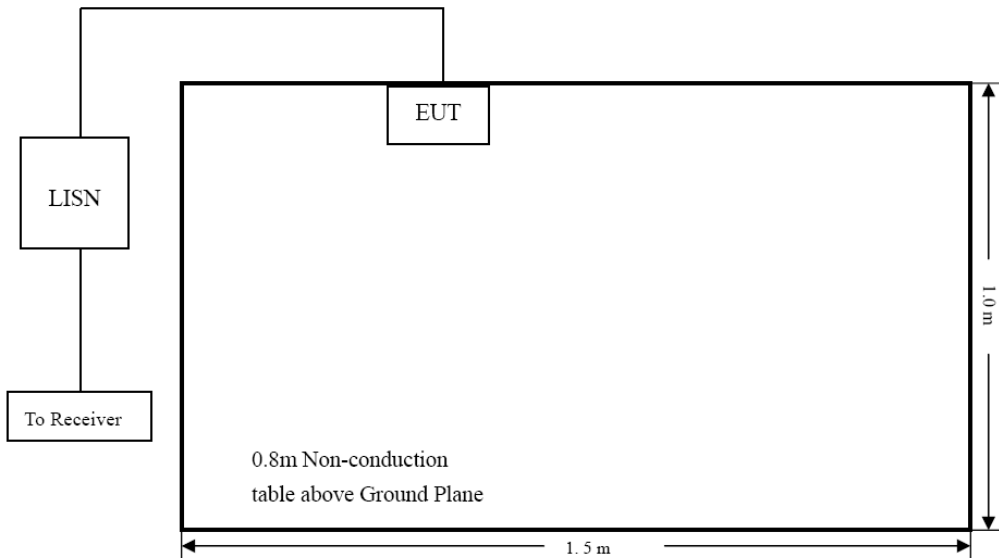


Test Setup Block Diagram


### 12.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a Class B device, and with the worst case as below:

Test Plots and Data of Conducted Emissions	
Tested Model:	BT190i
Tested Mode:	TM5(Charging and Bluetooth Playing)
Test Power Specification:	AC 120V/60Hz
Test Power Line:	Neutral

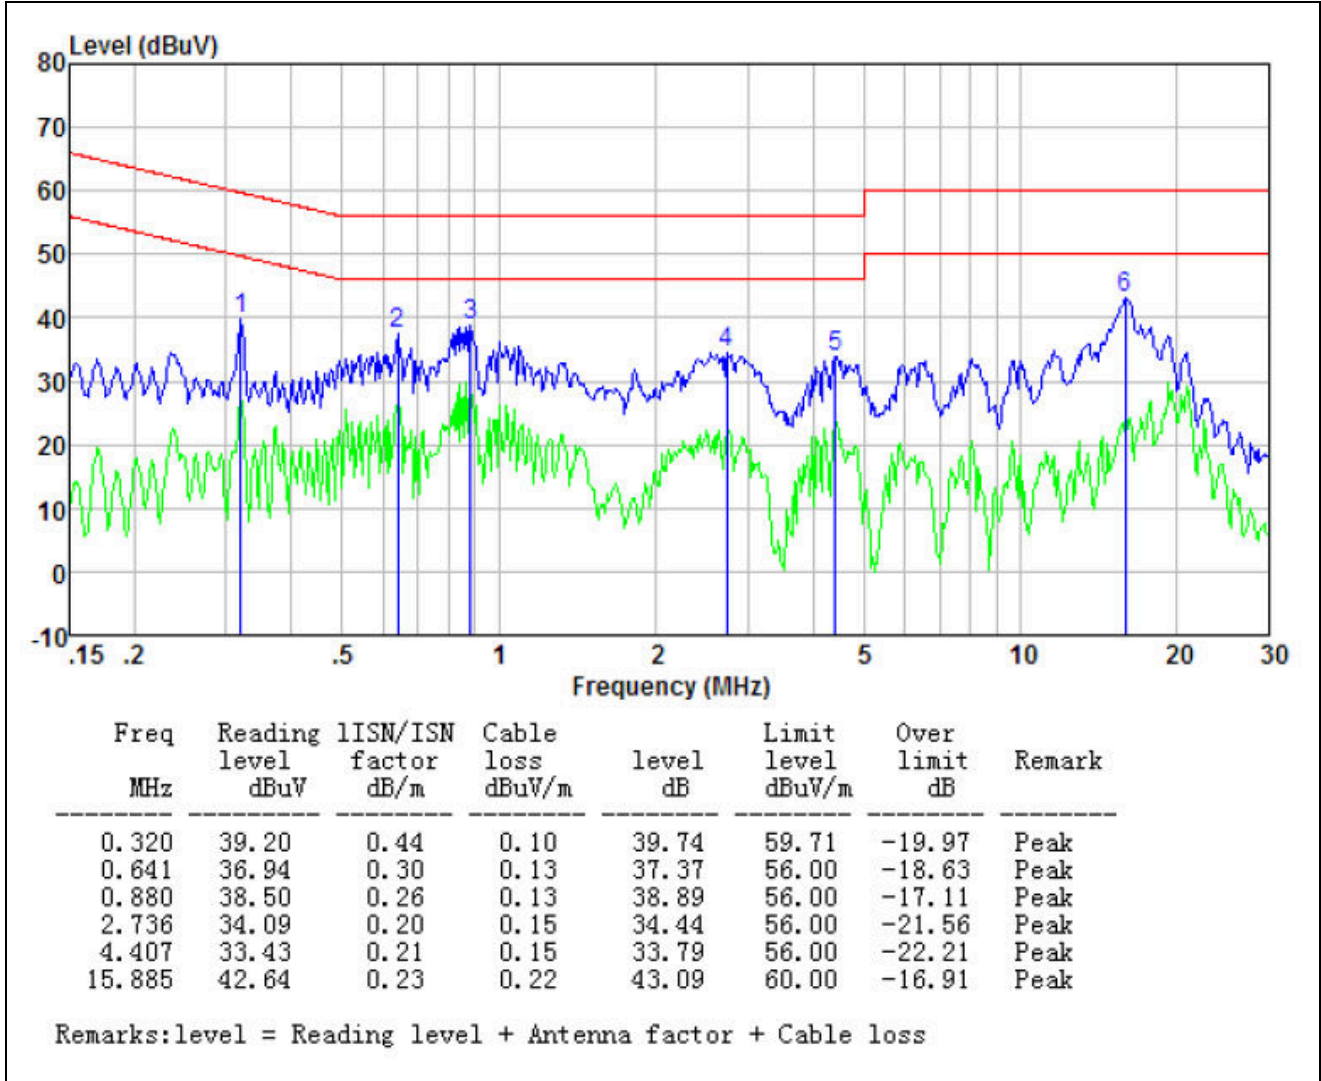

Test Plots and Data of Conducted Emissions	
Tested Model:	BT190i
Tested Mode:	TM5
Test Power Specification:	AC 120V/60Hz
Test Power Line:	Line

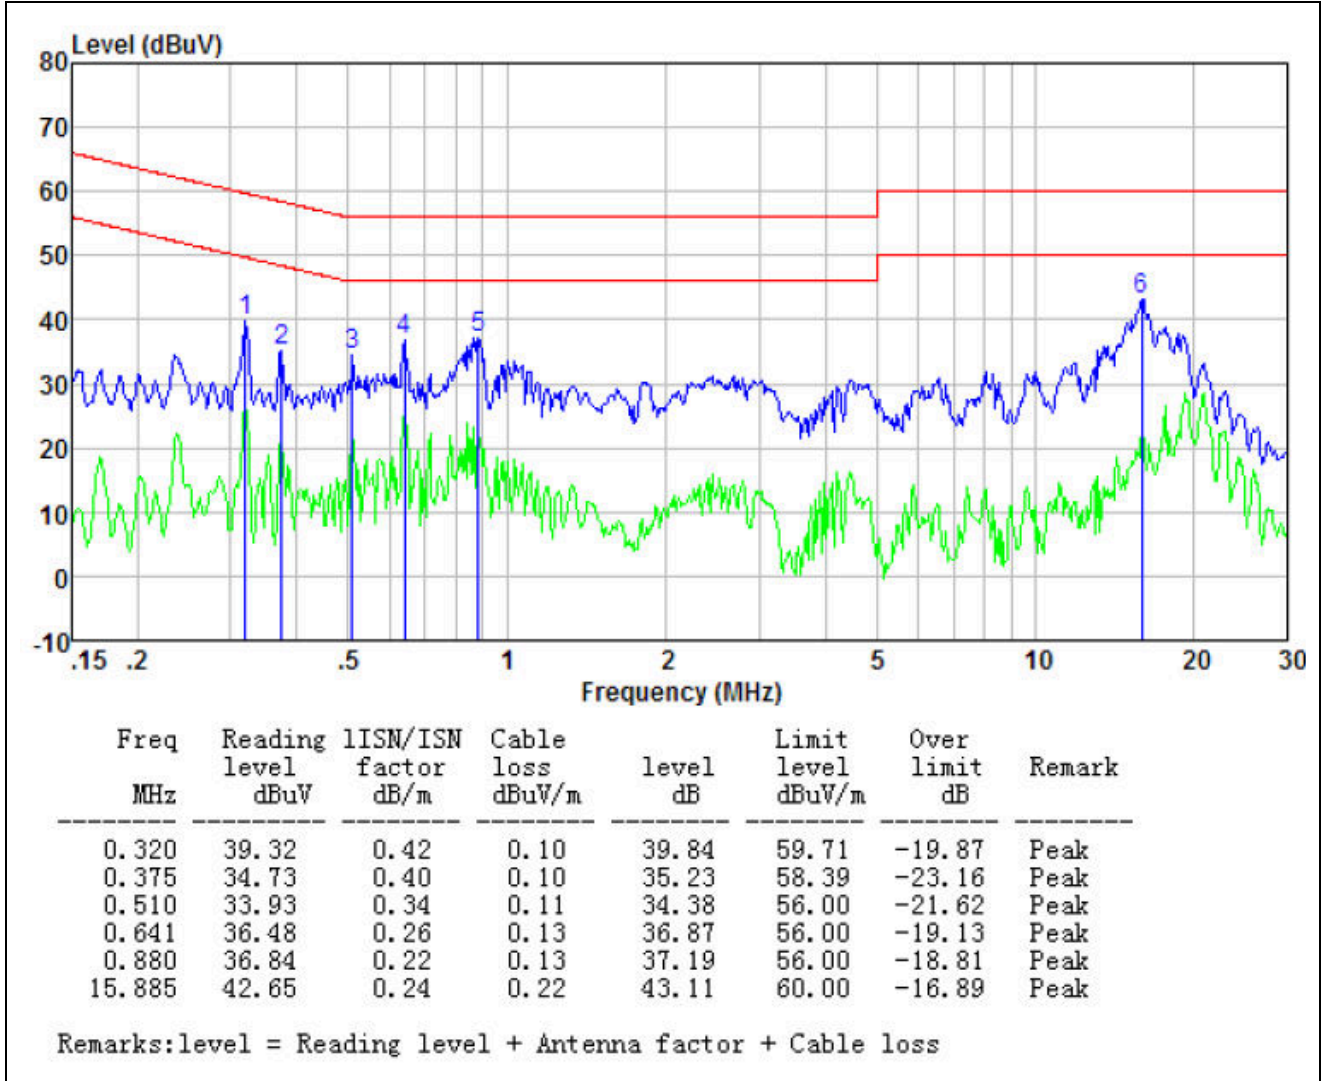

## Annex A. EUT External Photos

EUT View 1




EUT View 2



EUT View 3



EUT View 4

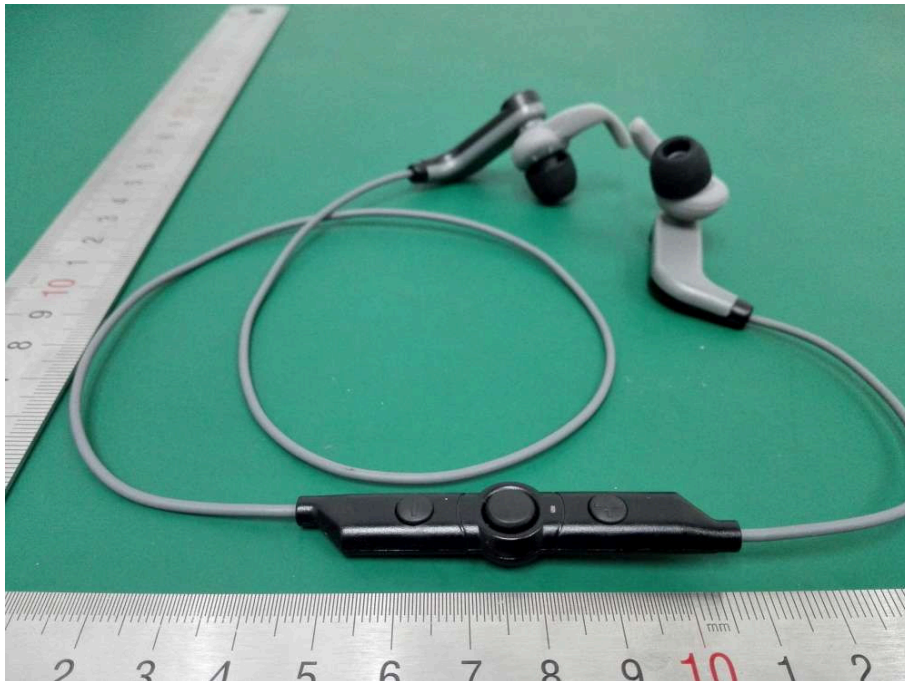

EUT View 5






## Annex B. EUT Internal Photos

### EUT Internal View 1




### EUT Internal View 2

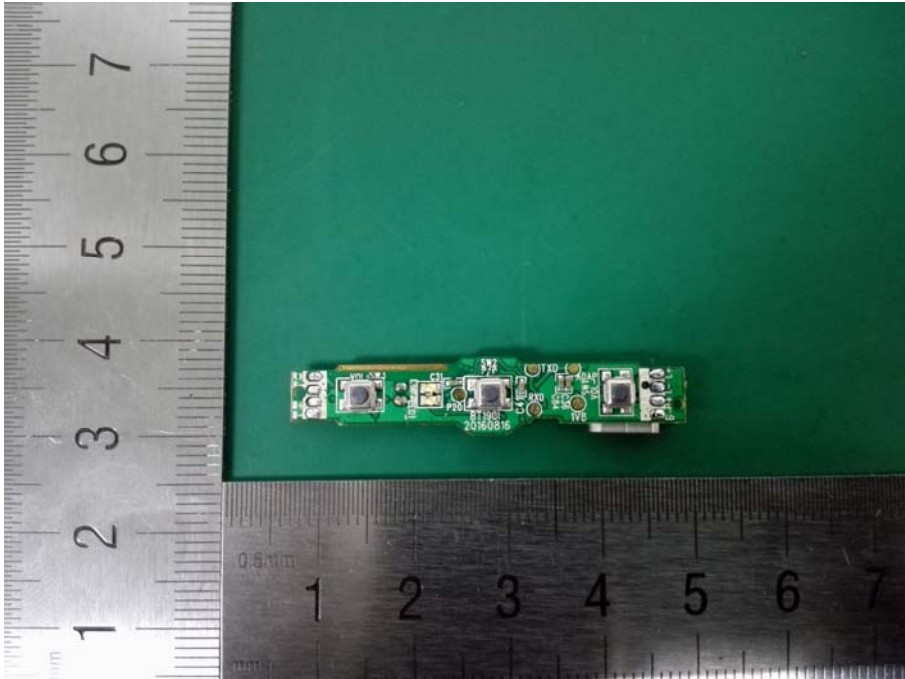

EUT Internal View 3


BT Antenna

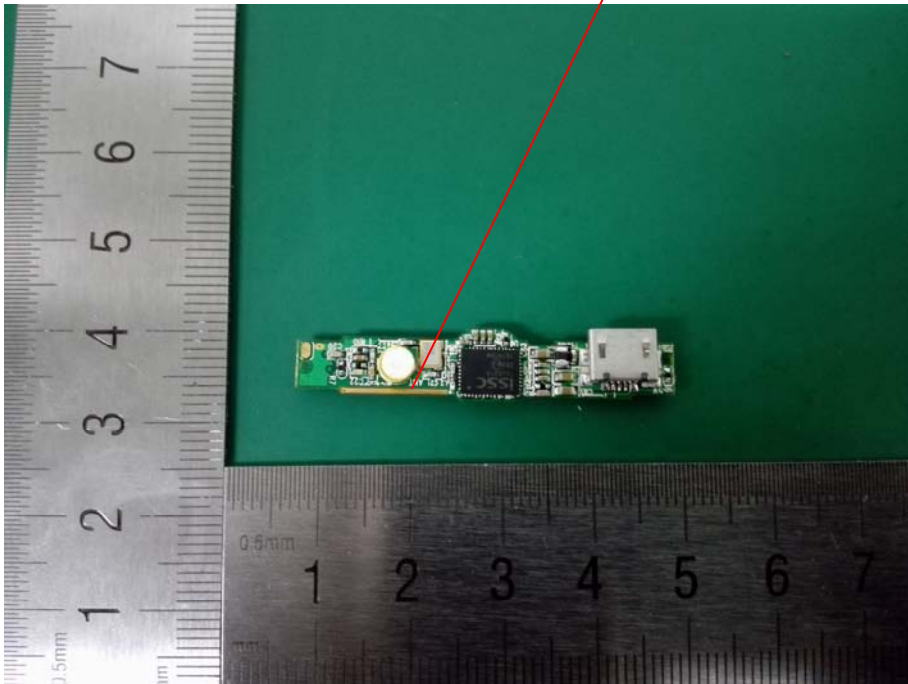

EUT Internal View 4



EUT Internal View 5

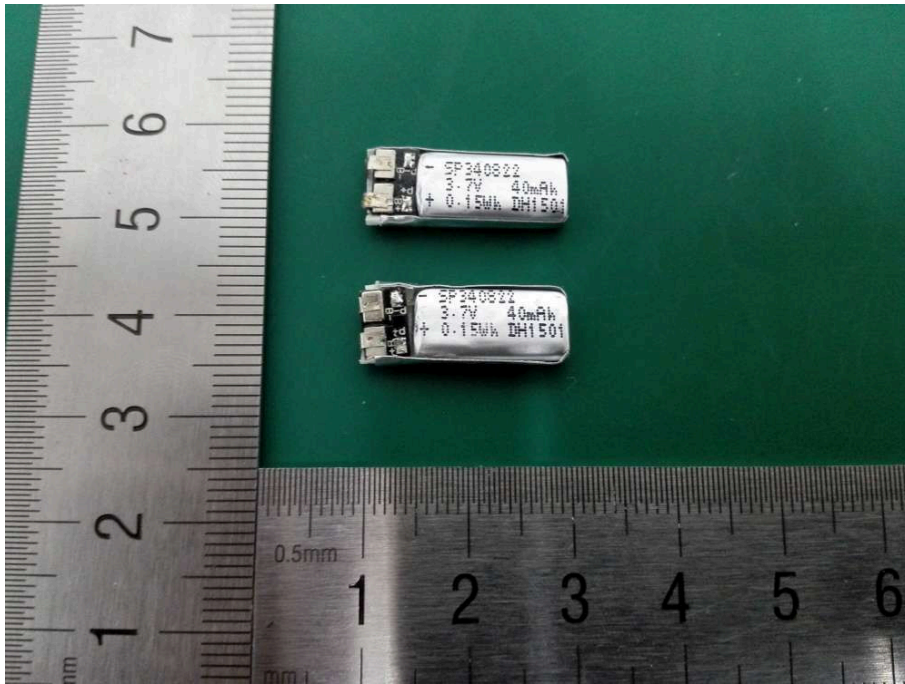


## Annex C. Test Photos

---


### Conducted Emissions



### Radiated Emissions (30MHz to 1GHz)

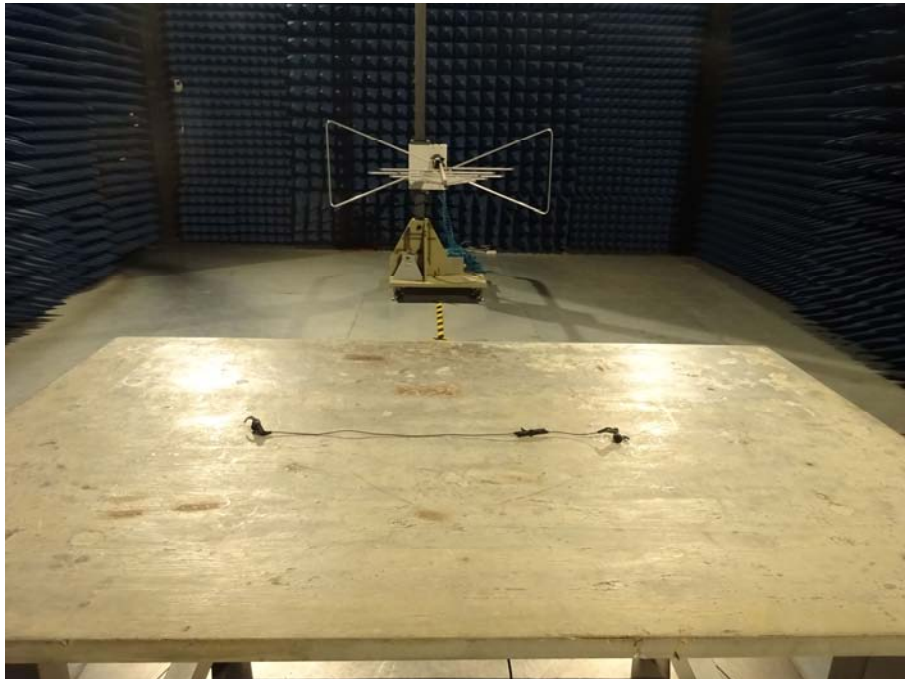


**Radiated Emissions (Above 1GHz)**

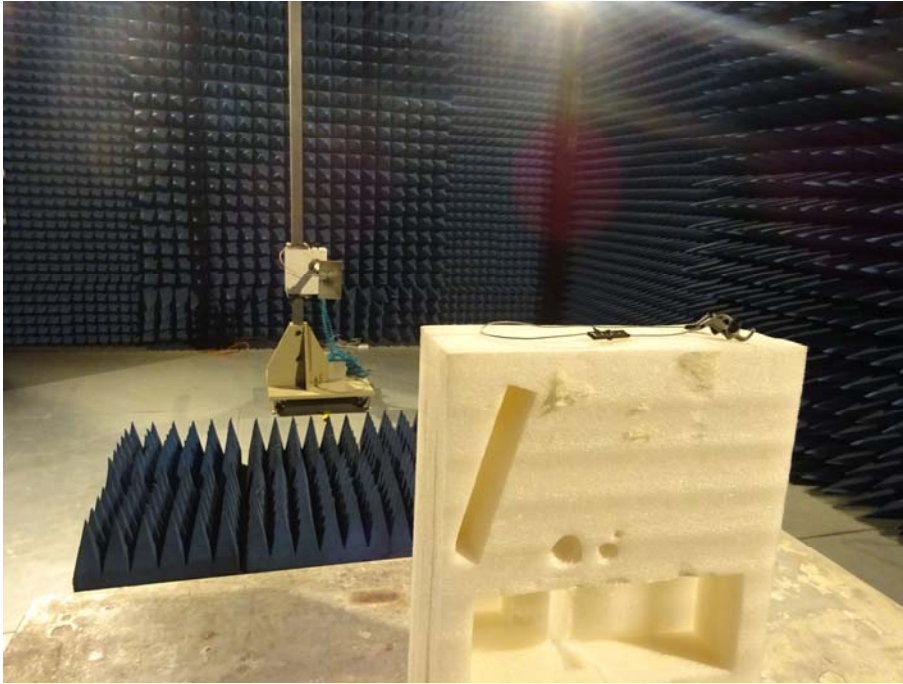

## Annex D. Label and Information

### FCC Label Sample

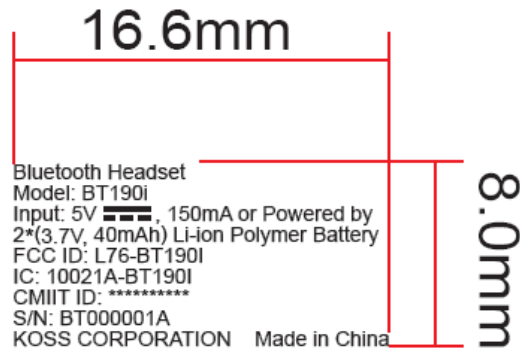

### FCC Label Specifications

Text is Black in color and is justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. Where the EUT is constructed in two or more sections connected by wires and marketed together, the above statement is required to be affixed only to the main control unit. When the EUT is so small or for such use that it is not practicable to place the statement on it, the above information shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.

### FCC Label Location



\*\*\*\*\* END OF REPORT \*\*\*\*\*