





Test Report No.:		19040102.r01		Page 1 of 47	
Client:	Endress+Hauser SE+Co.KG Hauptstrasse 1, 79689 Maulburg, Germany Contact: Harald Schäuble				
Test Item:	Digital System (DTS) Bluetooth Low Energy Adapter for Liquiphant ES series				
Identification:	VU121	Serial Number:	2539ZBTH_1810.0 (conducted sample) - (radiated sample)		
Project No.:	19040102	Date of Receipt:	April 29, 2019		
Testing Location:	TÜV Rheinland Nederland B.V. Eiberkamp 10 9351VT Leek				
Test Specification:	FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-18 Edition) RSS-Gen (Issue 5, April 2018) and RSS-247 (Issue 2, February 2017) ANSI C63.10-2013 KDB 558074 D01 DTS Meas Guidance v05.02				
Test Result:	The test item passed the test specification(s).				
Testing Laboratory:	TÜV Rheinland Nederland B.V. Eiberkamp 10 9351 VT Leek				
Tested by:			Reviewed by:		
2019-07-03	R. van der Meer / Inspector	2019-07-03	E. van der Wal / Reviewer		
Date	Name/Position	Signature	Date	Name/Position	Signature
Other Aspects: AC Power Line conducted emission tests were not requested as that will be tested in the final application.					
Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested					
This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V. The test results relate only to the item(s) tested.					

Test Report No.:

19040102.r01

Page 2 of 47

TEST SUMMARY

5.1.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT

RESULT: PASS

5.1.2 6dB AND 99% BANDWIDTH

RESULT: PASS

5.1.3 PEAK POWER SPECTRAL DENSITY

RESULT: PASS

5.1.4 Emissions on non restricted bands

RESULT: PASS

5.1.5 BAND EDGE CONDUCTED EMISSIONS

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

RESULT: PASS

5.2.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: N/A

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....	5
2.3	MEASUREMENT UNCERTAINTY	6
3.	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	SYSTEM DETAILS	7
3.3	COUNTERMEASURES TO ACHIEVE COMPLIANCE	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	TEST METHODOLOGY	9
4.2	OPERATION MODES	9
4.3	PHYSICAL CONFIGURATION FOR TESTING	10
4.4	TEST SOFTWARE	12
4.5	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
5.	TEST RESULTS	14
5.1	CONDUCTED MEASUREMENTS AT ANTENNA PORT.....	14
5.1.1	<i>Conducted Output Power.....</i>	<i>14</i>
5.1.2	<i>6dB and 99% Bandwidth.....</i>	<i>17</i>
5.1.3	<i>Peak Power Spectral Density</i>	<i>22</i>
5.1.4	<i>Emissions in non-restricted bands.....</i>	<i>25</i>
5.1.5	<i>Band Edge Conducted Emissions</i>	<i>28</i>
5.1.6	<i>Radiated Spurious Emissions of Transmitter.....</i>	<i>31</i>
5.2	AC POWER LINE CONDUCTED MEASUREMENTS.....	47

Test Report No.:

19040102.r01

Page 4 of 47

1. General Remarks

1.1 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 786213. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (*) : +15°C to +35°C
Relative humidity(*) : 20 % to 75 %
Supply voltage : 3 V_{DC}.

()When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.*

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
For Antenna Port Conducted Emissions					
Temperature-Humiditymeter	Extech	SD500	A00446	06/2018	06/2020
Spectrum Analyzer	Rohde & Schwarz	FSV	A01744	07/2018	07/2020
RF Cable	Huber + Suhner	Sucoflex 102	A00347	06/2018	06/2020
For Radiated Emissions					
Measurement Receiver	Rohde & Schwarz	ESR7	A01982	07/2018	07/2019
RF Cable S-AR	Gigalink	APG0500	A00447	03/2019	03/2020
Controller	Maturo	SCU/088/8090811	A00450	N/A	N/A
Controller	EMCS	DOC202	A00257	N/A	N/A
Test facility	Comtest	FCC listed: 786213 IC: 2932G-2	A00235	10/2017	10/2020
Spectrum Analyzer	Rohde & Schwarz	FSV	A00337	07/2018	07/2019
Antenna mast	EMCS	AP-4702C	A00258	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	A00444	06/2018	06/2019
Guidehorn 1-18 GHz	EMCO	3115	A00008	12/2017	12/2020
Guidehorn 18-40 GHz	EMCO	RA42-K-F-4B-C	A00012	01/2018	01/2021
Biconilog Testantenna	Teseq	CBL 6111D	A00466	11/2018	11/2019
2.4 GHz bandreject filter	BSC	XN-1783	A00065	N/A	N/A
Bandpass filter 4-10 GHz	Reactel	7AS-7G-6G-511	A00131	N/A	N/A
Bandpass filter 10-26 GHz	Reactel	9HS-10G/26.5G-S11	A00151	N/A	N/A
Preamplifier 0.5 - 18 GHz	Miteq	AMF-5D-005180-28-13p	A00247	N/A	N/A
Filterbox	EMCS	RFS06S	A00255	04/2019	04/2020

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing. NA= Not Applicable

Test Report No.:

19040102.r01

Page 6 of 47

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1.3GHz	1.7dB
	1.3 - 40GHz	2.9 – 3.4dB
Radiated Emission	150kHz - 30MHz	±5.0dB
	30MHz - 1GHz	±5.22dB
	> 1GHz	±5.22dB

3. General Product Information

3.1 Product Function and Intended Use

The brand Endress+Hauser model VU121, hereafter referred to as EUT, is a Bluetooth BLE transmitter. The transmitter will support and utilizes GFSK modulation techniques.

The content of this report and measurement results have not been changed other than the way of presenting the data.

3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Digital Transmission System, BLE
Manufacturer	:	Endress+Hauser SE+Co. KG
Brand	:	Endress+Hauser
Model(s)	:	VU121
FVIN	:	S112 v6.1.1
Voltage input rating	:	3 Vdc (2.7 – 5.5 Vdc)
Voltage output rating	:	--
Current input rating	:	--
Antenna	:	Internal, integrated on the PCB
Antenna Gain	:	0.4 dBi
Operating frequency	:	2402 MHz-2480 MHz.
Modulation	:	GFSK
Data-rate	:	1 Mbps
Remarks	:	n.a.

Test Report No.:

19040102.r01

Page 8 of 47

Table 3: Interfaces present on the EUT

There are no interface ports present on the EUT.

3.3 Countermeasures to achieve compliance

No additional measures were employed to achieve compliance.

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-247, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247.

The test methods, which have been used, are based on ANSI C63.10-2013 and KDB 558074.

4.2 Operation Modes

Testing was performed at the lowest operating frequency (2402 MHz), at the operating frequency in the middle of the specified frequency band (2440 MHz) and at the highest operating frequency (2480 MHz). These operation modes were selected after review of the capabilities and characteristics of the EUT. The test software as mentioned in section 4.4 enabled the settings of these modes.

The EUT has been tested in the modes as described in table below

Operation Mode	EUT Status	Frequency (MHz)	TX power control setting
Transmit (Tx)	On	2402 (Ch 0)	max
Transmit (Tx)	On	2440 (Ch 19)	max
Transmit (Tx)	On	2480 (Ch 39)	max

The EUT was set in payload model PRBS9 with a payload length of 37 Bytes.


4.3 Physical Configuration for Testing

For programming purposes only the EUT was connected to the usb port of a laptop computer. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel as specified in the test data. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis and the test system was configured in a way that a load condition was emulated by a bicycle wheel that was spun by a controllable speed.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

Figure 1: Test Setup Diagram – antenna port conducted tests and programming.

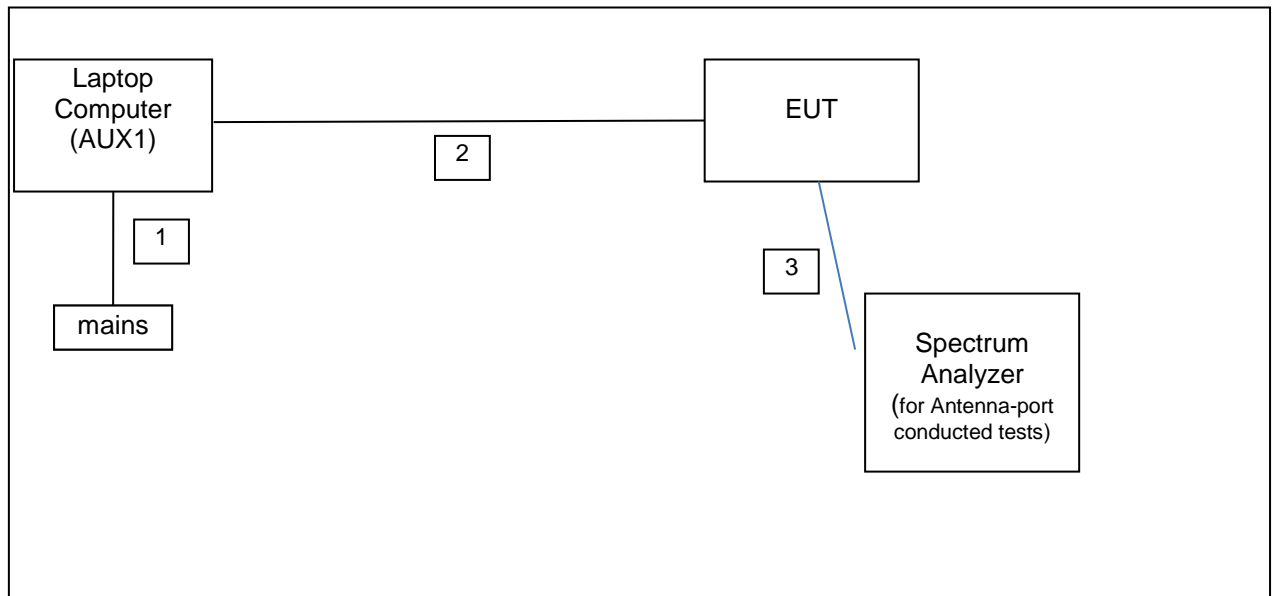

No.	Port	From	To	Remarks
1.	Mains	Mains	Laptop (AUX1)	Through a power supply
2.	Data com.	Laptop USB	EUT	--
3.	Antenna port	EUT	Spectrum analyzer	Conducted tests

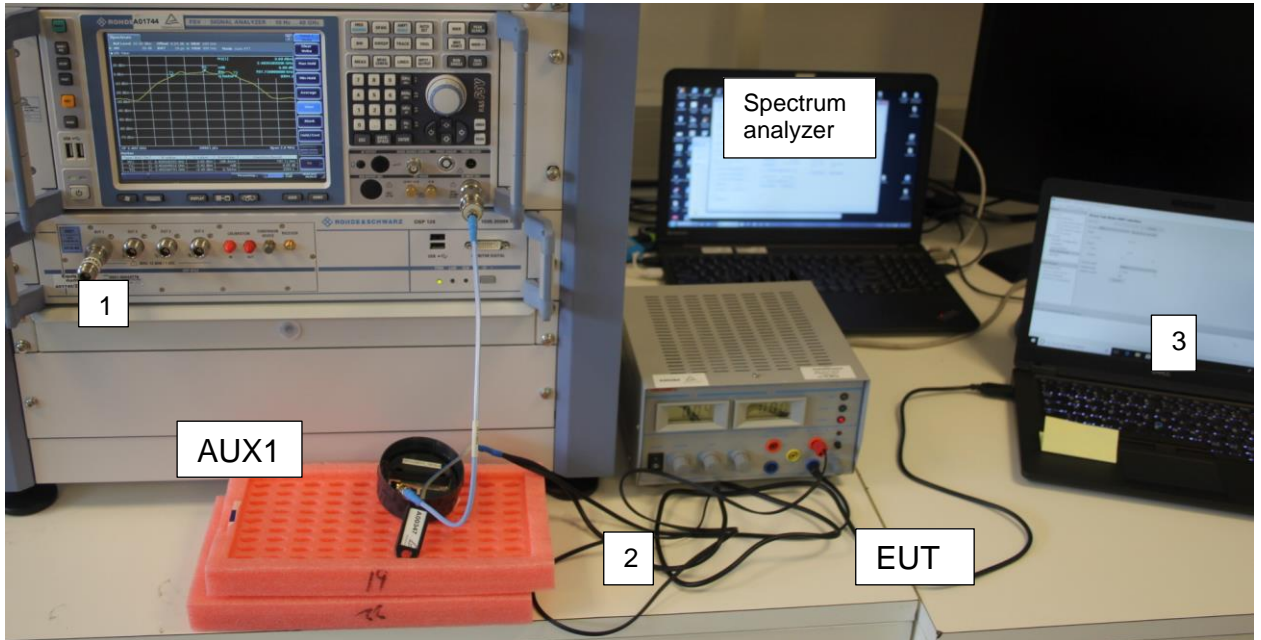


Figure 2: Test Setup Photos – conducted tests and programming



Figure 3: Test Setup Photos – radiated tests and programming


4.4 Test Software

A continuous transmit mode could be initiated by using test software as supplied by the applicant. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : Nordic nRFgo studio

In Direct Test mode a modulated wave with payload PRBS9, payload length 37 was set.

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

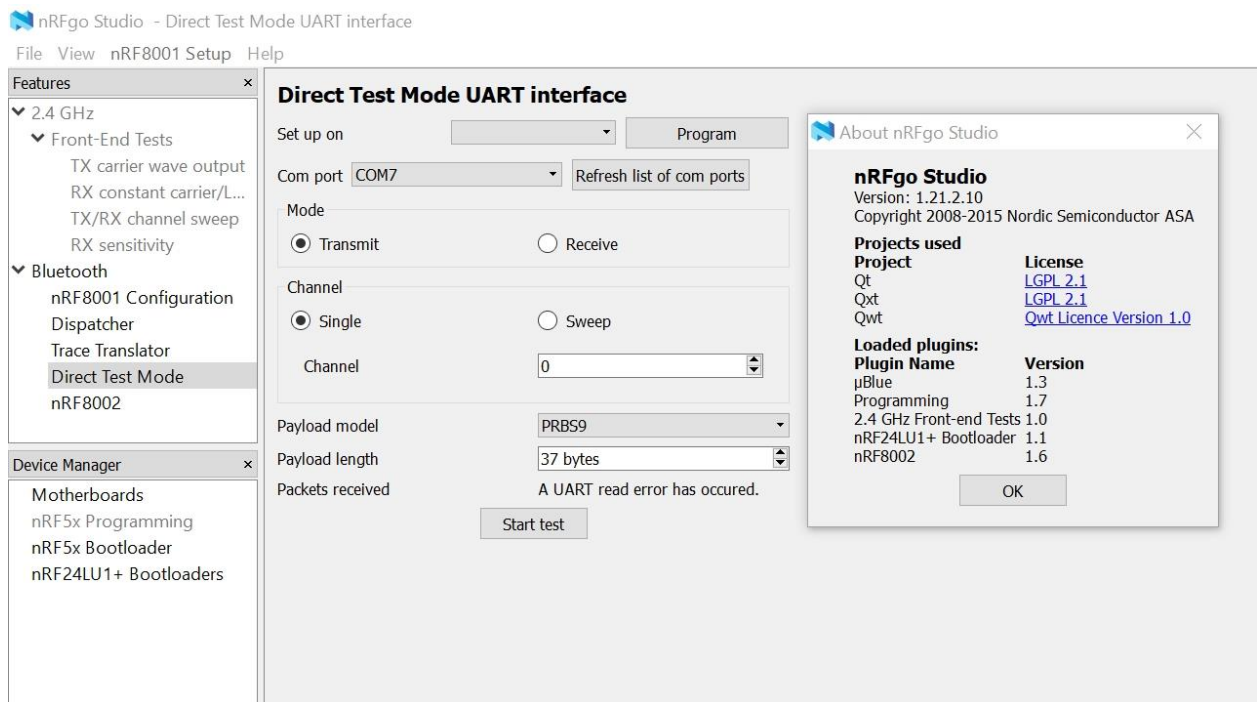

Screenshot of the software as used on AUX1

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

The auxiliary items were not used during testing, but instead are only used to make the required settings for testing. For setting the transmit frequency, enable modulation etc.

1. AUX1
Product: Laptop Computer
Brand: DELL
Model: 5490
Assetnumber: A000223238-001
Remark: host for test software, property applicant



Test Report No.:

19040102.r01

Page 14 of 47

5. Test Results

5.1 Conducted Measurements at Antenna Port

5.1.1 Conducted Output Power

RESULT: PASS

Date of testing: 2019-05-06

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

RSS-247 section 5.4(4): the e.i.r.p. shall not exceed 4 W (+36 dBm).

Test procedure:

The Peak Conducted Output Power was measured using the method according to section 11.9.1.1 in ANSI C63.10-2013.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Measurement uncertainty is +/- 2.5 dB.

Notes: $mW = 10^{(dBm/10)}$
 $dBm = 10 \times \log(mW)$

plots : Peak power plots,

Figures 1a, 1b and 1c show plots of the Peak Power outputs, correction factors (= 0.24dB Cableloss) included in the reading.


Test Report No.:

19040102.r01

Page 15 of 47


Conducted Output Power

Frequency [MHz]	Output Power [dBm] (W)	Limit [dBm] (W)	Verdict [Pass/Fail]	Plot number
2402	3.71 (0.00235 W)	+30 (1W)	Pass	A
2440	3.76 (0.00238 W)	+30 (1W)	Pass	B
2480	3.77 (0.00238 W)	+30 (1W)	Pass	C

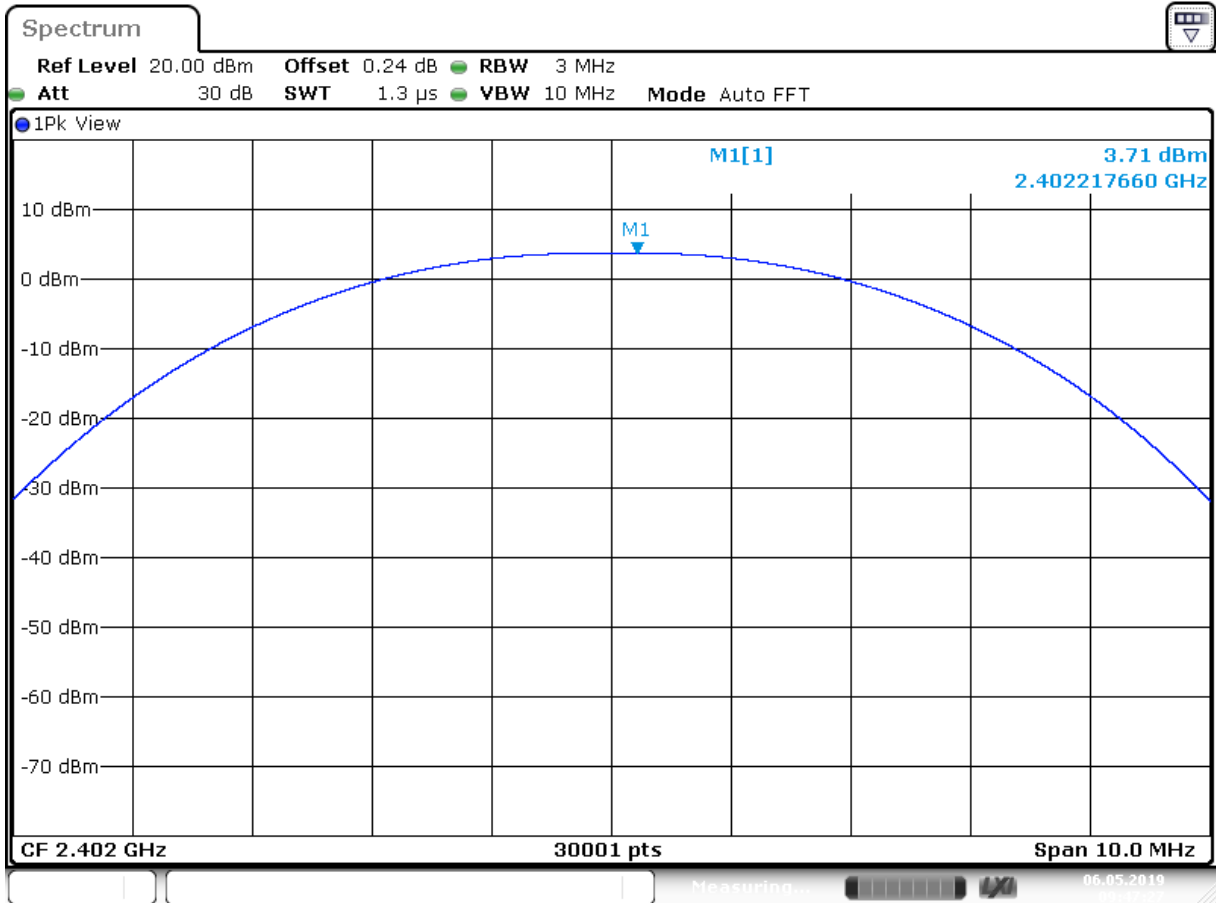


Date: 6 MAY 2019 09:47:27

Plot A

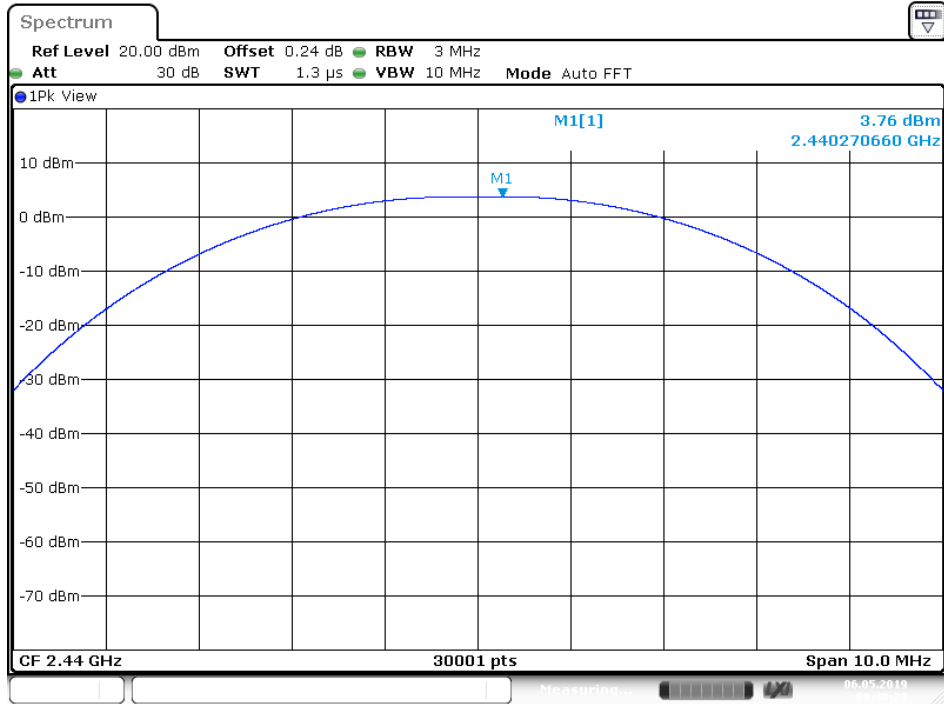

Plot B

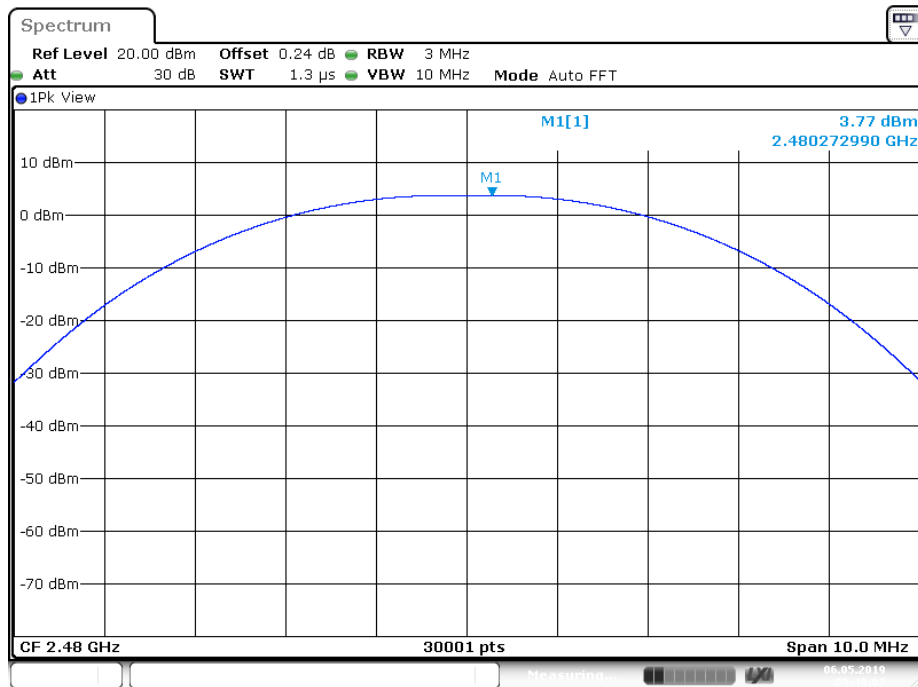

Plot C

Test Report No.:

19040102.r01

Page 17 of 47

5.1.2 6dB and 99% Bandwidth

RESULT: PASS

Date of testing: 2019-05-06 & 2019-07-03

Requirements:

FCC 15.247(a)(2) and RSS-247 Section 5.2(1)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 6dB bandwidth:

ANSI C63.10-2013 section 11.8.1 Option 1

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Measurement uncertainty is +/- 26kHz.

Plots A1,B1 and C1 shown on the next pages are of the 6 dB bandwidth.

Plots A2,B2 and C2 shown on the next pages are of the 99% bandwidth


Test Report No.:

19040102.r01

Page 18 of 47


6dB and 99 percent Bandwidth

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit 6dB BW [kHz]	Verdict [Pass/Fail]	Plot number
2402	1040.1	707.7	>500	Pass	A1/A2
2440	1044.4	711.4	>500	Pass	B1/B2
2480	1045.5	712.0	>500	Pass	C1/C2

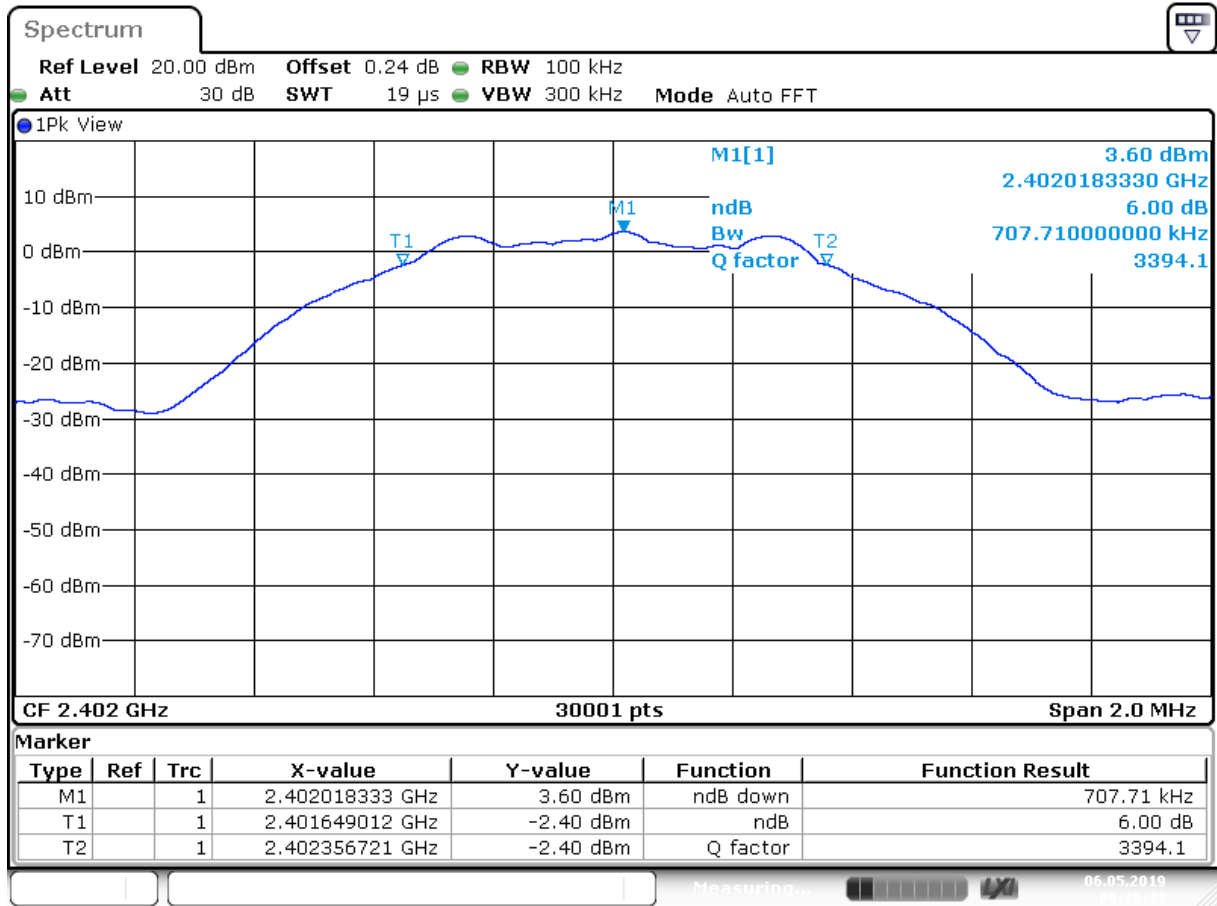


Date: 6 MAY 2019 09:29:34


Plot A1

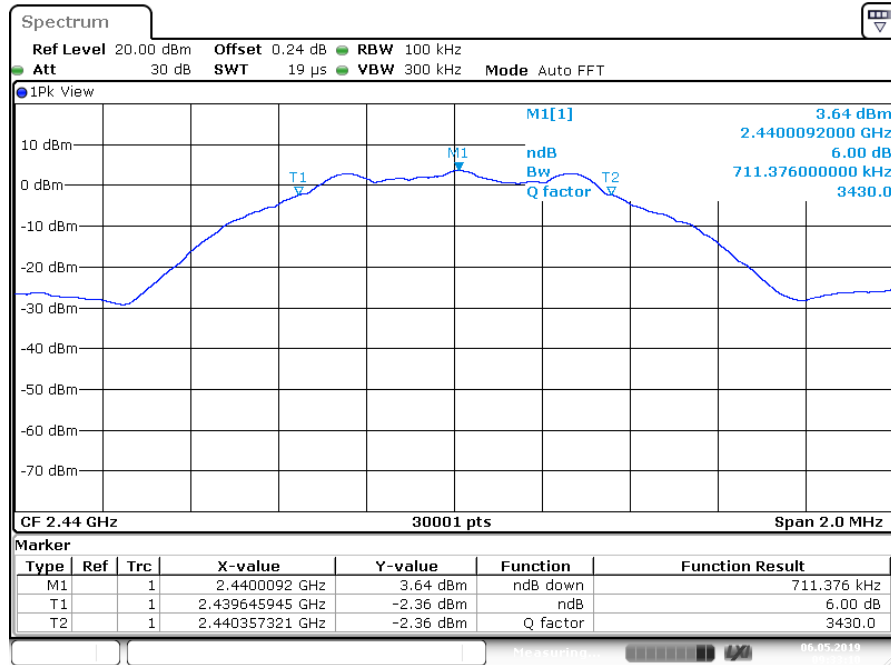

Plot B1

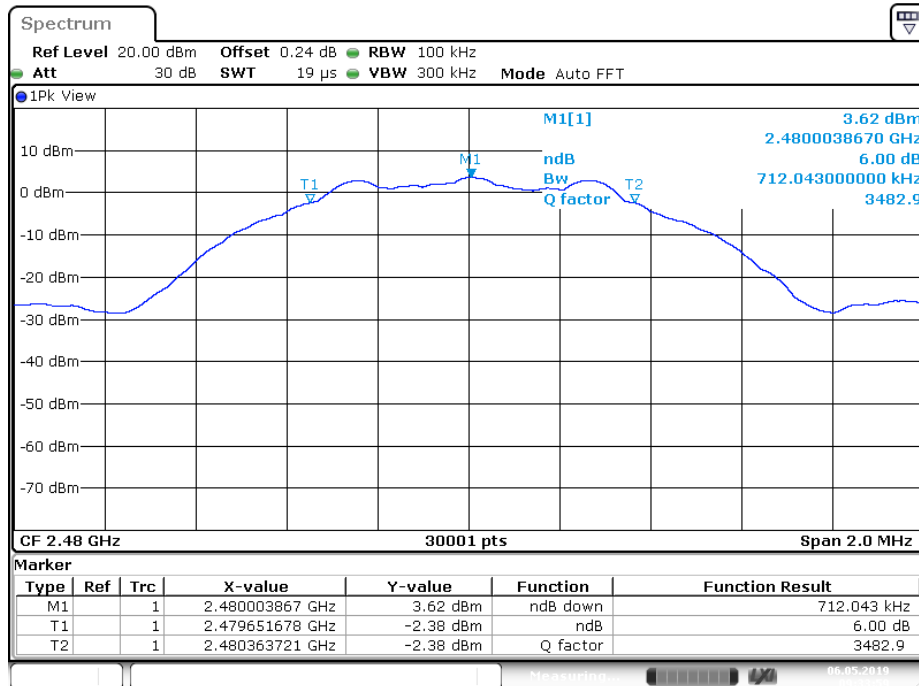


Plot C1

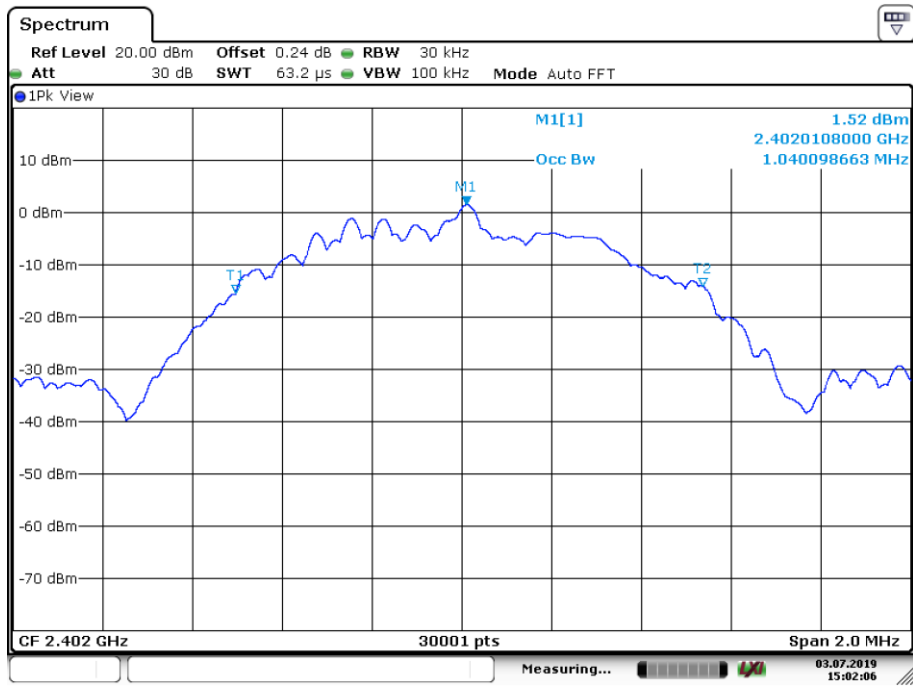

Date: 3.JUL.2019 15:02:06

Plot A2

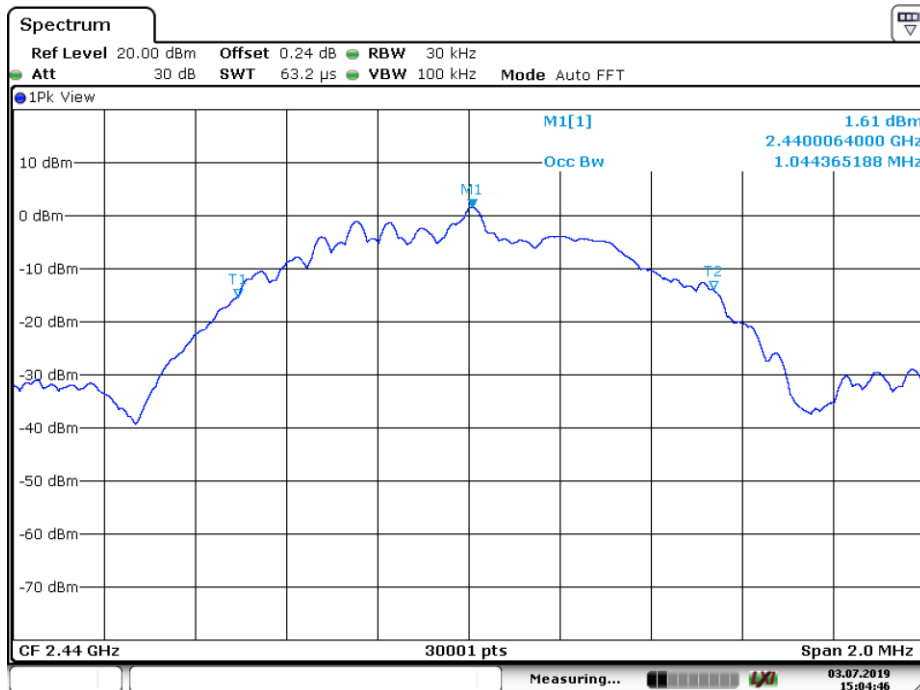


Date: 3.JUL.2019 15:04:46

Plot B2

Test Report No.:

19040102.r01

Page 21 of 47

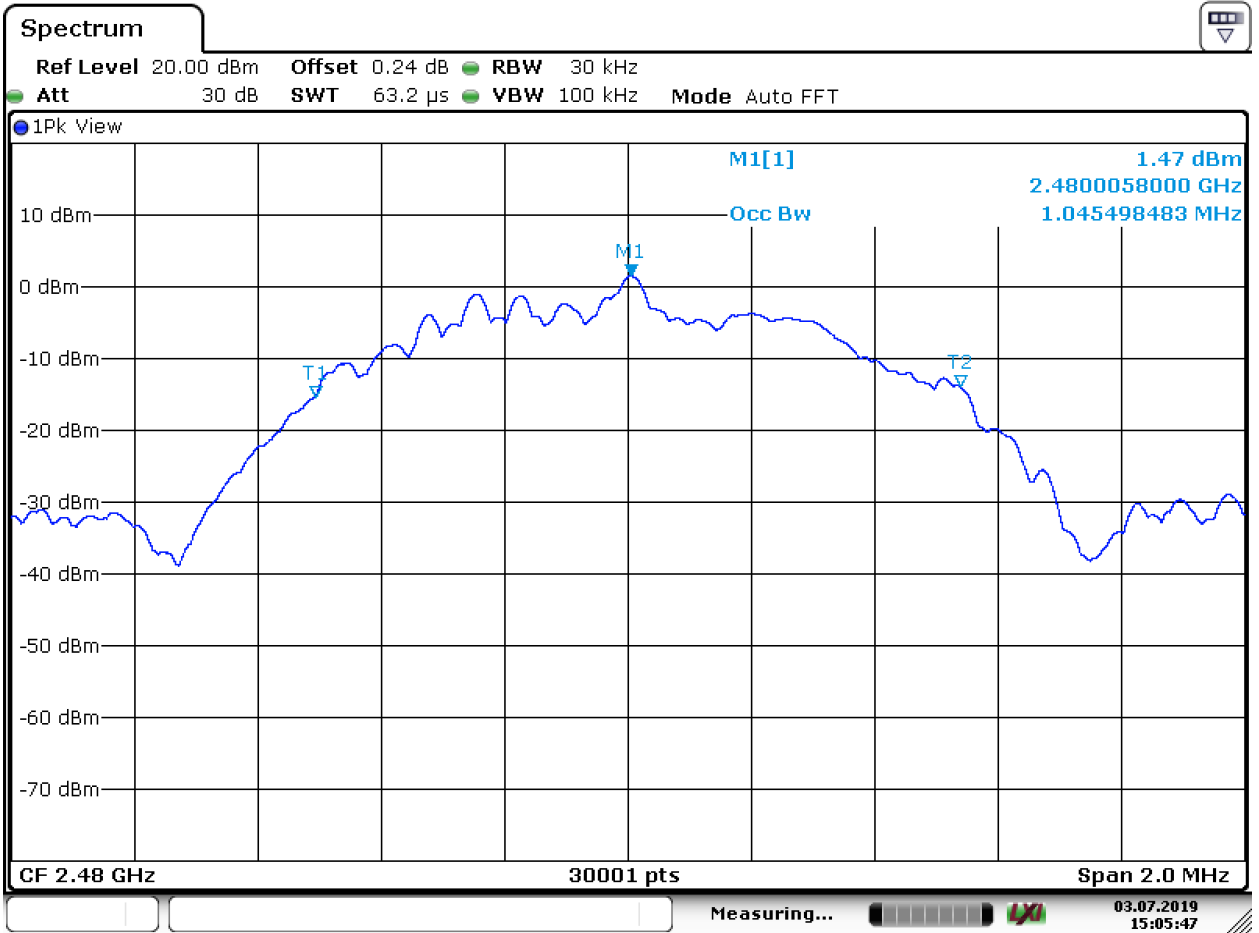

Date: 3.JUL.2019 15:05:46

Plot C2

Test Report No.:

19040102.r01

Page 22 of 47

5.1.3 Peak Power Spectral Density

RESULT: Pass

Date of testing: 2019-05-06

Requirements:

FCC 15.247(e) and RSS-247 section 5.2(2)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10-2013

The section 11.10.2 PKPSD peak PSD procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables (0.24 dB).

Measurement uncertainty is +/- 1.1 dB.


Test Report No.:

19040102.r01

Page 23 of 47


Peak Power Spectral Density

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2402	-11.8	8	Pass	A
2440	-11.7	8	Pass	B
2480	-11.6	8	Pass	C

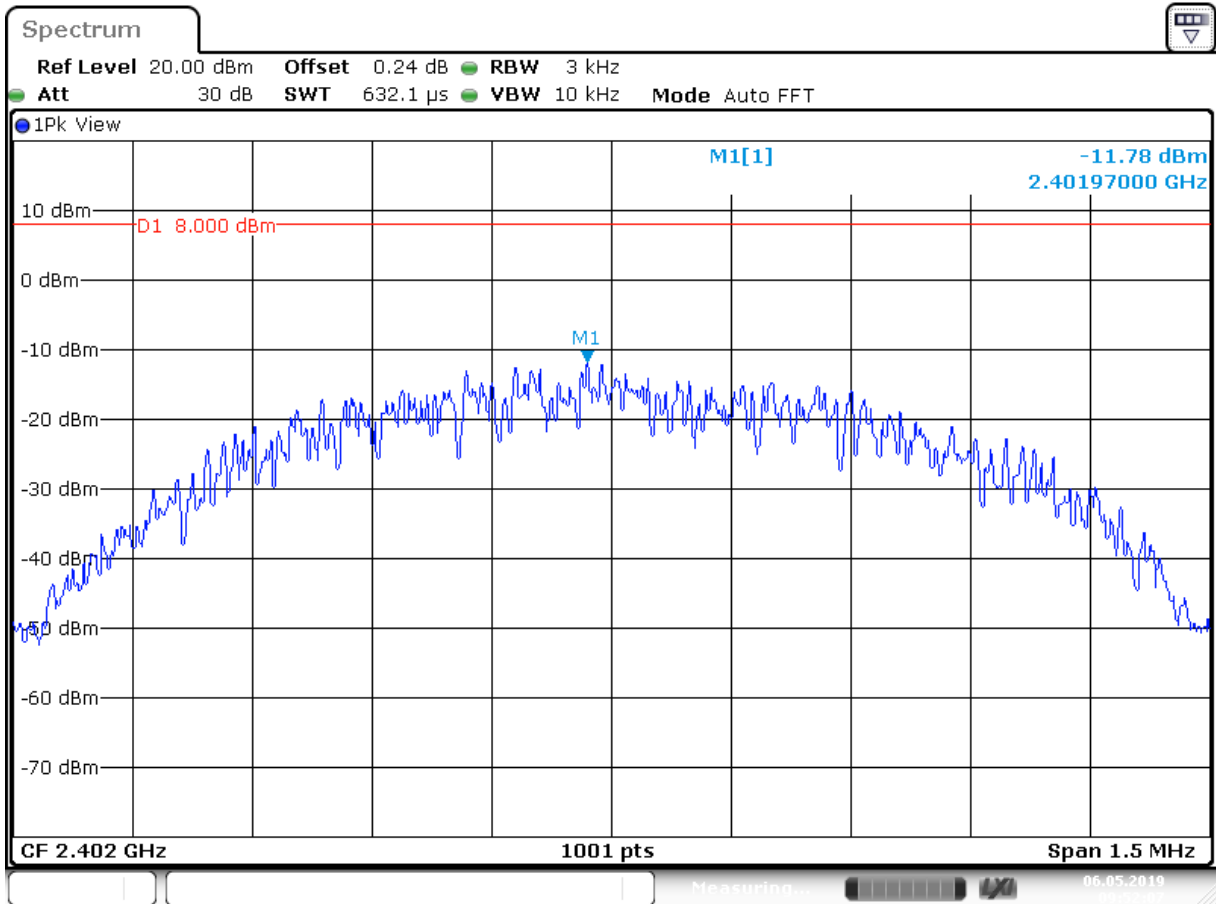


Date: 6 MAY 2019 09:52:07

Plot A

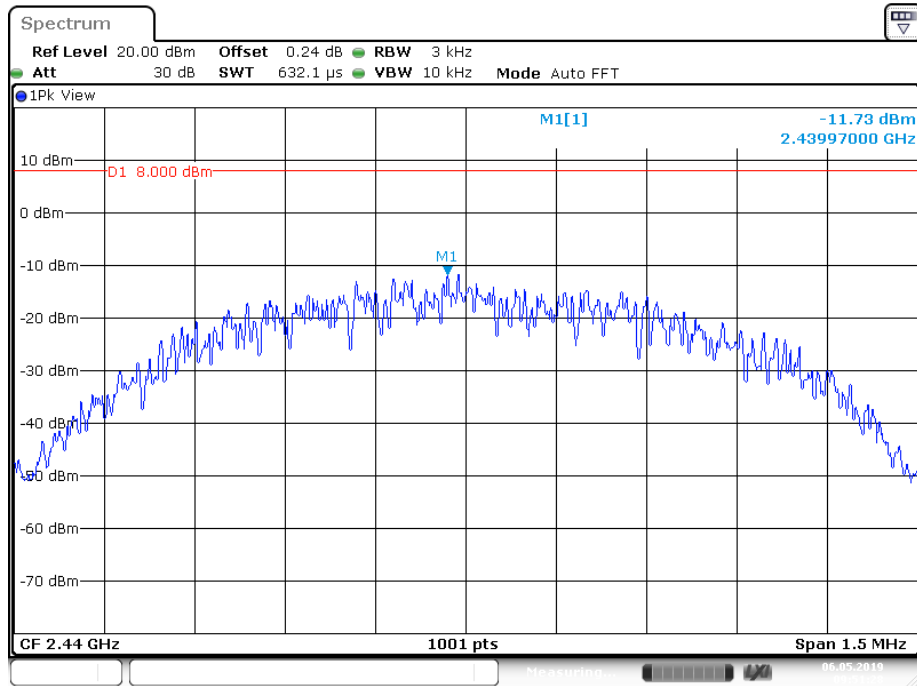

Plot B

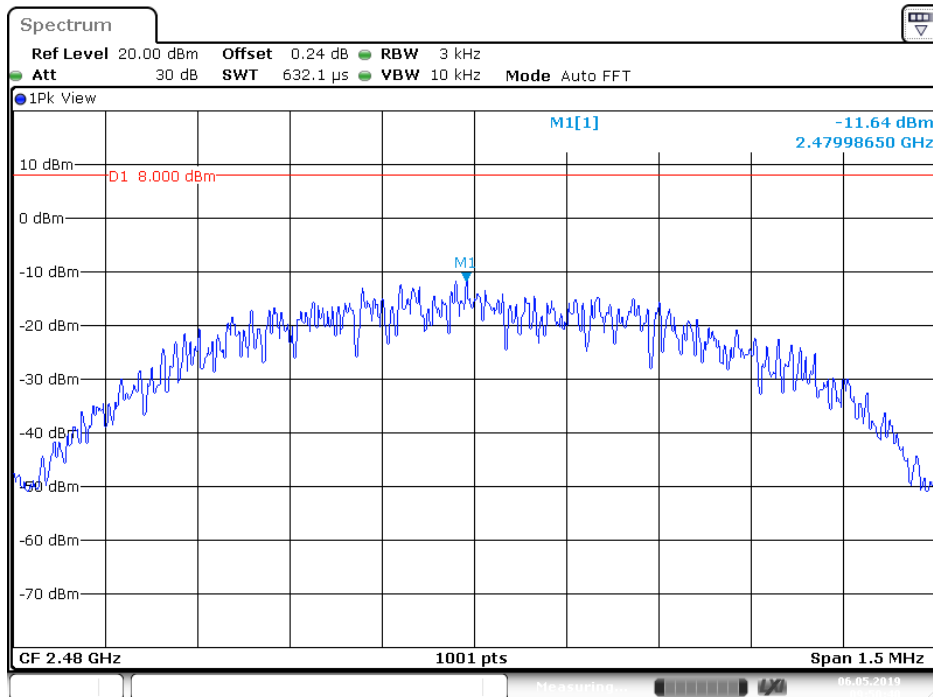

Plot C

Test Report No.:

19040102.r01

Page 25 of 47

5.1.4 Emissions in non-restricted bands

RESULT: Pass

Date of testing: 2019-05-06

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10-2013
KDB 558074 D01 DTS Meas Guidance v05.02
Section 11.13

A RF conducted measurement was done using the marker-delta method, as described in ANSI C63.10.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:
RBW = 100kHz, VBW = 300kHz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.


Measurement uncertainty is +/- 2.5 dB.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.


Test Report No.:

19040102.r01


Page 26 of 47

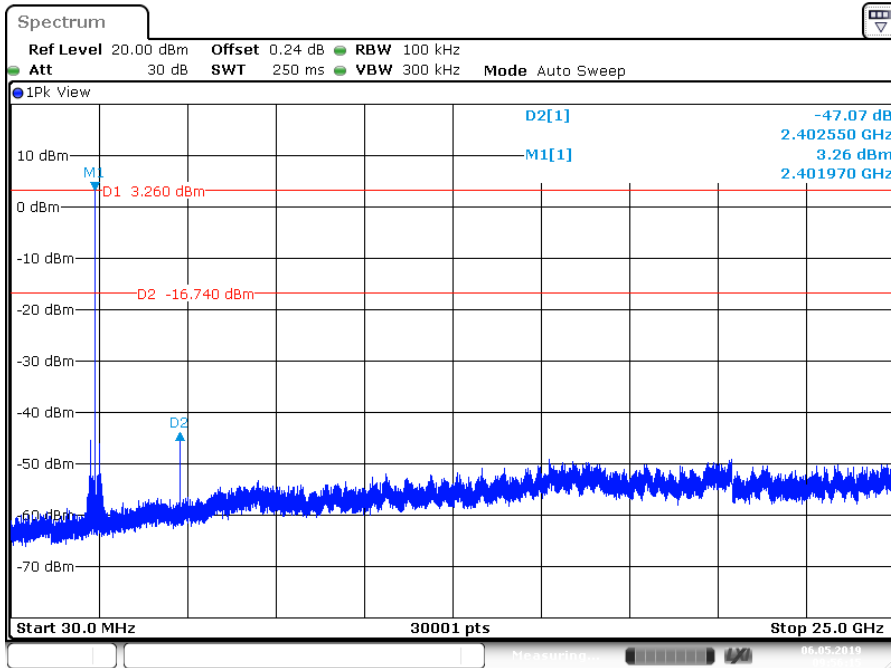

Plot: Emissions in non restricted bands, Spectral Diagram @2402 MHz

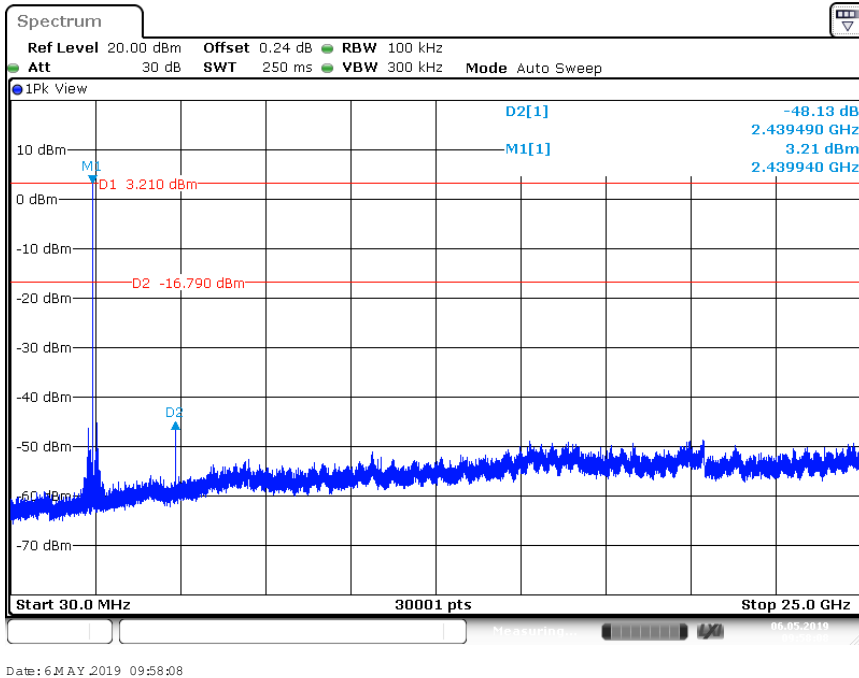

Plot: Emissions in non restricted bands, Spectral Diagram @2440 MHz

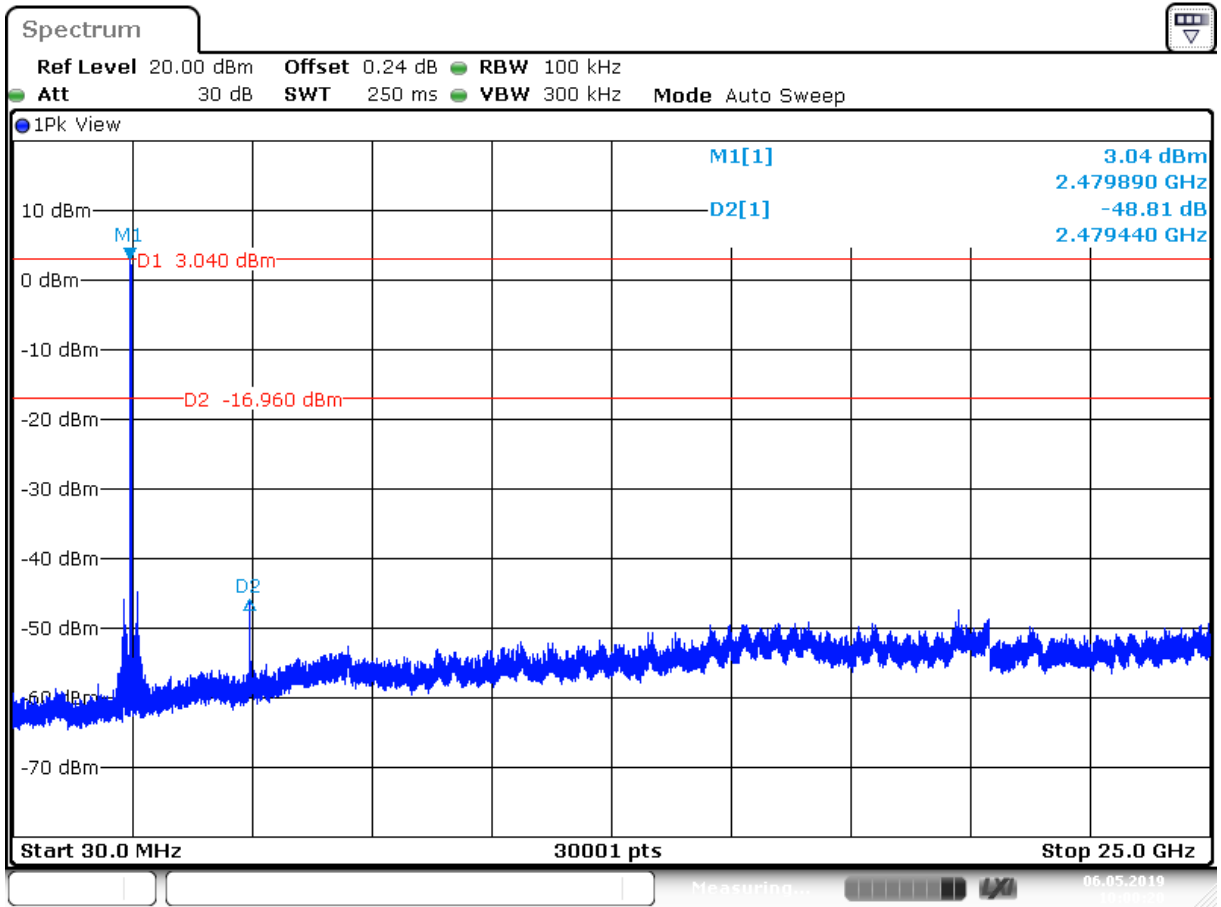

Date: 6 MAY 2019 10:00:20

Plot: Emissions in non restricted bands, Spectral Diagram @2480 MHz

Test Report No.:

19040102.r01

Page 28 of 47

5.1.5 Band Edge Conducted Emissions

RESULT: Pass

Date of testing: 2019-07-03

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10-2013
KDB 558074 D01 DTS Meas Guidance v05.02

A RF conducted measurement was done using the marker-delta method, as described in ANSI C63.10.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:
RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report. Measurement uncertainty is +/- 2.5 dB.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

Test Report No.:


19040102.r01

Page 29 of 47

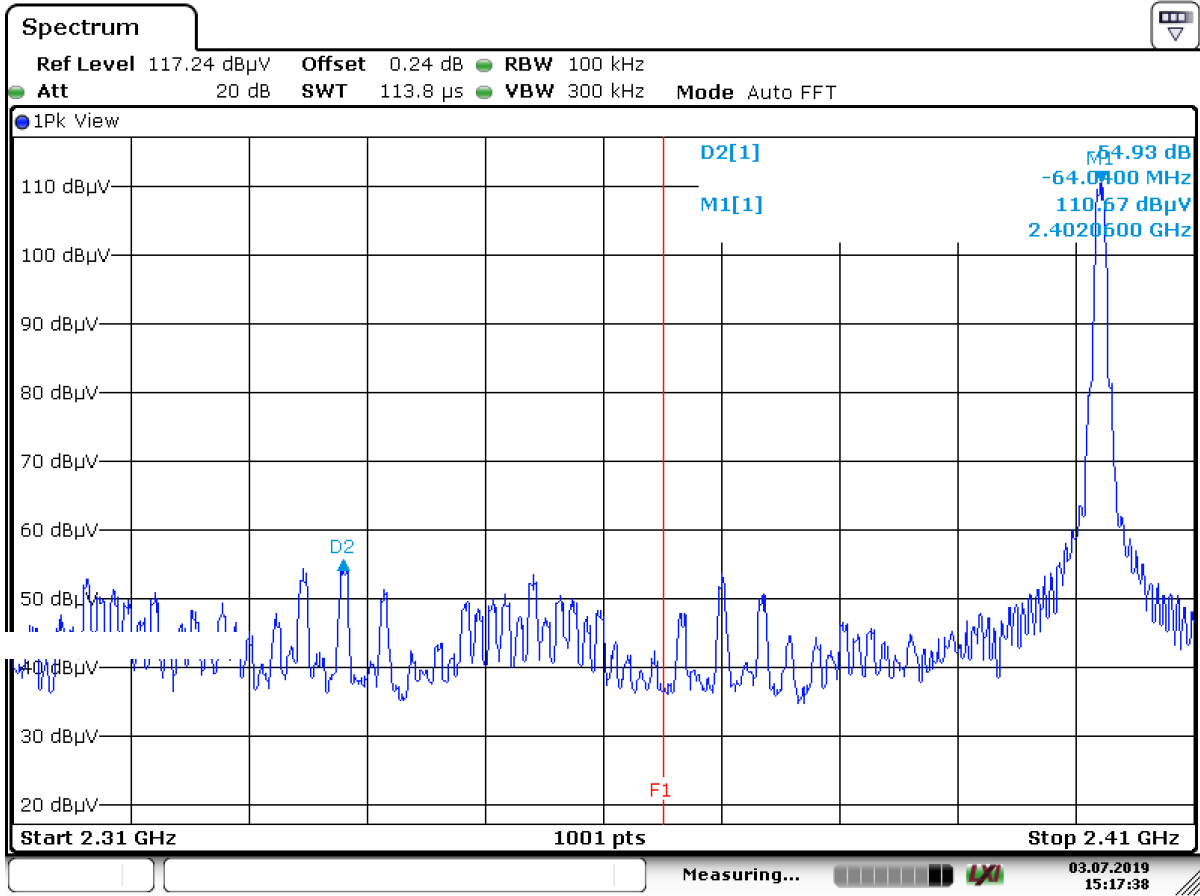

Date: 3.JUL.2019 15:17:39

Plot: Band Edge Conducted Emission, Spectral Diagram, 2402 MHz, showing more than 20 dBc, F1 shows the band edge frequency of 2400 MHz.

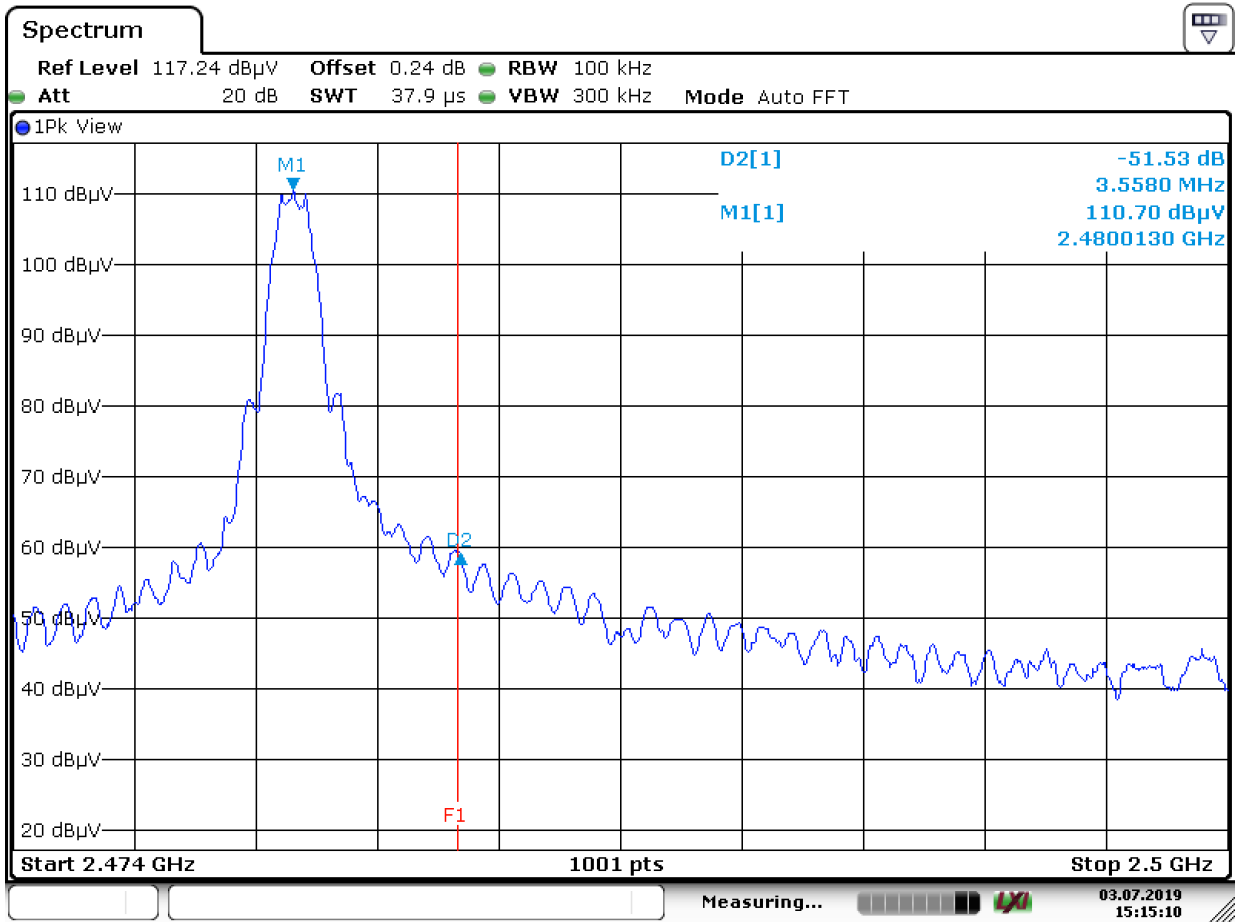

Date: 3.JUL.2019 15:15:11

Plot: Band Edge Conducted Emission, Spectral Diagram, 2480 MHz, showing more than 20 dBc.
F1 shows the band edge frequency of 2483.5 MHz.

Test Report No.:

19040102.r01

Page 31 of 47

5.1.6 Radiated Spurious Emissions of Transmitter

RESULT: Pass

Date of testing: 2019-05-21

Frequency range: 30MHz - 25GHz

Requirements:

FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen Table 6, must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen Table 4.

Test procedure:

ANSI C63.10-2013

KDB 558074 D01 DTS Meas Guidance v05.02

The EUT was placed on the testsite turntable. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.


At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. Where Peak (Pk) values were at least 6 dB under the Average (Av) limits, Av value was not tested. Where Average values were tested, Average values were measured using at least 10 kHz Video Bandwidth.

Radiated Emissions, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations


Frequency [MHz]	Antenna Orientation	Level QP [dBµV/m]	Limit QP [dBµV/m]	Verdict [Pass/Fail]
114.1	Vertical	23.4	43.5	Pass
143.7	Vertical	21.5	43.5	Pass
161.6	Horizontal	18.4	43.5	Pass
191.7	Vertical	33.5	43.5	Pass
239.7	Horizontal	25.0	46.0	Pass
800-960 noise	Vertical	28.0	46.0	Pass

- Notes:
- Level QP = Reading QP + Factor
 - Tested in modes as described in section 4.2, the 6 highest values noted. Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating mode or frequency.
 - Quasi Peak detector used with a bandwidth of 120 kHz.
 - Measurement uncertainty is +/- 5.22 dB.

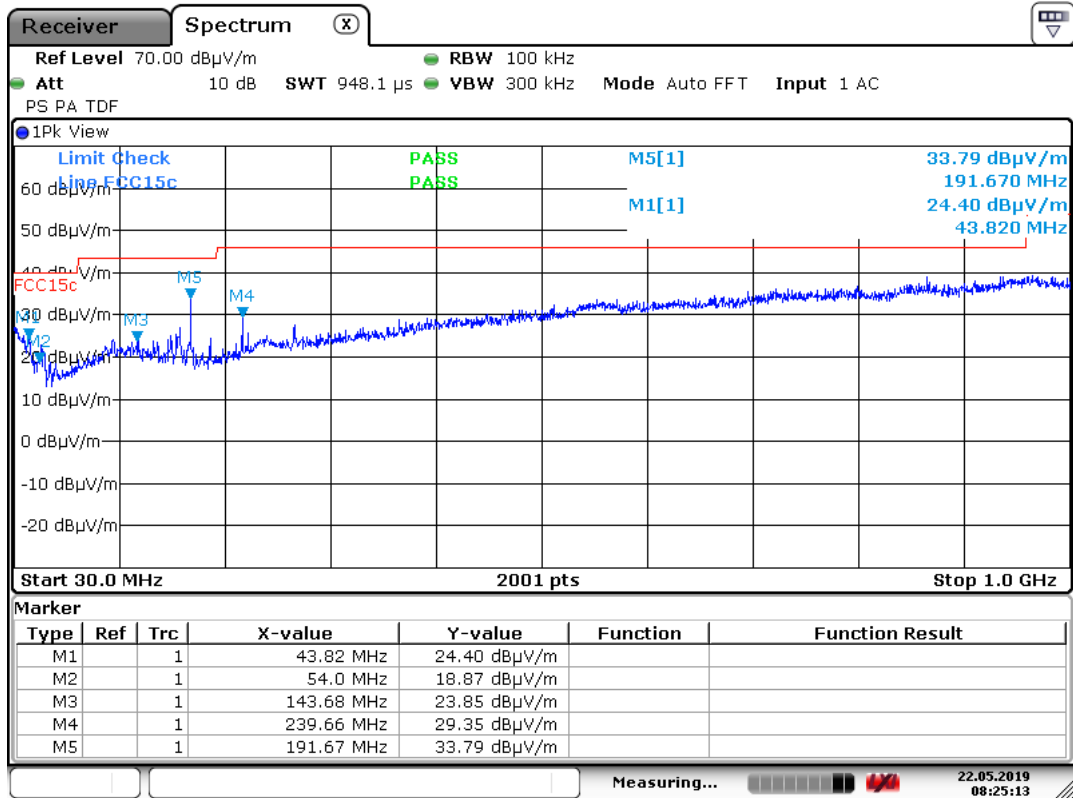


Date: 22.MAY.2019 08:25:12

Plot of the emissions (Peak detector values shown),
 EUT Horizontal-Antenna Horizontal @2402 MHz
 M1, M2 are from the AUX1 (test lab power supply)

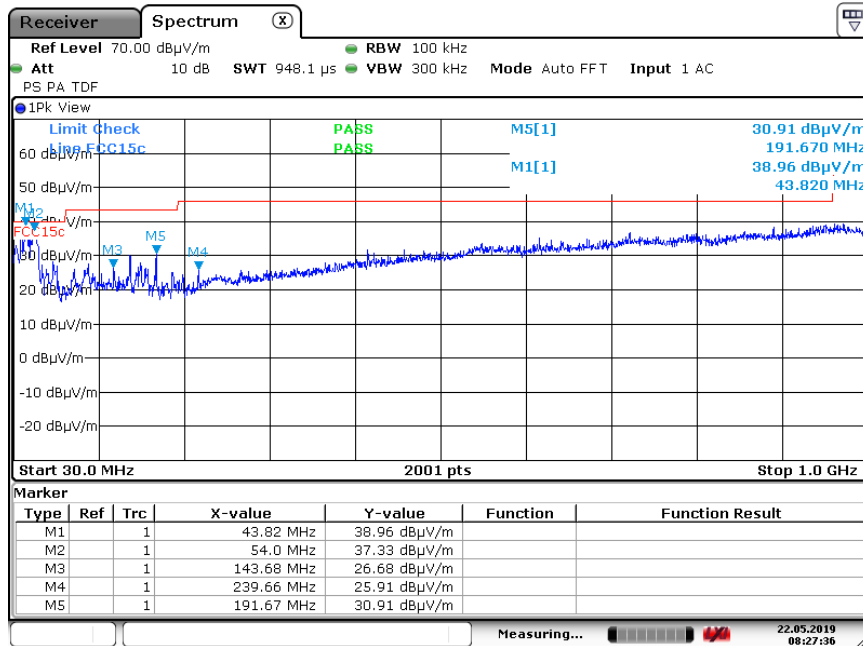


Date: 22.MAY.2019 08:27:37

Plot of the emissions (Peak detector values shown),
 EUT Horizontal-Antenna Vertical @2402 MHz
 M1, M2 are from the AUX1 (test lab power supply)

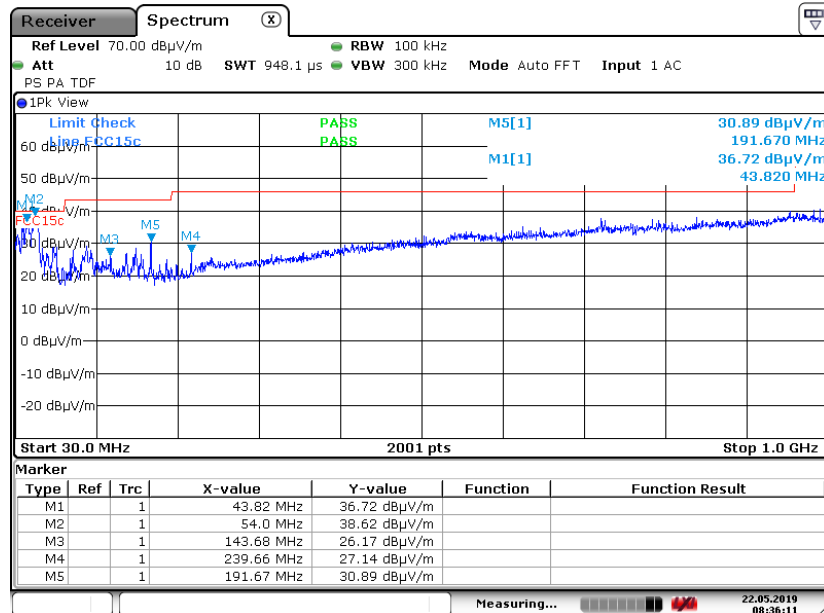


Date: 22.MAY.2019 08:36:10

Plot of the emissions (Peak detector values shown),
 EUT Vertical-Antenna Vertical @2402 MHz
 M1, M2 are from the AUX1 (test lab power supply)

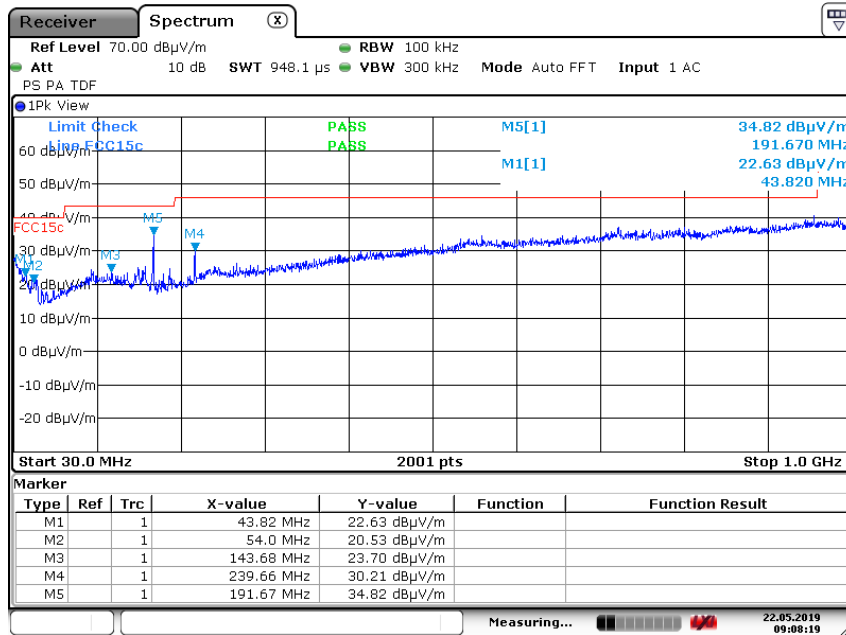

Plot of the emissions (Peak detector values shown),
 EUT Vertical-Antenna Horizontal @2440 MHz
 M1, M2 are from the AUX1 (test lab power supply)

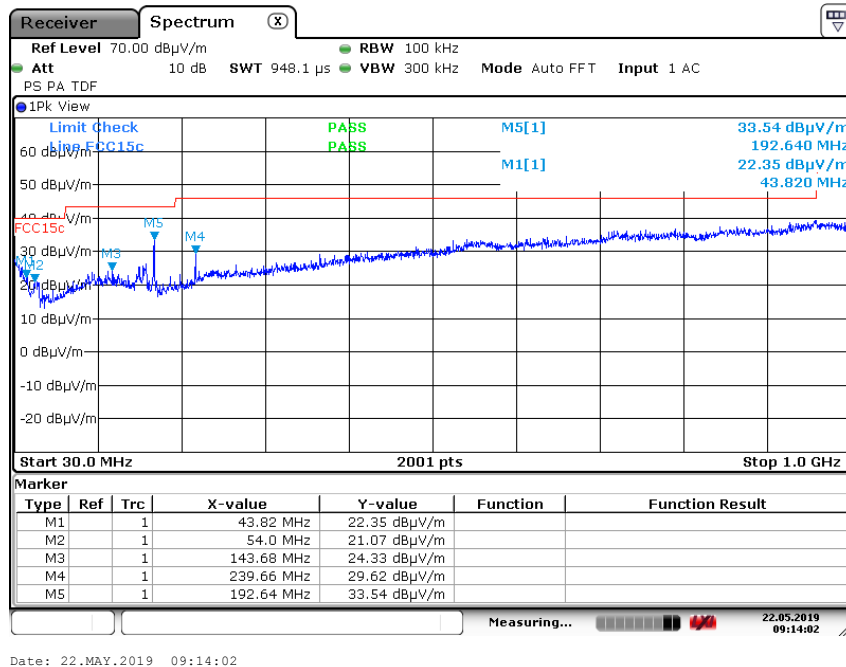

Plot of the emissions (Peak detector values shown),
 EUT Vertical-Antenna Horizontal @2480 MHz
 M1, M2 are from the AUX1 (test lab power supply)

Test Report No.:

19040102.r01

Page 35 of 47

Radiated Emissions, 1 - 25GHz, 2402 MHz.

Frequency [MHz]	EUT Orientation/ Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBµV/m]	Limit [dBµV/m]	Result
1440	V / H	Pk	1	38.5	54 (Av) 74 (Pk)	Pass
2275	V / H	Pk	1	48.5	54 (Av) 74 (Pk)	Pass
2312.5 ^{*R} (restricted band 2310-2390)	H / H	Pk	1	49.6	54 (Av) 74 (Pk)	Pass
2483.6 ^{*R} (restricted band 2483.5-2500)	V / H	Pk	1	50.0	54 (Av) 74 (Pk)	Pass
4804 ^{*H}	V / V	Pk	1	54.8 Pk 53.1 Av	54 (Av) 74 (Pk)	Pass
7206 ^{*H}	V / V	Pk	1	55.4 Pk 53.1 Av	54 (Av) 74 (Pk)	Pass
9608 ^{*H}	V / V	Pk	1	53.0 Pk 48.6 Av	54 (Av) 74 (Pk)	Pass

Radiated Emissions, 1 - 25GHz, 2440 MHz.

Frequency [MHz]	EUT Orientation/ Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBµV/m]	Limit [dBµV/m]	Result
1440	V / H	Pk	1	40.1	54 (Av) 74 (Pk)	Pass
2312.5 ^{*R} (restricted band 2310-2390)	H / H	Pk	1	49.6	54 (Av) 74 (Pk)	Pass
2483.6 ^{*R} (restricted band 2483.5-2500)	V / H	Pk	1	50.0	54 (Av) 74 (Pk)	Pass
2568.5	H / H	Pk	1	52.2	54 (Av) 74 (Pk)	Pass
4880 ^{*H}	V / V	Pk	1	53.6 Pk 53.6 Av	54 (Av) 74 (Pk)	Pass
7320 ^{*H}	V / V	Pk	1	53.5 Pk 49.9 Av	54 (Av) 74 (Pk)	Pass
9759 ^{*H}	V / V	Pk	1	52.0 Pk 46.6 Av	54 (Av) 74 (Pk)	Pass
22391	V / V	Pk	1	47.6	54 (Av) 74 (Pk)	Pass

Test Report No.:

19040102.r01


Page 36 of 47

Radiated Emissions, 1 - 25GHz, 2480 MHz.

Frequency [MHz]	EUT Orientation/ Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBµV/m]	Limit [dBµV/m]	Result
1440.7	V / H	Pk	1	38.7	54 (Av) 74 (Pk)	Pass
2339.5 ^{*R} (restricted band 2310-2390)	V / H	Pk	1	49.0	54 (Av) 74 (Pk)	Pass
2483.55 ^{*R} (restricted band 2483.5-2500)	V / H	Pk	1	52.8	54 (Av) 74 (Pk)	Pass
4960 ^{*H}	V / V	Pk	1	50.4 Pk 50.1 Av	54 (Av) 74 (Pk)	Pass
7440 ^{*H}	V / V	Pk	1	54.4 Pk 49.9 Av	54 (Av) 74 (Pk)	Pass
9919 ^{*H}	V / V	Pk	1	52.0 Pk 46.9 Av	54 (Av) 74 (Pk)	Pass
12399	V / V	Pk	1	47.5	54 (Av) 74 (Pk)	Pass


- Notes:
- *R refers to a frequency in a restricted band,
 - *H refers to a frequency which is a harmonic of the fundamental.
 - Field strength values of radiated emissions not listed in the tables above are more than 20 dB below the applicable limit.
 - Measurement uncertainty is +/- 5.5 dB.
 - a selection of plots is provided on the next pages

Plots of the radiated emissions

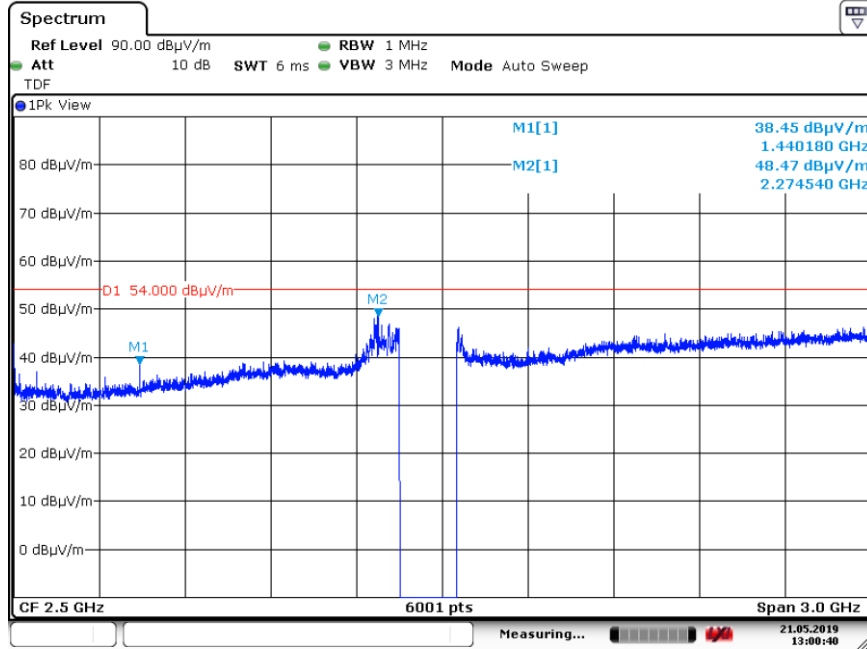

Date: 21.MAY.2019 13:00:40

Plot of the emissions at 2402 MHz, EUT Vertical, Horizontal polarization, Peak values shown gap in the plot is of the used Notch filter

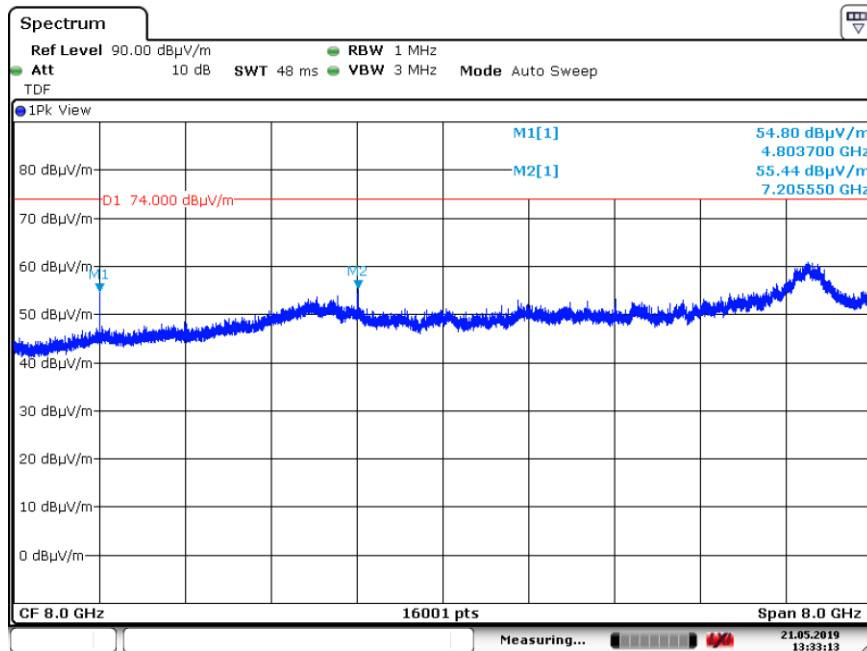


Date: 21.MAY.2019 13:33:13

Plot of the emissions at 2402 MHz, range 4 to 12 GHz, EUT Vertical, Vertical polarization, Peak values shown

Test Report No.:


19040102.r01

Page 38 of 47

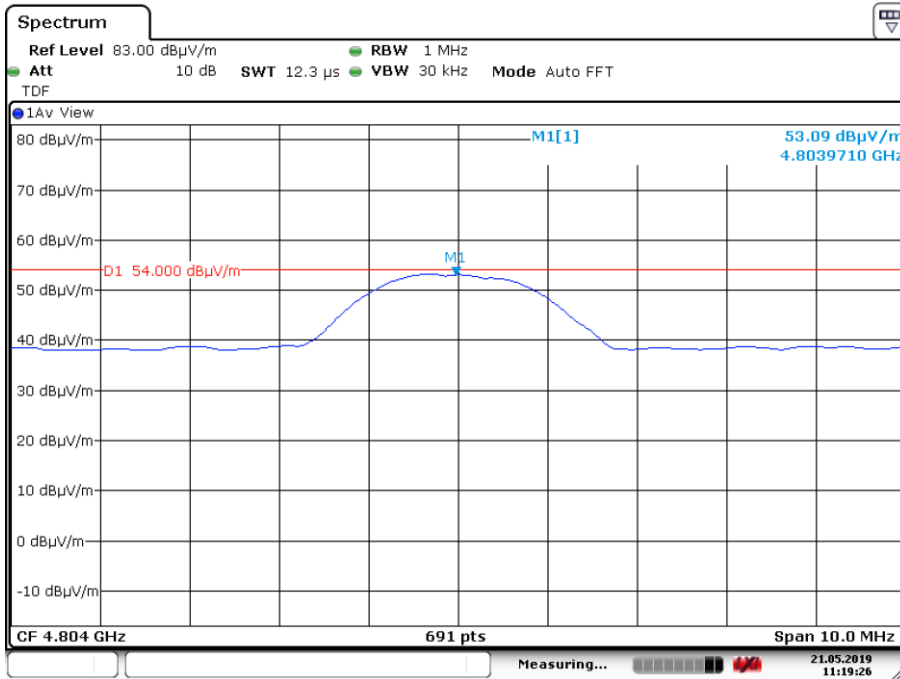

Date: 21.MAY.2019 11:19:26

Plot of the emissions at 2402 MHz, EUT Vertical, Vertical polarization, 4.8 GHz, Average value shown

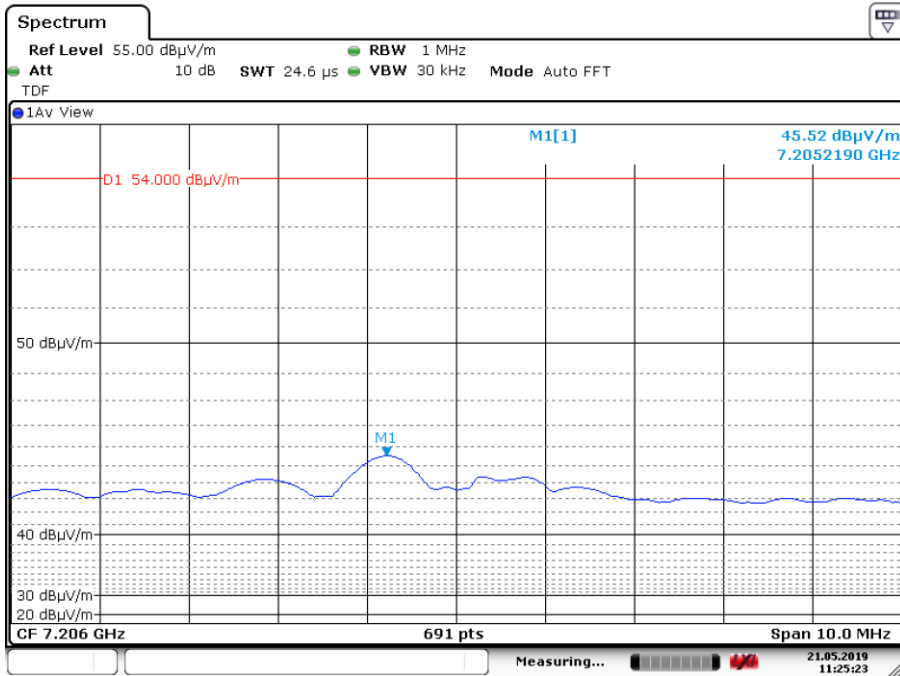


Date: 21.MAY.2019 11:25:23

Plot of the emissions at 2402 MHz, EUT Horizontal, Horizontal polarization, 7.2 GHz, Average value shown

Test Report No.:


19040102.r01

Page 39 of 47

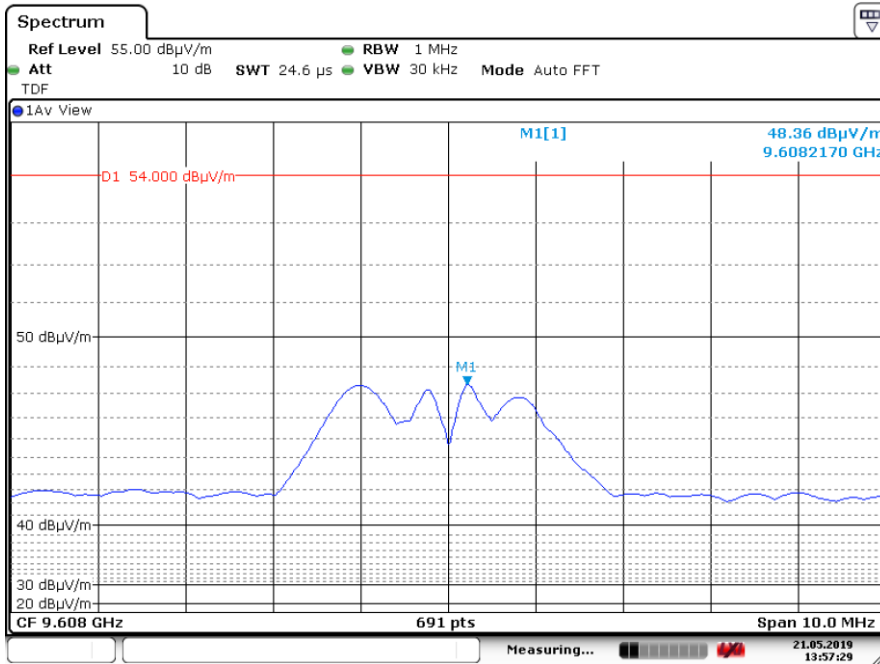

Date: 21.MAY.2019 13:57:29

Plot of the emissions at 2402 MHz, EUT Vertical, Vertical polarization, 9.6 GHz, Average value shown

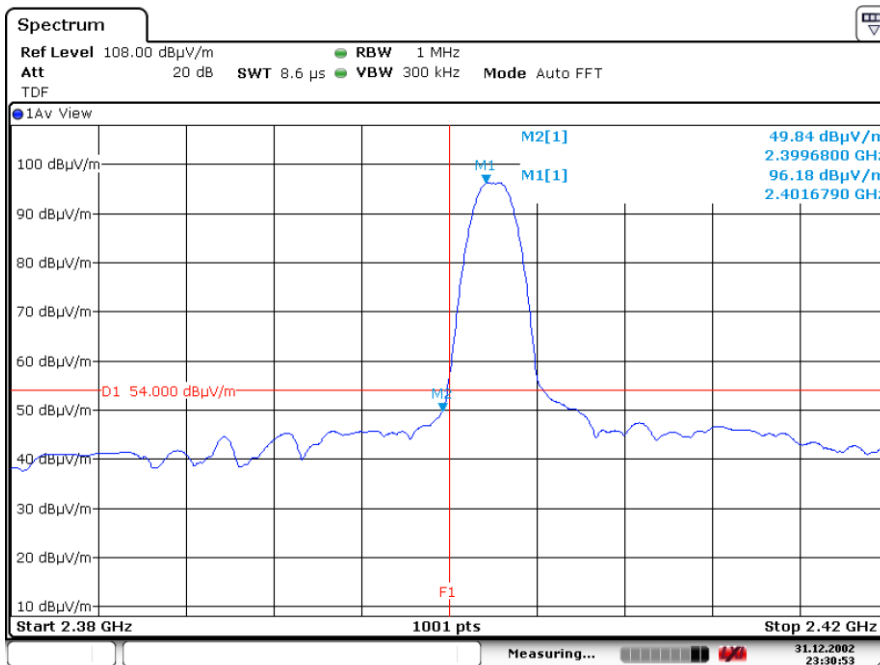


Date: 31.DEC.2002 23:30:53

Plot Radiated unwanted emissions in the restricted frequency band 2310 - 2390 MHz at 2402 MHz, reduced Video BW (worst case Average values, EUT Horizontal, Antenna Horizontal position shown).

Test Report No.:


19040102.r01

Page 40 of 47

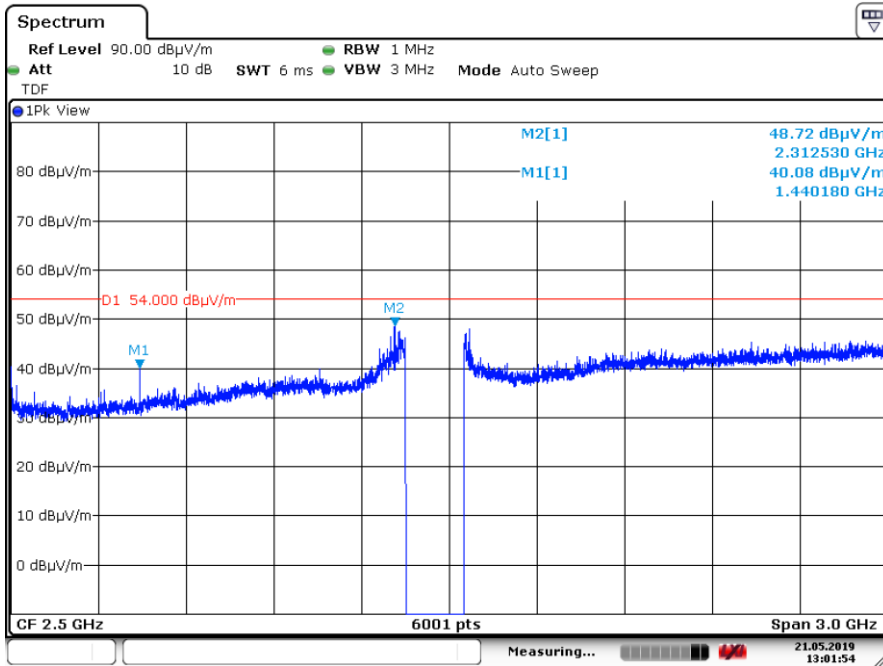


Date: 21.MAY.2019 13:01:54

Plot of the emissions at 2440 MHz, EUT Vertical, Horizontal polarization, Peak values shown, gap in the plot is of the used Notch filter

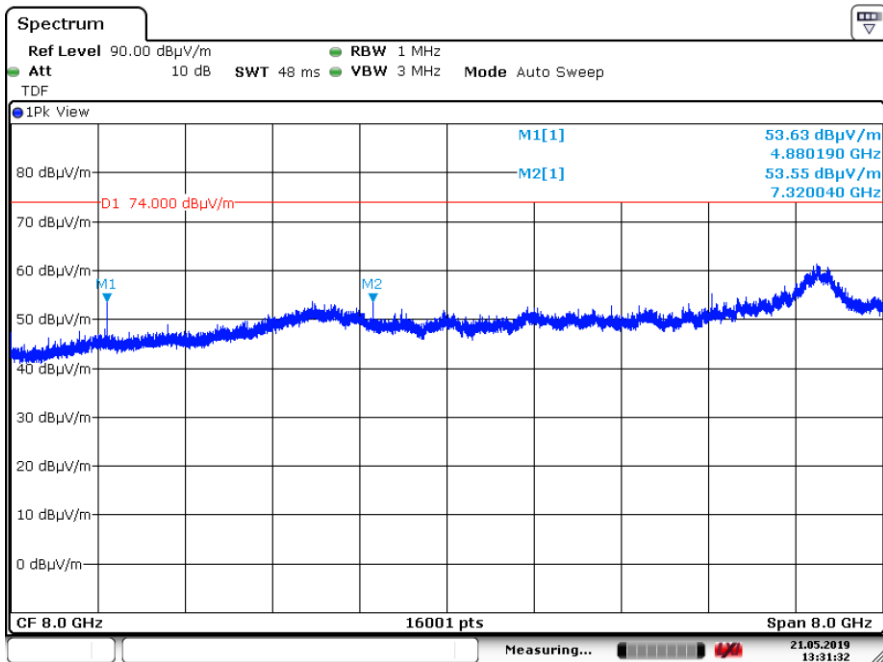


Date: 21.MAY.2019 13:31:32

Plot of the emissions at 2440 MHz, in the range 4 to 12 GHz, EUT Vertical, Vertical polarization, Peak values shown

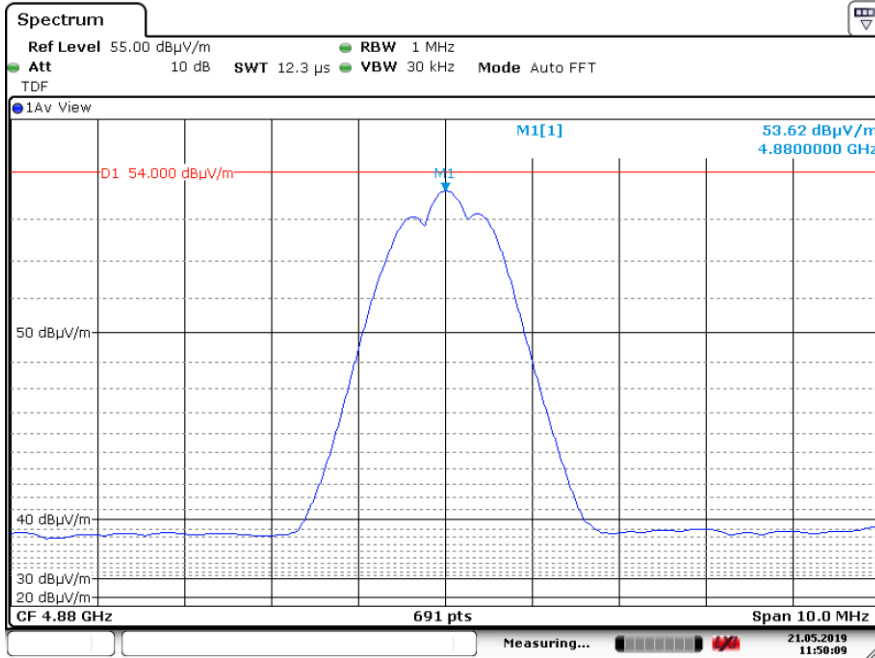

Date: 21.MAY.2019 11:50:09

Plot of the emissions at 2440 MHz, harmonic at 4880 GHz, Vertical polarization, Average values shown

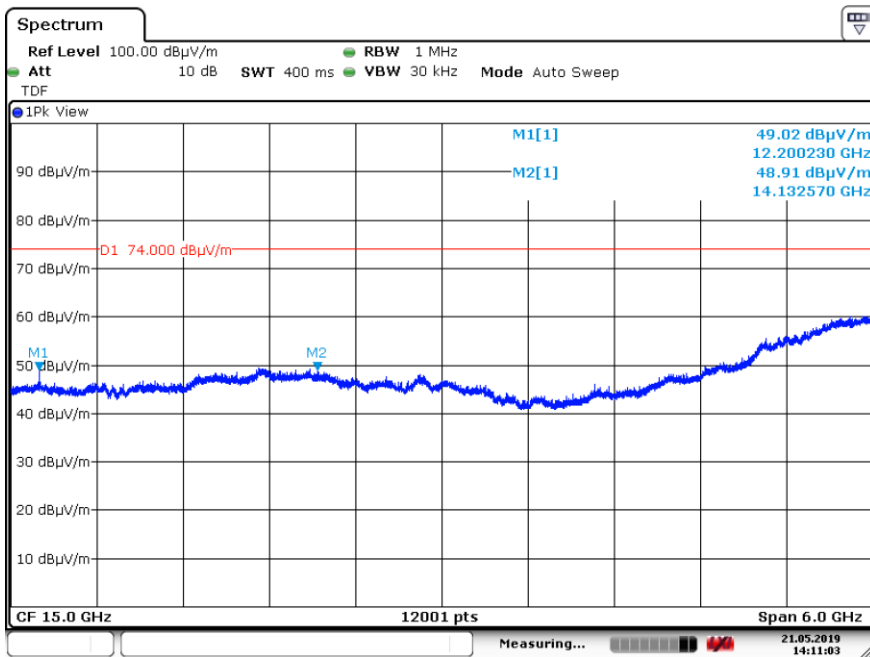


Date: 21.MAY.2019 14:11:03

Plot of the emissions at 2440 MHz, in the range 12 to 18 GHz, EUT Vertical, Vertical polarization, Peak values shown, reduced video bandwidth.

Test Report No.:


19040102.r01

Page 42 of 47

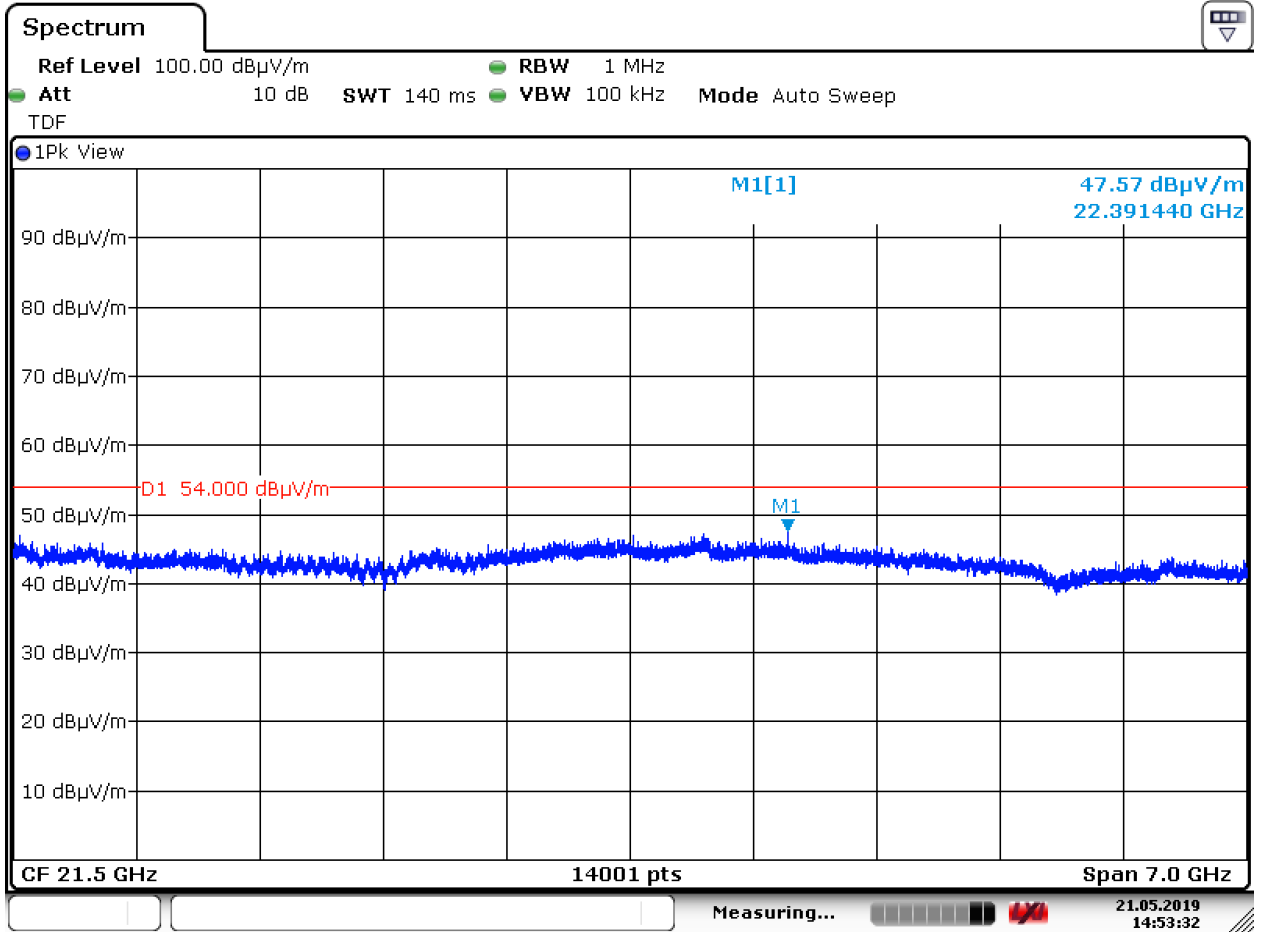


Date: 21.MAY.2019 14:53:32

Plot of the emissions at 2440 MHz, in the range 18 to 25 GHz, EUT Vertical, Vertical polarization, Peak values shown, reduced video bandwidth

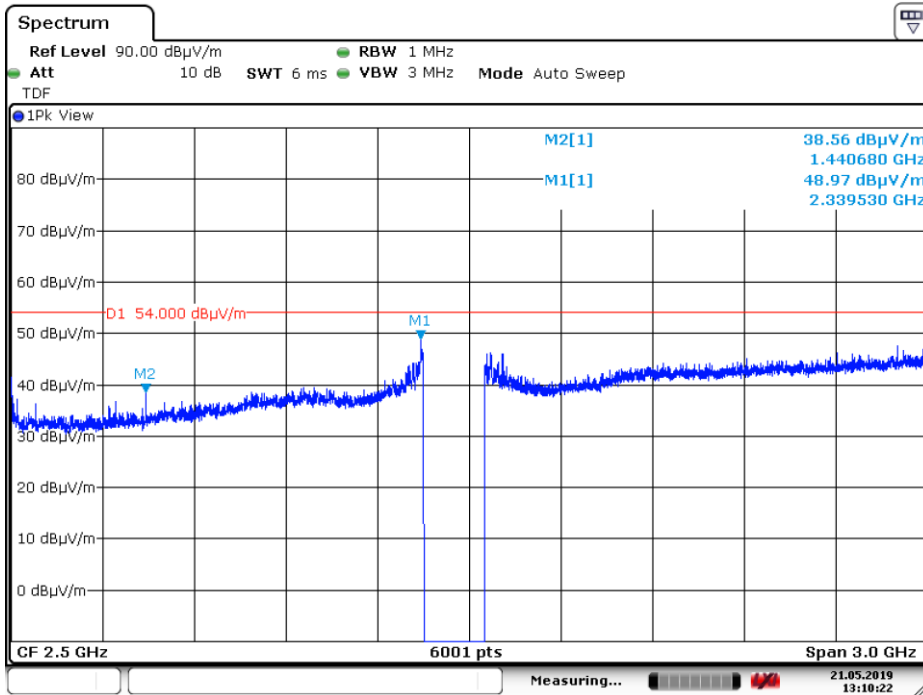

Date: 21.MAY.2019 13:10:22

Plot of the emissions at 2480 MHz, EUT Vertical, Horizontal polarization, Peak values shown, gap in the plot is of the used Notch filter

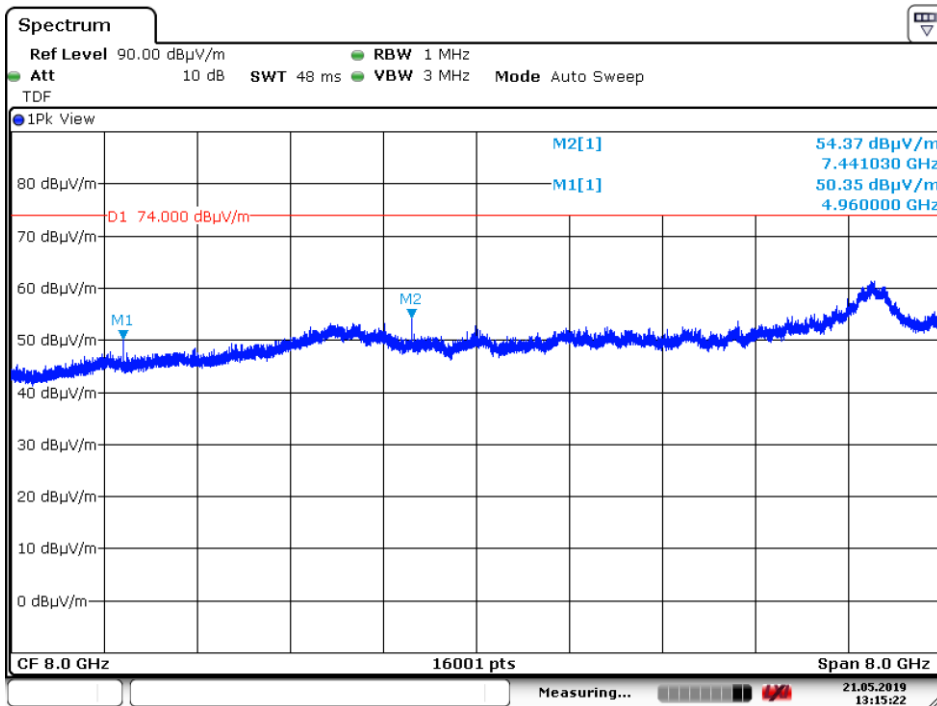


Date: 21.MAY.2019 13:15:22

Plot of the emissions at 2480 MHz, in the range 4 to 12 GHz, Vertical polarization, Peak values shown

Test Report No.:


19040102.r01

Page 44 of 47

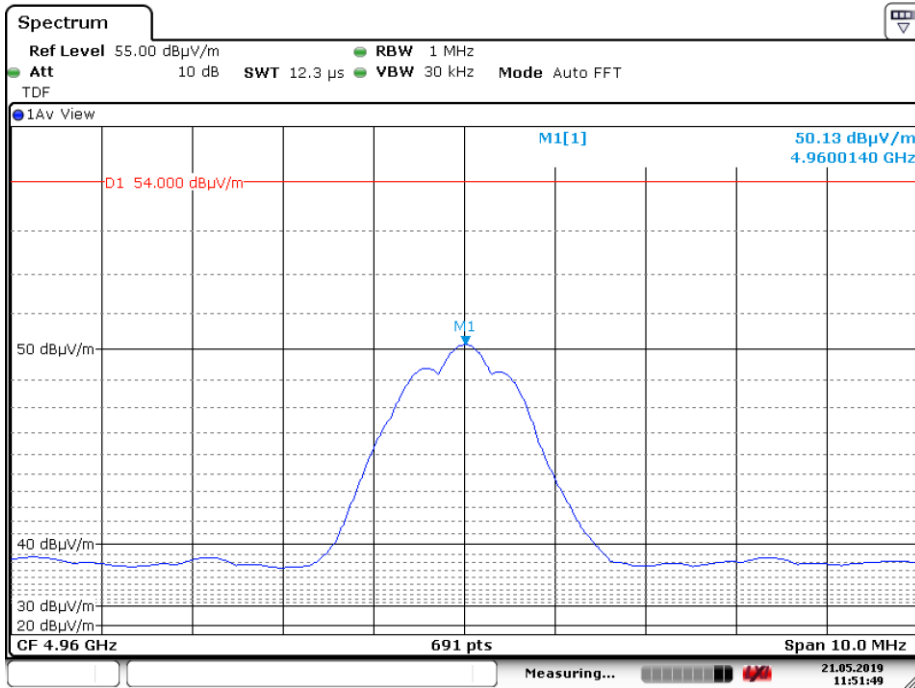


Date: 21.MAY.2019 11:51:49

Plot of the emissions at 2480 MHz, harmonic at 4960 GHz, EUT Vertical,Vertical polarization, Average values shown

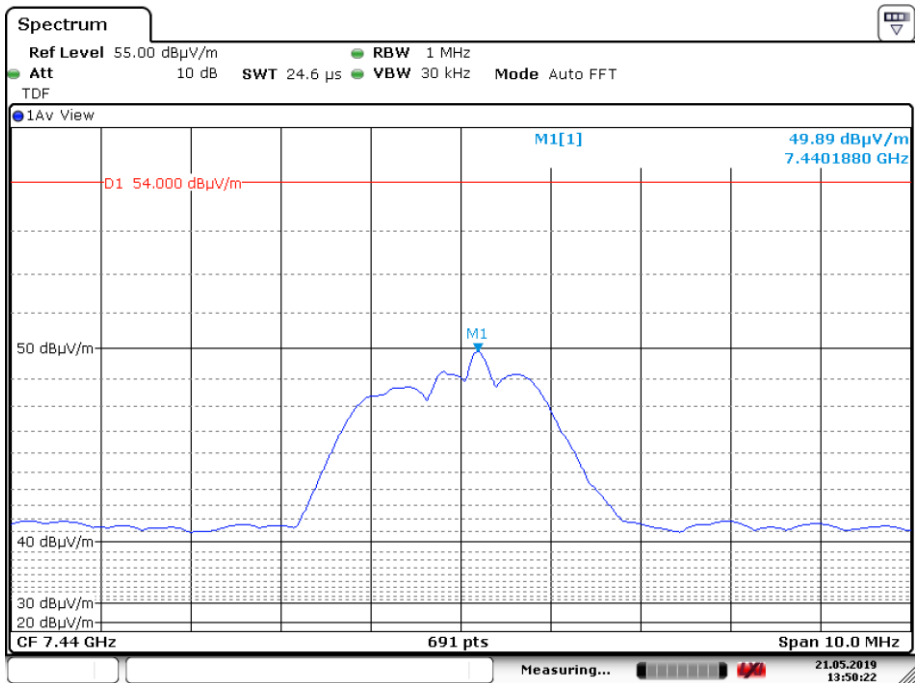


Date: 21.MAY.2019 13:50:22

Plot of the emissions at 2480 MHz, harmonic at 7440 GHz, EUT Vertical,Vertical polarization, Average values shown

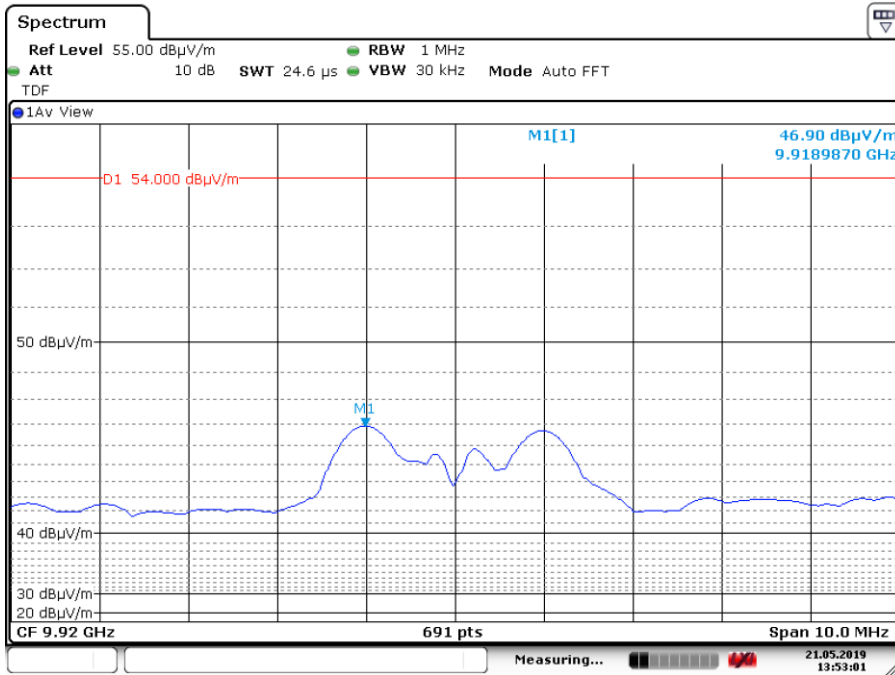

Date: 21.MAY.2019 13:53:01

Plot of the emissions at 2480 MHz, harmonic at 9919 GHz, EUT Vertical, Vertical polarization, Average values shown

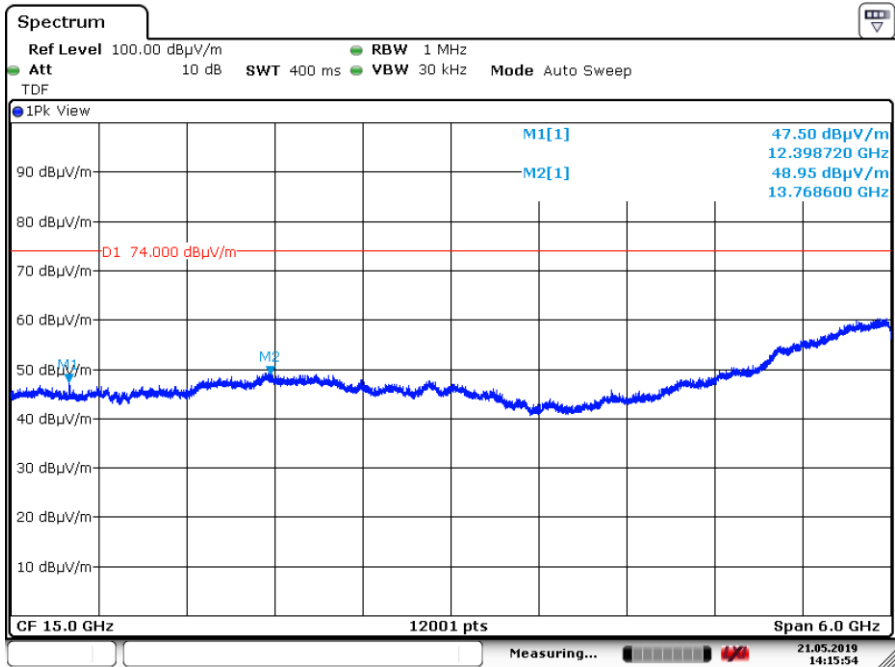


Date: 21.MAY.2019 14:15:54

Plot of the emissions at 2480 MHz, in the range 12 to 18 GHz, EUT Vertical, Vertical polarization, Peak values shown, reduced video bandwidth

Test Report No.:


19040102.r01

Page 46 of 47

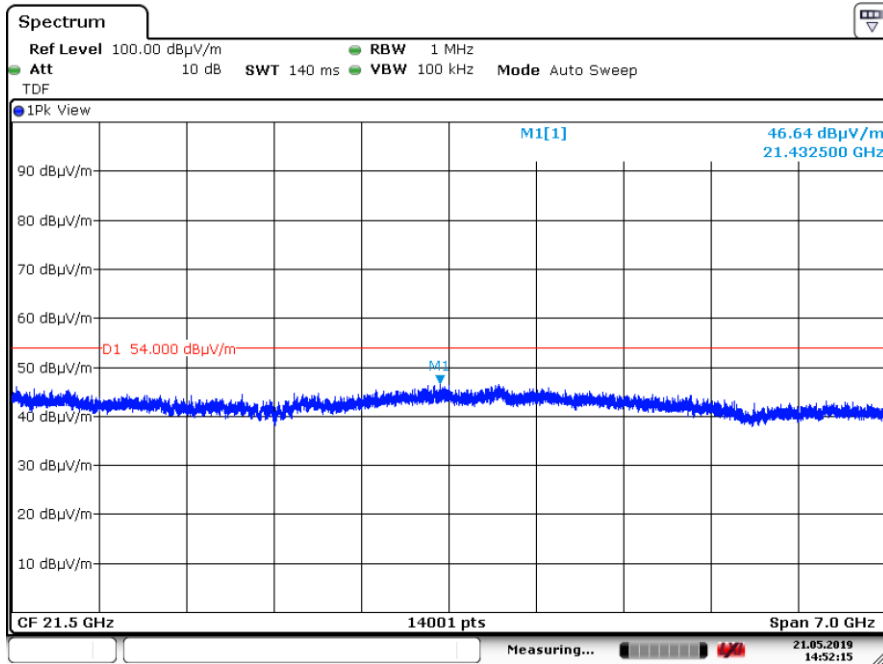

Date: 21.MAY.2019 14:52:15

Plot Radiated unwanted emissions in the range 18 – 25 GHz at 2480 MHz, reduced Video BW (Peak values, Antenna Vertical position shown).

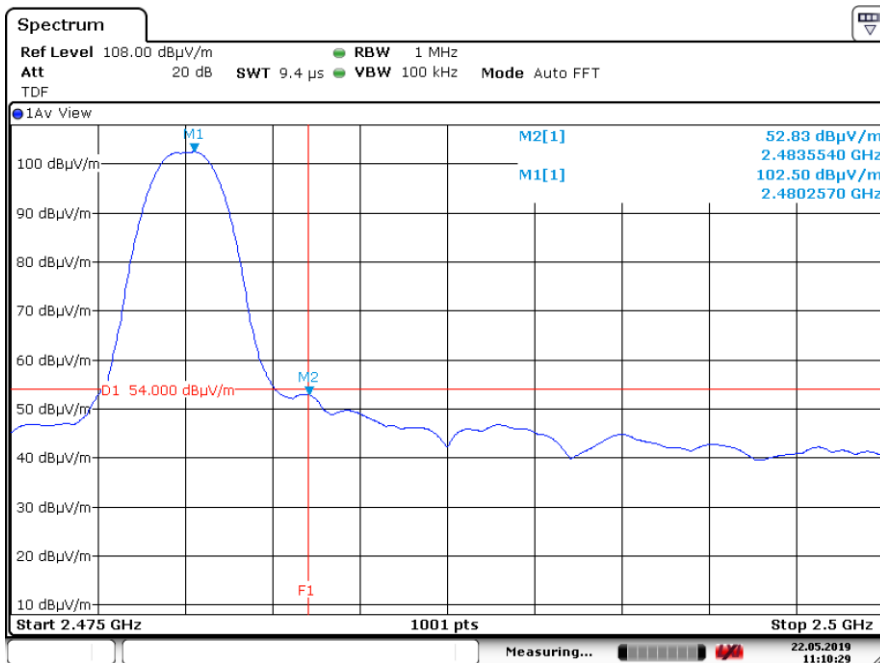

Date: 22.MAY.2019 11:10:29

Plot Radiated unwanted emissions in the restricted frequency band 2483.5 - 2500 MHz at 2480 MHz, reduced Video BW (worst case Average values, EUT Horizontal, Antenna Horizontal position shown).

Test Report No.:

19040102.r01

Page 47 of 47

5.2 AC Power Line Conducted Measurements

RESULT: Not Applicable / Not requested by the applicant.

Date of testing: N/A

End of report