



FCC RF Test Report

APPLICANT : Cisco Systems Inc.
EQUIPMENT : High-Capacity Enterprise Femtocell
BRAND NAME : Cisco
MODEL NAME : DPH-SO16
FCC ID : LDK-DPH-SO16
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Apr. 09, 2013 and completely tested on Apr. 19, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : LDK-DPH-SO16

Page Number : 1 of 49

Report Issued Date : Apr. 19, 2013

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 6

 1.6 Testing Site..... 6

 1.7 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Test Mode..... 7

 2.2 Connection Diagram of Test System 8

 2.3 Support Unit used in test configuration and system 8

 2.4 Measurement Results Explanation Example 9

3 TEST RESULT 10

 3.1 Conducted Output Power and ERP/EIRP Measurement 10

 3.2 Peak-to-Average Ratio 12

 3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 18

 3.4 Band Edge Measurement..... 26

 3.5 Conducted Spurious Emission Measurement 31

 3.6 Field Strength of Spurious Radiation Measurement 37

 3.7 Frequency Stability Measurement..... 44

4 LIST OF MEASURING EQUIPMENT 48

5 UNCERTAINTY OF EVALUATION 49

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.1	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.1	§24.232(a)(2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 13.13 dB at 2641.000 MHz
3.7	§2.1055 §22.355 §24.235	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Cisco Systems Inc.
125 West Tasman Drive, San Jose, CA95134, United States

1.2 Manufacturer

Cisco Systems Inc.
125 West Tasman Drive, San Jose, CA95134, United States

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	High-Capacity Enterprise Femtocell
Brand Name	Cisco
Model Name	DPH-SO16
FCC ID	LDK-DPH-SO16
EUT supports Radios application	WCDMA/HSDPA
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Rx Frequency	WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Maximum Output Power to Antenna	WCDMA Band V : 24.57 dBm WCDMA Band II : 25.03 dBm
Antenna Type	PCB Antenna
Antenna Gain	Band V: 0.68dBi Band II: 3.97dBi
Type of Modulation	QPSK / 16QAM

1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (% , Hz, ppm)	Emission Designator
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.2042	0.12 ppm	4M14F9W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.7943	0.12 ppm	4M16F9W

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH06-HY	722060/4086B-1

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- FCC KDB 412172 D01 Determining ERP and ERIP v01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for WCDMA Band V.
2. 30 MHz to 20000 MHz for WCDMA Band II.


Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note: The maximum power levels are RMC 12.2Kbps mode for WCDMA band V, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4357	4405	4458	9662	9800	9938
Frequency	871.4	881.0	891.6	1932.4	1960.0	1987.6
RMC 12.2K	24.26	24.37	24.57	23.50	25.03	23.42

2.2 Connection Diagram of Test System

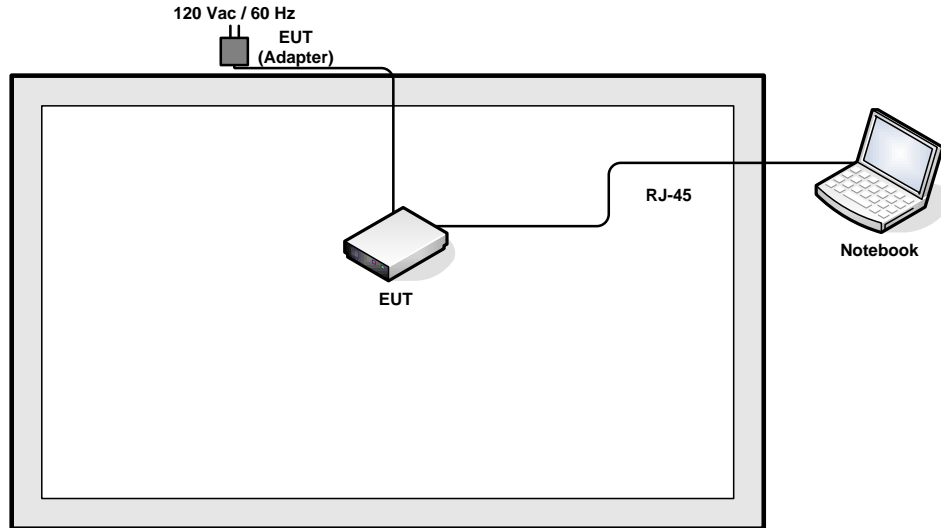

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power and ERP/EIRP Measurement

3.1.1 Description of the Conducted Output Power and ERP/EIRP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts and base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP).

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

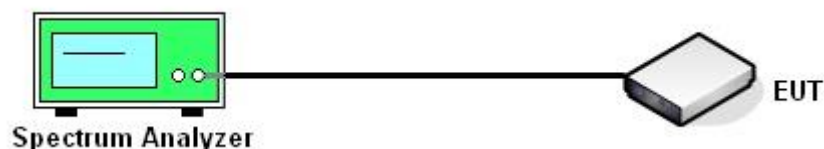

3.1.5 Test Result of Conducted Output Power

Cellular Band ($G_T - L_C = 0.68$ dB)			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4357 (Low)	4405 (Mid)	4458 (High)
Frequency (MHz)	871.4	881.0	891.6
Conducted Power (dBm)	24.26	24.37	24.57
Conducted Power (Watts)	0.27	0.27	0.29
ERP(dBm)	22.79	22.90	23.10
ERP(Watts)	0.1901	0.1950	0.2042

PCS Band ($G_T - L_C = 3.97$ dB)			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9662 (Low)	9800 (Mid)	9938 (High)
Frequency (MHz)	1932.4	1960.0	1987.6
Conducted Power (dBm)	23.50	25.03	23.42
Conducted Power (Watts)	0.22	0.32	0.22
EIRP(dBm)	27.47	29	27.39
EIRP(Watts)	0.5585	0.7943	0.5483

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup



3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4357 (Low)	4405 (Mid)	4458 (High)
Frequency (MHz)	871.4	881.0	891.6
Peak-to-Average Ratio (dB)	8.04	8.16	8.24


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9662 (Low)	9800 (Mid)	9938 (High)
Frequency (MHz)	1932.4	1960.0	1987.6
Peak-to-Average Ratio (dB)	8.04	8.08	8.12



3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 4357 (871.4 MHz)

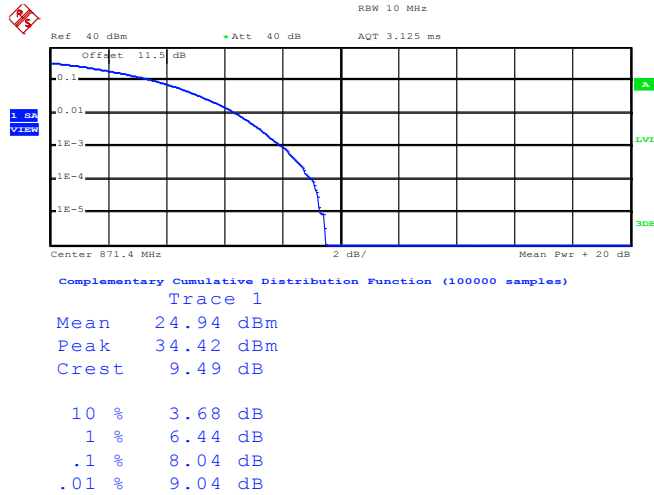

Date: 16.APR.2013 10:48:35


Peak-to-Average Ratio on Channel 4405 (881.0 MHz)

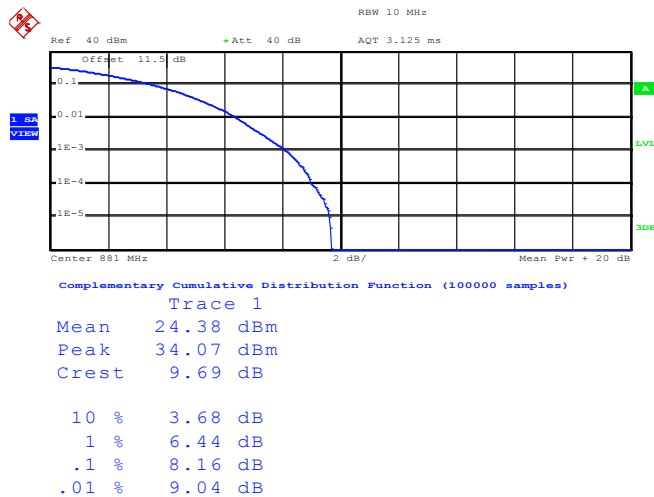

Date: 16.APR.2013 10:46:54



Peak-to-Average Ratio on Channel 4458 (891.6 MHz)

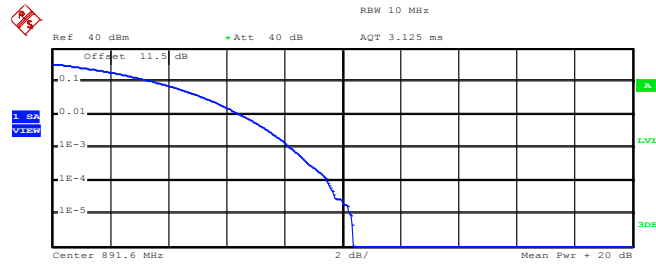

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 24.05 dBm
Peak 34.42 dBm
Crest 10.37 dB


10 % 3.64 dB
1 % 6.56 dB
.1 % 8.24 dB
.01 % 9.48 dB

Date: 16.APR.2013 10:45:03



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9662 (1932.4 MHz)

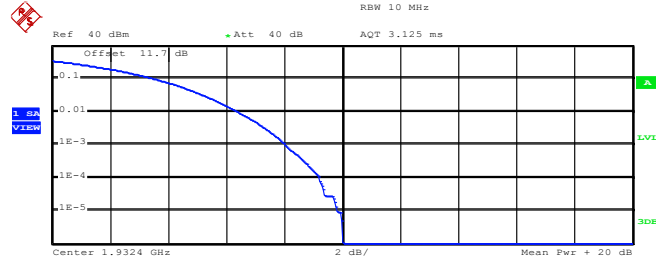


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.42 dBm
Peak	33.44 dBm
Crest	10.02 dB
10 %	3.64 dB
1 %	6.44 dB
.1 %	8.04 dB
.01 %	9.20 dB

Date: 16.APR.2013 11:58:15

Peak-to-Average Ratio on Channel 9800 (1960.0 MHz)

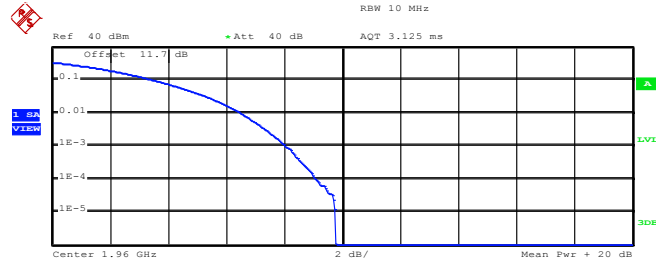

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	25.06 dBm
Peak	34.85 dBm
Crest	9.78 dB
10 %	3.64 dB
1 %	6.52 dB
.1 %	8.08 dB
.01 %	9.12 dB

Date: 16.APR.2013 11:59:02



Peak-to-Average Ratio on Channel 9938 (1987.6 MHz)

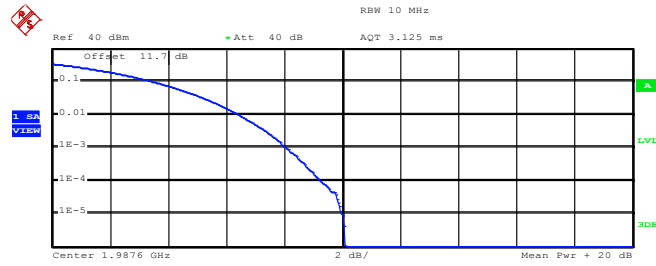

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 23.48 dBm
Peak 33.58 dBm
Crest 10.09 dB

10 %	3.64 dB
1 %	6.48 dB
.1 %	8.12 dB
.01 %	9.28 dB

Date: 16.APR.2013 11:59:57

3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.3.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth and 26 dB bandwidth of the middle channel for the highest RF powers were measured.
4. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
UMTS operating modes: Set RBW= 100 KHz, VBW= 300 KHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.

3.3.4 Test Setup

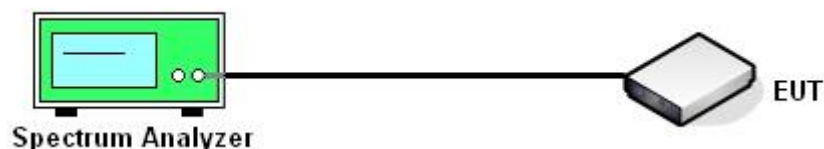



3.3.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4357 (Low)	4405 (Mid)	4458 (High)
Frequency (MHz)	871.4	881.0	891.6
99% OBW (MHz)	4.12	4.14	4.12
26dB BW (MHz)	4.70	4.70	4.72


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9662 (Low)	9800 (Mid)	9938 (High)
Frequency (MHz)	1932.4	1960.0	1987.6
99% OBW (MHz)	4.16	4.16	4.16
26dB BW (MHz)	4.70	4.68	4.72



3.3.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4357 (871.4 MHz)

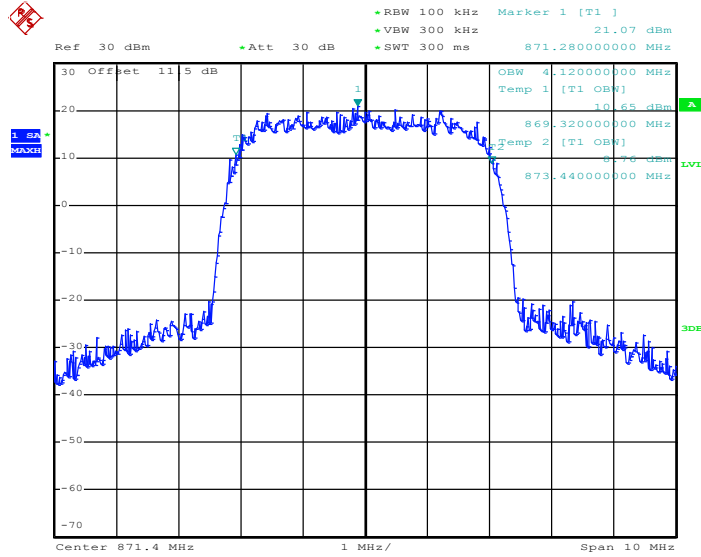

Date: 16.APR.2013 10:37:15


26dB Bandwidth Plot on Channel 4357 (871.4 MHz)

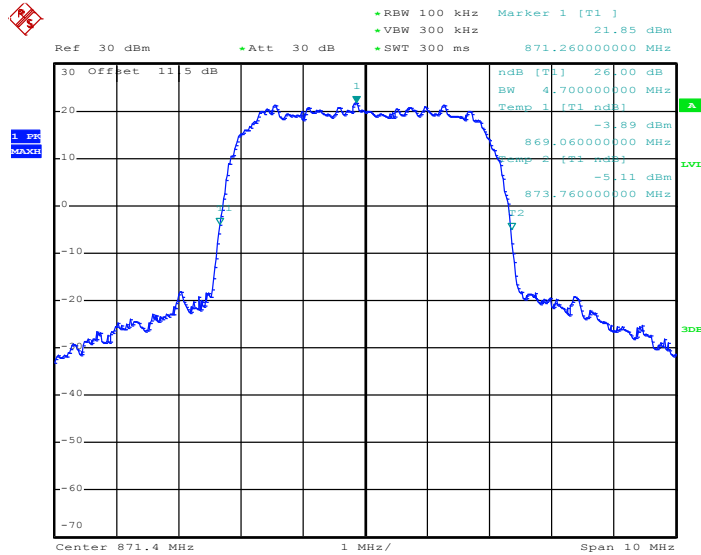

Date: 16.APR.2013 10:38:18




99% Occupied Bandwidth Plot on Channel 4405 (881.0 MHz)

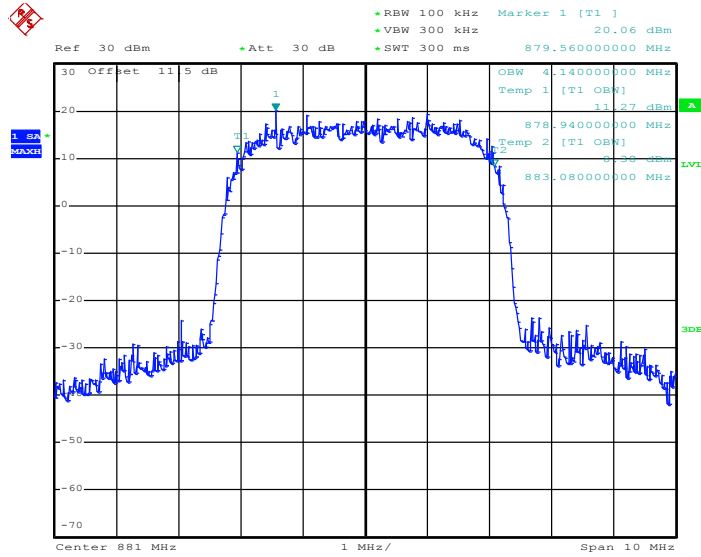

Date: 16.APR.2013 10:39:38


26dB Bandwidth Plot on Channel 4405 (881.0 MHz)

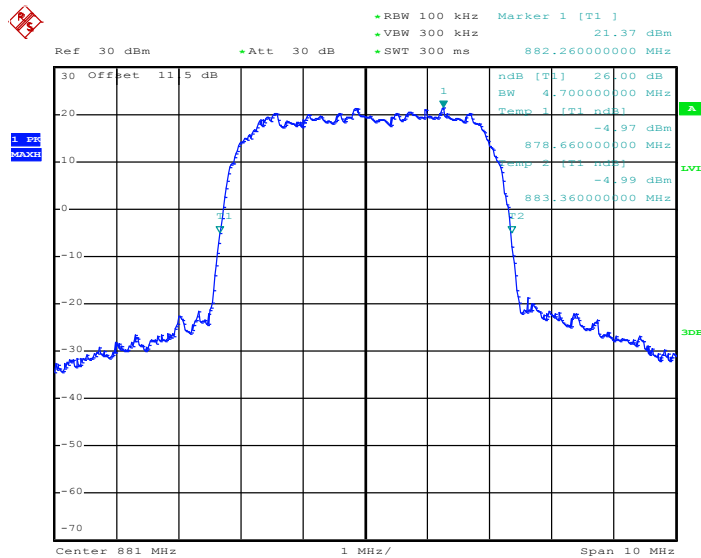

Date: 16.APR.2013 10:34:39




99% Occupied Bandwidth Plot on Channel 4458 (891.6MHz)

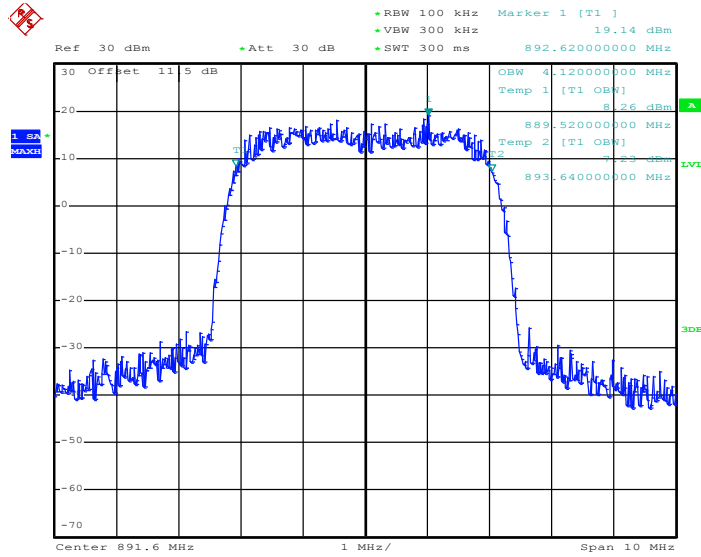

Date: 16.APR.2013 10:40:17

26dB Bandwidth Plot on Channel 4458 (891.6MHz)

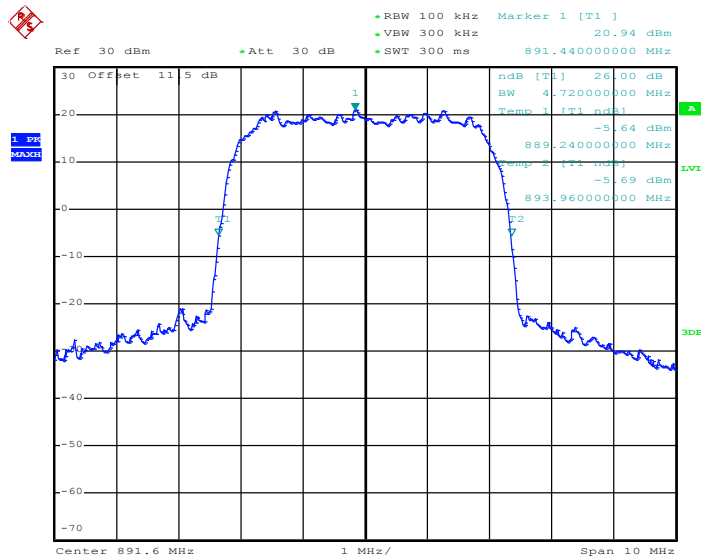


Date: 16.APR.2013 10:33:23




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9662 (1932.4 MHz)

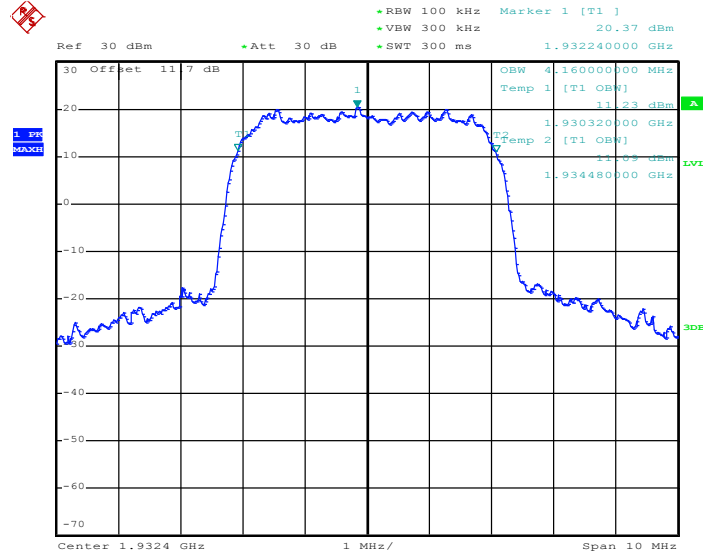

Date: 16.APR.2013 11:37:58


26dB Bandwidth Plot on Channel 9662 (1932.4 MHz)

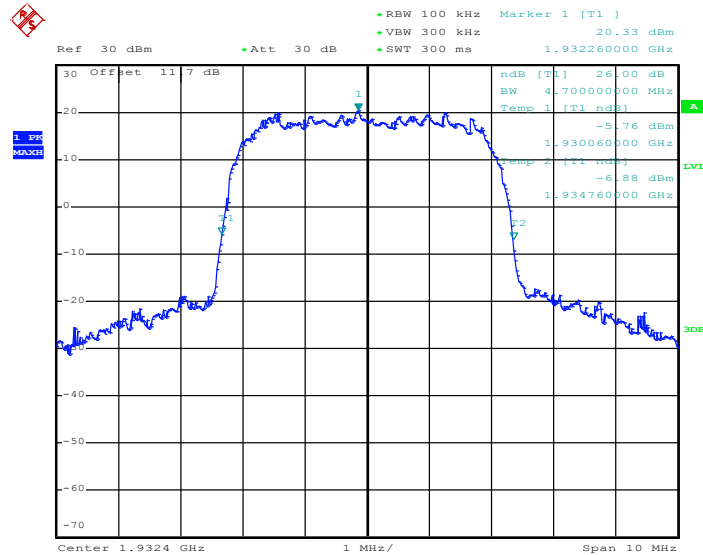

Date: 16.APR.2013 11:52:03




99% Occupied Bandwidth Plot on Channel 9800 (1960.0 MHz)

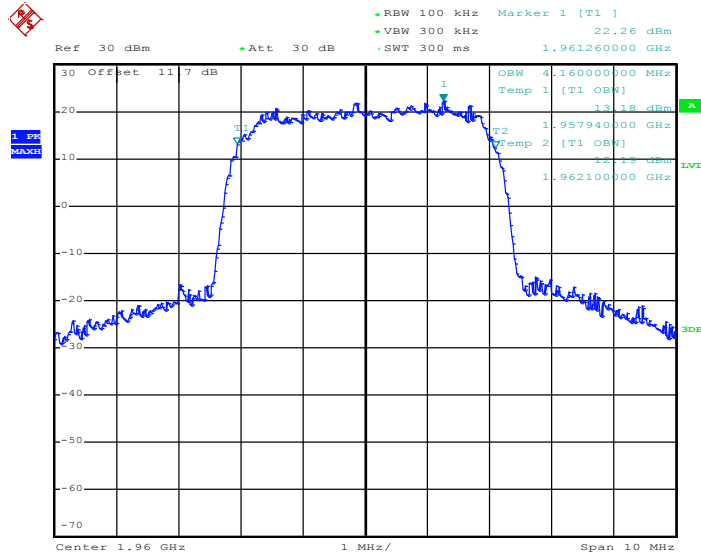

Date: 16.APR.2013 11:37:04


26dB Bandwidth Plot on Channel 9800 (1960.0 MHz)

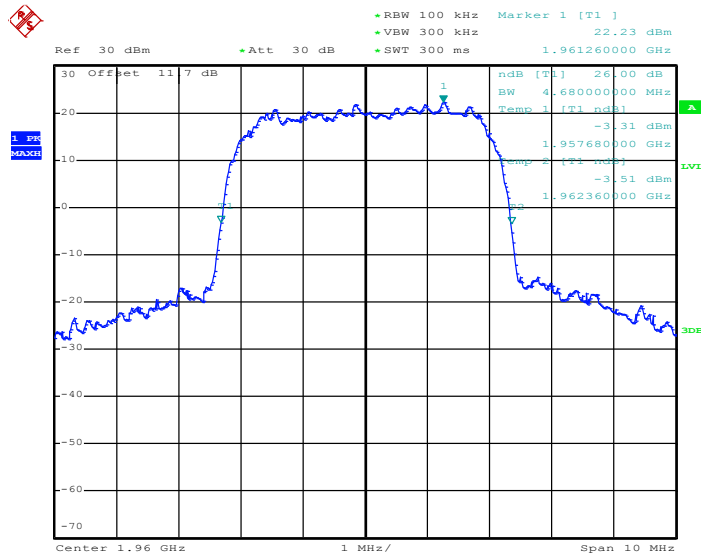

Date: 16.APR.2013 11:51:38




99% Occupied Bandwidth Plot on Channel 9938 (1987.6 MHz)

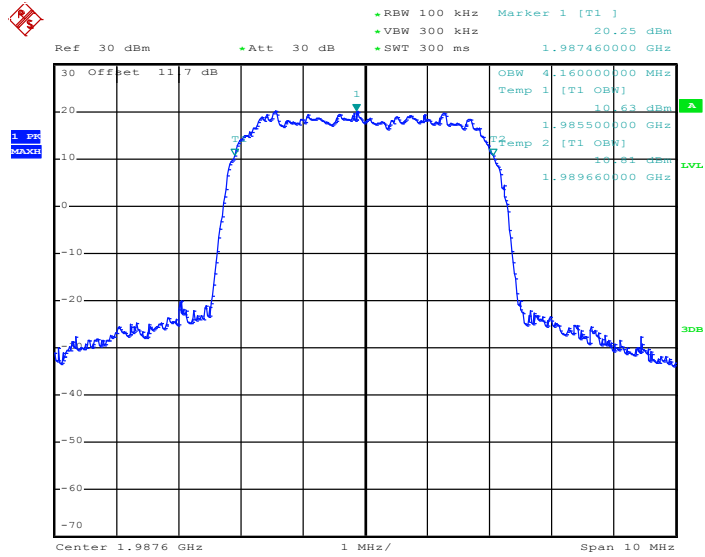

Date: 16.APR.2013 11:49:16

26dB Bandwidth Plot on Channel 9938 (1987.6 MHz)

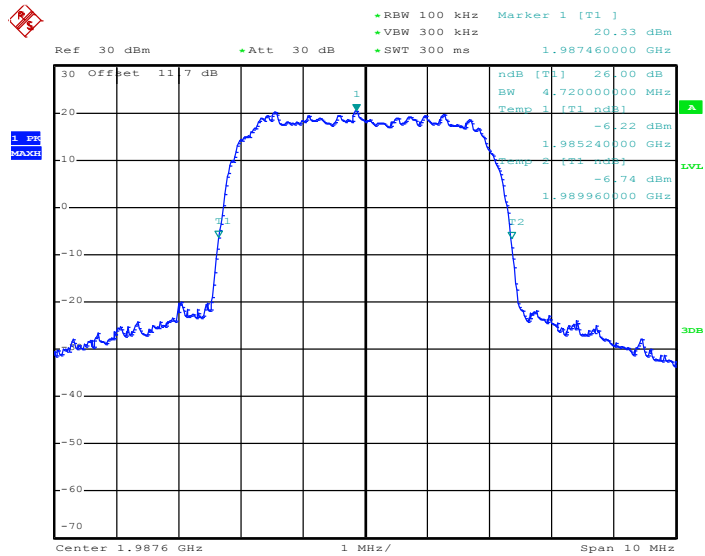

Date: 16.APR.2013 11:50:50

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.4.4 Test Setup

<Conducted Band Edge >






3.4.5 Test Result (Plots) of Conducted Band Edge

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-26.12dBm	Measurement Value :	-22.86dBm

Lower Band Edge Plot on Channel 4357 (871.4 MHz)

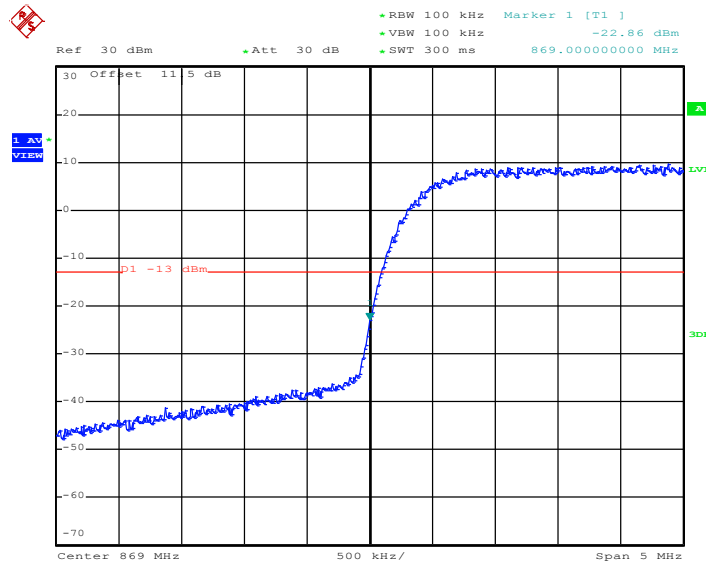


Date: 16.APR.2013 10:53:46

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-27.56dBm	Measurement Value :	-24.30dBm

Higher Band Edge Plot on Channel 4458 (891.6 MHz)

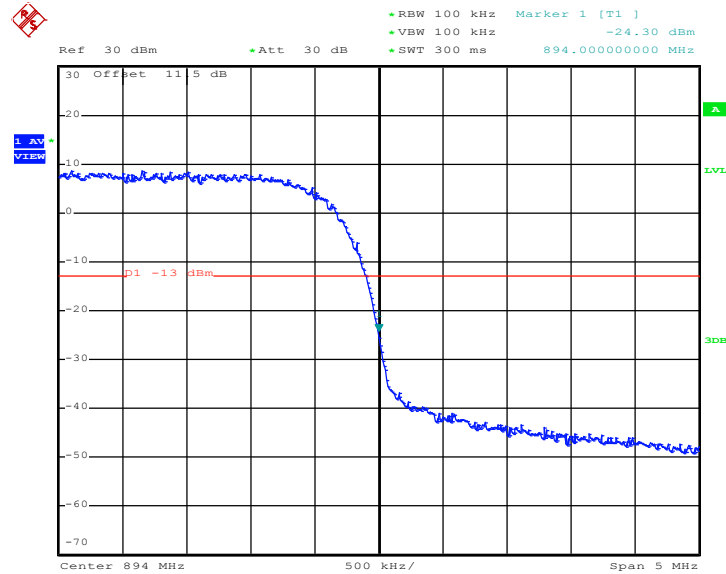


Date: 16.APR.2013 10:55:39

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-27.81dBm	Measurement Value :	-24.55dBm

Lower Band Edge Plot on Channel 9662 (1932.4 MHz)

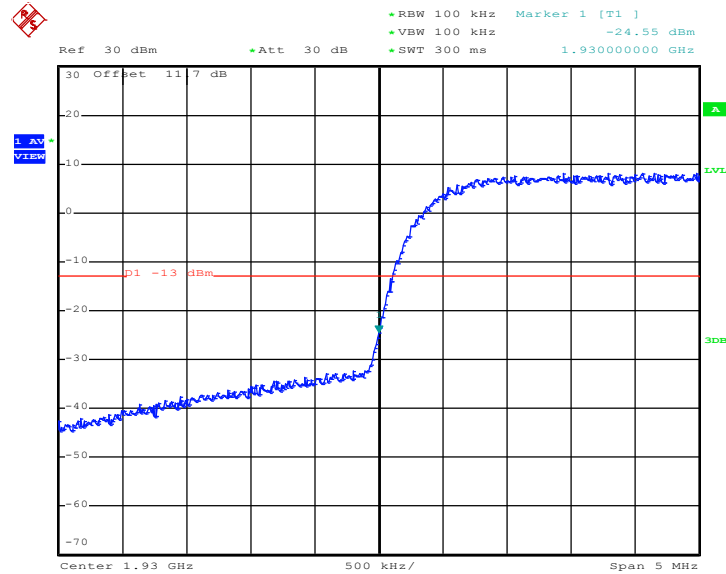


Date: 16.APR.2013 11:27:47

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-29.69dBm	Measurement Value :	-26.43dBm

Higher Band Edge Plot on Channel 9938 (1987.6 MHz)

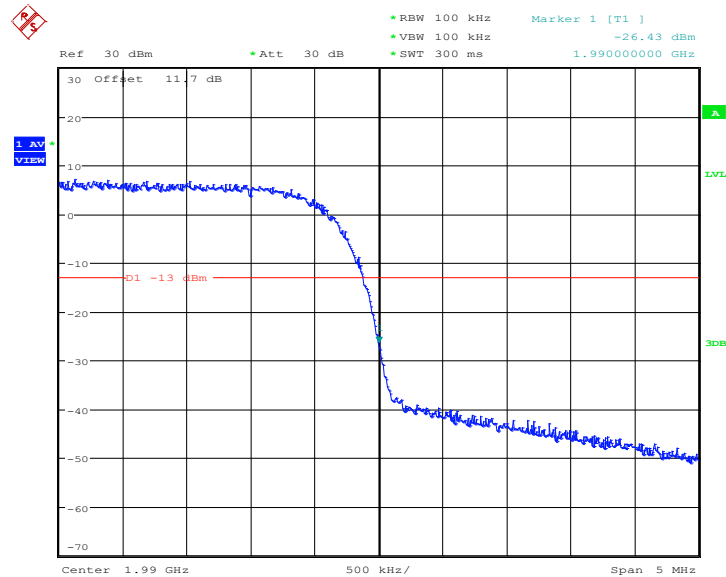

Date: 16.APR.2013 16:44:29

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

3.5 Conducted Spurious Emission Measurement

3.5.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.


3.5.4 Test Setup



3.5.5 Test Result (Plots) of Conducted Spurious Emission


Band :	WCDMA Band V	Channel :	CH4405
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	881.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

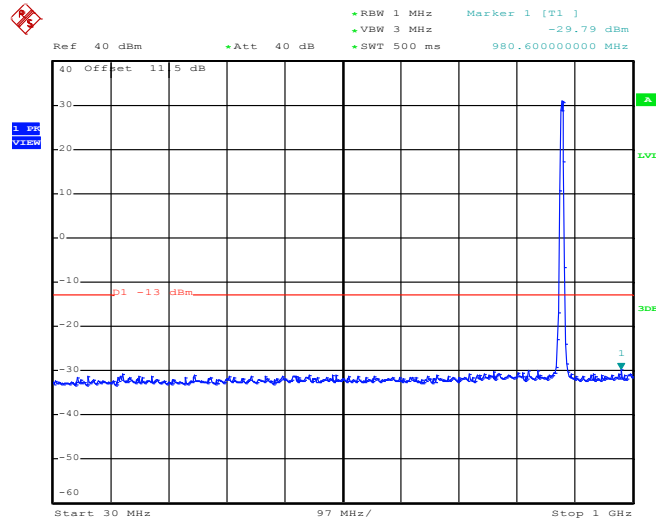

Date: 16.APR.2013 13:41:06


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

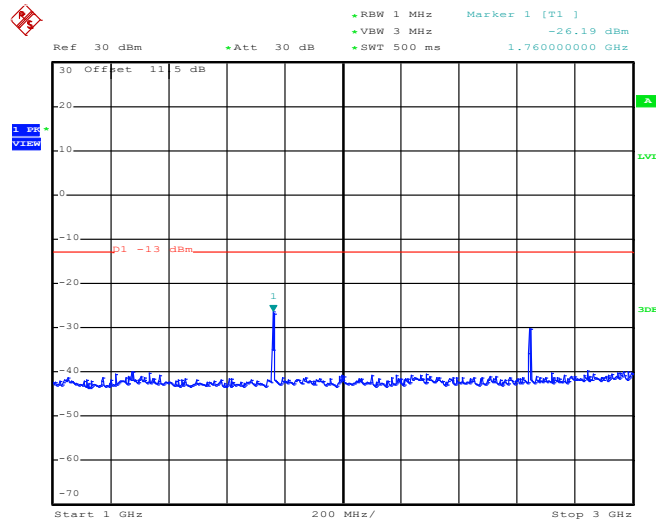

Date: 16.APR.2013 13:43:30




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

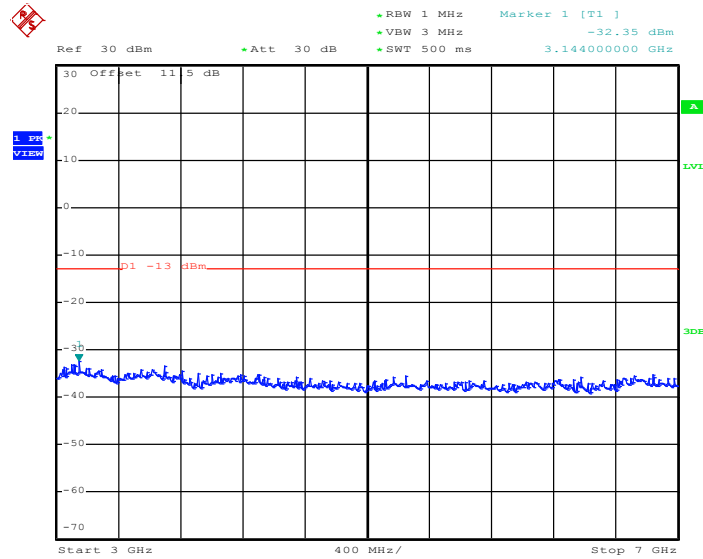

Date: 16.APR.2013 13:48:19

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

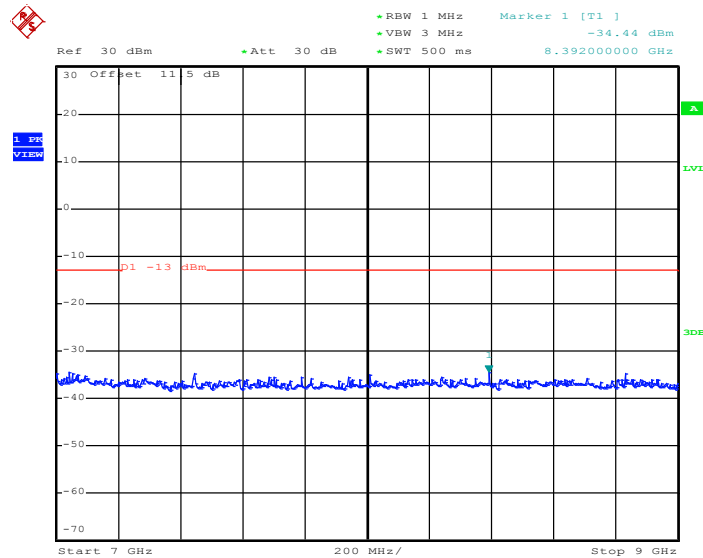


Date: 19.APR.2013 01:13:08




Band :	WCDMA Band II	Channel :	CH9800
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1960.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

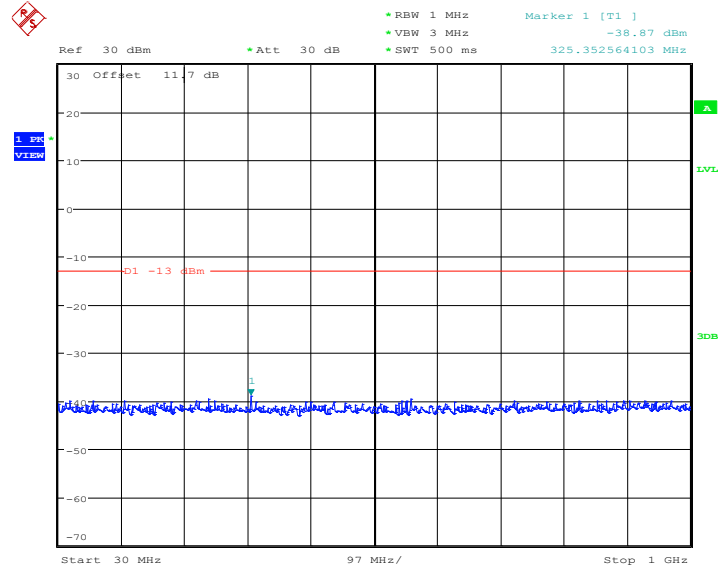

Date: 19.APR.2013 10:16:16


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

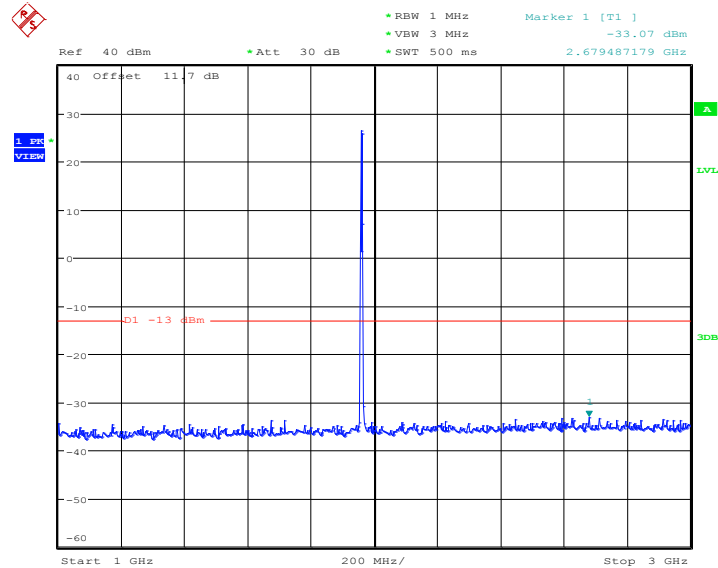

Date: 19.APR.2013 10:17:19




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

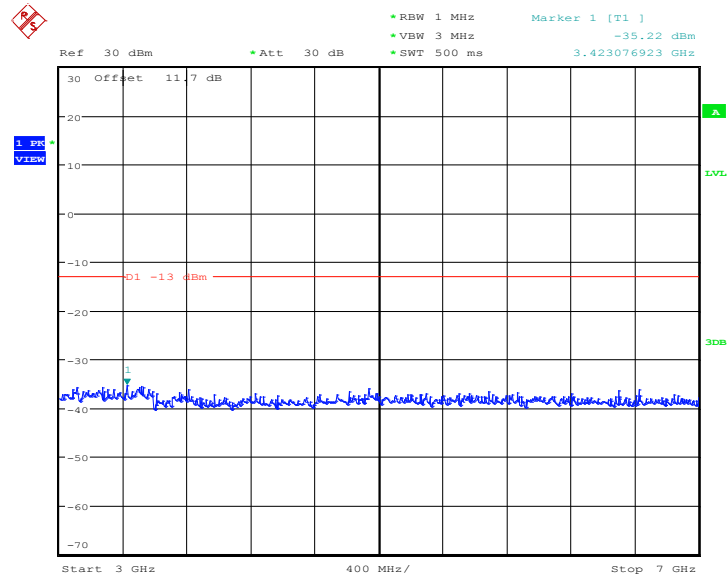

Date: 19.APR.2013 10:15:45


Conducted Spurious Emission Plot between 7GHz ~ 13GHz

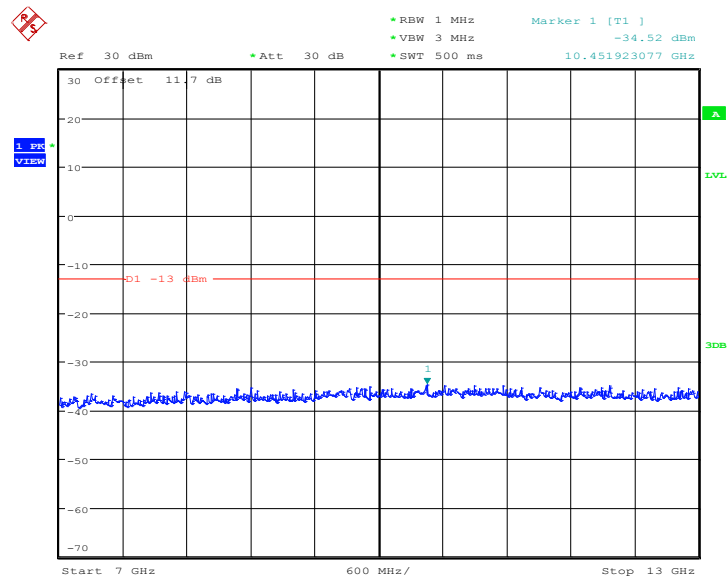

Date: 19.APR.2013 10:15:16



Conducted Spurious Emission Plot between 13GHz ~ 20GHz

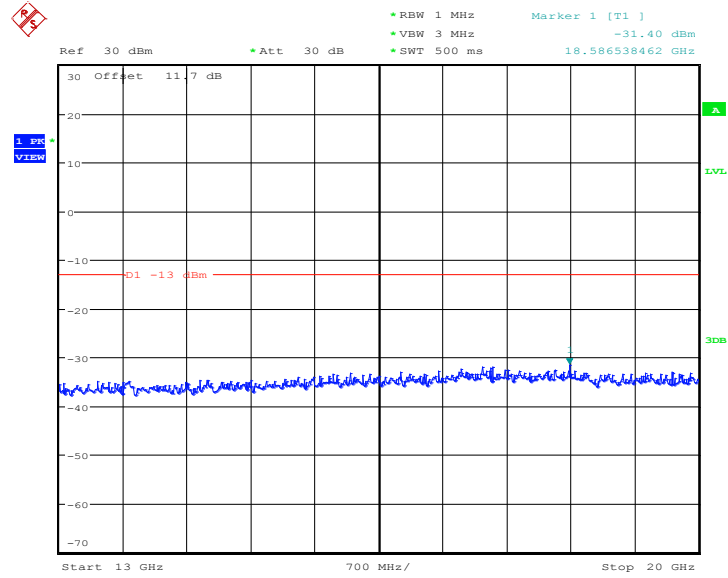

Date: 19.APR.2013 10:13:09

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.6.4 Test Setup


For radiated emissions below 30MHz

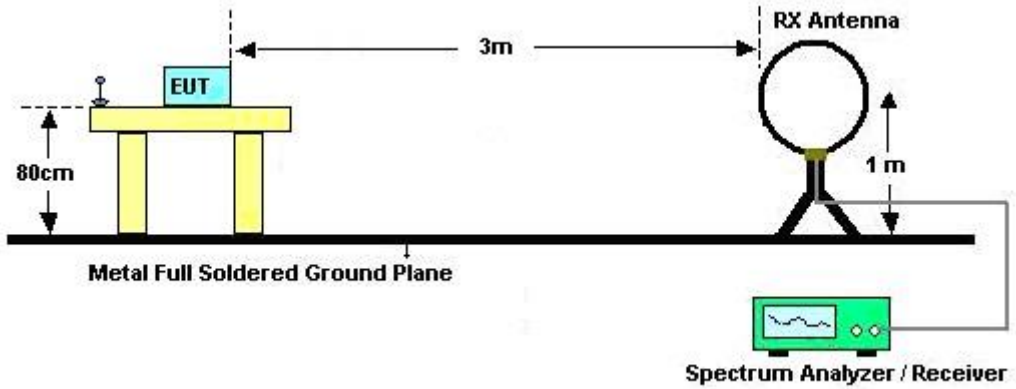

For radiated emissions from 30MHz to 1GHz

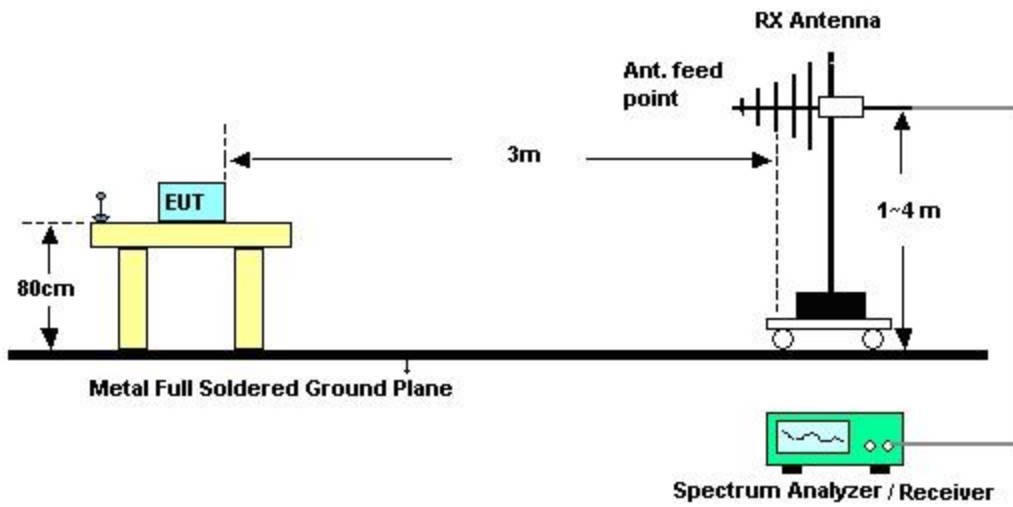

For radiated emissions above 1GHz

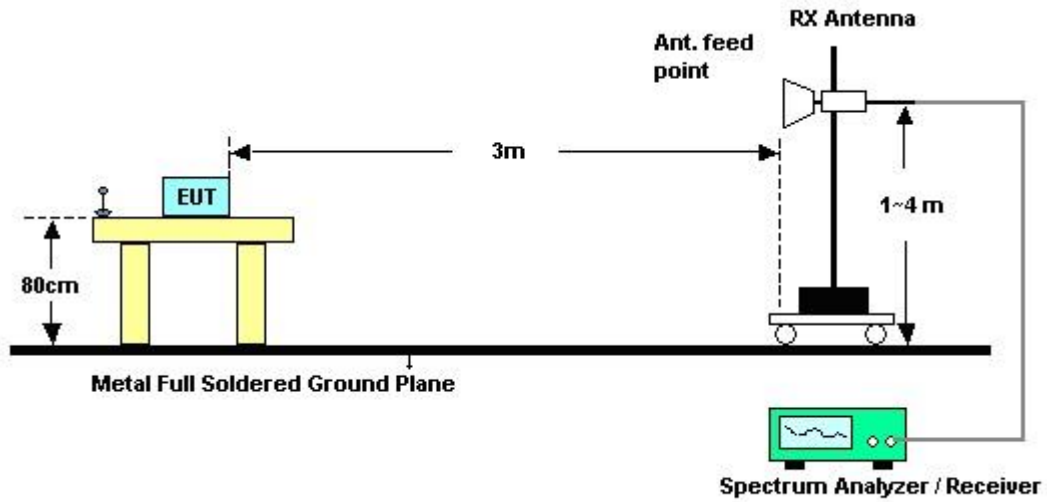


3.6.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.6.6 Test Result of Field Strength of Spurious Radiated


Band :	WCDMA Band V	Temperature :	24~26°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

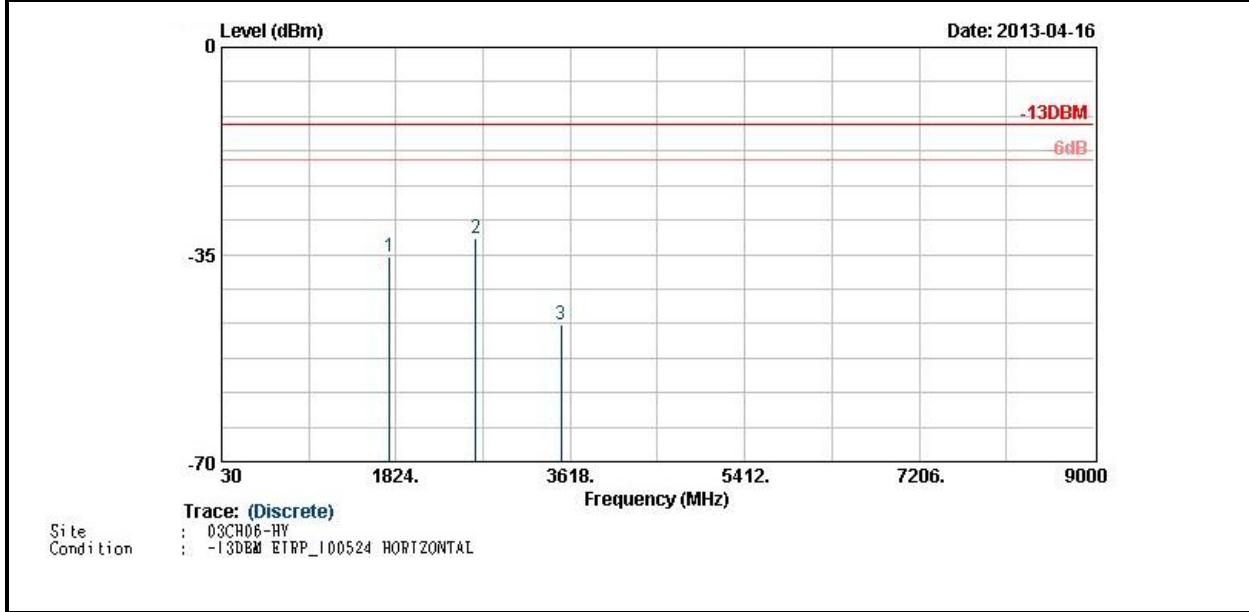

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1762	-35.48	-13	-22.48	-46.24	-37.06	1.76	5.49	H	Pass
2641	-32.36	-13	-19.36	-45.28	-33.94	2.49	6.22	H	Pass
3524	-46.79	-13	-33.79	-62.88	-50.37	2.34	8.07	H	Pass



Band :	WCDMA Band V	Temperature :	24~26°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

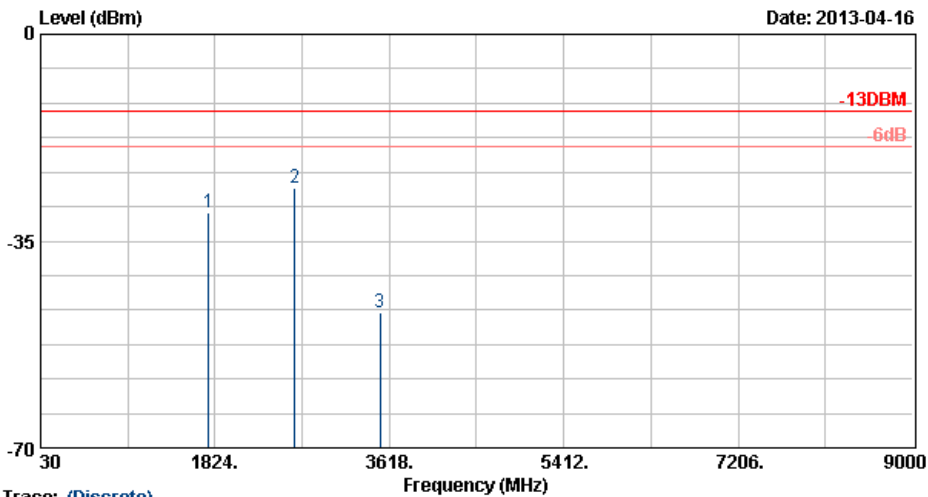


Trace: (Discrete)
 Site : 03CH06-HY
 Condition : -13DBM ETRP_100524 VERTICAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1762	-30.27	-13	-17.27	-50.95	-31.85	1.76	5.49	V	Pass
2641	-26.13	-13	-13.13	-38.86	-27.71	2.49	6.22	V	Pass
3524	-47.21	-13	-34.21	-63.21	-50.79	2.34	8.07	V	Pass



Band :	WCDMA Band II	Temperature :	24~26°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

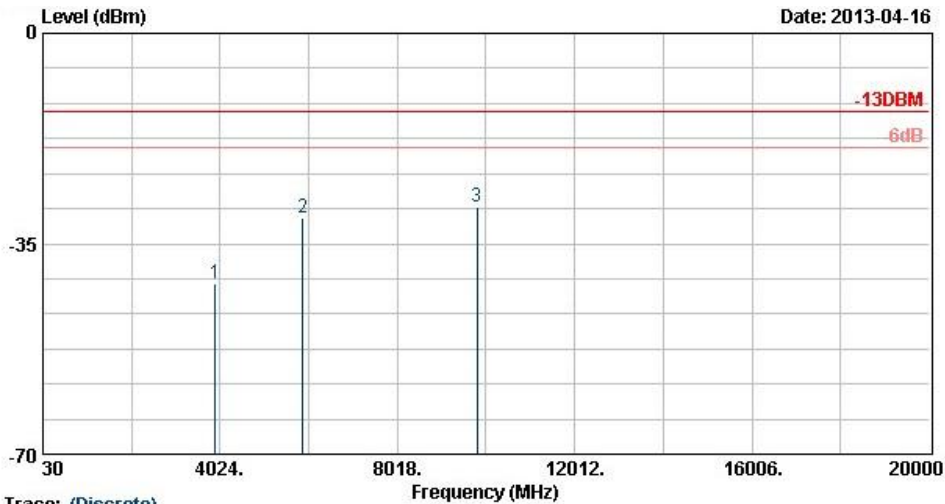


Trace: (Discrete)
 Site : 03CH06-HY
 Condition : -13DBM ETRP_100524 HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3920	-41.55	-13	-28.55	-59.45	-47.89	2.47	8.81	H	Pass
5888	-30.67	-13	-17.67	-54.48	-38.54	2.83	10.70	H	Pass
9808	-28.92	-13	-15.92	-56.69	-38.61	3.51	13.20	H	Pass



Band :	WCDMA Band II	Temperature :	24~26°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

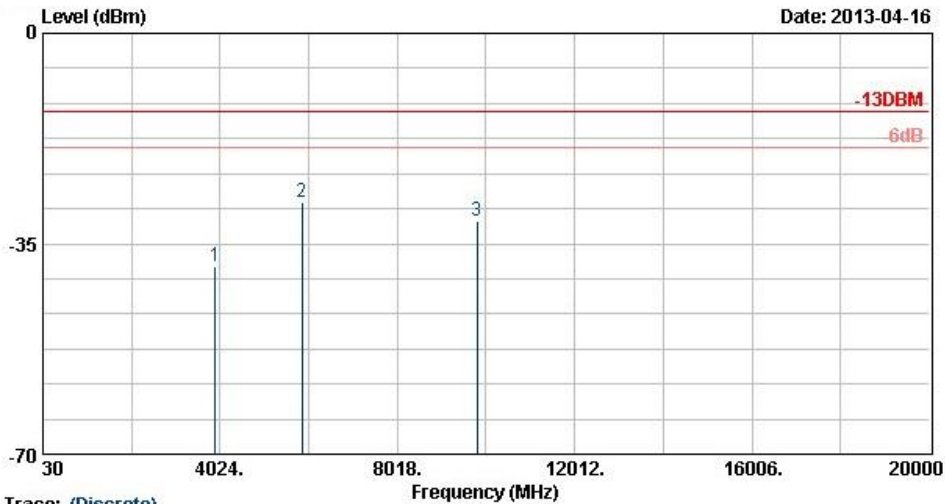

Trace: (Discrete)
 Site : 03CH06-HY
 Condition : -13DBM ETRP_100524 VERTICAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3920	-38.83	-13	-25.83	-57.06	-45.17	2.47	8.81	V	Pass
5876	-28.22	-13	-15.22	-52.02	-36.09	2.83	10.70	V	Pass
9808	-31.15	-13	-18.15	-58.71	-40.84	3.51	13.20	V	Pass



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}$ C and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

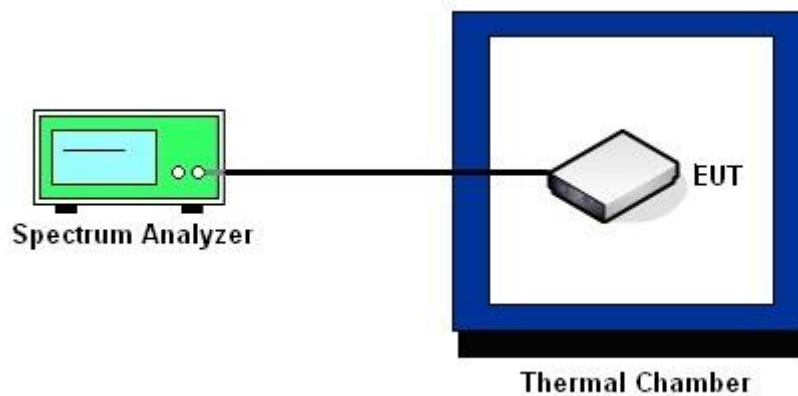



3.7.6 Test Result of Temperature Variation

Band :	WCDMA Band V	Channel :	4405
Limit (ppm) :	2.5	Frequency :	881.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-100.47	-0.12	PASS
-20	-97.51	-0.11	
-10	-98.22	-0.12	
0	-99.91	-0.12	
10	-98.55	-0.12	
20	-97.91	-0.12	
30	-100.21	-0.12	
40	-95.77	-0.11	
50	-90.42	-0.11	

Band :	WCDMA Band II	Channel :	9800
Limit (ppm) :	2.5	Frequency :	1960.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-200.15	-0.11	PASS
-20	-204.97	-0.11	
-10	-211.63	-0.11	
0	-212.12	-0.11	
10	-219.84	-0.12	
20	-224.77	-0.12	
30	-226.51	-0.12	
40	-213.46	-0.11	
50	-204.31	-0.11	



3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
WCDMA Band V CH4405	RMC 12.2Kbps	13.2	-95.77	-0.11	2.5	PASS
		10.8	-97.24	-0.11		
		12.0	-98.71	-0.12		
WCDMA Band II CH9800	RMC 12.2Kbps	13.2	-227.31	-0.12		
		10.8	-219.57	-0.12		
		12.0	-221.12	-0.12		

Note:

- 1. Normal Voltage = 12.0V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Apr. 16, 2013 ~ Apr. 19, 2013	Jun. 05, 2013	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 23, 2012	Apr. 16, 2013 ~ Apr. 19, 2013	Jul. 22, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101352	9KHz~30GHz	Nov. 07, 2012	Apr. 16, 2013	Nov. 06, 2013	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz ~ 26.5GHz	Nov. 26, 2012	Apr. 16, 2013	Nov. 25, 2013	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 04, 2012	Apr. 16, 2013	May 03, 2013	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz ~ 2GHz	Oct. 06, 2012	Apr. 16, 2013	Oct. 05, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Apr. 16, 2013	Jul. 31, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Aug. 09, 2012	Apr. 16, 2013	Aug. 08, 2013	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Apr. 16, 2013	Sep. 27, 2013	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 12, 2013	Apr. 16, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz ~ 1GHz	Apr. 12, 2013	Apr. 16, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 21, 2012	Apr. 16, 2013	Jul. 20, 2013	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1	159087	1GHz~18GHz	Feb. 26, 2013	Apr. 16, 2013	Feb. 25, 2014	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Apr. 16, 2013	Jul. 02, 2013	Radiation (03CH06-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP340923 as below.