



FCC and IC Radio Test Report

Equipment : Cisco Aironet 700 Series Access Point
Brand Name : CISCO
Model No. : AIR-CAP702I-A-K9, AIR-SAP702I-A-K9,
AIR-CAP702I-N-K9, AIR-SAP702I-N-K9,
AIR-CAP702I-Z-K9, AIR-SAP702I-Z-K9
FCC ID : LDK102085
IC : 2461B-102085
Standard : 47 CFR FCC Part 15.407
IC RSS-210 Issue 8 and RSS-Gen Issue 3
Frequency Range : 5250 MHz – 5350 MHz
Equipment Class : NII
Applicant : CISCO System, Inc.
170 West Tasman Drive San Jose, CA
95134-1706
Manufacturer : Wistron NeWeb Corporation
20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Operate Mode : Master

The product sample received on Oct. 05, 2012 and completely tested on Dec. 12, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Sam Chen





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	8
1.3	Support Equipment.....	8
1.4	Testing Applied Standards	8
1.5	Testing Location Information	8
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	11
2.4	Target Maximum Channel Power	11
2.5	EUT Operation during Test	12
2.6	The Worst Case Measurement Configuration.....	12
2.7	Test Setup Diagram	14
3	TRANSMITTER TEST RESULT	16
3.1	AC Power-line Conducted Emissions	16
3.2	Emission Bandwidth	19
3.3	RF Output Power.....	28
3.4	Peak Power Spectral Density.....	46
3.5	Peak Excursion	64
3.6	Transmitter Conducted Bandedge Emissions.....	70
3.7	Transmitter Conducted Unwanted Emissions	106
3.8	Transmitter Radiated Unwanted Emissions	115
3.9	Frequency Stability.....	126
4	TEST EQUIPMENT AND CALIBRATION DATA	128
	APPENDIX A. TEST PHOTOS.....	A1 ~ A5
	APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE.....	B1 ~ B4
	APPENDIX C. CO-LOCATION.....	C1 ~ C3



Summary of Test Result

Conformance Test Specifications						
Report Clause	Ref. Std. Clause	IC Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	-	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	RSS-Gen 7.2.4	AC Power-line Conducted Emissions	[dBuV]: 21.169MHz 38.62 (Margin 11.38dB) - AV 40.70 (Margin 19.30dB) - QP	FCC 15.207 / RSS-Gen 7.2.4	Complied
3.2	15.407(a)	RSS-210 A9.2	Emission Bandwidth	Bandwidth [MHz] 20M:25.84 / 40M:53.28	Information only	Complied
3.3	15.407(a)	RSS-210 A9.2	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 20M:20.23 / 40M:20.09	Power [dBm]:24	Complied
3.4	15.407(a)	RSS-210 A9.2	Peak Power Spectral Density	PPSD [dBm/MHz]: 20M:7.98 / 40M:5.02	PPSD [dBm/MHz]:11	Complied
3.5	15.407(a)	-	Peak Excursion	Peak Excursion [dB] 20M:10.07 / 40M:10.28	13 dB	Complied
3.6	15.407(b)	RSS-210 A9.2	Transmitter Conducted Bandedge Emissions	[dBm]: -23.88(Margin 2.63dB) - PK -41.28(Margin 0.03dB) - AV	Non-Restricted Bands: ≤ -27dBm Restricted Bands: FCC 15.209 / RSS-Gen 7.2.5 PK: -21.25dBm AV: -41.25dBm	Complied
3.7	15.407(b)	RSS-210 A9.2	Transmitter Conducted Unwanted Emissions	-27.43dB (Margin 0.43dB)	e.i.r.p. -27 dBm	Complied
3.8	15.407(b)	RSS-210 A9.2	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 41.09MHz 36.65 (Margin 3.35dB) - QP	Restricted Bands: FCC 15.209 / RSS-Gen 7.2.5	Complied
3.9	15.407(g)	-	Frequency Stability	1.21 ppm	Signal shall remain in-band	Complied



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Operating Mode	Ch. Freq. (MHz)	Channel Number	Co-location
5250-5350	Non HT-20, 6 to 54Mbps	5260-5320	52-64 [4]	Yes
5250-5350	Non HT-20, Beam Forming, 6 to 54Mbps	5260-5320	52-64 [4]	Yes
5250-5350	HT-20, M0 to M15	5260-5320	52-64 [4]	Yes
5250-5350	HT-20, STBC, M0 to M7	5260-5320	52-64 [4]	Yes
5250-5350	HT-20, Beam Forming, M0 to M7	5260-5320	52-64 [4]	Yes
5250-5350	HT-20, Beam Forming, M8 to M15	5260-5320	52-64 [4]	Yes
5250-5350	HT-40, M0 to M15	5270-5310	54-62 [2]	Yes
5250-5350	HT-40, STBC, M0 to M7	5270-5310	54-62 [2]	Yes
5250-5350	HT-40, Beam Forming, M0 to M7	5270-5310	54-62 [2]	Yes
5250-5350	HT-40, Beam Forming, M8 to M15	5270-5310	54-62 [2]	Yes

Note 1: RF output power specifies that Maximum Conducted Output Power.
Note 2: Non HT-20 / HT-20 / HT-40 uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	WNC	WNC	PIFA Antenna	I-PEX	5
2	WNC	WNC	PIFA Antenna	I-PEX	5


1.1.3 EUT Description

Operating Mode	Non HT-20 6 to 54Mbps		Non HT-20 BF 6 to 54Mbps		HT-20 M0 to M15		HT-20 STBC M0 to M7		HT-20BF M0 to M7		HT-20 BF M8 to M15	
	1	2	1	2	1	2	1	2	1	2	1	2
Tx	1	2	1	2	1	2	1	2	1	2	1	2
Single (Tx)	V	-	-	-	V	-	-	-	-	-	-	-
Two (Tx)	V	V	V	V	V	V	V	V	V	V	V	V

Note: BF: Beam Forming

Operating Mode	HT-40 M0 to M15		HT-40 STBC M0 to M7		HT-40 BF M0 to M7		HT-40 BF M8 to M15	
	1	2	1	2	1	2	1	2
Tx	1	2	1	2	1	2	1	2
Single (Tx)	V	-	-	-	-	-	-	-
Two (Tx)	V	V	V	V	V	V	V	V

Note: BF: Beam Forming

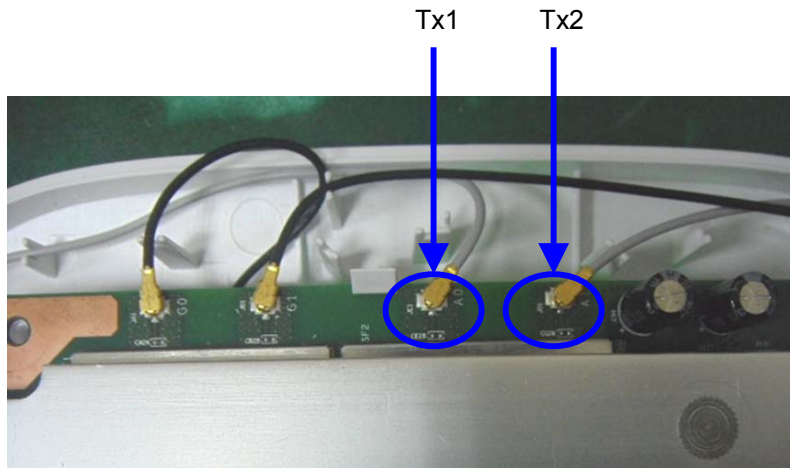

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
The EUT has six model names. All the models are identical; the different model names served as marketing strategy.	
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:



1.1.5 EUT Operational Condition

EUT Power Type	From Power Adapter / POE
----------------	--------------------------

1.1.6 DFS and TPC Information

The DFS/TPC Related Operating Mode(s) of the Equipment		
<input checked="" type="checkbox"/> Master		
<input type="checkbox"/> Slave with radar detection		
<input type="checkbox"/> Slave without radar detection		
Software / Firmware Version		
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Frequency Range (MHz)	TPC (Transmit Power Control)	Active Scan
5250-5350	Yes	Yes

1.2 Accessories

Accessories					
No.	Equipment Name	Brand Name	Model Name	Rating	Remark
1	AC Adapter	CISCO	AA25480L	INPUT: 100-240V ~ 600mA, 50/60Hz OUTPUT: 48V, 380mA	With power cable
2	AC Adapter	CISCO	EADP-18MB B	INPUT: 100-240V ~ 0.5A, 50-60Hz OUTPUT: 48V, 0.38A	With power cable

1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	M1330	E2KWM3945ABG
2	Notebook	DELL	E6220	E2KWM3945ABG
3	Notebook	DELL	E6220	E2KWM3945ABG
4	Notebook	DELL	E6400	E2KWM3945ABG
5	POE	CISCO	DPSN-35FB A	N/A
6	POE	CISCO	POE30U-560(G)	N/A
7	POE Switch	MOTOROLA	RFS-4010	N/A

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172
- ◆ IC RSS-210 Issue 8 and RSS-Gen Issue 3

1.5 Testing Location Information

Testing Location			
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055	
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085	
Test Condition	Test Site No.	Test Engineer	Test Environment
RF Conducted	TH01-CB	Satoshi Yang	24°C / 60%
AC Conduction	CO01-CB	Sollo Luo	24°C / 64%
Radiated Emission	03CH01-CB	Satoshi Yang	24°C / 60%

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing	
Operating Mode	Worst Data Rate / MCS
Non HT-20, 6 to 54Mbps	6Mbps
Non HT-20, Beam Forming, 6 to 54Mbps	6Mbps
HT-20, M0 to M15	6.5Mbps (M0)
HT-20, STBC, M0 to M7	6.5Mbps (M0)
HT-20, Beam Forming, M0 to M7	6.5Mbps (M0)
HT-20, Beam Forming, M8 to M15	13Mbps (M8)
HT-40, M0 to M15	13.5Mbps (M0)
HT-40, STBC, M0 to M7	13.5Mbps (M0)
HT-40, Beam Forming, M0 to M7	13.5Mbps (M0)
HT-40, Beam Forming, M8 to M15	27Mbps (M8)

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.

Note 2: Modulation modes consist of below configuration:
M: Modulation and Coding Scheme

Note 3: RF output power specifies that Maximum Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Operating Mode	Test Channel Frequencies (MHz)
Non HT-20, 6 to 54Mbps	5260, 5300, 5320
Non HT-20, Beam Forming, 6 to 54Mbps	
HT-20, M0 to M15	
HT-20, STBC, M0 to M7	
HT-20, Beam Forming, M0 to M7	
HT-20, Beam Forming, M8 to M15	
HT-40, M0 to M15	5270, 5310
HT-40, STBC, M0 to M7	
HT-40, Beam Forming, M0 to M7	
HT-40, Beam Forming, M8 to M15	

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter						
Test Software Version	ART 2 GUI:2.3					
Operating Mode	N _{TX}	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5260	5300	5320	5270	5310
Non HT-20, 6 to 54Mbps	2	16.5	16.5	16.5	-	-
Non HT-20, Beam Forming, 6 to 54Mbps	2	16	16.5	16.5	-	-
HT-20, M0 to M15	2	16.5	16.5	16.5	-	-
HT-20, STBC, M0 to M7	2	16.5	16.5	16.5	-	-
HT-20, Beam Forming, M0 to M7	2	16	16.5	16.5	-	-
HT-20, Beam Forming, M8 to M15	2	16.5	16.5	16.5	-	-
HT-40, M0 to M15	2	-	-	-	16.5	15.5
HT-40, STBC, M0 to M7	2	-	-	-	16.5	15.5
HT-40, Beam Forming, M0 to M7	2	-	-	-	16.5	12
HT-40, Beam Forming, M8 to M15	2	-	-	-	16.5	15.5

2.4 Target Maximum Channel Power

Operating Mode	N _{TX}	Target Maximum Channel Power (dBm)		
		Frequency (MHz)		
		5260	5300	5320
Non HT-20, 6 to 54Mbps	2	19.92	19.87	20.19
Non HT-20, Beam Forming, 6 to 54Mbps	2	19.32	19.87	20.19
HT-20, M0 to M15	2	20.09	19.80	20.23
HT-20, STBC, M0 to M7	2	20.09	19.80	20.23
HT-20, Beam Forming, M0 to M7	2	19.16	19.80	20.23
HT-20, Beam Forming, M8 to M15	2	19.90	19.92	20.09
		5270	5310	
HT-40, M0 to M15	2	20.09	18.88	
HT-40, STBC, M0 to M7	2	20.09	18.88	
HT-40, Beam Forming, M0 to M7	2	20.09	15.60	
HT-40, Beam Forming, M8 to M15	2	20.03	18.91	



2.5 EUT Operation during Test

During the test, "ART 2 GUI:2.3" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

2.6 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Test Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Test Mode	Normal Link
1	EUT with AC Adapter 1 (CISCO AA25480L)
2	EUT with AC Adapter 2 (CISCO EADP-18MB B)


For test mode 2 is the worst case and it was record in this test report.


The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth RF Output Power Peak Power Spectral Density Peak Excursion Transmitter Conducted Bandedge Emissions Transmitter Conducted Unwanted Emissions Frequency Stability
Test Condition	Conducted measurement at transmit chains
Operating Mode	Non HT-20 / Non HT-20, Beam Forming / HT-20 / HT-20, STBC / HT-20, Beam Forming / HT-40 / HT-40, STBC / HT-40, Beam Forming



The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Unwanted Emissions
Test Condition	Radiated measurement
Test Mode < 1GHz	Normal Link
1	Stand-up of EUT with AC Adapter 1 (CISCO AA25480L)
2	Laying-flat of EUT with AC Adapter 1 (CISCO AA25480L)
Mode 1 has been evaluated to be the worst case, thus measurement will follow this same test mode.	
3	Stand-up of EUT with AC Adapter 2 (CISCO EADP-18MB B)
4	Stand-up of EUT with POE 1 (CISCO DPSN-35FB A)
5	Stand-up of EUT with POE 2 (CISCO POE30U-560(G))
6	Stand-up of EUT with POE Switch (MOTOROLA RFS-4010)
For test mode 4 is the worst case and it was record in this test report.	
Operating Mode	Non HT-20 / Non HT-20, Beam Forming / HT-20 / HT-20, STBC / HT-20, Beam Forming / HT-40 / HT-40, STBC / HT-40, Beam Forming
Test Mode > 1GHz	Continuously transmit RF signal
1	Stand-up of EUT
2	Laying-flat of EUT
For test mode 2 is the worst case and it was record in this test report.	

2.7 Test Setup Diagram

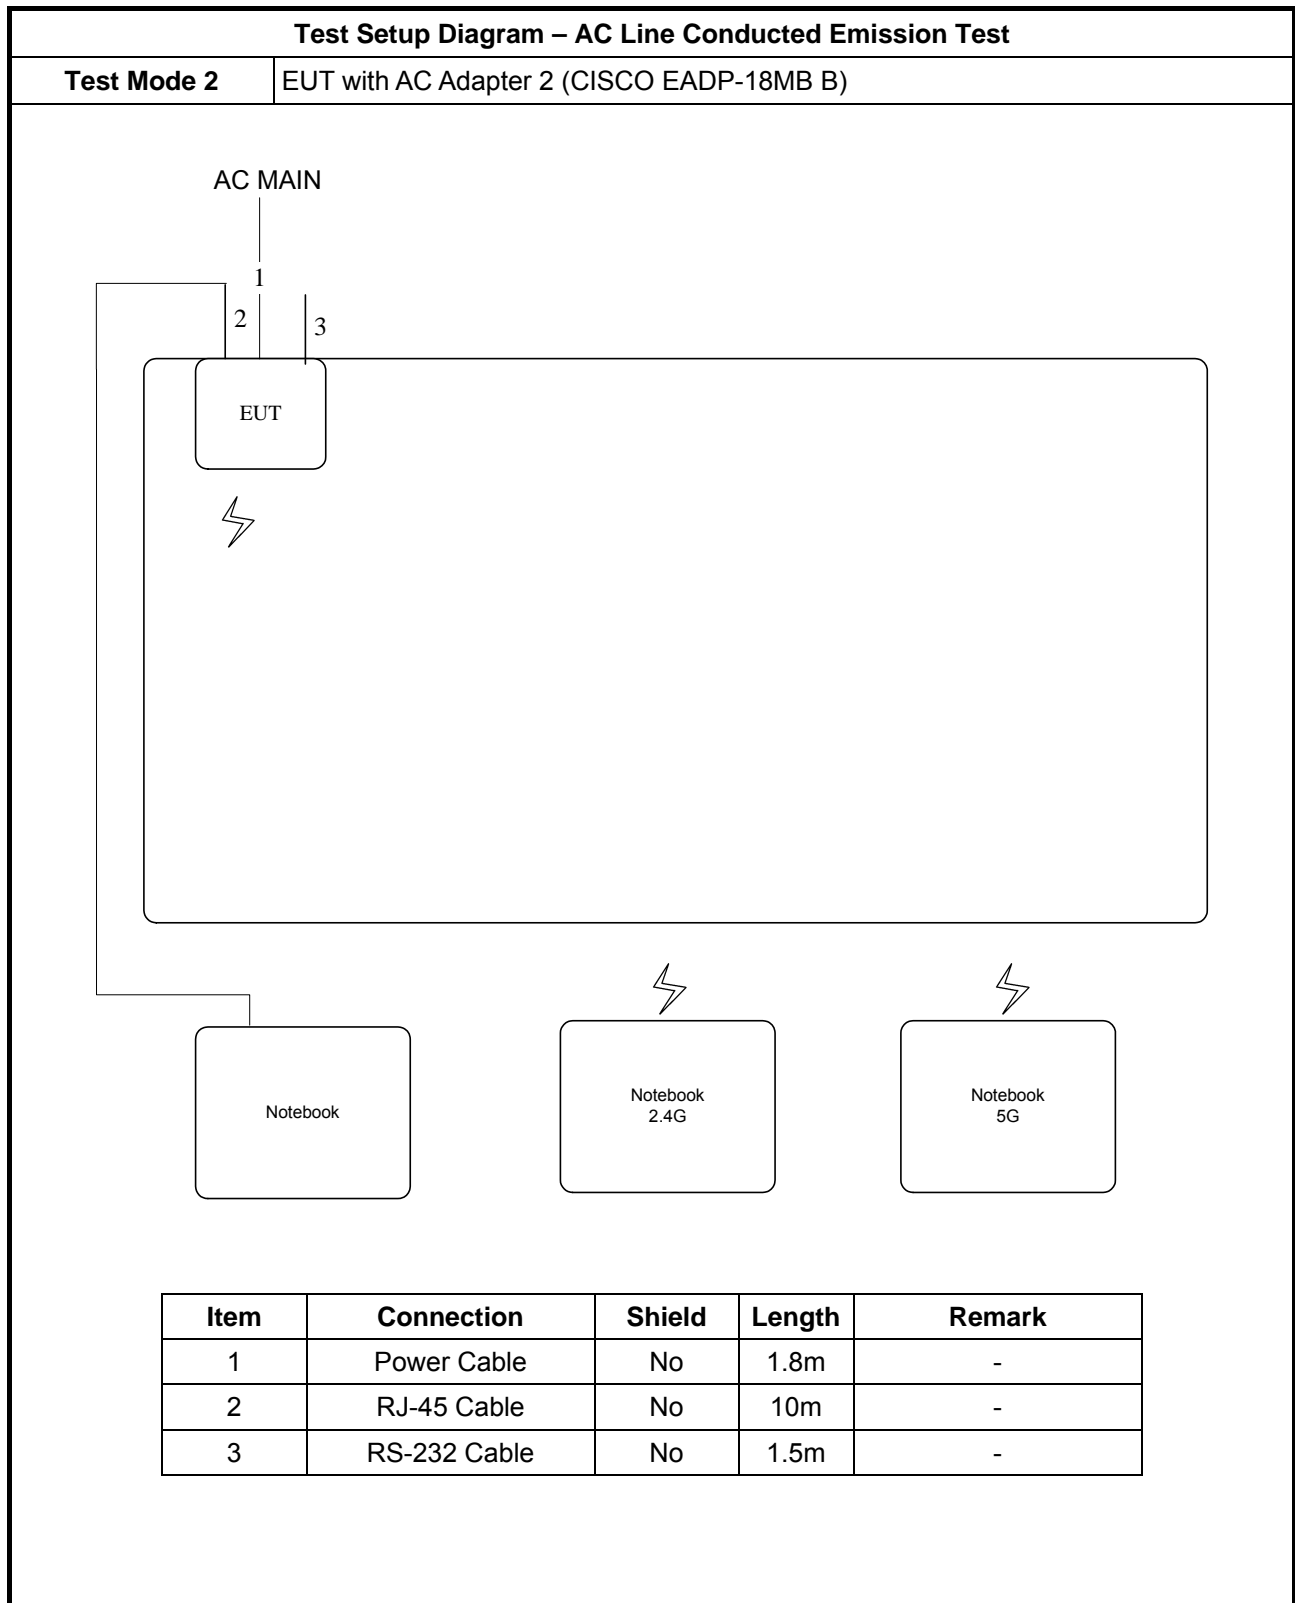

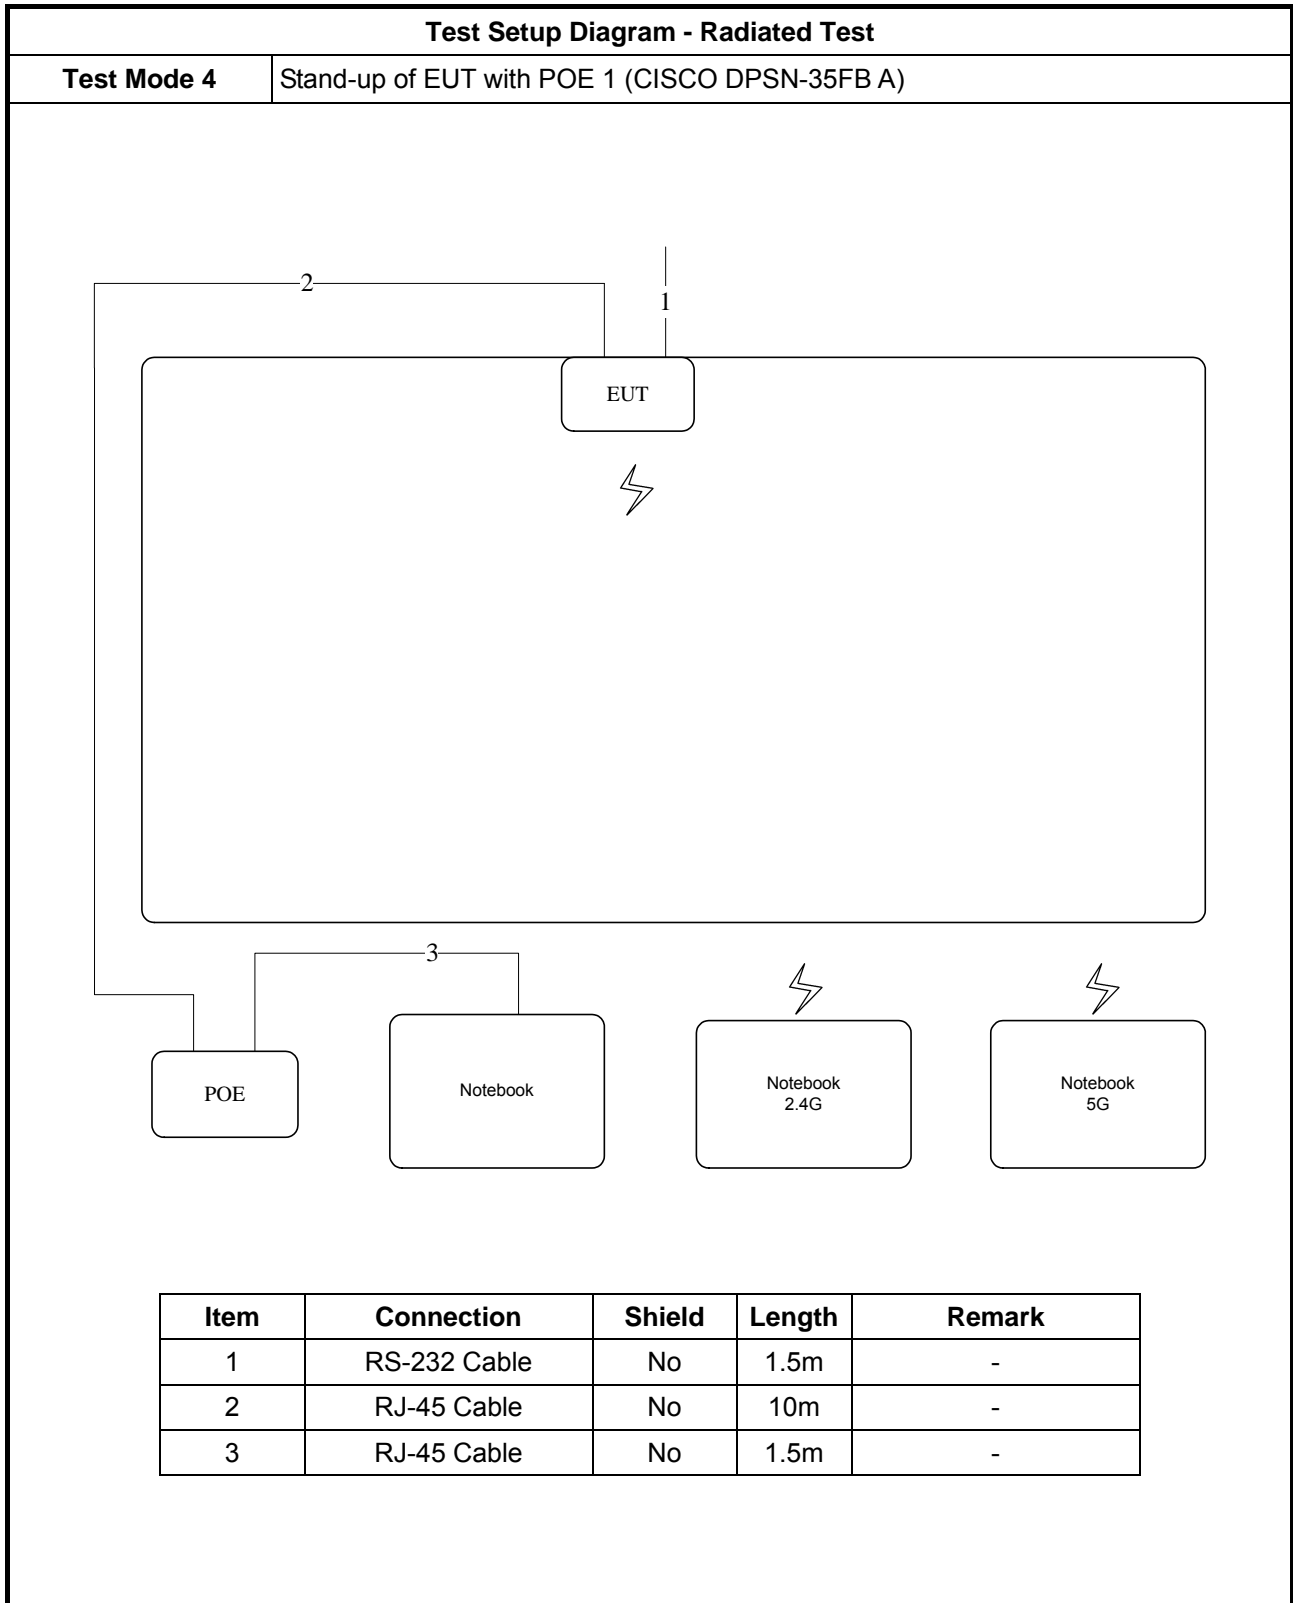

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

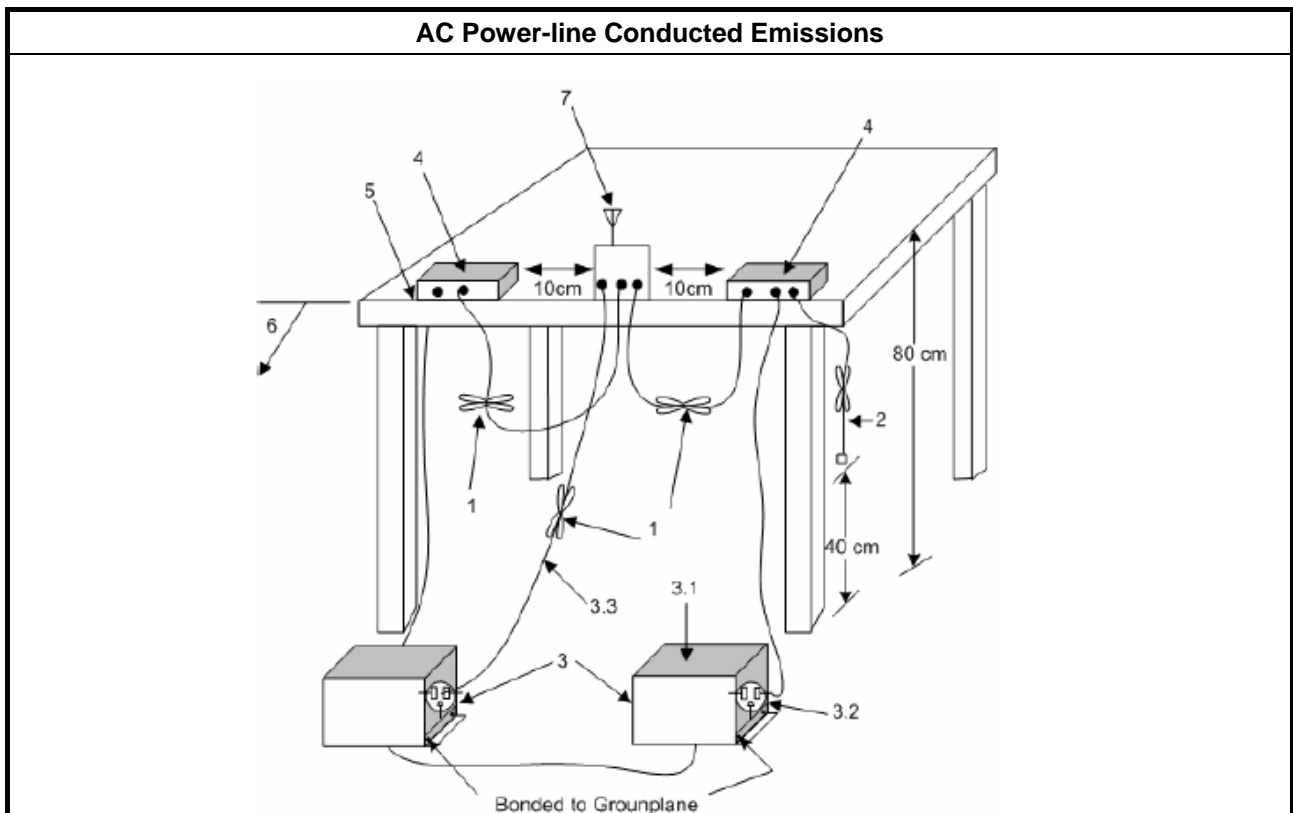


3.1.5 Test Result of AC Power-line Conducted Emissions

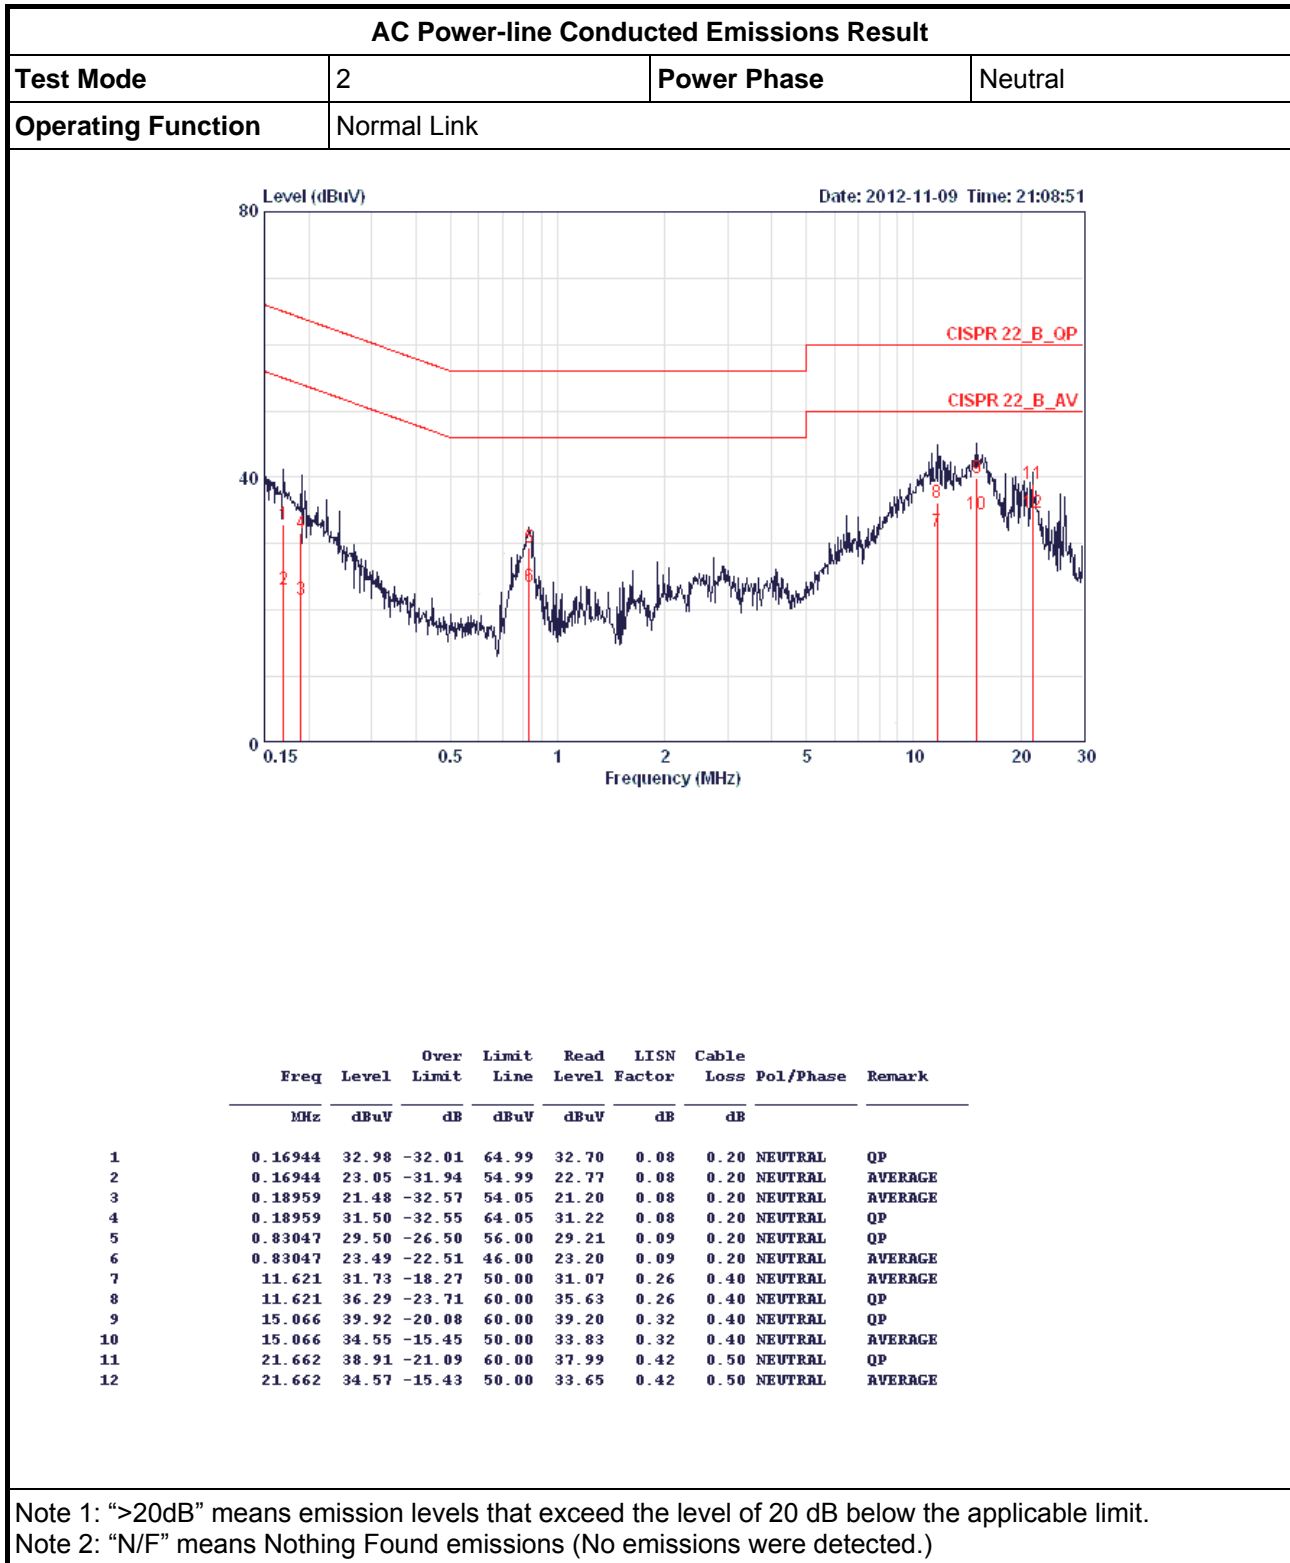



AC Power-line Conducted Emissions Result

Test Mode	2	Power Phase	Line
Operating Function	Normal Link		

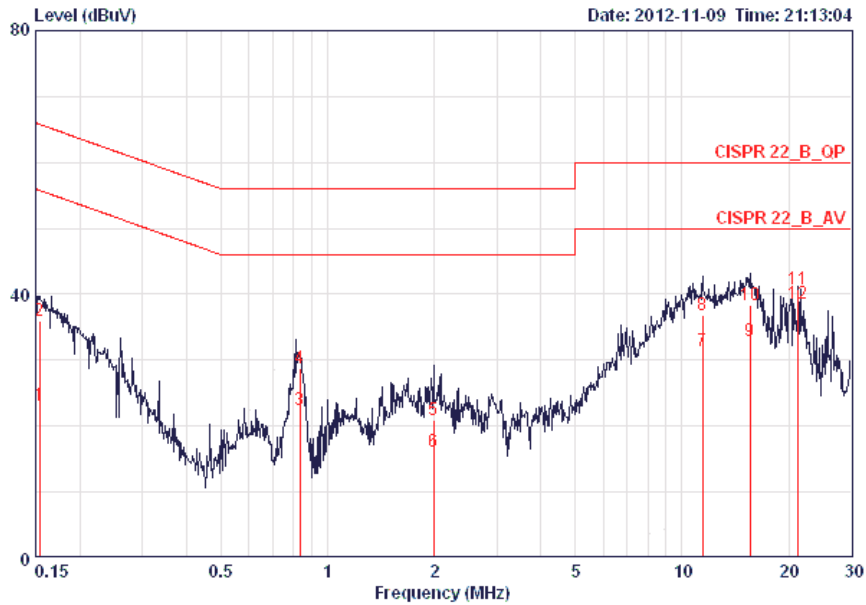

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15403	23.07	-32.71	55.78	22.71	0.16	0.20	LINE	AVERAGE
2	0.15403	36.02	-29.76	65.78	35.66	0.16	0.20	LINE	QP
3	0.83337	22.47	-23.53	46.00	22.11	0.16	0.20	LINE	AVERAGE
4	0.83337	28.81	-27.19	56.00	28.45	0.16	0.20	LINE	QP
5	1.991	20.87	-35.13	56.00	20.48	0.19	0.20	LINE	QP
6	1.991	16.05	-29.95	46.00	15.66	0.19	0.20	LINE	AVERAGE
7	11.438	31.31	-18.69	50.00	30.55	0.36	0.40	LINE	AVERAGE
8	11.438	36.85	-23.15	60.00	36.09	0.36	0.40	LINE	QP
9	15.552	32.98	-17.02	50.00	32.16	0.42	0.40	LINE	AVERAGE
10	15.552	38.45	-21.55	60.00	37.63	0.42	0.40	LINE	QP
11	21.169	40.70	-19.30	60.00	39.70	0.50	0.50	LINE	QP
12	21.169	38.62	-11.38	50.00	37.62	0.50	0.50	LINE	AVERAGE

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit
For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause D for EBW measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

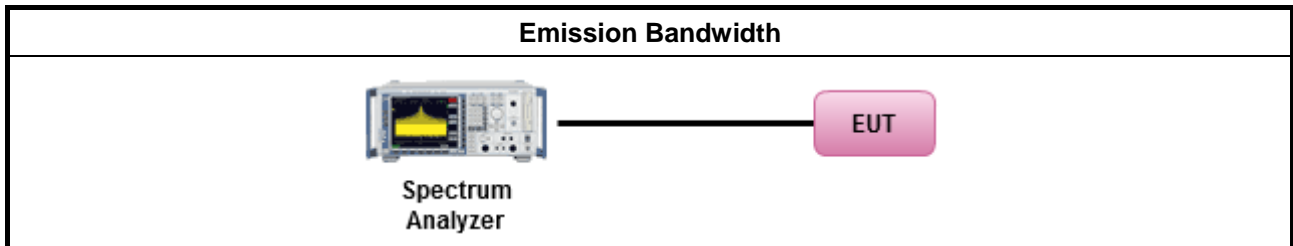


3.2.5 Test Result of Emission Bandwidth

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	99% BW (MHz)	26dB BW (MHz)
5260	Non HT-20, 6 to 54Mbps	6	17.04	23.44
	HT-20, Beam Forming, M0 to M7	M0	18.4	25.84
	HT-20, Beam Forming, M8 to M15	M8	18.16	23.76
5300	Non HT-20, 6 to 54Mbps	6	17.2	23.68
	HT-20, Beam Forming, M0 to M7	M0	18.32	25.44
	HT-20, Beam Forming, M8 to M15	M8	18.32	24.24
5320	Non HT-20, 6 to 54Mbps	6	17.12	23.84
	HT-20, Beam Forming, M0 to M7	M0	18.56	25.28
	HT-20, Beam Forming, M8 to M15	M8	18.4	23.36
5270	HT-40, Beam Forming, M0 to M7	M0	38.56	53.28
	HT-40, Beam Forming, M8 to M15	M8	38.24	51.36
5310	HT-40, Beam Forming, M0 to M7	M0	38.4	52.16
	HT-40, Beam Forming, M8 to M15	M8	38.4	51.68




26 dB and 99% Bandwidth Plot on 5260 MHz, Non HT-20, 6Mbps

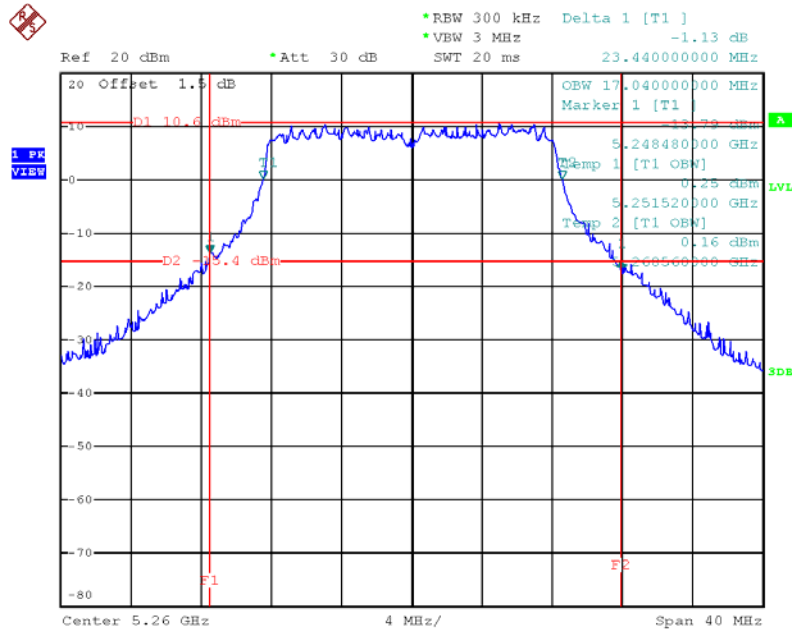

Date: 24.OCT.2012 04:03:56


26 dB and 99% Bandwidth Plot on 5260 MHz, HT-20, Beam Forming, M0

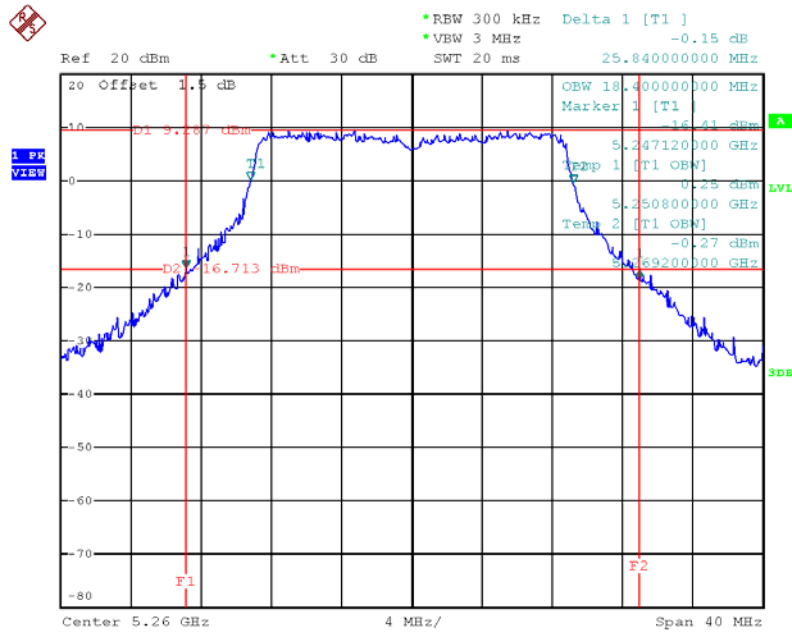

Date: 24.OCT.2012 04:06:48




26 dB and 99% Bandwidth Plot on 5260 MHz, HT-20, Beam Forming, M8

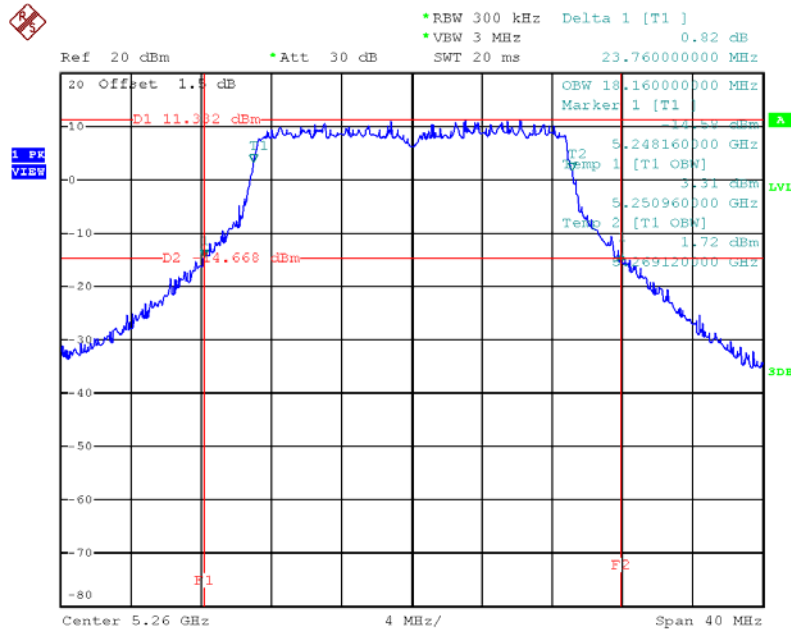

Date: 24.OCT.2012 04:06:26


26 dB and 99% Bandwidth Plot on 5300 MHz, Non HT-20, 6Mbps

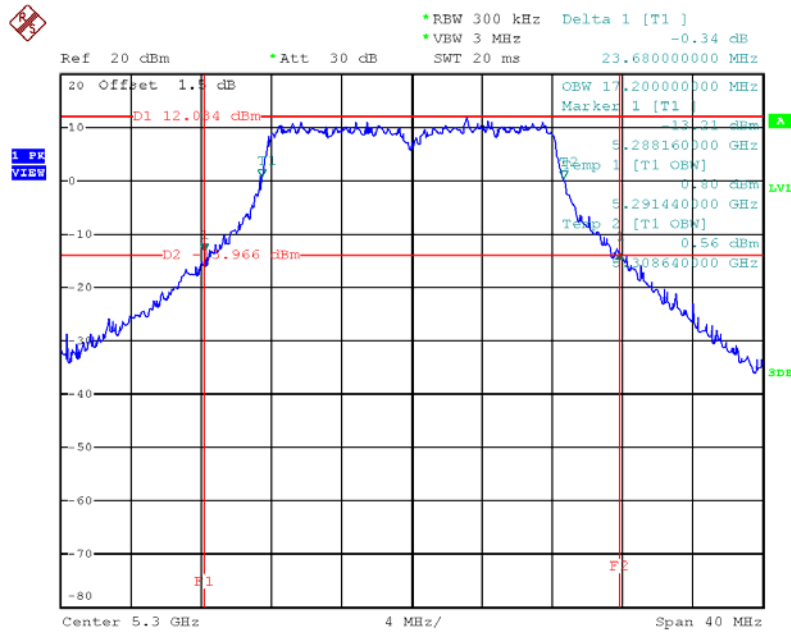

Date: 24.OCT.2012 04:04:26




26 dB and 99% Bandwidth Plot on 5300 MHz, HT-20, Beam Forming, M0

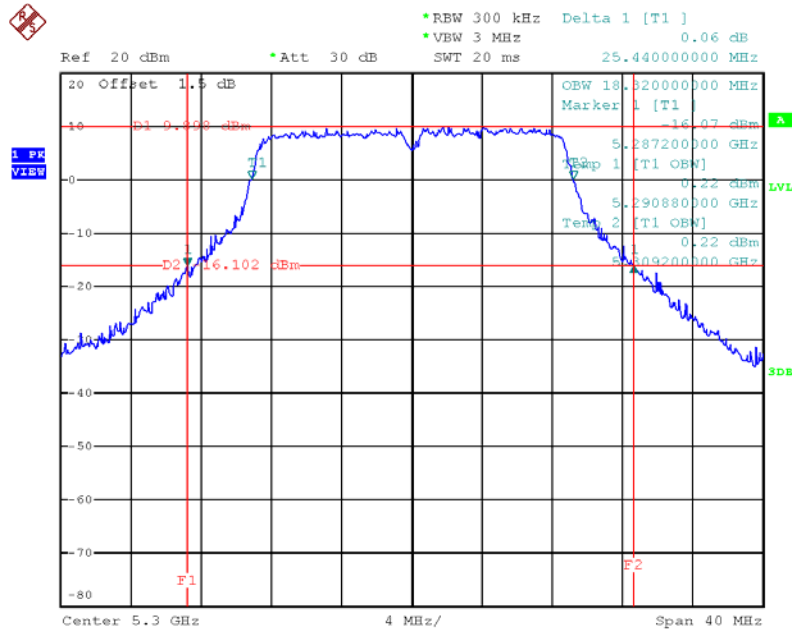


Date: 24.OCT.2012 04:07:13

26 dB and 99% Bandwidth Plot on 5300 MHz, HT-20, Beam Forming, M8

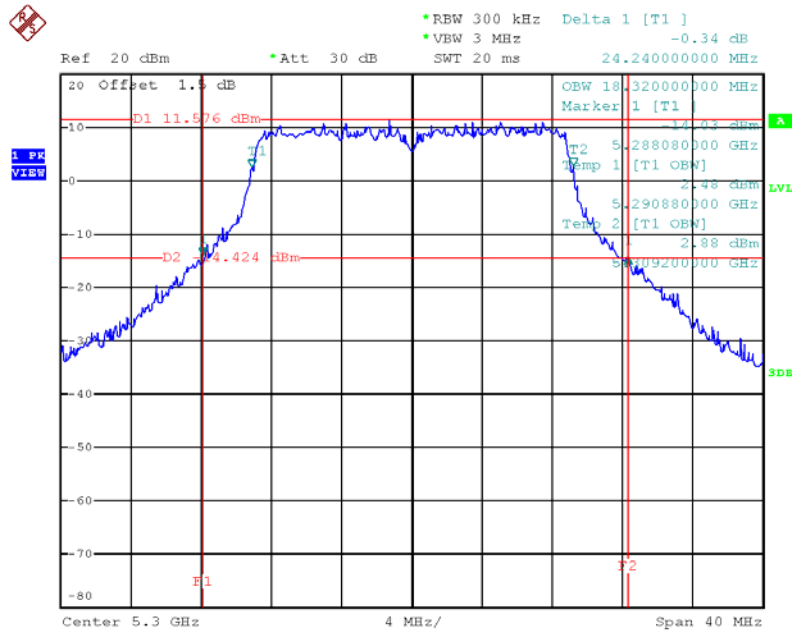


Date: 24.OCT.2012 04:07:41

26 dB and 99% Bandwidth Plot on 5320 MHz, Non HT-20, 6Mbps

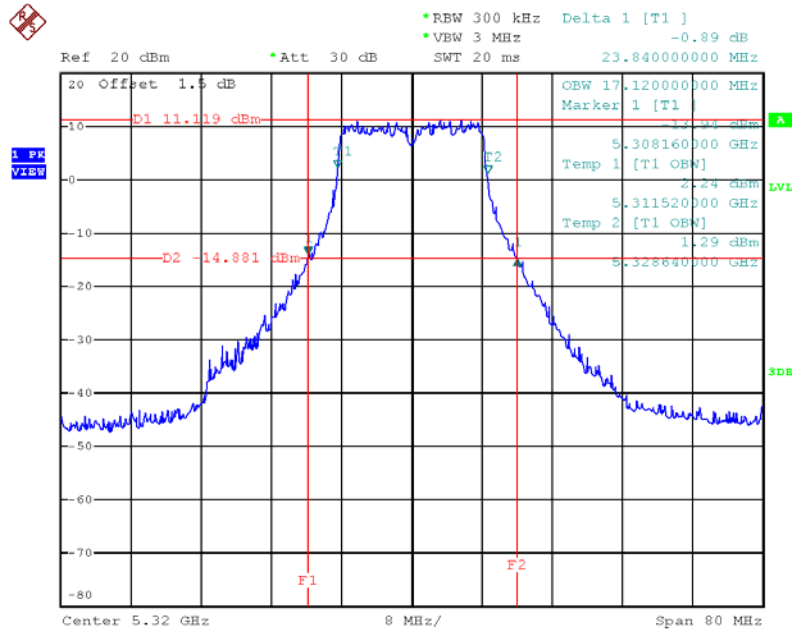

Date: 24.OCT.2012 04:04:44


26 dB and 99% Bandwidth Plot on 5320 MHz, HT-20, Beam Forming, M0

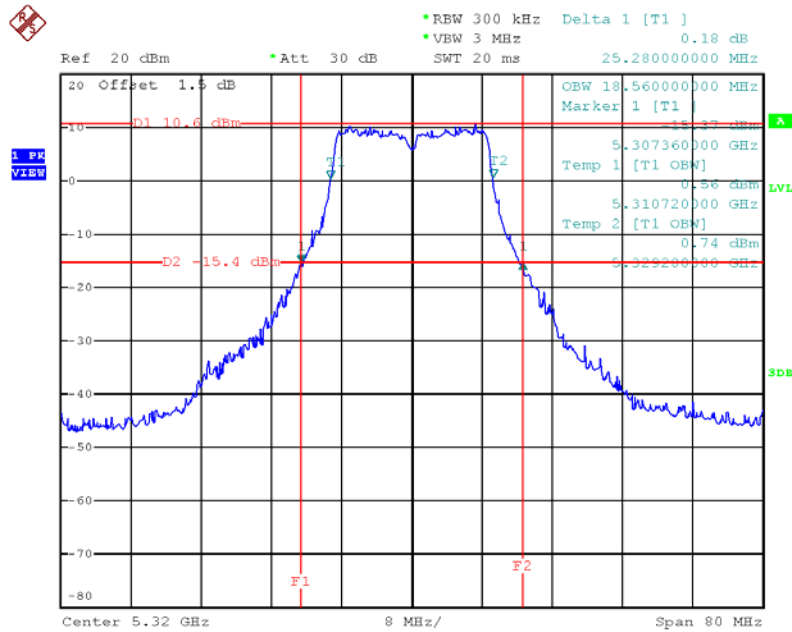

Date: 24.OCT.2012 04:05:25




26 dB and 99% Bandwidth Plot on 5320 MHz, HT-20, Beam Forming, M8

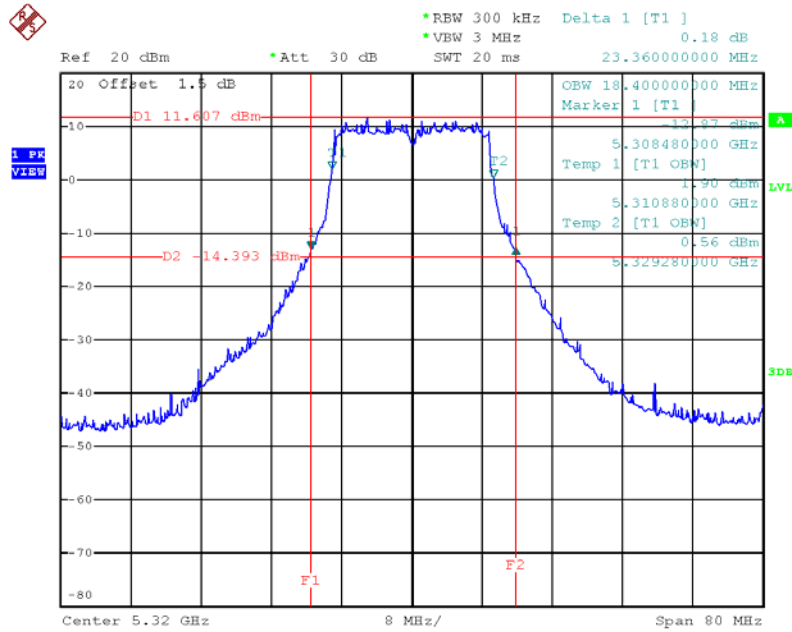

Date: 24.OCT.2012 04:05:52


26 dB and 99% Bandwidth Plot on 5270 MHz, HT-40, Beam Forming, M0

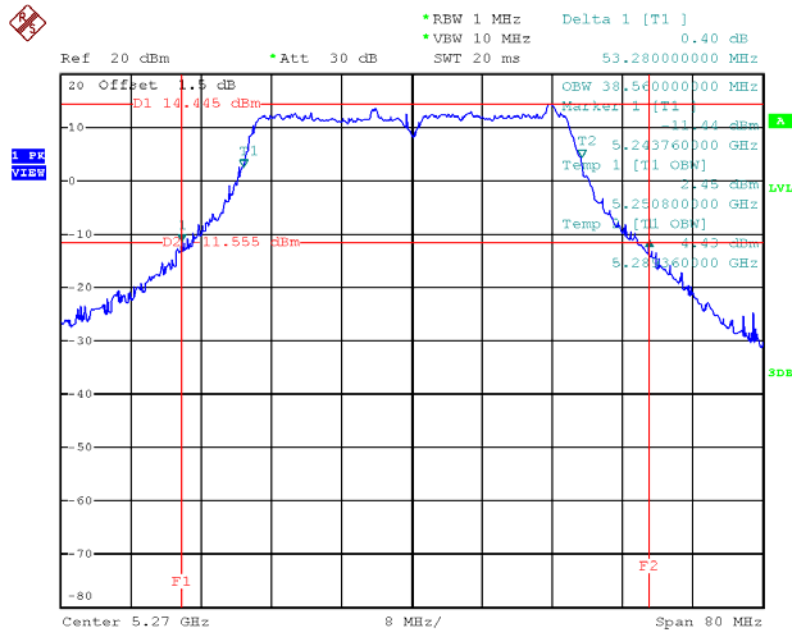

Date: 24.OCT.2012 04:08:54




26 dB and 99% Bandwidth Plot on 5270 MHz, HT-40, Beam Forming, M8

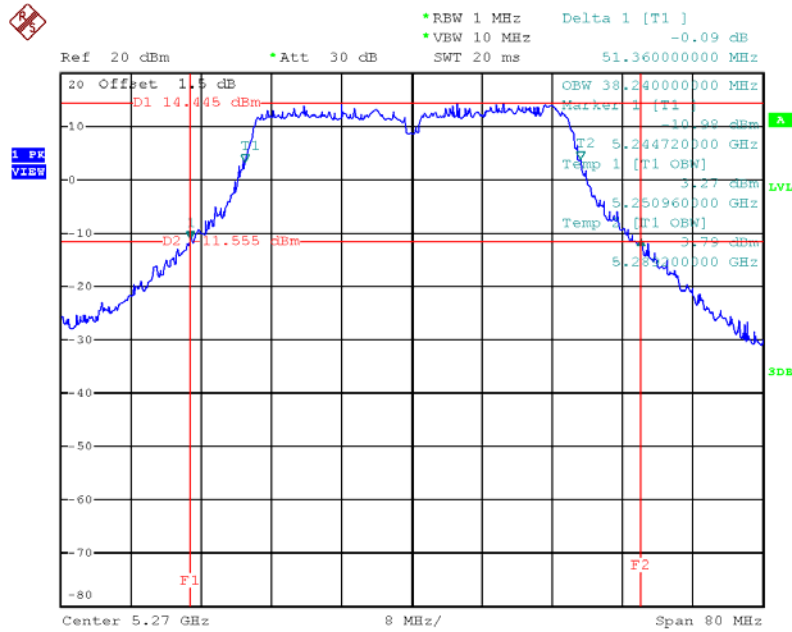

Date: 24.OCT.2012 04:09:20


26 dB and 99% Bandwidth Plot on 5310 MHz, HT-40, Beam Forming, M0

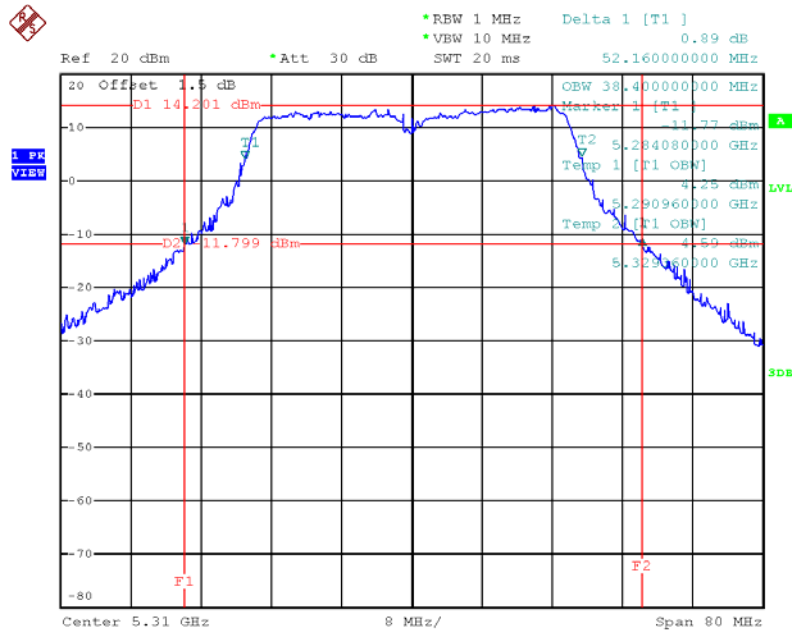

Date: 24.OCT.2012 04:10:34



26 dB and 99% Bandwidth Plot on 5310 MHz, HT-40, Beam Forming, M8

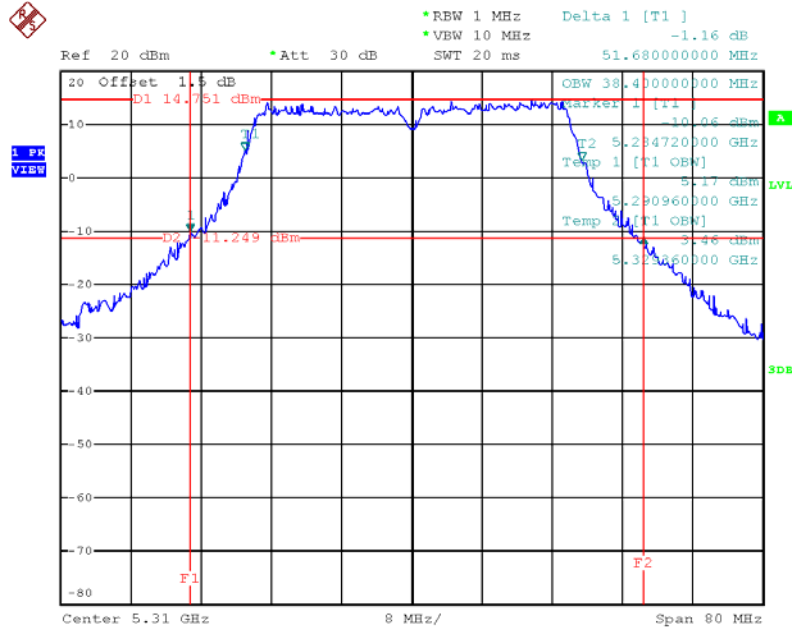

Date: 24.OCT.2012 04:09:47

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit
For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle \geq 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method PM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.

3.3.4 Test Setup

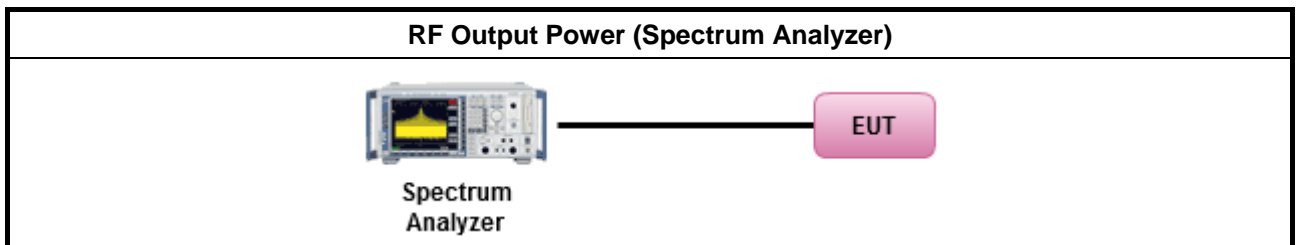




3.3.5 Test Result of Maximum Conducted Output Power

Freq. (MHz)	Operating Mode	N _{TX}	Correlated Antenna Gain (dBi)	Tx1 Output Power (dBm)	Tx2 Output Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	2	5.00	17.29	16.5	19.92	24.00	4.08
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	16.86	15.67	19.32	21.99	2.67
	HT-20, M0 to M15	2	5.00	17.49	16.62	20.09	24.00	3.91
	HT-20, STBC, M0 to M7	2	5.00	17.49	16.62	20.09	24.00	3.91
	HT-20, Beam Forming, M0 to M7	2	8.01	16.71	15.51	19.16	21.99	2.83
	HT-20, Beam Forming, M8 to M15	2	5.00	17.23	16.52	19.90	24.00	4.10
5300	Non HT-20, 6 to 54Mbps	2	5.00	17.16	16.53	19.87	24.00	4.13
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	17.16	16.53	19.87	21.99	2.12
	HT-20, M0 to M15	2	5.00	17.06	16.51	19.80	24.00	4.20
	HT-20, STBC, M0 to M7	2	5.00	17.06	16.51	19.80	24.00	4.20
	HT-20, Beam Forming, M0 to M7	2	8.01	17.06	16.51	19.80	21.99	2.19
	HT-20, Beam Forming, M8 to M15	2	5.00	17.19	16.6	19.92	24.00	4.08
5320	Non HT-20, 6 to 54Mbps	2	5.00	17.65	16.65	20.19	24.00	3.81
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	17.65	16.65	20.19	21.99	1.80
	HT-20, M0 to M15	2	5.00	17.73	16.65	20.23	24.00	3.77
	HT-20, STBC, M0 to M7	2	5.00	17.73	16.65	20.23	24.00	3.77
	HT-20, Beam Forming, M0 to M7	2	8.01	17.73	16.65	20.23	21.99	1.76
	HT-20, Beam Forming, M8 to M15	2	5.00	17.58	16.52	20.09	24.00	3.91
5270	HT-40, M0 to M15	2	5.00	17.34	16.8	20.09	24.00	3.91
	HT-40, STBC, M0 to M7	2	5.00	17.34	16.8	20.09	24.00	3.91
	HT-40, Beam Forming, M0 to M7	2	8.01	17.34	16.8	20.09	21.99	1.90
	HT-40, Beam Forming, M8 to M15	2	5.00	17.47	16.51	20.03	24.00	3.97
5310	HT-40, M0 to M15	2	5.00	16.48	15.15	18.88	24.00	5.12
	HT-40, STBC, M0 to M7	2	5.00	16.48	15.15	18.88	24.00	5.12
	HT-40, Beam Forming, M0 to M7	2	8.01	13.13	11.98	15.60	21.99	6.39
	HT-40, Beam Forming, M8 to M15	2	5.00	16.59	15.07	18.91	24.00	5.09




Maximum Conducted Output Power Plot on 5260 MHz, Non HT-20, 6Mbps

Tx1

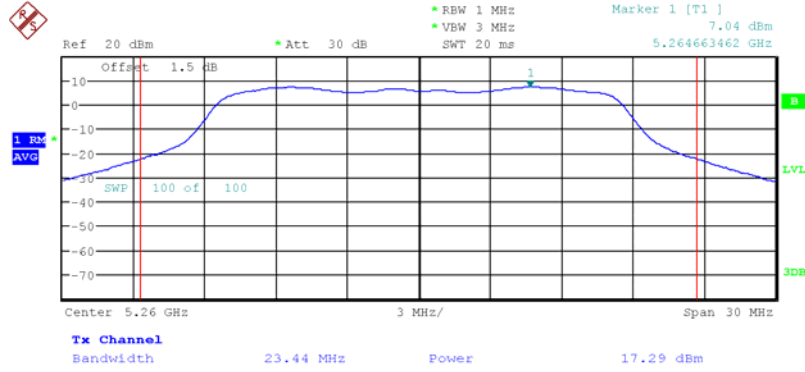

Date: 25.OCT.2012 00:57:18

Tx2

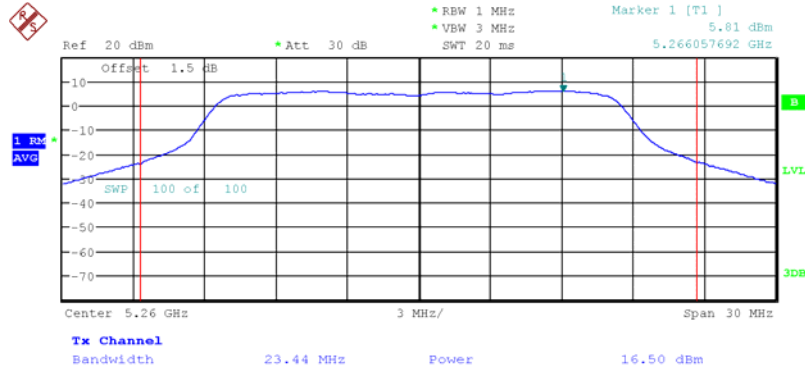


Date: 25.OCT.2012 00:56:44




Maximum Conducted Output Power Plot on 5260 MHz, Non HT-20, Beam Forming, 6Mbps

Tx1

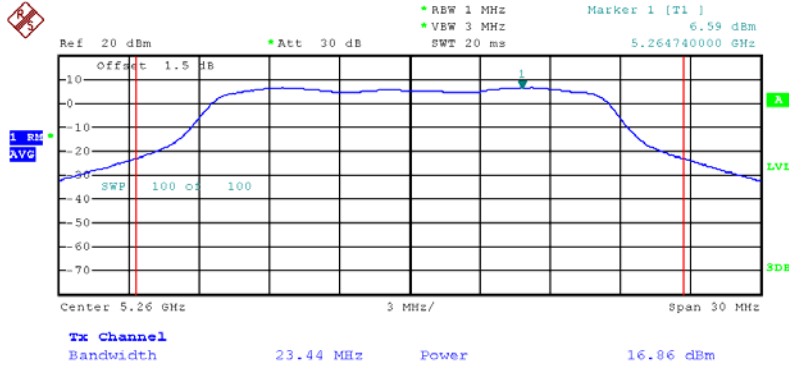

Date: 26.OCT.2012 12:13:17

Tx2

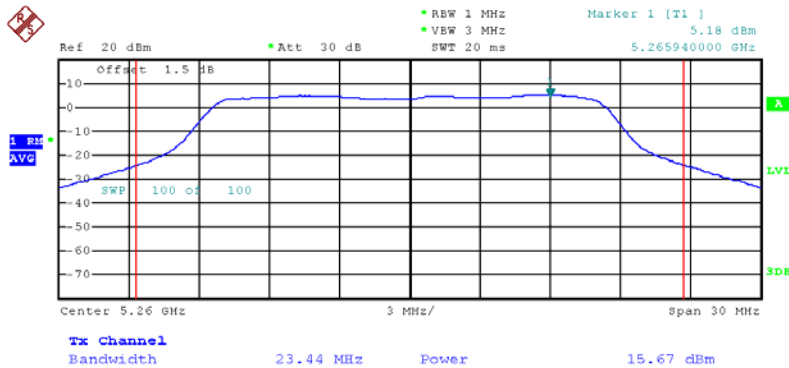


Date: 26.OCT.2012 12:13:50




Maximum Conducted Output Power Plot on 5260 MHz, HT-20 / HT-20, STBC, M0

Tx1

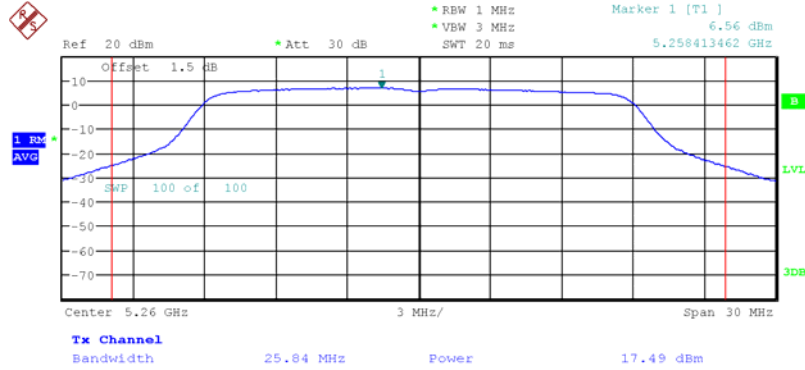

Date: 25.OCT.2012 00:58:10

Tx2

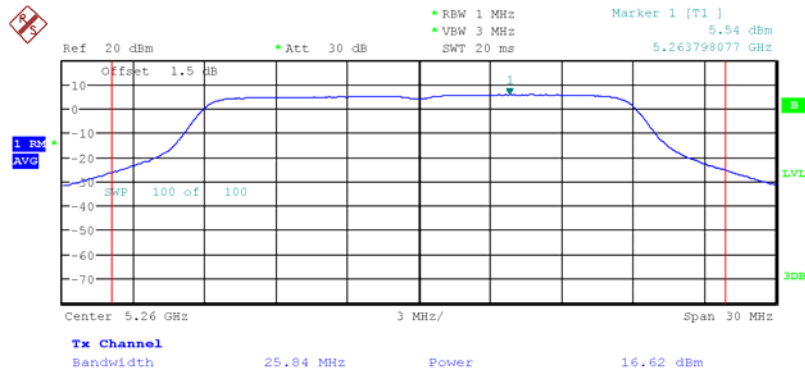


Date: 25.OCT.2012 00:58:36




Maximum Conducted Output Power Plot on 5260 MHz, HT-20, Beam Forming, M0

Tx1

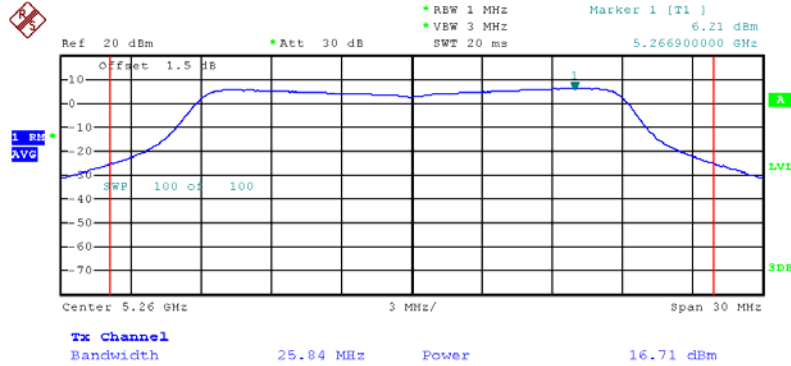

Date: 26.OCT.2012 12:18:05

Tx2

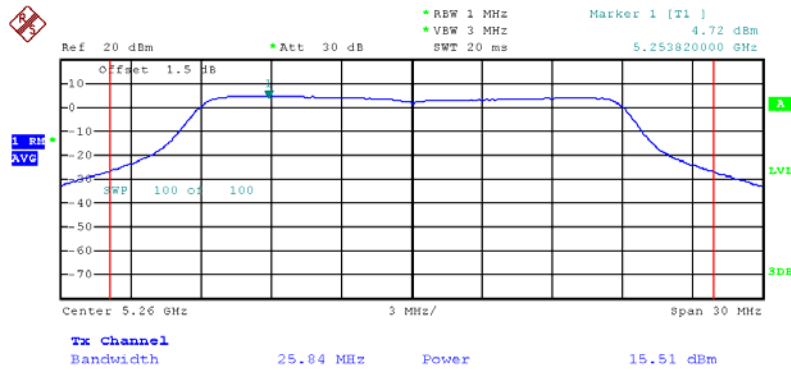


Date: 26.OCT.2012 12:18:38




Maximum Conducted Output Power Plot on 5260 MHz, HT-20, Beam Forming, M8

Tx1

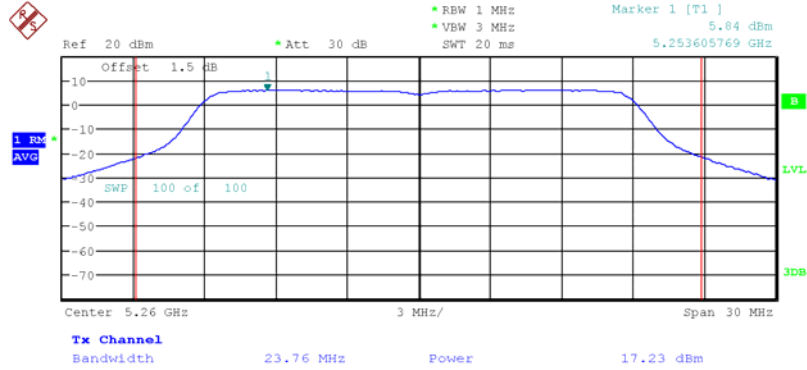

Date: 25.OCT.2012 01:00:40

Tx2

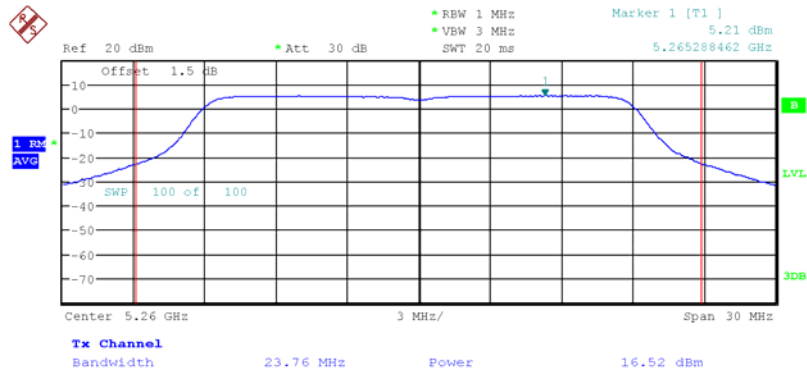


Date: 25.OCT.2012 01:01:16




Maximum Conducted Output Power Plot on 5300 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

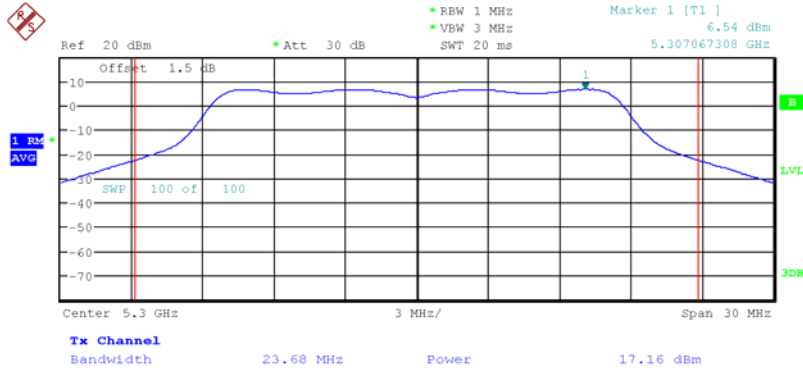

Date: 25.OCT.2012 01:02:59

Tx2

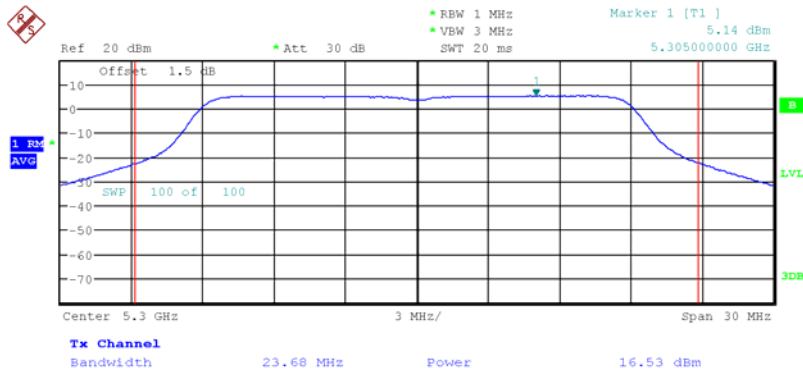


Date: 25.OCT.2012 01:01:58




Maximum Conducted Output Power Plot on 5300 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

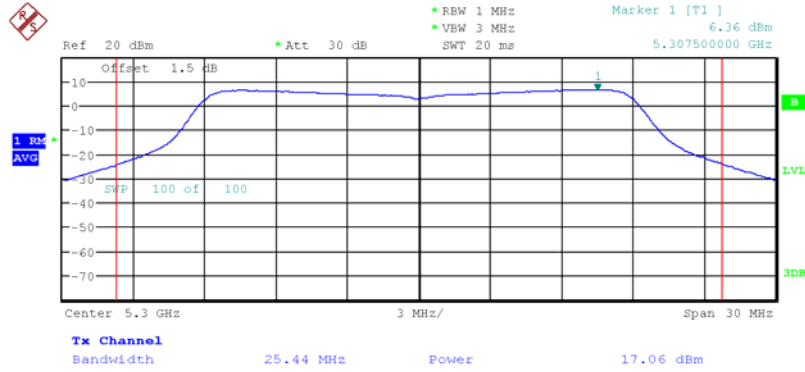

Date: 25.OCT.2012 01:05:12

Tx2

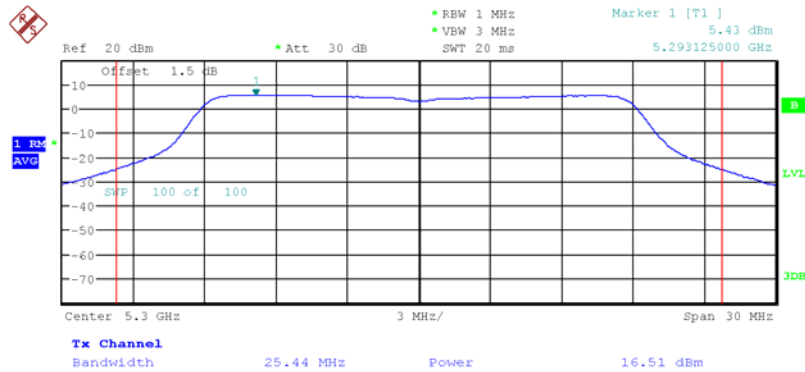


Date: 25.OCT.2012 01:05:43




Maximum Conducted Output Power Plot on 5300 MHz, HT-20, Beam Forming, M8

Tx1

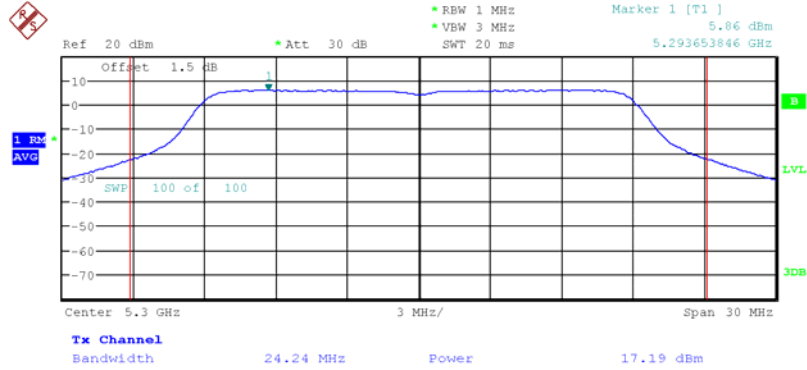

Date: 25.OCT.2012 01:07:04

Tx2

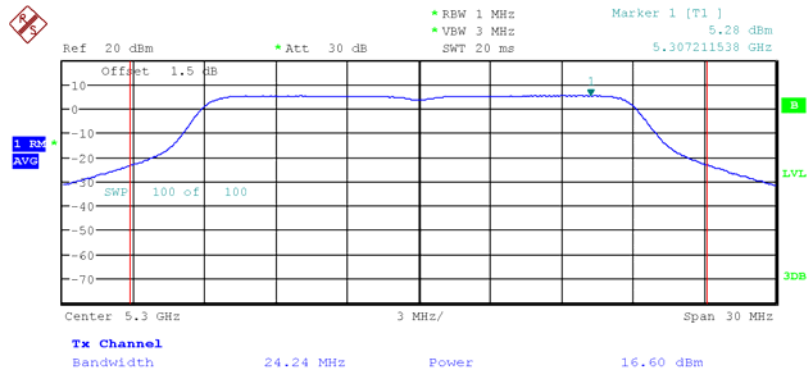


Date: 25.OCT.2012 01:06:26




Maximum Conducted Output Power Plot on 5320 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

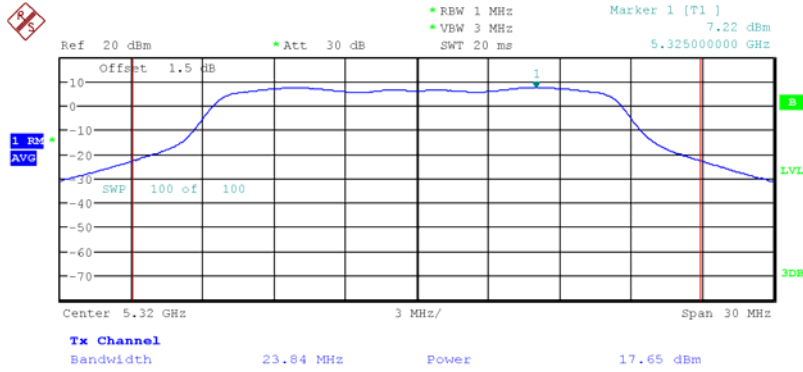

Date: 25.OCT.2012 01:13:36

Tx2

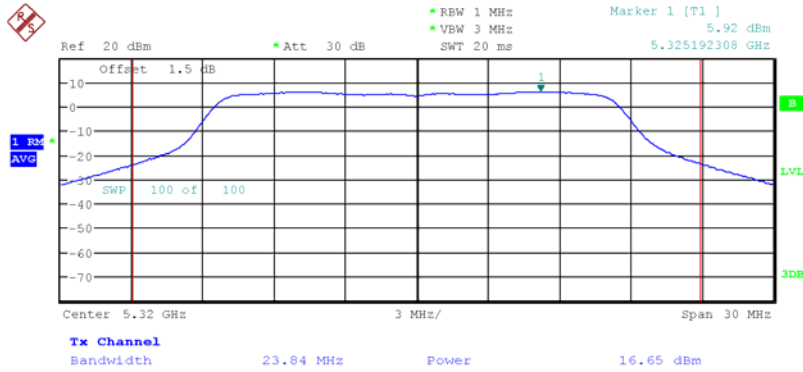


Date: 25.OCT.2012 01:13:59




Maximum Conducted Output Power Plot on 5320 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

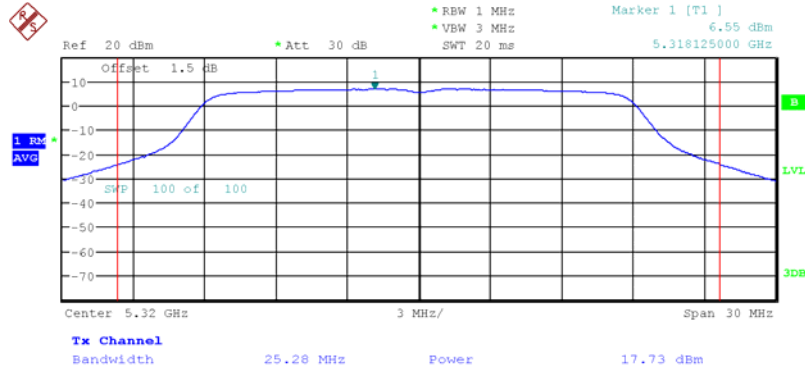

Date: 25.OCT.2012 01:11:24

Tx2

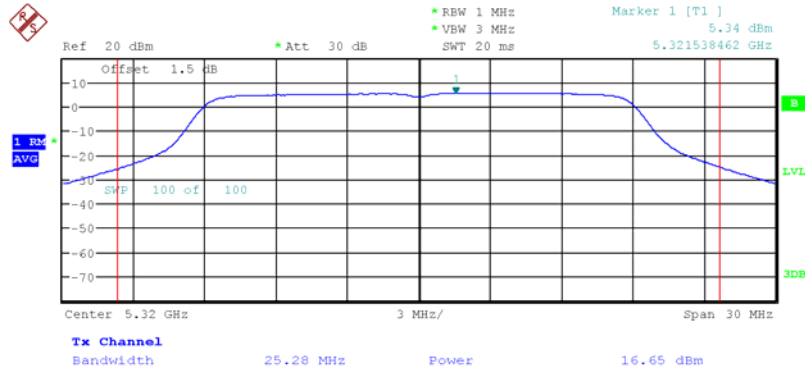


Date: 25.OCT.2012 01:09:22




Maximum Conducted Output Power Plot on 5320 MHz, HT-20, Beam Forming, M8

Tx1

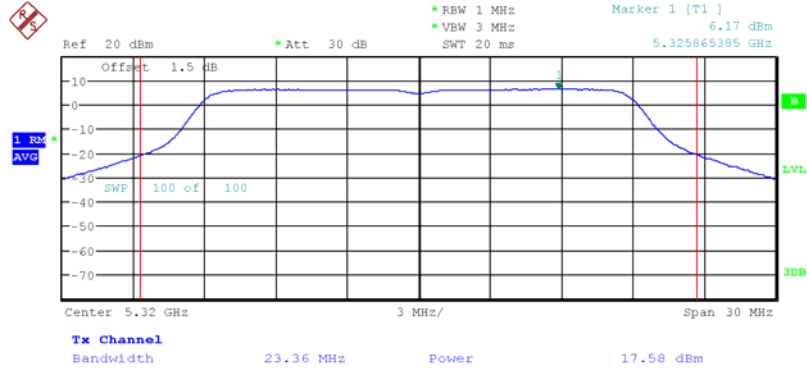

Date: 25.OCT.2012 01:12:28

Tx2

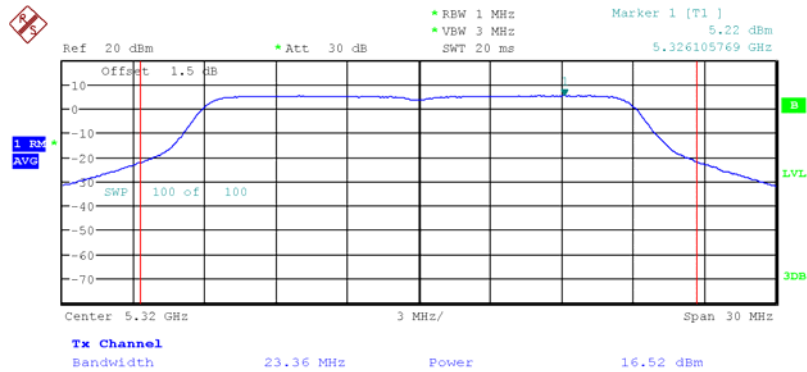


Date: 25.OCT.2012 01:08:35




Maximum Conducted Output Power Plot on 5270 MHz,
HT-40 / HT-40, STBC / HT-40, Beam Forming, M0

Tx1

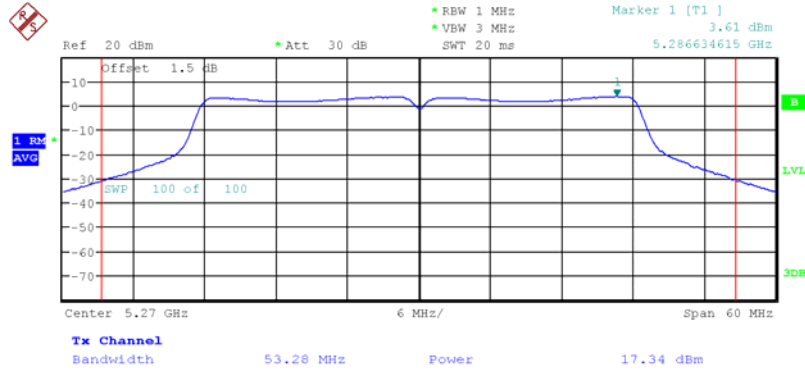

Date: 25.OCT.2012 01:15:50

Tx2

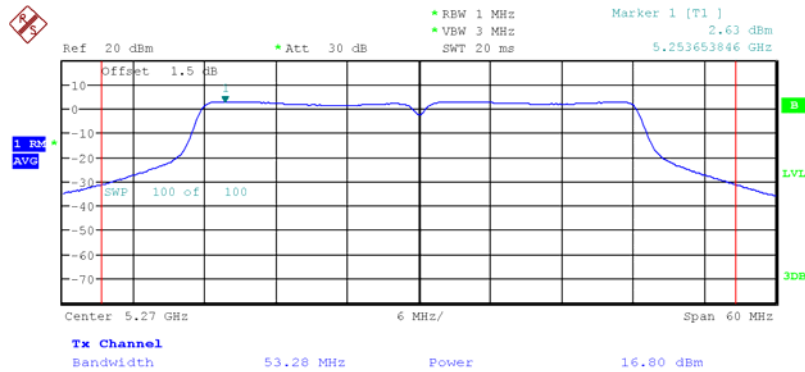


Date: 25.OCT.2012 01:15:27




Maximum Conducted Output Power Plot on 5270 MHz, HT-40, Beam Forming, M8

Tx1

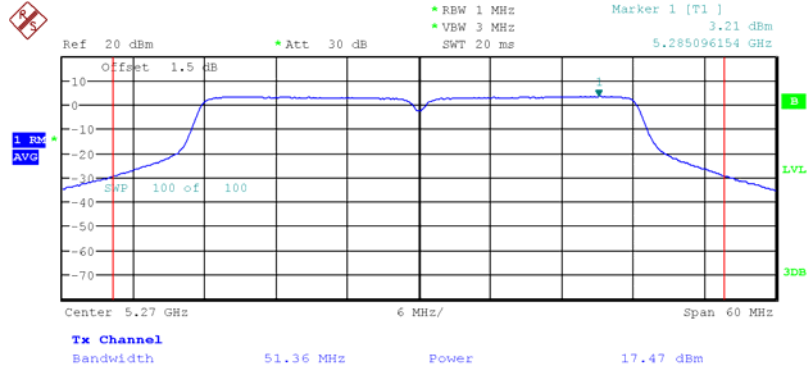

Date: 25.OCT.2012 01:16:18

Tx2

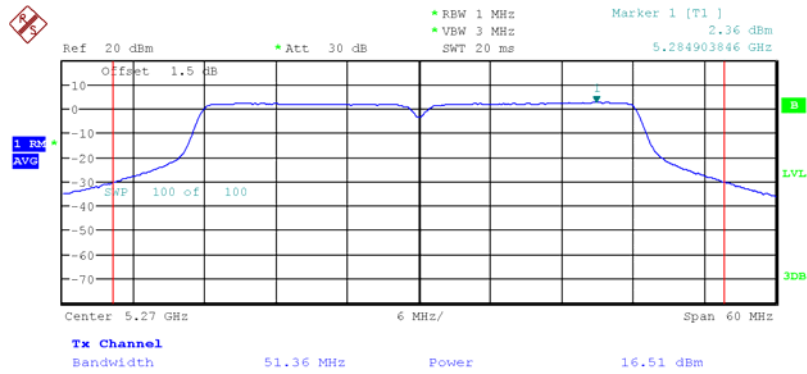


Date: 25.OCT.2012 01:16:48




Maximum Conducted Output Power Plot on 5310 MHz, HT-40 / HT-40, STBC, M0

Tx1

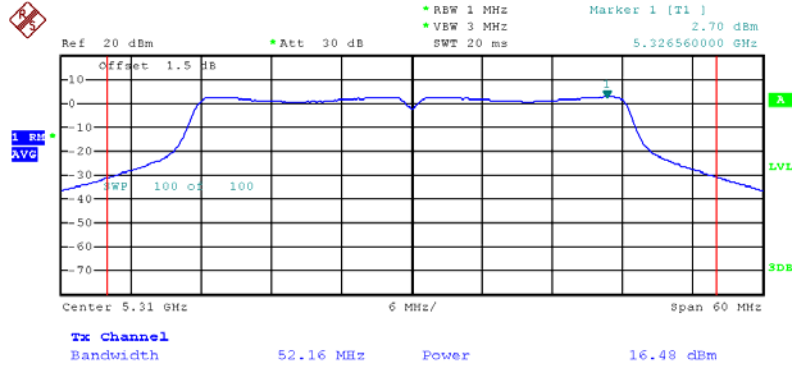

Date: 26.OCT.2012 12:24:26

Tx2

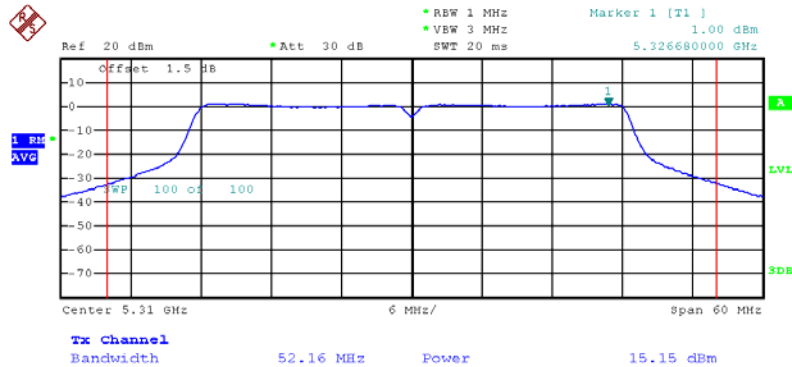


Date: 26.OCT.2012 12:24:51




Maximum Conducted Output Power Plot on 5310 MHz, HT-40, Beam Forming, M0

Tx1

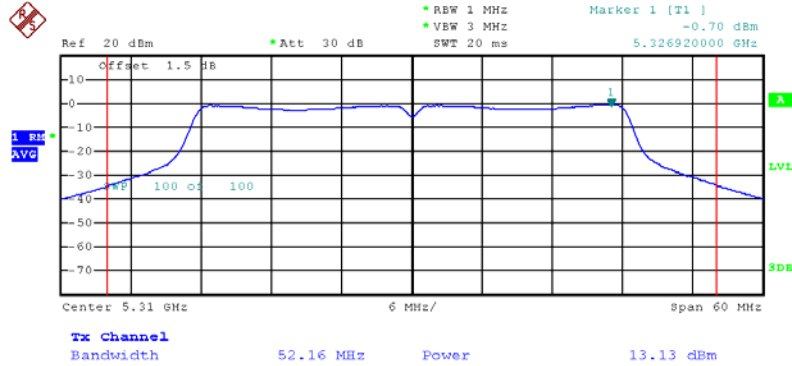

Date: 26.OCT.2012 12:26:49

Tx2

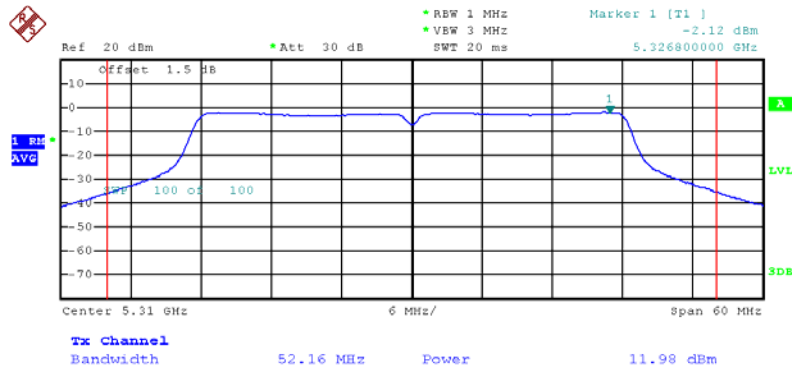


Date: 26.OCT.2012 12:26:17




Maximum Conducted Output Power Plot on 5310 MHz, HT-40, Beam Forming, M8

Tx1

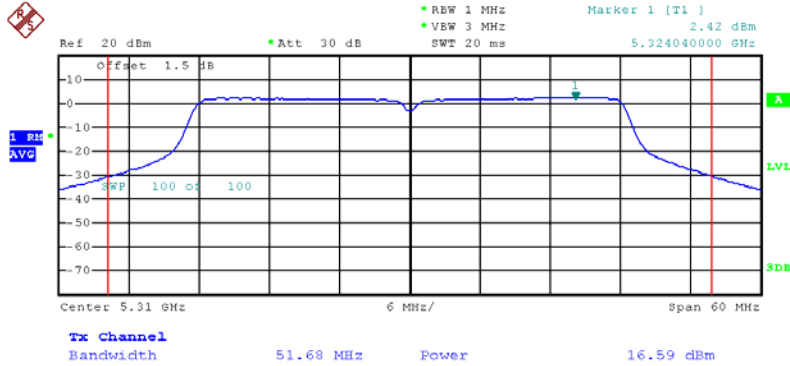

Date: 26.OCT.2012 12:28:03

Tx2

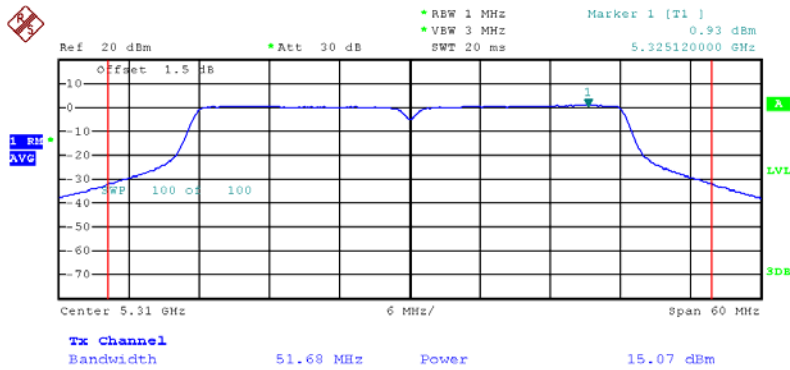

Date: 26.OCT.2012 12:28:36

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit
For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033, E)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle $\geq 98\%$ or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed) duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

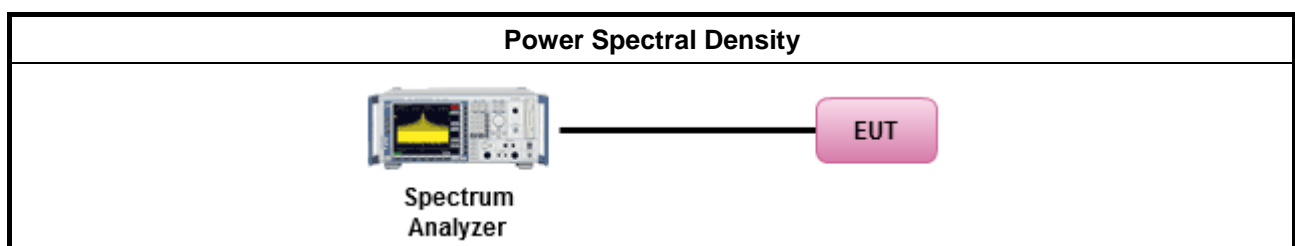


3.4.5 Test Result of Peak Power Spectral Density

Freq. (MHz)	Operating Mode	N _{TX}	Data Rate (Mbps)	Tx1 PSD Antenna (dBm/MHz)	Tx2 PSD Antenna (dBm/MHz)	1Port Limit (dBm/MHz)	1Port Margin (dB)	Total Tx PSD Antenna (dBm/MHz)	Total Port Limit (dBm/MHz)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	2	6	5.75	4.03	5.98	0.23	7.98	8.99	1.00
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	4.98	2.96	5.98	1.00	7.10	8.99	1.89
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	2	M0	5.37	3.71	7.99	2.62	7.63	11.00	3.37
	HT-20, Beam Forming, M0 to M7	2	M0	4.66	2.8	5.98	1.32	6.84	8.99	2.15
	HT-20, Beam Forming, M8 to M15	2	M8	4.33	3.15	7.99	3.66	6.79	11.00	4.21
5300	Non HT-20, 6 to 54Mbps	2	6	5.53	3.97	5.98	0.45	7.83	8.99	1.16
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	5.53	3.97	5.98	0.45	7.83	8.99	1.16
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	2	M0	5.27	3.82	7.99	2.72	7.62	11.00	3.38
	HT-20, Beam Forming, M0 to M7	2	M0	5.27	3.82	5.98	0.71	7.62	8.99	1.37
	HT-20, Beam Forming, M8 to M15	2	M8	4.18	3.41	7.99	3.81	6.82	11.00	4.18
5320	Non HT-20, 6 to 54Mbps	2	6	5.63	3.58	5.98	0.35	7.74	8.99	1.25
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	5.63	3.58	5.98	0.35	7.74	8.99	1.25
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	2	M0	5.43	3.5	7.99	2.56	7.58	11.00	3.42
	HT-20, Beam Forming, M0 to M7	2	M0	5.43	3.5	5.98	0.55	7.58	8.99	1.41
	HT-20, Beam Forming, M8 to M15	2	M8	4.63	3.34	7.99	3.36	7.04	11.00	3.96
5270	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	2	M0	2.65	1.26	7.99	5.34	5.02	11.00	5.98
	HT-40, Beam Forming, M0 to M7	2	M0	2.65	1.26	5.98	3.33	5.02	8.99	3.97
	HT-40, Beam Forming, M8 to M15	2	M8	1.68	0.62	7.99	6.31	4.19	11.00	6.81
5310	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	2	M0	1.65	-0.26	7.99	6.34	3.81	11.00	7.19
	HT-40, Beam Forming, M0 to M7	2	M0	-1.7	-3.33	5.98	7.68	0.57	8.99	8.42
	HT-40, Beam Forming, M8 to M15	2	M8	0.97	-0.59	7.99	7.02	3.27	11.00	7.73




Peak Power Spectral Density Plot on 5260 MHz, Non HT-20, 6 Mbps

Tx1

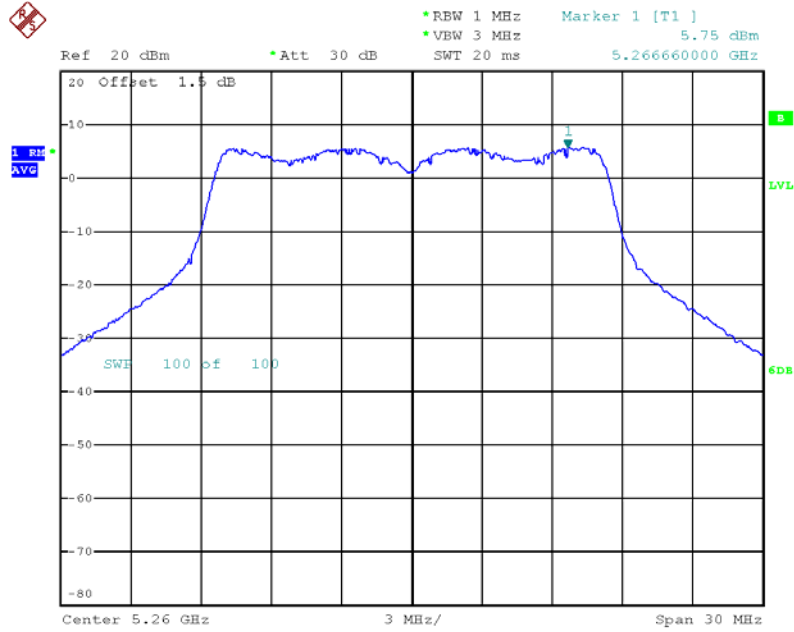

Date: 26.OCT.2012 12:31:52

Tx2

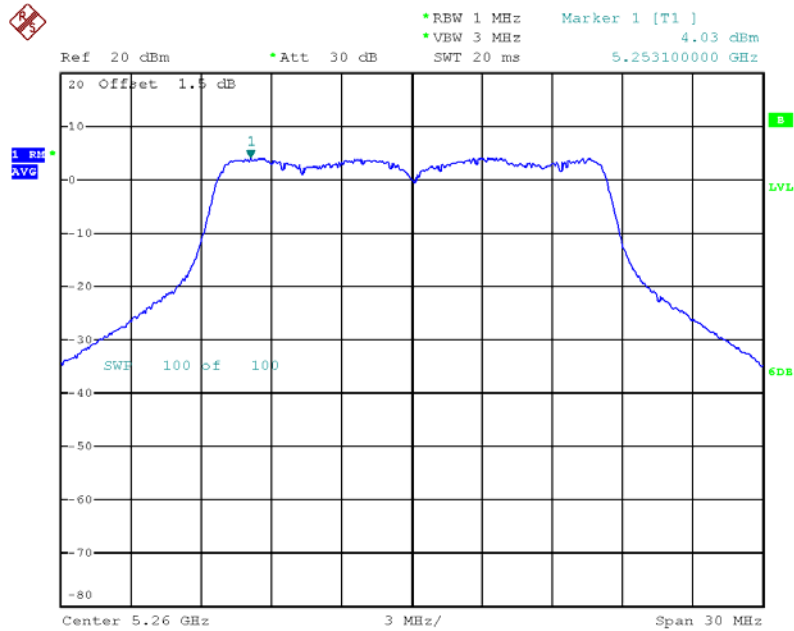


Date: 26.OCT.2012 12:32:28




Peak Power Spectral Density Plot on 5260 MHz, Non HT-20, Beam Forming, 6Mbps

Tx1

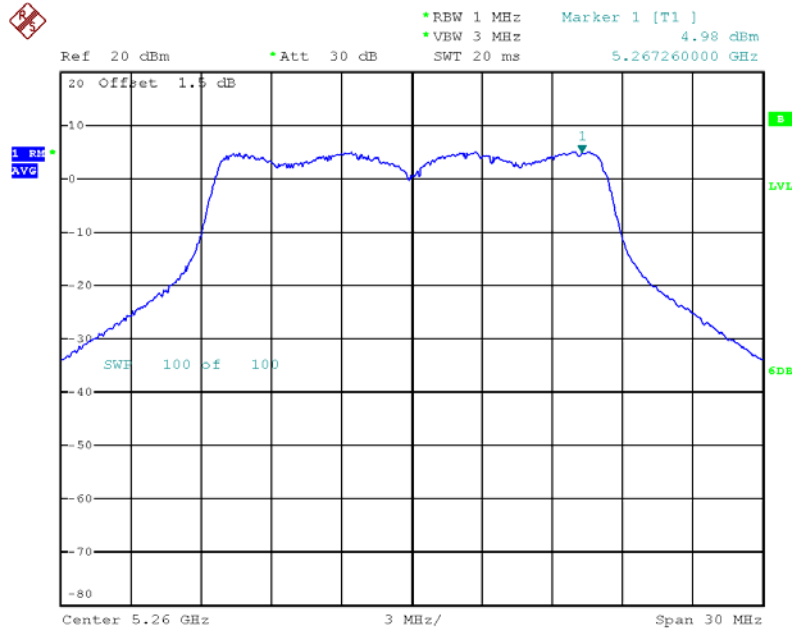

Date: 26.OCT.2012 12:40:07

Tx2

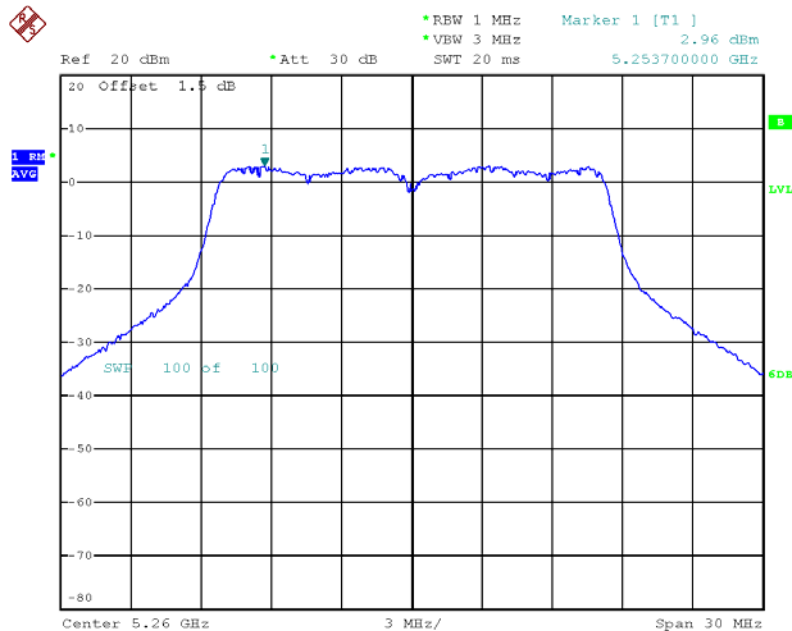


Date: 26.OCT.2012 12:39:41




Peak Power Spectral Density Plot on 5260 MHz, HT-20 / HT-20, STBC, M0

Tx1

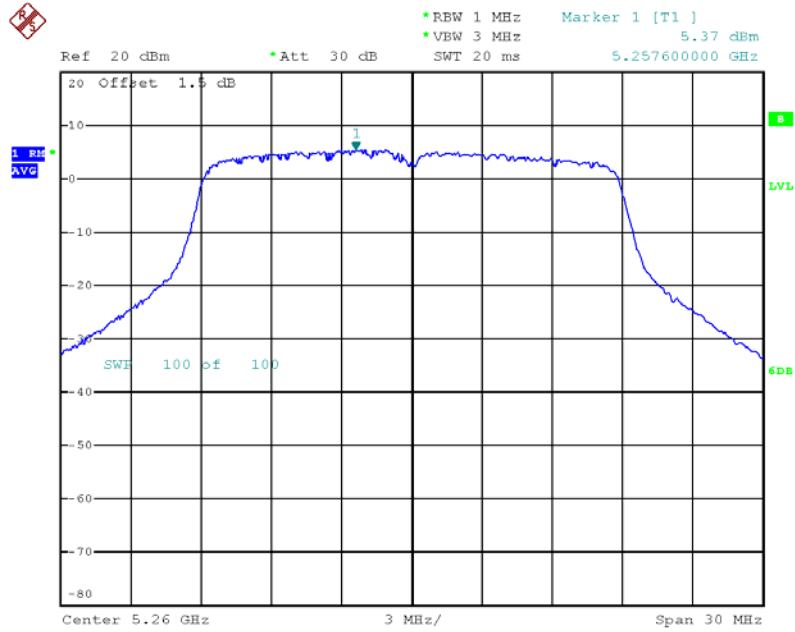

Date: 26.OCT.2012 12:41:54

Tx2

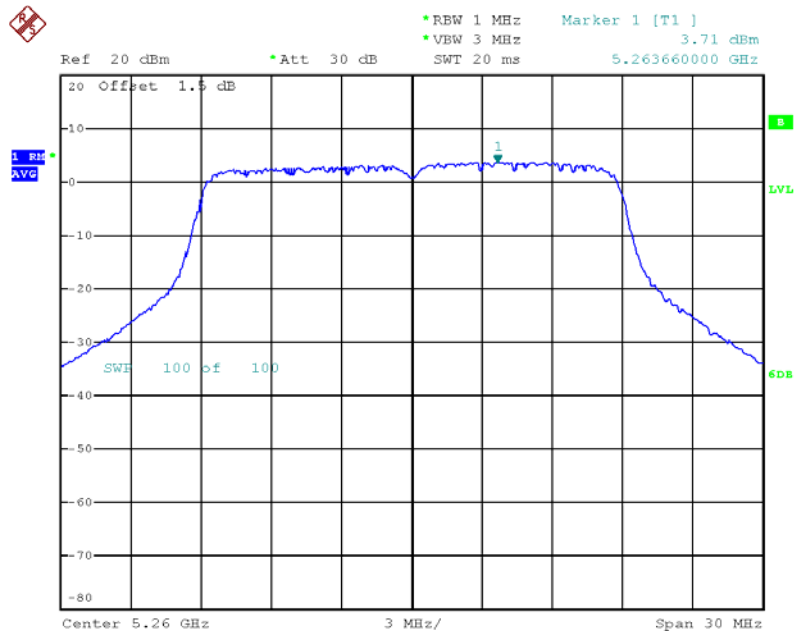


Date: 26.OCT.2012 12:42:36




Peak Power Spectral Density Plot on 5260 MHz, HT-20, Beam Forming, M0

Tx1

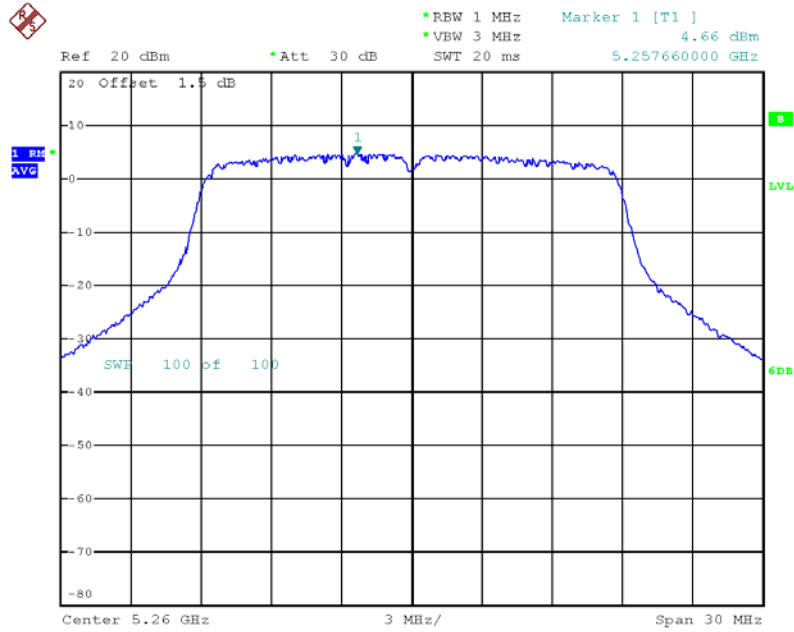

Date: 26.OCT.2012 12:43:23

Tx2

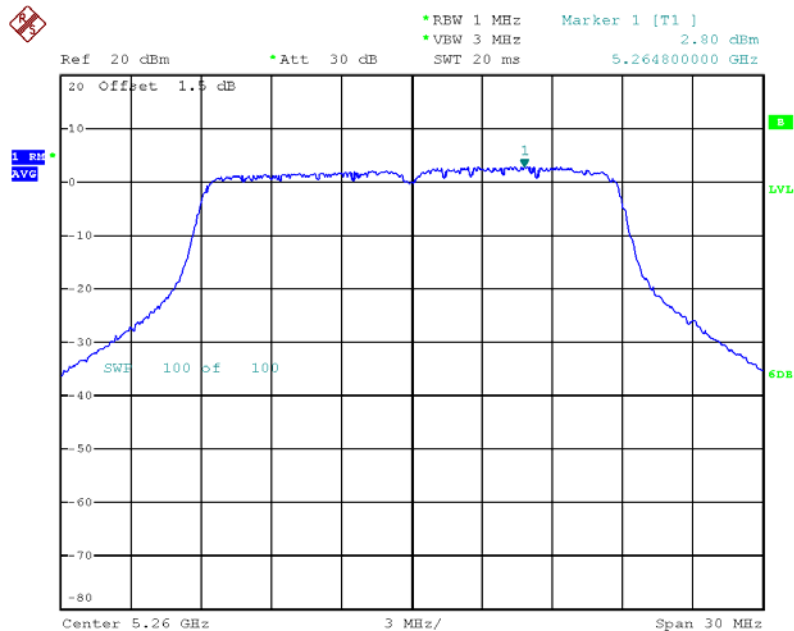


Date: 26.OCT.2012 12:43:03




Peak Power Spectral Density Plot on 5260 MHz, HT-20, Beam Forming, M8

Tx1

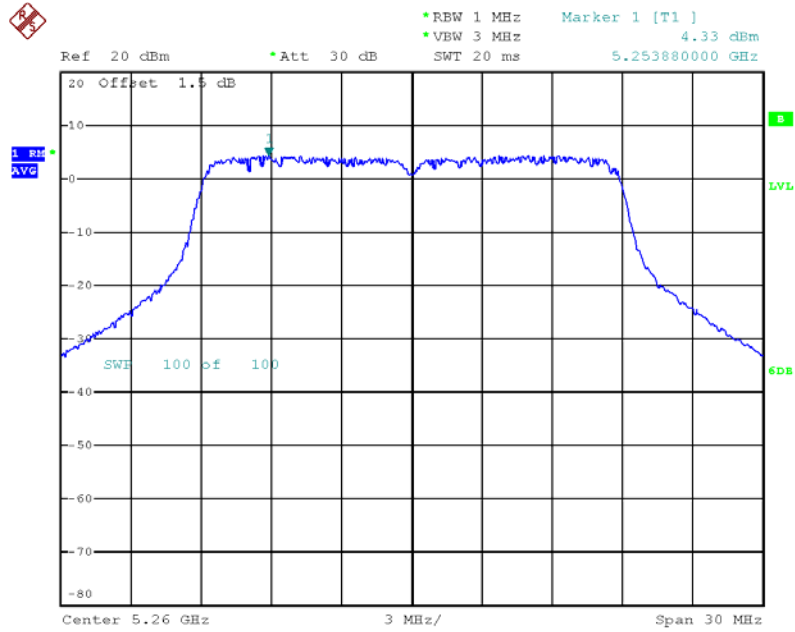

Date: 26.OCT.2012 12:44:09

Tx2

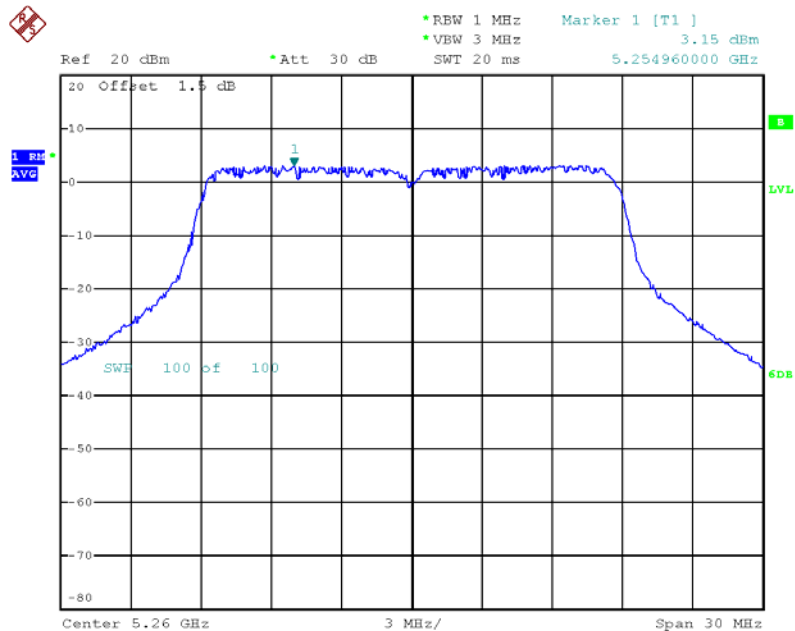


Date: 26.OCT.2012 12:44:32




Peak Power Spectral Density Plot on 5300 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

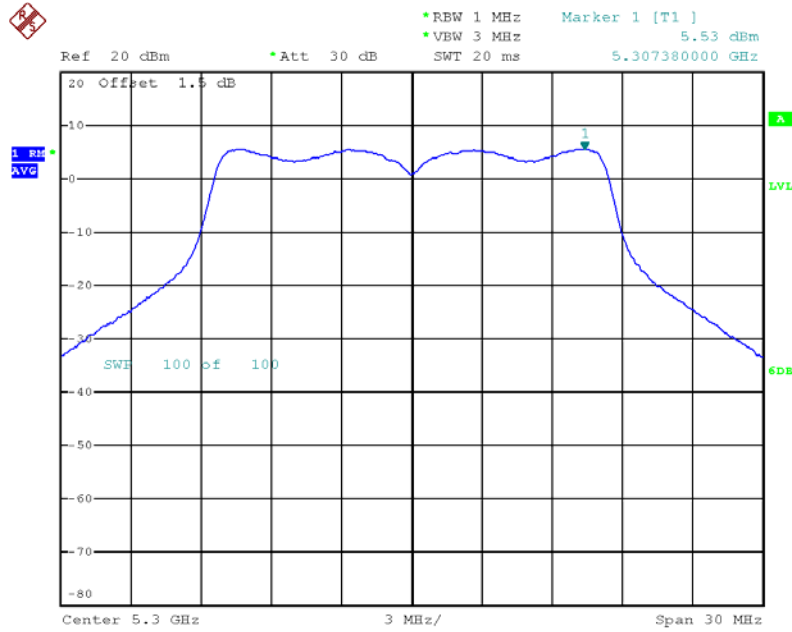

Date: 26.OCT.2012 07:46:28

Tx2

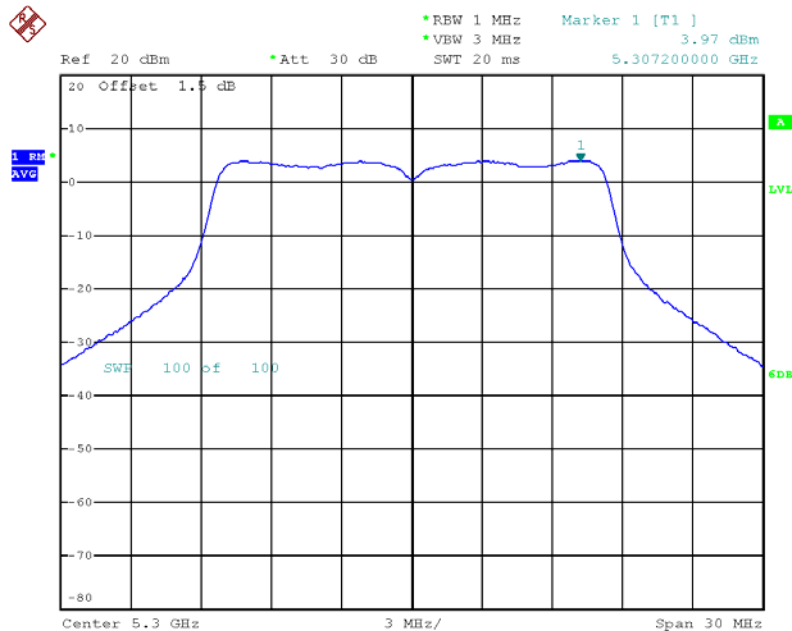


Date: 26.OCT.2012 07:46:46




Peak Power Spectral Density Plot on 5300 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

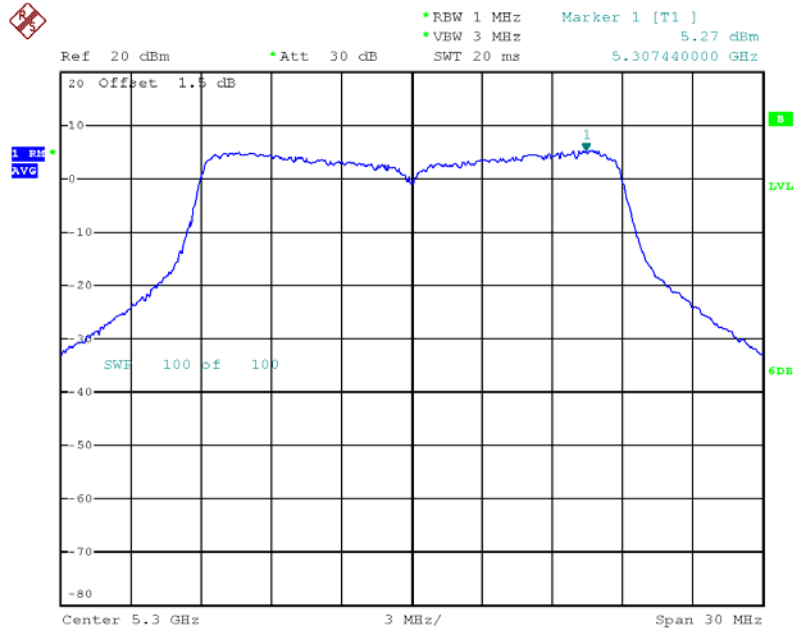

Date: 26.OCT.2012 12:46:38

Tx2

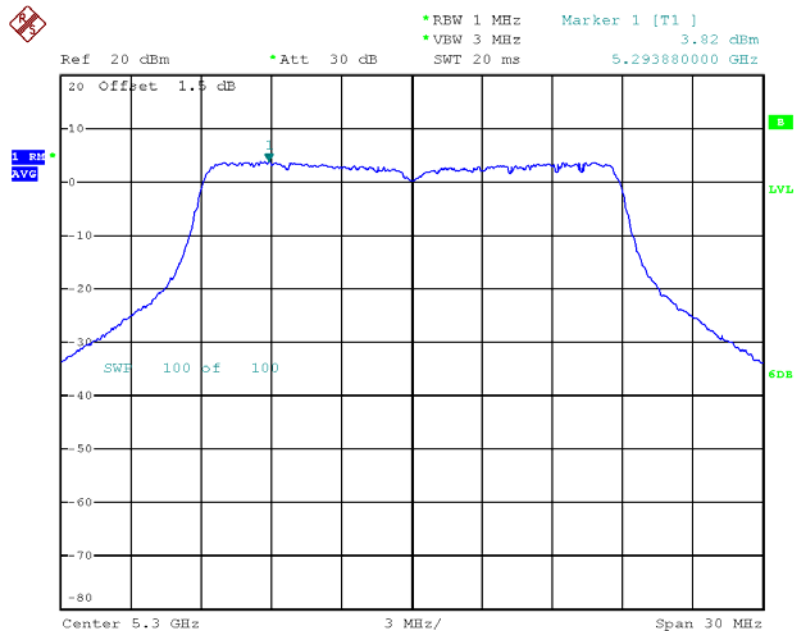


Date: 26.OCT.2012 12:46:20




Peak Power Spectral Density Plot on 5300 MHz, HT-20, Beam Forming, M8

Tx1

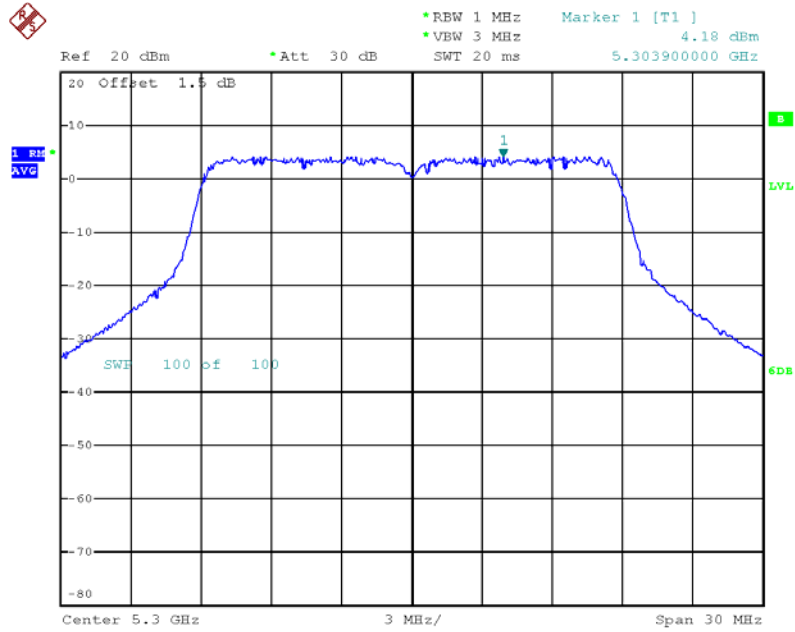

Date: 26.OCT.2012 12:47:16

Tx2

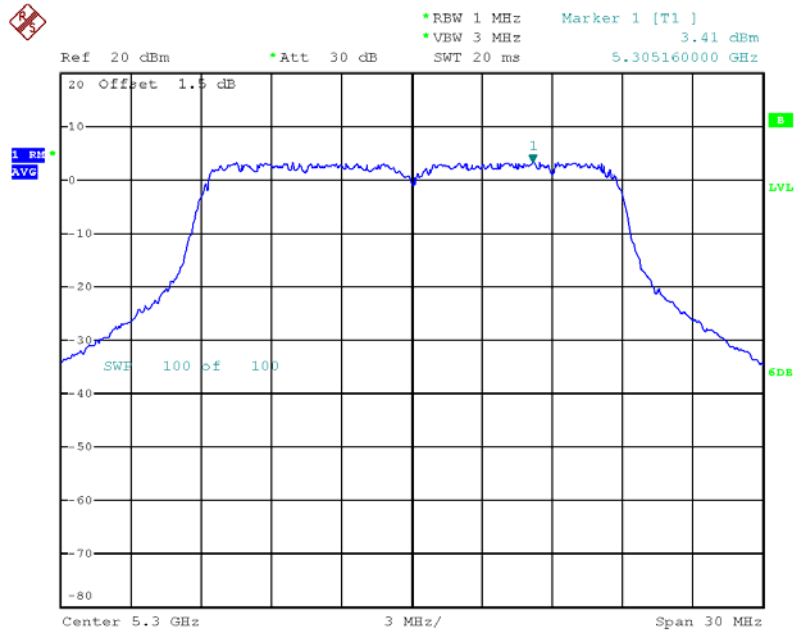


Date: 26.OCT.2012 12:47:37




Peak Power Spectral Density Plot on 5320 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

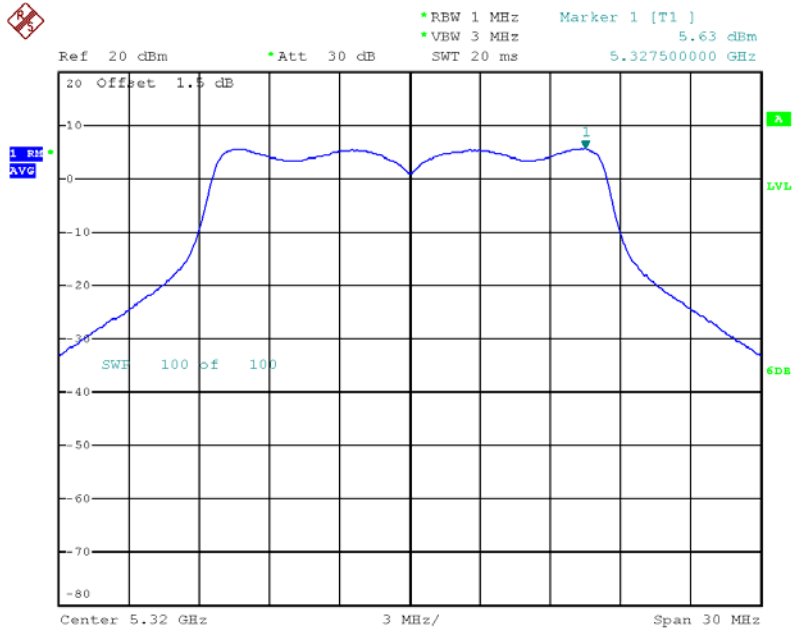

Date: 26.OCT.2012 07:57:09

Tx2

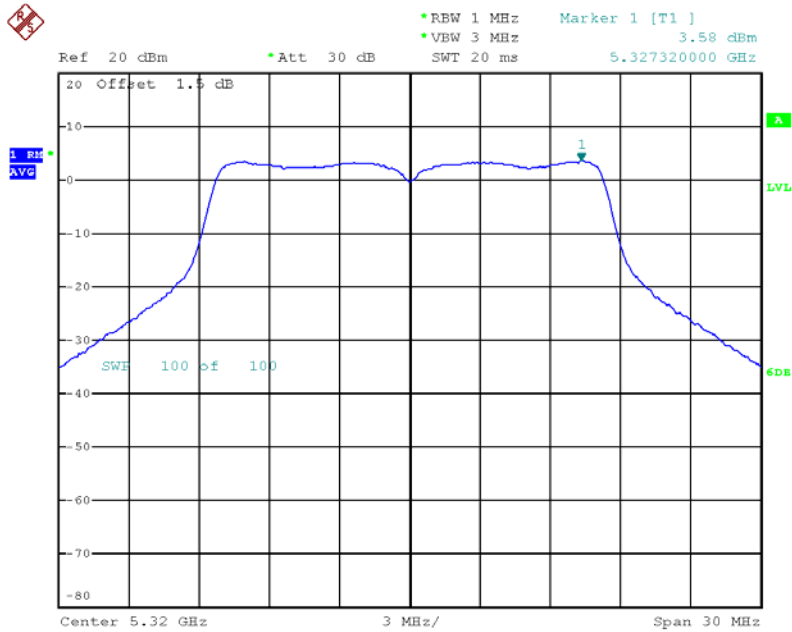


Date: 26.OCT.2012 07:57:28




Peak Power Spectral Density Plot on 5320 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

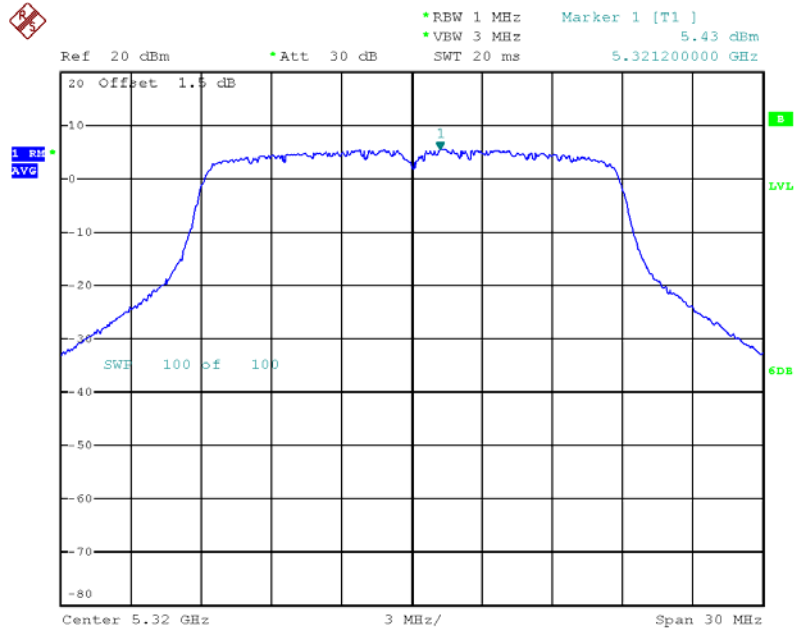

Date: 26.OCT.2012 12:49:48

Tx2

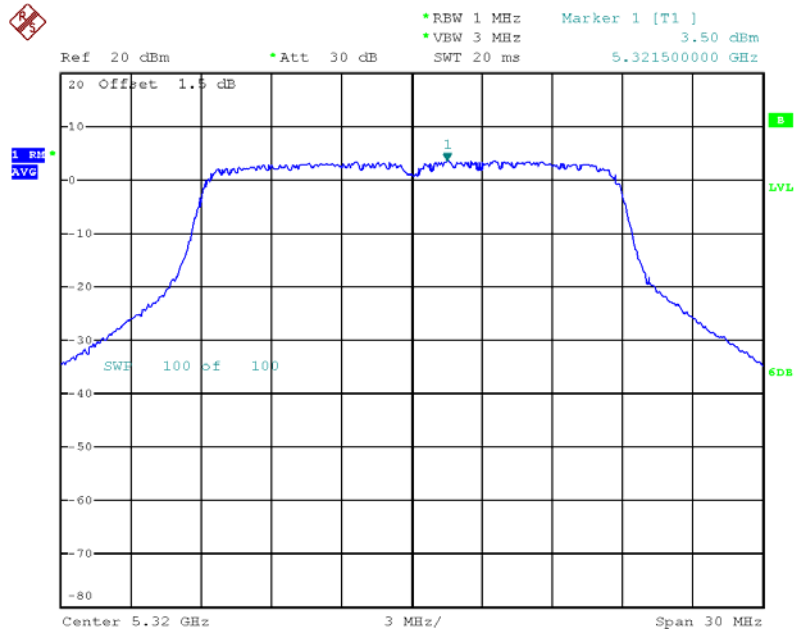


Date: 26.OCT.2012 12:48:39




Peak Power Spectral Density Plot on 5320 MHz, HT-20, Beam Forming, M8

Tx1

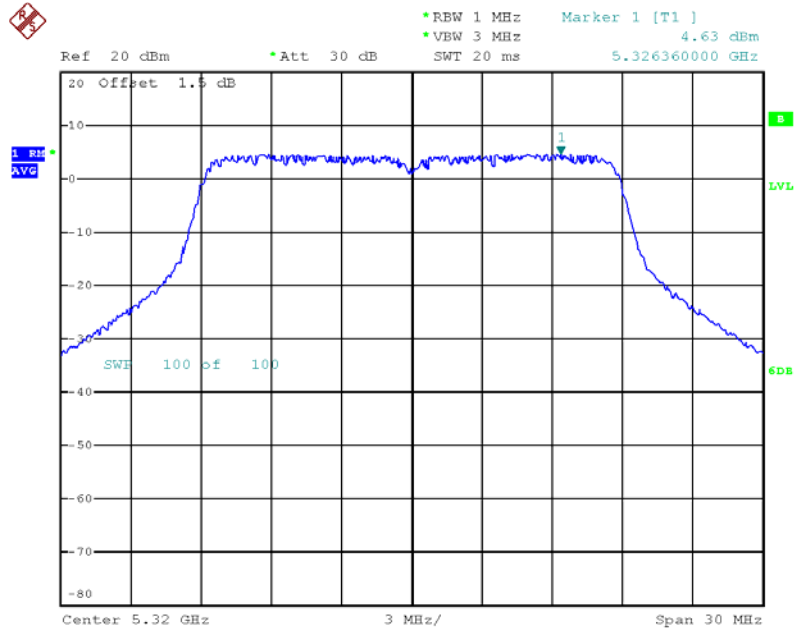

Date: 26.OCT.2012 12:50:34

Tx2

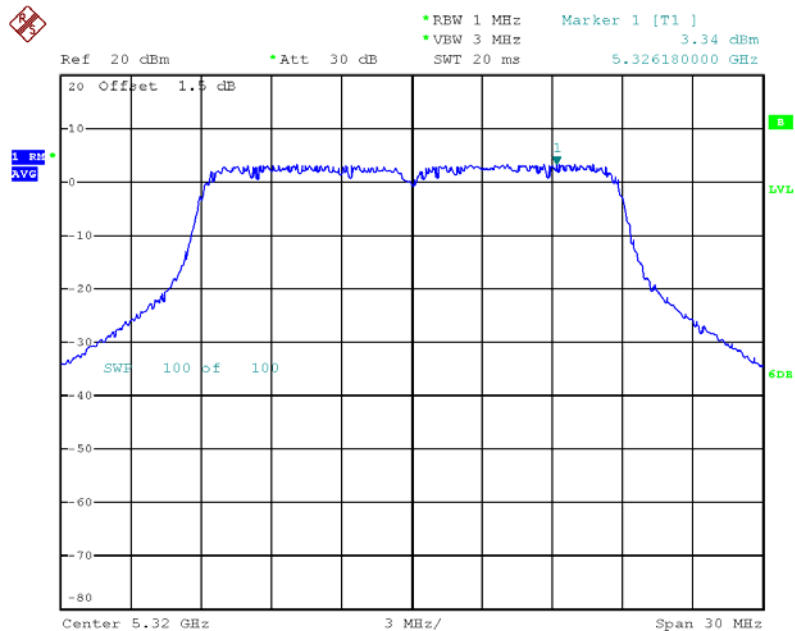


Date: 26.OCT.2012 12:50:52




Peak Power Spectral Density Plot on 5270 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0

Tx1

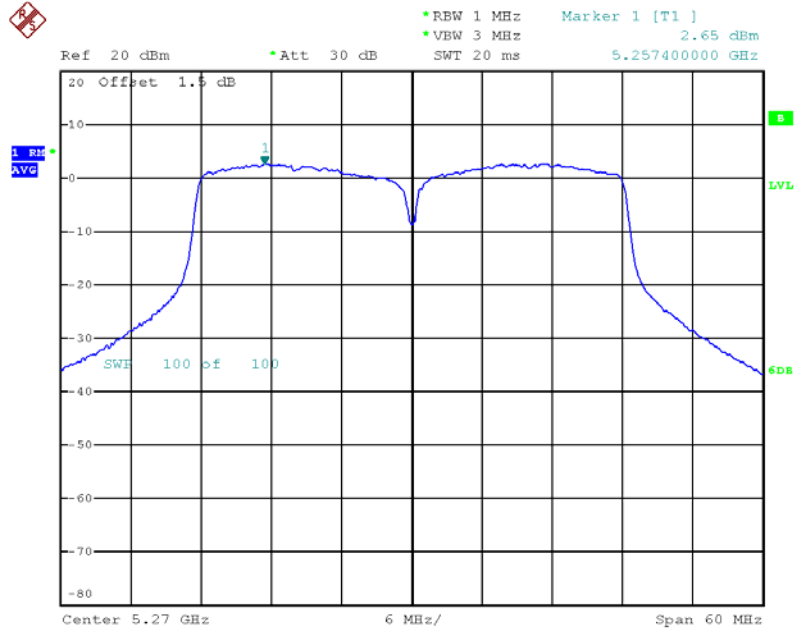

Date: 26.OCT.2012 12:52:14

Tx2

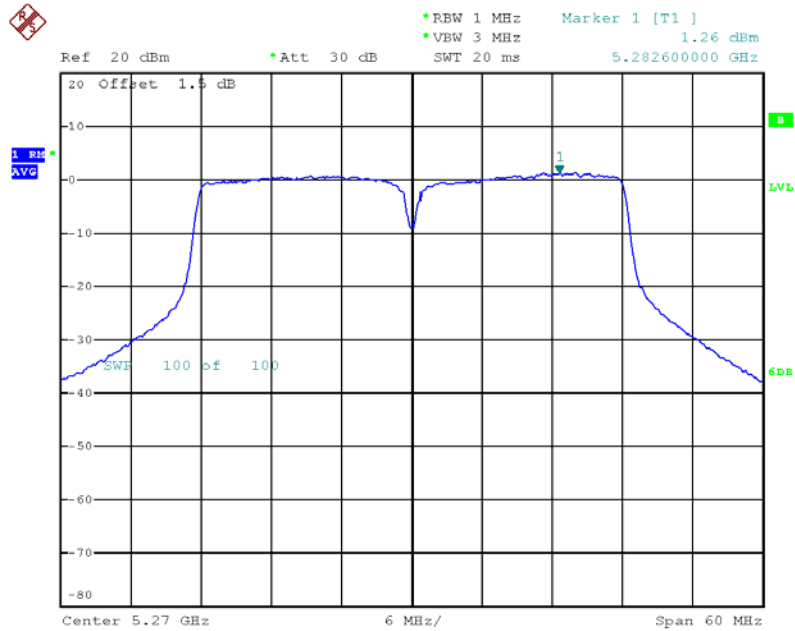


Date: 26.OCT.2012 12:51:57




Peak Power Spectral Density Plot on 5270 MHz, HT-40, Beam Forming, M8

Tx1

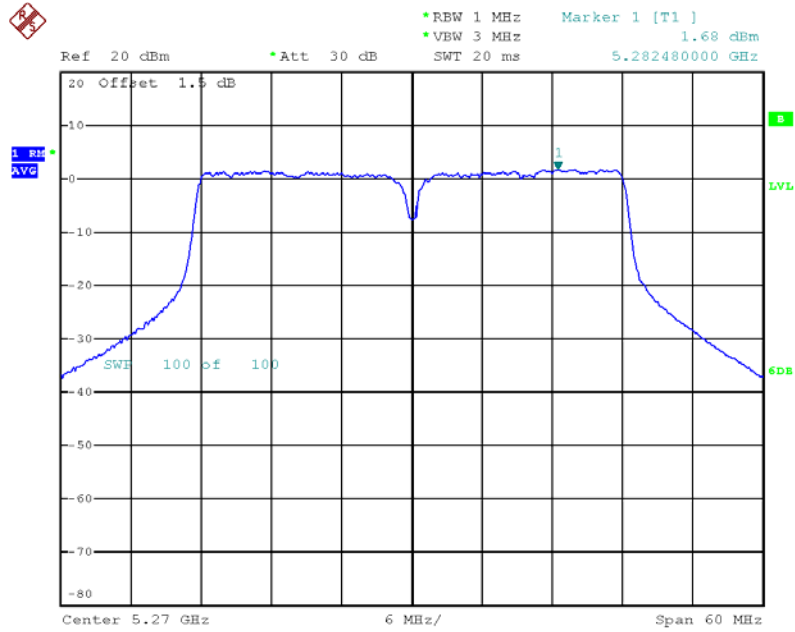

Date: 26.OCT.2012 12:52:40

Tx2

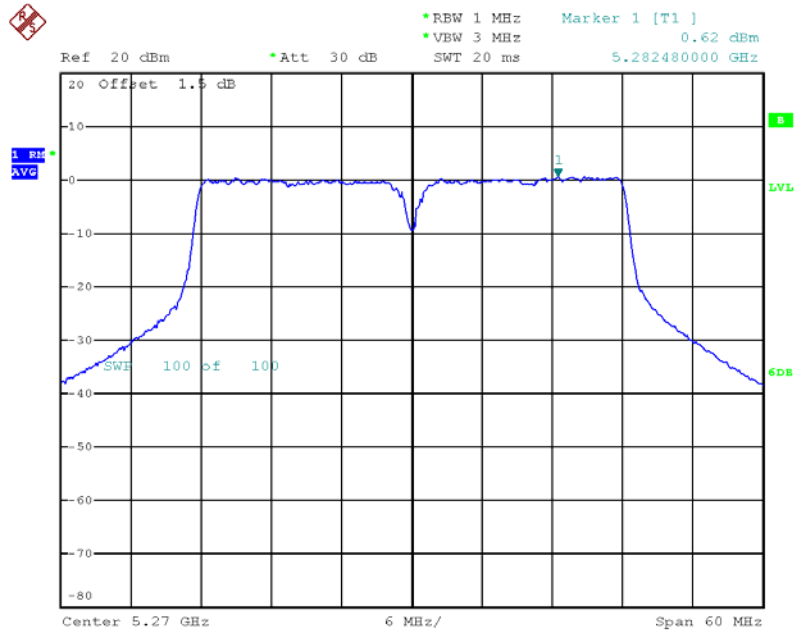


Date: 26.OCT.2012 12:53:01




Peak Power Spectral Density Plot on 5310 MHz, HT-40 / HT-40, STBC, M0

Tx1

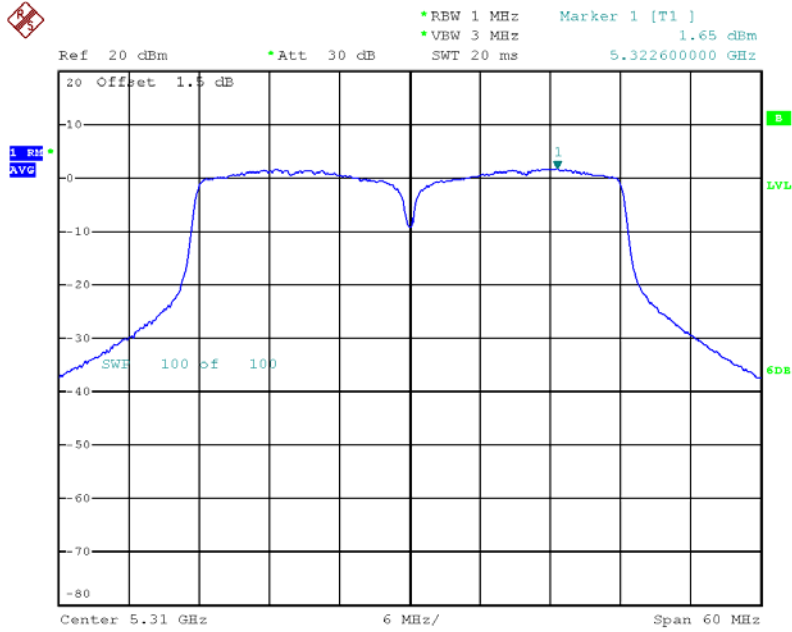

Date: 26.OCT.2012 12:55:11

Tx2

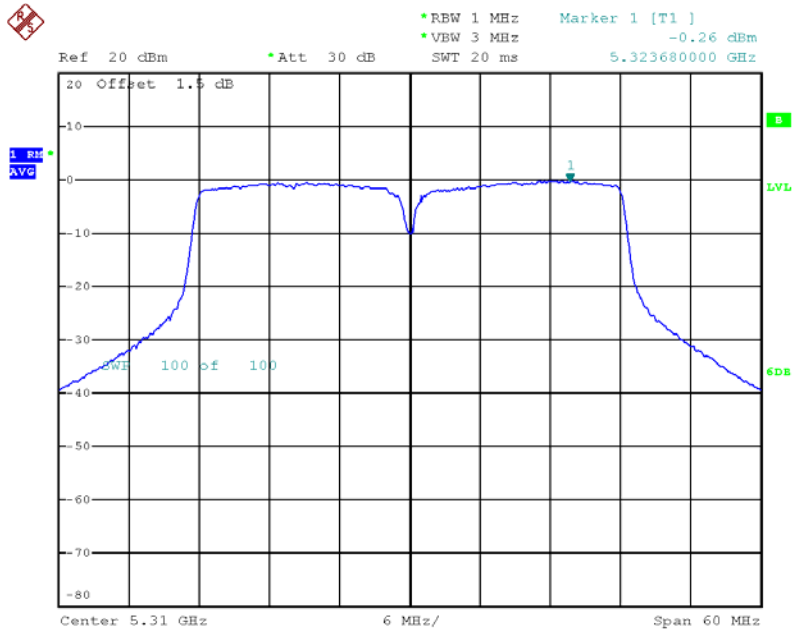


Date: 26.OCT.2012 12:54:54




Peak Power Spectral Density Plot on 5310 MHz, HT-40, Beam Forming, M0

Tx1

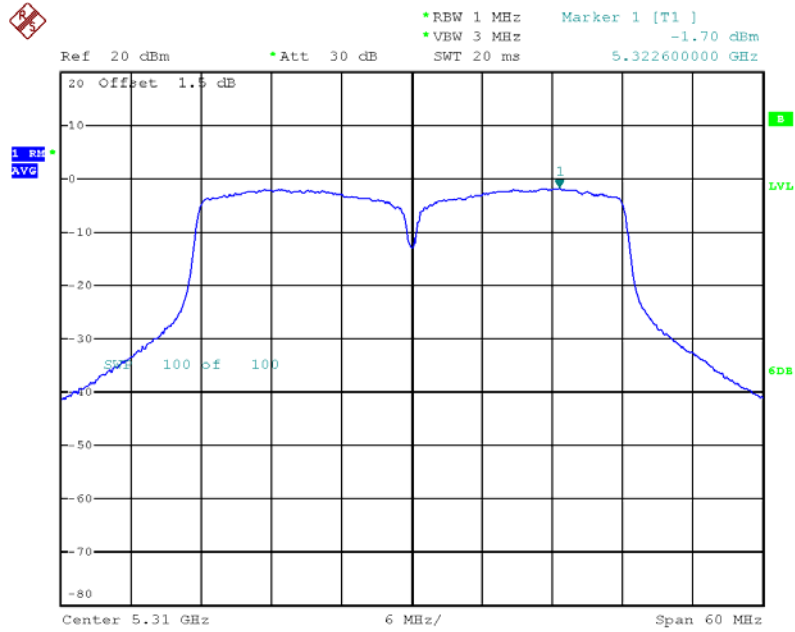

Date: 26.OCT.2012 12:54:22

Tx2

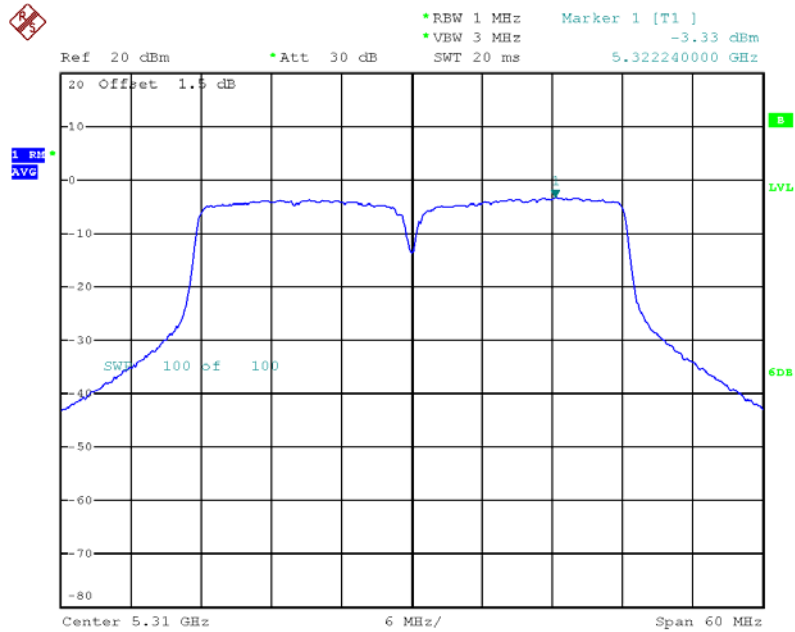


Date: 26.OCT.2012 12:54:41




Peak Power Spectral Density Plot on 5310 MHz, HT-40, HT-40, Beam Forming, M8

Tx1

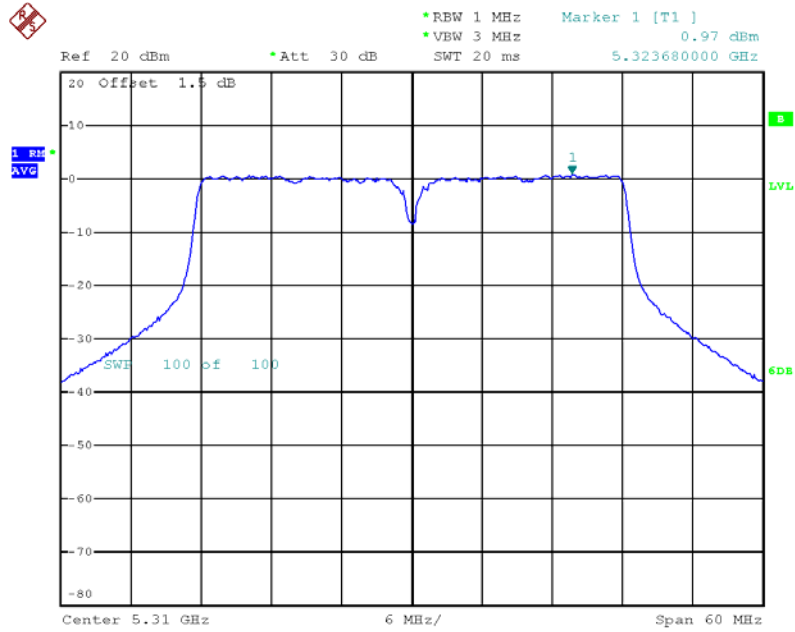

Date: 26.OCT.2012 12:53:54

Tx2

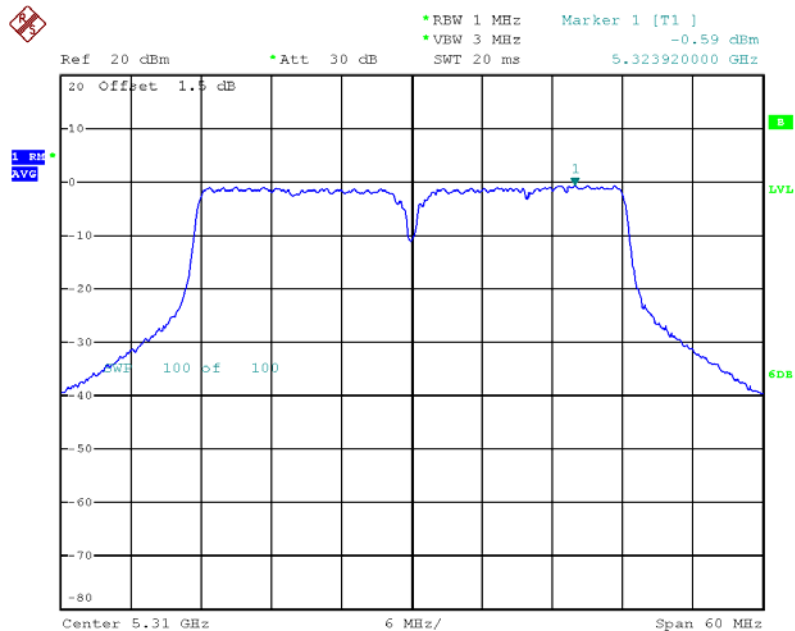

Date: 26.OCT.2012 12:53:36

3.5 Peak Excursion

3.5.1 Peak Excursion Limit

Peak Excursion Limit
Peak excursion ≤ 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause F peak excursion method.
<input checked="" type="checkbox"/> Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using given below method: Refer as FCC KDB 662911, when testing in-band (peak to average ratio) against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$.
<input checked="" type="checkbox"/> Test result plots with peak excursion ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum.

3.5.4 Test Setup

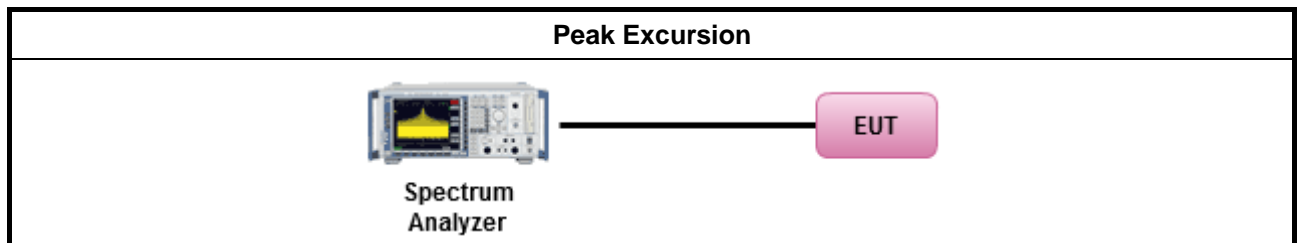




3.5.5 Test Result of Peak Excursion

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dB)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	6	9.58	13	3.42
	Non HT-20, Beam Forming, 6 to 54Mbps	6	9.58	13	3.42
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	9.45	13	3.55
	HT-20, Beam Forming, M0 to M7	M0	9.45	13	3.55
	HT-20, Beam Forming, M8 to M15	M8	9.45	13	3.55
5300	Non HT-20, 6 to 54Mbps	6	9.7	13	3.3
	Non HT-20, Beam Forming, 6 to 54Mbps	6	9.7	13	3.3
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	9.28	13	3.72
	HT-20, Beam Forming, M0 to M7	M0	9.28	13	3.72
	HT-20, Beam Forming, M8 to M15	M8	9.28	13	3.72
5320	Non HT-20, 6 to 54Mbps	6	10.07	13	2.93
	Non HT-20, Beam Forming, 6 to 54Mbps	6	10.07	13	2.93
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	9.46	13	3.54
	HT-20, Beam Forming, M0 to M7	M0	9.46	13	3.54
	HT-20, Beam Forming, M8 to M15	M8	9.46	13	3.54
5270	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	10.28	13	2.72
	HT-40, Beam Forming, M0 to M7	M0	10.28	13	2.72
	HT-40, Beam Forming, M8 to M15	M8	10.28	13	2.72
5310	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	10.23	13	2.77
	HT-40, Beam Forming, M0 to M7	M0	10.23	13	2.77
	HT-40, Beam Forming, M8 to M15	M8	10.23	13	2.77




Peak Excursion Plot on 5260 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

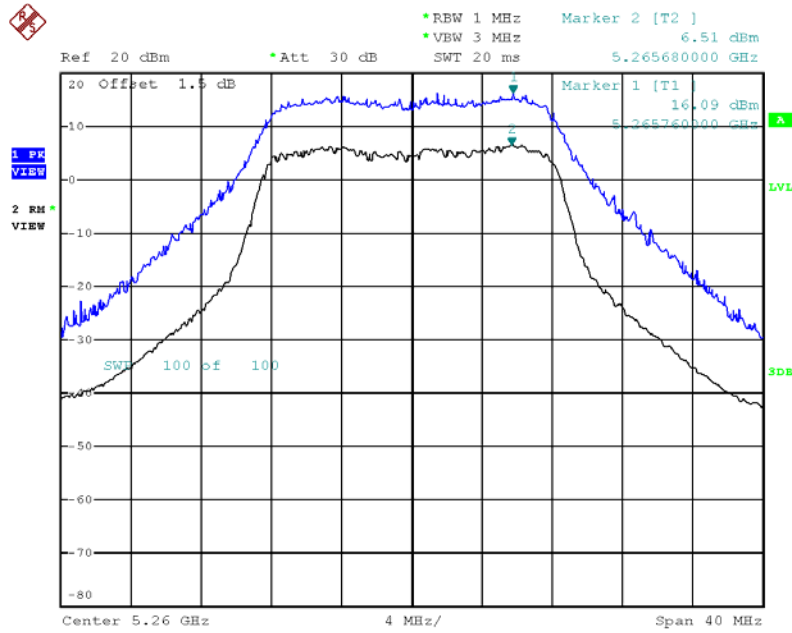

Date: 26.OCT.2012 13:16:44


Peak Excursion Plot on 5260 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

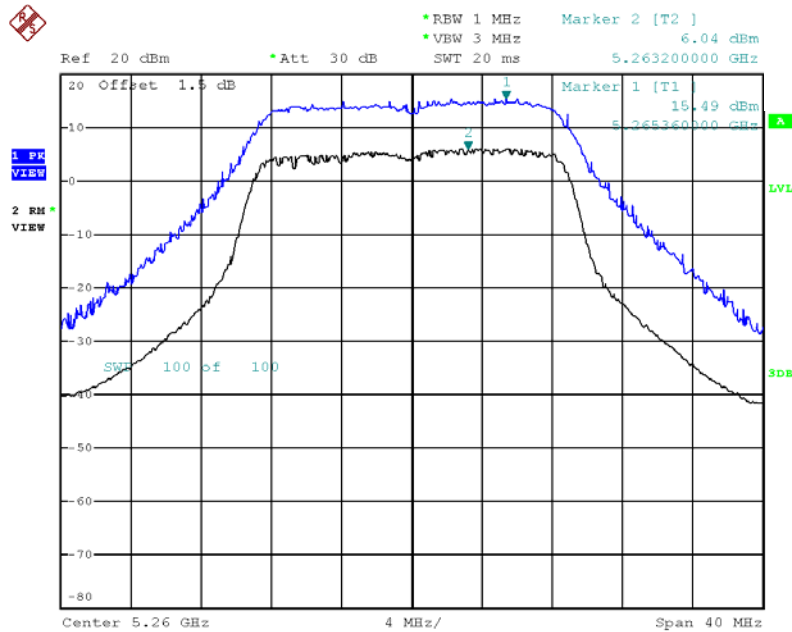

Date: 26.OCT.2012 13:18:12




Peak Excursion Plot on 5300 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

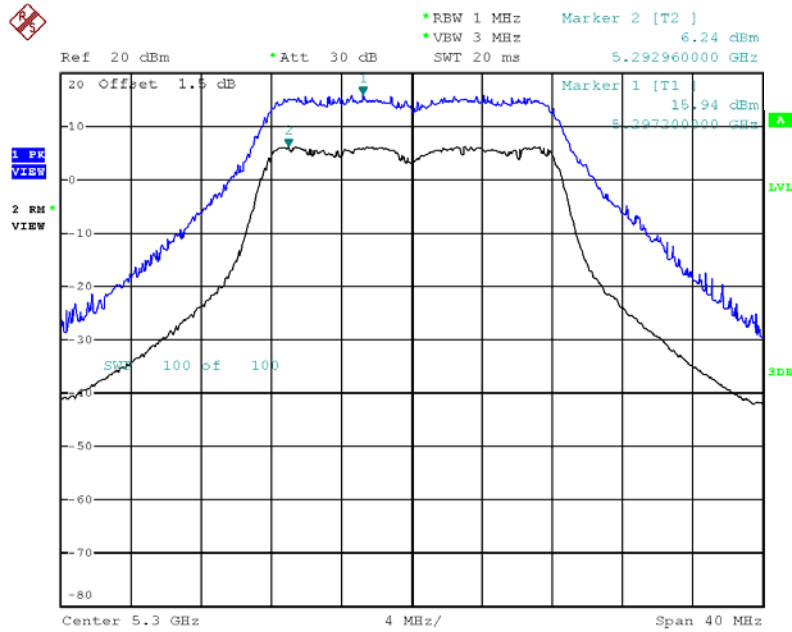


Date: 26.OCT.2012 13:21:33

Peak Excursion Plot on 5300 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

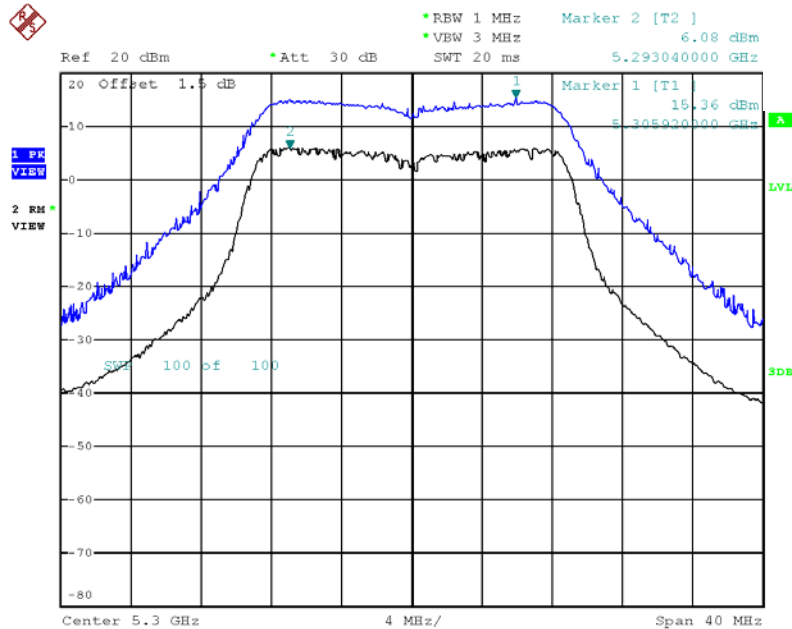


Date: 26.OCT.2012 13:20:50

Peak Excursion Plot on 5320 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

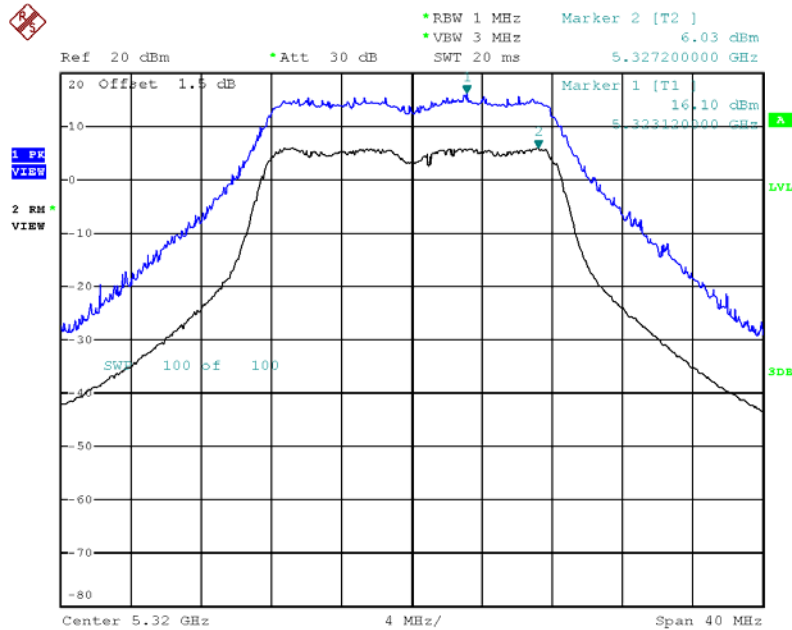

Date: 26.OCT.2012 13:23:35


Peak Excursion Plot on 5320 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

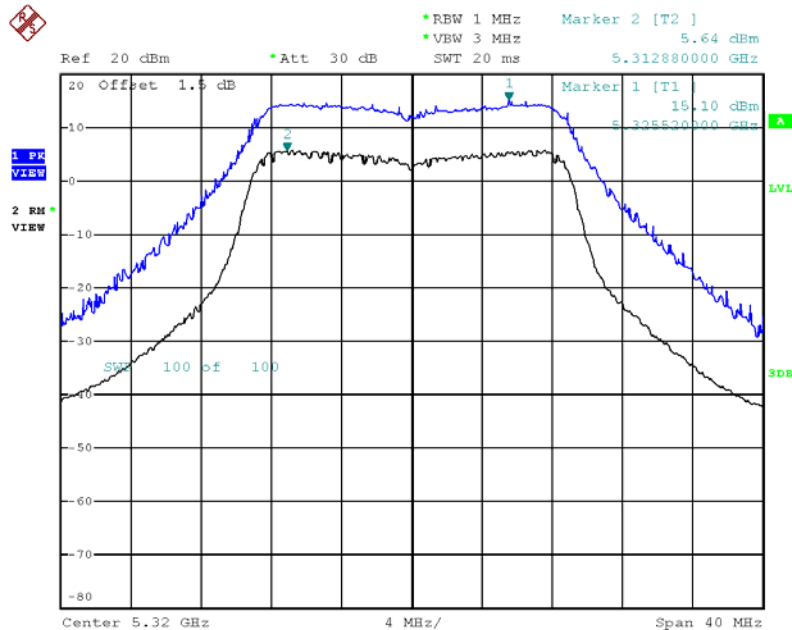

Date: 26.OCT.2012 13:24:19




Peak Excursion Plot on 5270 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0, M8

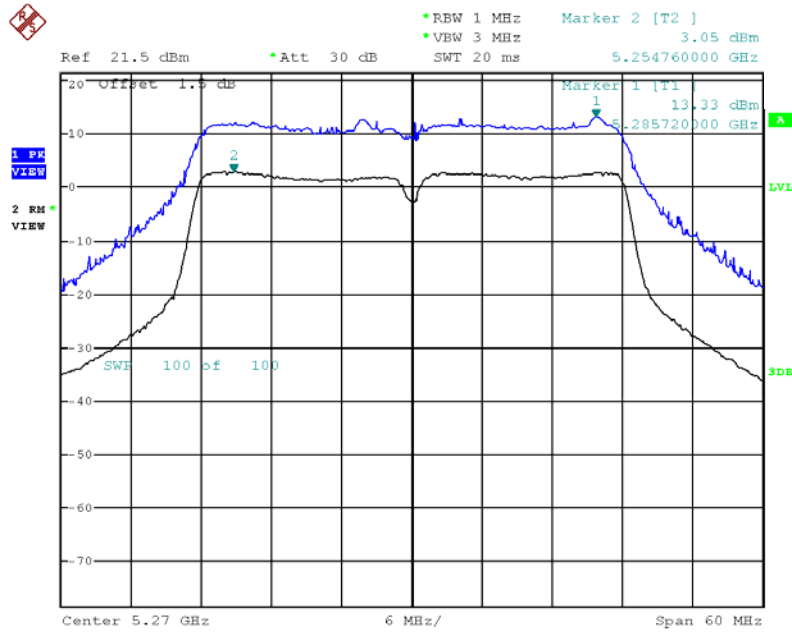

Date: 26.OCT.2012 13:26:54


Peak Excursion Plot on 5310 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0, M8

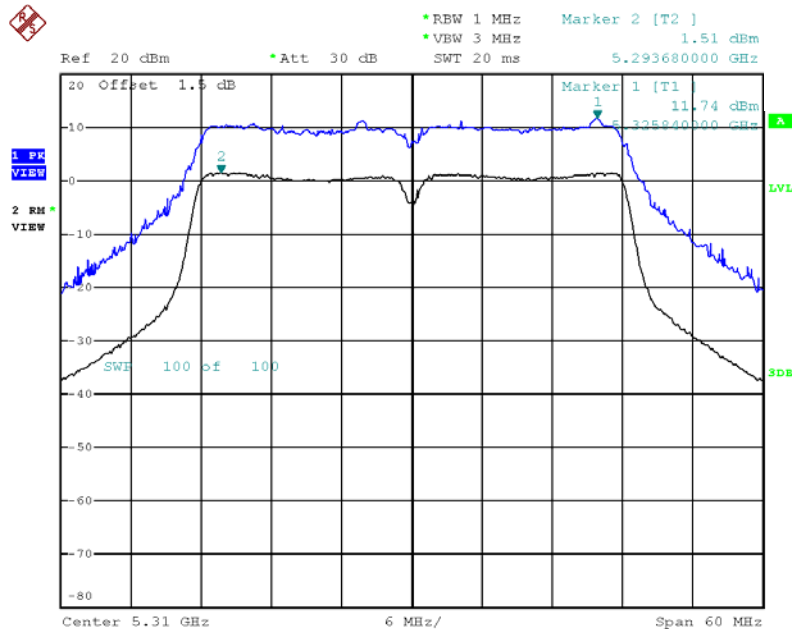

Date: 26.OCT.2012 13:27:39

3.6 Transmitter Conducted Bandedge Emissions

3.6.1 Transmitter Conducted Bandedge Emissions Limit

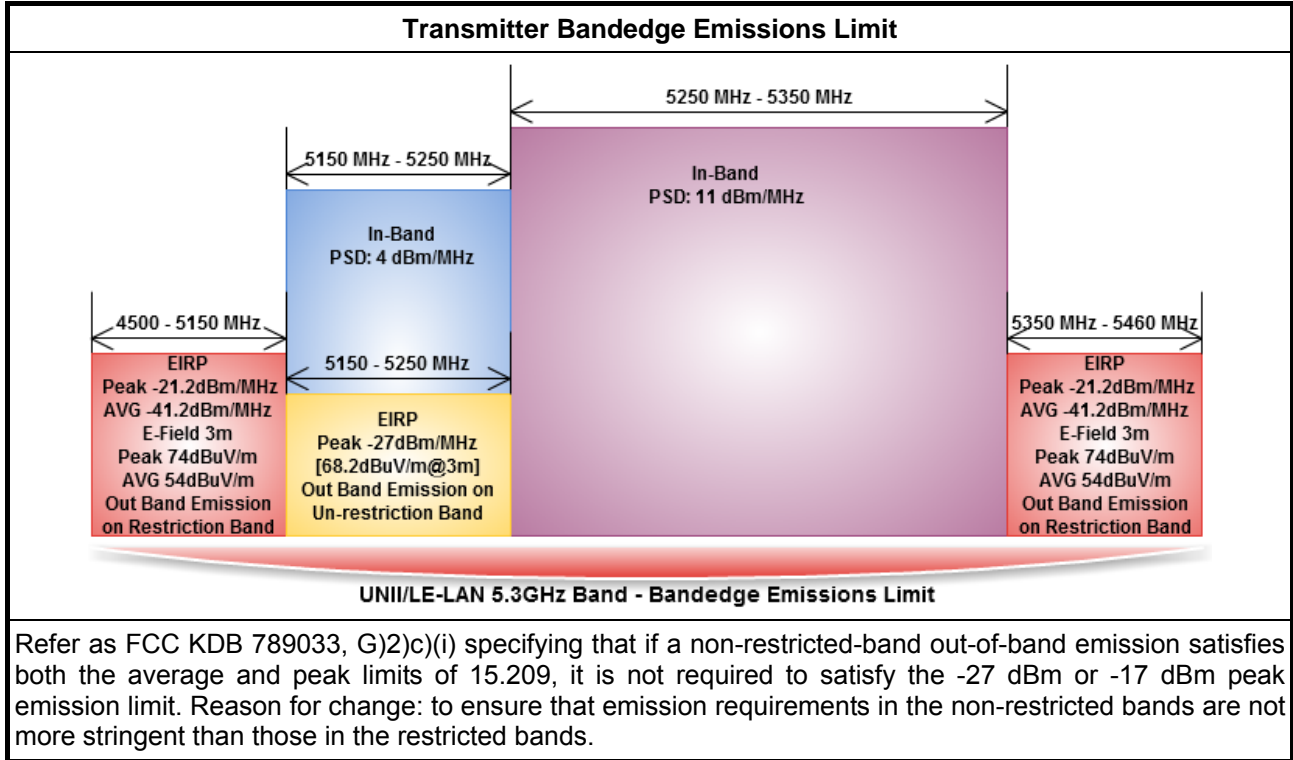


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) - Duty cycle \geq 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 789033, clause G)3)d) marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For conducted measurement, refer as FCC KDB 789033, clause G.

3.6.4 Test Setup

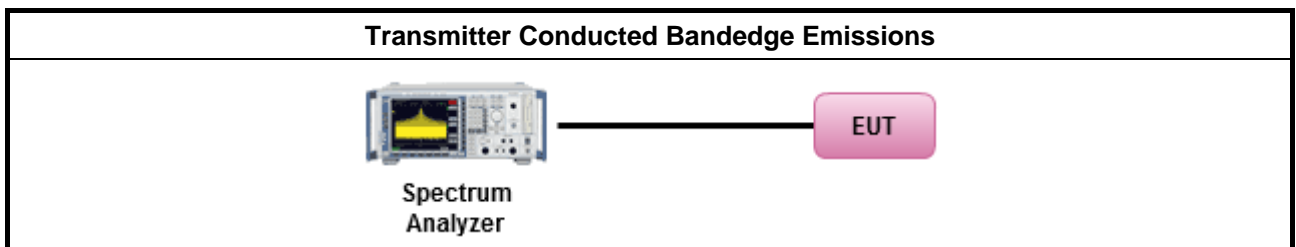



3.6.5 Test Result of Transmitter Conducted Bandedge Emissions

Transmitter Conducted Bandedge Emissions Result – Average

Freq. (MHz)	Operating Mode	N _{TX}	Correlated Antenna Gain (dBi)	TX1 Bandedge Level (dBm)	TX2 Bandedge Level (dBm)	Total TX Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	2	5.00	-52.78	-50.64	-43.57	-41.25	2.32
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-55.46	-50.56	-41.33	-41.25	0.08
	HT-20, M0 to M15/HT-20, STBC, M0 to M7	2	5.00	-53.07	-50.94	-43.87	-41.25	2.62
	HT-20, Beam Forming, M0 to M7	2	8.01	-54.66	-51.04	-41.46	-41.25	0.21
	HT-20, Beam Forming, M8 to M15	2	5.00	-54.34	-51.87	-44.92	-41.25	3.67
5300	Non HT-20, 6 to 54Mbps	2	5.00	-53.47	-51.81	-44.55	-41.25	3.30
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-53.47	-51.81	-41.54	-41.25	0.29
	HT-20, M0 to M15/HT-20, STBC, M0 to M7	2	5.00	-53.19	-52.92	-45.04	-41.25	3.79
	HT-20, Beam Forming, M0 to M7	2	8.01	-53.19	-52.92	-42.03	-41.25	0.78
	HT-20, Beam Forming, M8 to M15	2	5.00	-53.80	-52.90	-45.32	-41.25	4.07
5320	Non HT-20, 6 to 54Mbps	2	5.00	-53.21	-52.35	-44.75	-41.25	3.50
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-53.21	-52.35	-41.74	-41.25	0.49
	HT-20, M0 to M15/ HT-20, STBC, M0 to M7	2	5.00	-53.37	-52.24	-44.76	-41.25	3.51
	HT-20, Beam Forming, M0 to M7	2	8.01	-53.37	-52.24	-41.75	-41.25	0.50
	HT-20, Beam Forming, M8 to M15	2	5.00	-53.36	-51.74	-44.46	-41.25	3.21
5270	HT-40, M0 to M15/ HT-40, STBC, M0 to M7	2	5.00	-53.71	-52.04	-44.78	-41.25	3.53
	HT-40, Beam Forming, M0 to M7	2	8.01	-53.71	-52.04	-41.77	-41.25	0.52
	HT-40, Beam Forming, M8 to M15	2	5.00	-54.59	-52.14	-45.18	-41.25	3.93
5310	HT-40, M0 to M15/ HT-40, STBC, M0 to M7	2	5.00	-49.52	-49.30	-41.40	-41.25	0.15
	HT-40, Beam Forming, M0 to M7	2	8.01	-51.91	-52.72	-41.28	-41.25	0.03
	HT-40, Beam Forming, M8 to M15	2	5.00	-48.73	-50.03	-41.32	-41.25	0.07




Transmitter Conducted Bandedge Emissions Result – Peak

Freq. (MHz)	Operating Mode	N _{TX}	Correlated Antenna Gain (dBi)	TX1 Bandedge Level (dBm)	TX2 Bandedge Level (dBm)	Total TX Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	2	5.00	-40.04	-41.34	-32.63	-21.25	11.38
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-41.98	-41.71	-30.82	-21.25	9.57
	HT-20, M0 to M15/HT-20, STBC, M0 to M7	2	5.00	-41.18	-42.07	-33.59	-21.25	12.34
	HT-20, Beam Forming, M0 to M7	2	8.01	-41.65	-42.35	-30.97	-21.25	9.72
	HT-20, Beam Forming, M8 to M15	2	5.00	-42.56	-44.03	-35.22	-21.25	13.97
5300	Non HT-20, 6 to 54Mbps	2	5.00	-42.16	-43.01	-34.55	-21.25	13.30
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-42.16	-43.01	-31.54	-21.25	10.29
	HT-20, M0 to M15/HT-20, STBC, M0 to M7	2	5.00	-41.68	-43.65	-34.54	-21.25	13.29
	HT-20, Beam Forming, M0 to M7	2	8.01	-41.68	-43.65	-31.53	-21.25	10.28
	HT-20, Beam Forming, M8 to M15	2	5.00	-42.08	-43.42	-34.69	-21.25	13.44
5320	Non HT-20, 6 to 54Mbps	2	5.00	-40.58	-42.14	-33.28	-21.25	12.03
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-40.58	-42.14	-30.27	-21.25	9.02
	HT-20, M0 to M15/ HT-20, STBC, M0 to M7	2	5.00	-40.56	-41.20	-32.86	-21.25	11.61
	HT-20, Beam Forming, M0 to M7	2	8.01	-40.56	-41.20	-29.85	-21.25	8.60
	HT-20, Beam Forming, M8 to M15	2	5.00	-40.00	-41.59	-32.71	-21.25	11.46
5270	HT-40, M0 to M15/ HT-40, STBC, M0 to M7	2	5.00	-42.21	-41.76	-33.97	-21.25	12.72
	HT-40, Beam Forming, M0 to M7	2	8.01	-42.21	-41.76	-30.96	-21.25	9.71
	HT-40, Beam Forming, M8 to M15	2	5.00	-42.16	-43.01	-34.55	-21.25	13.30
5310	HT-40, M0 to M15/ HT-40, STBC, M0 to M7	2	5.00	-31.55	-34.11	-24.63	-21.25	3.38
	HT-40, Beam Forming, M0 to M7	2	8.01	-33.50	-36.99	-23.88	-21.25	2.63
	HT-40, Beam Forming, M8 to M15	2	5.00	-32.68	-34.22	-25.37	-21.25	4.12


Transmitter Conducted Bandedge Emissions Plot-Average on 5260 MHz, Non HT-20, 6Mbps

Tx1

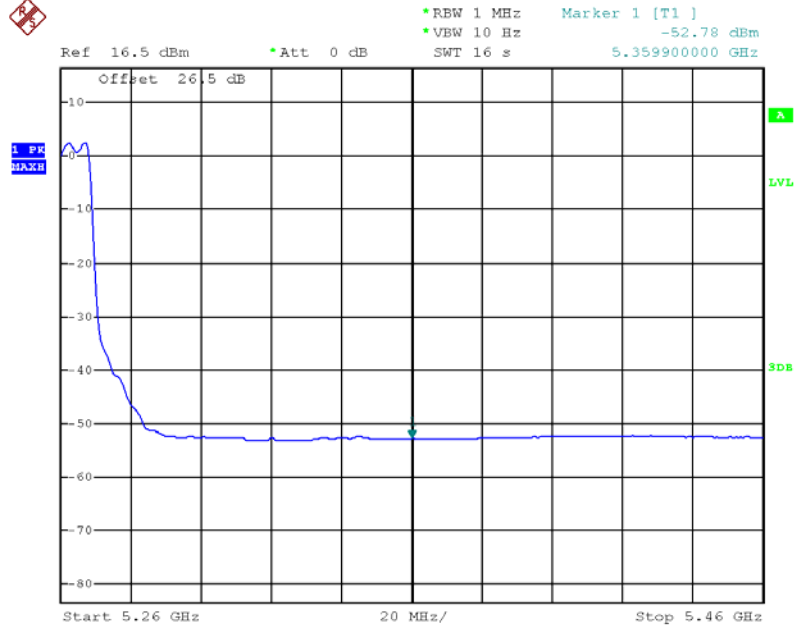

Date: 26.OCT.2012 08:51:15

Tx2

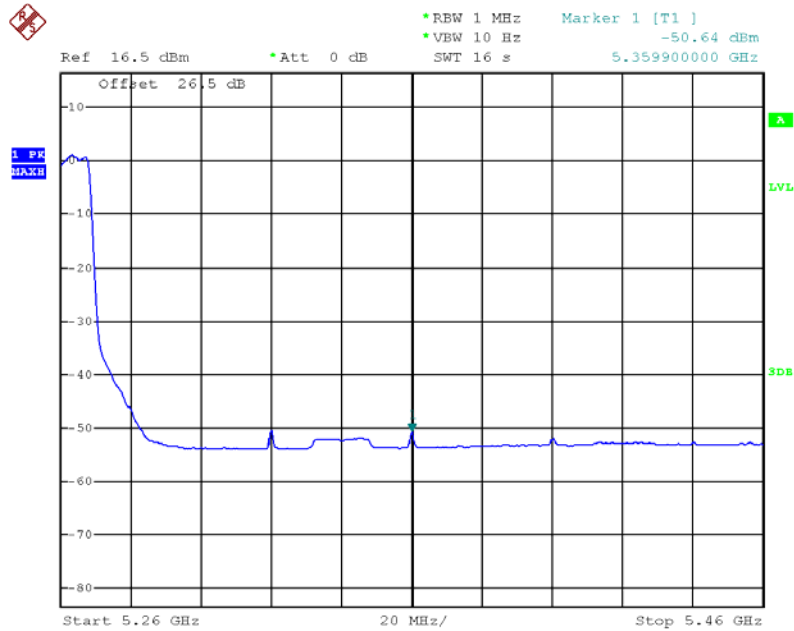


Date: 26.OCT.2012 08:52:01




Transmitter Conducted Bandedge Emissions Plot-Average on 5260 MHz,
Non HT-20, Beam Forming, 6 Mbps

Tx1

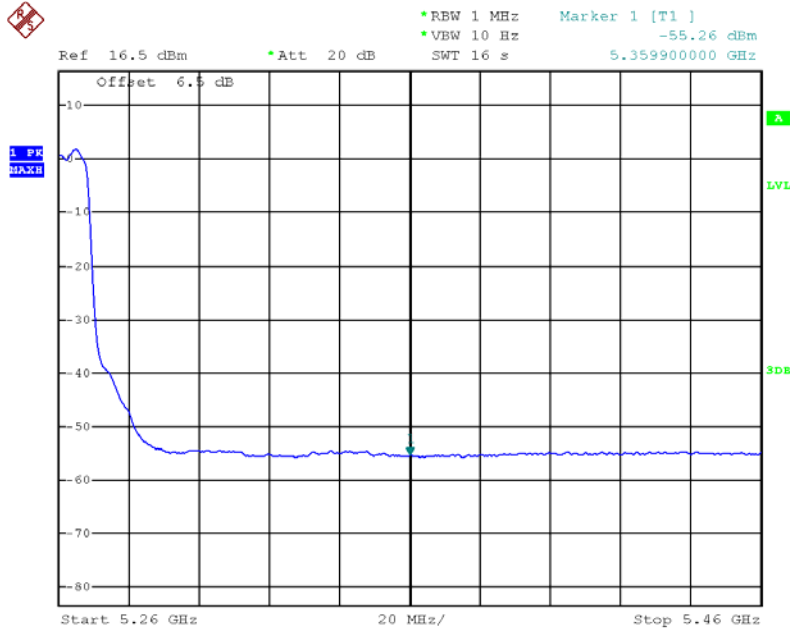

Date: 26.OCT.2012 09:06:03


Tx2

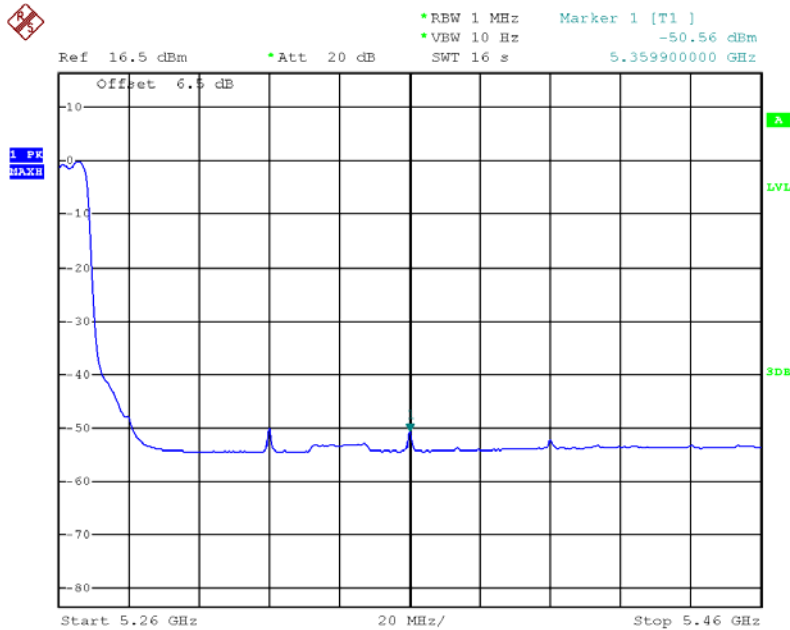

Date: 26.OCT.2012 09:06:35


Transmitter Conducted Bandedge Emissions Plot--Average on 5260 MHz, HT-20 / HT-20, STBC, M0

Tx1

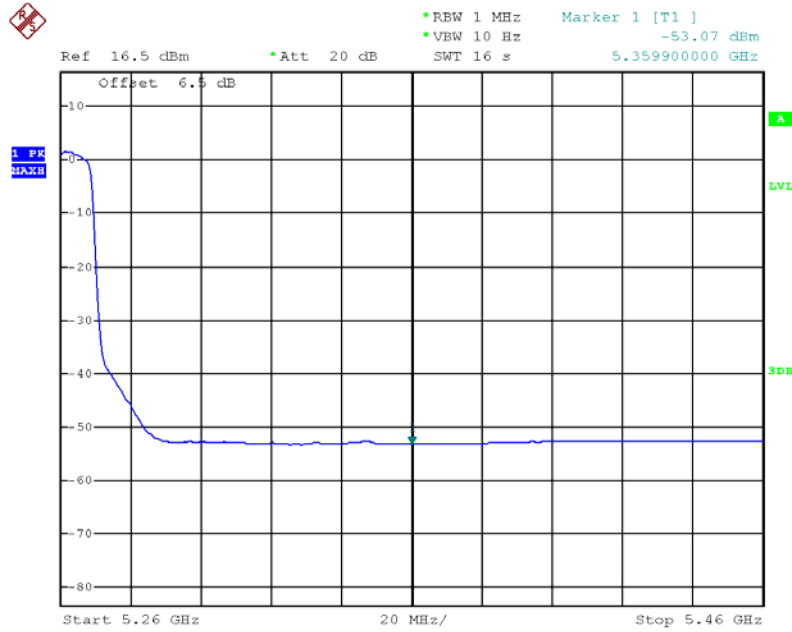

Date: 26.OCT.2012 09:09:03


Tx2

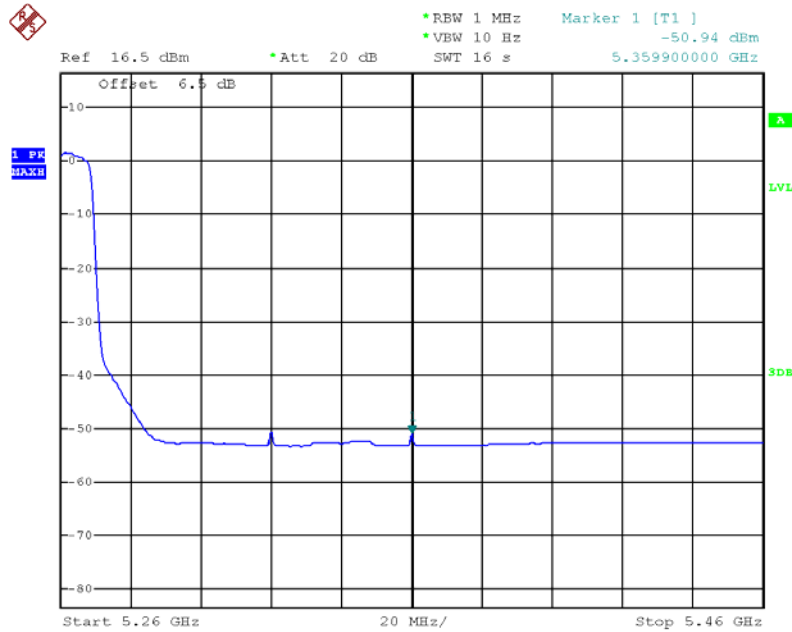

Date: 26.OCT.2012 09:09:32


Transmitter Conducted Bandedge Emissions Plot--Average on 5260 MHz, HT-20, Beam Forming, M0

Tx1

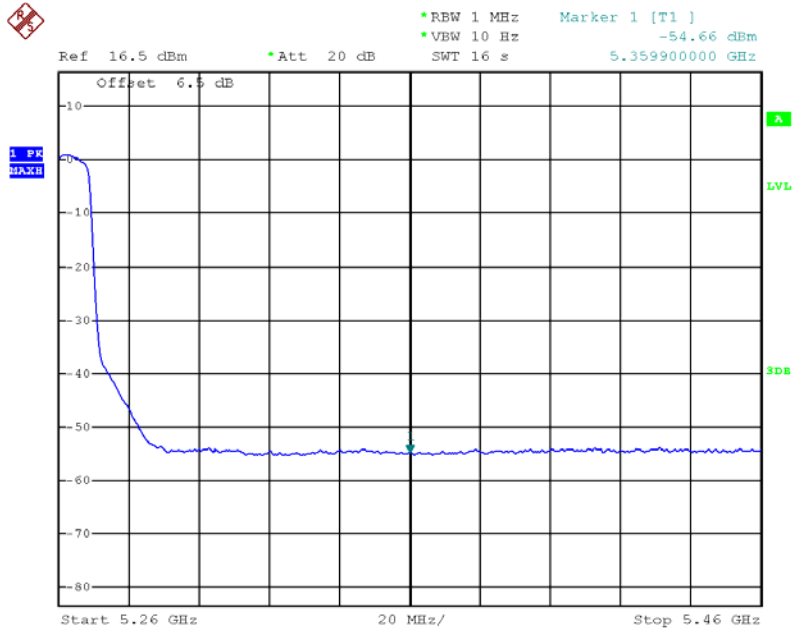

Date: 26.OCT.2012 09:12:37


Tx2

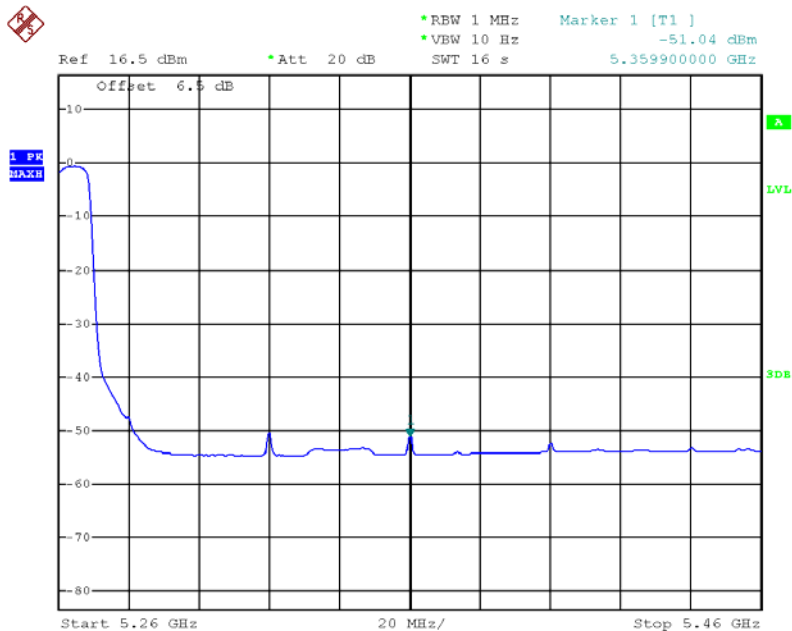

Date: 26.OCT.2012 09:13:18


Transmitter Conducted Bandedge Emissions Plot--Average on 5260 MHz, HT-20, Beam Forming, M8

Tx1

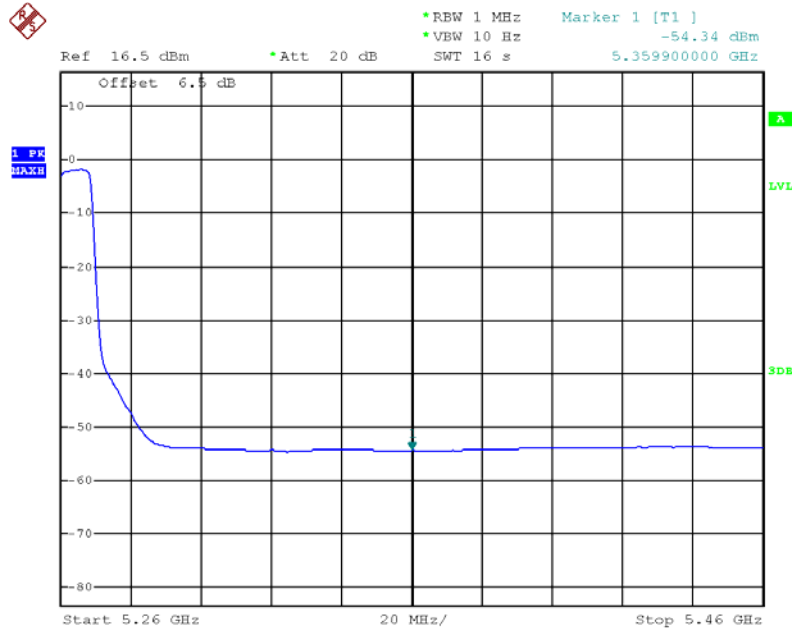

Date: 26.OCT.2012 09:15:46

Tx2

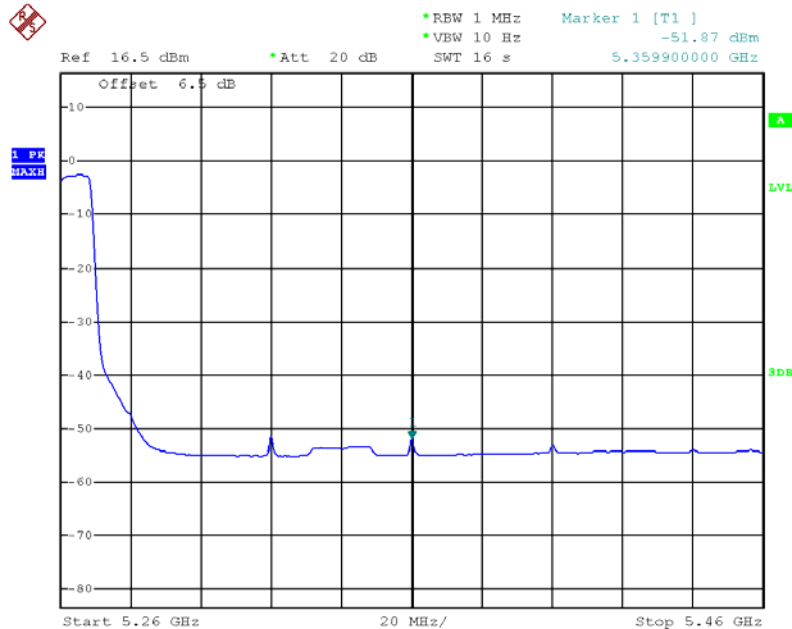


Date: 26.OCT.2012 09:16:24




Transmitter Conducted Bandedge Emissions Plot--Average on 5300 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6 Mbps

Tx1

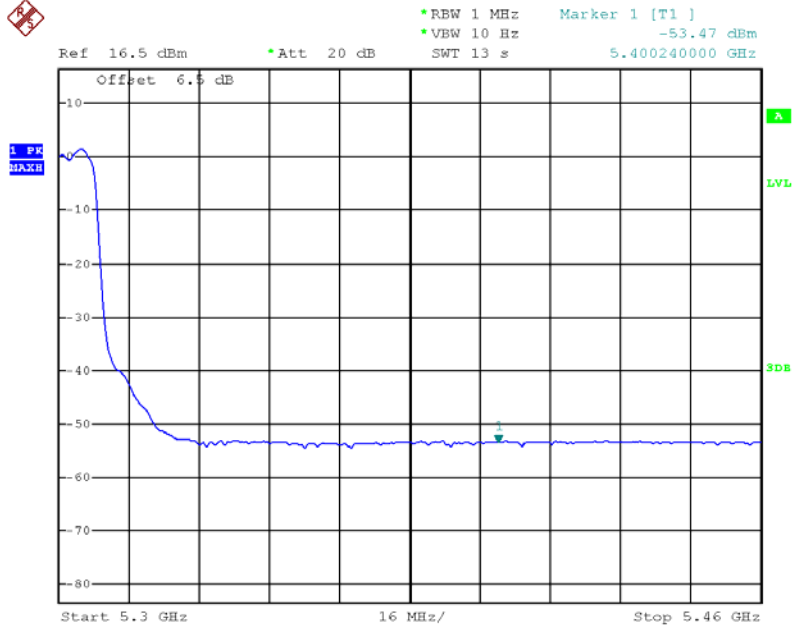

Date: 26.OCT.2012 11:17:22

Tx2

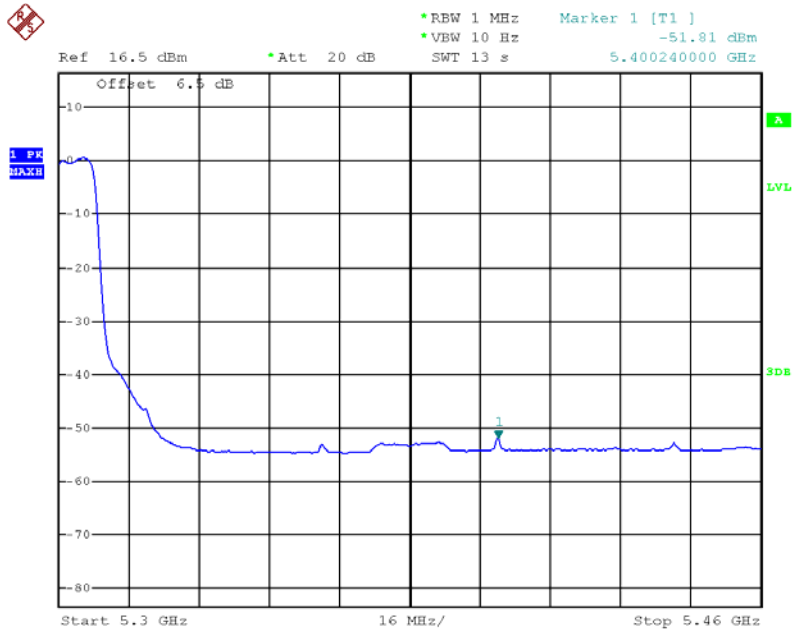


Date: 26.OCT.2012 11:17:45




Transmitter Conducted Bandedge Emissions Plot-Average on 5300 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

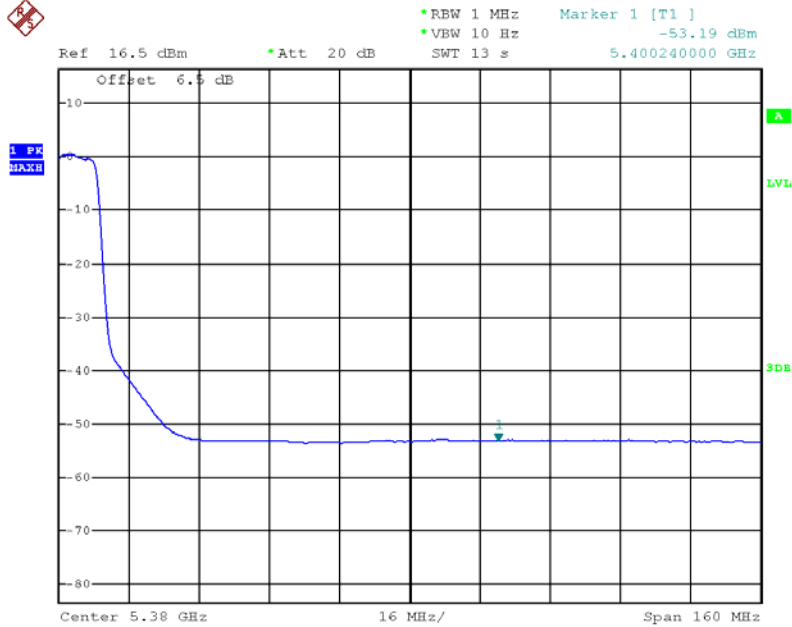

Date: 26.OCT.2012 11:19:14

Tx2

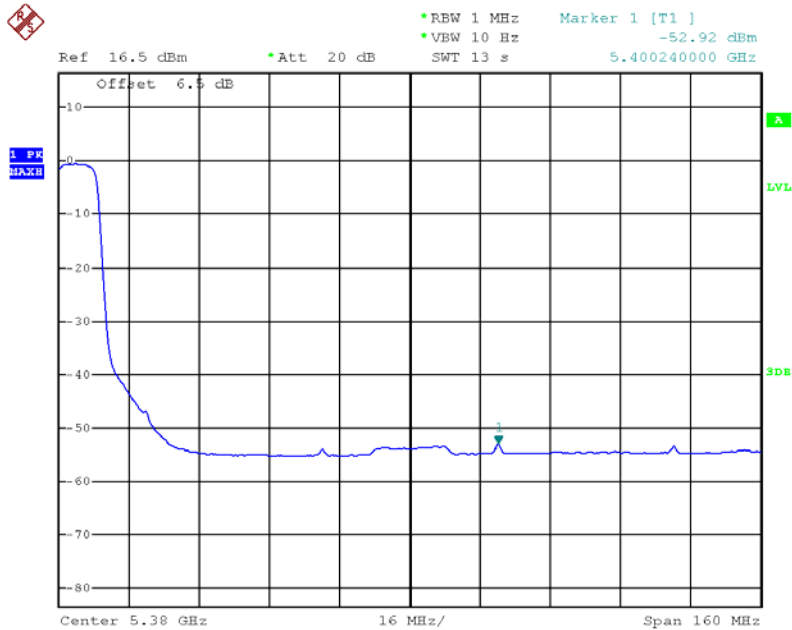


Date: 26.OCT.2012 11:19:35




Transmitter Conducted Bandedge Emissions Plot–Average on 5300 MHz, HT-20, Beam Forming, M8

Tx1

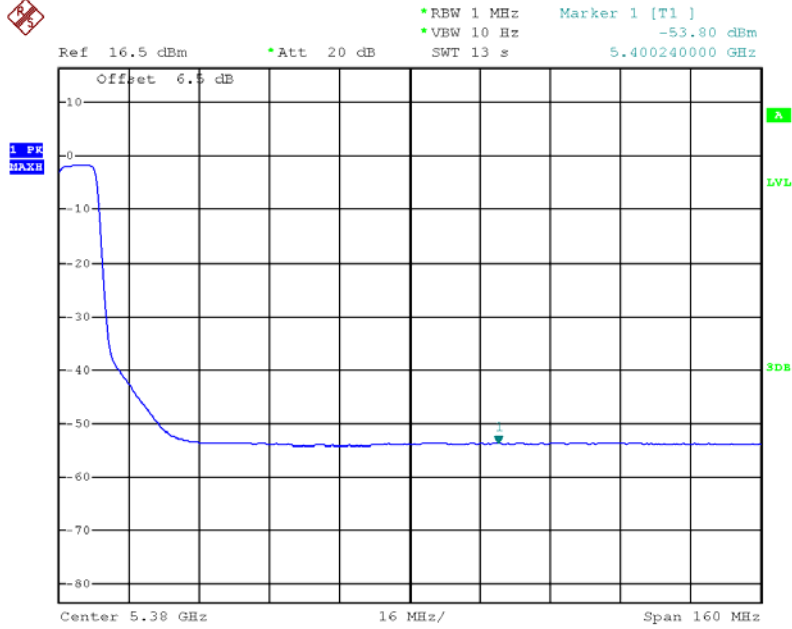

Date: 26.OCT.2012 11:20:47

Tx2

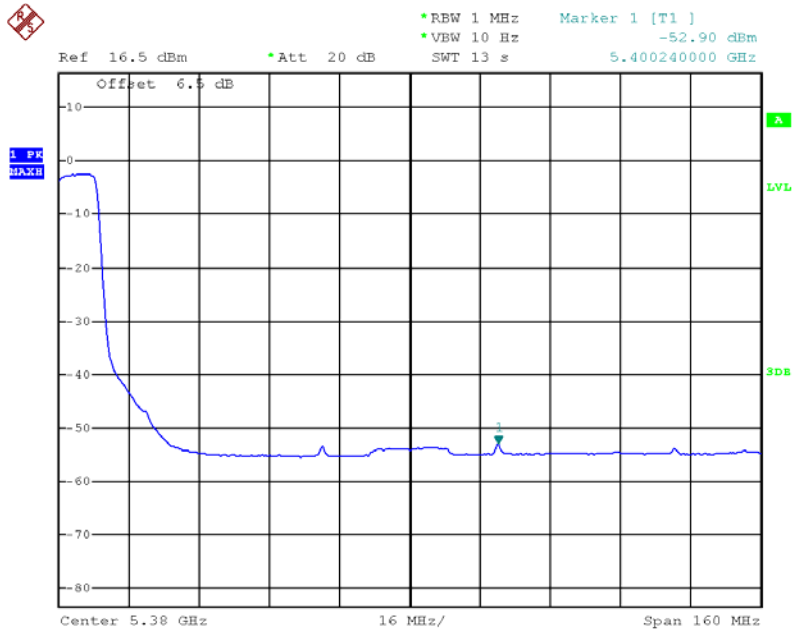


Date: 26.OCT.2012 11:21:09




Transmitter Conducted Bandedge Emissions Plot--Average on 5320 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6 Mbps

Tx1

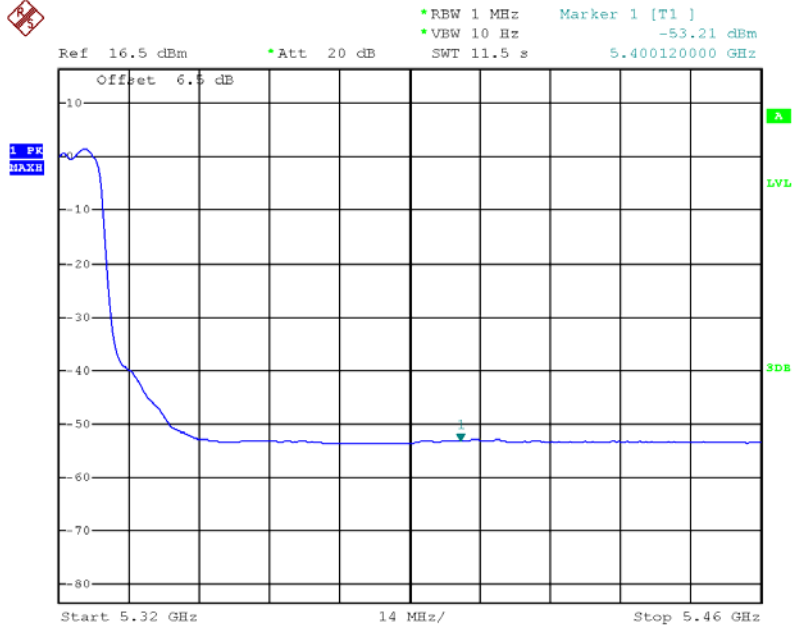

Date: 26.OCT.2012 11:22:59

Tx2

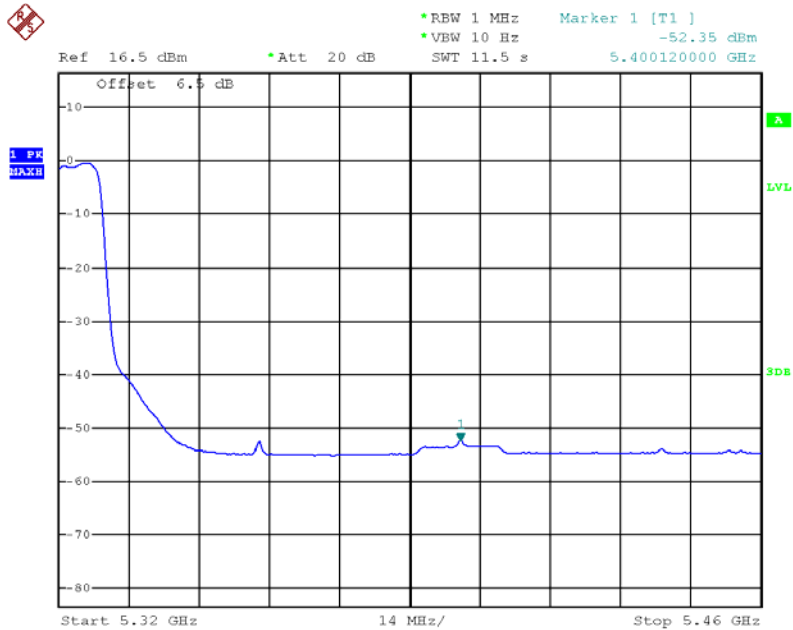


Date: 26.OCT.2012 11:23:18




Transmitter Conducted Bandedge Emissions Plot--Average on 5320 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

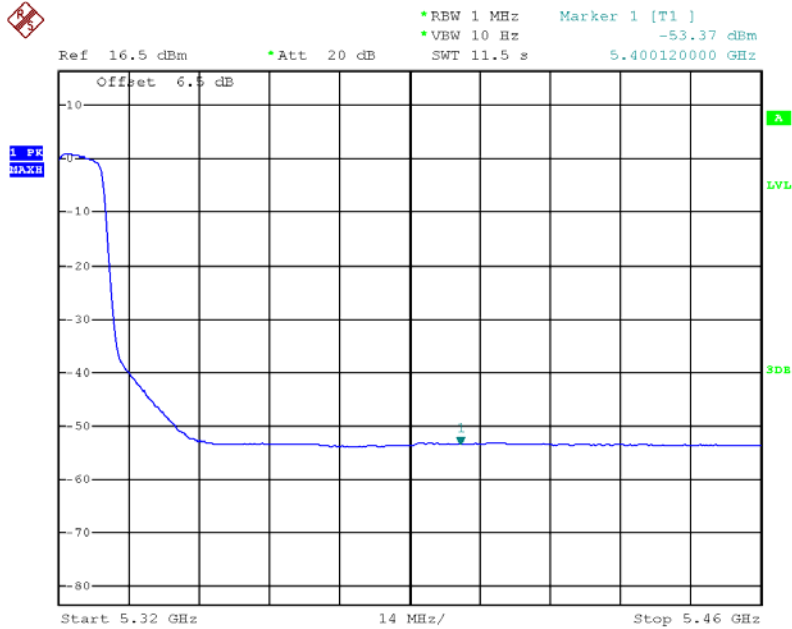

Date: 26.OCT.2012 11:24:20


Tx2

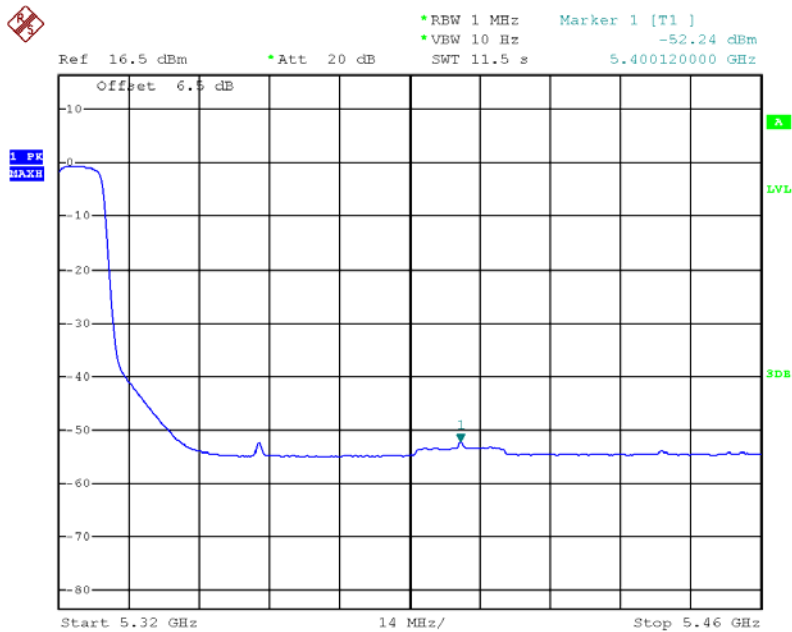

Date: 26.OCT.2012 11:25:32


Transmitter Conducted Bandedge Emissions Plot–Average on 5320 MHz, HT-20, Beam Forming, M8

Tx1

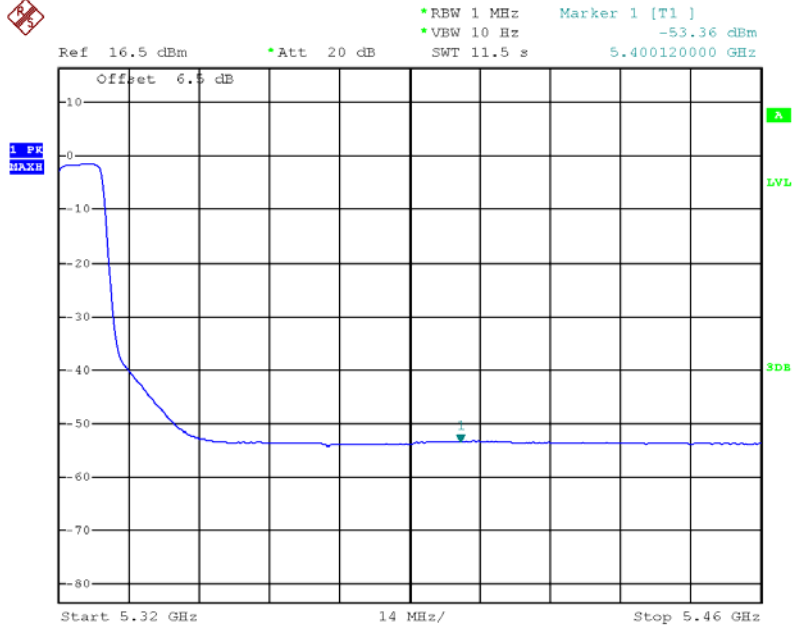

Date: 26.OCT.2012 11:26:44

Tx2

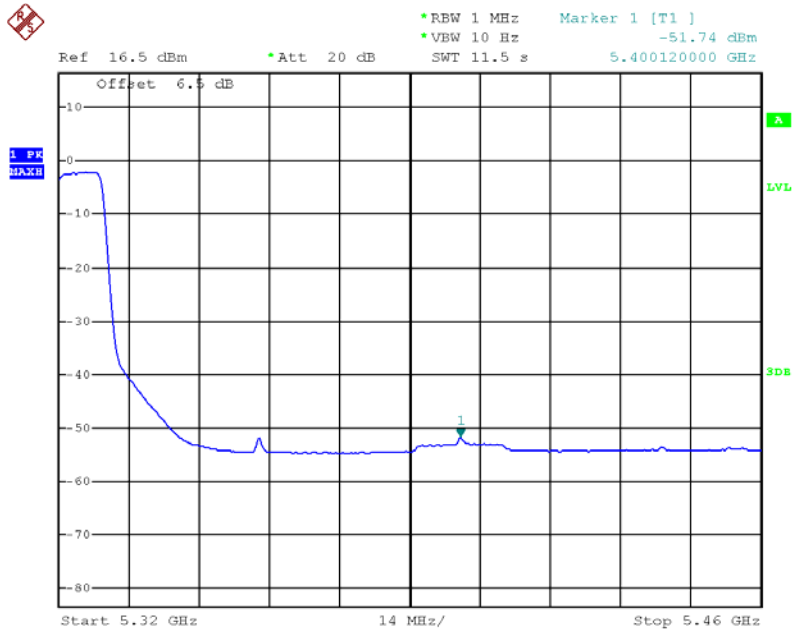


Date: 26.OCT.2012 11:27:05




Transmitter Conducted Bandedge Emissions Plot--Average on 5270 MHz,
HT-40 / HT-40, STBC / HT-40, Beam Forming, M0

Tx1

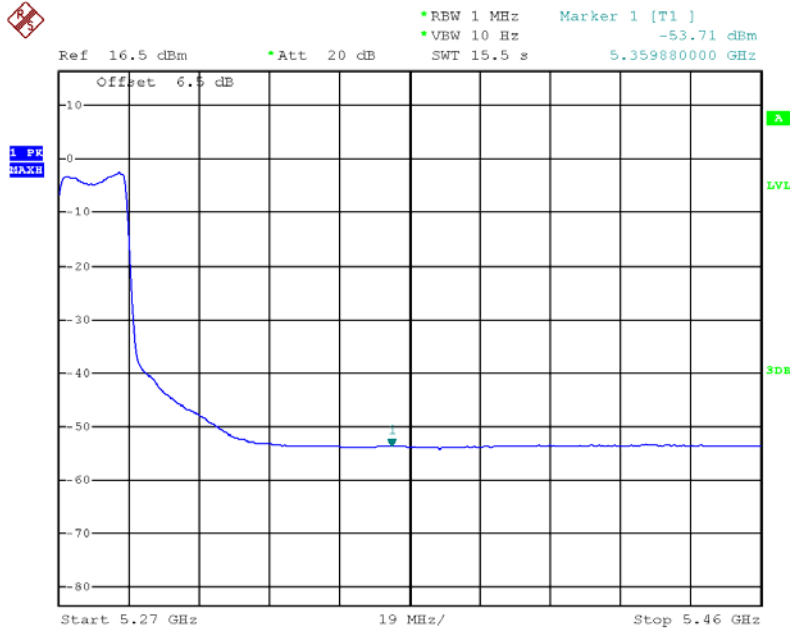

Date: 26.OCT.2012 11:30:38

Tx2

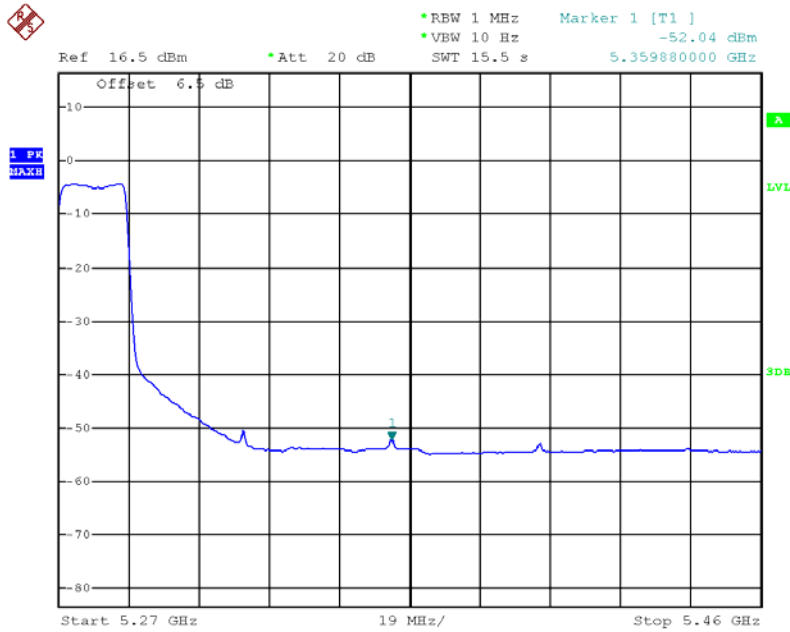


Date: 26.OCT.2012 11:31:02




Transmitter Conducted Bandedge Emissions Plot--Average on 5270 MHz, HT-40, Beam Forming, M8

Tx1

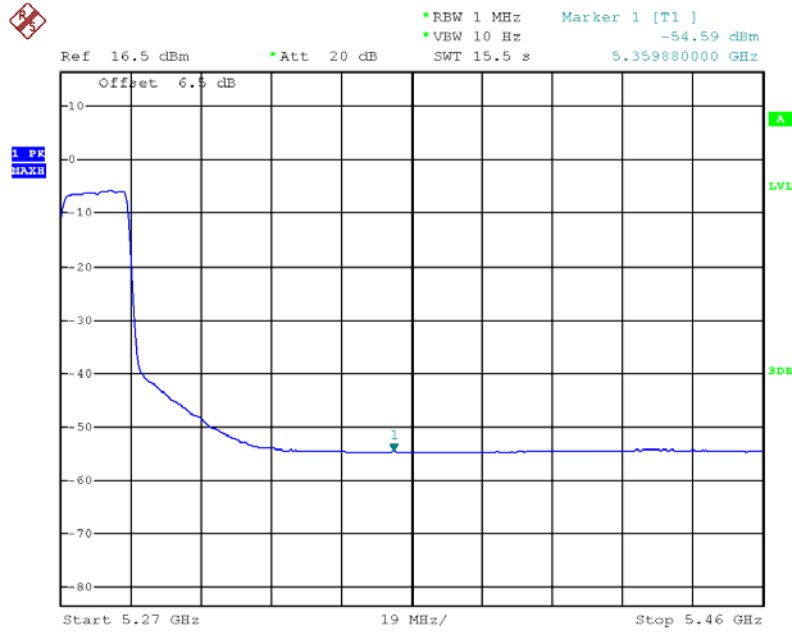

Date: 26.OCT.2012 11:32:53


Tx2

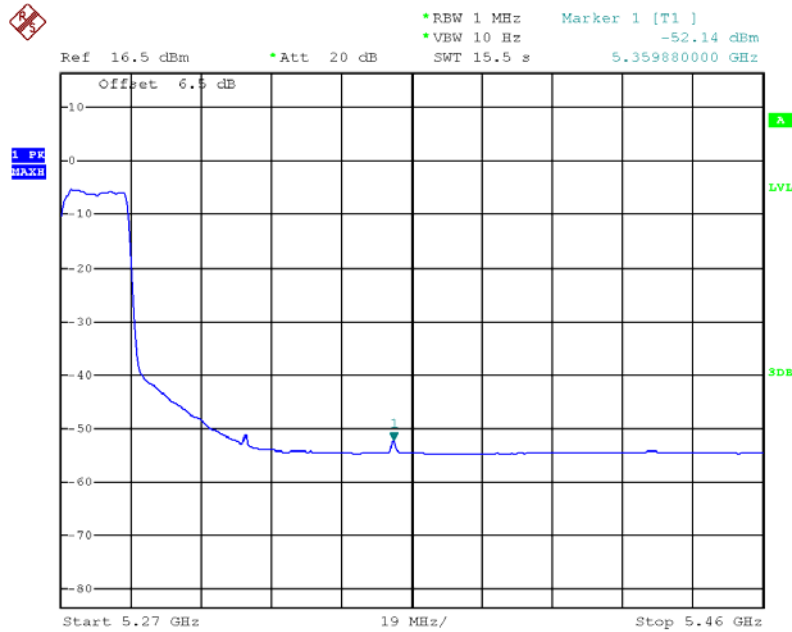

Date: 26.OCT.2012 11:33:08


Transmitter Conducted Bandedge Emissions Plot--Average on 5310 MHz, HT-40 / HT-40, STBC, M0

Tx1

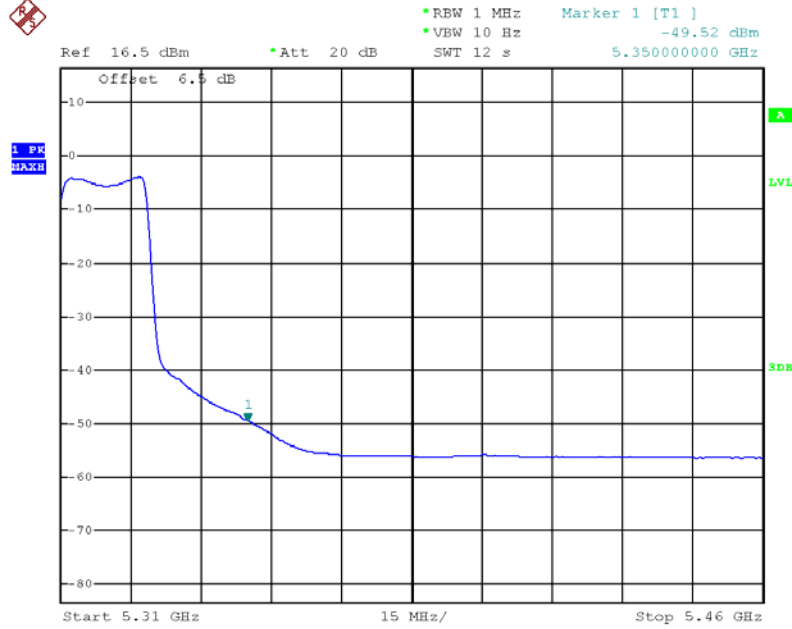

Date: 26.OCT.2012 11:38:48

Tx2

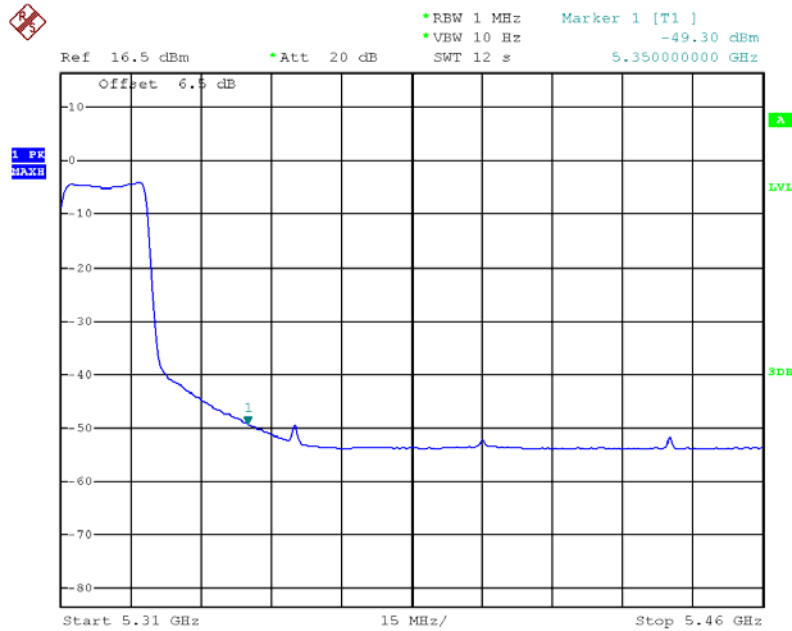


Date: 26.OCT.2012 11:39:09




Transmitter Conducted Bandedge Emissions Plot--Average on 5310 MHz, HT-40, Beam Forming, M0

Tx1

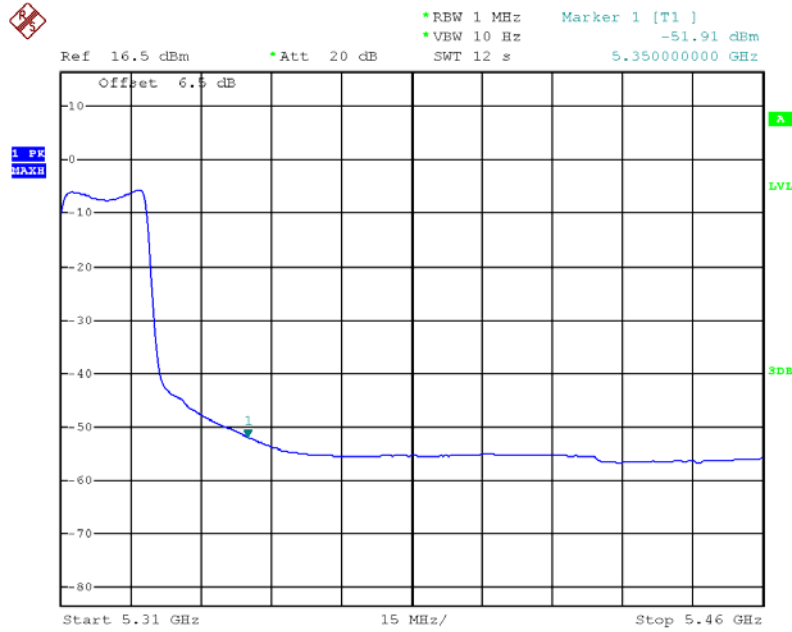

Date: 26.OCT.2012 11:47:03

Tx2

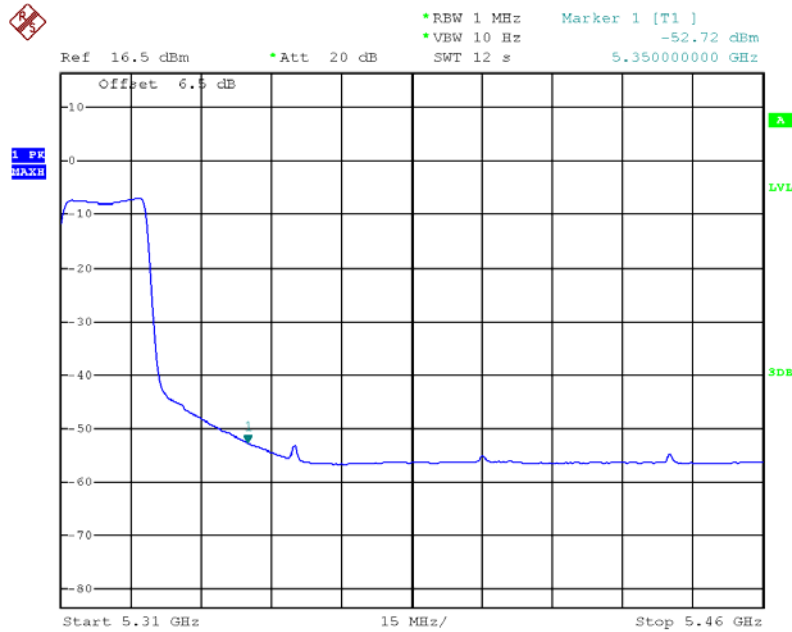


Date: 26.OCT.2012 11:44:32




Transmitter Conducted Bandedge Emissions Plot--Average on 5310 MHz, HT-40, Beam Forming, M8

Tx1

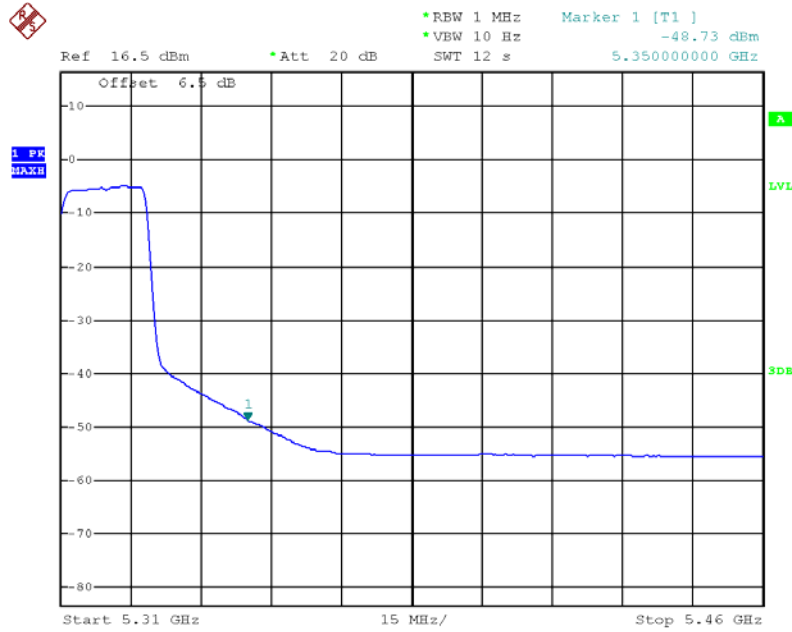

Date: 26.OCT.2012 11:49:42

Tx2

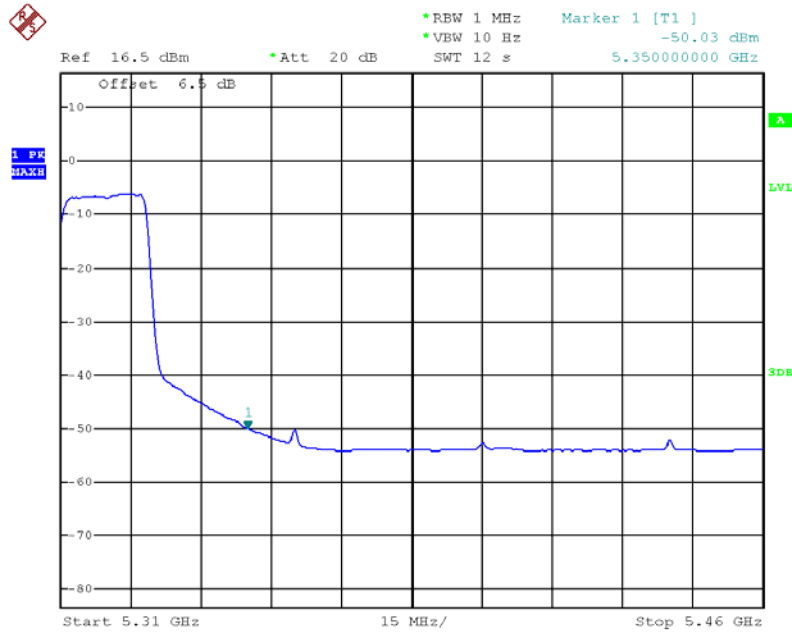


Date: 26.OCT.2012 11:50:07




Transmitter Conducted Bandedge Emissions Plot—Peak on 5260 MHz, Non HT-20, 6Mbps

Tx1

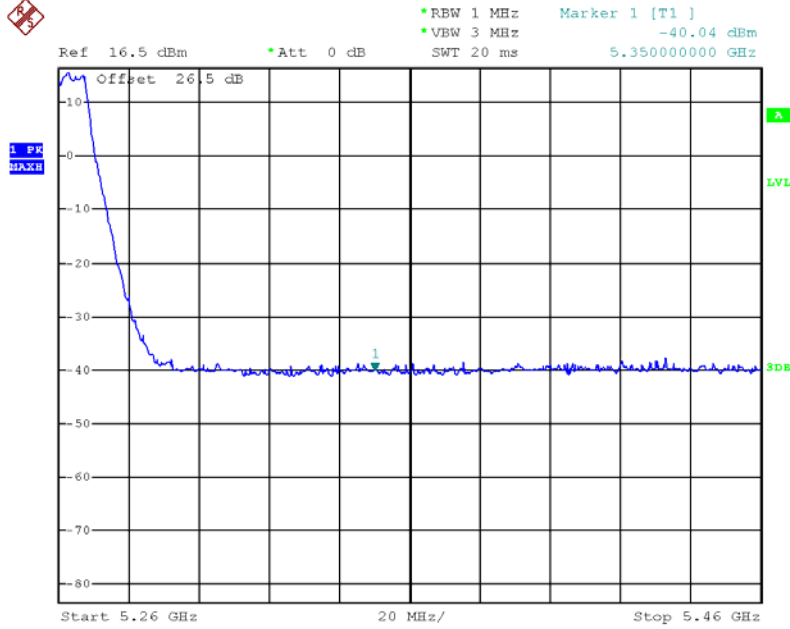

Date: 26.OCT.2012 08:50:46

Tx2

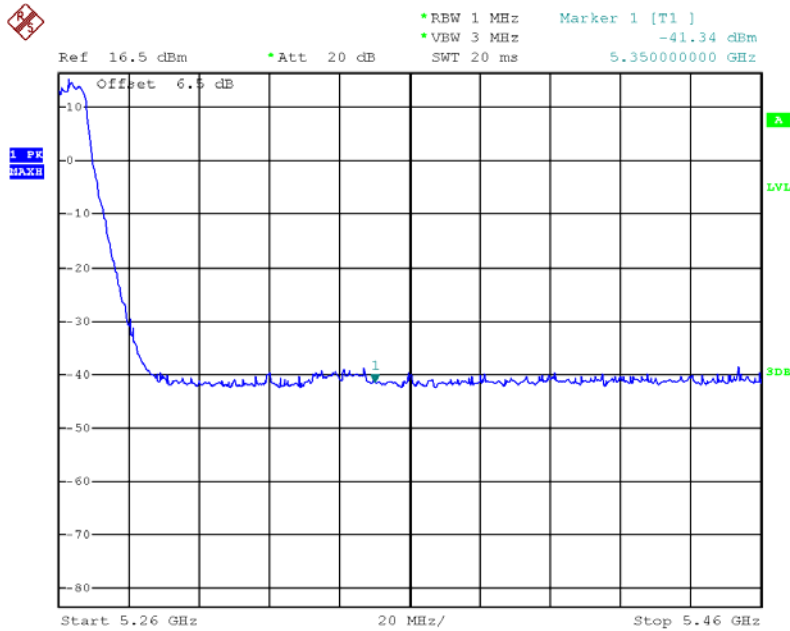


Date: 26.OCT.2012 09:04:37




Transmitter Conducted Bandedge Emissions Plot—Peak on 5260 MHz,
Non HT-20, Beam Forming, 6 Mbps

Tx1

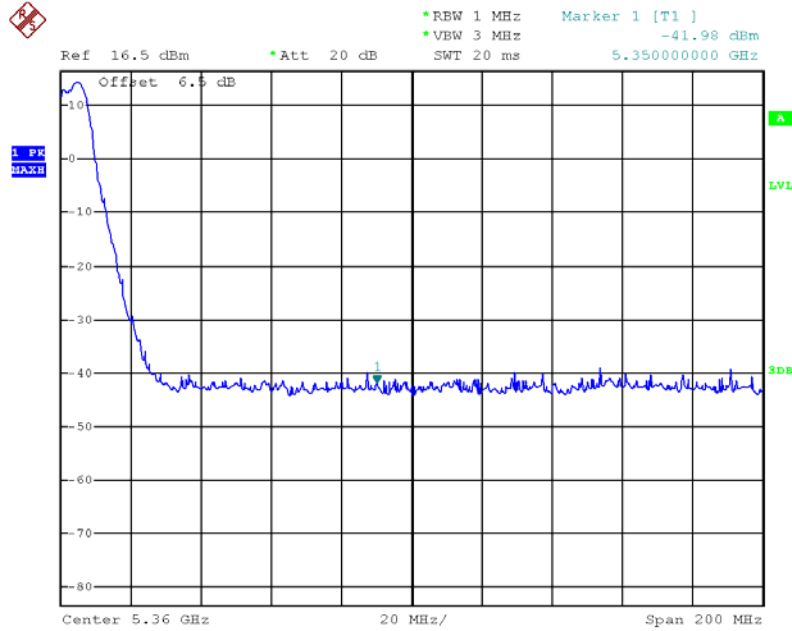

Date: 26.OCT.2012 09:05:25


Tx2

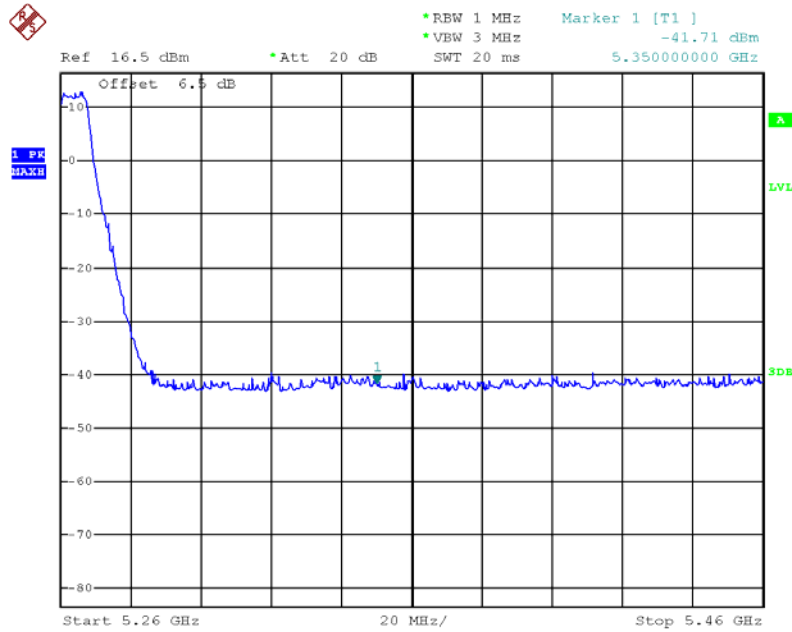

Date: 26.OCT.2012 09:06:54


Transmitter Conducted Bandedge Emissions Plot-Peak on 5260 MHz, HT-20 / HT-20, STBC, M0

Tx1

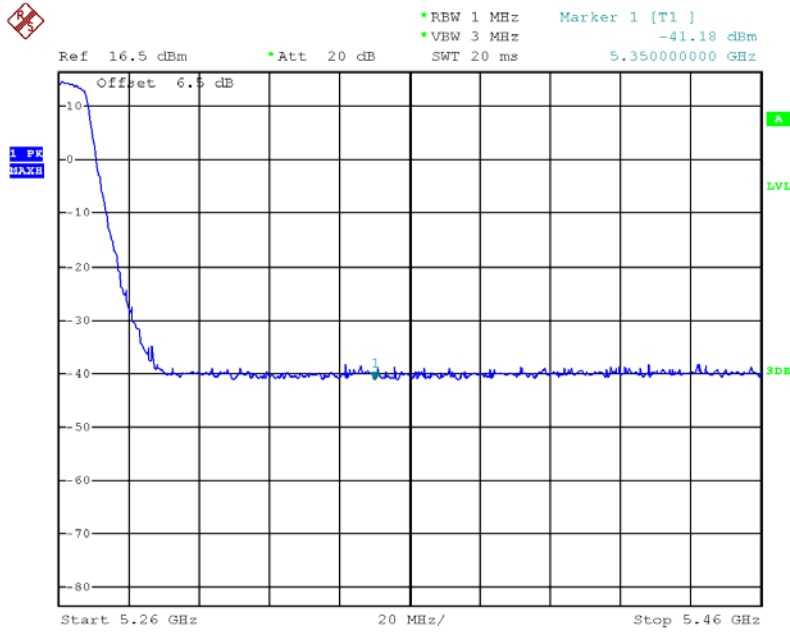

Date: 26.OCT.2012 09:08:31

Tx2

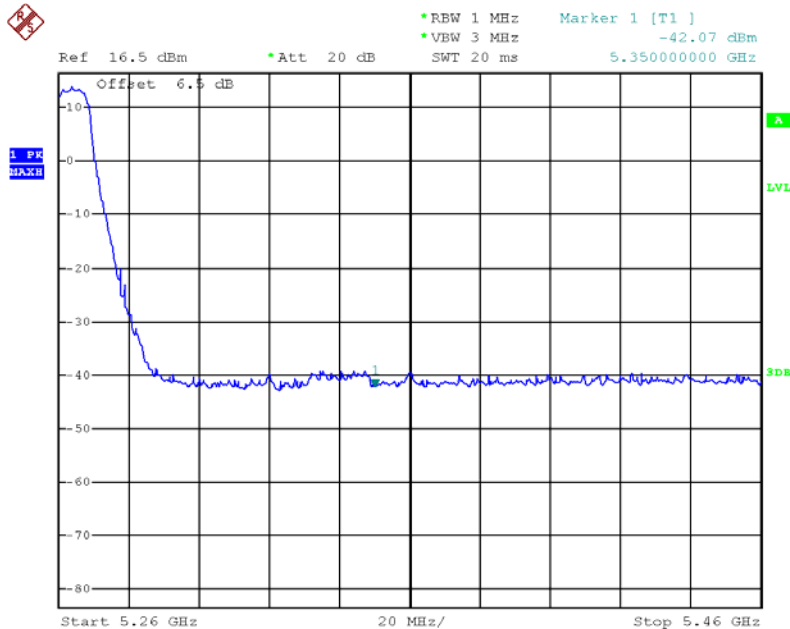


Date: 26.OCT.2012 09:10:24




Transmitter Conducted Bandedge Emissions Plot-Peak on 5260 MHz, HT-20, Beam Forming, M0

Tx1

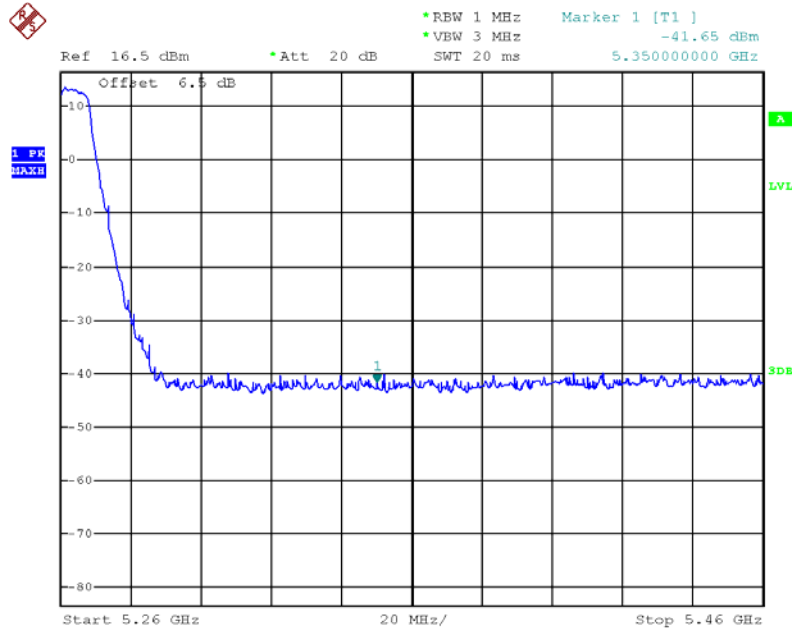

Date: 26.OCT.2012 09:11:48

Tx2

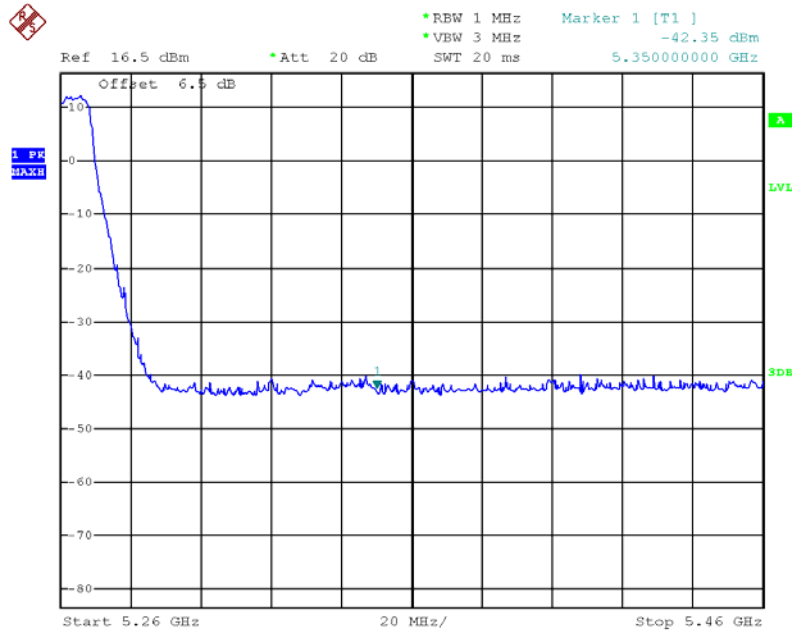


Date: 26.OCT.2012 09:13:46




Transmitter Conducted Bandedge Emissions Plot–Peak on 5260 MHz, HT-20, Beam Forming, M8

Tx1

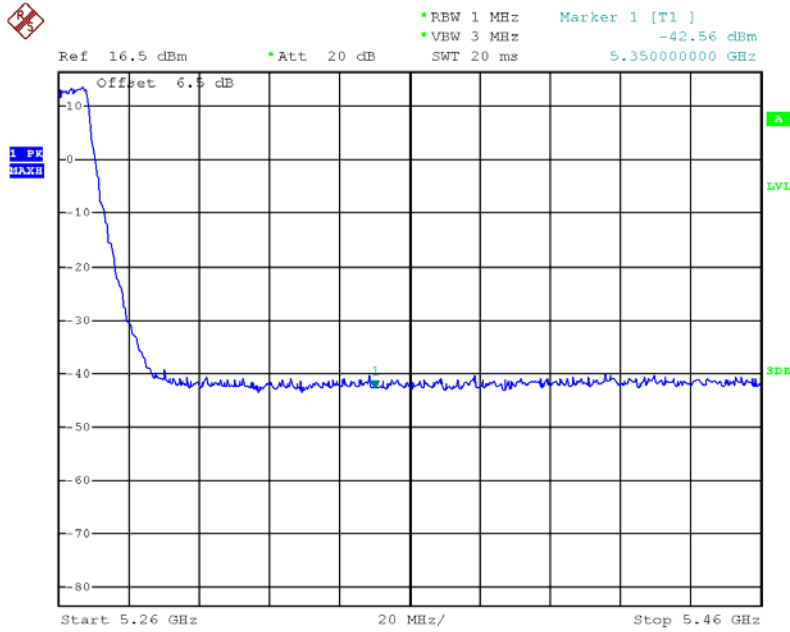

Date: 26.OCT.2012 09:14:57

Tx2

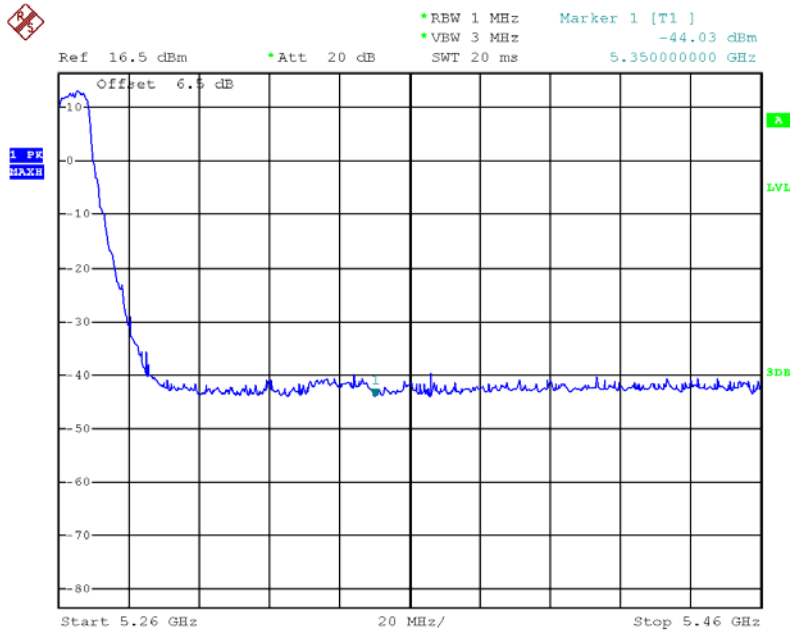


Date: 26.OCT.2012 09:16:43




Transmitter Conducted Bandedge Emissions Plot—Peak on 5300 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6 Mbps

Tx1

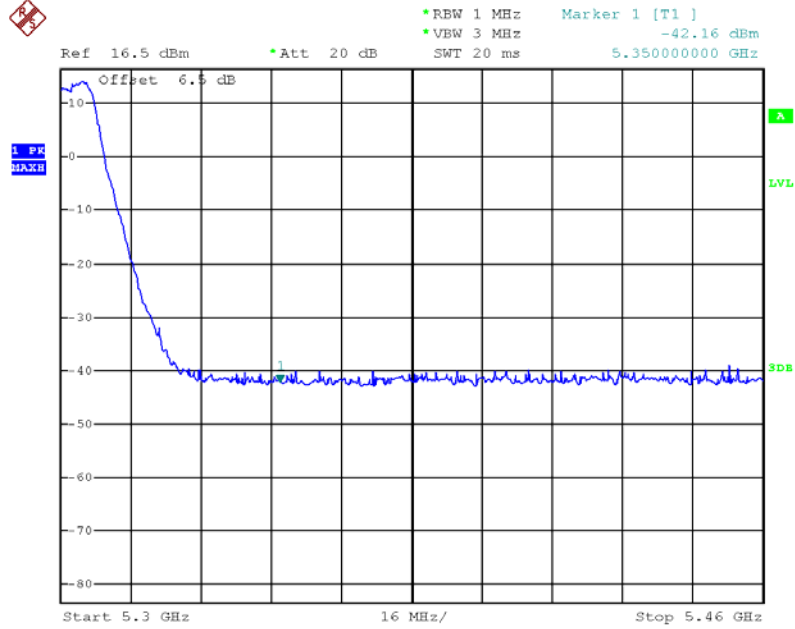

Date: 26.OCT.2012 11:16:09

Tx2

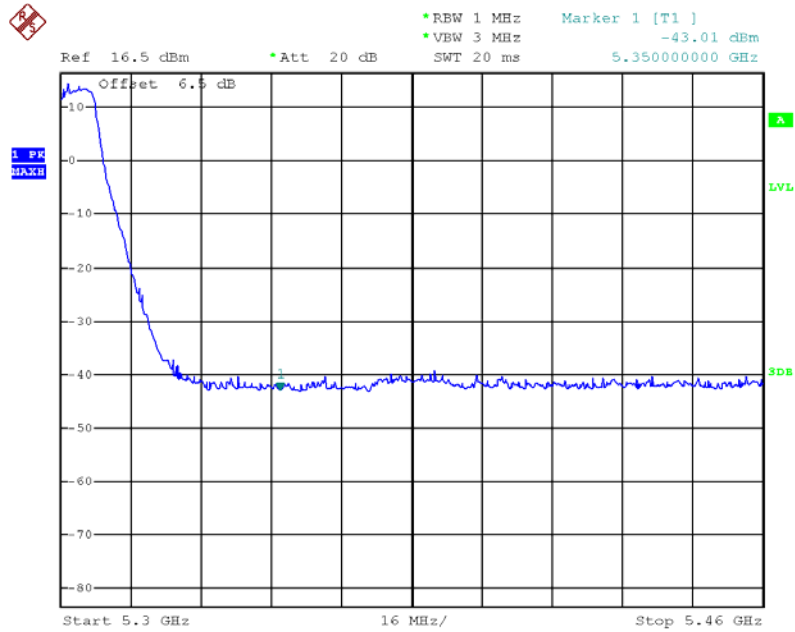


Date: 26.OCT.2012 11:18:04




Transmitter Conducted Bandedge Emissions Plot—Peak on 5300 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

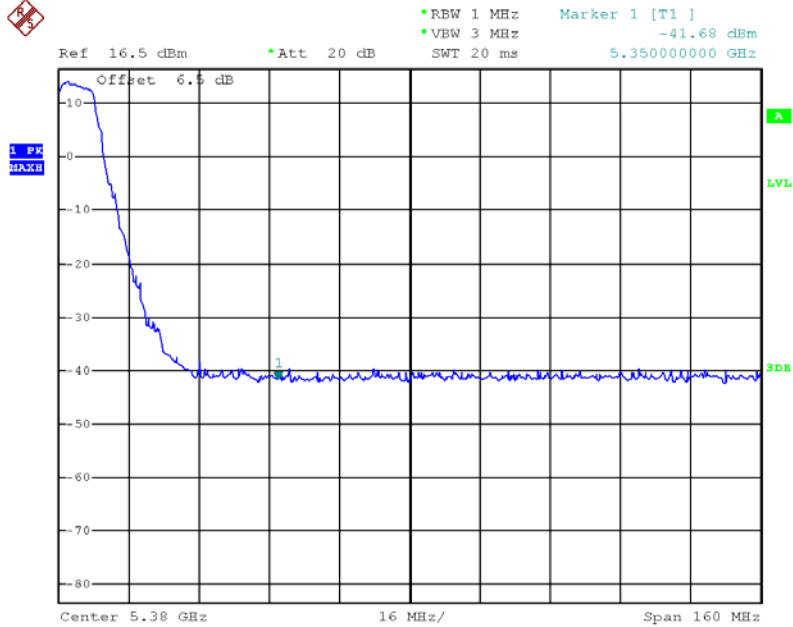

Date: 26.OCT.2012 11:18:56

Tx2

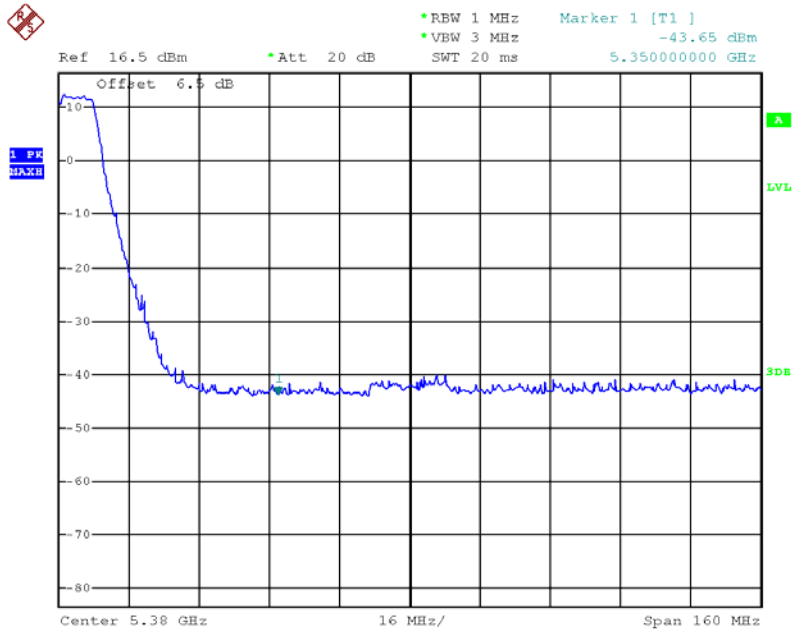


Date: 26.OCT.2012 11:19:48




Transmitter Conducted Bandedge Emissions Plot–Peak on 5300 MHz, HT-20, Beam Forming, M8

Tx1

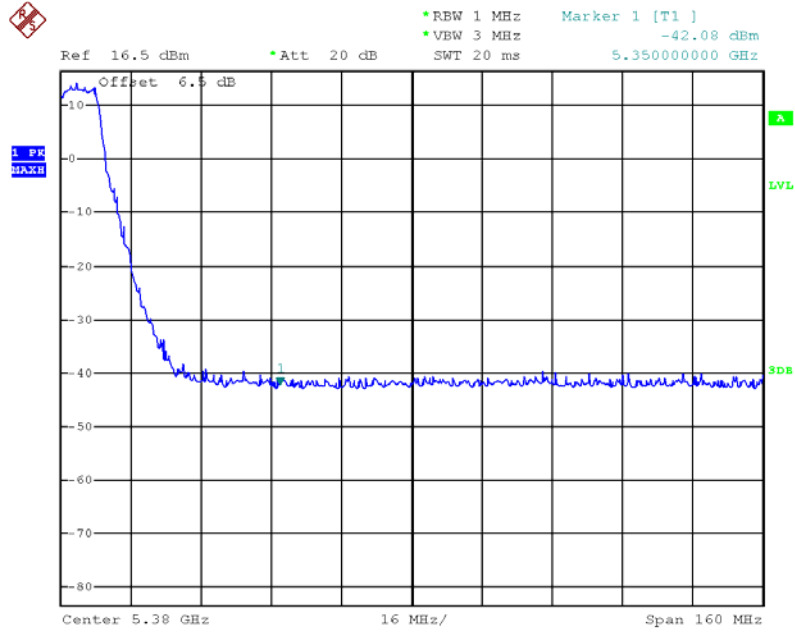

Date: 26.OCT.2012 11:20:34

Tx2

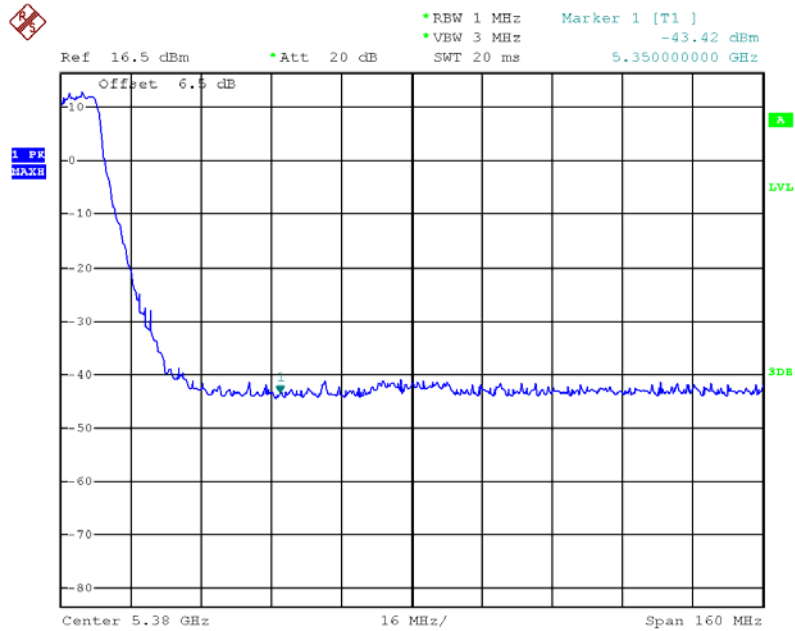


Date: 26.OCT.2012 11:21:21




Transmitter Conducted Bandedge Emissions Plot—Peak on 5320 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6 Mbps

Tx1

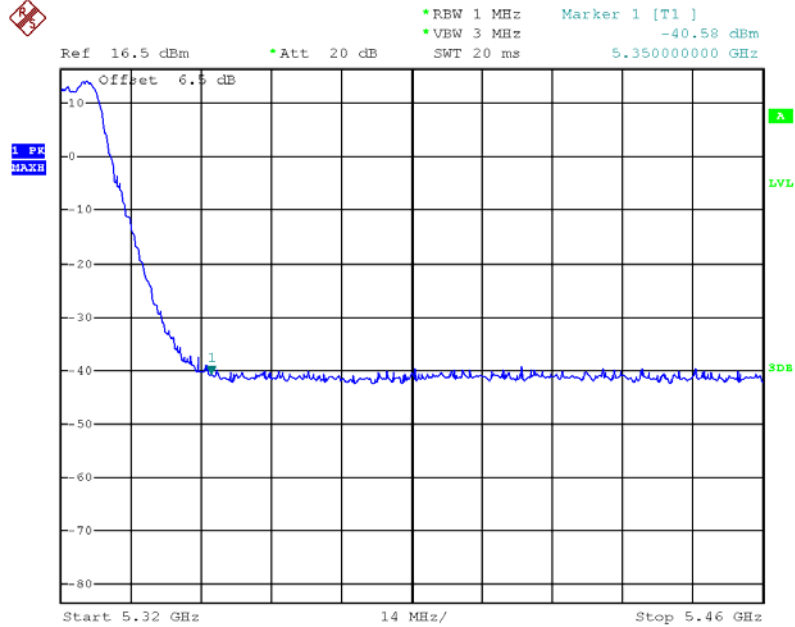

Date: 26.OCT.2012 11:22:40

Tx2

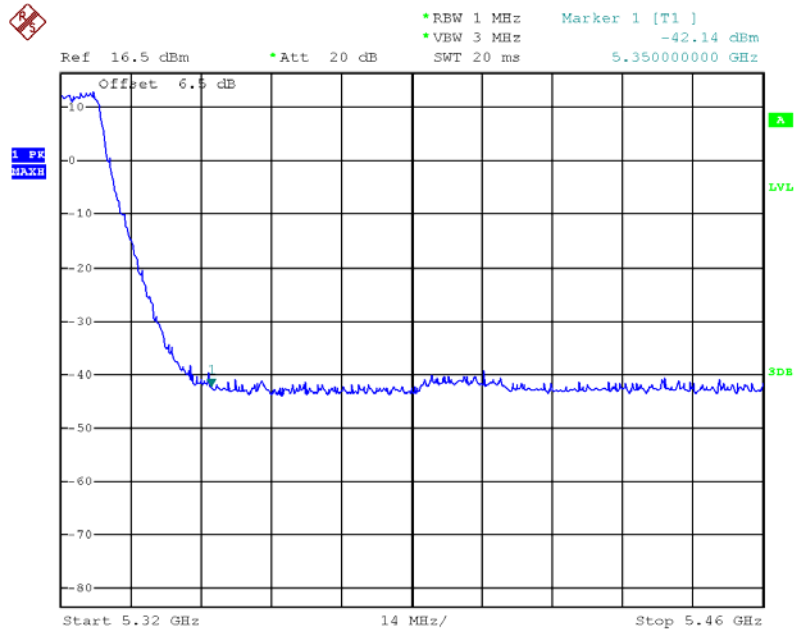


Date: 26.OCT.2012 11:23:31




Transmitter Conducted Bandedge Emissions Plot—Peak on 5320 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

Tx1

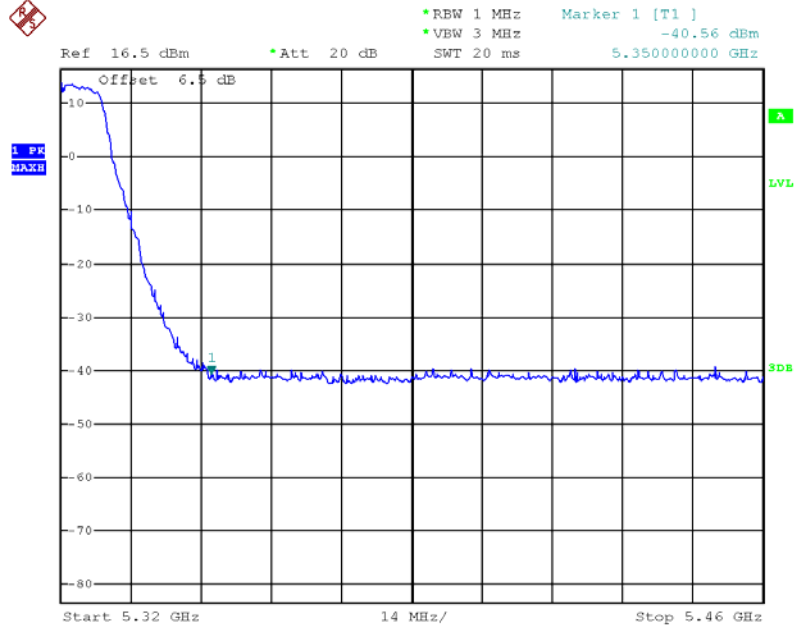

Date: 26.OCT.2012 11:24:05


Tx2

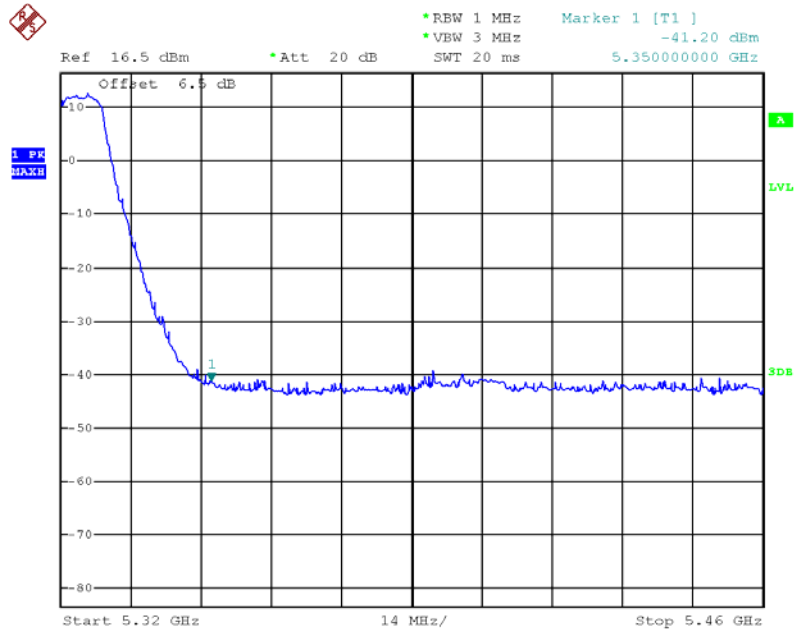

Date: 26.OCT.2012 11:25:46


Transmitter Conducted Bandedge Emissions Plot–Peak on 5320 MHz, HT-20, Beam Forming, M8

Tx1

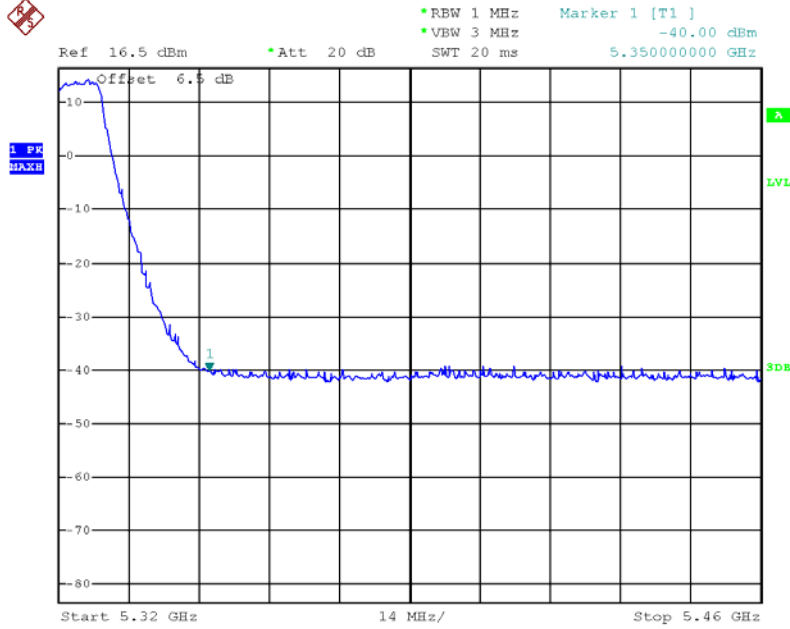

Date: 26.OCT.2012 11:26:25

Tx2

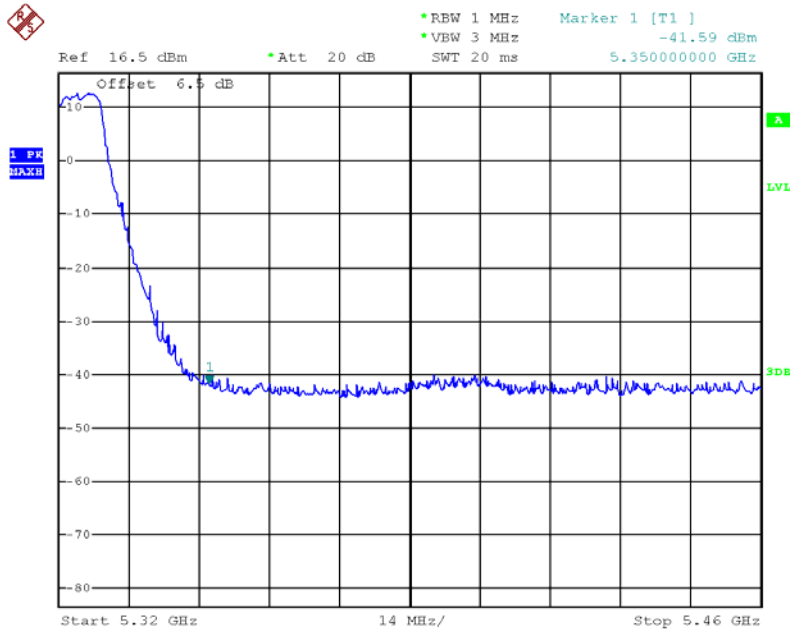


Date: 26.OCT.2012 11:27:17




Transmitter Conducted Bandedge Emissions Plot—Peak on 5270 MHz,
HT-40 / HT-40, STBC / HT-40, Beam Forming, M0

Tx1

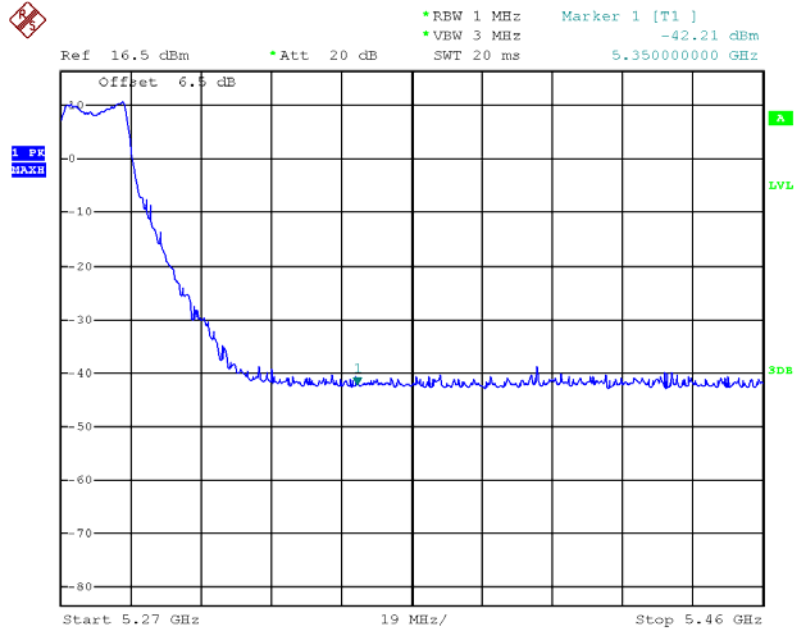

Date: 26.OCT.2012 11:30:18


Tx2

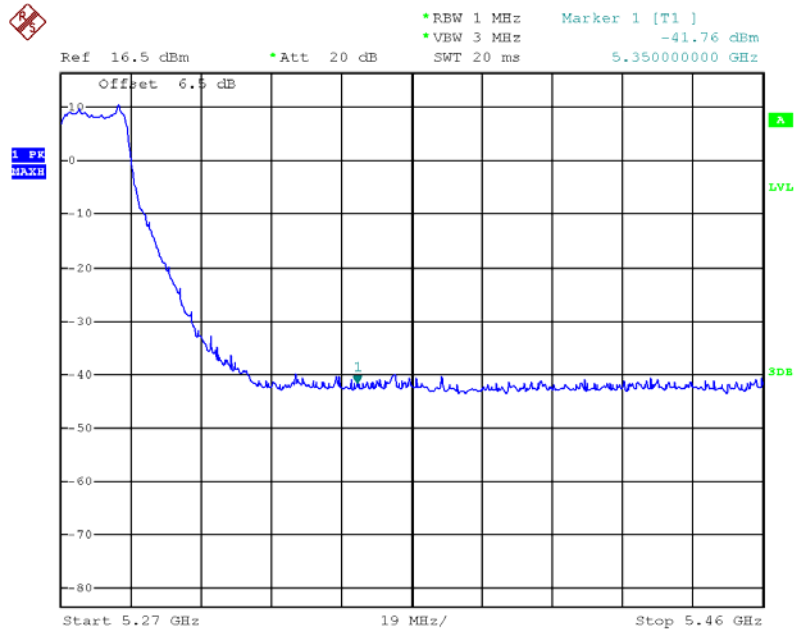

Date: 26.OCT.2012 11:31:14


Transmitter Conducted Bandedge Emissions Plot–Peak on 5270 MHz, HT-40, Beam Forming, M8

Tx1

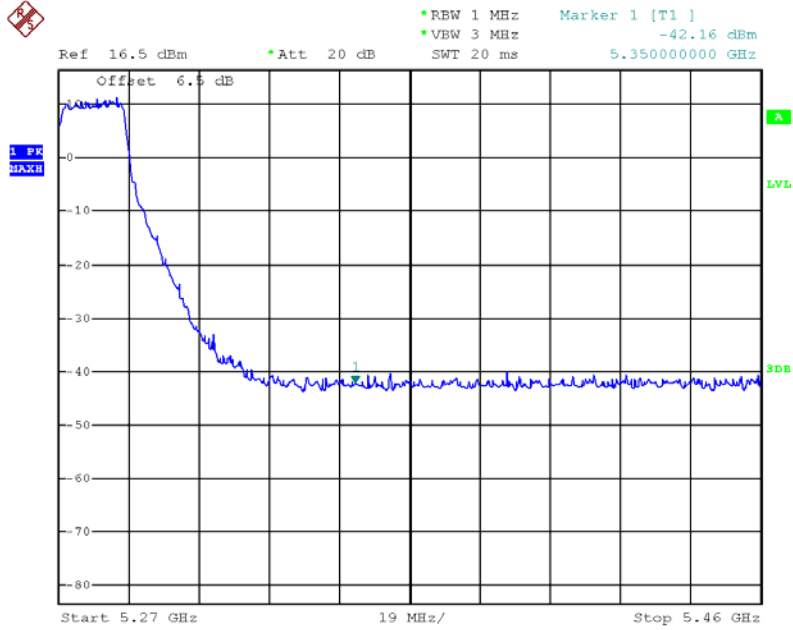

Date: 26.OCT.2012 11:32:29

Tx2

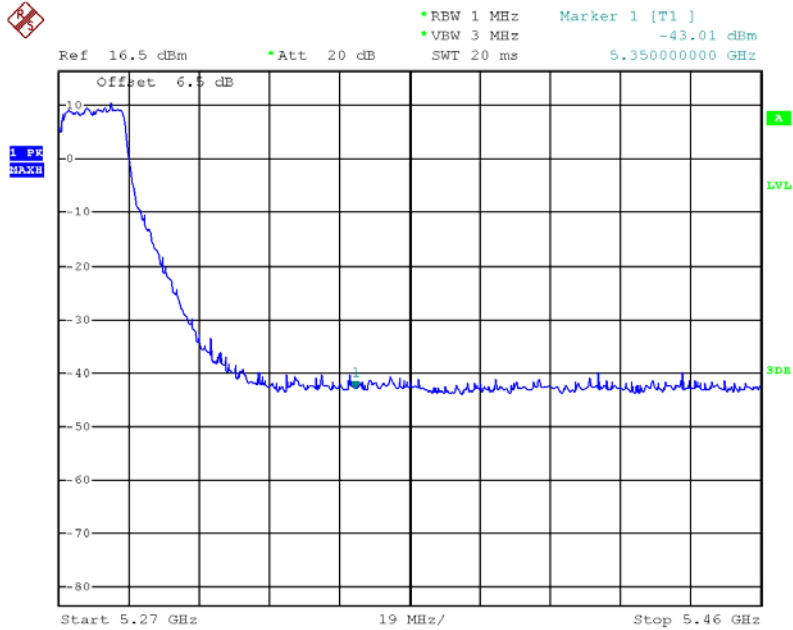


Date: 26.OCT.2012 11:33:20




Transmitter Conducted Bandedge Emissions Plot–Peak on 5310 MHz, HT-40 / HT-40, STBC, M0

Tx1

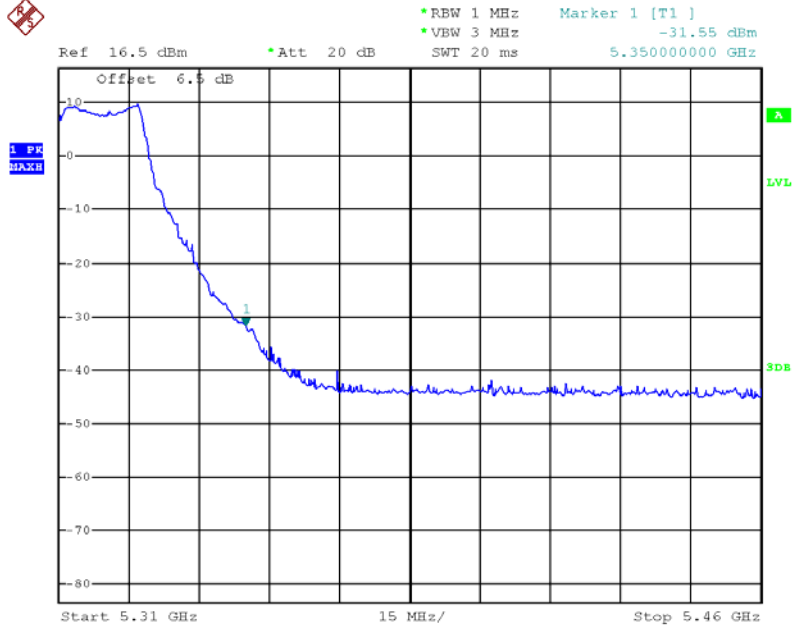

Date: 26.OCT.2012 11:38:28

Tx2

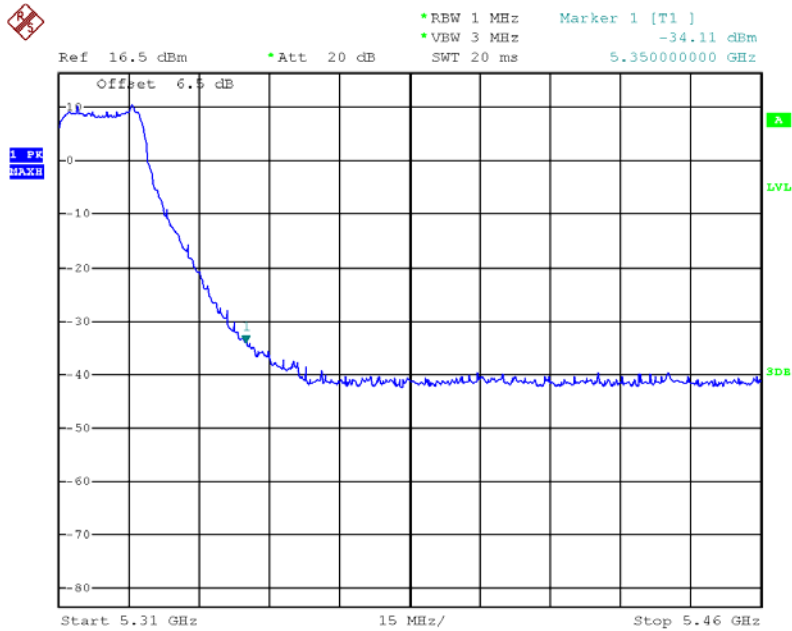


Date: 26.OCT.2012 11:39:37




Transmitter Conducted Bandedge Emissions Plot-Peak on 5310 MHz, HT-40, Beam Forming, M0

Tx1

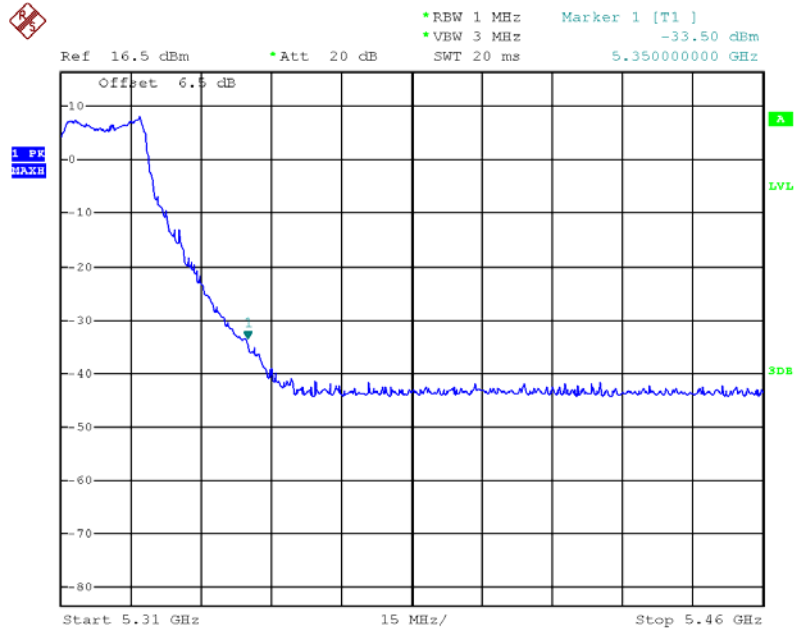

Date: 26.OCT.2012 11:42:14

Tx2

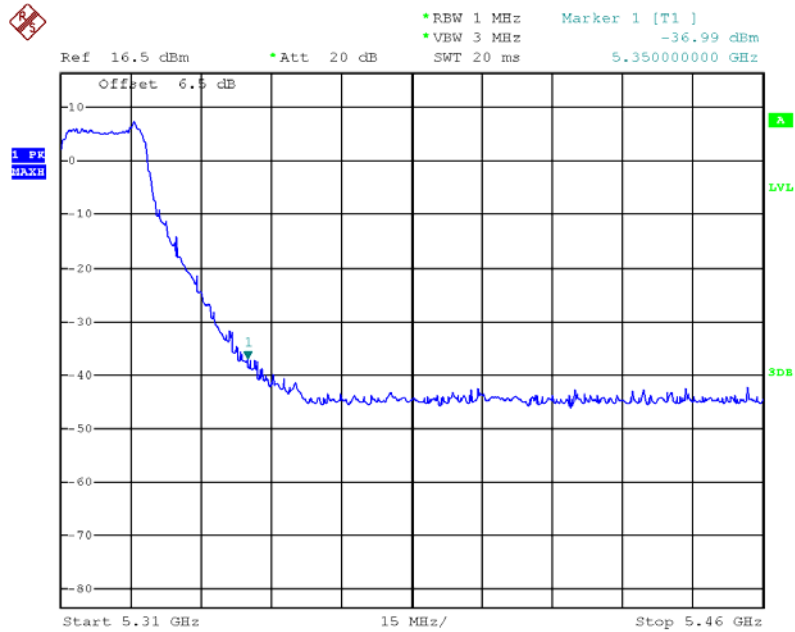


Date: 26.OCT.2012 11:47:38




Transmitter Conducted Bandedge Emissions Plot–Peak on 5310 MHz, HT-40, Beam Forming, M8

Tx1

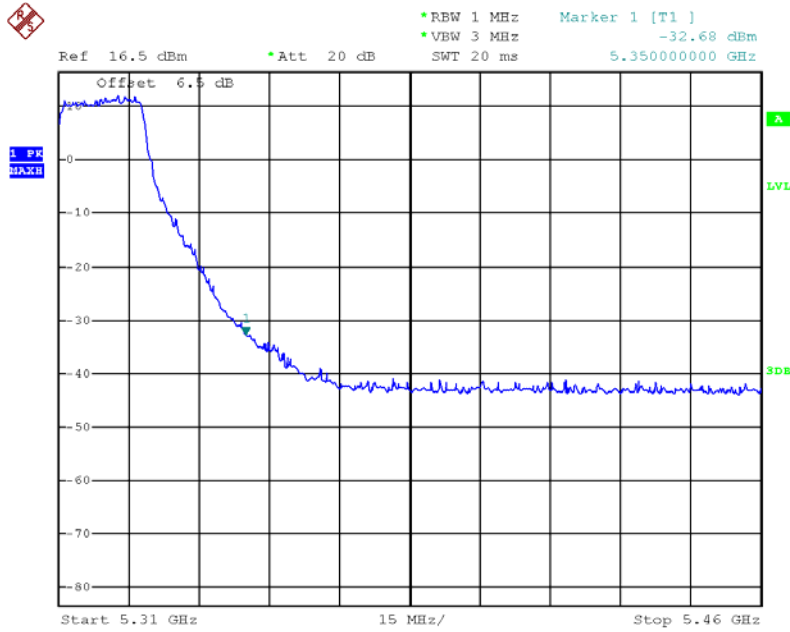

Date: 26.OCT.2012 11:49:21

Tx2

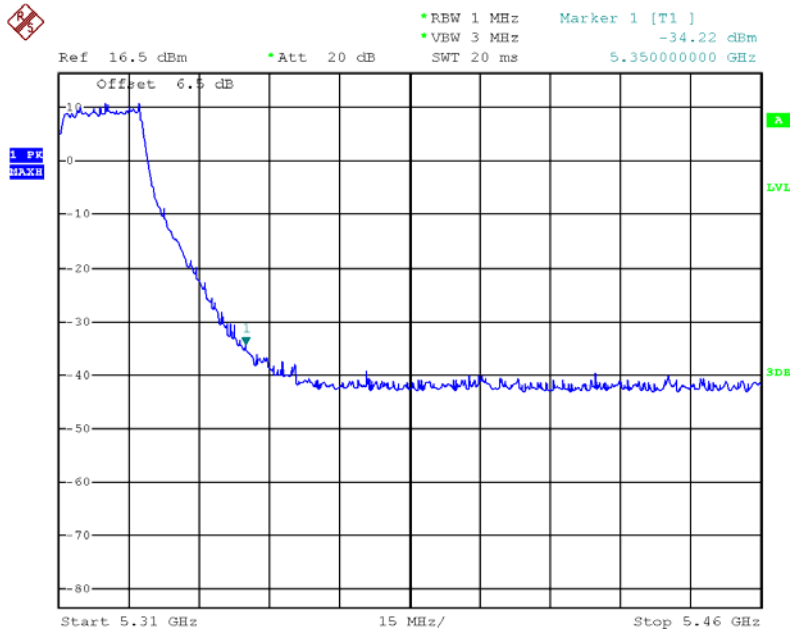

Date: 26.OCT.2012 11:50:17

3.7 Transmitter Conducted Unwanted Emissions

3.7.1 Transmitter Conducted Unwanted Emissions Limit

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty \geq 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For conducted measurement, refer as FCC KDB 789033, clause G.

3.7.4 Test Setup

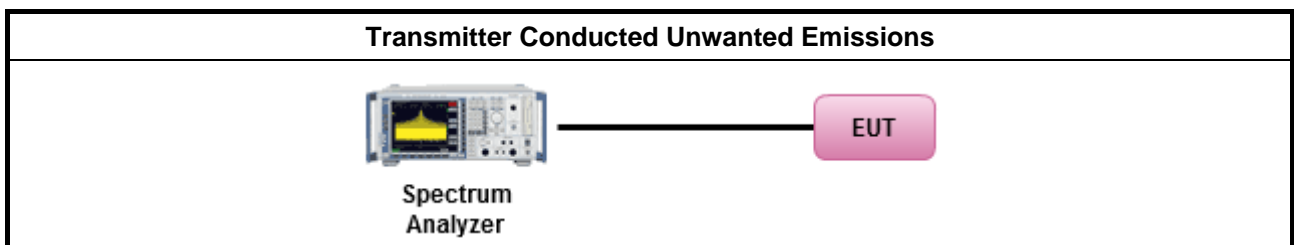


3.7.5 Test Result of Transmitter Conducted Unwanted Emissions

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Conducted Spur Delta(dB)	Limit (dBm)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	6	-30.9	-27	3.9
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-30.9	-27	3.9
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	-29.14	-27	2.14
	HT-20, Beam Forming, M0 to M7	M0	-29.14	-27	2.14
	HT-20, Beam Forming, M8 to M15	M8	-29.91	-27	2.91
5300	Non HT-20, 6 to 54Mbps	6	-29.6	-27	2.6
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-29.6	-27	2.6
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	-27.43	-27	0.43
	HT-20, Beam Forming, M0 to M7	M0	-27.43	-27	0.43
	HT-20, Beam Forming, M8 to M15	M8	-30.27	-27	3.27
5320	Non HT-20, 6 to 54Mbps	6	-29.67	-27	2.67
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-29.67	-27	2.67
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	-28.97	-27	1.97
	HT-20, Beam Forming, M0 to M7	M0	-28.97	-27	1.97
	HT-20, Beam Forming, M8 to M15	M8	-28.16	-27	1.16
5270	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	-31.22	-27	4.22
	HT-40, Beam Forming, M0 to M7	M0	-31.22	-27	4.22
	HT-40, Beam Forming, M8 to M15	M8	-31.9	-27	4.9
5310	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	-33.03	-27	6.03
	HT-40, Beam Forming, M0 to M7	M0	-33.03	-27	6.03
	HT-40, Beam Forming, M8 to M15	M8	-33.32	-27	6.32




**Transmitter Conducted Unwanted Emissions Plot on 5260 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6Mbps**

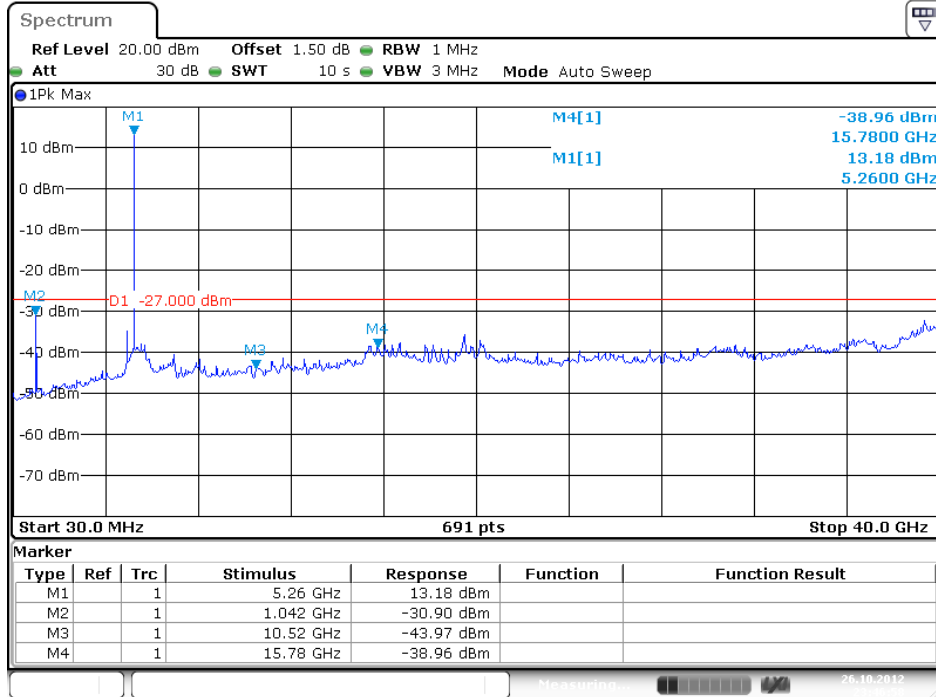

Date: 26.OCT.2012 23:46:58


**Transmitter Conducted Unwanted Emissions Plot on 5260 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0**

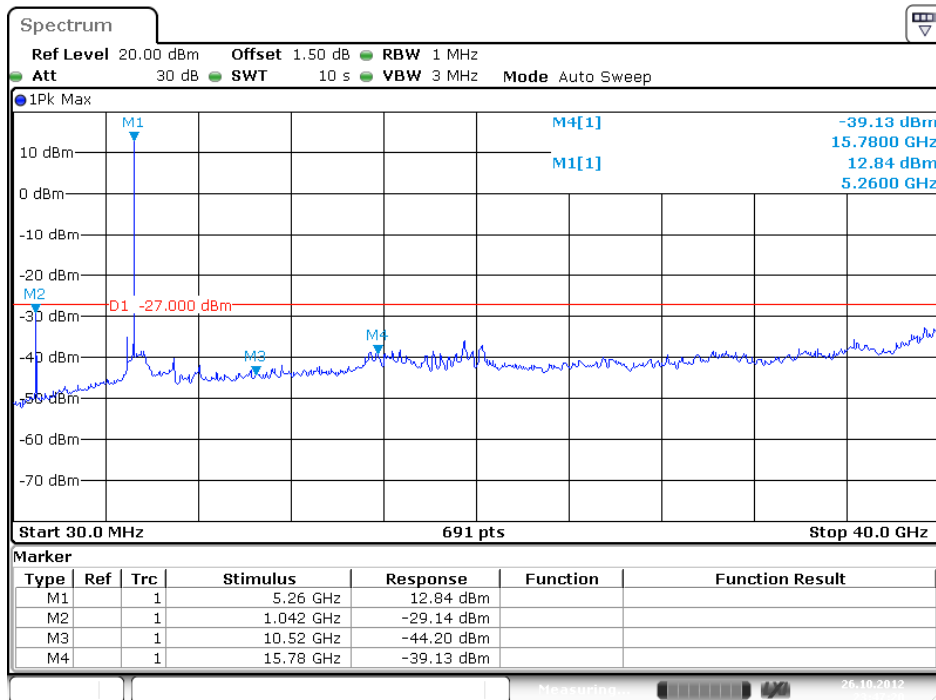


Date: 26.OCT.2012 23:47:20



Transmitter Conducted Unwanted Emissions Plot on 5260 MHz, HT-20, Beam Forming, M8

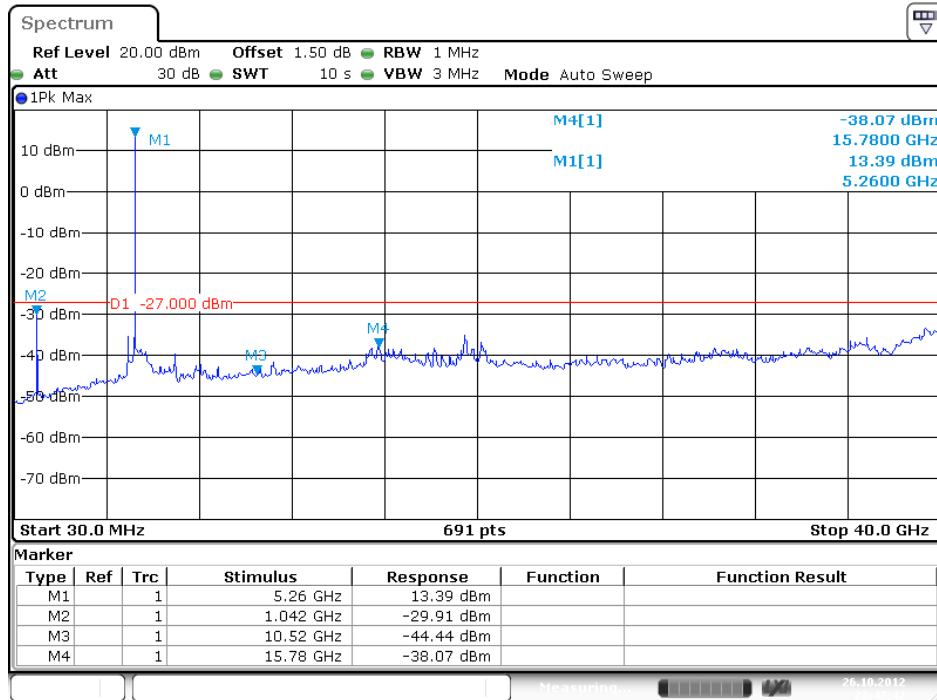


Transmitter Conducted Unwanted Emissions Plot on 5300 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

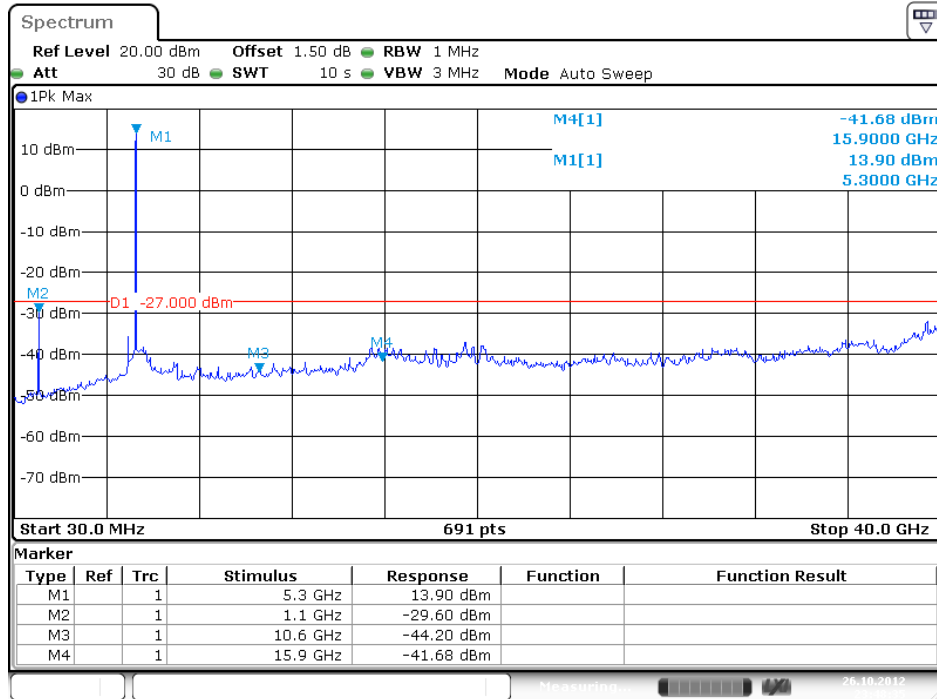




Transmitter Conducted Unwanted Emissions Plot on 5300 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0

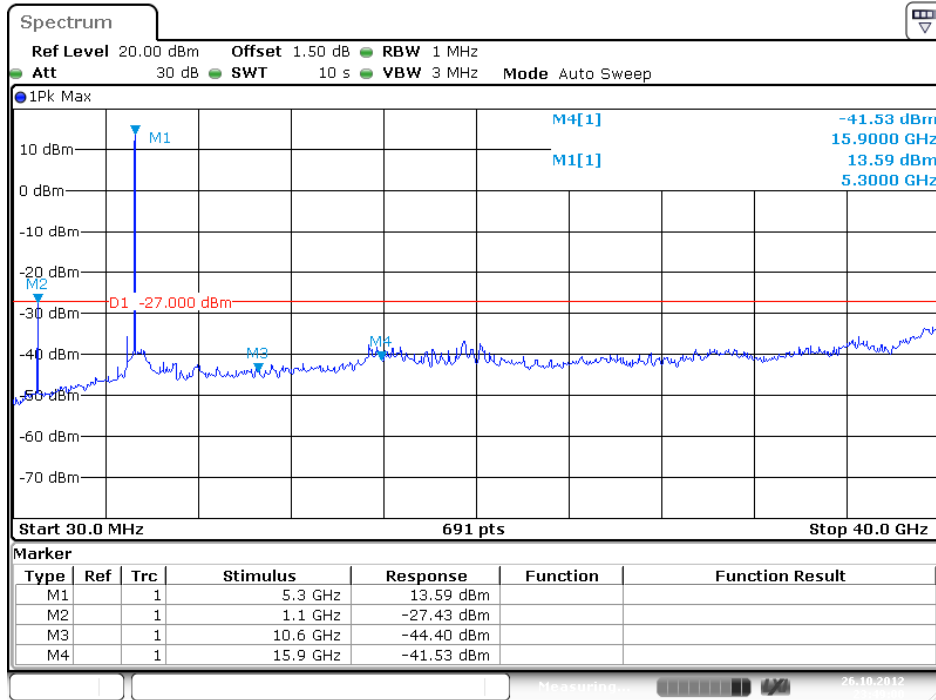

Date: 26.OCT.2012 23:49:00


Transmitter Conducted Unwanted Emissions Plot on 5300 MHz, HT-20, Beam Forming, M8

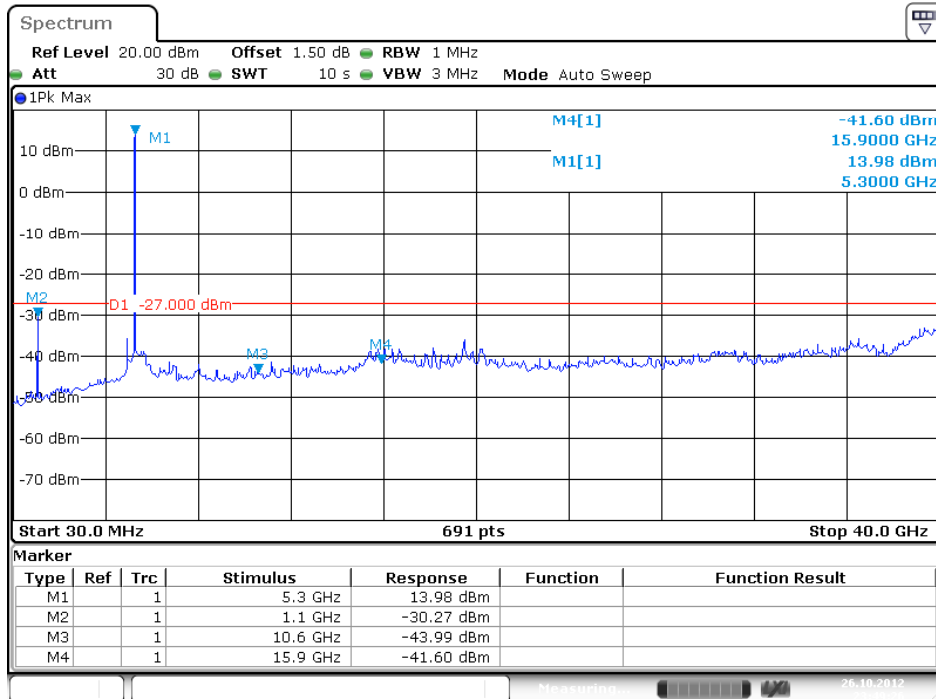


Date: 26.OCT.2012 23:49:26



**Transmitter Conducted Unwanted Emissions Plot on 5320 MHz,
Non HT-20 / Non HT-20, Beam Forming, 6Mbps**

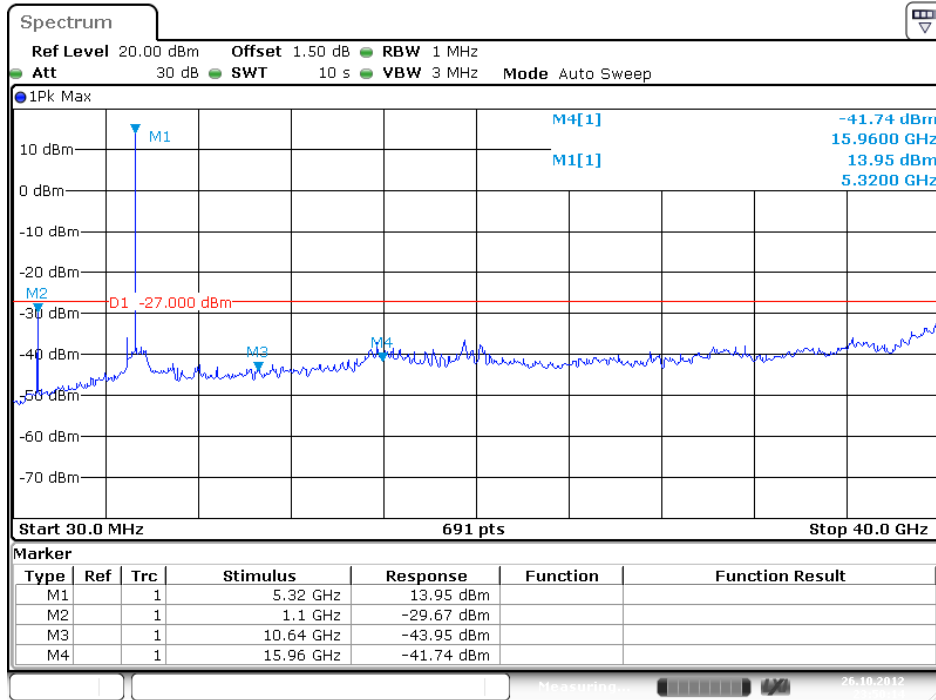


**Transmitter Conducted Unwanted Emissions Plot on 5320 MHz,
HT-20 / HT-20, STBC / HT-20, Beam Forming, M0**

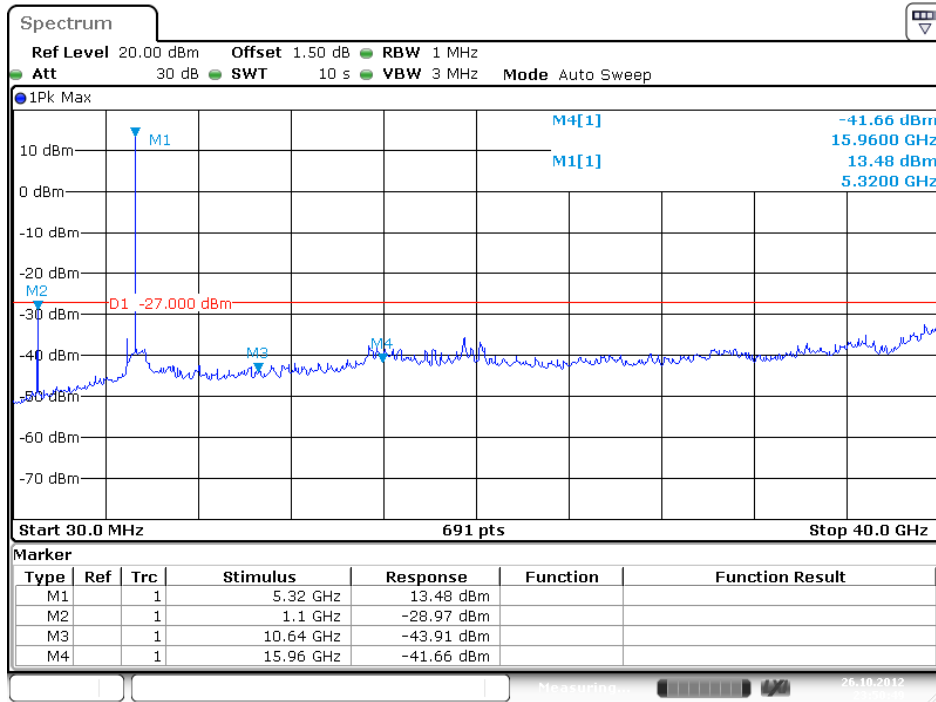




Transmitter Conducted Unwanted Emissions Plot on 5320 MHz, HT-20, Beam Forming, M8

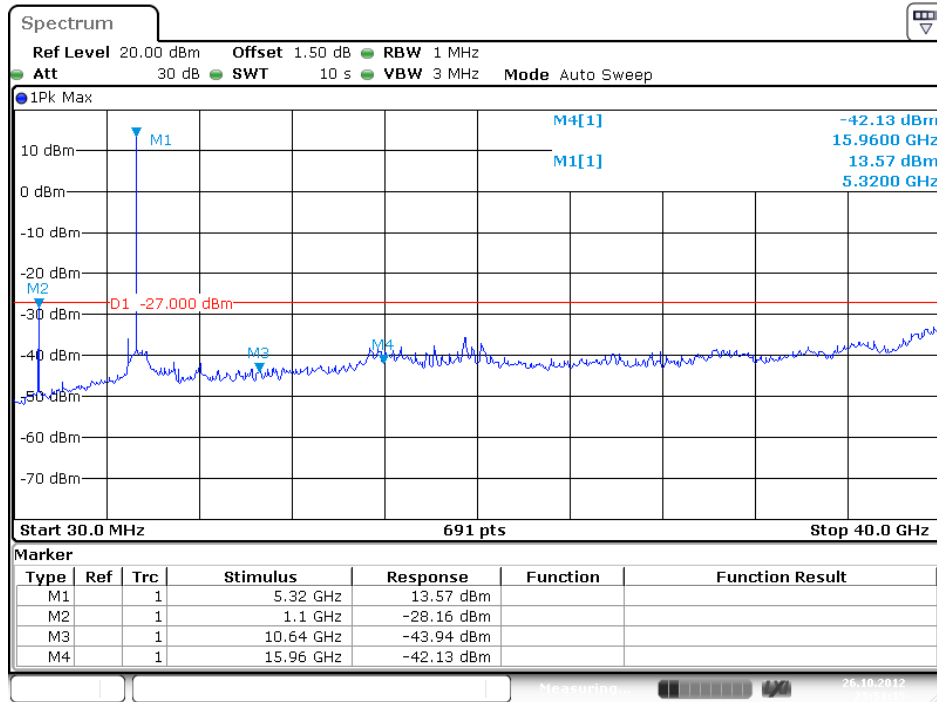


Transmitter Conducted Unwanted Emissions Plot on 5270 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0

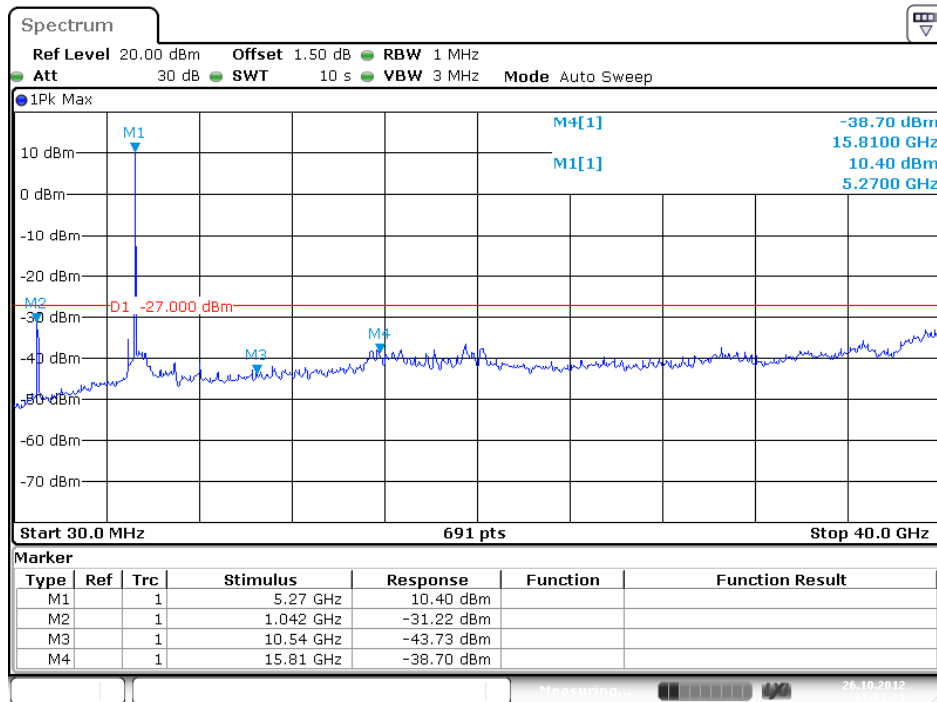




Transmitter Conducted Unwanted Emissions Plot on 5270 MHz, HT-40, Beam Forming, M8

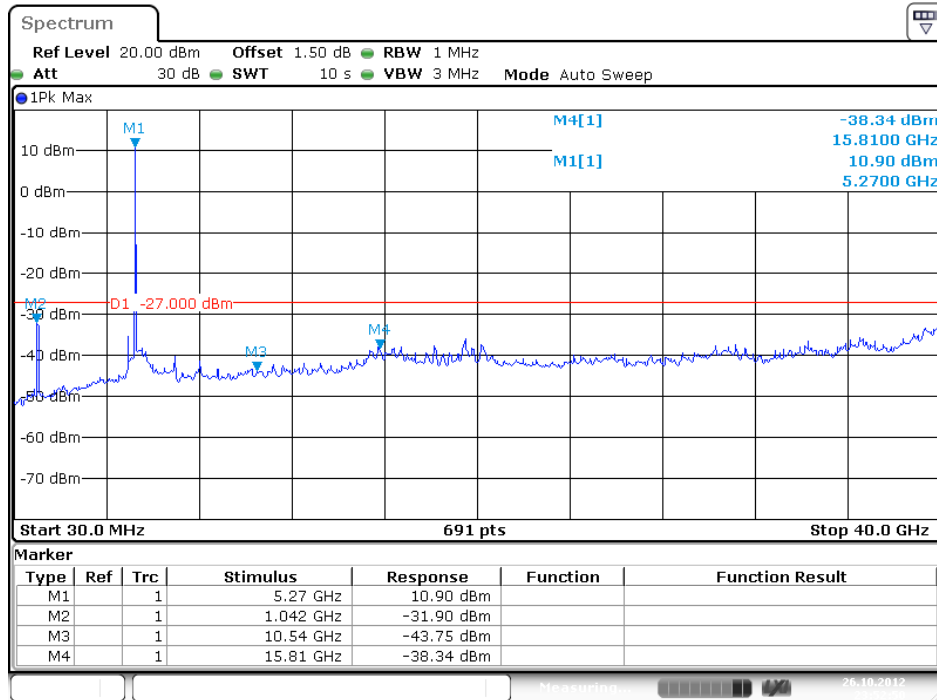

Date: 26.OCT.2012 23:52:50


Transmitter Conducted Unwanted Emissions Plot on 5310 MHz, HT-40, M0

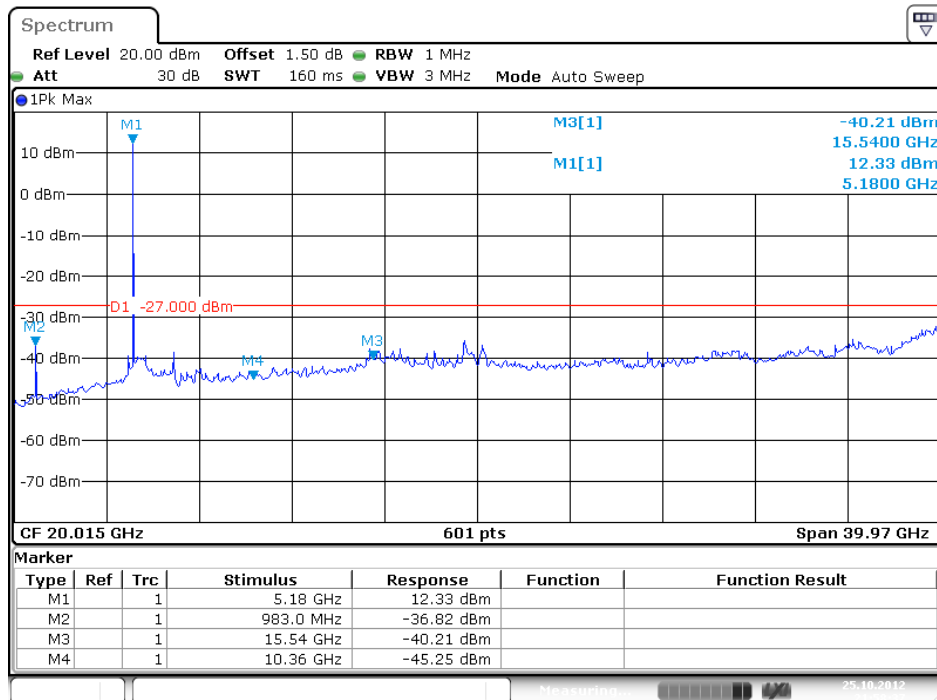

Date: 25.OCT.2012 21:58:38




**Transmitter Conducted Unwanted Emissions Plot on 5310 MHz,
HT-40 / HT-40, STBC / HT-40, Beam Forming, M0**

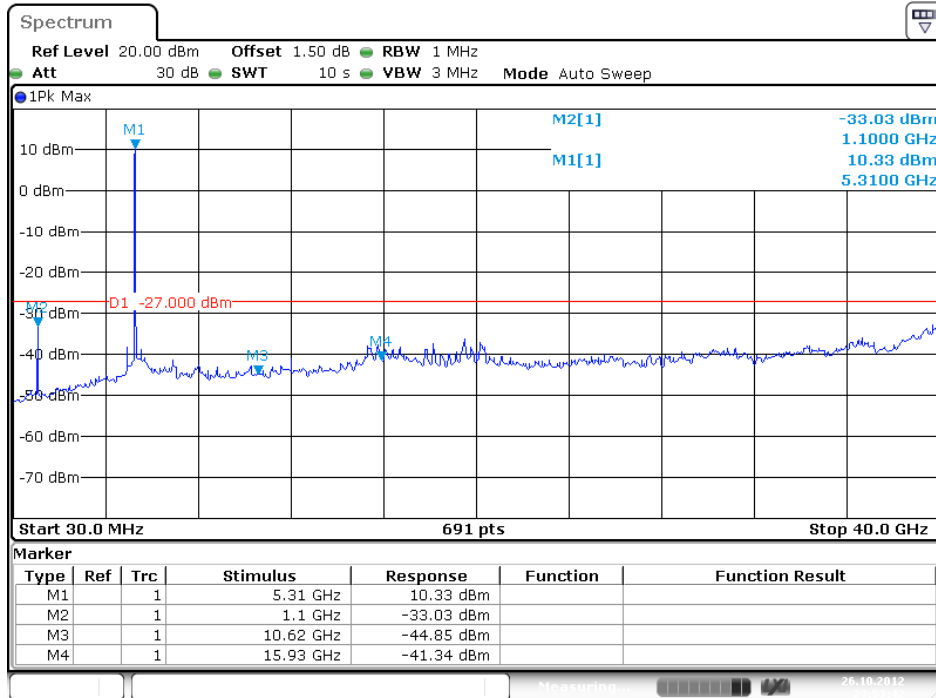

Date: 26.OCT.2012 23:53:42

Transmitter Conducted Unwanted Emissions Plot on 5310 MHz, HT-40, Beam Forming, M8

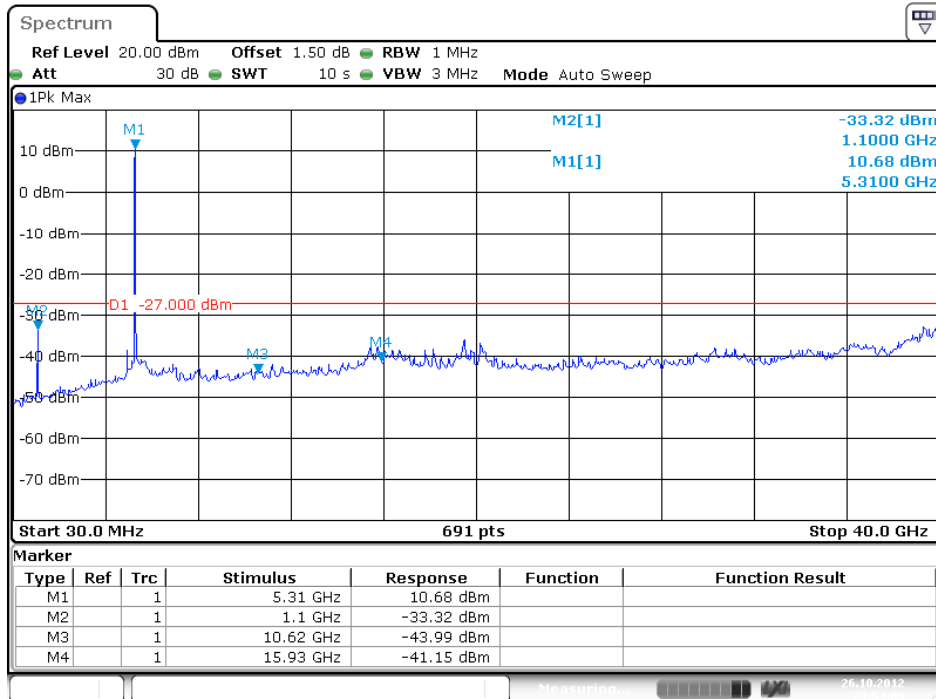

Date: 26.OCT.2012 23:54:09

3.8 Transmitter Radiated Unwanted Emissions

3.8.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

3.8.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.8.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 1 GHz - 40GHz are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty \geq 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.8.4 Test Setup

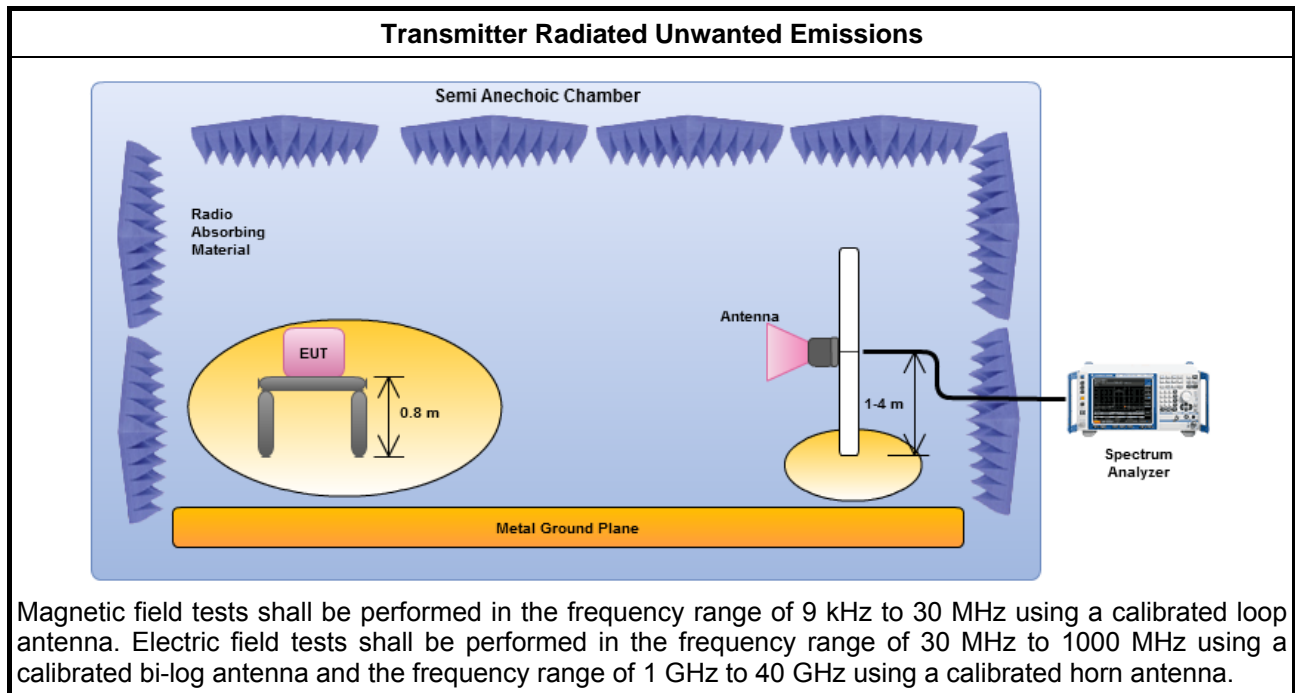


3.8.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.8.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

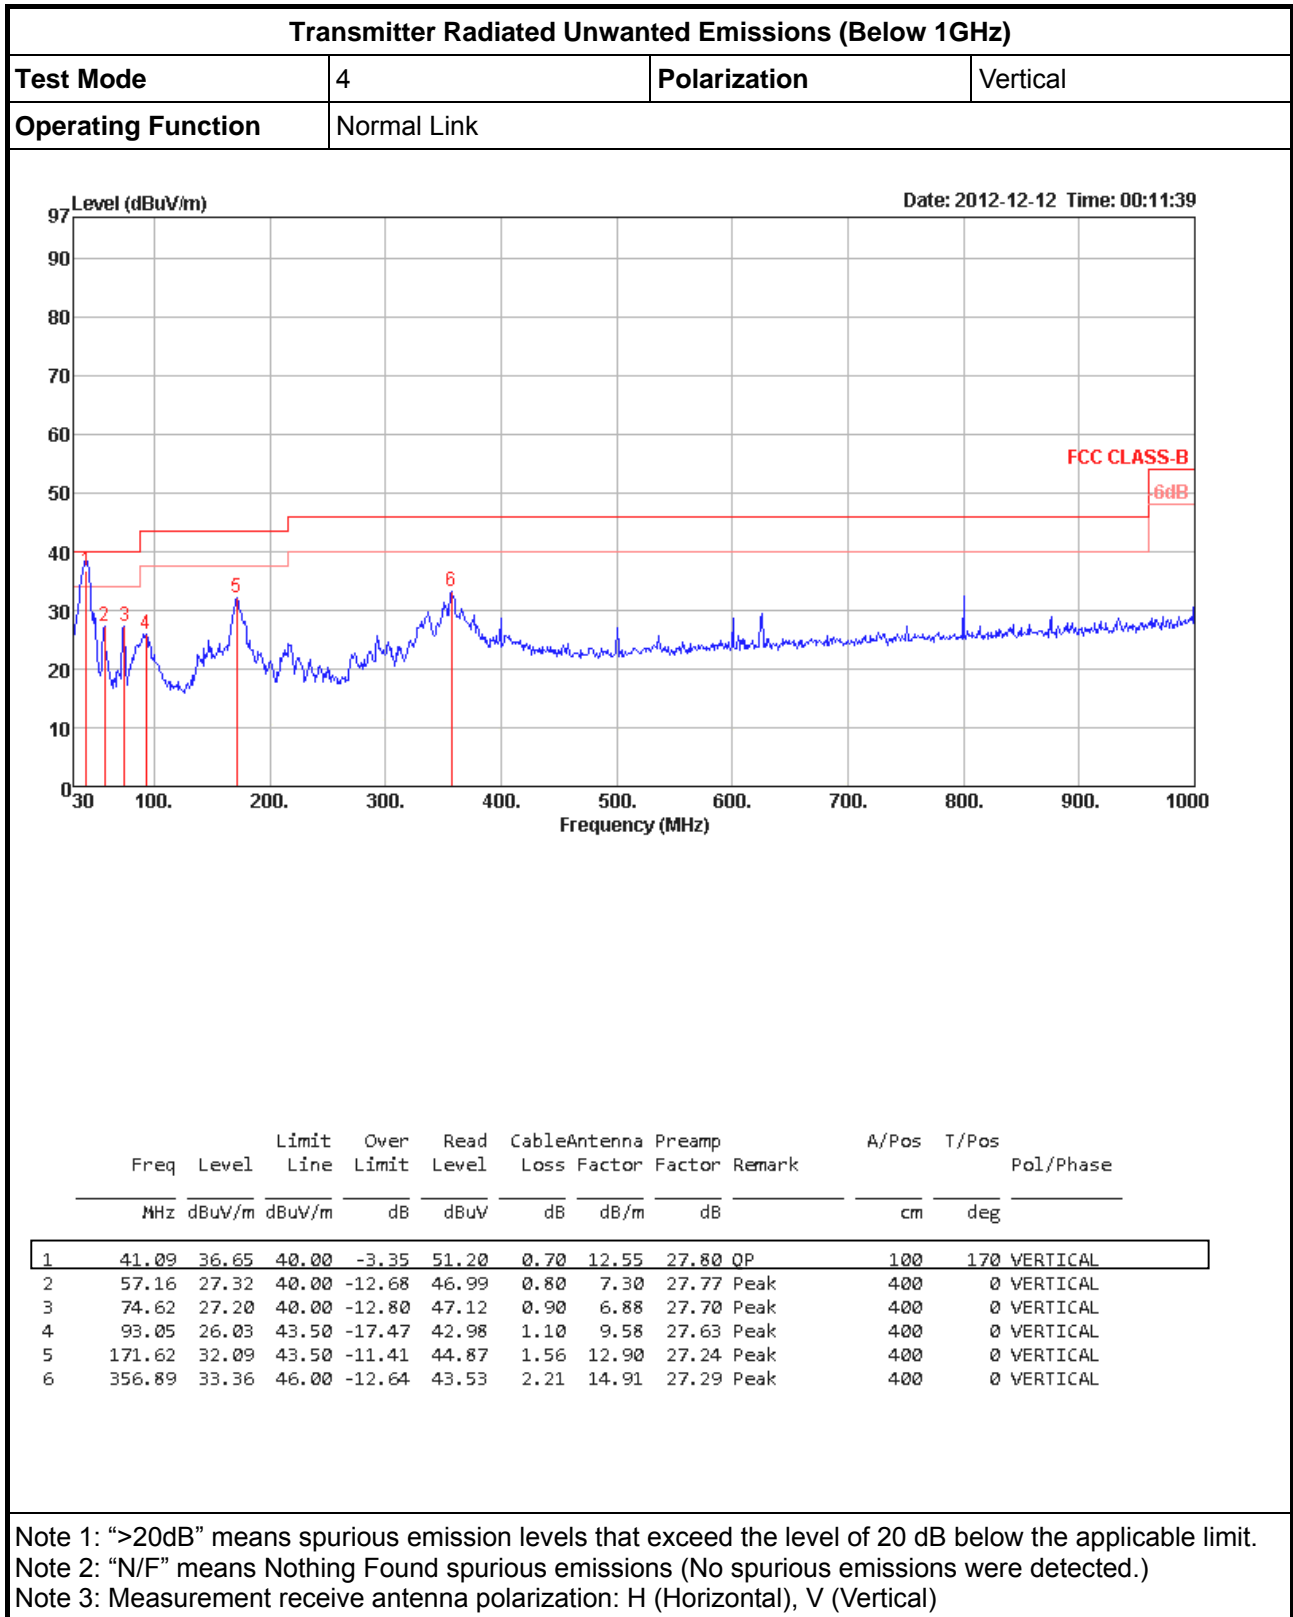



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Test Mode	4	Polarization	Horizontal
Operating Function	Normal Link		

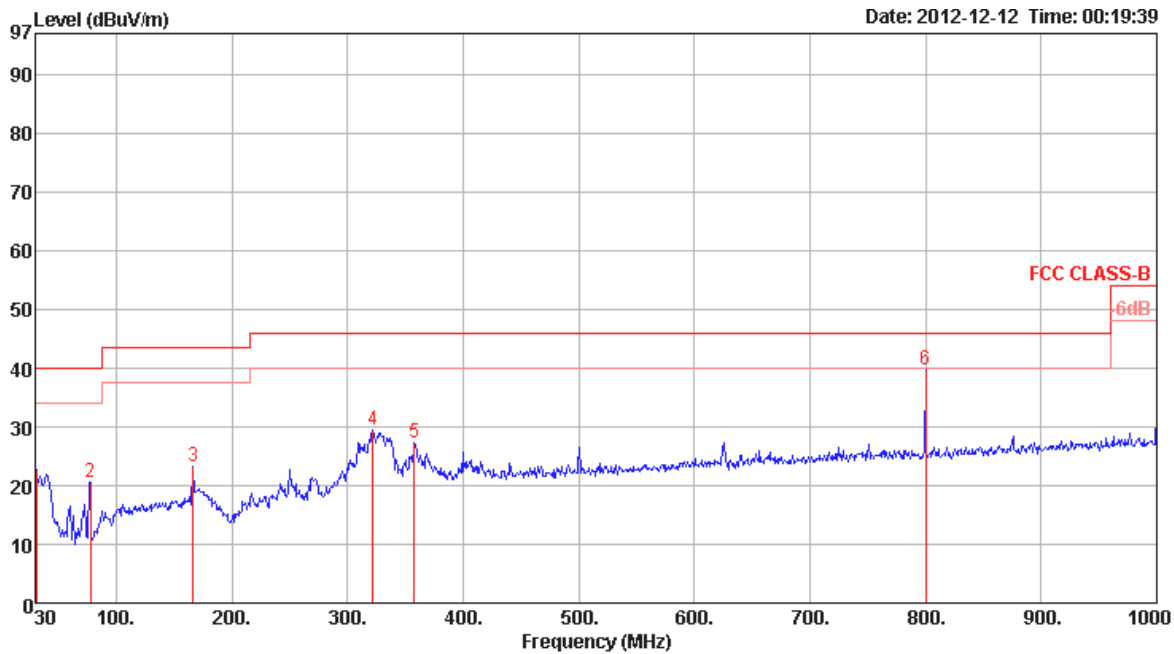

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.97	22.61	40.00	-17.39	31.69	0.50	18.22	27.80	Peak	100	0	HORIZONTAL
2	77.53	20.55	40.00	-19.45	40.21	1.00	7.03	27.69	Peak	100	0	HORIZONTAL
3	166.77	23.34	43.50	-20.16	36.54	1.53	12.54	27.27	Peak	100	0	HORIZONTAL
4	321.97	29.56	46.00	-16.44	40.51	2.14	13.96	27.05	Peak	100	0	HORIZONTAL
5	357.86	27.37	46.00	-18.63	37.52	2.22	14.93	27.30	Peak	100	0	HORIZONTAL
6	800.18	39.69	46.00	-6.31	44.22	3.30	19.77	27.60	Peak	100	0	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.8.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions Result - Average

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Spurious Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	6	45.67	54	8.33
	Non HT-20, Beam Forming, 6 to 54Mbps	6	45.67	54	8.33
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	45.67	54	8.33
	HT-20, Beam Forming, M0 to M7	M0	45.67	54	8.33
	HT-20, Beam Forming, M8 to M15	M8	45.67	54	8.33
5300	Non HT-20, 6 to 54Mbps	6	46.29	54	7.71
	Non HT-20, Beam Forming, 6 to 54Mbps	6	46.29	54	7.71
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	46.29	54	7.71
	HT-20, Beam Forming, M0 to M7	M0	46.29	54	7.71
	HT-20, Beam Forming, M8 to M15	M8	46.29	54	7.71
5320	Non HT-20, 6 to 54Mbps	6	48.53	54	5.47
	Non HT-20, Beam Forming, 6 to 54Mbps	6	48.53	54	5.47
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	48.53	54	5.47
	HT-20, Beam Forming, M0 to M7	M0	48.53	54	5.47
	HT-20, Beam Forming, M8 to M15	M8	48.53	54	5.47
5270	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	45.88	54	8.12
	HT-40, Beam Forming, M0 to M7	M0	45.88	54	8.12
	HT-40, Beam Forming, M8 to M15	M8	45.88	54	8.12
5310	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	45.89	54	8.11
	HT-40, Beam Forming, M0 to M7	M0	45.89	54	8.11
	HT-40, Beam Forming, M8 to M15	M8	45.89	54	8.11




Transmitter Radiated Unwanted Emissions Result - Peak

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Spurious Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5260	Non HT-20, 6 to 54Mbps	6	57.6	74	16.4
	Non HT-20, Beam Forming, 6 to 54Mbps	6	57.6	74	16.4
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	57.6	74	16.4
	HT-20, Beam Forming, M0 to M7	M0	57.6	74	16.4
	HT-20, Beam Forming, M8 to M15	M8	57.6	74	16.4
5300	Non HT-20, 6 to 54Mbps	6	59.79	74	14.21
	Non HT-20, Beam Forming, 6 to 54Mbps	6	59.79	74	14.21
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	59.79	74	14.21
	HT-20, Beam Forming, M0 to M7	M0	59.79	74	14.21
	HT-20, Beam Forming, M8 to M15	M8	59.79	74	14.21
5320	Non HT-20, 6 to 54Mbps	6	58.49	74	15.51
	Non HT-20, Beam Forming, 6 to 54Mbps	6	58.49	74	15.51
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	58.49	74	15.51
	HT-20, Beam Forming, M0 to M7	M0	58.49	74	15.51
	HT-20, Beam Forming, M8 to M15	M8	58.49	74	15.51
5270	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	57.56	74	16.44
	HT-40, Beam Forming, M0 to M7	M0	57.56	74	16.44
	HT-40, Beam Forming, M8 to M15	M8	57.56	74	16.44
5310	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	55.41	74	18.59
	HT-40, Beam Forming, M0 to M7	M0	55.41	74	18.59
	HT-40, Beam Forming, M8 to M15	M8	55.41	74	18.59




Transmitter Radiated Unwanted Emissions Worst Plots (Above 1GHz)

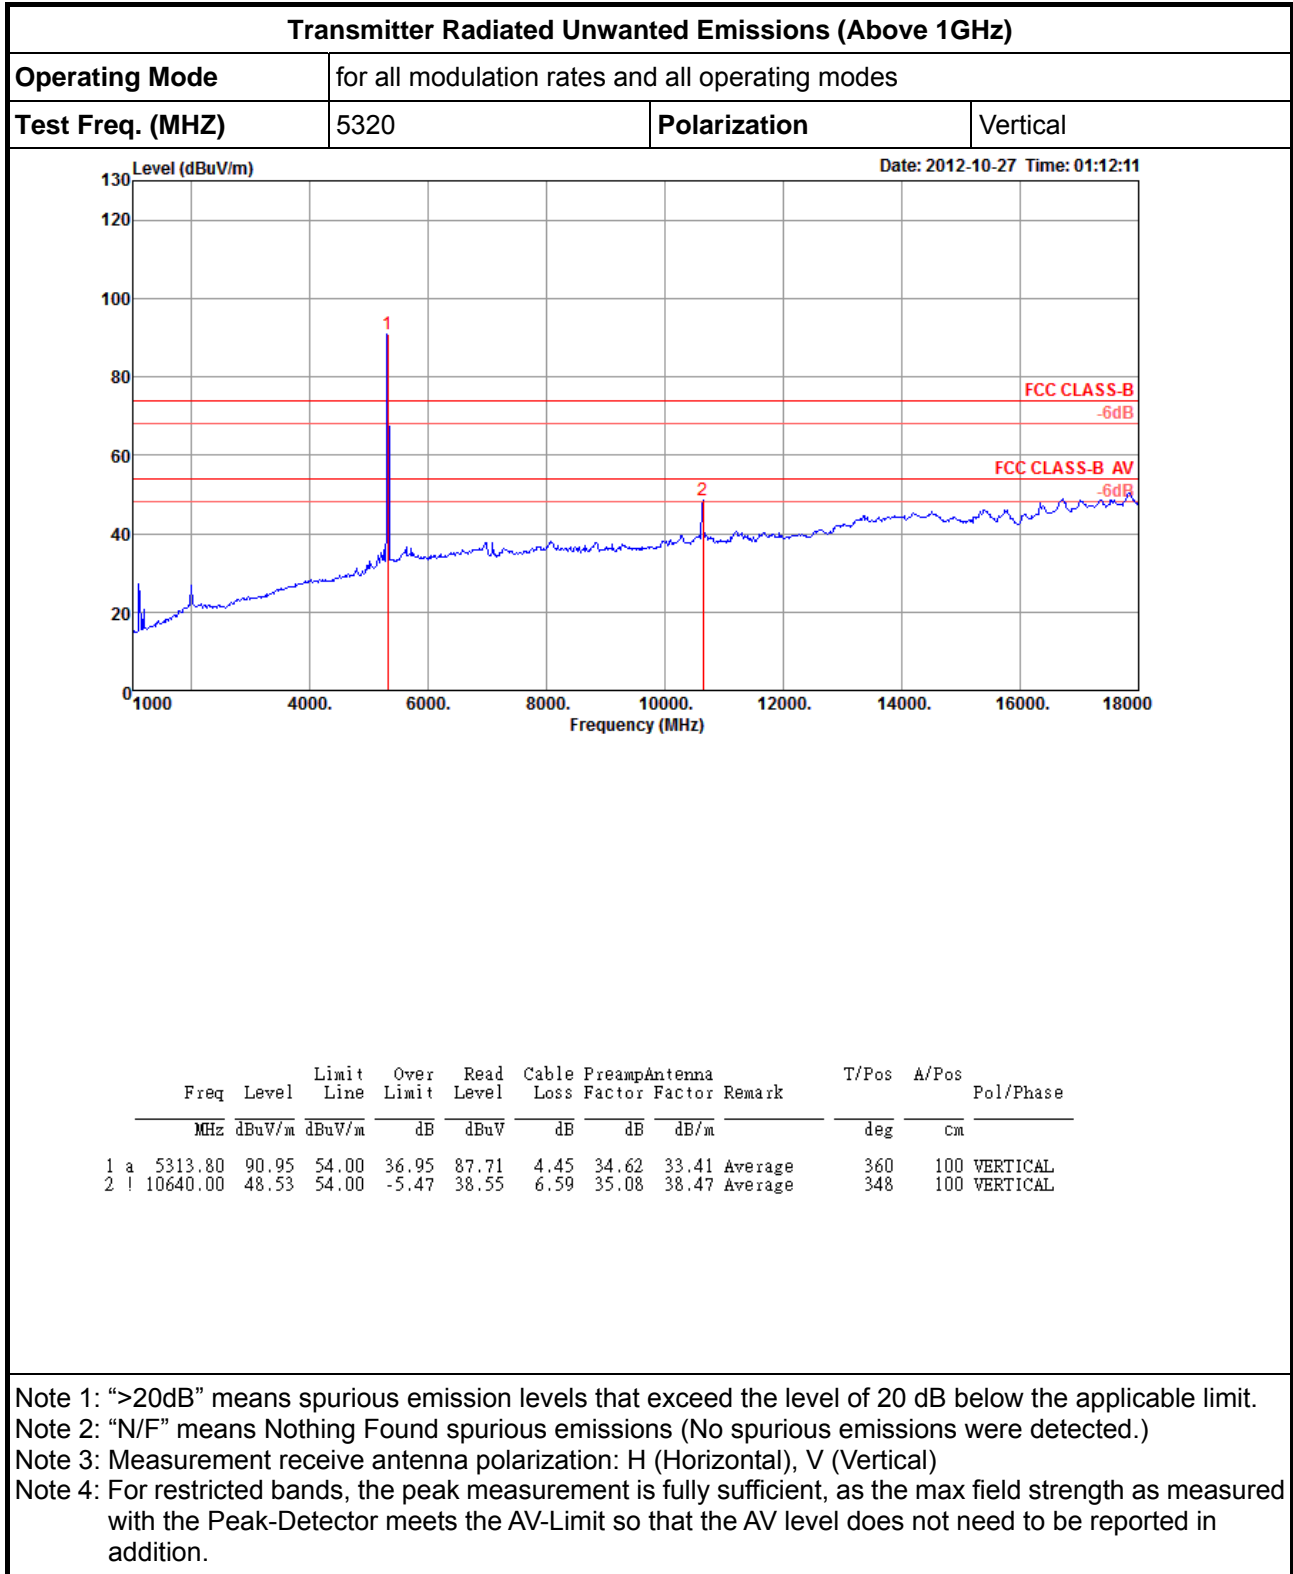



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	for all modulation rates and all operating modes		
Test Freq. (MHZ)	5320	Polarization	Horizontal

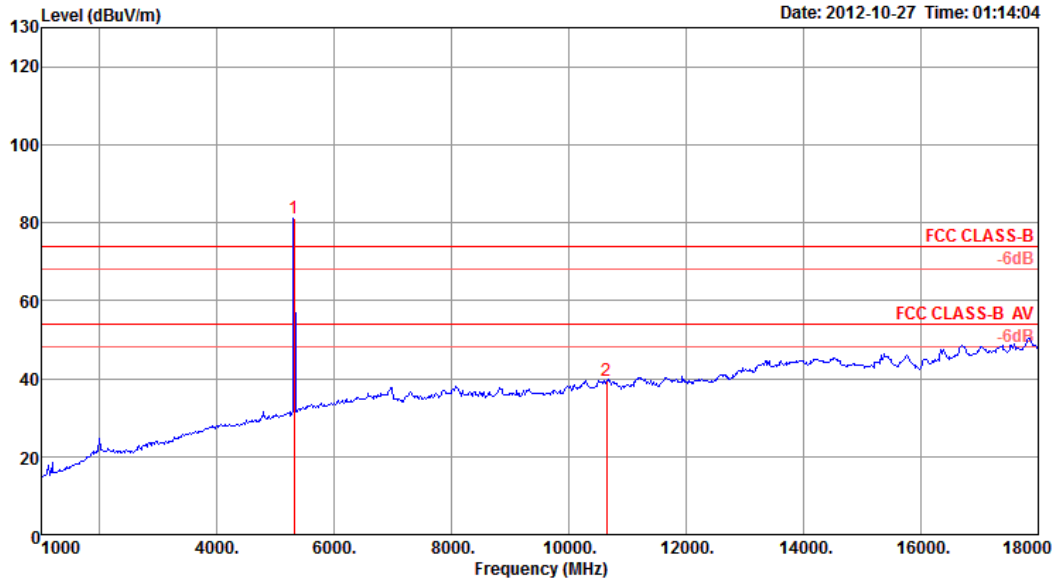


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	5313.80	80.98	54.00	26.98	77.74	4.45	34.62	33.41	Average	0	100	HORIZONTAL
2	10640.00	39.30	54.00	-14.70	29.32	6.59	35.08	38.47	Average	55	100	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	for all modulation rates and all operating modes		
Test Freq. (MHZ)	5320	Polarization	Vertical

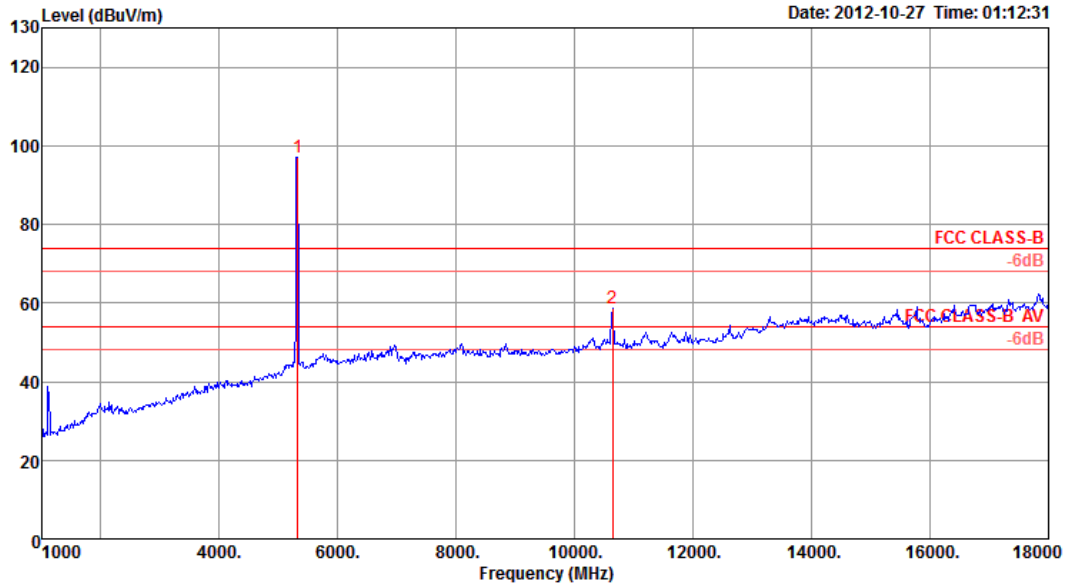


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	5322.30	96.97	74.00	22.97	93.73	4.45	34.62	33.41	Peak	360	100	VERTICAL
2	10640.00	58.49	74.00	-15.51	48.51	6.59	35.08	38.47	Peak	348	100	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	for all modulation rates and all operating modes		
Test Freq. (MHZ)	5320	Polarization	Horizontal

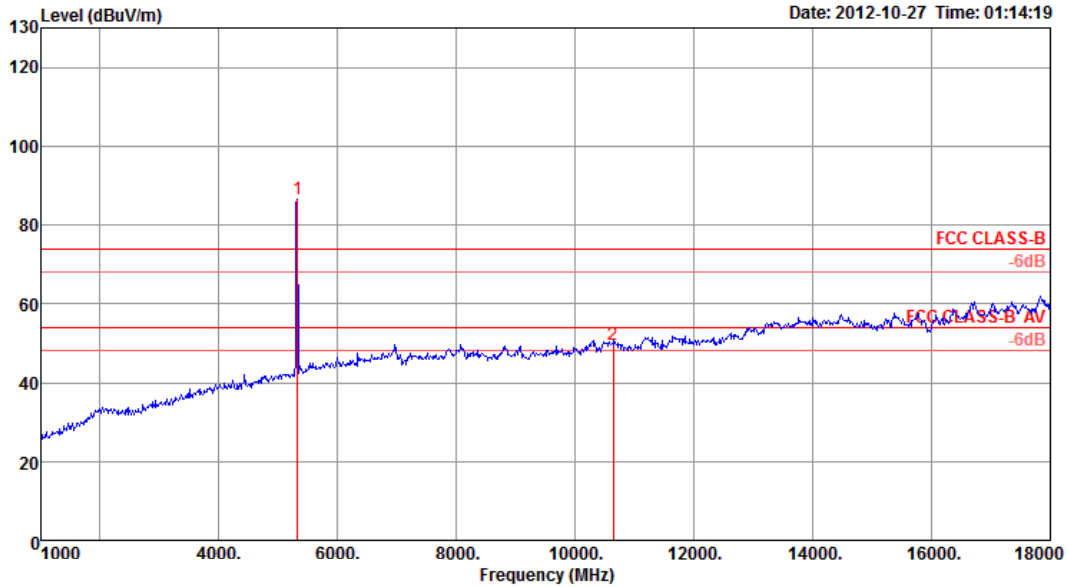

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	P 5322.30	86.46	74.00	12.46	83.22	4.45	34.62	33.41	Peak	0	100	HORIZONTAL
2	10640.00	49.72	74.00	-24.28	39.74	6.59	35.08	38.47	Peak	55	100	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.9 Frequency Stability

3.9.1 Frequency Stability Limit

Frequency Stability Limit	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.9.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.9.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.9.4 Test Setup

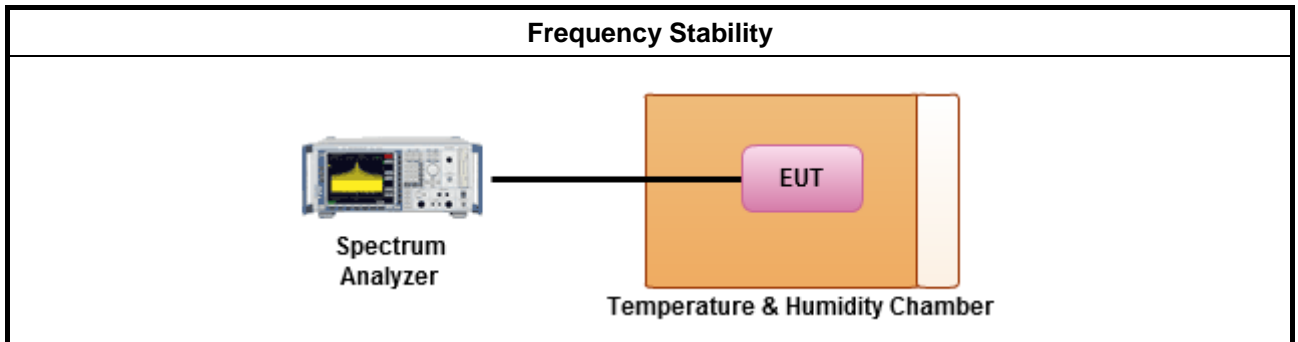



3.9.5 Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5300
126.5	5300.005600
110	5300.005200
93.5	5300.006400
Max. Deviation (MHz)	0.006400
Max. Deviation (ppm)	1.21

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5300
-30	5300.003800
-20	5300.005600
-10	5300.004200
0	5300.006000
10	5300.005800
20	5300.004200
30	5300.002400
40	5300.003200
50	5300.005400
Max. Deviation (MHz)	0.006000
Max. Deviation (ppm)	1.13



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N.C.R.	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N.C.R.	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N.C.R.	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEA K	BBHA 9170	BBHA91702 52	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9KHz ~ 1.3GHz	Feb. 17, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 02, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Oct. 29, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Remark
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.
N.C.R. means Non-Calibration required.

APPENDIX A. TEST PHOTOS

1. Photographs of Conducted Emissions Test Configuration

FRONT VIEW



REAR VIEW



2. Photographs of Radiated Emissions Test Configuration

Test Configuration: 9kHz ~30MHz

FRONT VIEW



REAR VIEW



Test Configuration: 30MHz~1GHz

FRONT VIEW



REAR VIEW




Test Configuration: Above 1GHz

FRONT VIEW



REAR VIEW

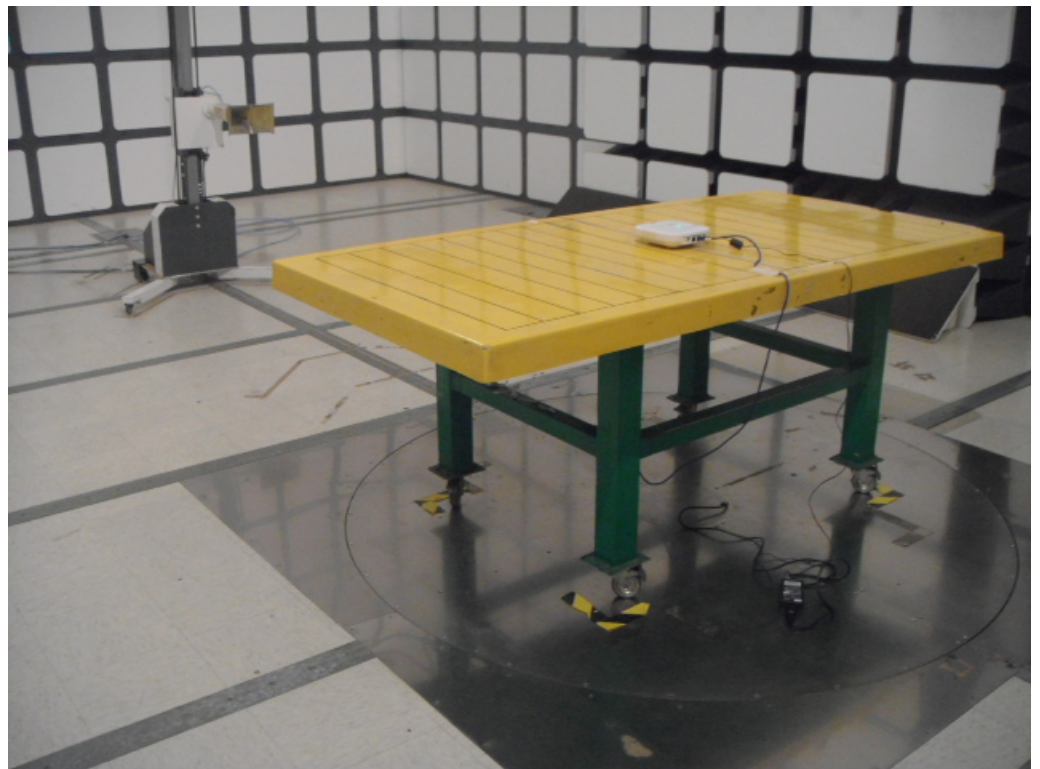

APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE

1. Maximum Permissible Exposure

1.1. Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 and RSS-102 Issue 4 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

1.2. MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Average RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

1.3. Calculated Result and Limit

For 2.4GHz DTS:

Antenna Type : PIFA

Max Conducted Power for Non HT-20, Beam Forming, 6Mbps: 20.42 dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
6.01	3.9905	20.42	110.0611	0.087421	1	Complies

Note: Directional Antenna Gain = $G_{ANT} + 10 \log(N_{TX})$

For 5GHz DTS Band 4:

Antenna Type : PIFA

Max Conducted Power for HT-40, Beam Forming, M0: 20.73dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
8.01	6.3246	20.73	118.2746	0.148892	1	Complies

Note: Directional Antenna Gain = $G_{ANT} + 10 \log(N_{TX})$

For 5GHz UNII Band 1:

Antenna Type : PIFA

Max Conducted Power for HT-20, Beam Forming, M0 : 14.08dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
8.01	6.3246	14.08	25.5805	0.032202	1	Complies

Note: Directional Antenna Gain = $G_{ANT} + 10 \log(N_{TX})$

For 5GHz UNII Band 2:

Antenna Type : PIFA

Max Conducted Power for HT-20, Beam Forming, M0 : 20.23dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
8.01	6.3246	20.23	105.5306	0.132849	1	Complies

Note: Directional Antenna Gain = $G_{ANT} + 10 \log(N_{TX})$

For 5GHz UNII Band 3:

Antenna Type : PIFA

Max Conducted Power for HT-40, Beam Forming, M0 : 21.99dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
8.01	6.3246	21.99	158.1139	0.199045	1	Complies

Note: Directional Antenna Gain = $G_{ANT} + 10 \log(N_{TX})$

CONCLUSION:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density


Therefore, the worst-case situation is $0.087421 / 1 + 0.199045 / 1 = 0.286466$, which is less than "1". This confirmed that the device comply with FCC 1.1310 MPE limit.

Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	60%
Test Engineer	Satoshi Yang	Configurations	2.4G + 5G

Horizontal

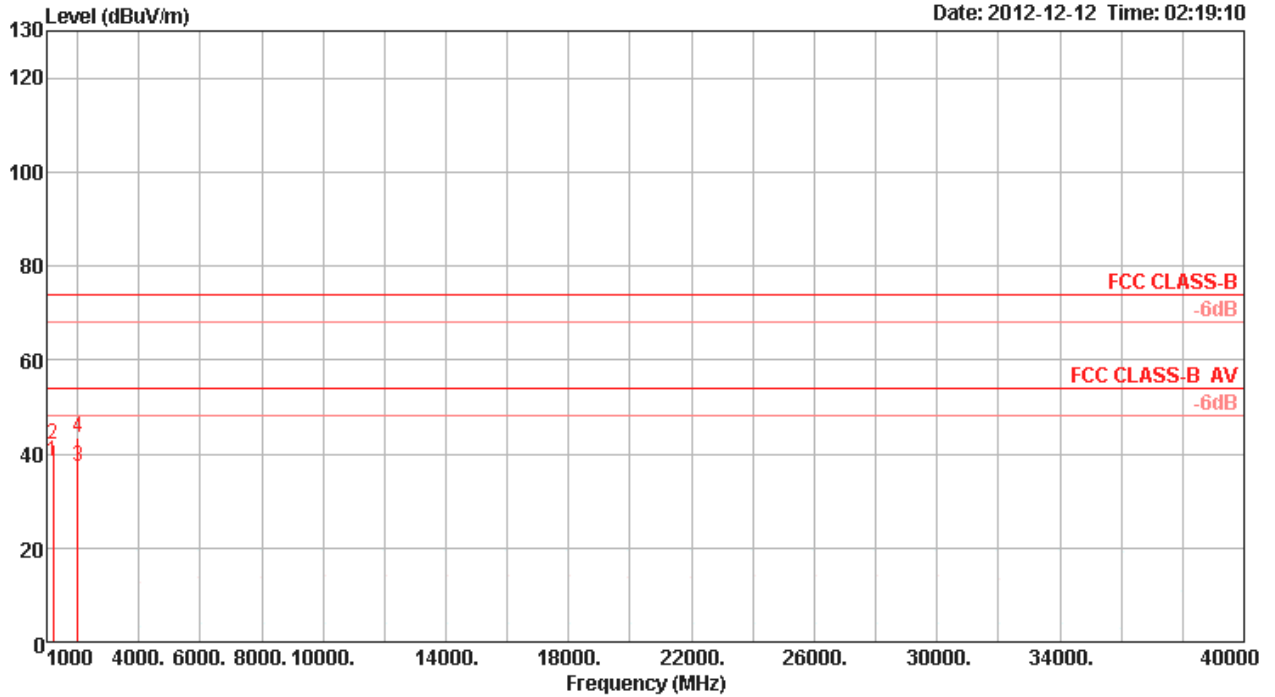

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1199.98	38.35	54.00	-15.65	45.21	3.02	24.64	34.52	Average	120	245	HORIZONTAL
2	1200.05	41.89	74.00	-32.11	48.75	3.02	24.64	34.52	Peak	120	245	HORIZONTAL
3	1999.99	37.43	54.00	-16.57	41.22	4.01	27.10	34.90	Average	144	57	HORIZONTAL
4	2000.09	43.36	74.00	-30.64	47.15	4.01	27.10	34.90	Peak	144	57	HORIZONTAL

Vertical

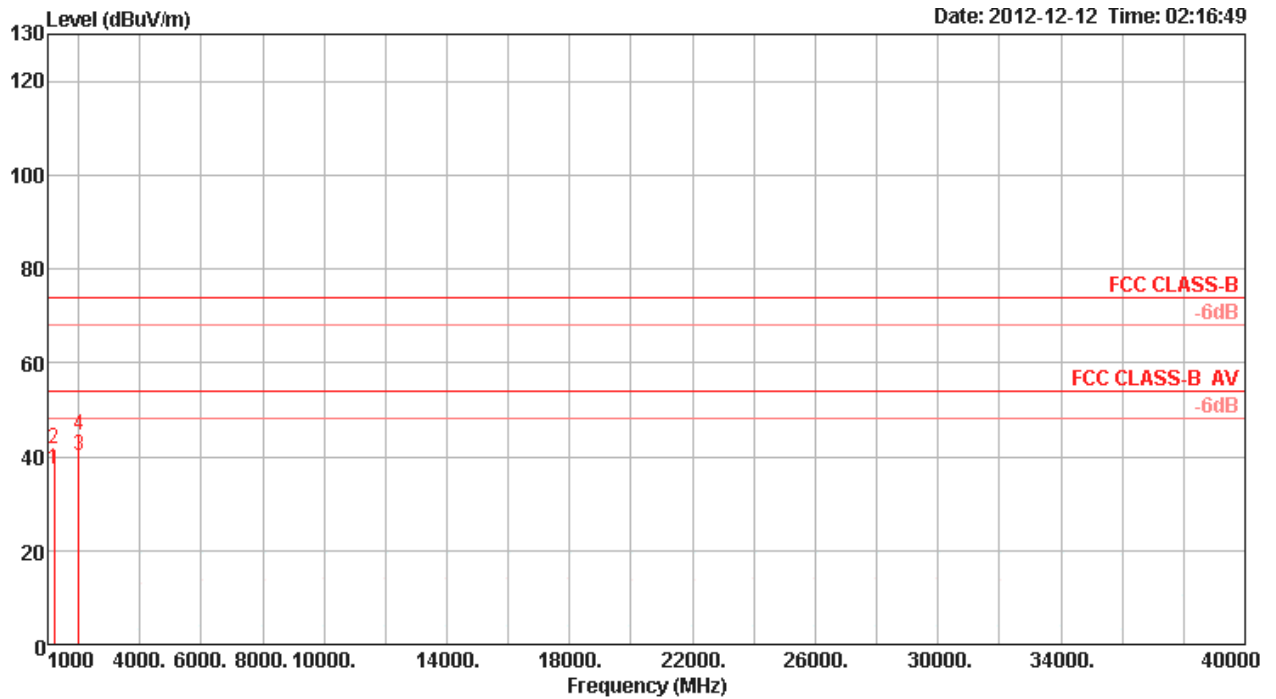

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1199.99	37.28	54.00	-16.72	44.14	3.02	24.64	34.52	Average	100	120	VERTICAL
2	1200.00	41.60	74.00	-32.40	48.46	3.02	24.64	34.52	Peak	100	120	VERTICAL
3	2000.00	40.03	54.00	-13.97	43.82	4.01	27.10	34.90	Average	108	10	VERTICAL
4	2000.20	44.40	74.00	-29.60	48.19	4.01	27.10	34.90	Peak	108	10	VERTICAL