

FCC TEST REPORT

FCC ID : LE2G9
Applicant : JSW Pacific Corporation
Address : 3F-3, No.700, Chung-Zheng Road, Chung Ho City Taipei Hsien, Taiwan
Manufacturer : JSW Pacific(China)Co.,Ltd
Address : No 138.Sanjiang Industry District,Hengli Town,Dongguan City,Guangdong province,China

Equipment Under Test (EUT) :

Product Name : Digital Wireless Surveillance System
Model No. : G9/G95/G955/G9555/G95555/G953/G9553

Standards : FCC CFR47 Part 15 Section 15.247:2010

Date of Test : May 28~30, 2013

Date of Issue : June 14, 2013

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,

Shenzhen 518105, China

Tel: +86-755-83551033


Fax: +86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Duty Cycle	15.35	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T.....	5
4.3 TEST FACILITY	5
4.4 TEST LOCATION.....	5
4.5 TEST MODE	6
4.6 CHANNEL LIST	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY.....	7
5.3 TEST EQUIPMENT CALIBRATION.....	7
6 CONDUCTED EMISSION	8
6.1 E.U.T. OPERATION.....	8
6.2 EUT SETUP	8
6.3 CONDUCTED EMISSION TEST RESULT.....	9
7 RADIATED SPURIOUS EMISSIONS.....	11
7.1 EUT OPERATION :	11
7.2 TEST SETUP	12
7.3 SPECTRUM ANALYZER SETUP.....	13
7.4 TEST PROCEDURE.....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.6 SUMMARY OF TEST RESULTS	15
8 DUTY CYCLE.....	25
8.1 TEST PROCEDURE.....	25
8.2 TEST RESULT	25
9 BAND EDGE MEASUREMENT	27
9.1 TEST RESULT:	28
10 20 DB BANDWIDTH MEASUREMENT	36
10.1 TEST PROCEDURE:	36
10.2 TEST RESULT:.....	36
11 MAXIMUM PEAK OUTPUT POWER	38
11.1 TEST PROCEDURE:	38
11.2 TEST RESULT:.....	38
12 HOPPING CHANNEL SEPARATION	41
12.1 TEST PROCEDURE:	41
12.2 TEST RESULT:.....	41
13 NUMBER OF HOPPING FREQUENCY	44
13.1 TEST PROCEDURE:	44
13.2 TEST RESULT:.....	44
14 DWELL TIME.....	45

14.1	TEST PROCEDURE:	45
14.2	TEST RESULT:	45
15	ANTENNA REQUIREMENT	49
16	RF EXPOSURE	50
16.1	REQUIREMENTS:	50
16.2	TEST RESULT	50
17	PHOTOGRAPHS – TEST SETUP	51
17.1	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP	51
17.2	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP	54
18	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	55
18.1	EXTERNAL VIEW	55
18.2	EUT - INTERNAL VIEW	58
18.3	ADAPTER - VIEW	62
19	FCC LABEL	64

4 General Information

4.1 General Description of E.U.T.

Product Name	: Digital Wireless Surveillance System
Model No.	: G9/G95/G955/G9555/G95555/G953/G9553
Model Difference	: Only the model name is different.
Operation Frequency	: 2414.25MHz ~ 2461.50MHz, 15 channels in total
Type of Modulation	: GFSK
Oscillator	: Crystal 32.768KHz, 10MHz, 18MHz, 24MHz and 25MHz
Antenna installation	: Integrated Antenna
Antenna Gain	: 2 dBi

4.2 Details of E.U.T.

Technical Data	: (1) Battery DC 3.7V 1800mAh (2) DC 5V 1.5A powered by adapter(Ktec) (Input: 100-240~ 50/60Hz 0.4A) (3) DC 5V 1.5A powered by adapter(Csec) (Input: 100-240~ 50/60Hz 0.5A)
Adapter (1)	: Manufacturer: Ktec, M/N: KSAS0120500150HU
Adapter (2)	: Manufacturer: Csec, M/N: CS9C050150FUF
Remark	: This device can use with 2 kinds of adapter optionally. Only the worst data when using with adapter (1) were shown in this report.

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

4.5 Test Mode

Test Item	Test Mode
Conducted Emissions	Continuous Transmitting (adapter)
Radiated Emissions	Continuous Transmitting(adapter)
	Continuous Transmitting (battery)

4.6 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2414.250	2	2417.625	3	2421.000	4	2424.375
5	2427.750	6	2431.125	7	2434.500	8	2437.875
9	2441.250	10	2444.625	11	2448.000	12	2451.375
13	2454.750	14	2458.125	15	2461.500	-	-

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Aug. 13,2012	Aug. 12,2013
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Aug. 13,2012	Aug. 12,2013
3.	Cable	LARGE	RF300	EW02014-3	Aug.14,2012	Aug. 13,2013
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 12,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 12,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr. 20,2013	Apr. 19,2014
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr. 20,2013	Apr. 19,2014
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 12,2013
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07,2013	Apr.06,2014
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 12,2013
8.	Cable	Top	EWO2014-7	-	Apr. 20,2013	Apr. 19,2014
9.	Cable	Top	TYPE16(13M)	-	Aug. 13,2012	Aug. 12,2013

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


EUT Operation:

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

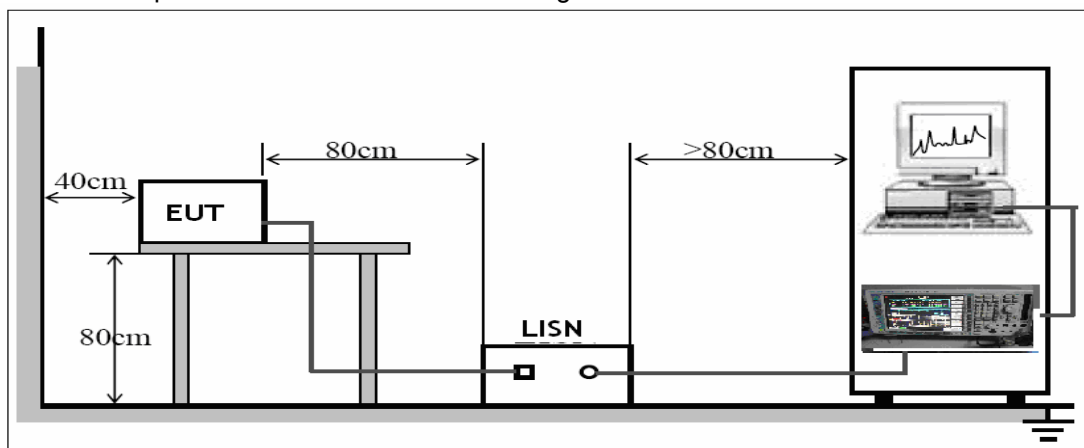


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Mode: Continuous Transmitting

Live line:

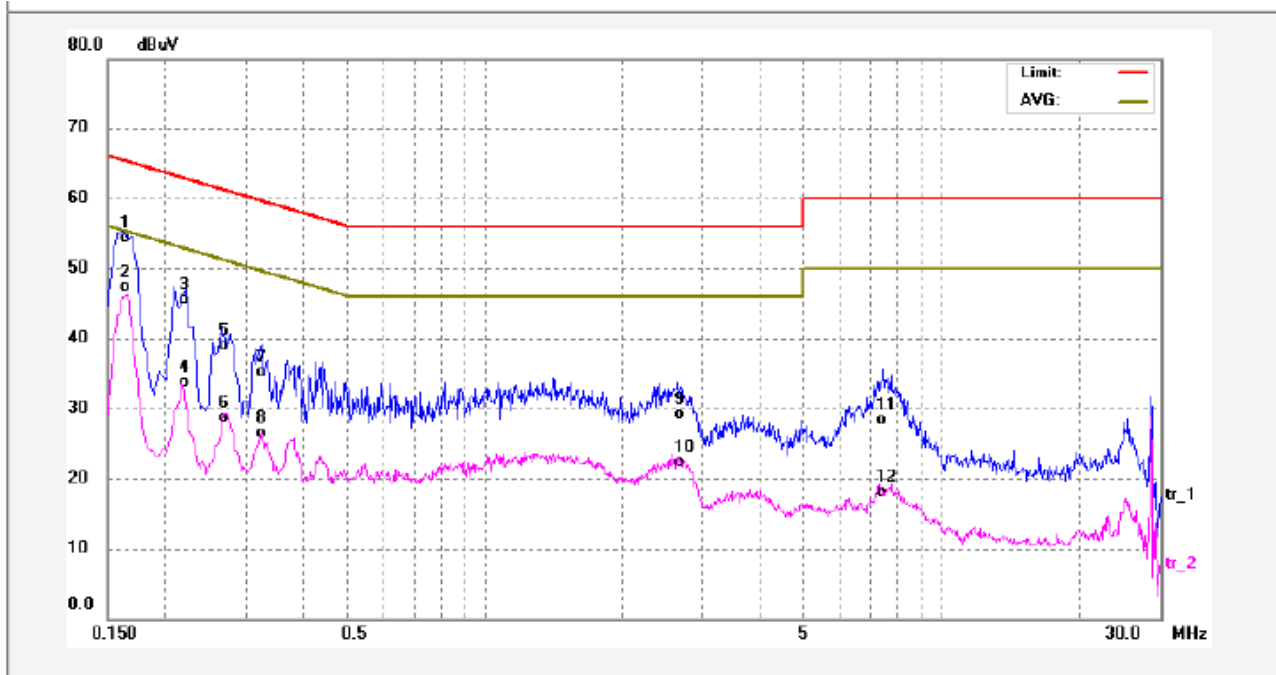

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit dBμV	Margin (dB)	Detector	Remark
1	0.1620	42.39	11.20	53.59	65.36	-11.77	QP	
2	0.1620	35.40	11.20	46.60	55.36	-8.76	AVG	
3	0.2220	33.45	11.30	44.75	62.74	-17.99	QP	
4	0.2220	21.70	11.30	33.00	52.74	-19.74	AVG	
5	0.2660	26.85	11.30	38.15	61.24	-23.09	QP	
6	0.2660	16.51	11.30	27.81	51.24	-23.43	AVG	
7	0.3260	23.01	11.30	34.31	59.55	-25.24	QP	
8	0.3260	14.42	11.30	25.72	49.55	-23.83	AVG	
9	2.6460	17.16	11.21	28.37	56.00	-27.63	QP	
10	2.6460	10.38	11.21	21.59	46.00	-24.41	AVG	
11	7.4580	16.14	11.27	27.41	60.00	-32.59	QP	
12	7.4580	5.94	11.27	17.21	50.00	-32.79	AVG	

Neutral line:

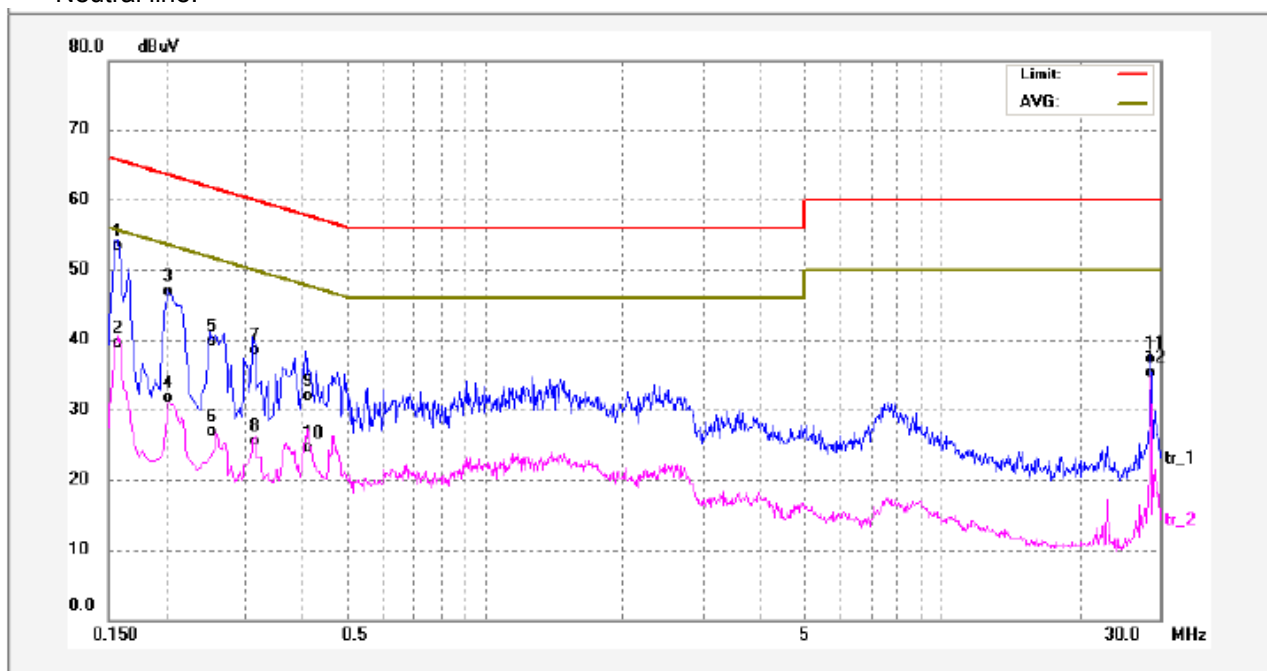

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	41.23	11.19	52.42	65.56	-13.14	QP	
2	0.1580	27.42	11.19	38.61	55.56	-16.95	AVG	
3	0.2020	34.71	11.30	46.01	63.52	-17.51	QP	
4	0.2020	19.68	11.30	30.98	53.52	-22.54	AVG	
5	0.2500	27.70	11.30	39.00	61.75	-22.75	QP	
6	0.2500	14.86	11.30	26.16	51.75	-25.59	AVG	
7	0.3100	26.38	11.30	37.68	59.97	-22.29	QP	
8	0.3100	13.42	11.30	24.72	49.97	-25.25	AVG	
9	0.4060	19.88	11.31	31.19	57.73	-26.54	QP	
10	0.4060	12.33	11.31	23.64	47.73	-24.09	AVG	
11	28.7540	25.11	11.49	36.60	60.00	-23.40	QP	
12	28.7540	23.09	11.49	34.58	50.00	-15.42	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

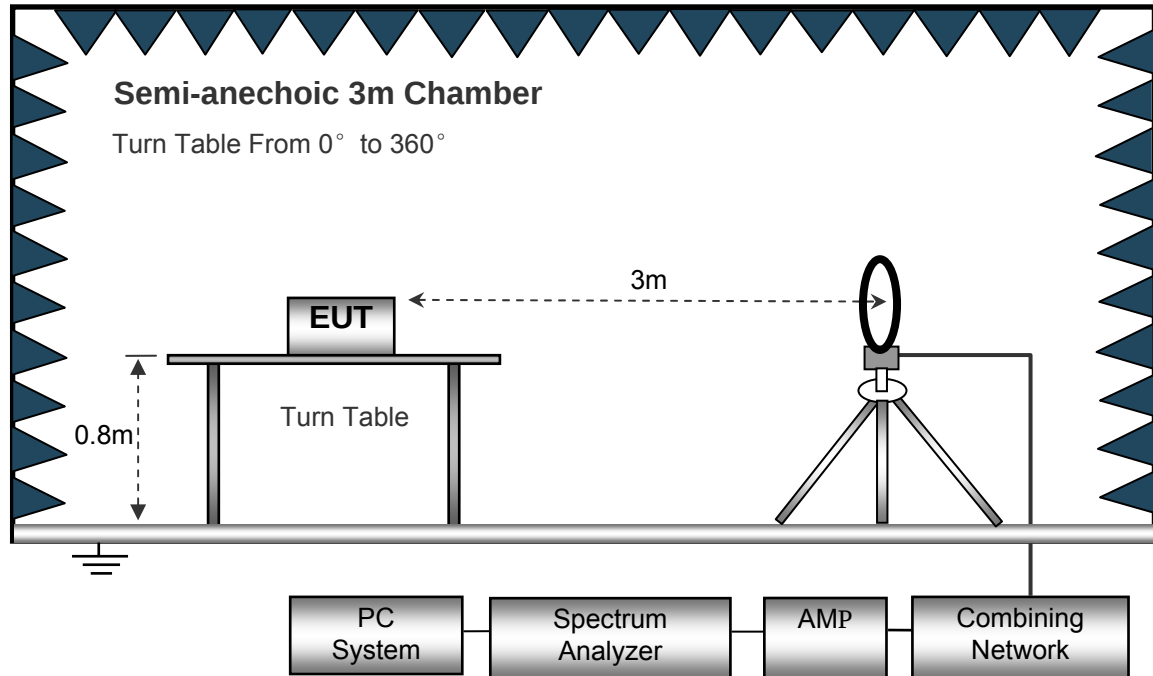

The test setup for emission measurement from 30 MHz to 1 GHz.

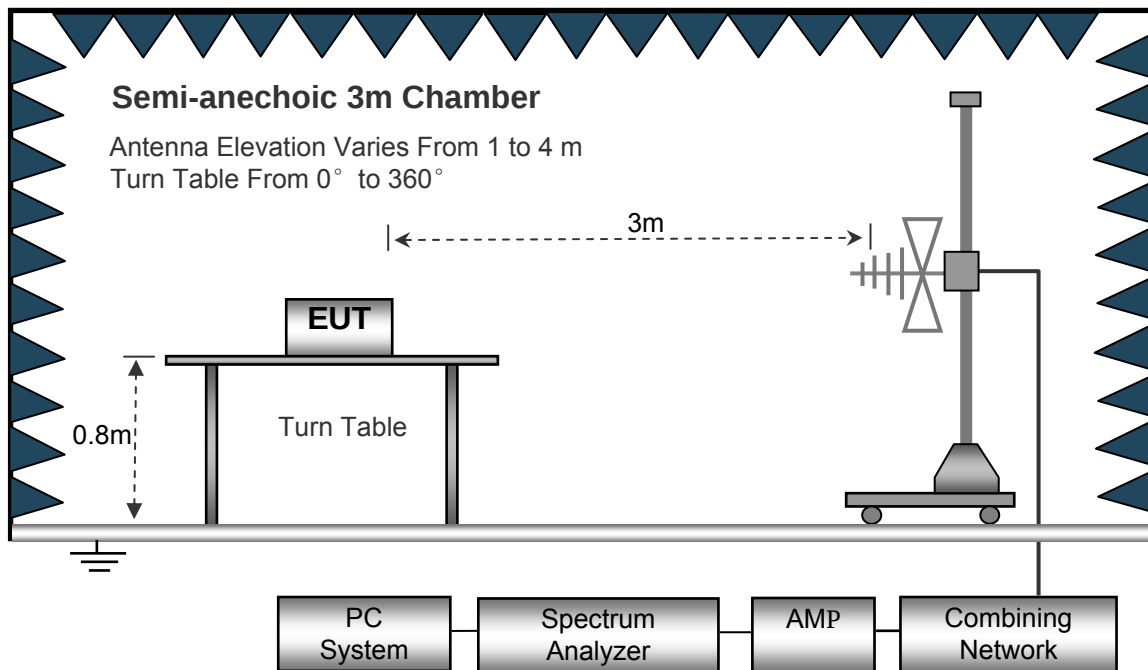

The test setup for emission measurement above 1 GHz.

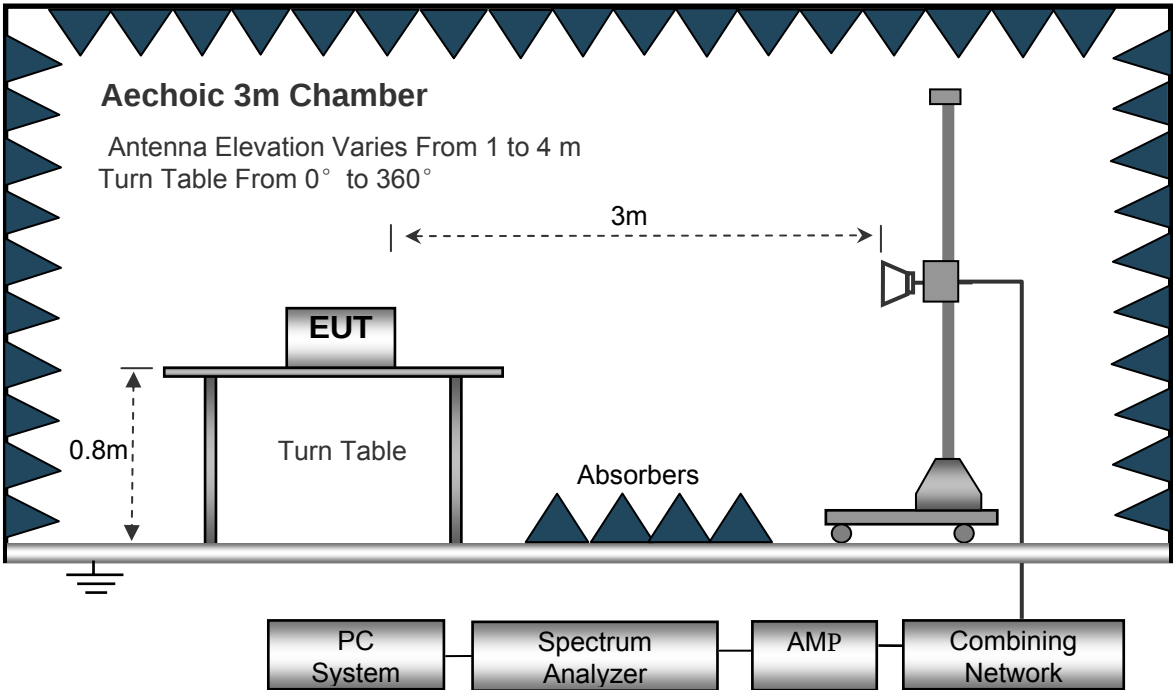

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9KHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
IF Bandwidth10KHz
Video Bandwidth10KHz
Resolution Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth100KHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth100KHz

Above 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth3MHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz


The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1000MHz


Remark: the EUT was pretested at the highest, middle and lowest channel, and the worst case was the lowest Channel, so the data show was the lowest channel only.

Test mode: Continuous Transmitting at lowest channel (Adapter)

Antenna polarization: Vertical

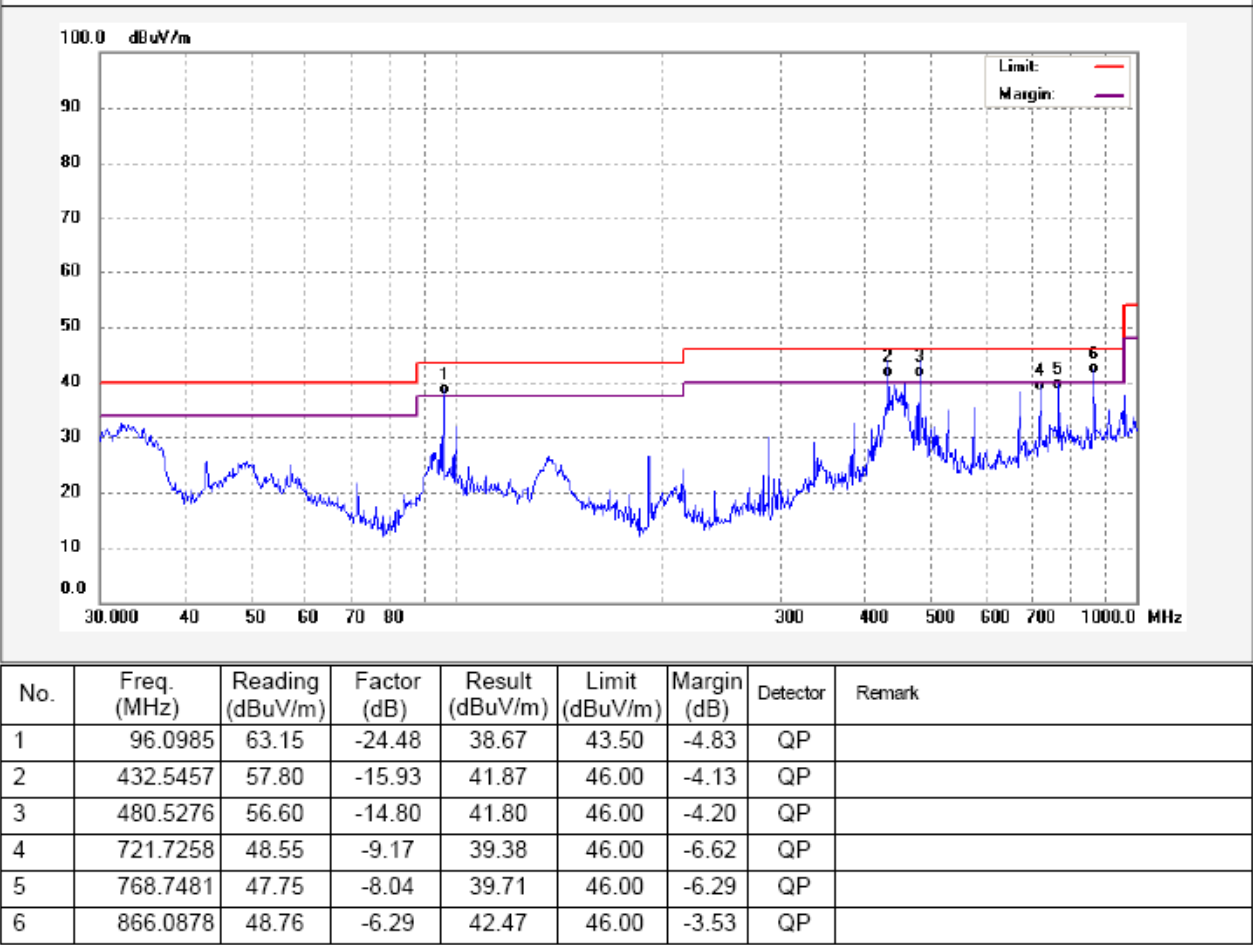


Antenna polarization: Horizontal

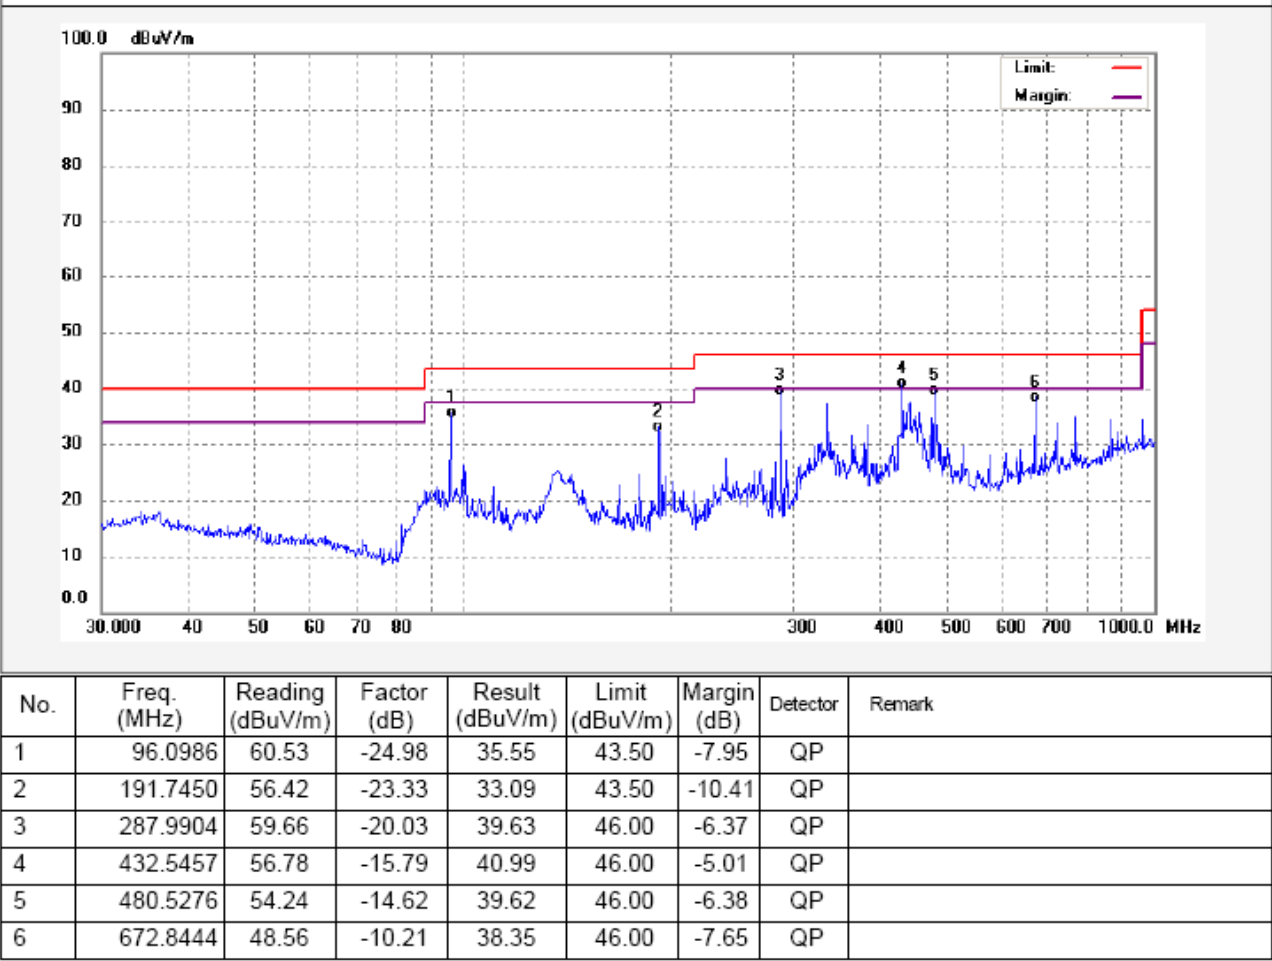


Test mode: Continuous Transmitting at lowest channel (Battery)

Antenna polarization: Vertical

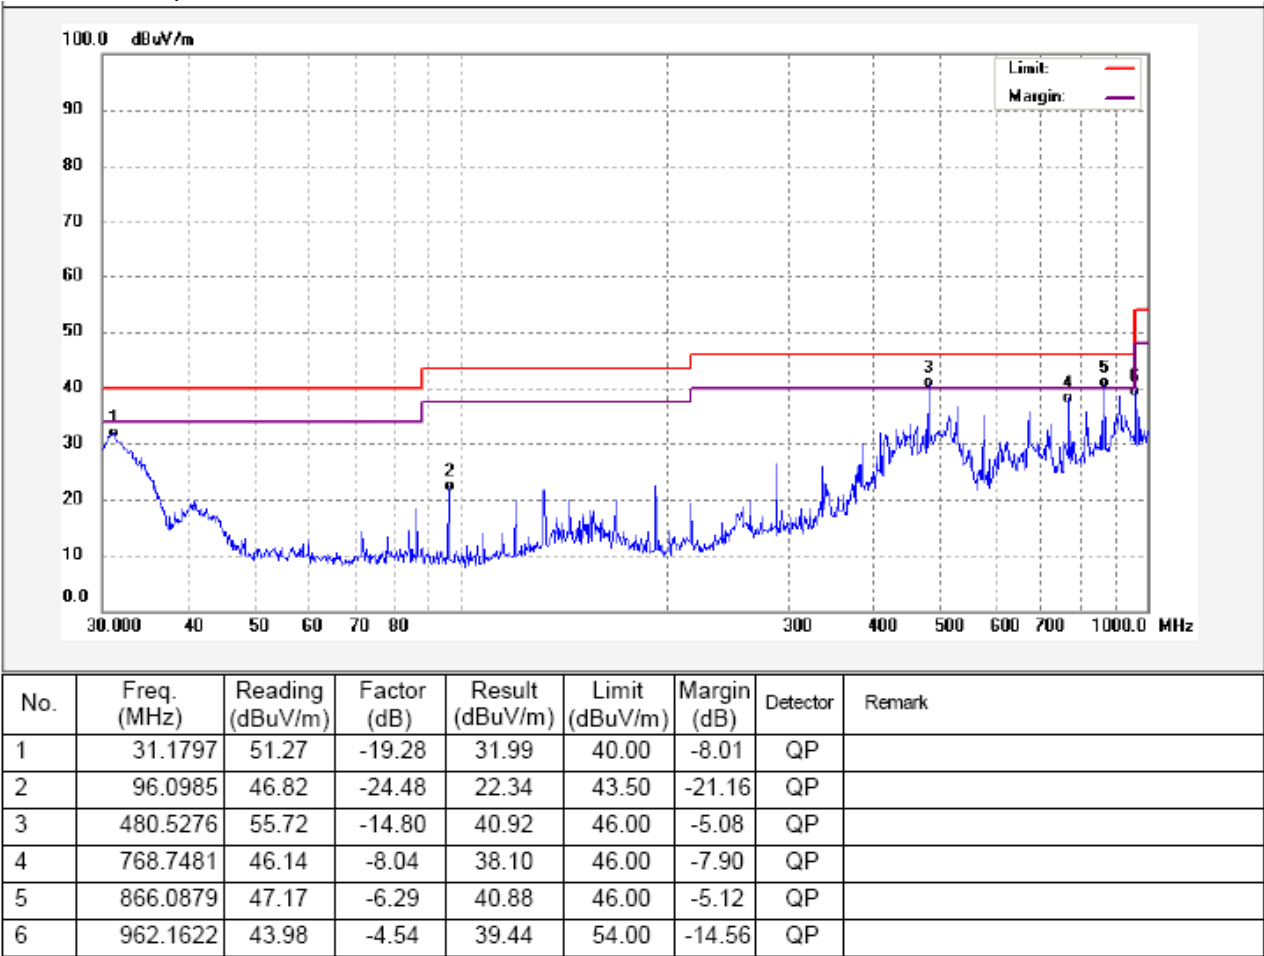

Antenna polarization: Horizontal

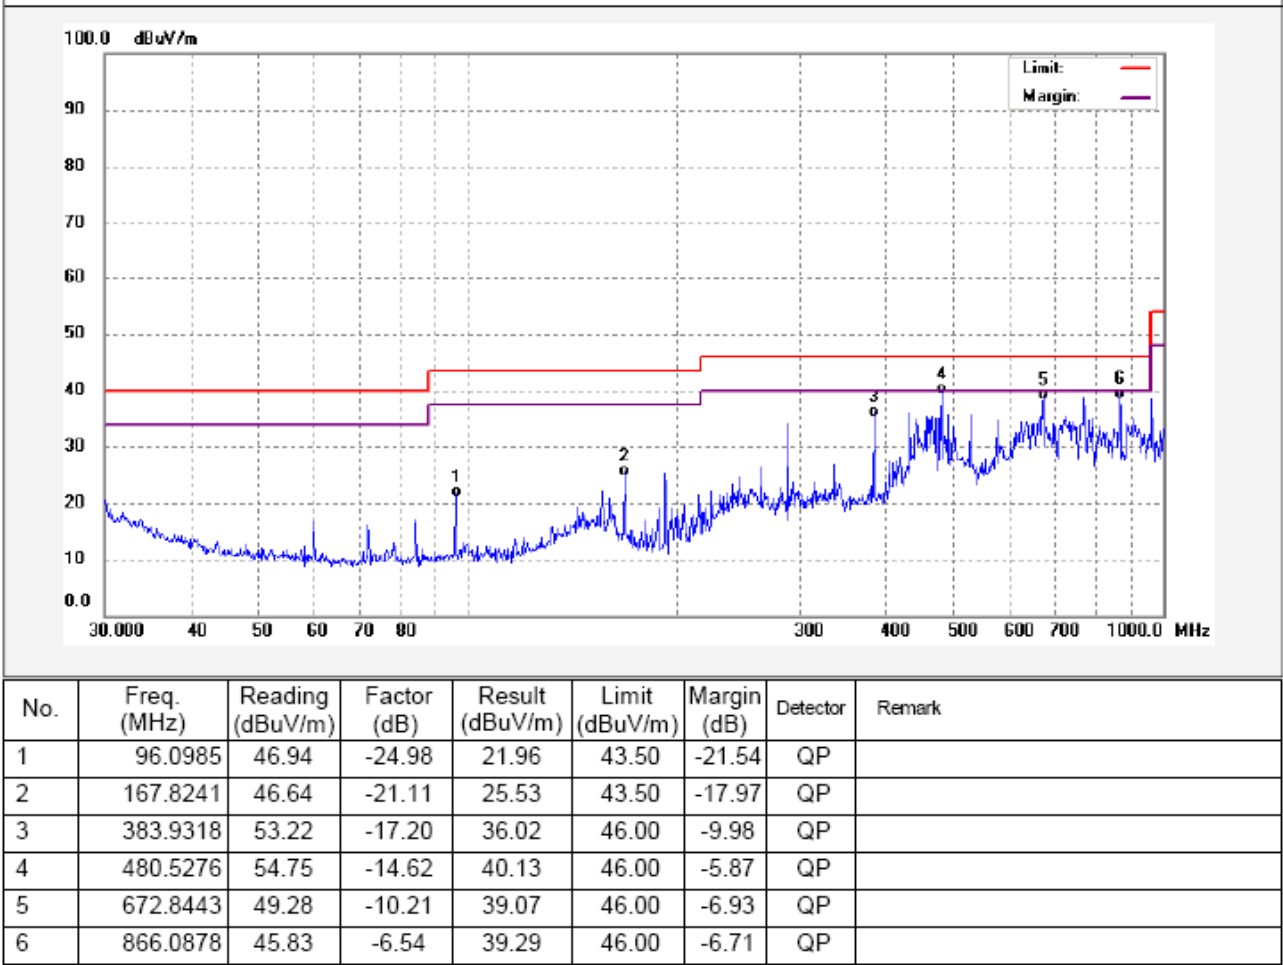


Test Frequency: 1GHz ~ 18GHz

Remark:A 2.4GHz high pass filter is used during the test.

$AV = \text{Peak} + 20\text{Log}_{10}(\text{duty cycle}) = \text{PK} + (-23) = \text{PK} - 23$ [refer to section 8 for more detail]

Test channel: TX 2412.25MHz(Battery Operation)


Antenna polarization: Vertical

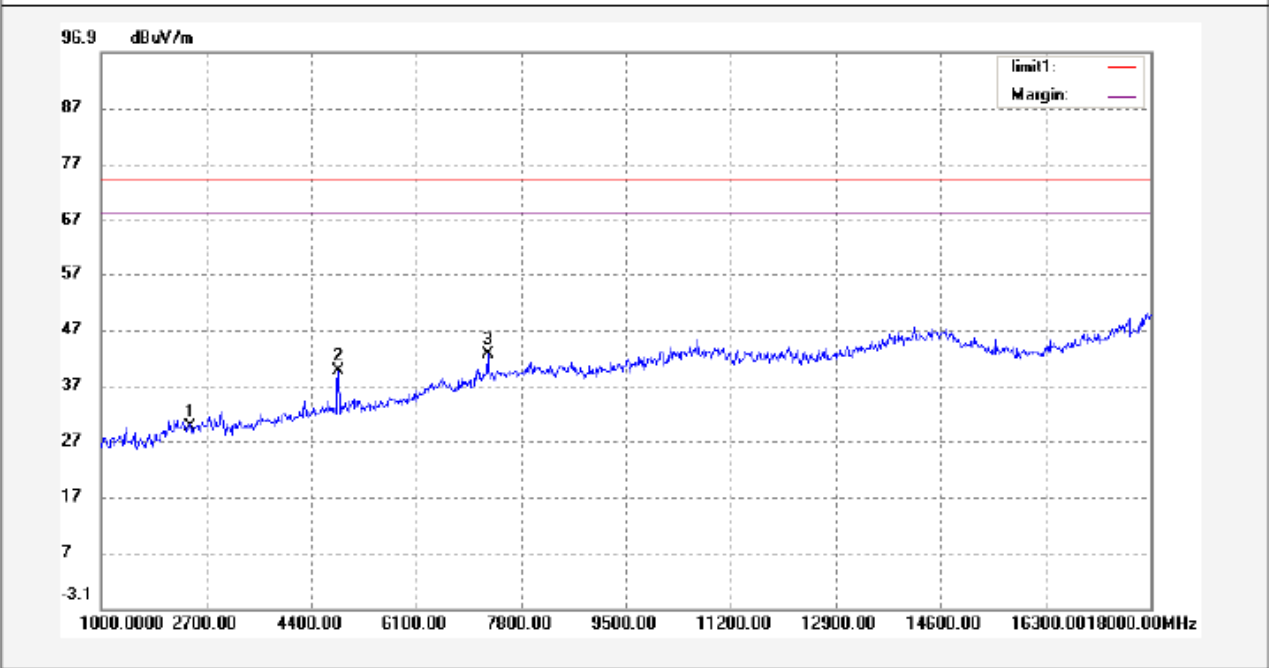

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2414.250	45.19	-15.62	29.57	74.00	-44.43	peak	
2	4828.500	51.37	-11.95	39.42	74.00	-34.58	peak	
3	7242.750	49.76	-7.15	42.61	74.00	-31.39	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Antenna polarization: Horizontal

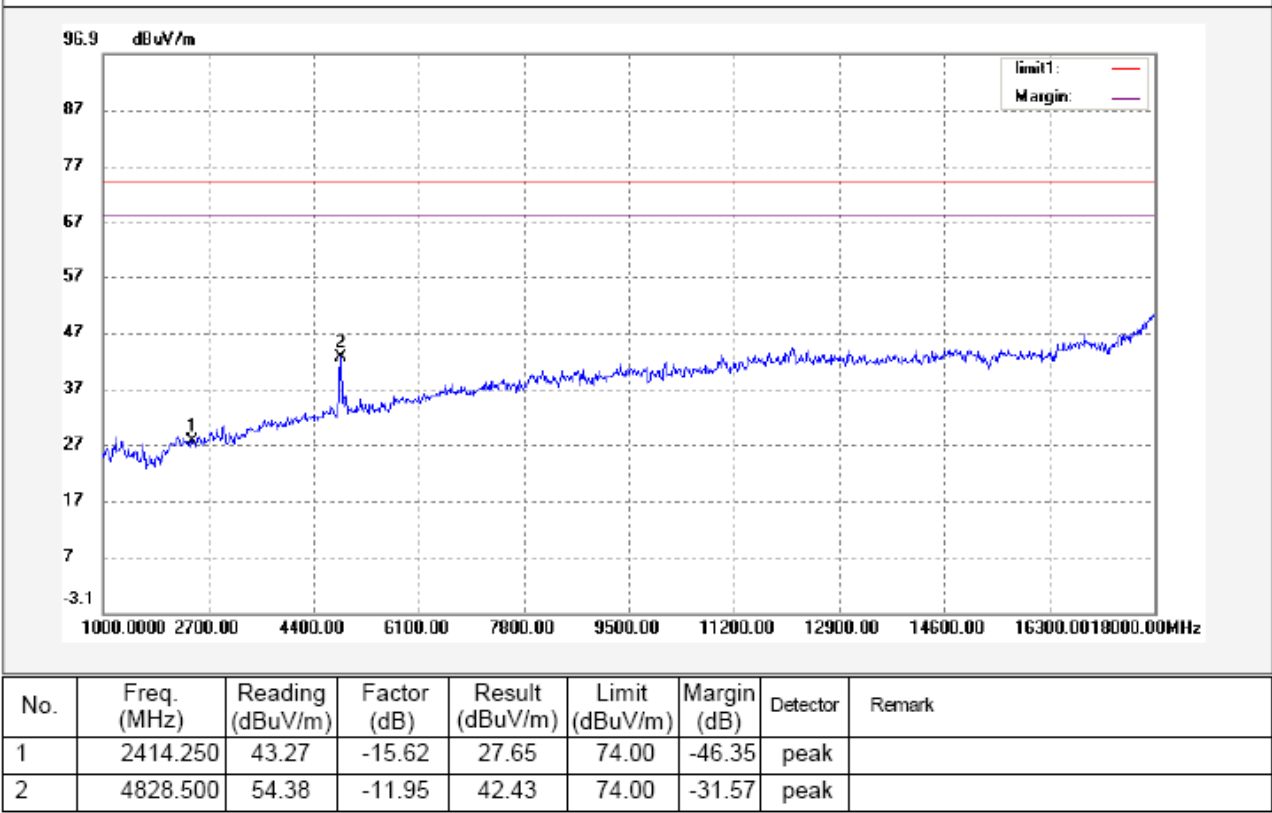


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 1GHz ~ 18GHz

Test channel: TX 2437.875MHz(Battery Operation)


Antenna polarization: Vertical

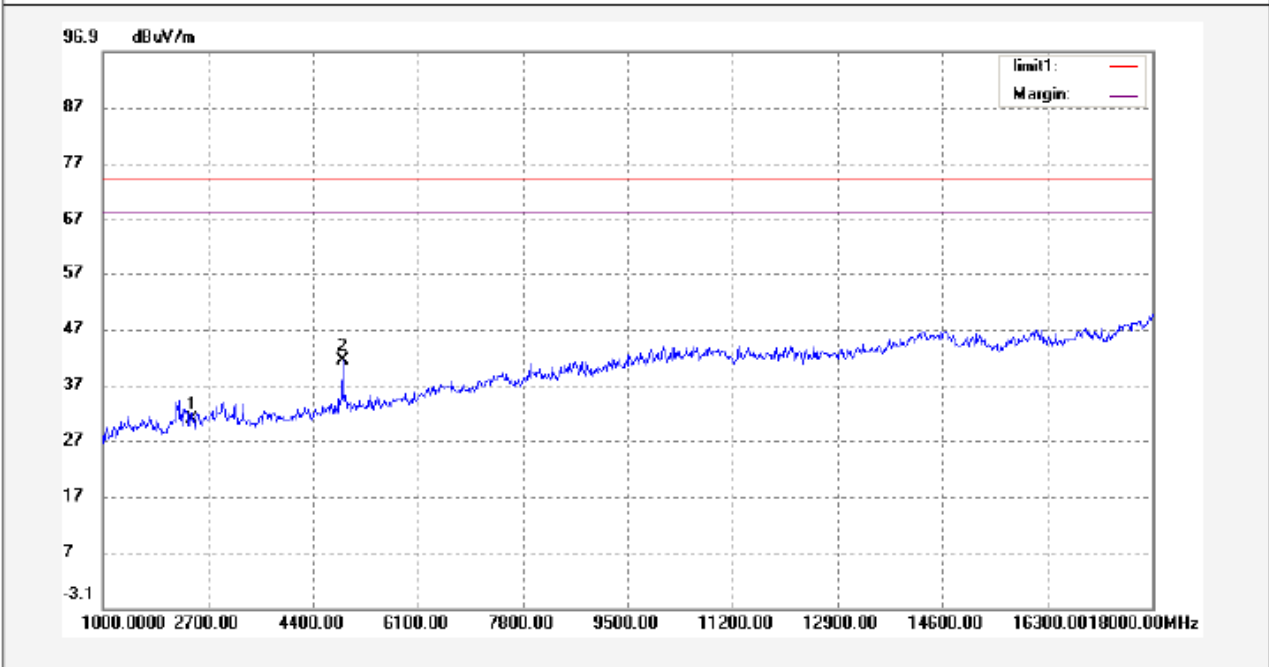

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2437.875	46.48	-15.69	30.79	74.00	-43.21	peak	
2	4875.750	53.30	-11.92	41.38	74.00	-32.62	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.


Antenna polarization: Horizontal

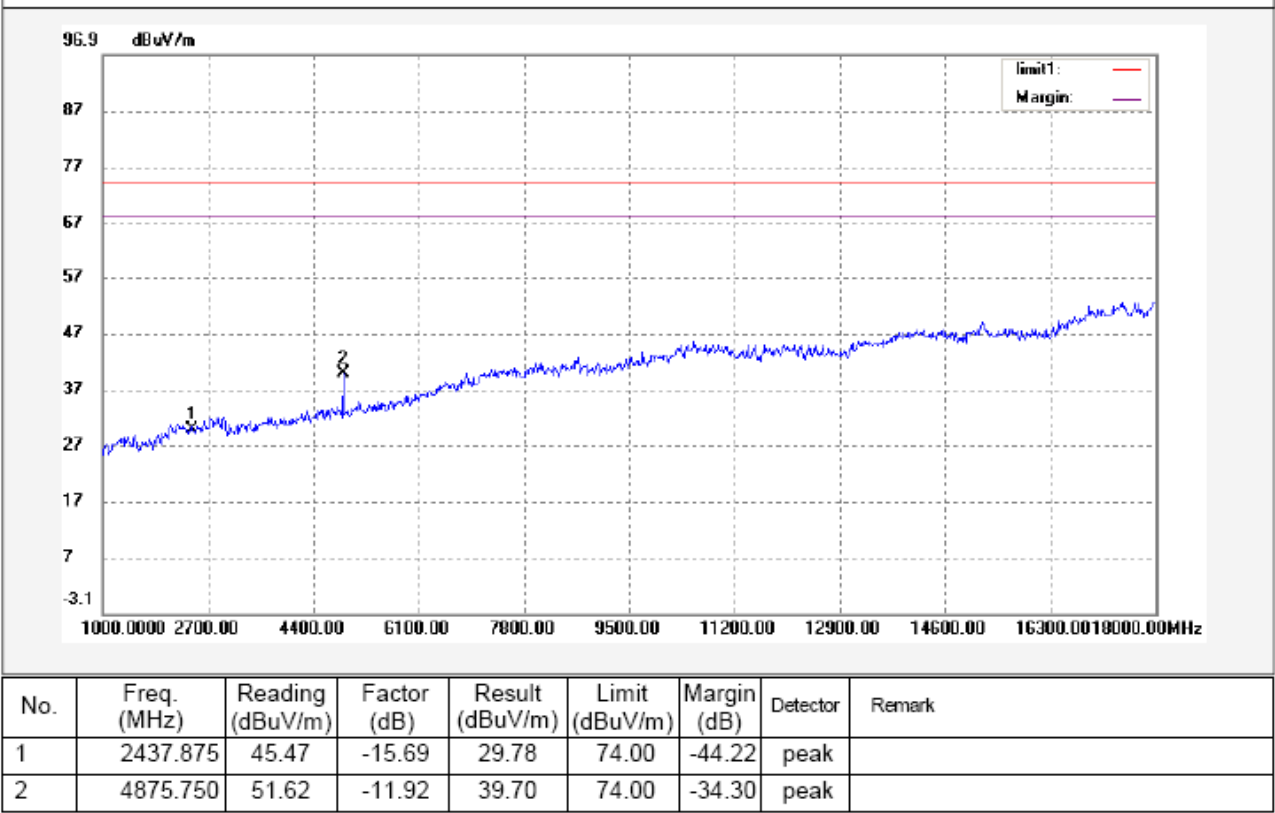

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.


Test channel: TX 2461.5MHz(Battery Operation)

Antenna polarization: Vertical

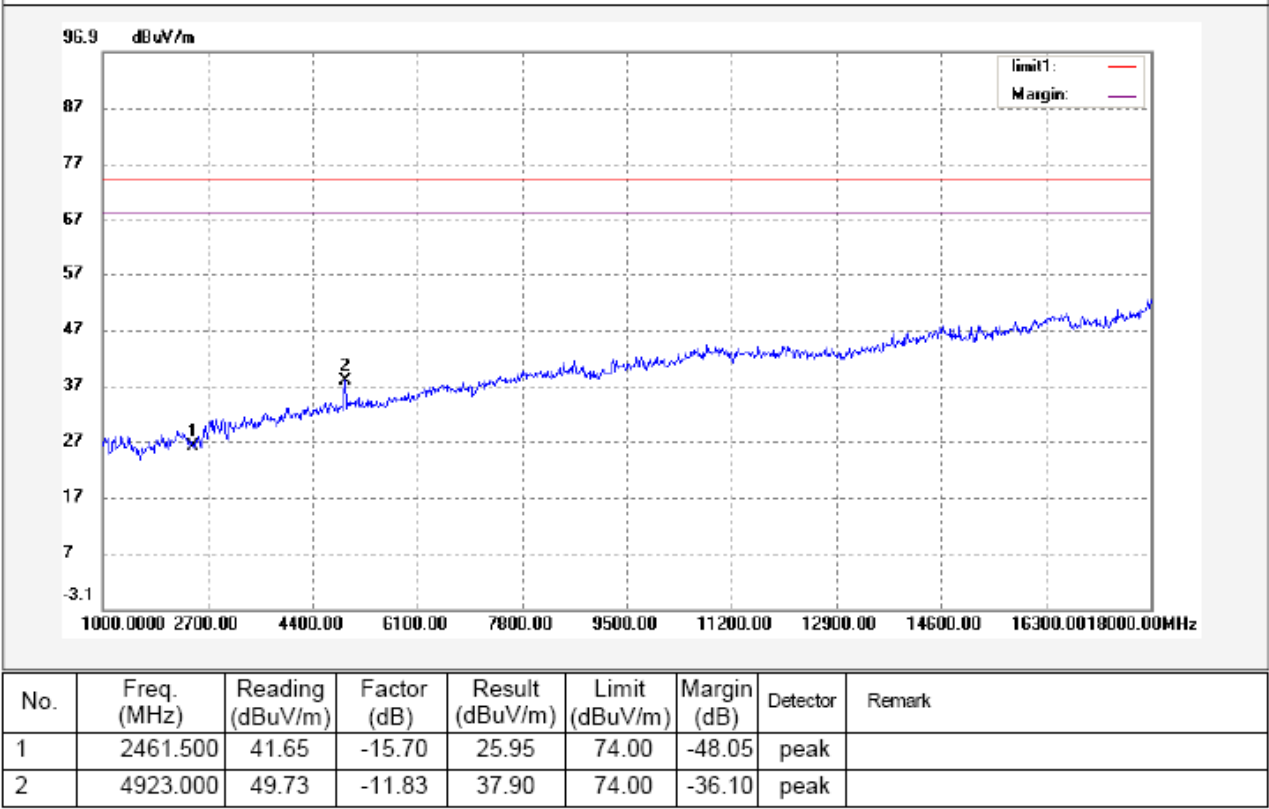

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Antenna polarization: Horizontal

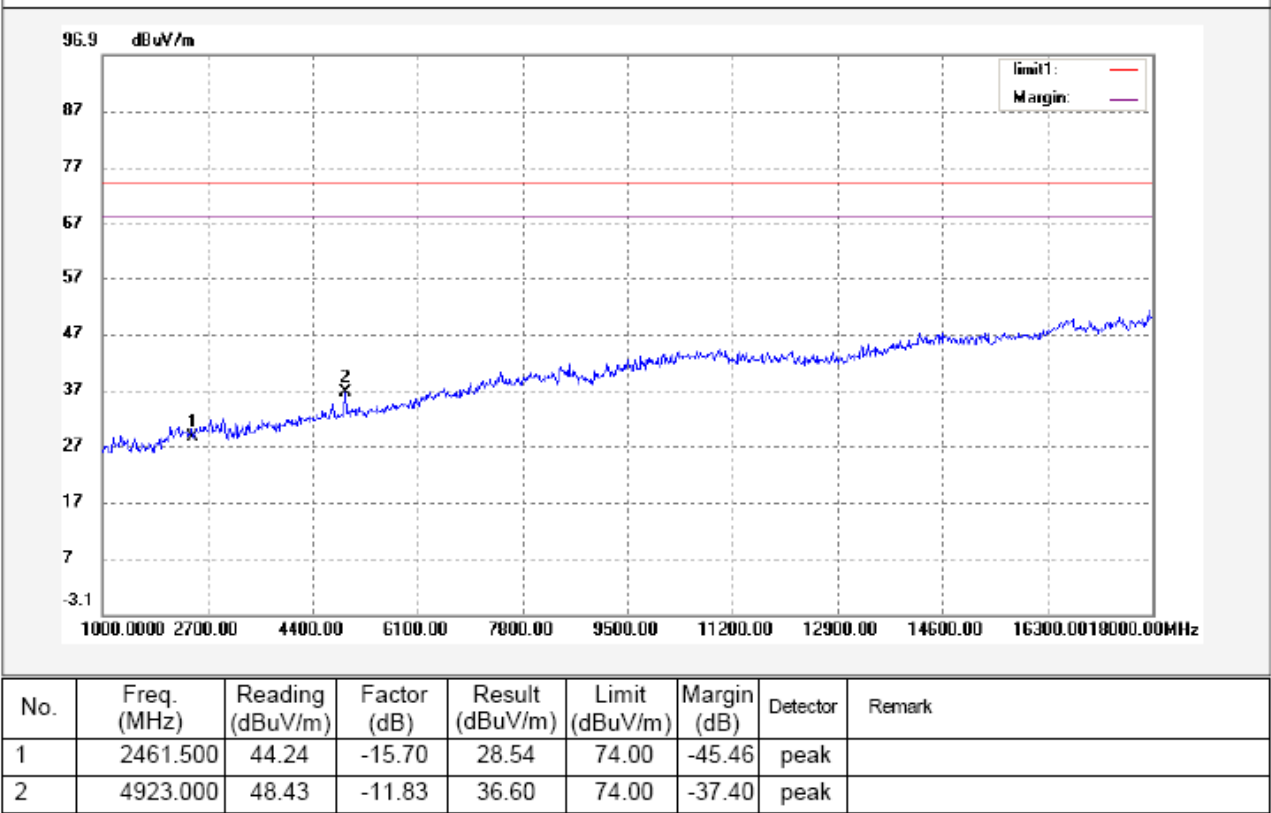

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported.


8 Duty Cycle


Test Requirement: FCC Part 15.35
Test Method: ANSI C63.4:2003
Test Status: TX mode.

8.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 1000 kHz, VBW = 1000 kHz, Span = 0 Hz, Adjacent sweep time.

8.2 Test Result

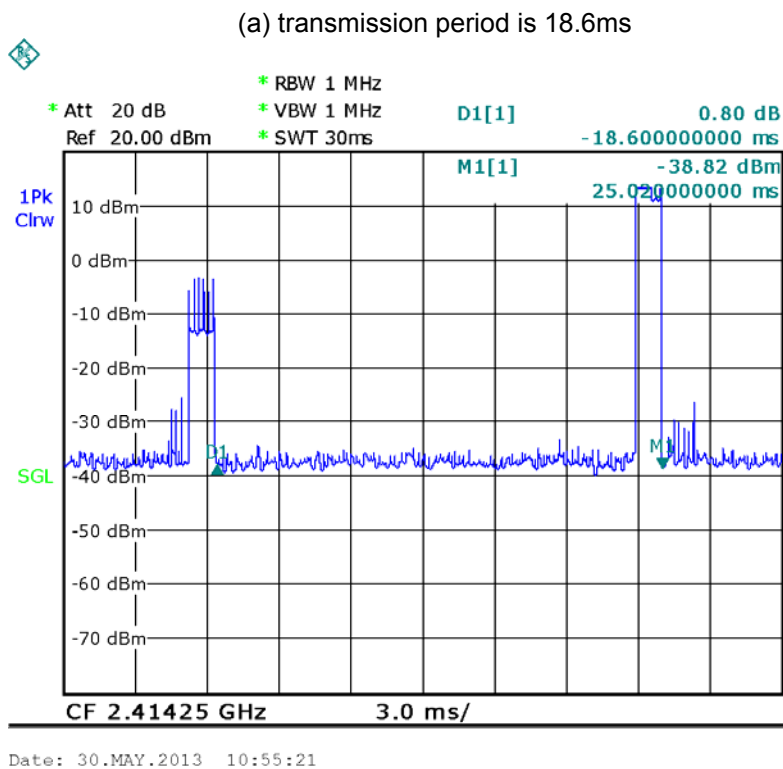

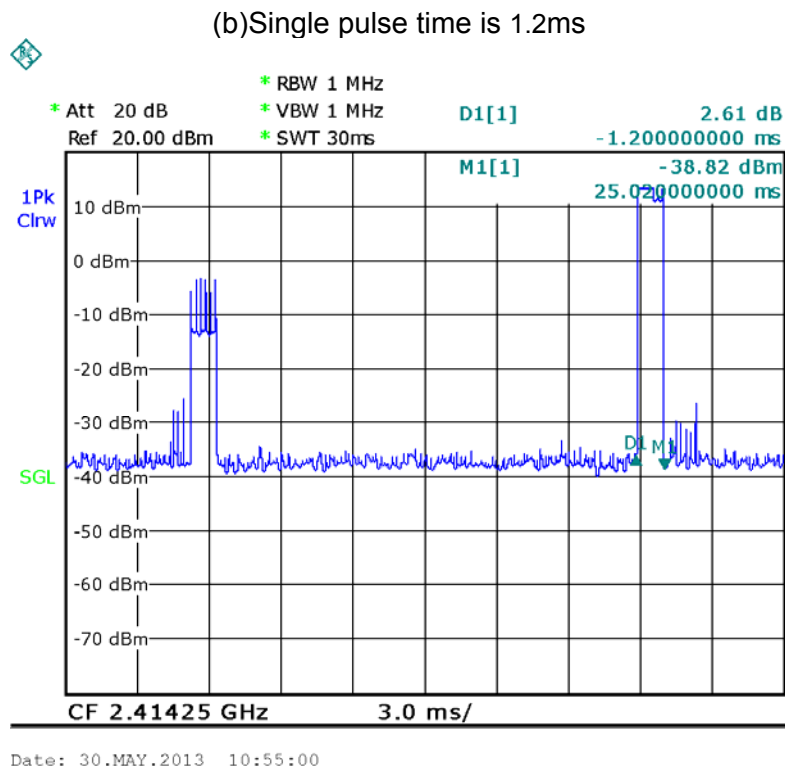

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : T_{on} = pulse time = 1.2 ms

The EUT's work period : $T = T_{ON} + T_{OFF}$ = transmission period = 18.6 ms

The EUT's duty cycle : $D = T_{on} / T = 1.2 / 18.6 * 100\% = 6.45\%$

Duty Cycle Correction Factor(dB) = $20 * \log_{10}(\text{Duty Cycle}) = 20 * \log_{10}(6.45\%)$


= -23dB

9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function d= AVG Trace = max hold
Test Mode:	continuous transmitting


9.1 Test Result:

Lower Channel –Vertical

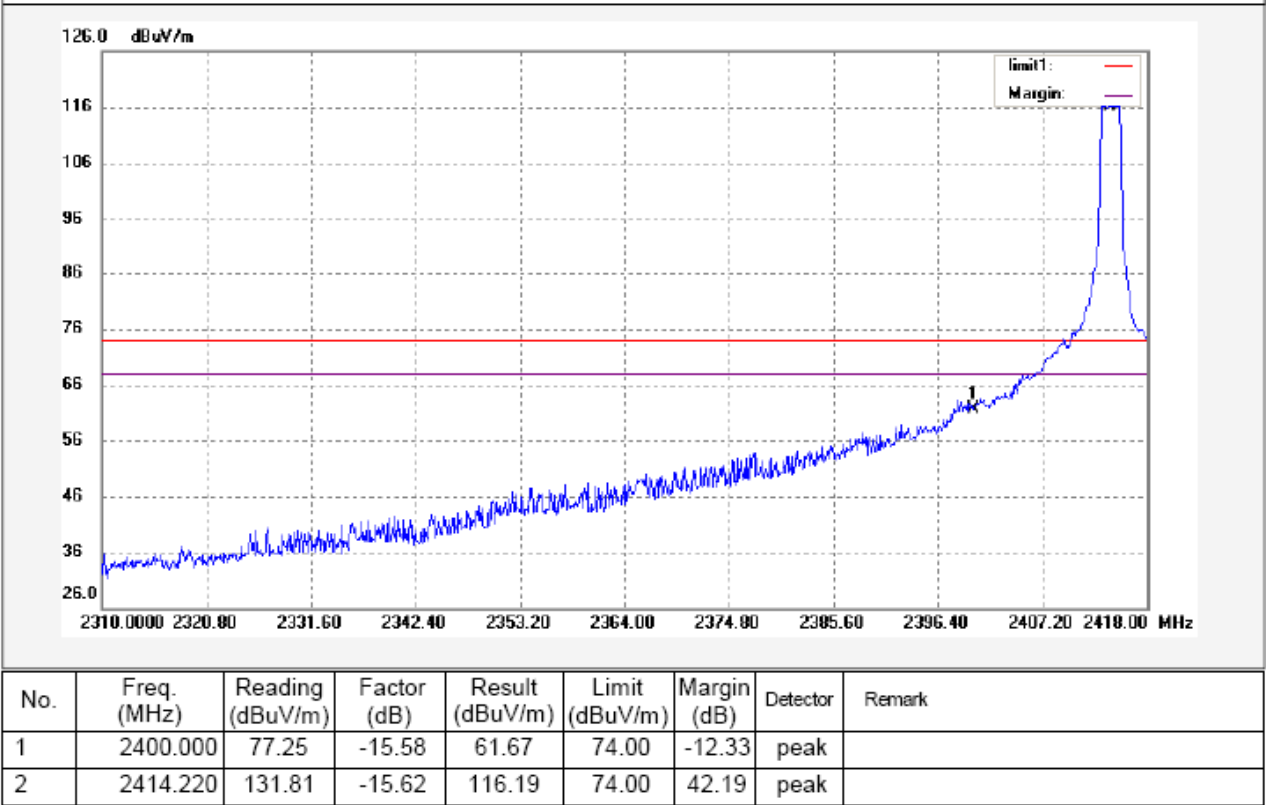


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Lower Channel –Horizontal

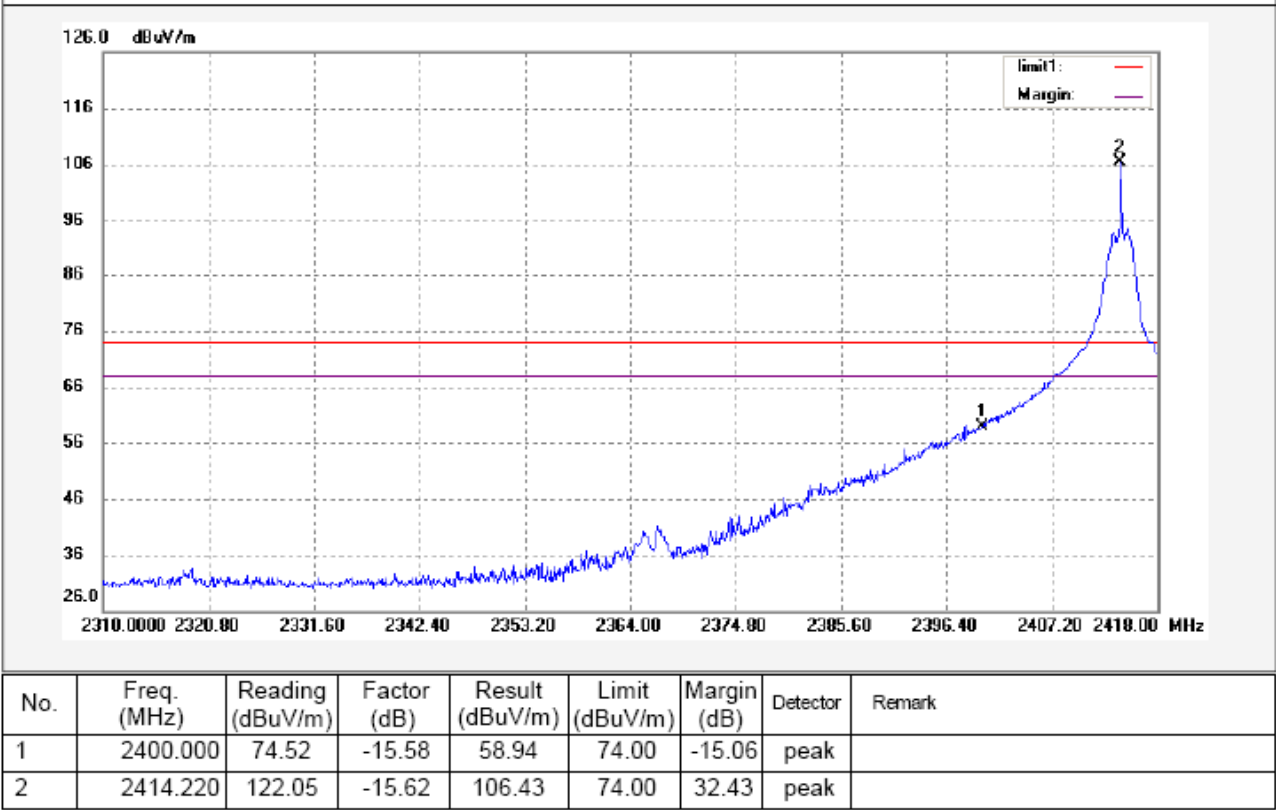


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Upper Channel – Vertical

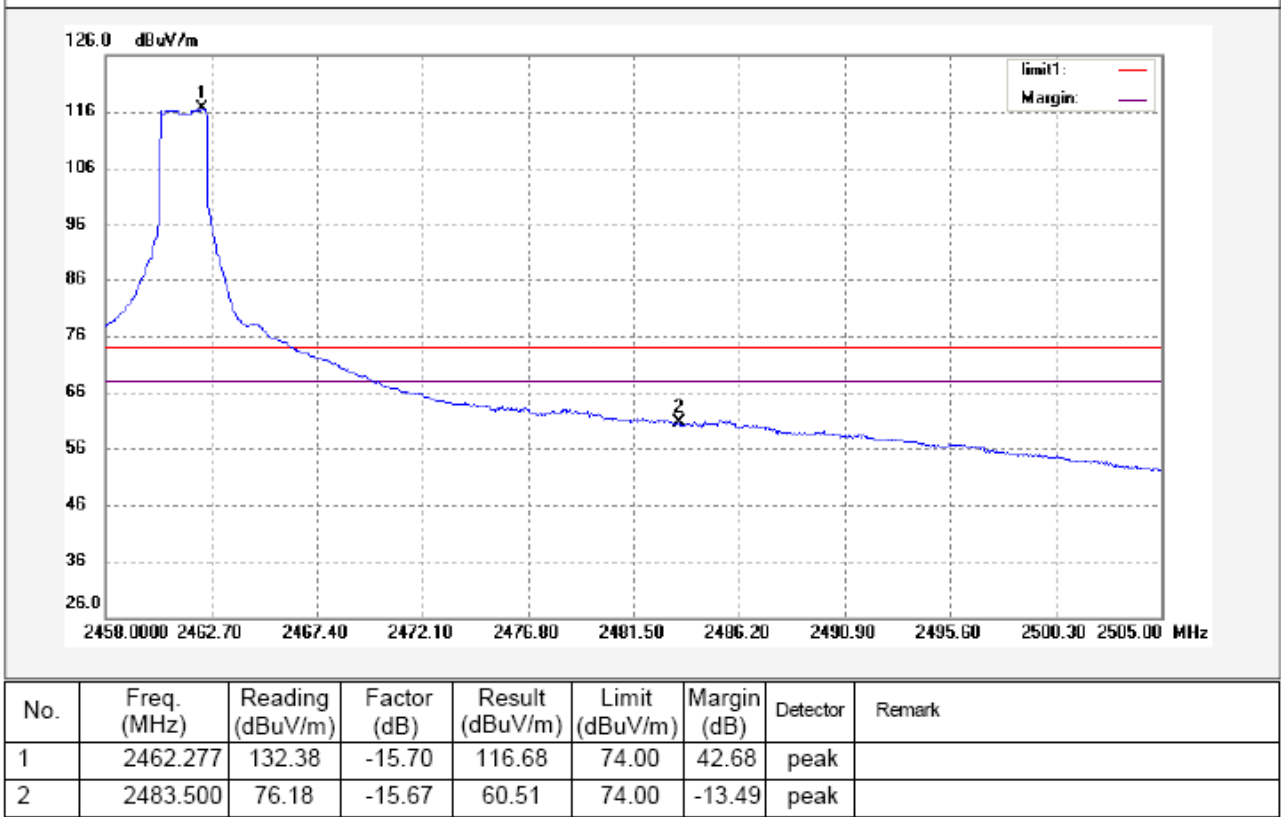


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Upper Channel –Horizontal

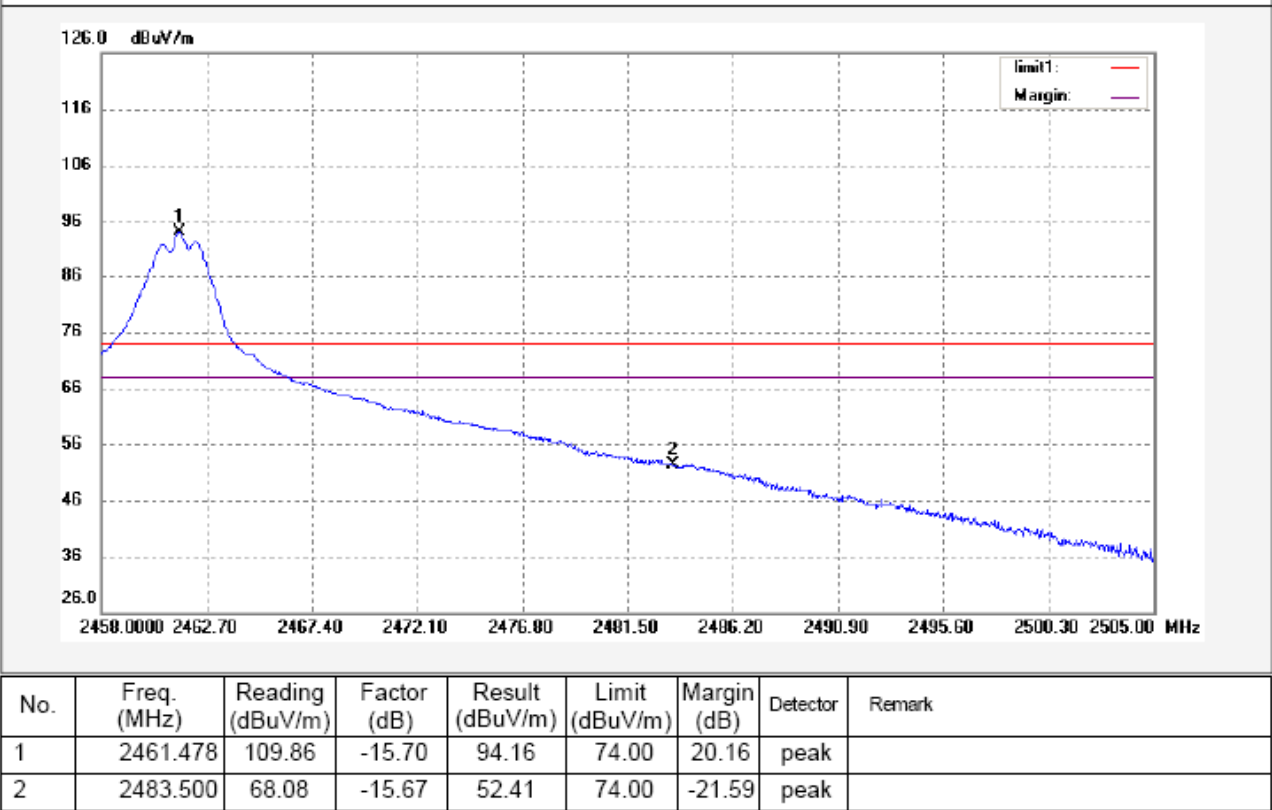

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.


Lower Channel (Hopping on) –Vertical

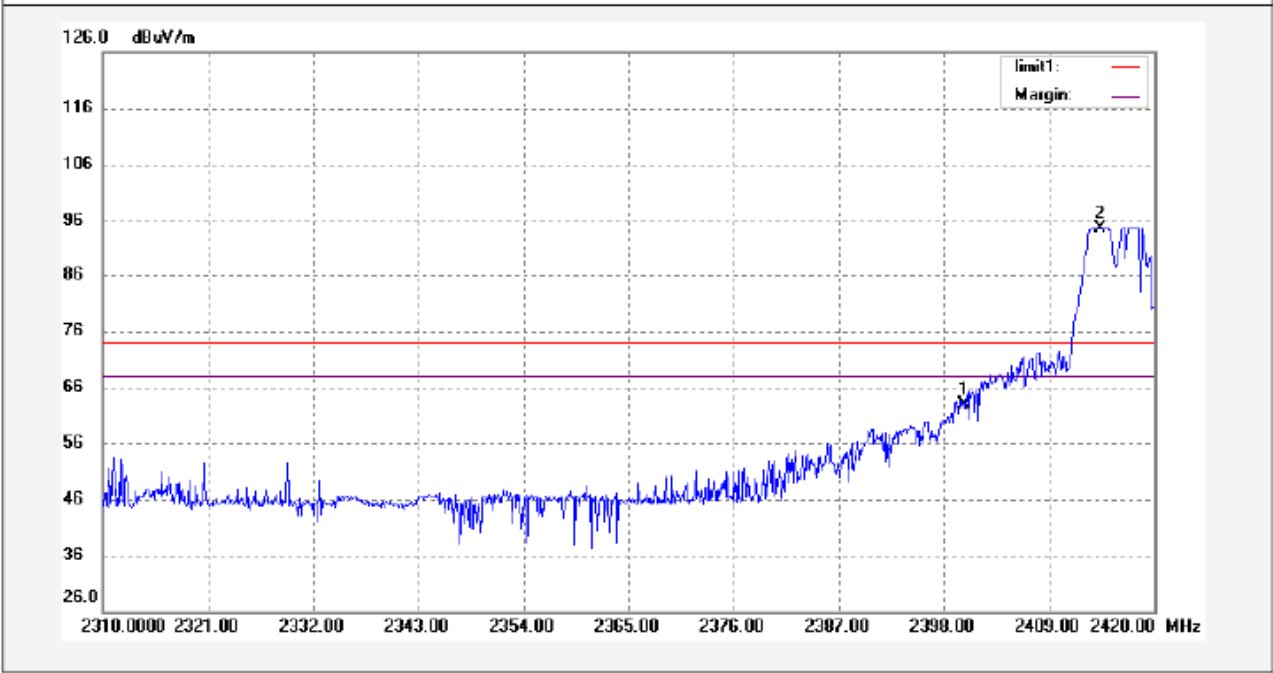

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	78.42	-15.58	62.84	74.00	-11.16	peak	
2	2414.280	110.32	-15.62	94.70	74.00	20.70	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Lower Channel (Hopping on) –Horizontal

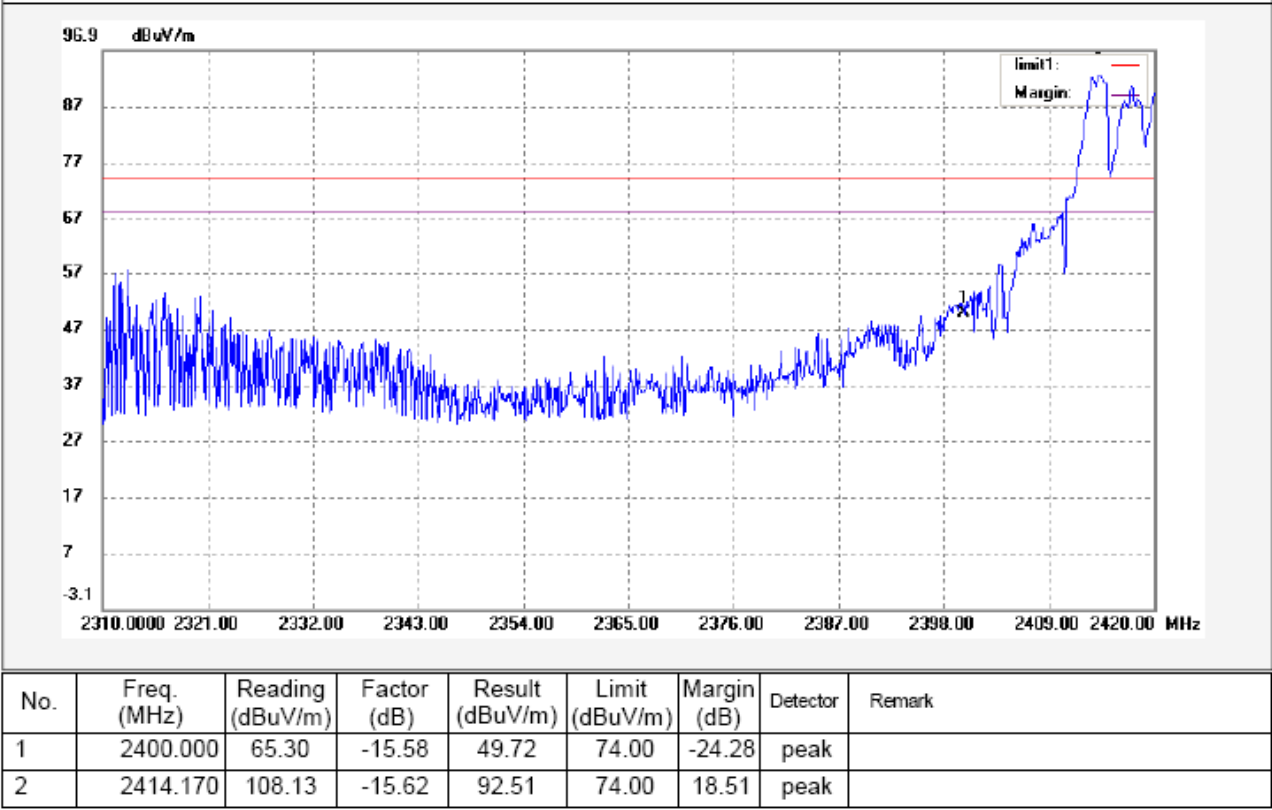

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Upper Channel (Hopping on)– Vertical

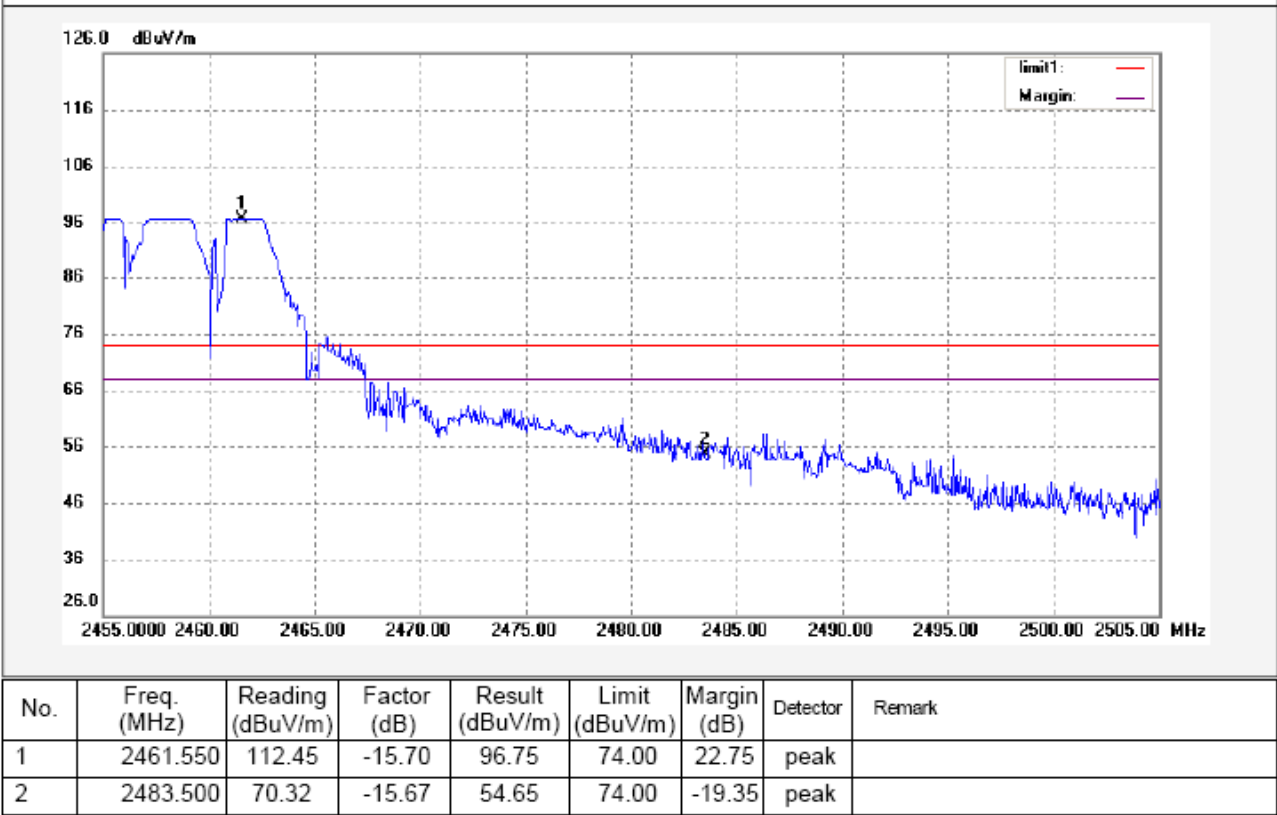

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

Upper Channel (Hopping on)–Horizontal



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2461.500	109.36	-15.70	93.66	74.00	19.66	peak	
2	2483.500	69.31	-15.67	53.64	74.00	-20.36	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	-	The measurements were more than 20 dB below the limit and not reported.

10 20 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

DA 00-705

Test Mode:

Test in fixing operating frequency at low, Middle, high channel.


10.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz

10.2 Test Result:

Test Channel	Bandwidth
Low	3.348MHz
Middle	3.373MHz
High	3.373MHz

Test result plot as follows:

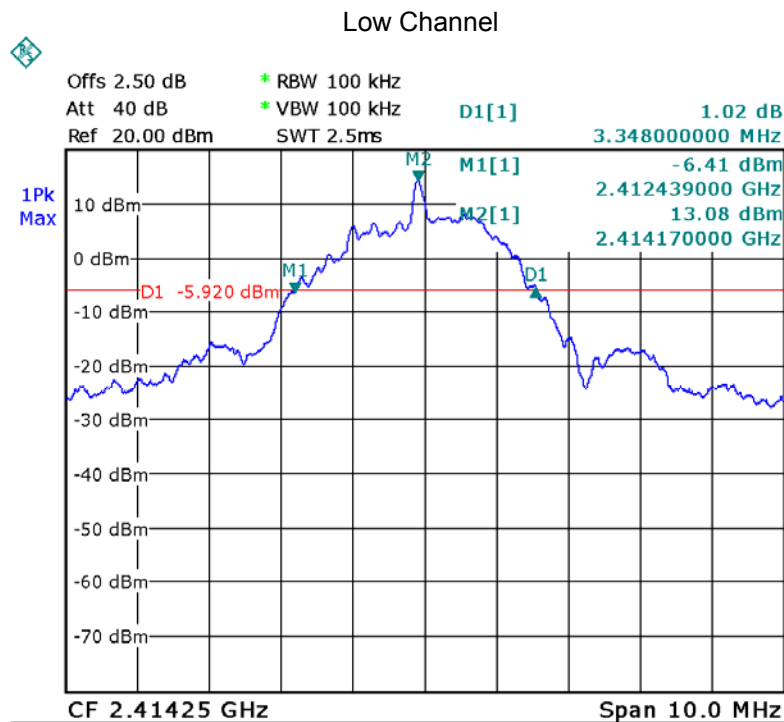

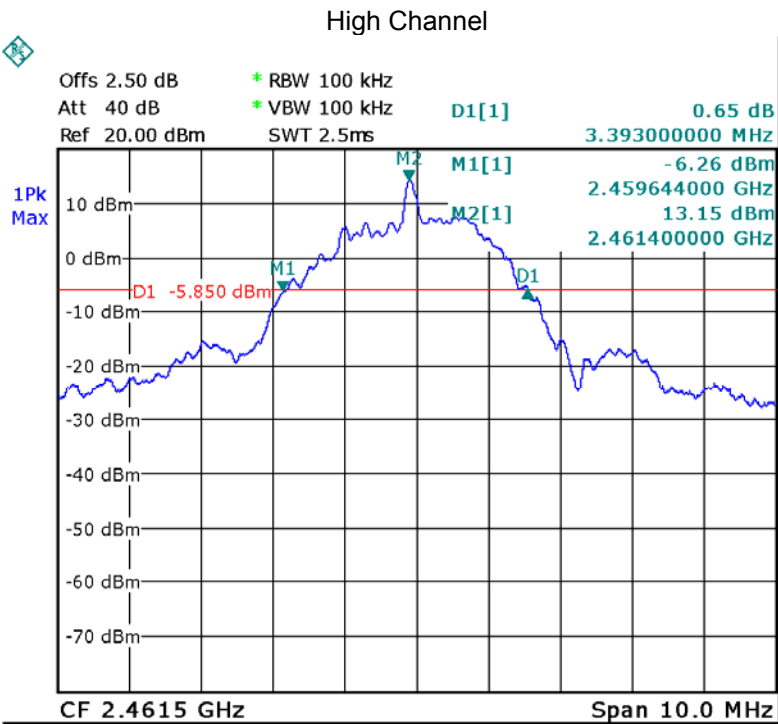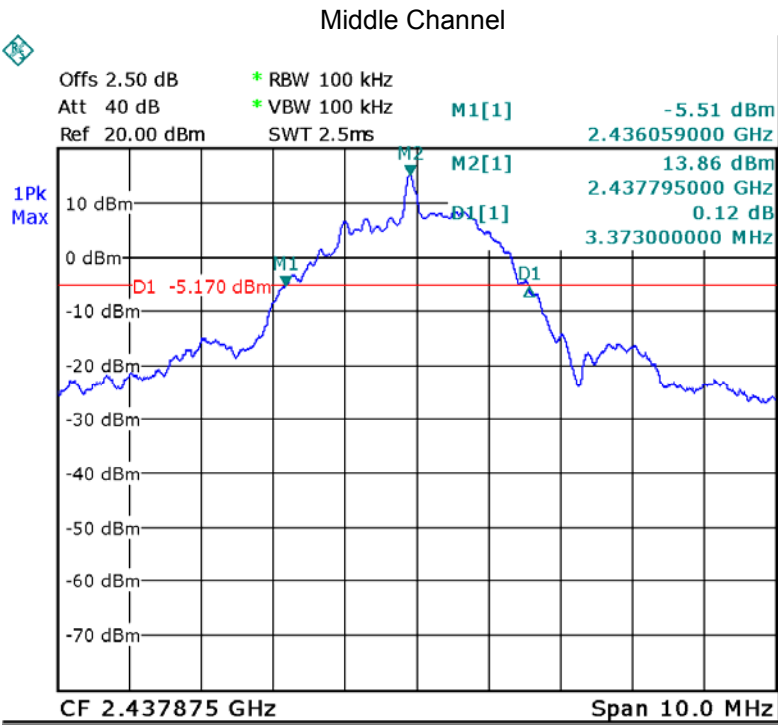

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.



11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10MHz. VBW = 10MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


11.2 Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	11.64	20.97
Middle	12.97	20.97
High	11.64	20.97

Test result plot as follows:

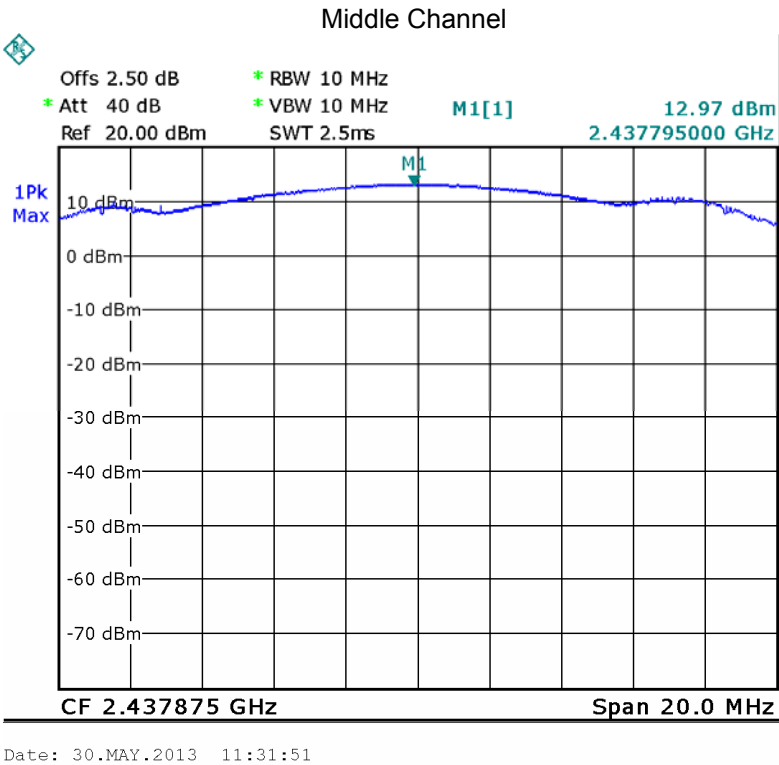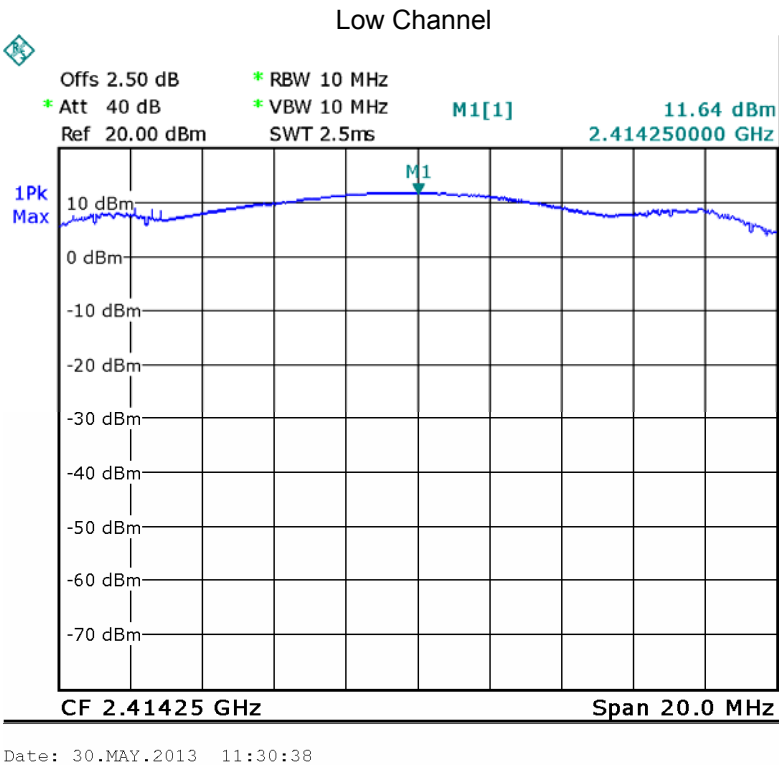

High Channel

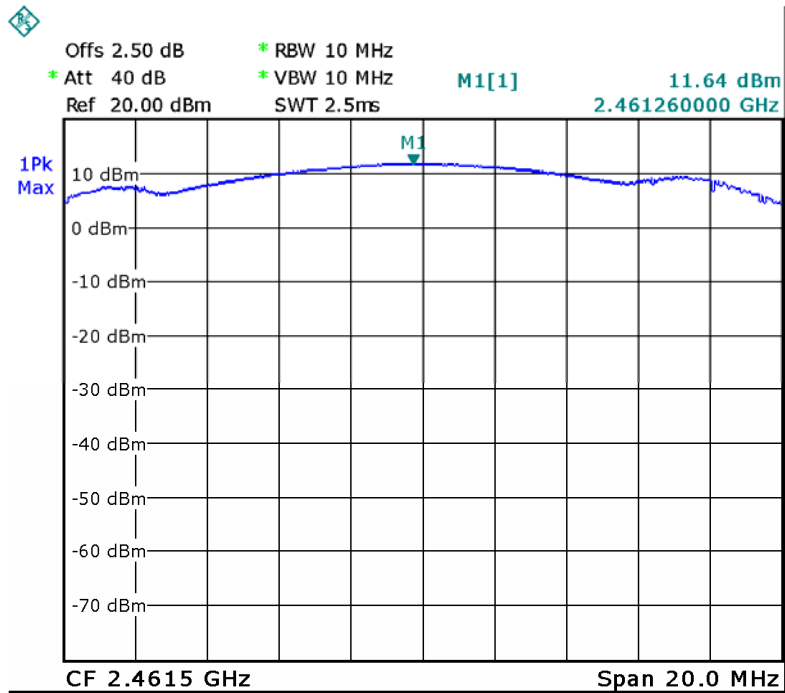

Date: 30.MAY.2013 11:32:30

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 100kHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Result:


Test Channel	Separation (MHz)	Result
Low	3.377	PASS
Middle	3.377	PASS
High	3.377	PASS

Test result plot as follows:


Low Channel

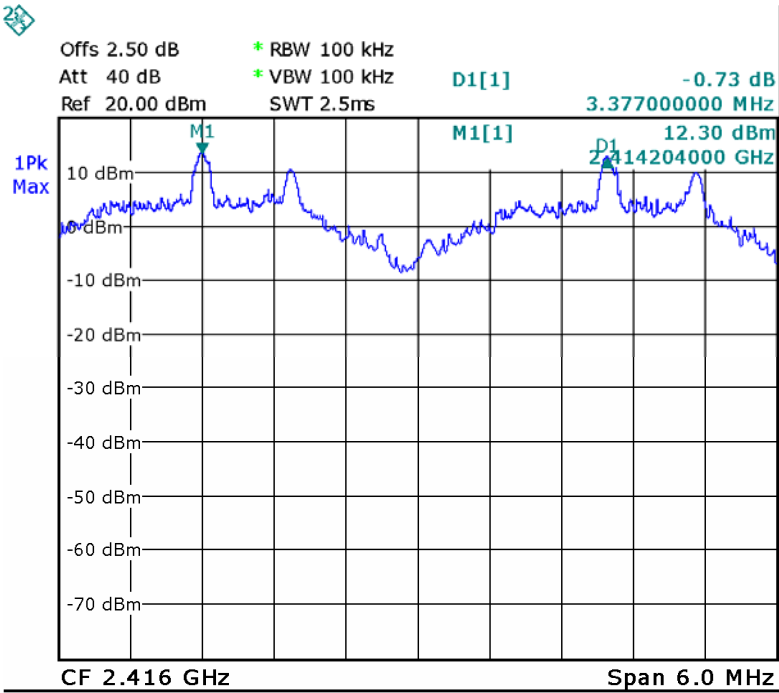

Middle Channel

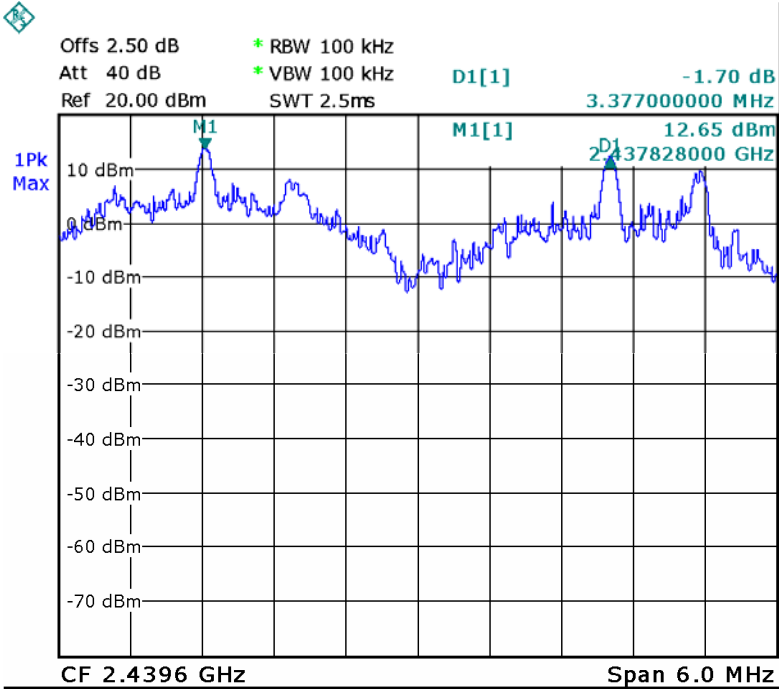

High Channel

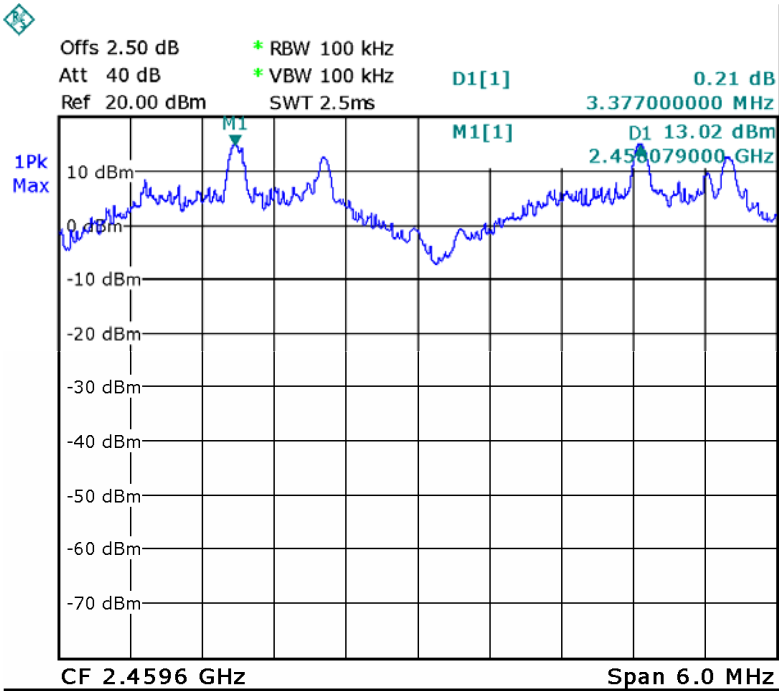

13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

13.2 Test Result:

Total Channels are 15 Channels.

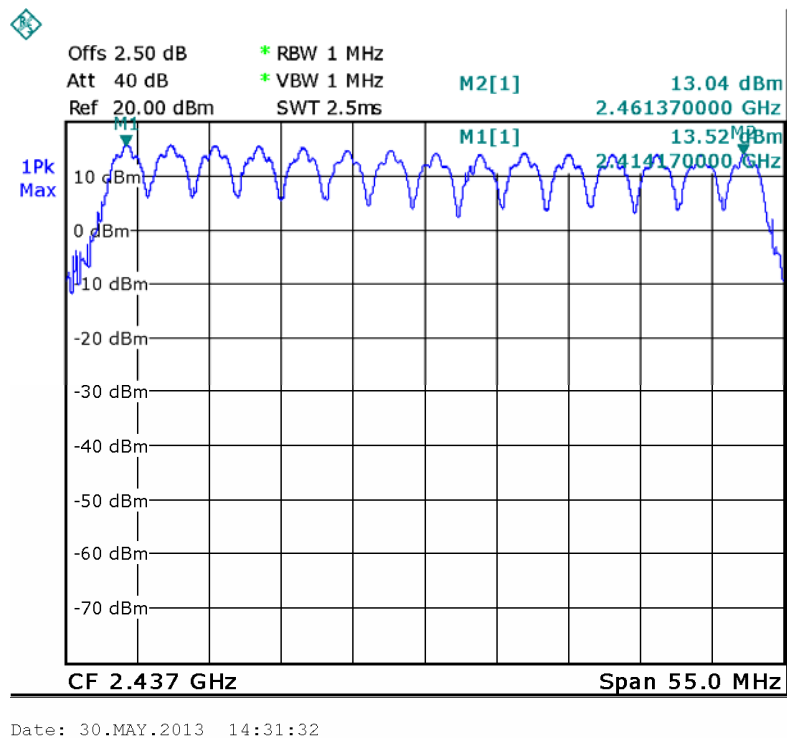

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result:

The test period: $T = 0.4(s) * 15 = 6 (s)$

So, the Dwell Time can be calculated as follows:

Low channel: Dwell Time = $40(\text{times}) * 1.11(\text{ms}) = 0.0444(s)$


Middle channel: Dwell Time = $40(\text{times}) * 1.09(\text{ms}) = 0.0436(s)$

High channel: Dwell Time = $40(\text{times}) * 1.09(\text{ms}) = 0.0436(s)$


Note : Mkr Delta is once pulse time.

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2412.25MHz	1.11	0.0444	0.400	Pass
2437.875MHz	1.09	0.0436	0.400	Pass
2461.5MHz	1.09	0.0436	0.400	Pass

Low Channel

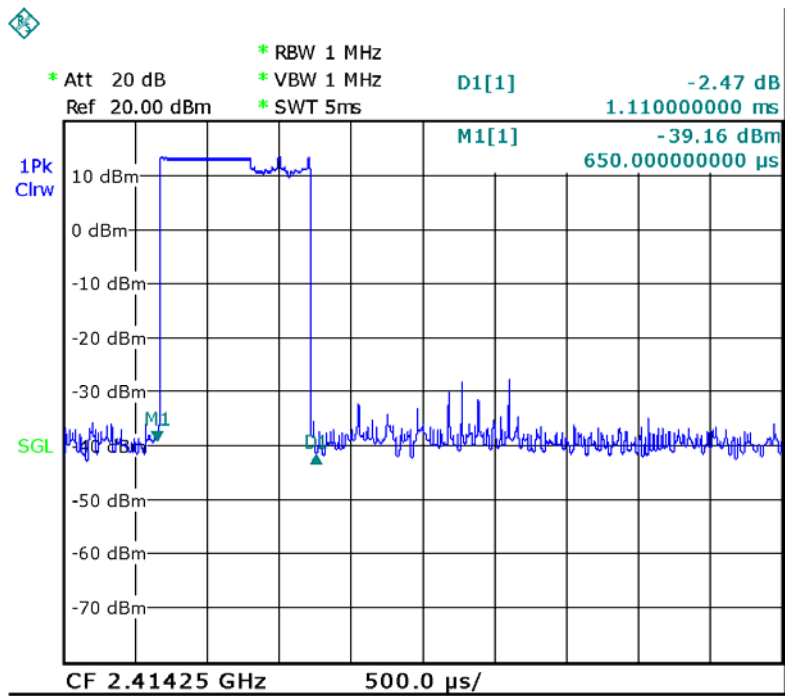


Date: 30.MAY.2013 10:49:39

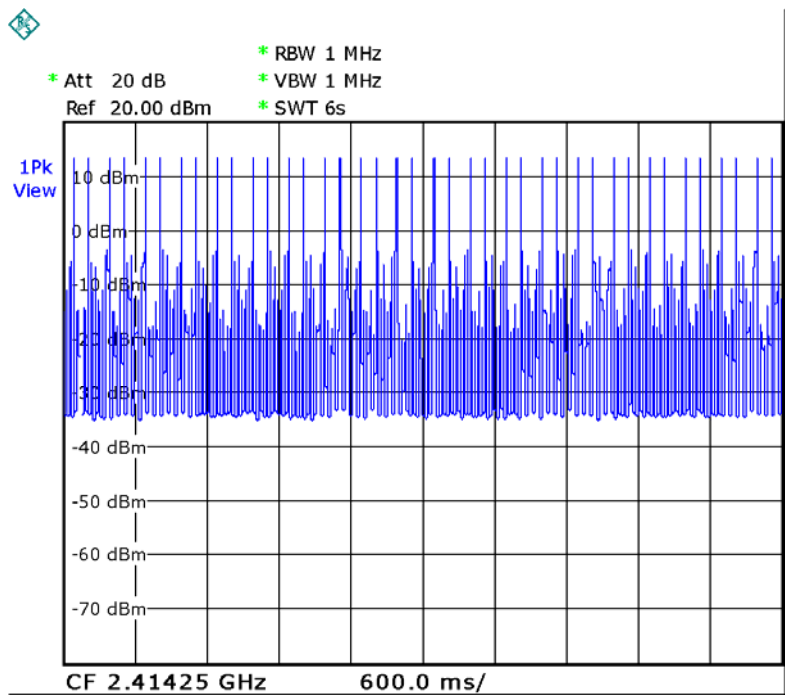


Date: 30.MAY.2013 10:51:49

Middle Channel

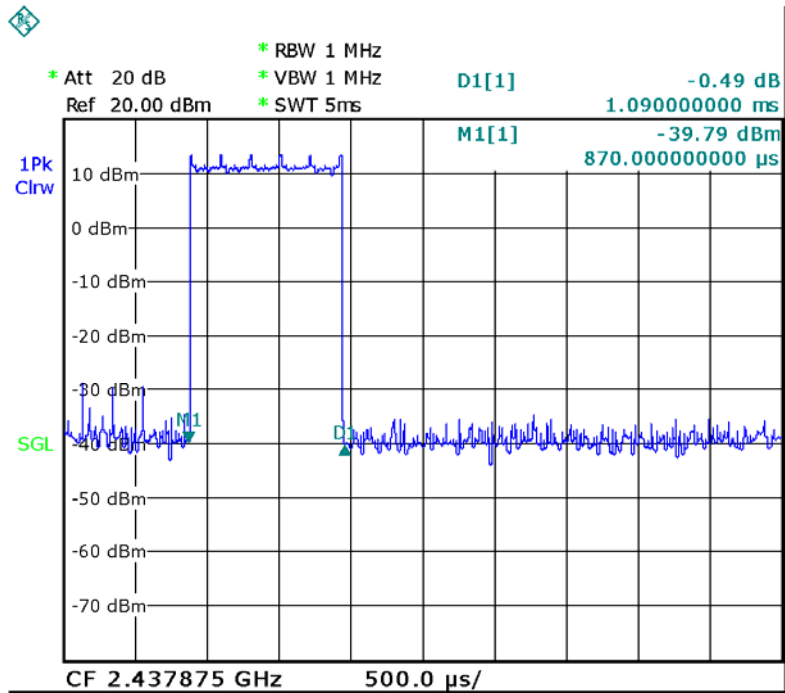


Date: 30.MAY.2013 10:47:54

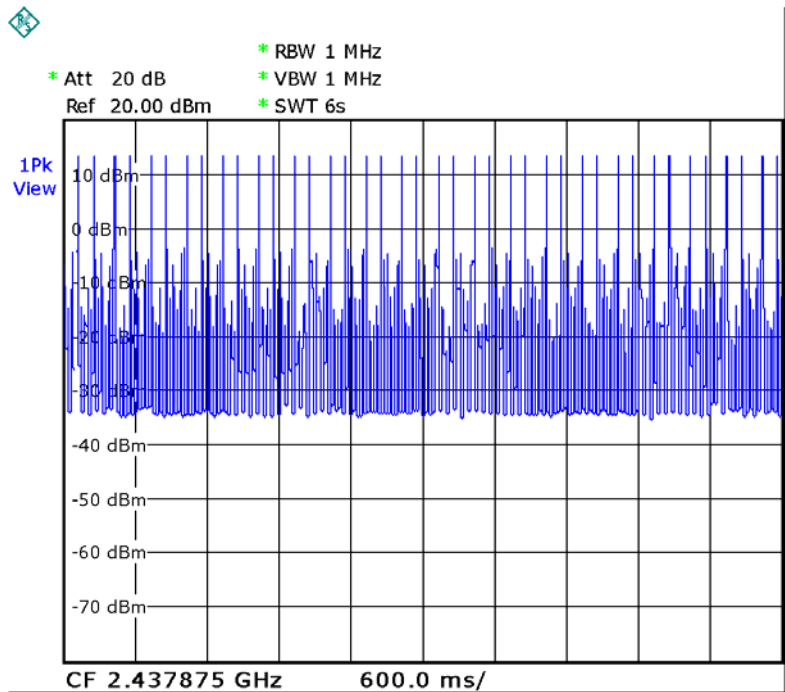


Date: 30.MAY.2013 10:50:20

High Channel

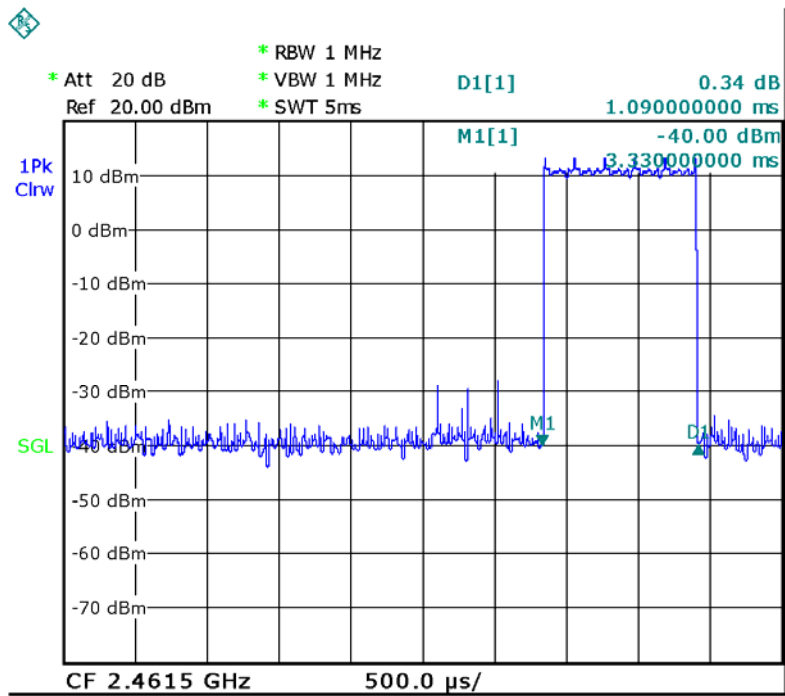

Date: 30.MAY.2013 10:49:00

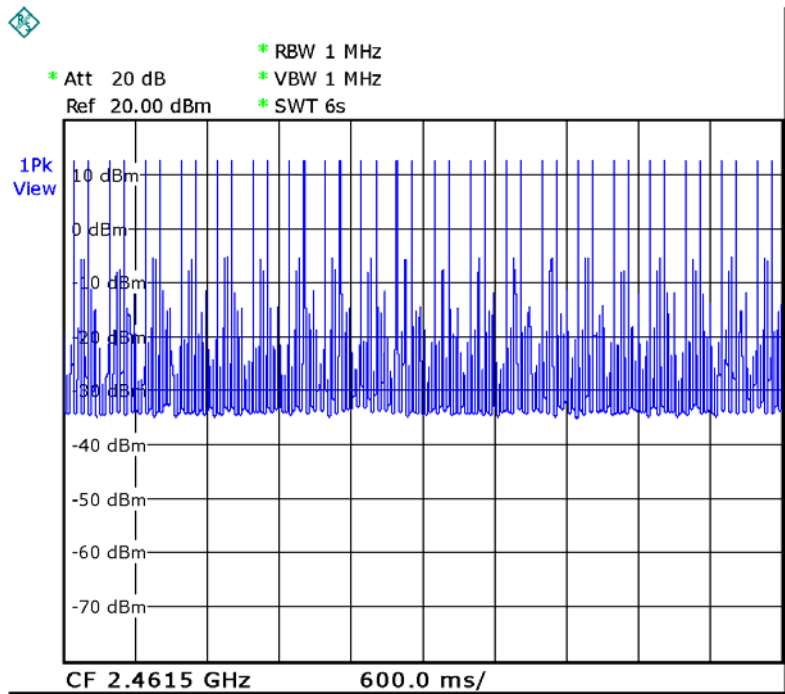

Date: 30.MAY.2013 10:50:59

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a permanent antenna, fulfill the requirement of this section.

16 RF Exposure

Test Requirement:	FCC Part 1.1307
Test Method	KDB 447498 D01 General RF Exposure Guidance v05
Test Mode:	The EUT work in test mode(Tx).

16.1 Requirments:

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

16.2 Test Result

Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)
19.815	1.278	5	10



Remark:Duty factor is 6.45%,refer to section 8 for more details.

Calculation formula: Source-based time-averaged maximum conducted output power(mW) =Conducted peak power(mW)*Duty factor


17 Photographs – Test Setup

17.1 Photograph – Radiation Spurious Emission Test Setup



Below 30MHz

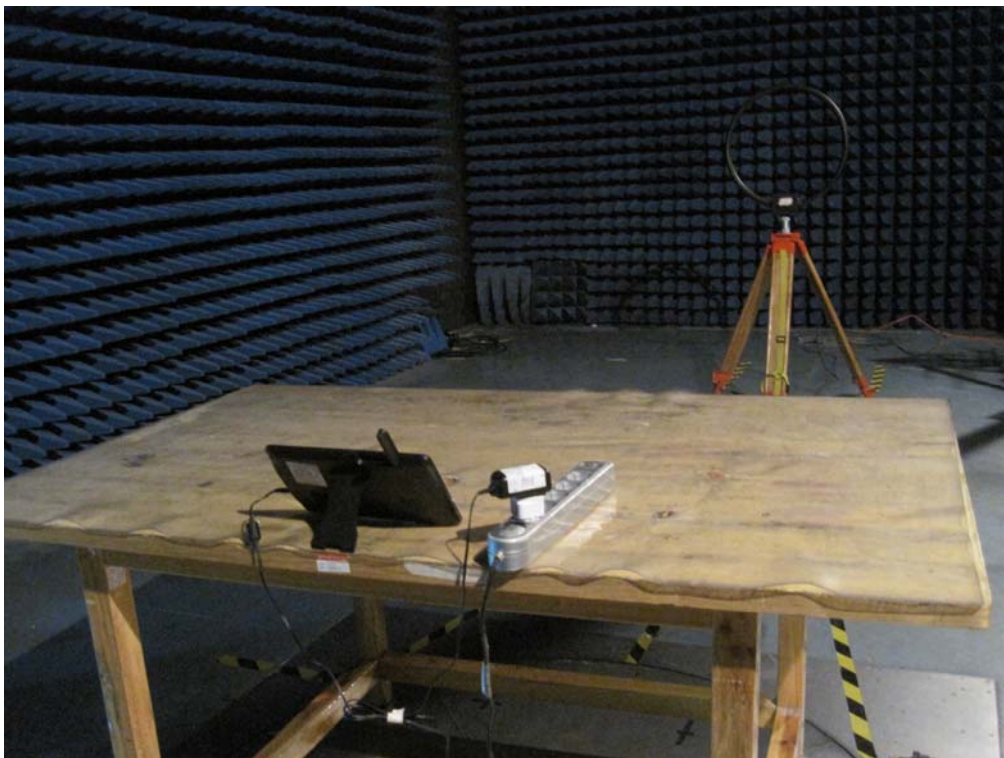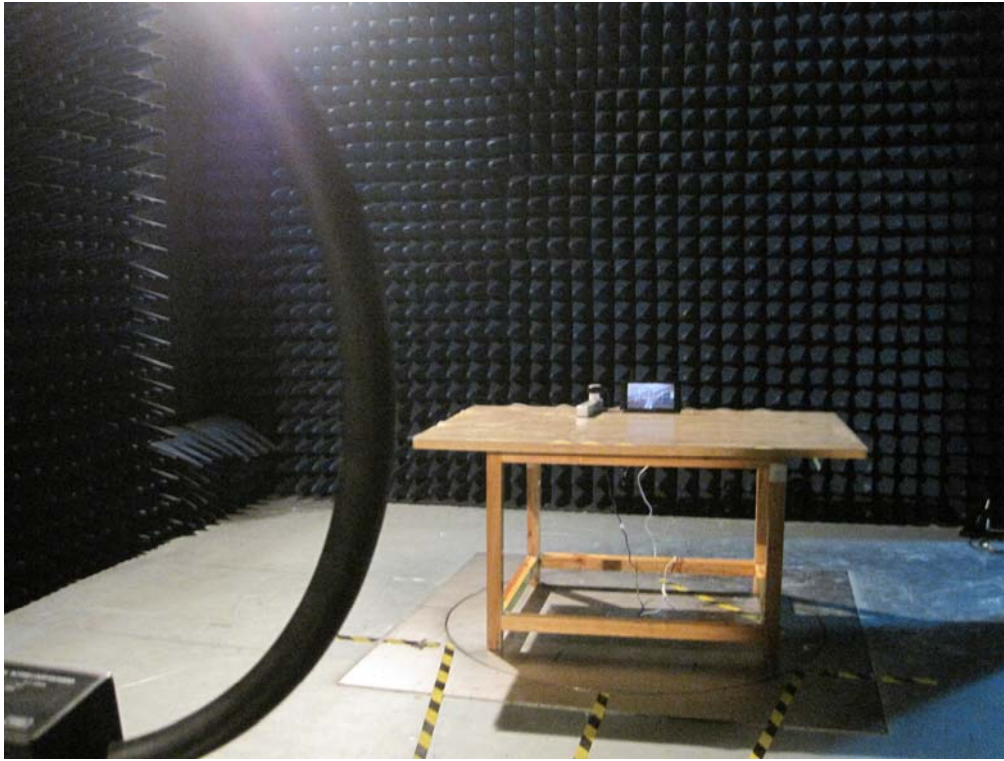

30MHz-1GHz

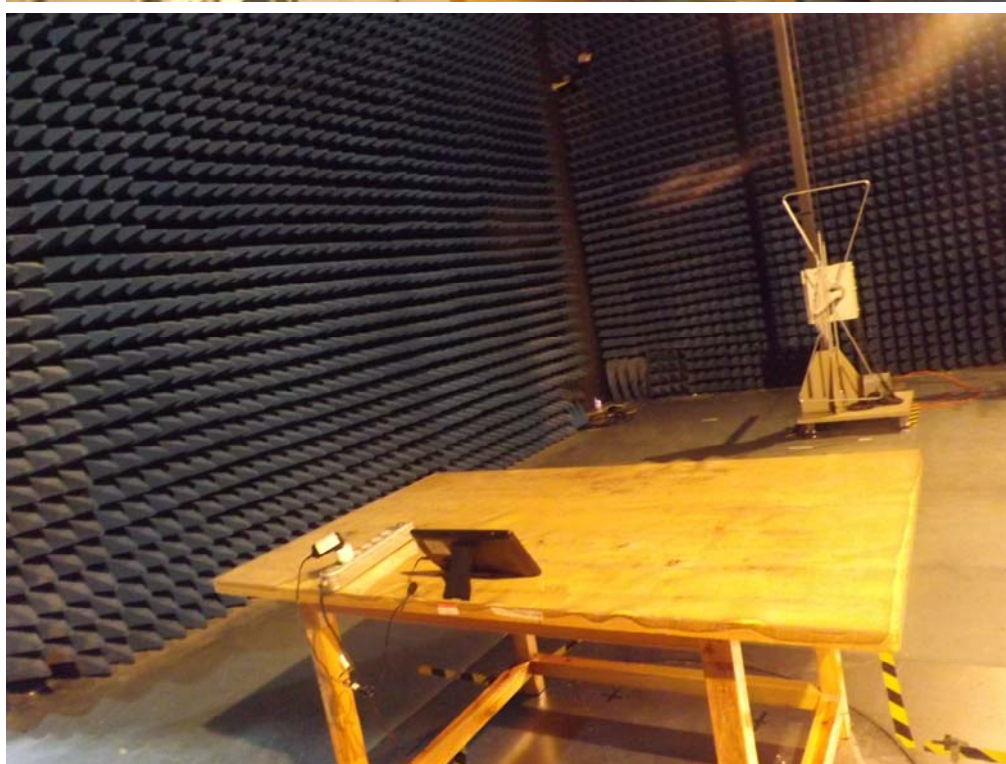

Above 1GHz

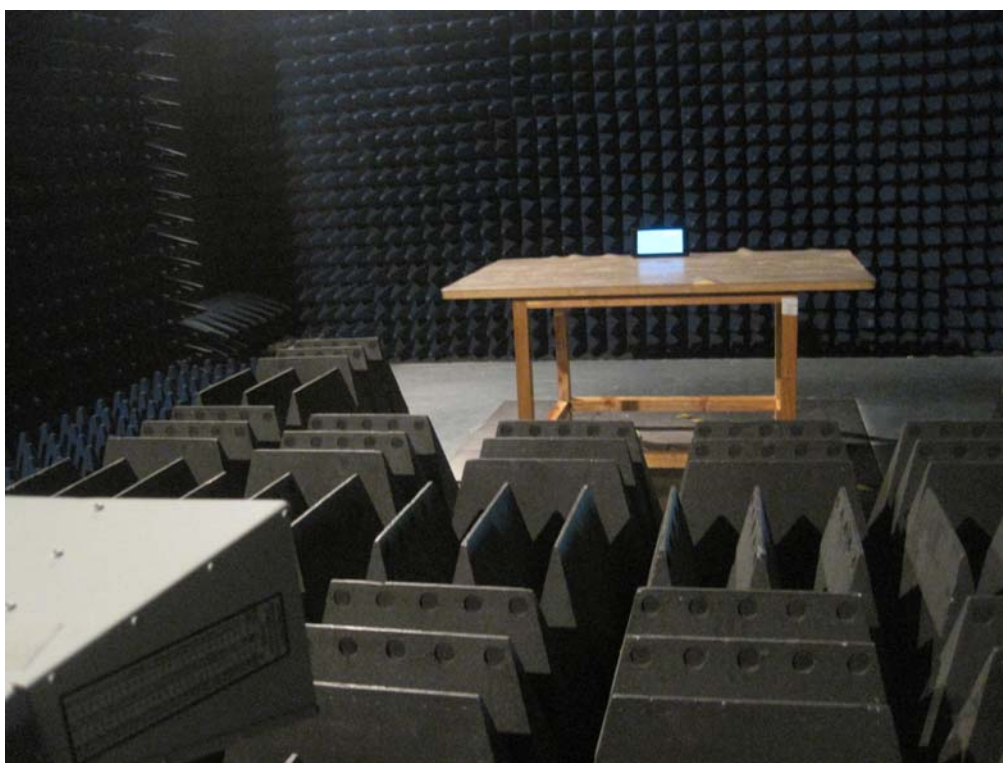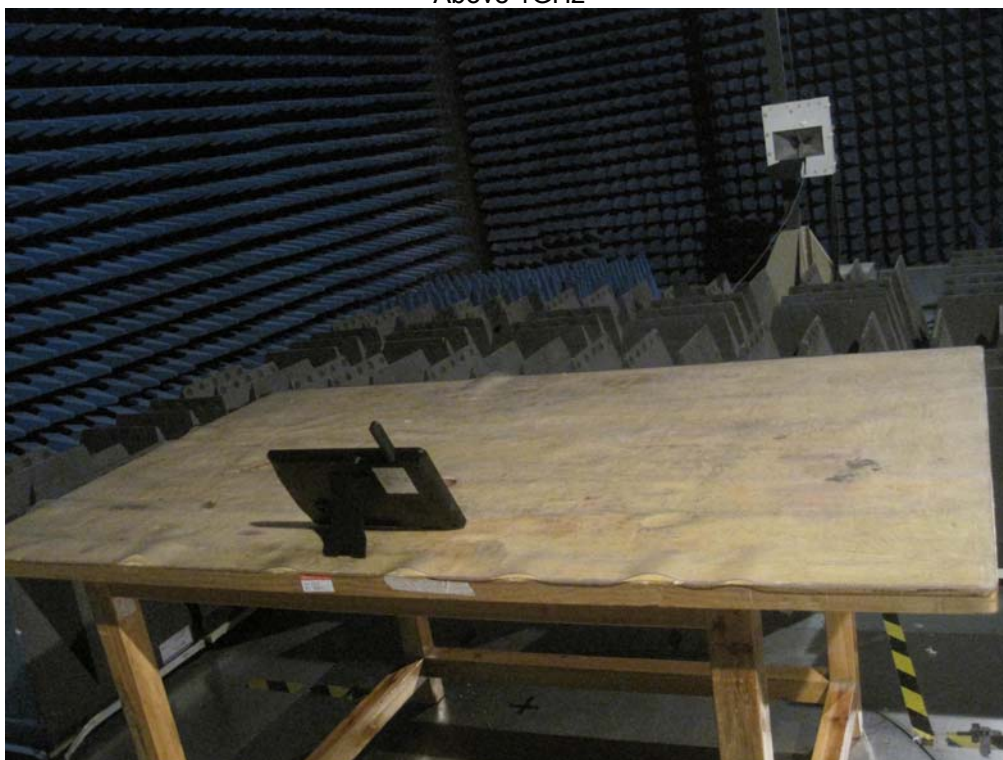

17.2 Photograph – Conducted Emission Test Setup



18 Photographs - Constructional Details


18.1 External View









18.2 EUT - Internal View

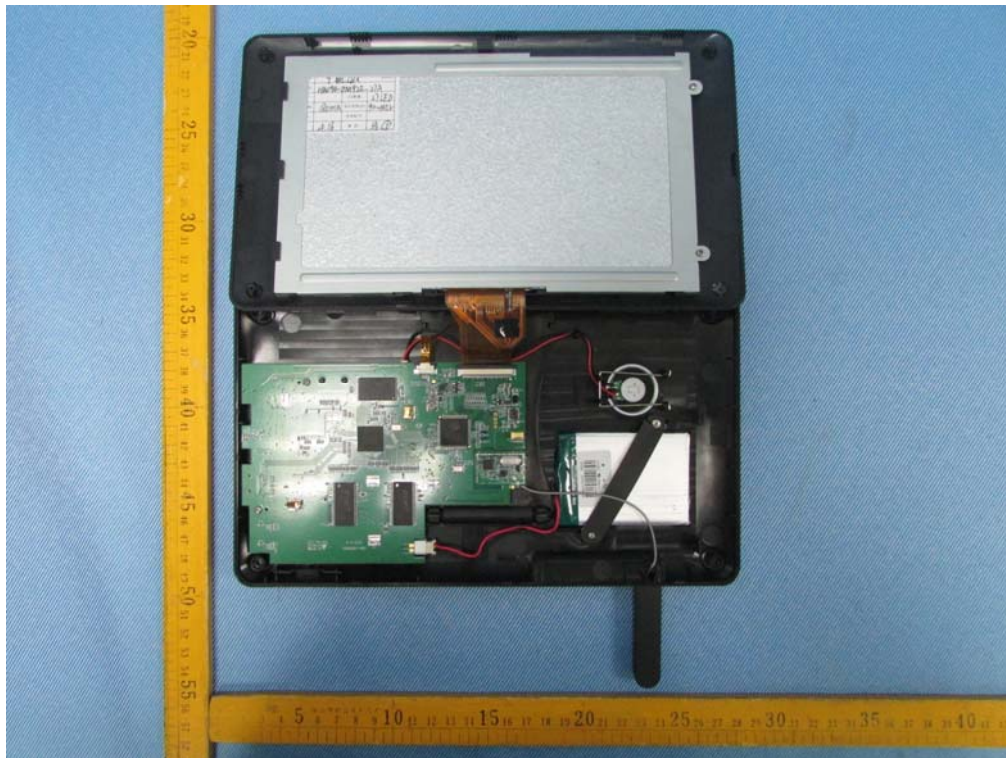

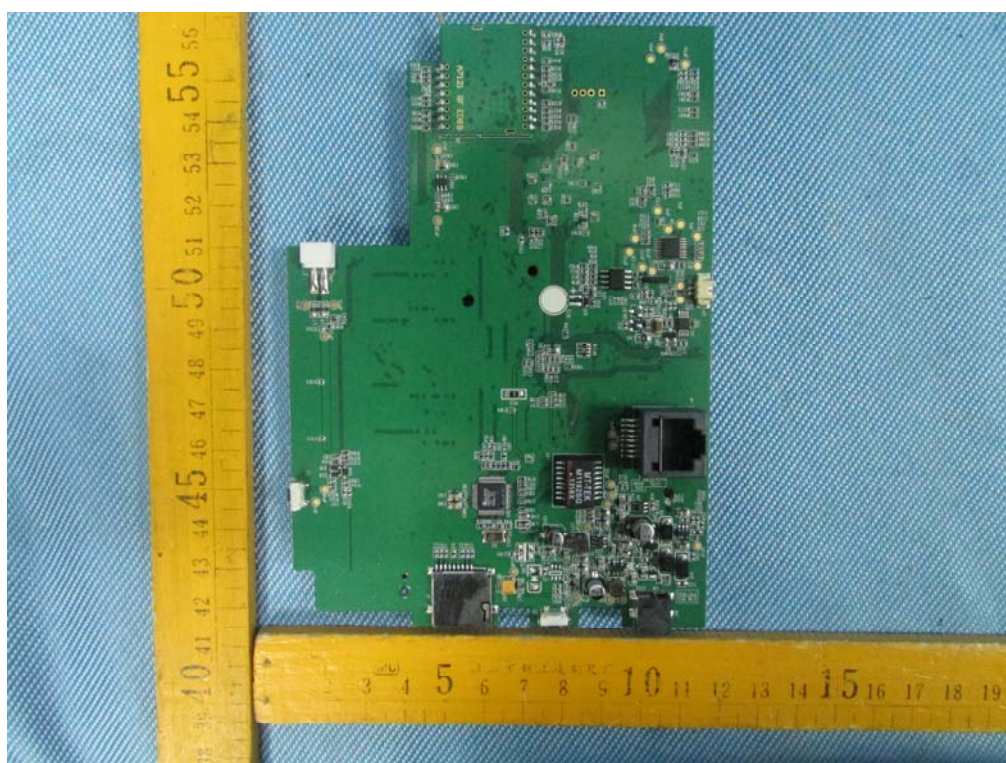



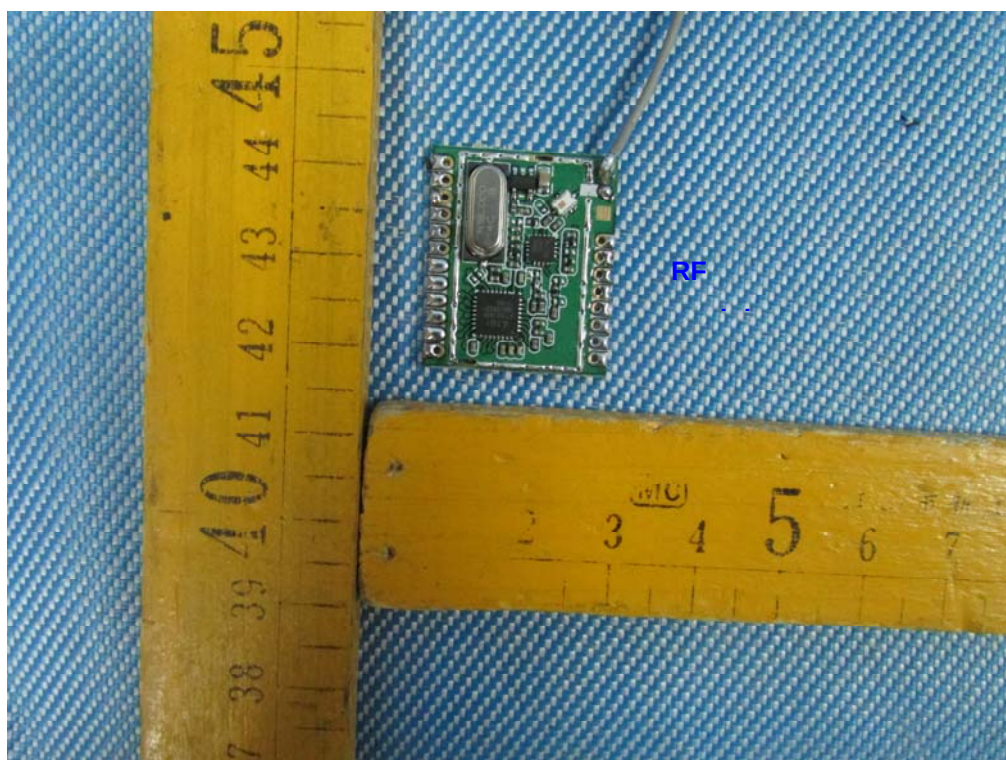

18.3 Adapter (1)- View



18.4 Adapter (2) - View



19 FCC Label


FCC Label Sample for model: G9/G95/G955/G9555/G95555/G953/G9553

FCC ID: LE2G9

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Label Location for model: G9/G95/G955/G9555/G95555/G953/G9553

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

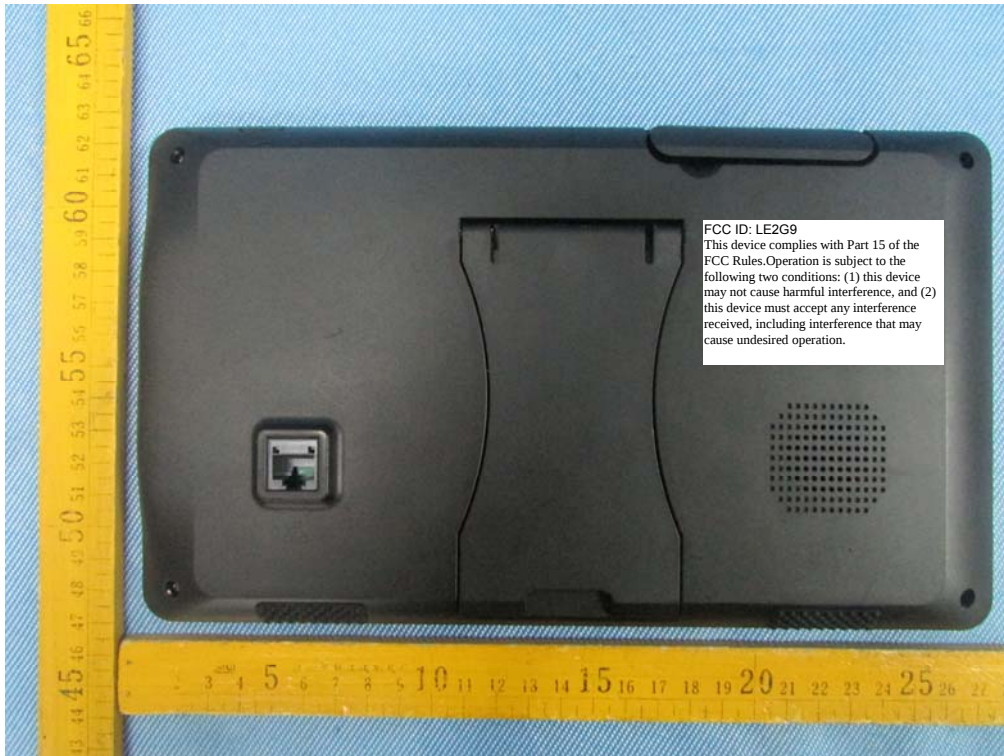

=End of report=