



FCC RADIO TEST REPORT

FCC ID : LHJ-FE4NA0210
Equipment : FE4NA0210
Brand Name : Continental
Model Name : FE4NA0210
Applicant : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd.
Manufacturer : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd.
Standard : FCC 47 CFR Part 2, 90(R)

The product was received on Nov. 04, 2019 and testing was started from Nov. 04, 2019 and completed on Feb. 20, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Site	5
1.5 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	10
3.1 Measuring Instruments	10
3.2 Conducted Output Power Measurement	11
3.3 Peak-to-Average Ratio	12
3.4 Occupied Bandwidth.....	13
3.5 Conducted Band Edge	14
3.6 Emission Mask.....	15
3.7 Conducted Spurious Emission	16
3.8 Frequency Stability	17
4 Radiated Test Items	18
4.1 Measuring Instruments	18
4.2 Effective Radiated Power	20
4.3 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation	24
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG031205C	01	Initial issue of report	Jul. 27, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §90.210 (n)	Emission Mask	Pass	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Pass	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Pass	-
4.2	§90.542 (a)(7)	Effective Radiated Power	Pass	-
4.3	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 14.21 dB at 1584.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Vivian Hsu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	FE4NA0210
Brand Name	Continental
Model Name	FE4NA0210
FCC ID	LHJ-FE4NA0210
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS
HW Version	FE4NA0210
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	790.5 MHz ~ 795.5 MHz
Rx Frequency	760.5 MHz ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	22.27 dBm
Antenna Type	Fixed External Antenna
Antenna Gain	2 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY
Test Engineer	Aking Chang	Jesse Wang and Stan Hsieh
Temperature	24~26℃	20~24℃
Relative Humidity	56~58%	48~58%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190



1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	V	V	-	-	V	V	V	V	V	V	V	V	V
Peak-to-Average Ratio	14	-	-		V	-	-	V	V	V	V		V	V	V	V
26dB and 99% Bandwidth	14	-	-	V	V	-	-	V	V	V			V	V	V	V
Conducted Band Edge	14	-	-	V	V	-	-	V	V	V	V		V	V		V
Emission Mask	14	-	-	V	V	-	-	V	V	V	V		V	V	V	V
Conducted Spurious Emission	14	-	-	V	V	-	-	V	V	V	V			V	V	V
Frequency Stability	14	-	-		V	-	-	V	V	V			V		V	
E.R.P	14	-	-	V	V	-	-	V	V	V	V			V	V	V
Radiated Spurious Emission	14	Worst Case												V	V	V
Remark	1. The mark “V ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

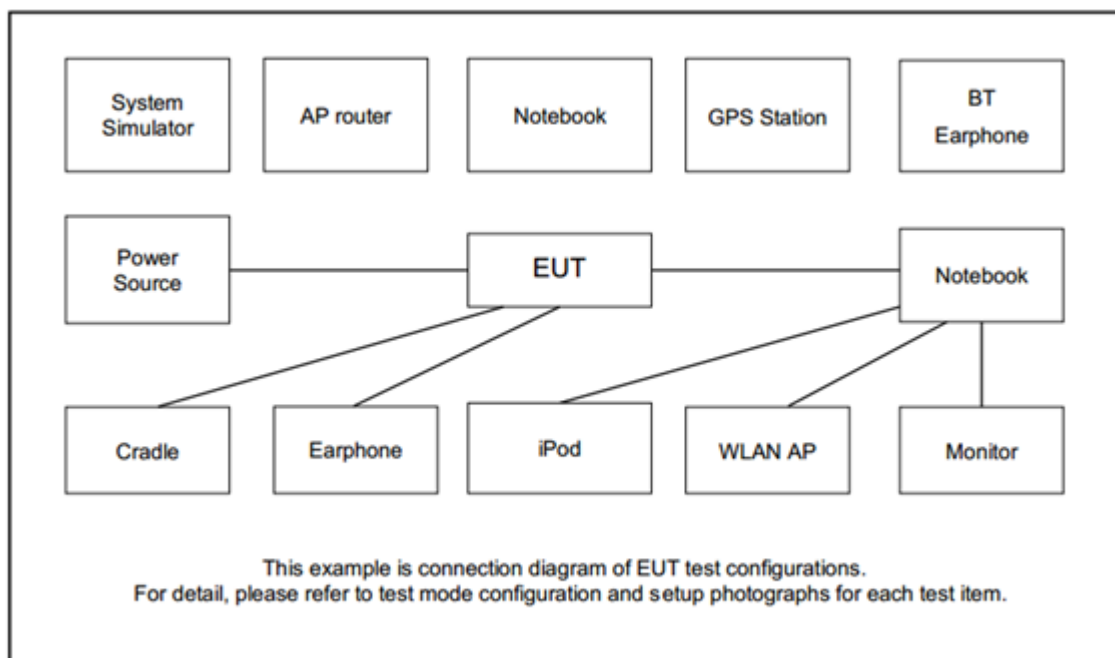

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Adapter	Continental	ATS018T-W120U	QAWA-18-12-US01	N/A	N/A
3.	LTE Dipole	Continental	SPDA24700/2700	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.5 + 10 = 14.5 \text{ (dB)}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

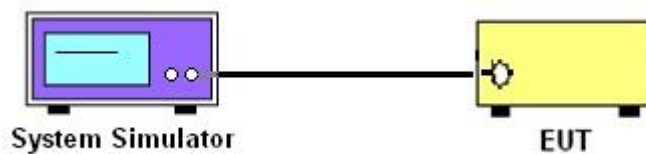

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

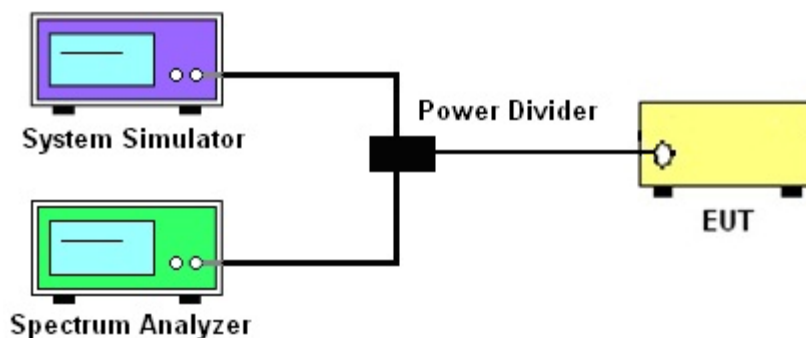

3.1.4 Frequency Stability

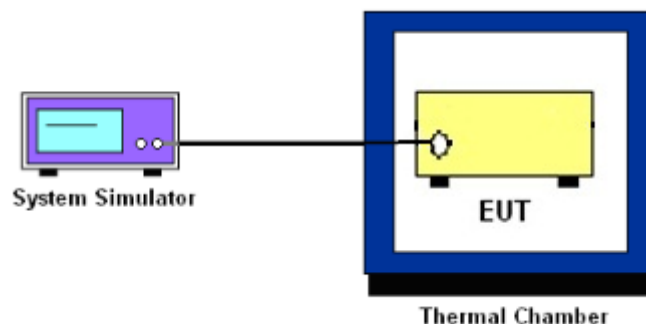

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Emission Mask

3.6.1 Description of Emissions Mask Measurement

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

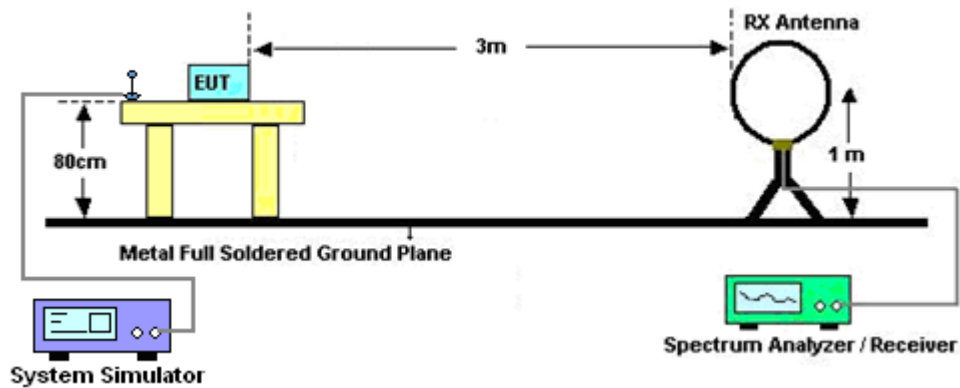

For radiated test from 30MHz to 1GHz

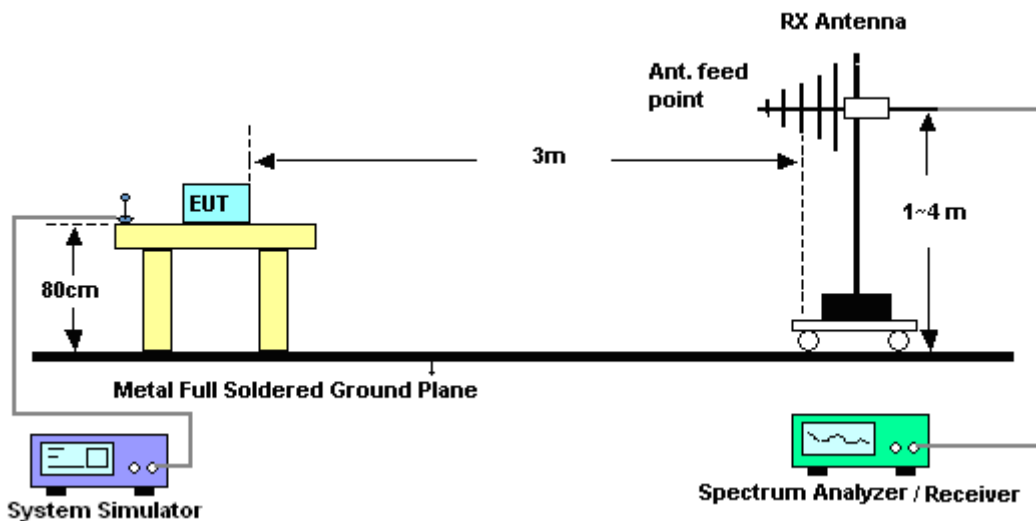

For radiated test above 1GHz

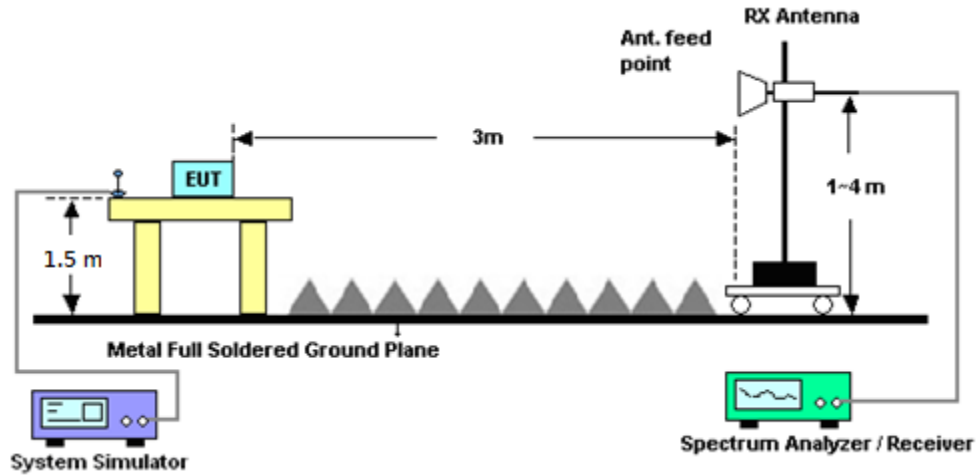

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.2 Effective Radiated Power

4.2.1 Description of the ERP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA-603-E, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. The ERP of mobile transmitters must not exceed 3 Watts for Part 90(R).

4.2.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01 v03r01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.

	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100

4.3 Radiated Spurious Emission

4.3.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station(Measure)	Anritsu	MT8821C	626200253 41	N/A	Oct. 24, 2019	Nov. 04, 2019~ Feb. 20, 2020	Oct. 23, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Aug. 13, 2019	Nov. 04, 2019~ Feb. 20, 2020	Aug. 12, 2020	Conducted (TH05-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-9307 01	N/A	Jul. 26, 2019	Nov. 04, 2019~ Feb. 20, 2020	Jul. 25, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	Nov. 04, 2019~ Feb. 20, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 30, 2019	Dec. 24, 2019~ Dec. 26, 2019	Apr. 29, 2020	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 06, 2019	Dec. 24, 2019~ Dec. 26, 2019	Dec. 05, 2020	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz~26.5GHz	Jan. 23, 2019	Dec. 24, 2019~ Dec. 26, 2019	Jan. 22, 2020	Radiation (03CH07-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 28, 2019	Dec. 24, 2019~ Dec. 26, 2019	Oct. 27, 2020	Radiation (03CH07-HY)
Hygrometer	Testo	HTC-2	1	N/A	Jun. 17, 2019	Dec. 24, 2019~ Dec. 26, 2019	Jun. 16, 2020	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 24, 2019	Dec. 24, 2019~ Dec. 26, 2019	Apr. 23, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 20, 2019	Dec. 24, 2019~ Dec. 26, 2019	May 19, 2020	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Nov. 01, 2019	Dec. 24, 2019~ Dec. 26, 2019	Oct. 31, 2020	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1GHz High Pass Filter	Nov. 01, 2019	Dec. 24, 2019~ Dec. 26, 2019	Oct. 31, 2020	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3GHz High Pass Filter	Nov. 01, 2019	Dec. 24, 2019~ Dec. 26, 2019	Oct. 31, 2020	Radiation (03CH07-HY)
Filter	Wainwright	WHNX7.0-26. 5G-6SS	SN7	7GHz High Pass Filter	Aug. 22, 2019	Dec. 24, 2019~ Dec. 26, 2019	Aug. 21, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/ 4, MY24971/ 4, MY15682/ 4	30MHz~1GHz	Feb. 26, 2019	Dec. 24, 2019~ Dec. 26, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/ 4, MY24971/ 4, MY15682/ 4	1GHz~18GHz	Feb. 26, 2019	Dec. 24, 2019~ Dec. 26, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 26, 2019	Dec. 24, 2019~ Dec. 26, 2019	Feb. 25, 2020	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Dec. 24, 2019~ Dec. 26, 2019	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208 368	Control Ant Mast	N/A	Dec. 24, 2019~ Dec. 26, 2019	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Dec. 24, 2019~ Dec. 26, 2019	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Dec. 24, 2019~ Dec. 26, 2019	N/A	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Dec. 24, 2019~ Dec. 26, 2019	Oct. 11, 2020	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz~40GHz	May 14, 2019	Dec. 24, 2019~ Dec. 26, 2019	May 13, 2020	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Nov. 26, 2019	Dec. 24, 2019~ Dec. 26, 2019	Nov. 25, 2020	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Dec. 24, 2019~ Dec. 26, 2019	Dec. 12, 2020	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Sep. 25, 2019	Dec. 24, 2019~ Dec. 26, 2019	Sep. 24, 2020	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	Dec. 24, 2019~ Dec. 26, 2019	Aug. 26, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	805040046 56H	N/A	N/A	Dec. 24, 2019~ Dec. 26, 2019	N/A	Radiation (03CH07-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.23
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.63
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.70
--	------



Appendix A. Test Results of Conducted Test


Conducted Output Power(Average power)

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		22.27	
10	1	25			22.13	
10	1	49			22.02	
10	25	0			21.30	
10	25	12			21.28	
10	25	25			21.22	
10	50	0			21.24	
10	1	0	16-QAM	-	21.54	-
10	1	25			21.41	
10	1	49			21.30	
10	25	0			20.28	
10	25	12			20.29	
10	25	25			20.20	
10	50	0			20.28	
10	1	0	64-QAM		20.52	
10	1	25			20.34	
10	1	49			20.31	
10	25	0			19.30	
10	25	12			19.31	
10	25	25			19.28	
10	50	0			19.25	
5	1	0	QPSK	22.20	22.18	22.09
5	1	12		22.21	22.20	22.20
5	1	24		22.22	22.21	22.19
5	12	0		21.07	21.30	21.21
5	12	7		21.09	21.34	21.30
5	12	13		21.11	21.36	21.34
5	25	0		21.06	21.32	21.26
5	1	0	16-QAM	21.24	21.42	21.33
5	1	12		21.21	21.46	21.44
5	1	24		21.19	21.46	21.50
5	12	0		20.06	20.30	20.23
5	12	7		20.11	20.35	20.31
5	12	13		20.06	20.38	20.34
5	25	0		20.06	20.34	20.28
5	1	0	64-QAM	20.18	20.41	20.29
5	1	12		20.20	20.42	20.39
5	1	24		20.12	20.43	20.42
5	12	0		19.06	19.32	19.26
5	12	7		19.12	19.39	19.33
5	12	13		19.14	19.41	19.36
5	25	0		19.06	19.31	19.25


LTE Band 14

Peak-to-Average Ratio


Mode	LTE Band 14 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	3.74	5.16	4.41	5.91	
Highest CH	-	-	-	-	
Mode	LTE Band 14 / 10MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	PASS
Middle CH	5.36	6.35	-	-	
Highest CH	-	-	-	-	

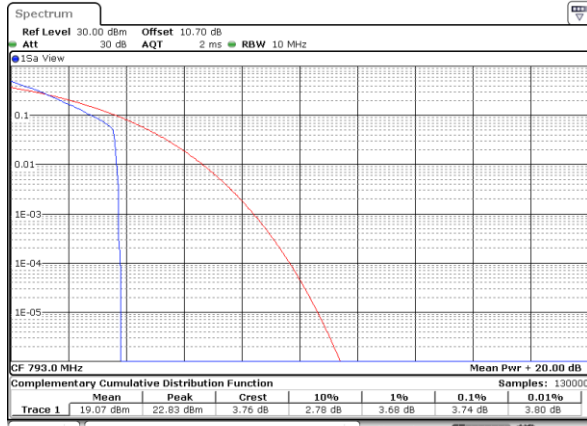LTE Band 14 / 10MHz / QPSK
Middle Channel/ 1RB


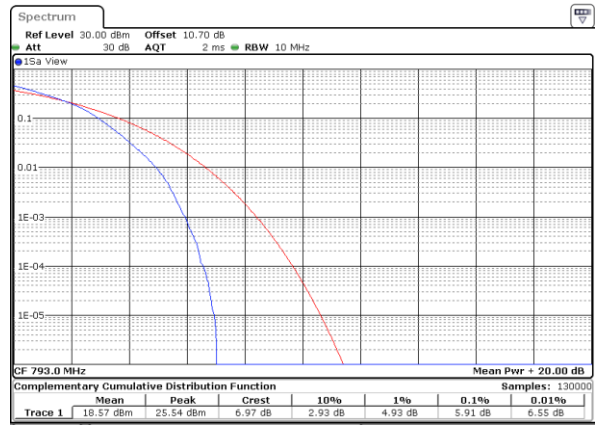
Date: 12.NOV.2019 15:21:15

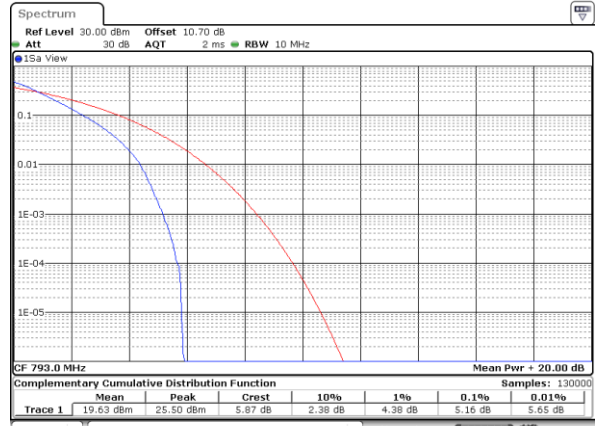Middle Channel / Full RB


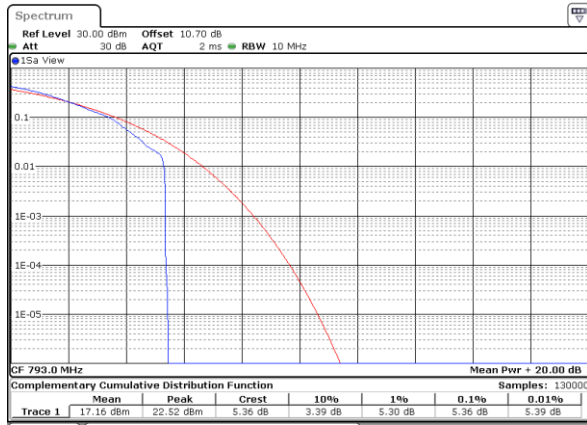
Date: 12.NOV.2019 15:21:25

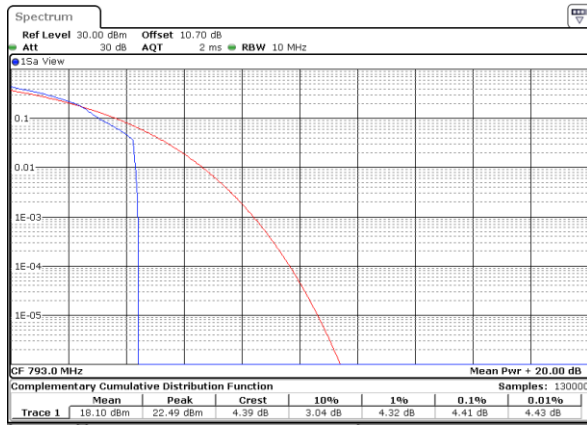LTE Band 14 / 10MHz / 16QAM
Middle Channel/ 1RB


Date: 12.NOV.2019 15:18:56

Middle Channel / Full RB


Date: 12.NOV.2019 15:21:05

LTE Band 14 / 10MHz / 64QAM
Middle Channel/ 1RB


Date: 12.NOV.2019 15:21:36

Middle Channel / Full RB


Date: 12.NOV.2019 15:21:46


**26dB Bandwidth**

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.91	4.90	-	-	-	-	-	-
Middle CH	-	-	-	-	4.92	4.81	9.75	9.75	-	-	-	-
Highest CH	-	-	-	-	4.92	4.94	-	-	-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.75	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.83	-	9.79	-	-	-	-	-
Highest CH	-	-	-	-	4.91	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

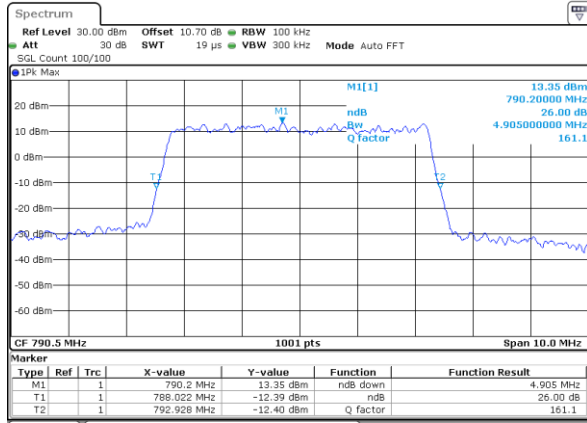


Date: 12.NOV.2019 15:14:10

Lowest Channel / 5MHz / 16QAM

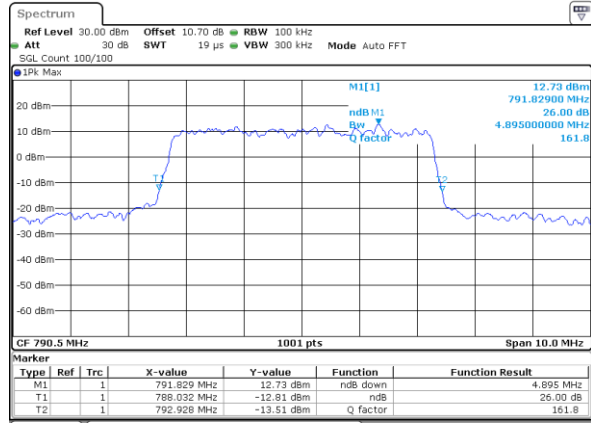


Date: 12.NOV.2019 15:13:58

Middle Channel / 5MHz / QPSK

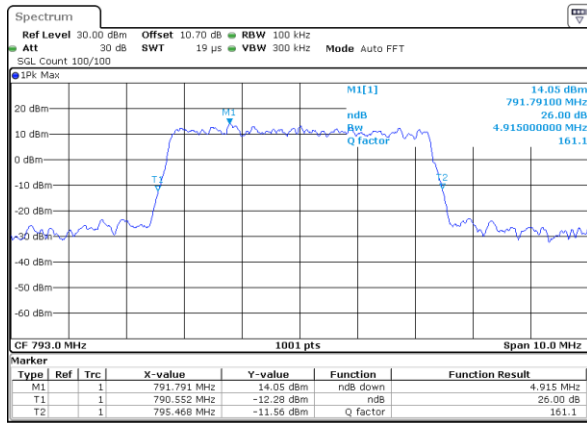


Date: 12.NOV.2019 15:14:22

Middle Channel / 5MHz / 16QAM

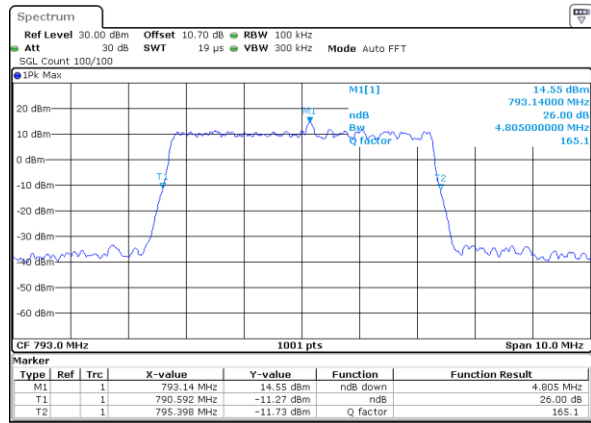


Date: 12.NOV.2019 15:14:33

Highest Channel / 5MHz / QPSK

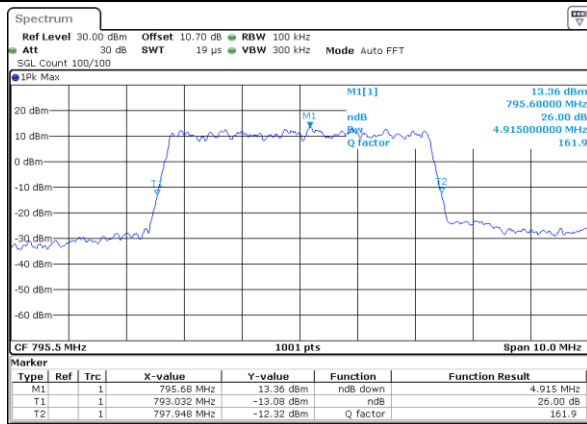

Date: 12.NOV.2019 15:16:32

Highest Channel / 5MHz / 16QAM

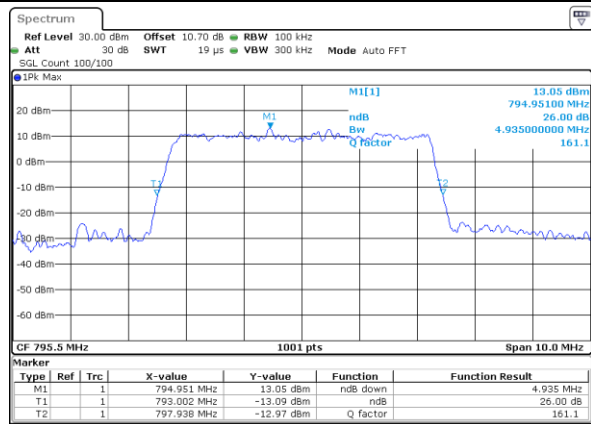


Date: 12.NOV.2019 15:16:20




LTE Band 14

Middle Channel / 10MHz / QPSK

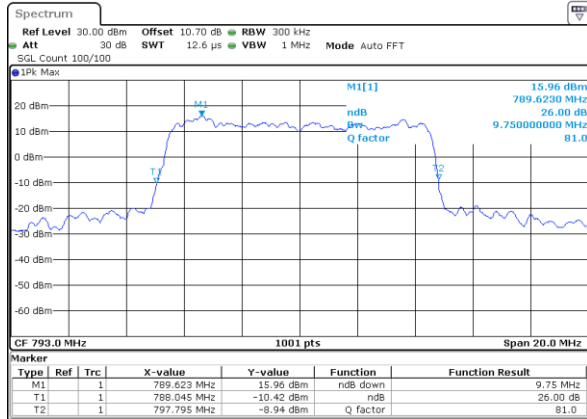

Date: 12,NOV,2019 15:17:42

Middle Channel / 10MHz / 16QAM

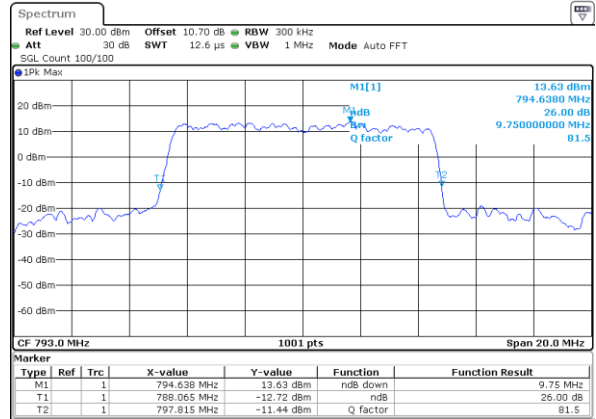


Date: 12,NOV,2019 15:17:31




LTE Band 14


Lowest Channel / 5MHz / 64QAM

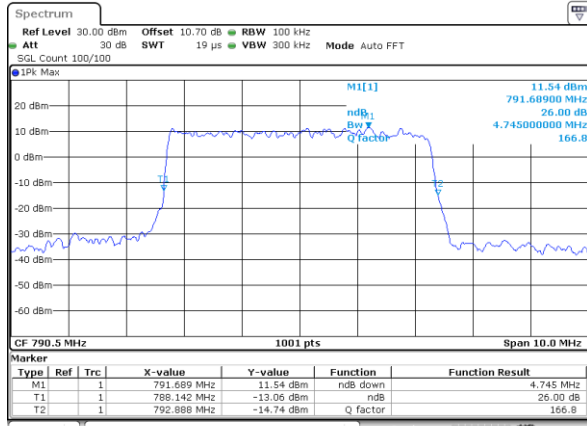


Middle Channel / 5MHz / 64QAM

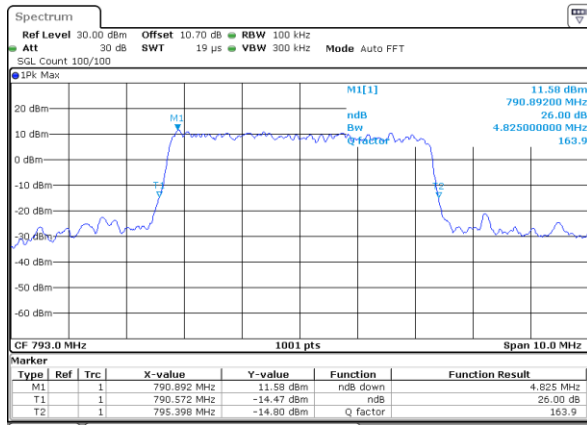

Middle Channel / 10MHz / 64QAM

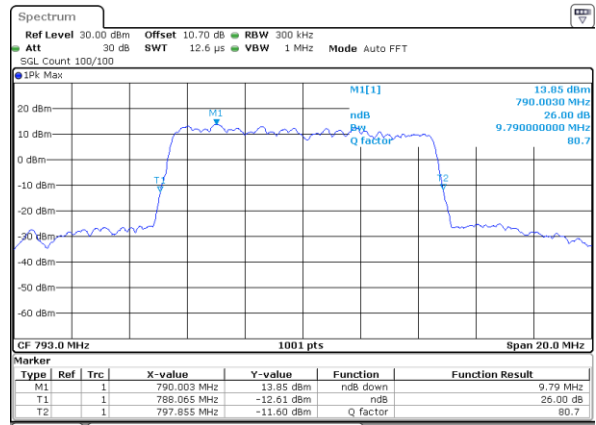

Highest Channel / 5MHz / 64QAM

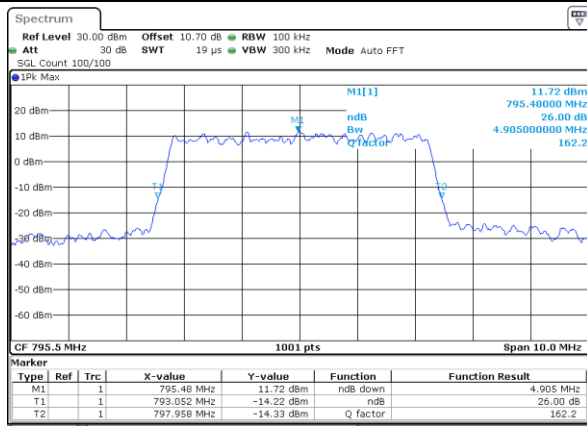


**Occupied Bandwidth**

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.48	4.47	-	-	-	-	-	-
Middle CH	-	-	-	-	4.48	4.50	9.03	9.01	-	-	-	-
Highest CH	-	-	-	-	4.49	4.48	-	-	-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.50	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.48	-	9.07	-	-	-	-	-
Highest CH	-	-	-	-	4.51	-	-	-	-	-	-	-




LTE Band 14


Lowest Channel / 5MHz / QPSK

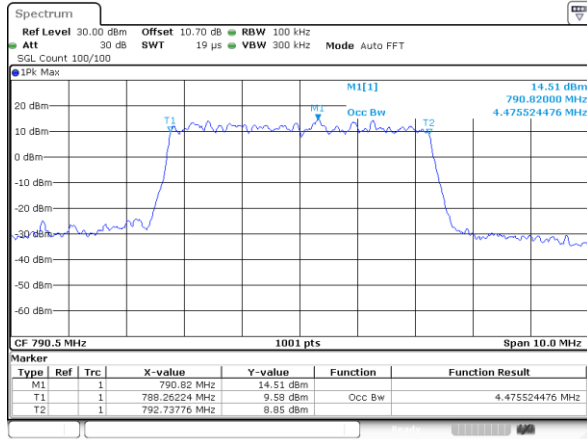


Lowest Channel / 5MHz / 16QAM

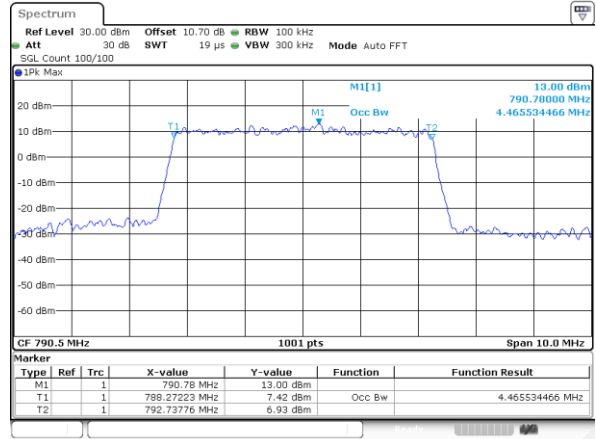


Middle Channel / 5MHz / QPSK

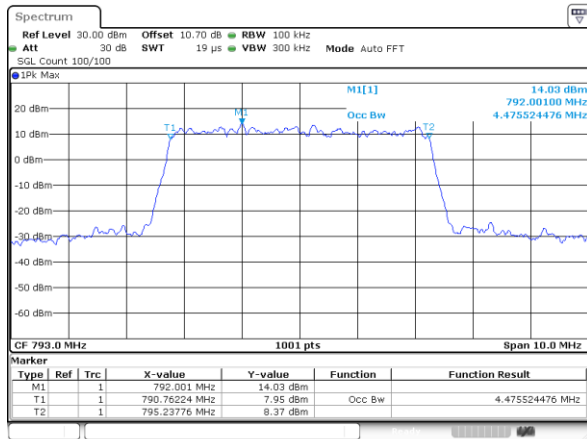


Middle Channel / 5MHz / 16QAM

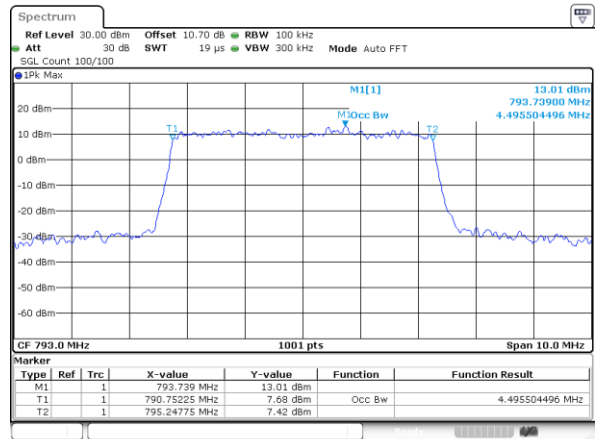

Highest Channel / 5MHz / QPSK

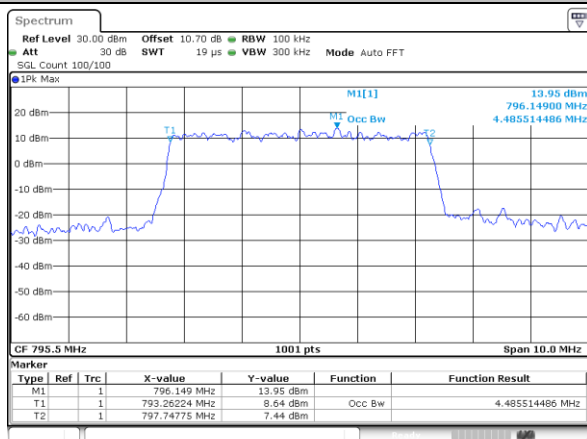


Highest Channel / 5MHz / 16QAM

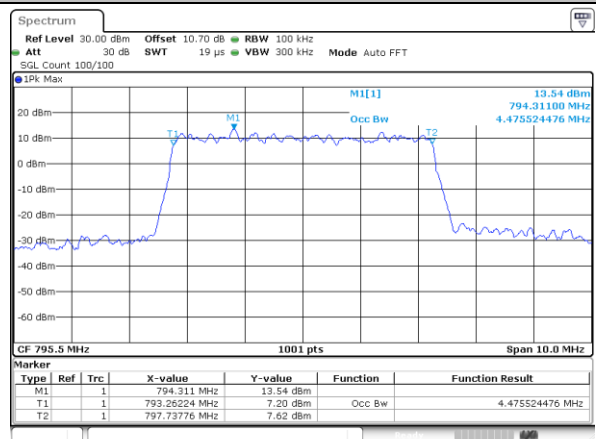




LTE Band 14

Middle Channel / 10MHz / QPSK

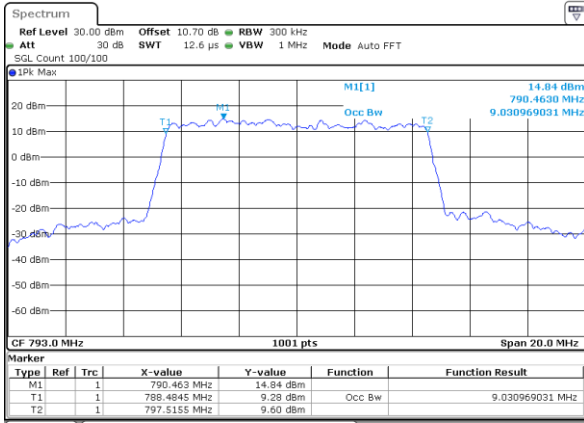

Date: 12,NOV,2019 15:16:45

Middle Channel / 10MHz / 16QAM

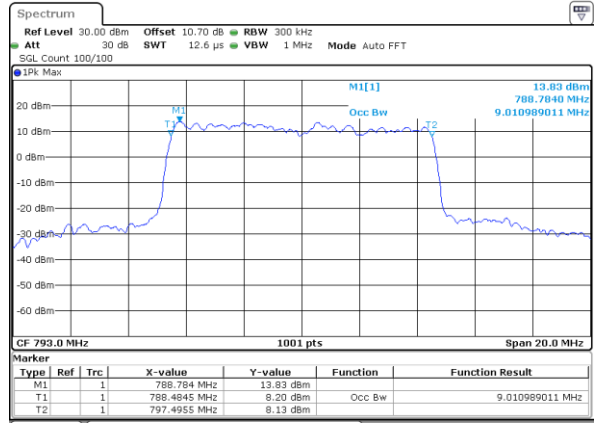


Date: 12,NOV,2019 15:16:56




LTE Band 14

Lowest Channel / 5MHz / 64QAM

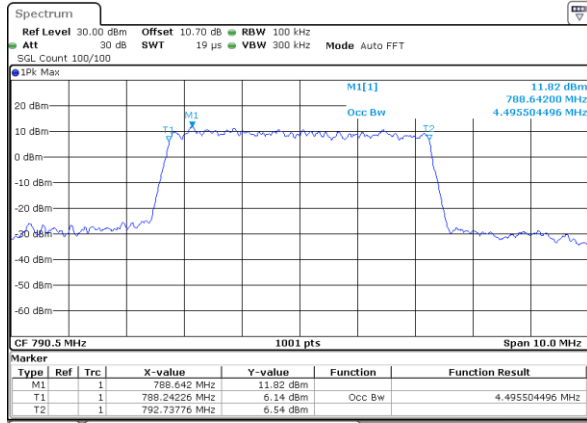


Date: 12.NOV.2019 15:13:33

Middle Channel / 5MHz / 64QAM

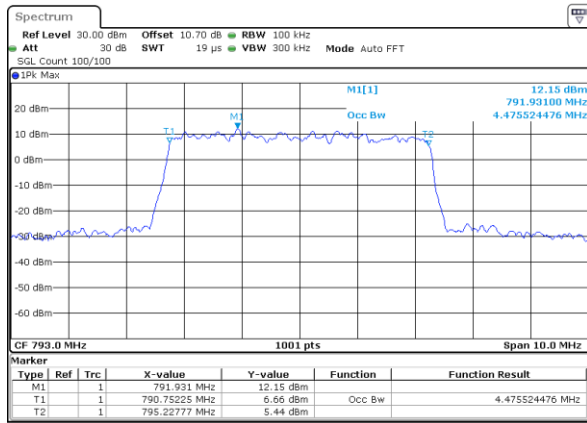


Date: 12.NOV.2019 15:14:56

Middle Channel / 10MHz / 64QAM




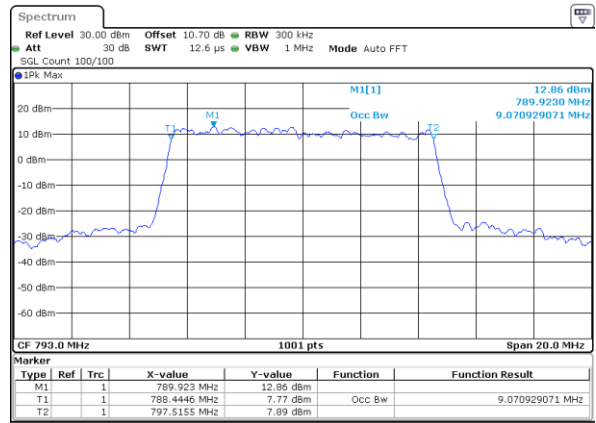


Date: 12.NOV.2019 15:17:08

Highest Channel / 5MHz / 64QAM

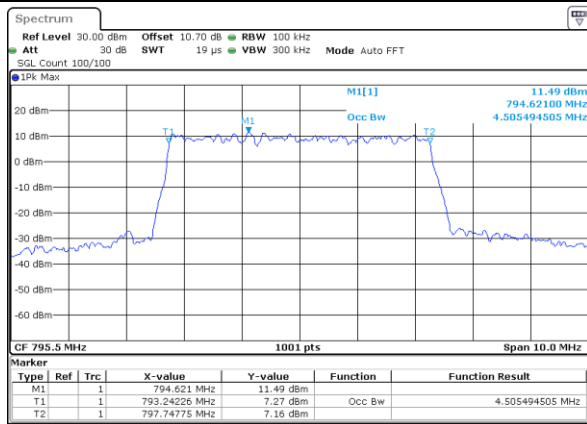


Date: 12.NOV.2019 15:15:56

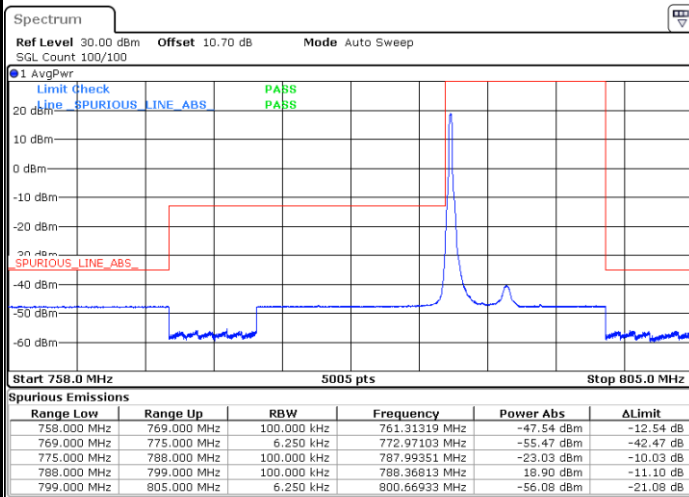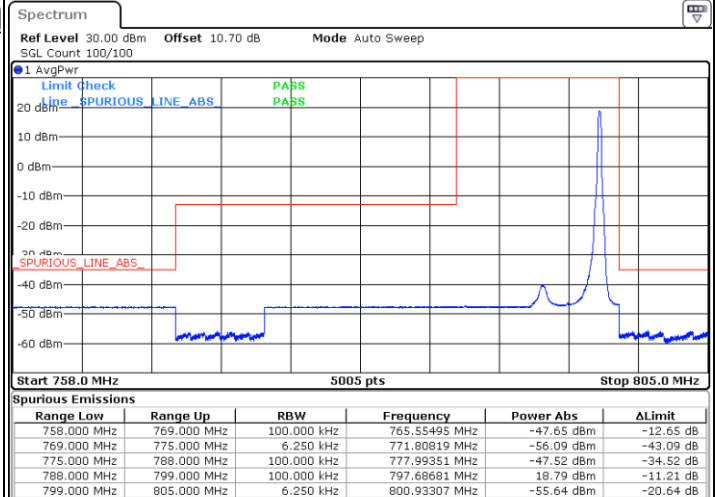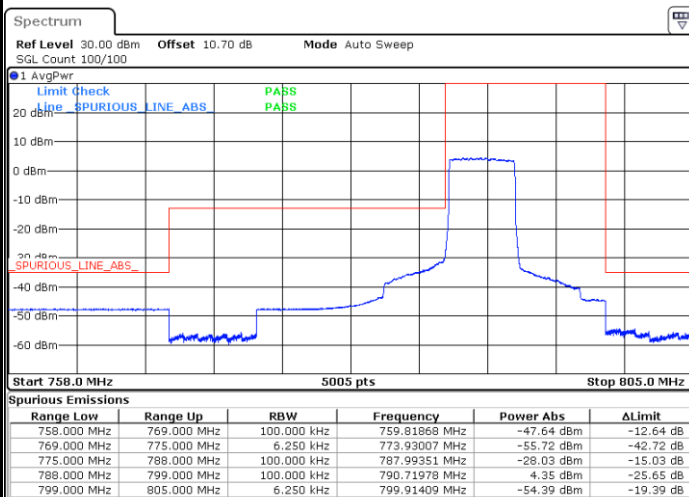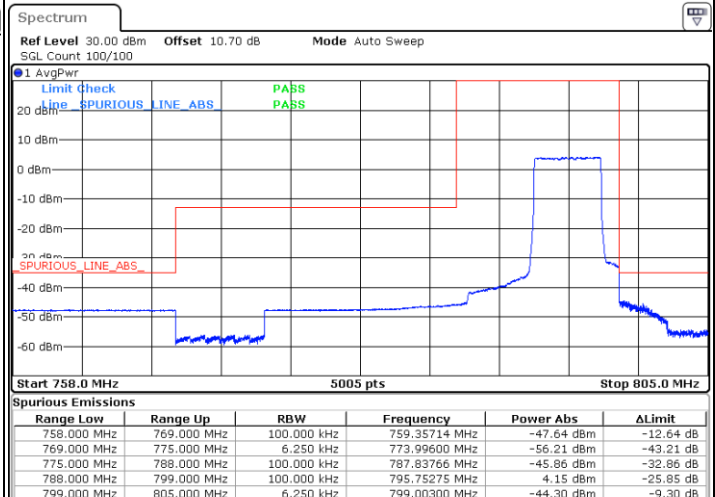**Conducted Band Edge****LTE Band 14 / 5MHz / QPSK****Lowest Band Edge / 1 RB****Highest Band Edge / 1 RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 14 / 5MHz / 16QAM

Lowest Band Edge /1 RB

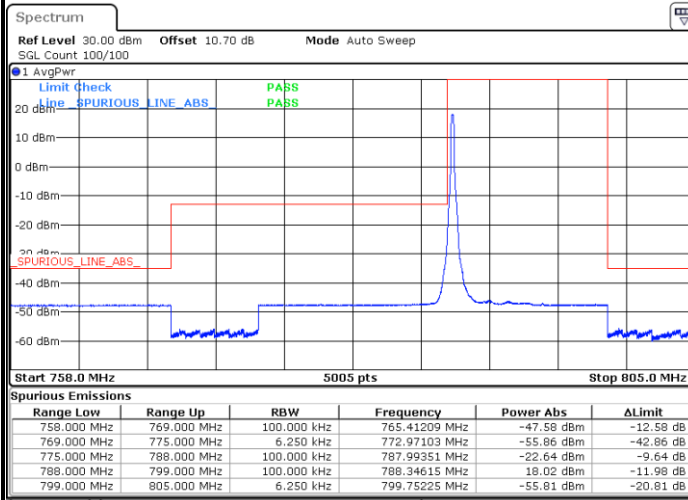


Date: 12.NOV.2019 15:54:14

Highest Band Edge / 1 RB

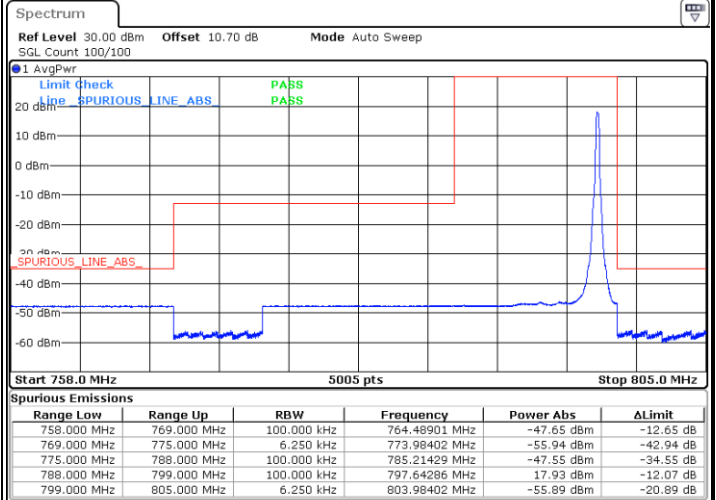


Date: 12.NOV.2019 16:04:39

Lowest Band Edge / Full RB

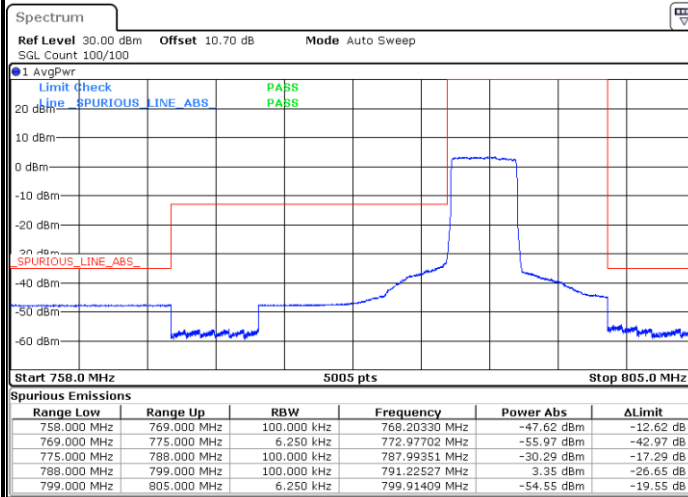

Date: 12.NOV.2019 15:59:27

Highest Band Edge / Full RB

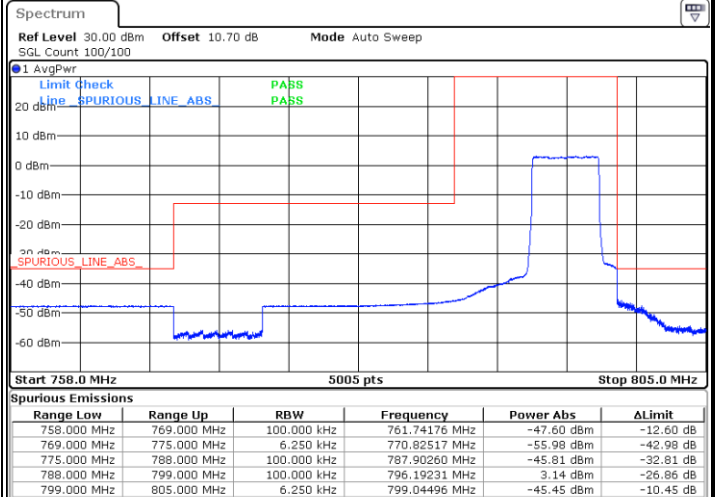


Date: 12.NOV.2019 16:09:51




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

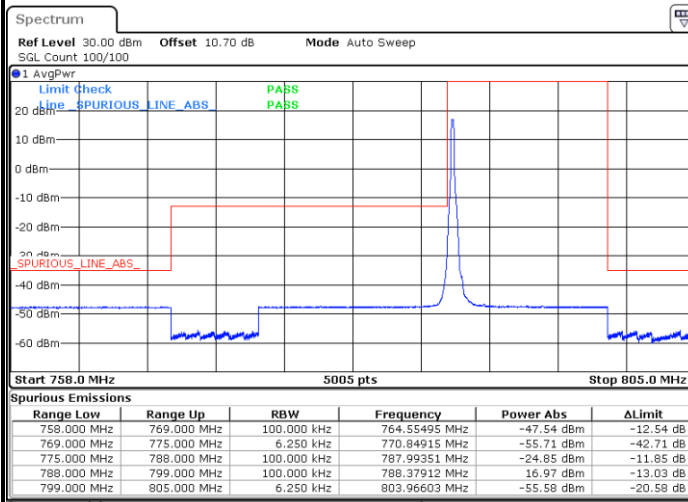


Date: 12.NOV.2019 15:55:58

Highest Band Edge / 1 RB

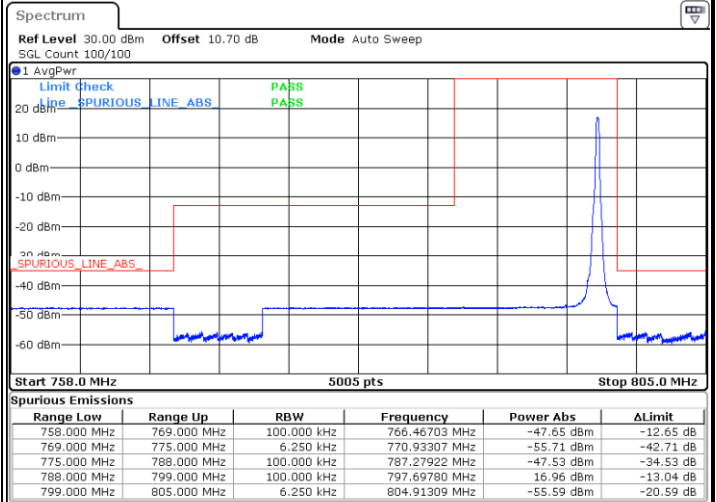


Date: 12.NOV.2019 16:06:23

Lowest Band Edge / Full RB

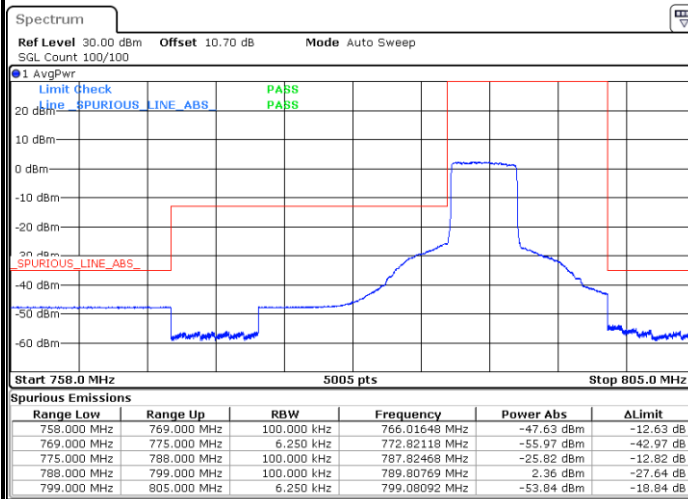

Date: 12.NOV.2019 16:01:11

Highest Band Edge / Full RB

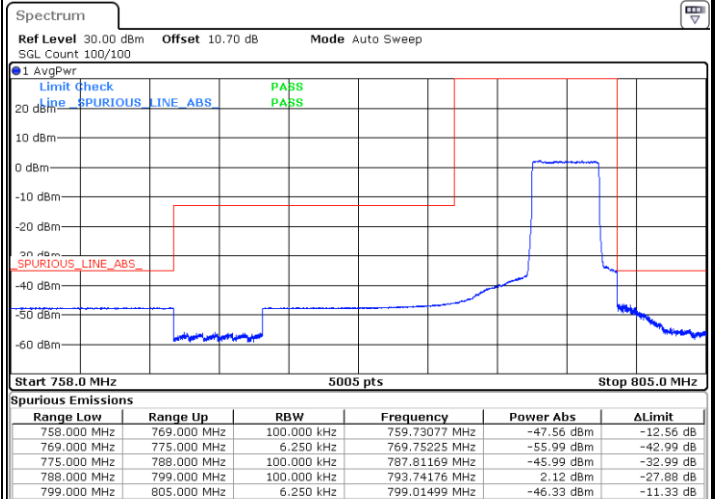


Date: 12.NOV.2019 16:11:35




LTE Band 14 / 10MHz / QPSK


Lowest Band Edge / 1 RB

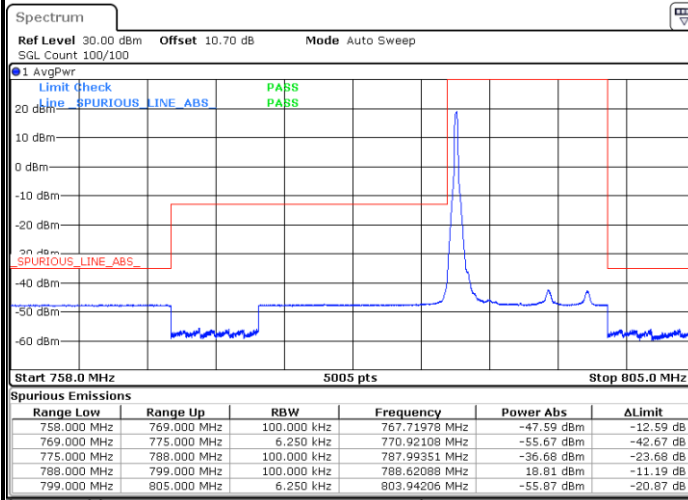

Highest Band Edge / 1 RB

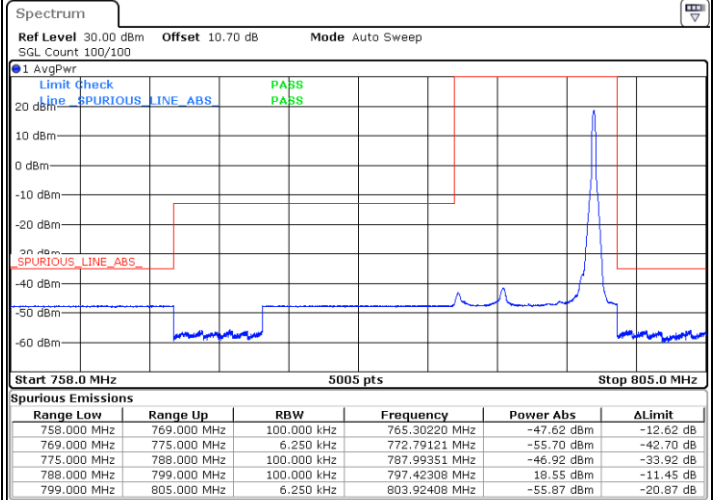


Band Edge / Full RB

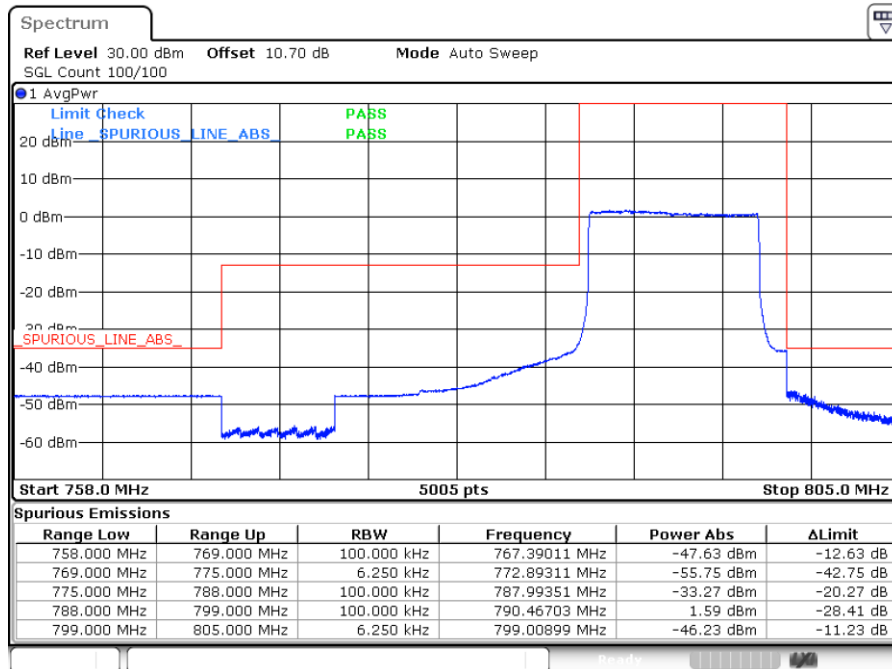




LTE Band 14 / 10MHz / 16QAM


Lowest Band Edge / 1 RB

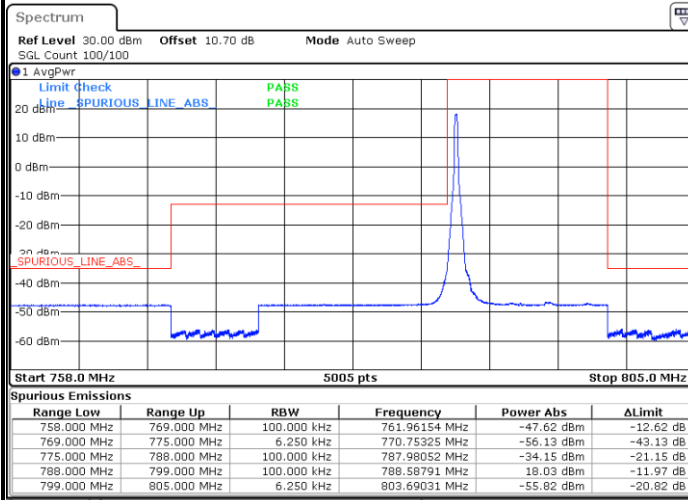

Highest Band Edge / 1 RB

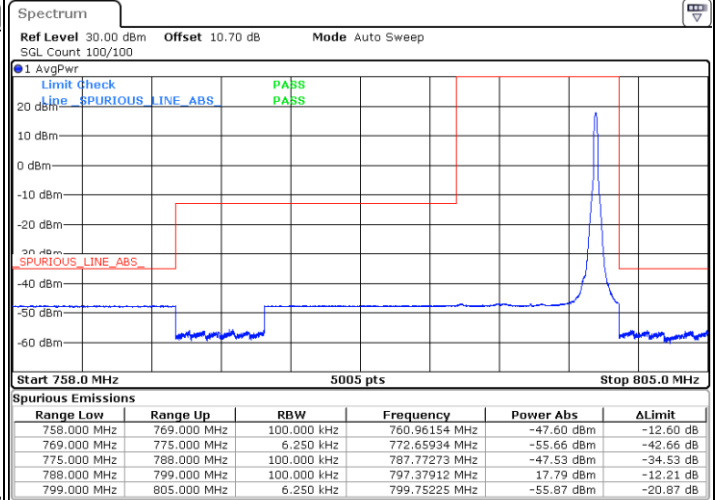


Band Edge / Full RB

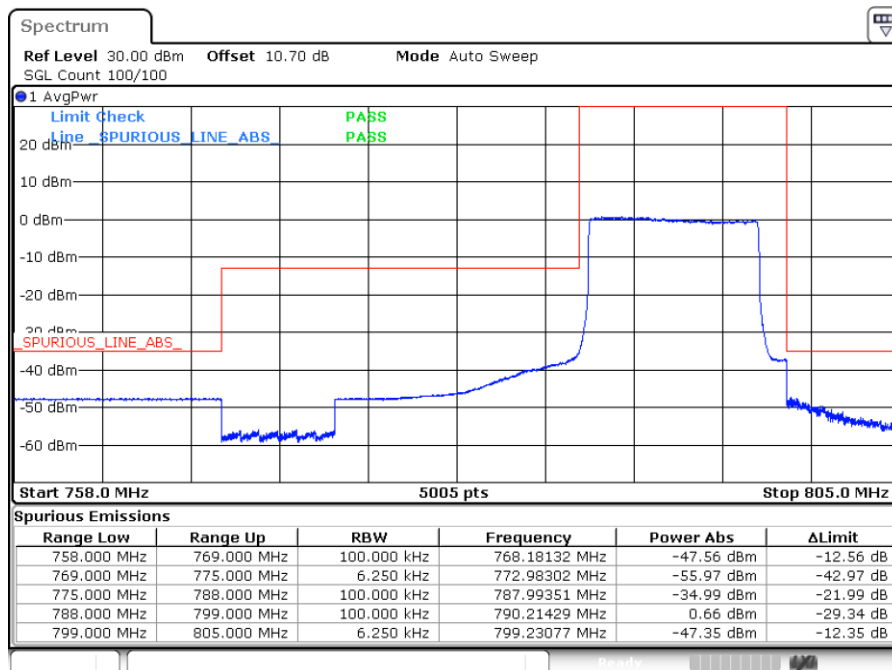




LTE Band 14 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

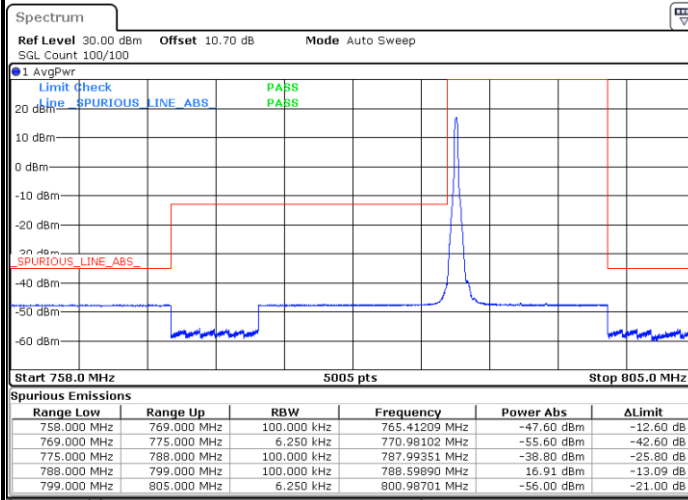


Date: 12.NOV.2019 16:16:45

Highest Band Edge / 1 RB

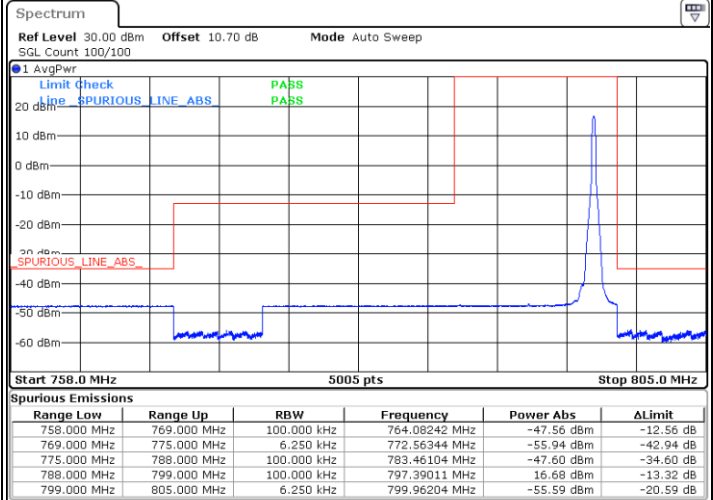

Date: 12.NOV.2019 16:21:55

Band Edge / Full RB

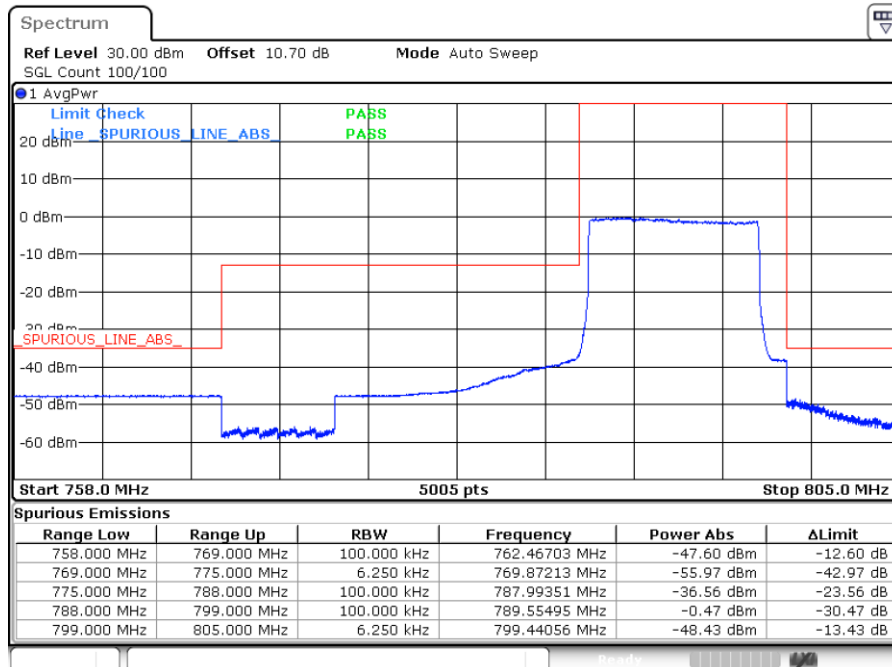


Date: 12.NOV.2019 16:27:05



Conducted Spurious Emission


LTE Band 14 / 5MHz

Lowest Channel / QPSK

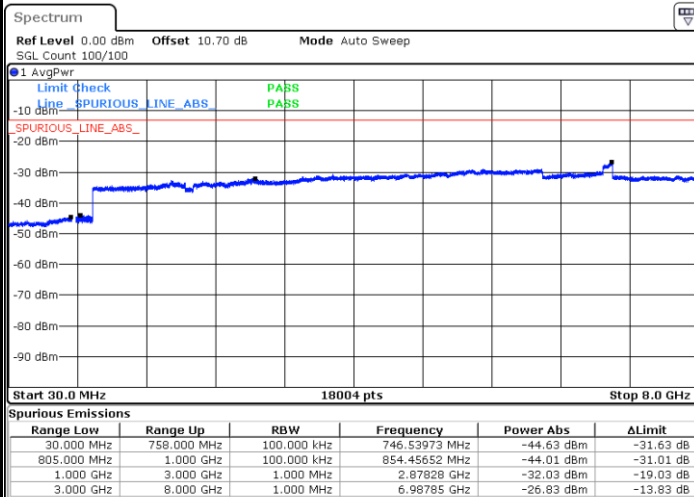


Date: 12.NOV.2019 16:28:08

Lowest Channel / 16QAM

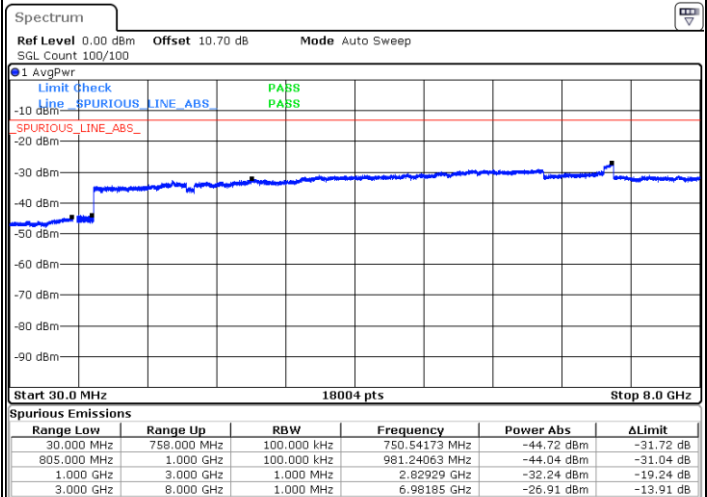


Date: 12.NOV.2019 16:29:10

Middle Channel / QPSK

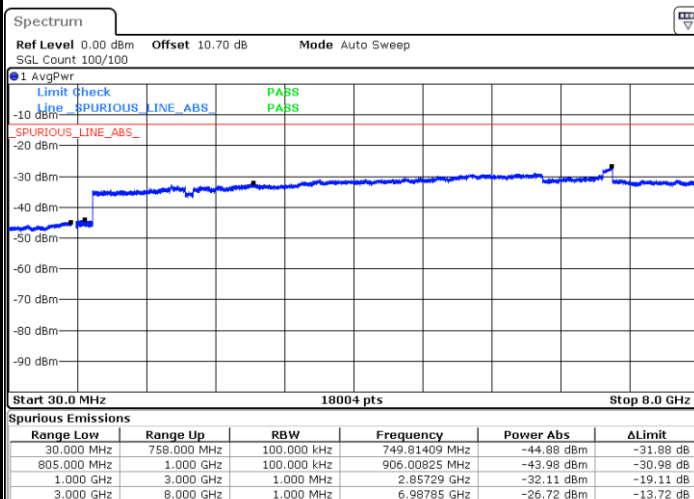

Date: 12.NOV.2019 16:31:16

Middle Channel / 16QAM

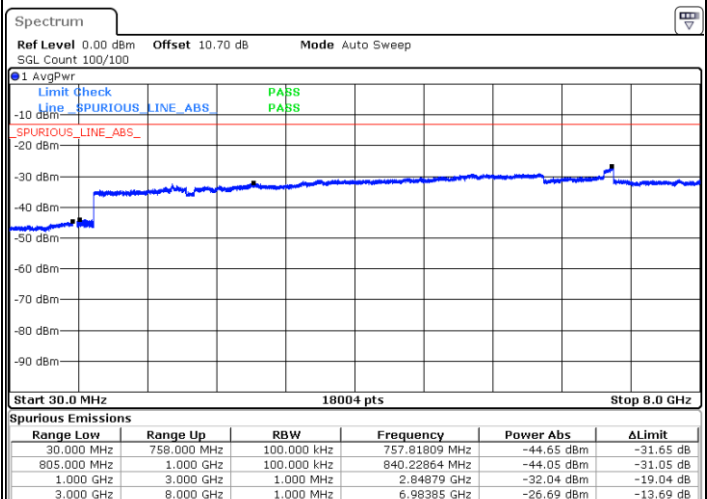


Date: 12.NOV.2019 16:32:18




LTE Band 14 / 5MHz

Highest Channel / QPSK

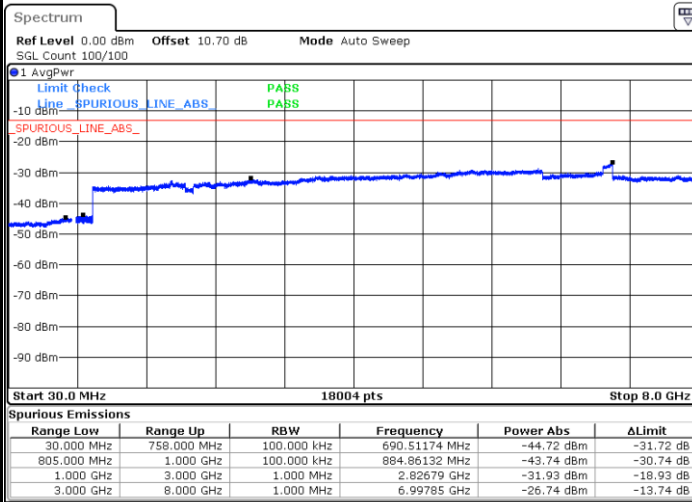

Date: 12.NOV.2019 16:34:22


Highest Channel / 16QAM

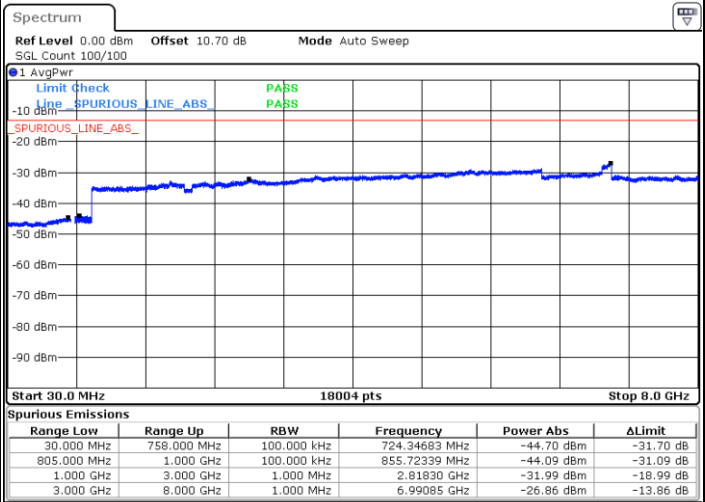

Date: 12.NOV.2019 16:35:25


LTE Band 14 / 10MHz

Middle Channel / QPSK

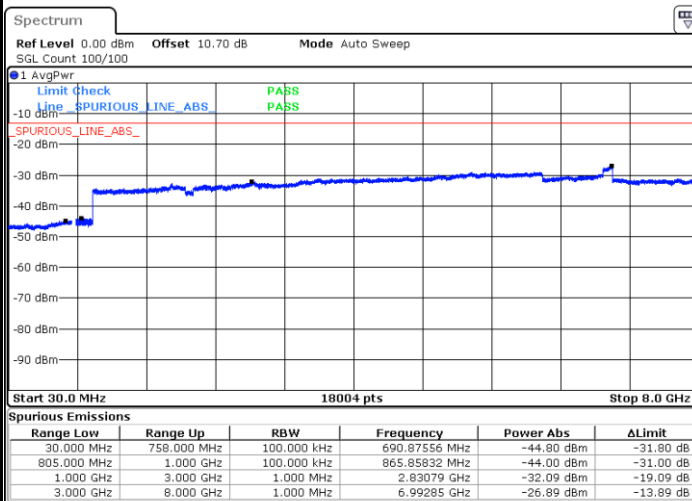

Date: 12.NOV.2019 16:37:31

Middle Channel / 16QAM

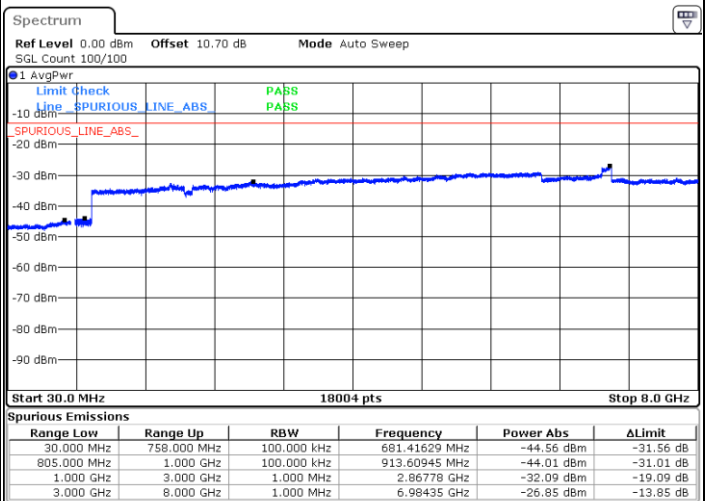


Date: 12.NOV.2019 16:38:33




LTE Band 14 / 5MHz

Lowest Channel / 64QAM

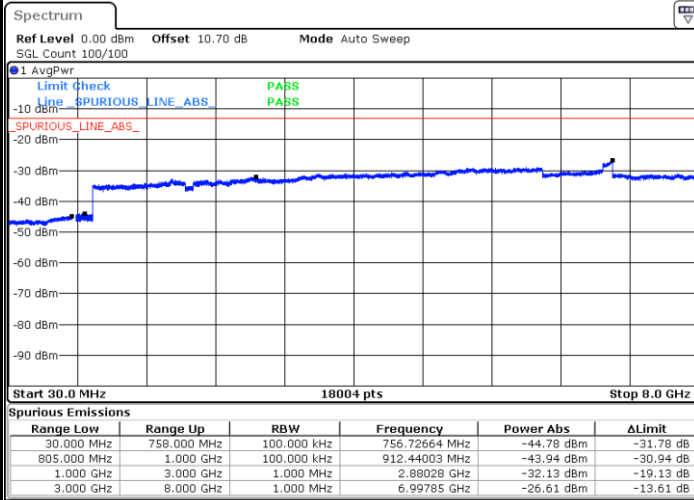


Date: 12.NOV.2019 16:30:13

Middle Channel / 64QAM

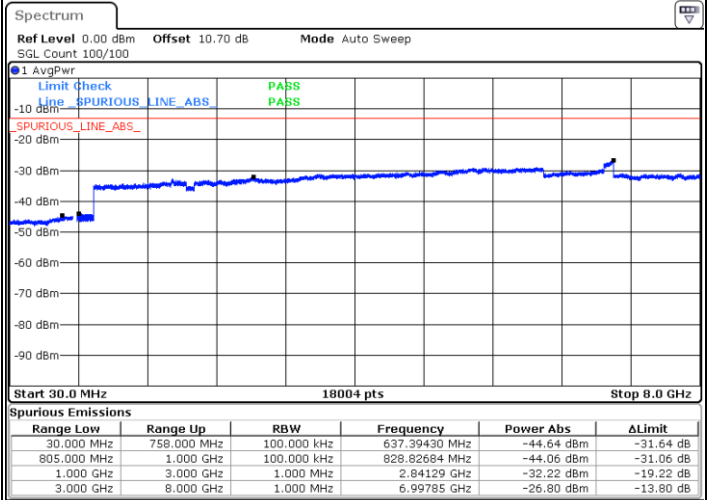

Date: 12.NOV.2019 16:33:20

Highest Channel / 64QAM

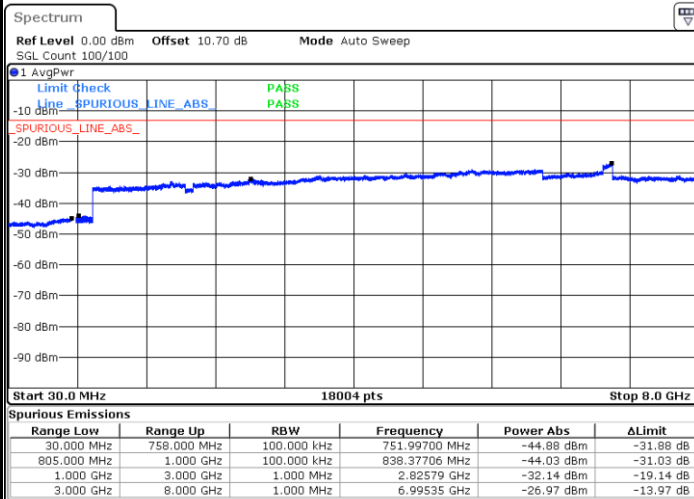



Date: 12.NOV.2019 16:36:28




LTE Band 14 / 10MHz

Middle Channel / 64QAM

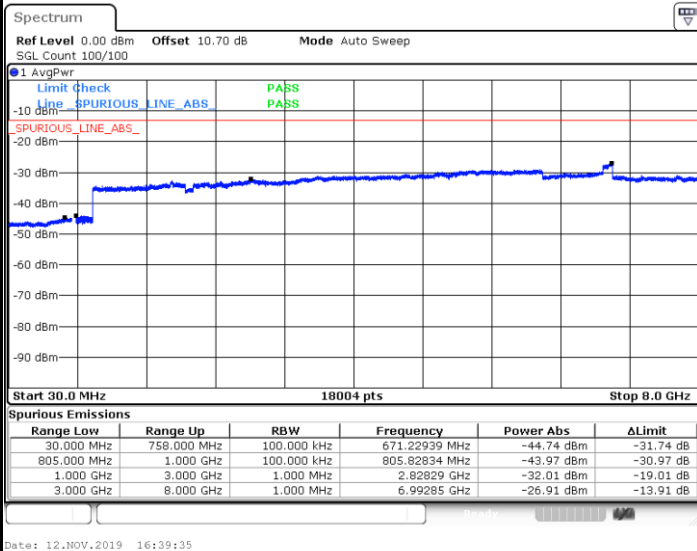


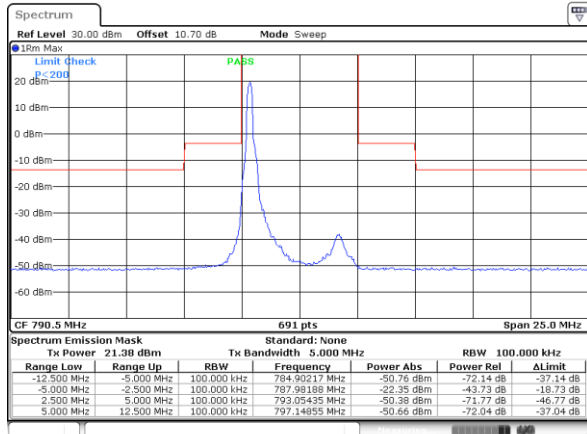**Mask****LTE Band 14 / 5MHz / QPSK****Lowest Channel / 1RB**


Date: 12.NOV.2019 15:25:54

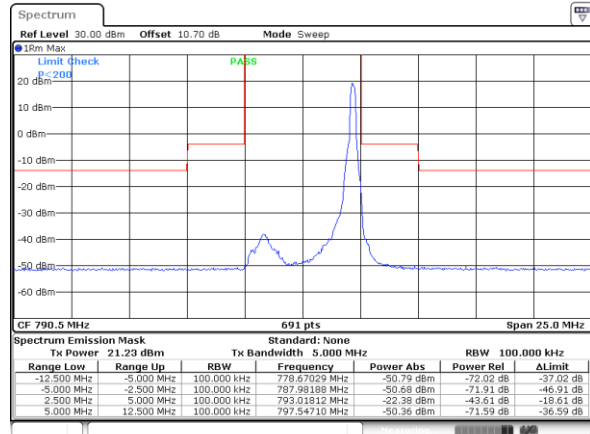


Date: 12.NOV.2019 15:26:25

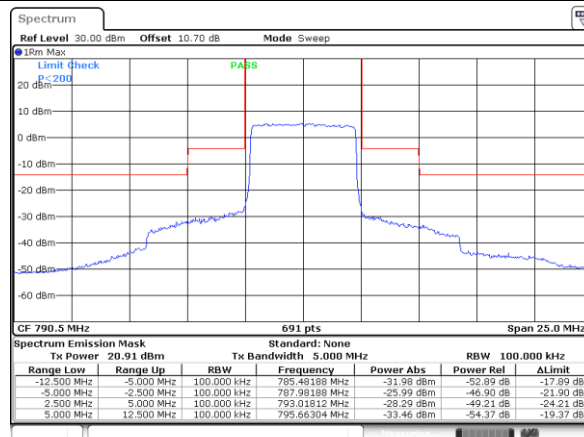Lowest Channel / Full RB


Date: 12.NOV.2019 15:23:19

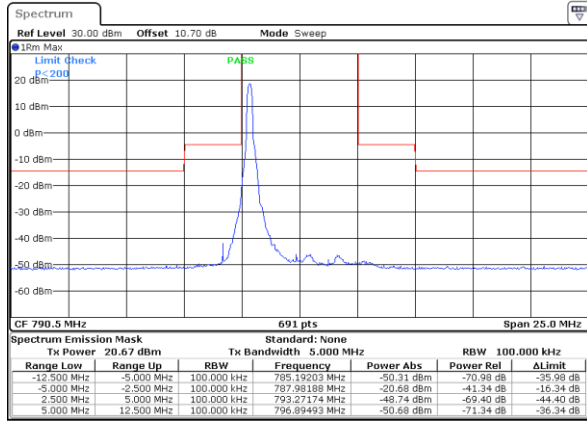LTE Band 14 / 5MHz / 16QAM
Lowest Channel / 1RB


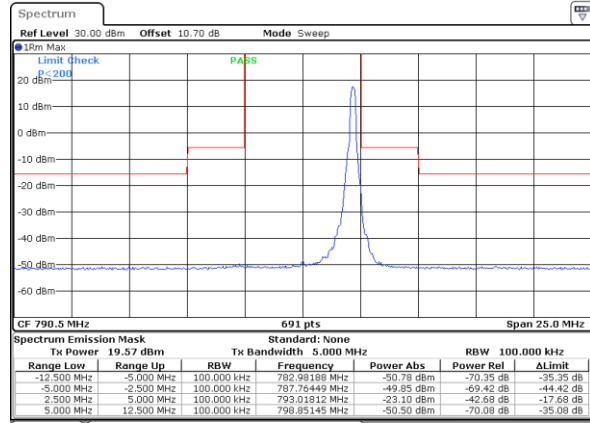
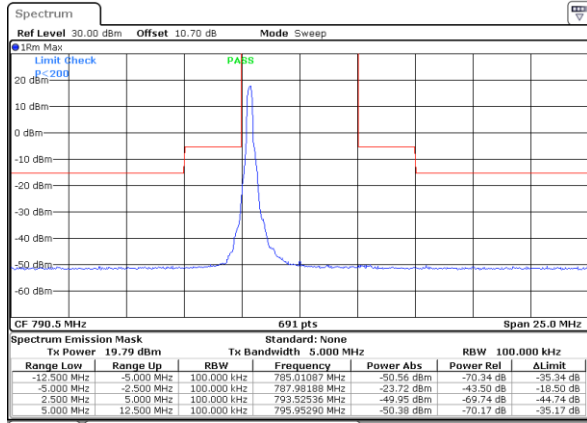
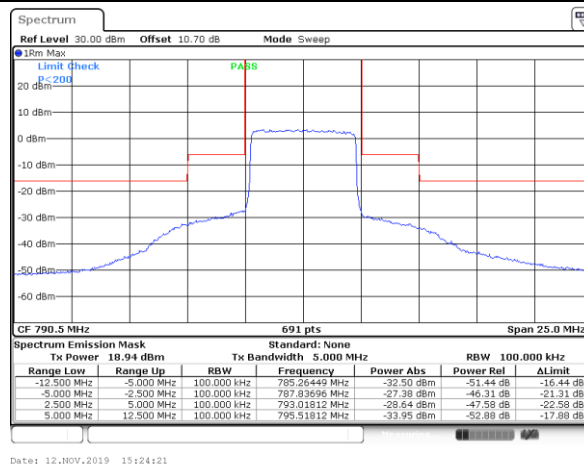
Date: 12.NOV.2019 15:25:23

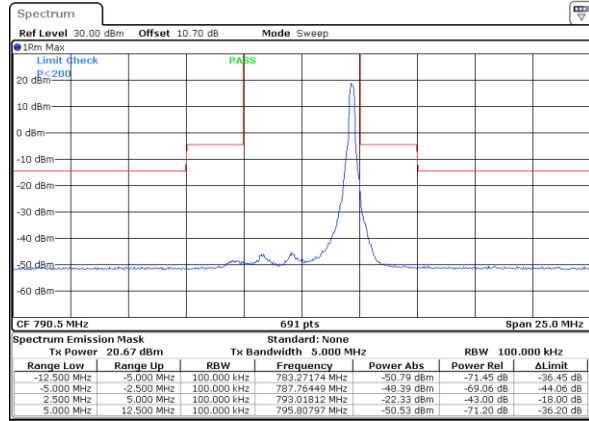

Date: 12.NOV.2019 15:26:56


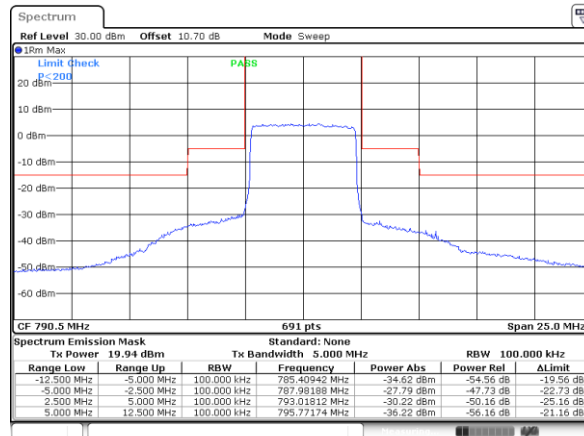
Lowest Channel / Full RB


Date: 12.NOV.2019 15:23:50


LTE Band 14 / 5MHz / 64QAM
Lowest Channel / 1RB

Lowest Channel / Full RB


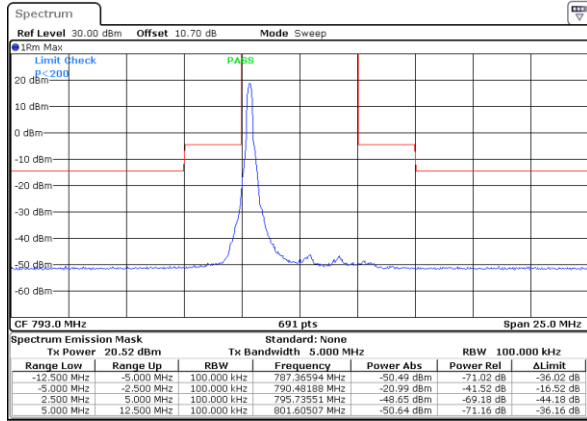
LTE Band 14 / 5MHz / QPSK

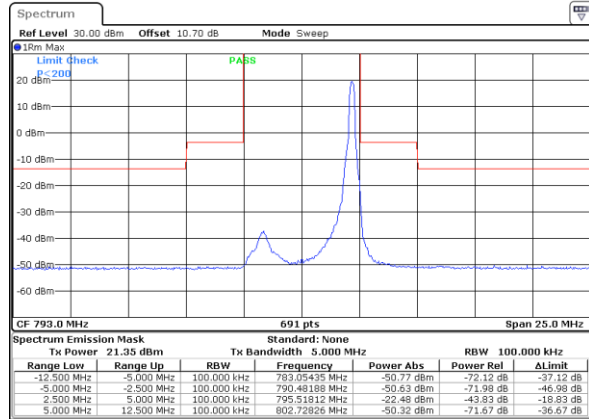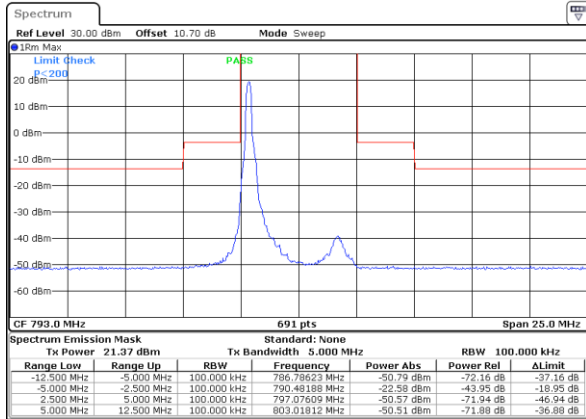Middle Channel / 1RB

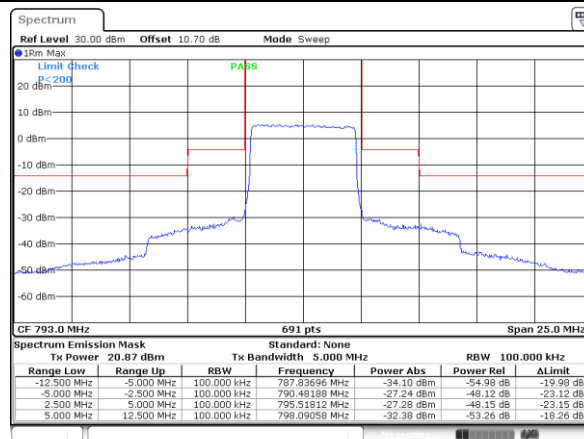


Middle Channel / Full RB




LTE Band 14 / 5MHz / 16QAM
Middle Channel / 1RB


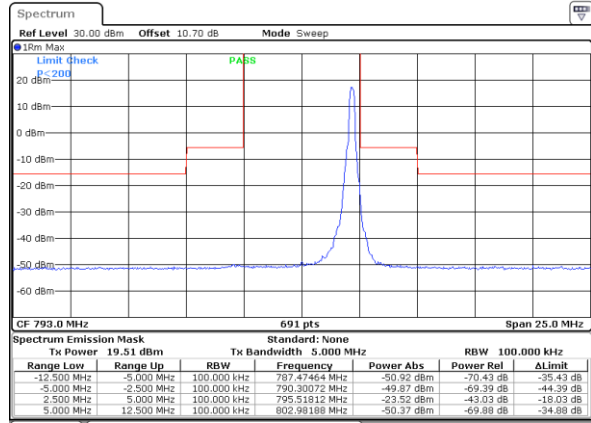
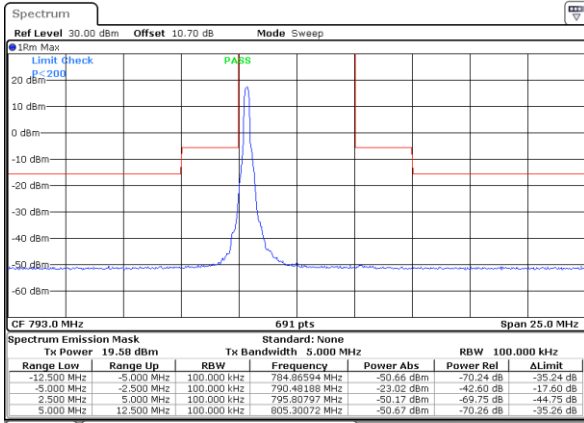
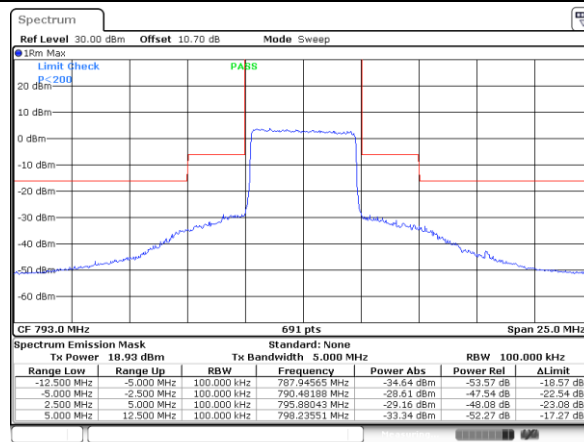
Date: 12.NOV.2019 15:30:00

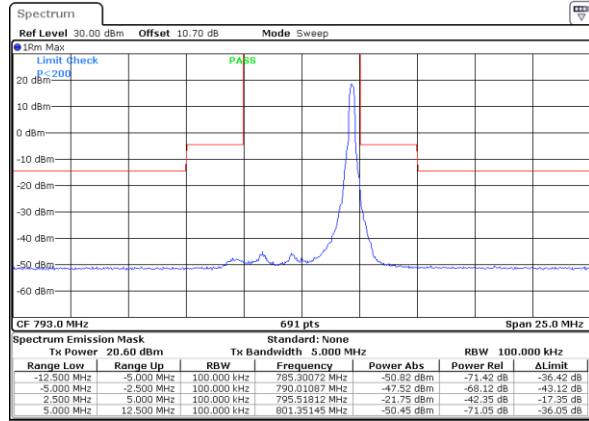

Date: 12.NOV.2019 15:28:29


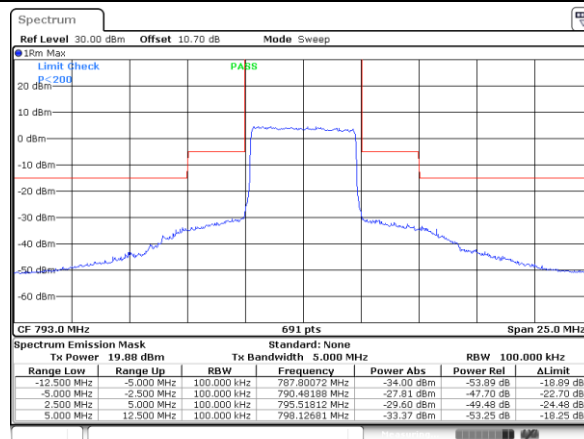
Middle Channel / Full RB


Date: 12.NOV.2019 15:31:32


LTE Band 14 / 5MHz / 64QAM
Middle Channel / 1RB

Middle Channel / Full RB


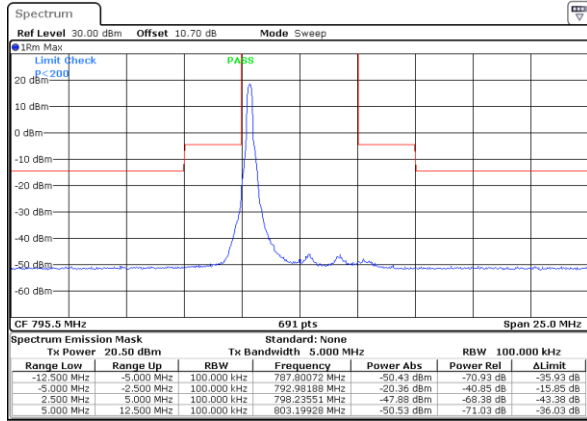
LTE Band 14 / 5MHz / QPSK

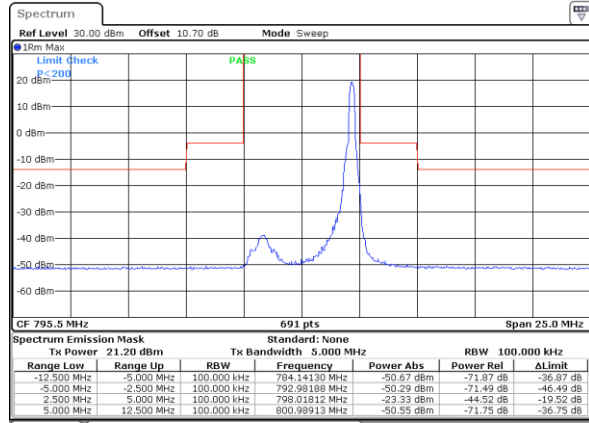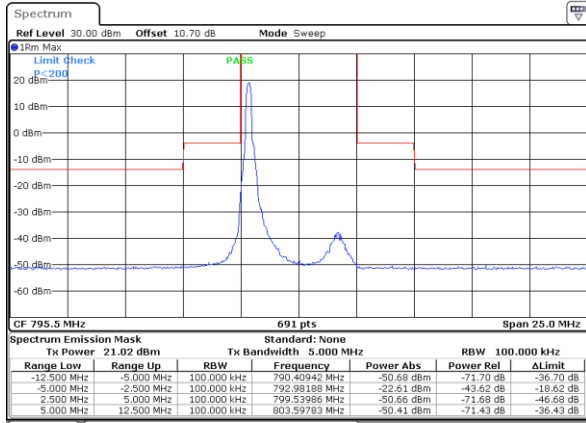Highest Channel / 1RB

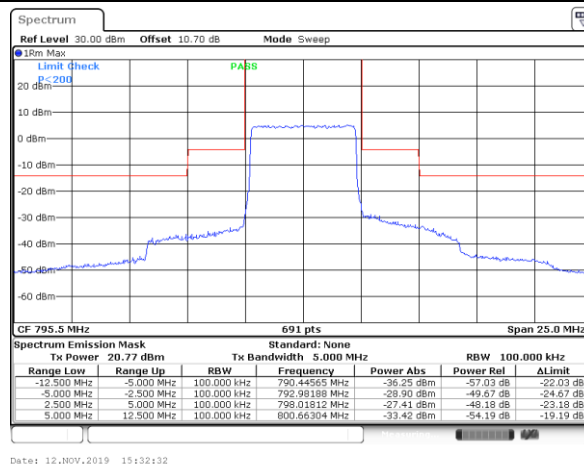


Highest Channel / Full RB




LTE Band 14 / 5MHz / 16QAM
Highest Channel / 1RB


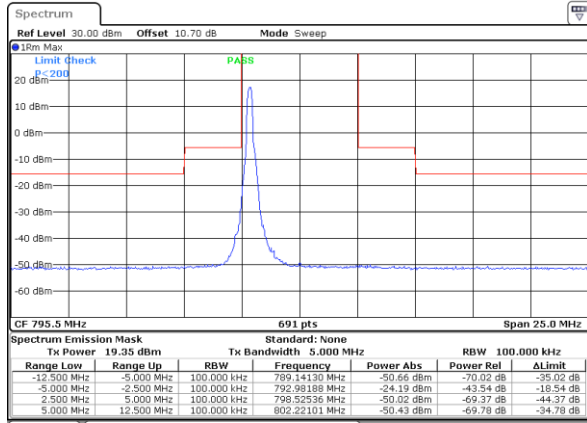
Date: 12.NOV.2019 15:34:35

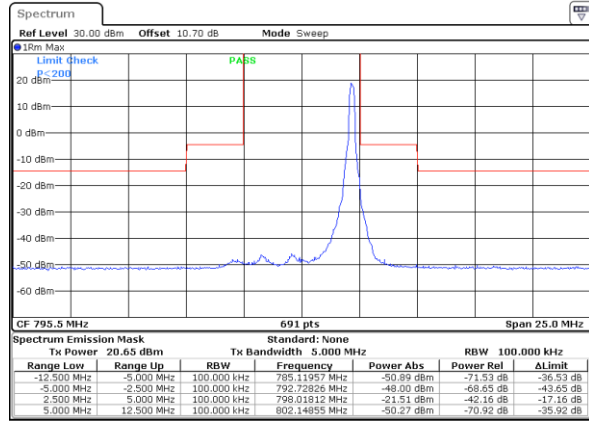


Date: 12.NOV.2019 15:36:08

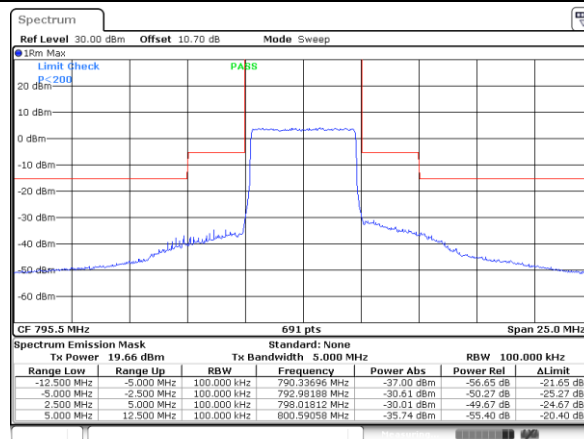Highest Channel / Full RB


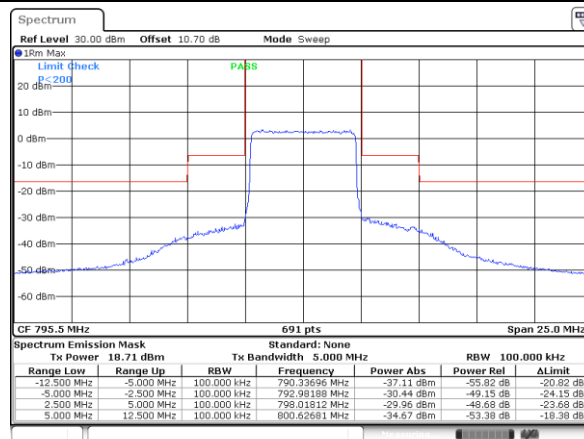
Date: 12.NOV.2019 15:33:03

LTE Band 14 / 5MHz / 64QAM
Highest Channel / 1RB


Date: 12.NOV.2019 15:34:05

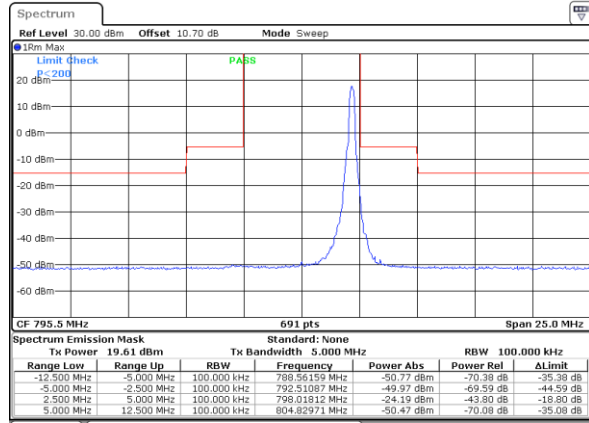


Date: 12.NOV.2019 15:36:39

Highest Channel / Full RB


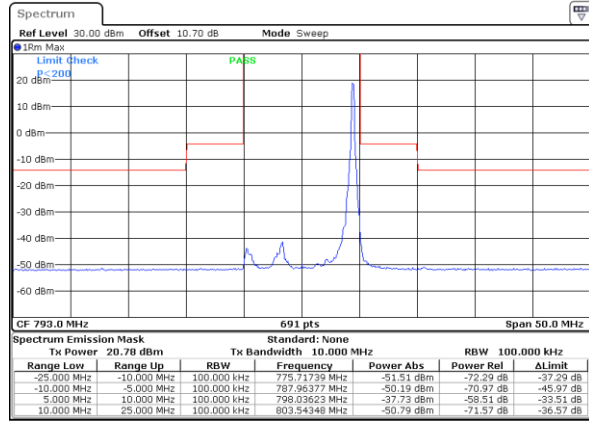
Date: 12.NOV.2019 15:33:34

LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

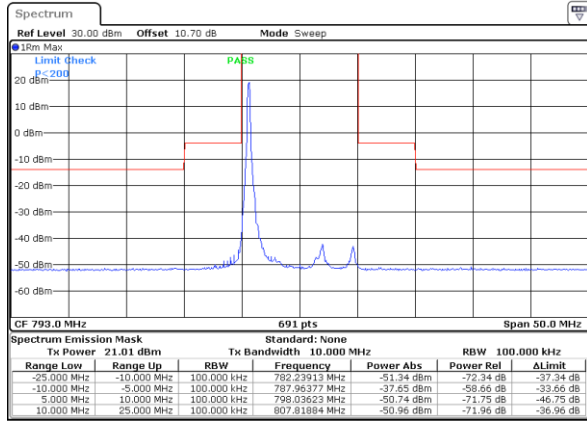


Date: 12.NOV.2019 15:38:41



Date: 12.NOV.2019 15:38:11


Middle Channel / Full RB

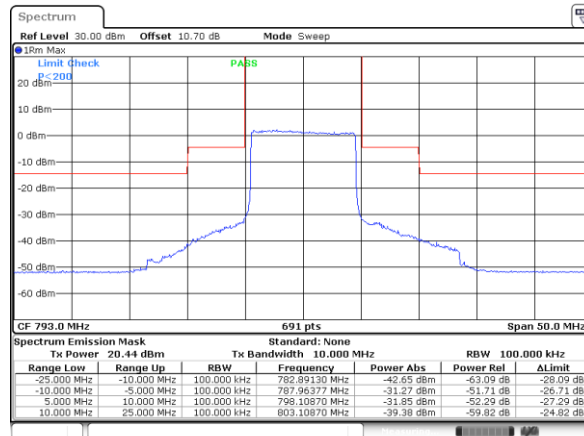


Date: 12.NOV.2019 15:41:12

LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

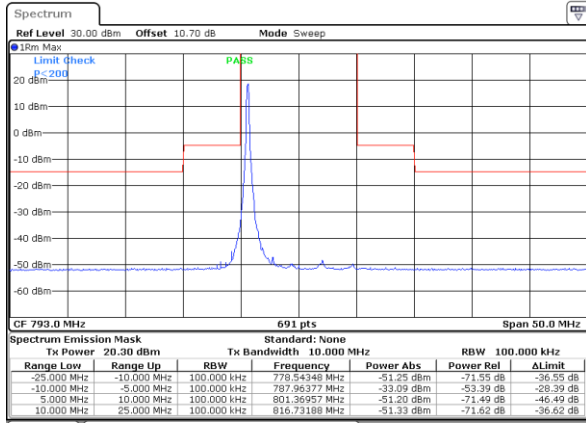


Date: 12.NOV.2019 15:39:11

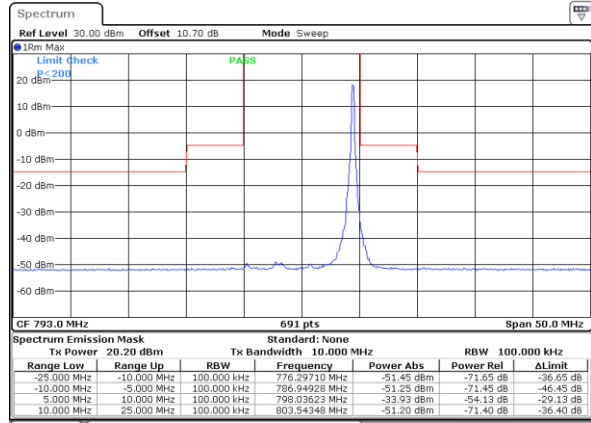

Date: 12.NOV.2019 15:37:40


Middle Channel / Full RB

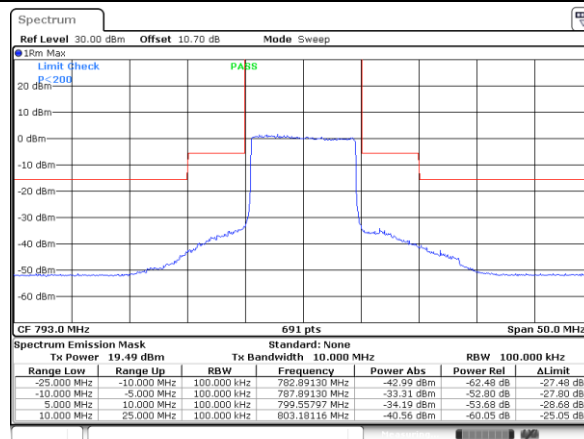


Date: 12.NOV.2019 15:40:42

LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

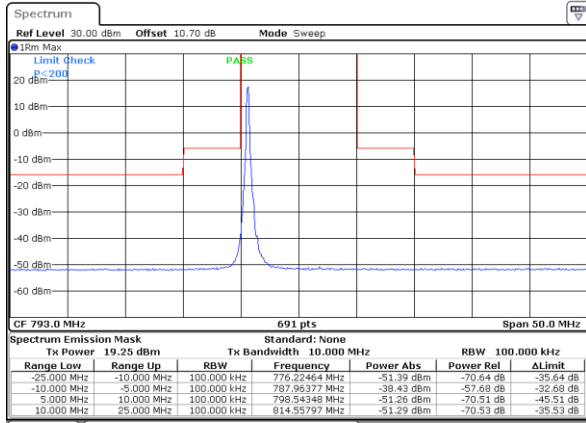


Date: 12.NOV.2019 15:39:42

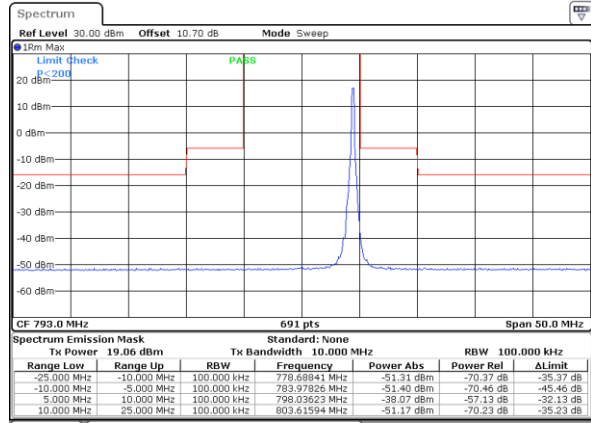

Date: 12.NOV.2019 15:37:10

Middle Channel / Full RB

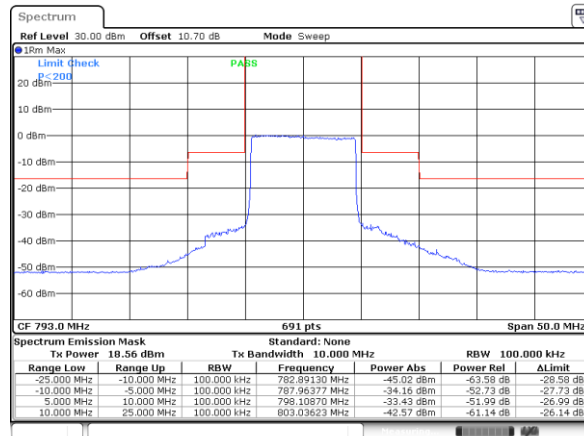

Date: 12.NOV.2019 15:40:12

Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0014	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0091	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0001	
0	Normal Voltage	0.0057	
-10	Normal Voltage	0.0003	
-20	Normal Voltage	0.0042	
-30	Normal Voltage	0.0047	
20	Maximum Voltage	0.0058	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage =4.0 V. ; Battery End Point (BEP) =3.8 V. ; Maximum Voltage =4.2 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

**Appendix B. Test Results of ERP and Radiated Test****ERP**

LTE Band 14 / 5MHz (Average) (GT - LC = 2 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	24	22.22	0.1667	22.07	0.1611
Middle		1	24	22.21	0.1663	22.06	0.1607
Highest		1	24	22.19	0.1656	22.04	0.1600
Lowest	16QAM	1	24	21.19	0.1315	21.04	0.1271
Middle		1	24	21.46	0.1400	21.31	0.1352
Highest		1	24	21.50	0.1413	21.35	0.1365
Lowest	64QAM	1	24	20.12	0.1028	19.97	0.0993
Middle		1	24	20.43	0.1104	20.28	0.1067
Highest		1	24	20.42	0.1102	20.27	0.1064
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = 2 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	22.27	0.1687	22.12	0.1629
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	0	21.54	0.1426	21.39	0.1377
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	0	20.52	0.1127	20.37	0.1089
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	

**Radiated Spurious Emission****LTE Band 14**

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-58.94	-42.15	-16.79	-70.28	-60.93	0.95	5.09	H
	2368	-48.31	-13	-35.31	-64.85	-49.91	1.25	5.00	H
	3152	-59.07	-13	-46.07	-77.62	-61.89	1.50	6.47	H
									H
									H
									H
	1576	-60.68	-42.15	-18.53	-72.5	-62.67	0.95	5.09	V
	2368	-48.28	-13	-35.28	-65.21	-49.88	1.25	5.00	V
	3152	-58.41	-13	-45.41	-77.6	-61.23	1.50	6.47	V
									V
									V
									V
Middle	1584	-56.36	-42.15	-14.21	-67.79	-58.33	0.95	5.06	H
	2376	-47.98	-13	-34.98	-64.58	-49.61	1.25	5.03	H
	3162	-59.06	-13	-46.06	-77.61	-61.92	1.50	6.51	H
									H
									H
									H
	1584	-60.66	-42.15	-18.51	-72.54	-62.63	0.95	5.06	V
	2376	-46.54	-13	-33.54	-63.58	-48.17	1.25	5.03	V
	3162	-58.21	-13	-45.21	-77.37	-61.07	1.50	6.51	V
									V
									V
									V



Highest	1584	-57.28	-42.15	-15.13	-68.65	-59.25	0.95	5.06	H
	2376	-45.93	-13	-32.93	-62.55	-47.56	1.25	5.03	H
	3172	-59.22	-13	-46.22	-77.81	-62.13	1.50	6.56	H
									H
									H
									H
	1584	-59.17	-42.15	-17.02	-70.94	-61.14	0.95	5.06	V
	2376	-46.48	-13	-33.48	-63.5	-48.11	1.25	5.03	V
	3172	-58.56	-13	-45.56	-77.8	-61.47	1.50	6.56	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-56.77	-42.15	-14.62	-68.12	-58.76	0.95	5.09	H
	2368	-38.06	-13	-25.06	-54.62	-39.66	1.25	5.00	H
	3944	-41.89	-13	-28.89	-61.84	-46.53	1.74	8.53	H
	5520	-51.87	-13	-38.87	-76.51	-56.79	2.64	9.71	H
									H
									H
									H
	1576	-59.65	-42.15	-17.50	-71.53	-61.64	0.95	5.09	V
	2368	-41.31	-13	-28.31	-58.25	-42.91	1.25	5.00	V
	3944	-57.03	-13	-44.03	-77.13	-61.67	1.74	8.53	V
	5520	-53.81	-13	-40.81	-78.47	-58.73	2.64	9.71	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.