

FCC Part 27 Compliance Test Report

Test Report no.:	Salo_FCC_0810_03.doc	Date of Report:	09-Apr-2008
Number of pages:	21	Customer's Contact person:	Niko Balabanis
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Internet Table RX-48 / Battery BP-4L, Headset HS-48, AC-Charger AC-4U		
FCC ID:	LJPRX-48	IC:	-
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 27 and TIA-603-C-2004. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Anni Manninen, Test System Manager

1. Summary for FCC Part 27 Compliance Test Report

Date of receipt	03-Mar-2008
Testing completed	19-Mar-2008
The customer's contact person	Niko Balabanis
Test Plan referred to	T:\Projects\accessor\RX-48\TestPlan_RS\RS_Test_Plan_RX-48.xls
Notes	-
Document name	T:\Projects\accessor\RX-48\EMC\Results\FCC\Salo_FCC_0810_03.doc

1.1. EUT and Accessory Information

The EUT is a Bluetooth, WLAN and WiMAX device. The EUT is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Internet Table	RX-48	Z4A030972	0901	-	-	12603
Battery	BP-4L	3932137173130118147;0670519	-	-	-	12604
Internet Table	RX-48	Z4A030972	0901	-	-	12614
Battery	BP-4L	3932137344120272467;0670519	-	-	-	12619
Headset	HS-48	0694581741482102313	-	-	-	12618
AC-Charger	AC-4U	1103337225281314121;0675379	-	-	-	12623

1.2. Summary of Test Results

WIMAX:

Section in CFR 47	Name of the test	Result
§2.1046(a)	Conducted RF output power	NP
§27.50(h)(2)	Radiated RF output power	PASSED
§2.1049(h)	99 % occupied bandwidth	PASSED
§27.53(l)(4)	Channel edge compliance	NP
§27.53(l)(4), §2.1051	Spurious emissions at antenna terminals	NP
§27.53(l)(4), §2.1053	Spurious radiated emissions	PASSED
§2.1055(a)	Frequency stability, temperature variation	PASSED
§2.1055(d)	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Salo Laboratory.


CONTENTS

1. Summary for FCC Part 27 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §27.50(h)(2))	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. WiMAX Test results	5
3. 99 % occupied bandwidth (FCC §2.1049(h))	6
3.1. Test setup	6
3.2. Test method and limit	6
3.3. WiMAX Test results	7
4. Spurious radiated emissions (FCC §27.53(l)(4))	9
4.1. Test setup	9
4.2. Test method and limit	9
4.3. WiMAX Test results	10
5. Frequency stability, temperature variation (FCC §2.1055(a))	11
5.1. Test setup	11
5.2. Test method and limit	11
5.3. WiMAX Test results	12
6. Test Equipment	20
6.1. Conducted measurements	20
6.2. Radiated measurements	20

2. Radiated RF output power (FCC §27.50(h)(2))

EUT with DUT number	RX-48, DUT 12603
Accessories with DUT numbers	BP-4L, DUT 12604; HS-48, DUT 12618; AC-4U, DUT 12623
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 40 / 100
Date of measurements	03-Mar-2008 – 04-Mar-2008
Measured by	Anni Manninen

2.1. Test setup

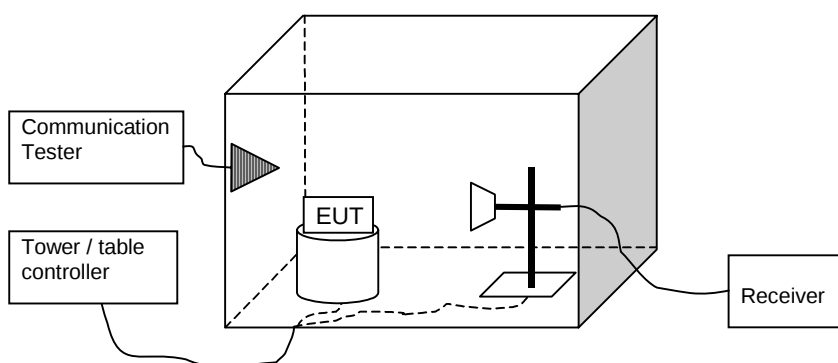

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
2496 - 2690	2	33

2.3. WIMAX Test results

2.3.1 QPSK modulation

Slide closed

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
0 / 2501	20.90	0.123	- 28.50	49.40	VERTICAL	PASSED
368 / 2593	21.20	0.132	- 29.80	51.00	VERTICAL	PASSED
736 / 2685	21.90	0.155	- 28.20	50.10	VERTICAL	PASSED

Slide open

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
0 / 2501	21.50	0.141	- 27.90	49.40	VERTICAL	PASSED
368 / 2593	24.40	0.275	- 26.60	51.00	HORIZONTAL	PASSED
736 / 2685	22.90	0.195	- 27.20	50.10	HORIZONTAL	PASSED

2.3.2 16QAM modulation

Slide closed

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
0 / 2501	20.40	0.110	- 29.00	49.40	VERTICAL	PASSED
368 / 2593	21.20	0.132	- 29.80	51.00	HORIZONTAL	PASSED
736 / 2685	21.10	0.129	- 29.00	50.10	VERTICAL	PASSED


Slide open

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
0 / 2501	21.00	0.126	- 28.40	49.40	VERTICAL	PASSED
368 / 2593	23.60	0.229	- 27.40	51.00	HORIZONTAL	PASSED
736 / 2685	22.00	0.158	- 28.10	50.10	VERTICAL	PASSED

3. 99 % occupied bandwidth (FCC §2.1049(h))

EUT with DUT number	RX-48, DUT 12614
Accessories with DUT numbers	BP-4L, DUT 12619; HS-48, DUT 12618; AC-4U, DUT 12623
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 100
Date of measurements	07-Mar-2008
Measured by	Anni Manninen

3.1. Test setup

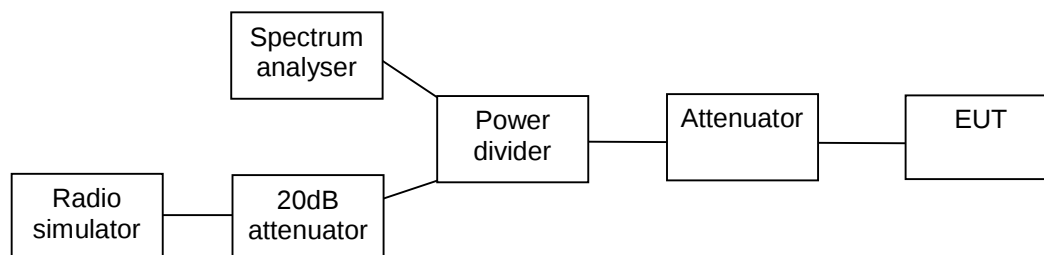

3.2. Test method and limit


The measurement is made according to FCC rules part 2.

3.3. WiMAX Test results

3.3.1 QPSK modulation

Operation mode (TX on)	99% occupied bandwidth [kHz]
WiMAX	9180.000


WiMAX mode, channel 368 / 2593 MHz

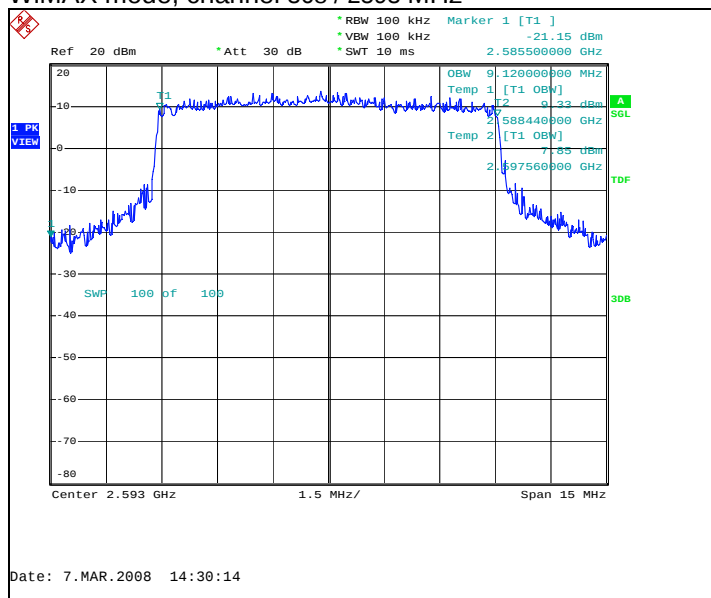

3.3.2 16QAM modulation

Operation mode (TX on)	99% occupied bandwidth [kHz]
WiMAX	9180.000


WiMAX mode, channel 368 / 2593 MHz

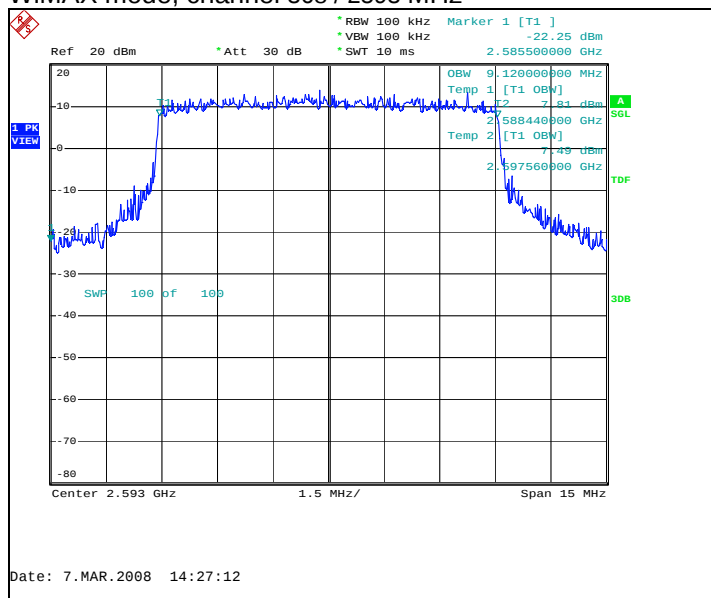

4. Spurious radiated emissions (FCC §27.53(l)(4))

EUT with DUT number	RX-48, DUT 12603
Accessories with DUT numbers	BP-4L, DUT 12604; HS-48, DUT 12618; AC-4U, DUT 12623
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 40 / 100
Date of measurements	03-Mar-2008
Measured by	Anni Manninen

4.1. Test setup

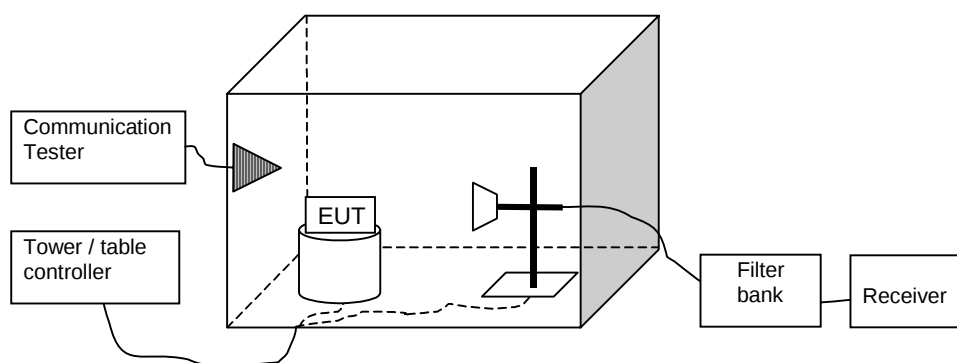

4.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WiMAX	30 - 18000	-13

4.3. WIMAX Test results

4.3.1 QPSK modulation

Channel 368 / 2593 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5187.380762	-21.10	7.76247	- 33.10	12.00	HORIZONTAL	PASSED
7778.563126	-20.00	10.00000	- 33.40	13.40	HORIZONTAL	PASSED
10376.749499	-28.10	1.54882	- 47.40	19.30	HORIZONTAL	PASSED

4.3.2 16QAM modulation


Channel 368 / 2593 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5189.872745	-21.50	7.07946	- 33.60	12.10	HORIZONTAL	PASSED
7781.063126	-20.70	8.51138	- 34.20	13.50	HORIZONTAL	PASSED
10376.757515	-29.00	1.25893	- 48.30	19.30	HORIZONTAL	PASSED

5. Frequency stability, temperature variation (FCC §2.1055(a))

EUT with DUT number	RX-48, DUT 12614
Accessories with DUT numbers	BP-4L, DUT 12619; HS-48, DUT 12618; AC-4U, DUT 12623
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 100
Date of measurements	06-Mar-2008 – 07-Mar-2008 and 18-Mar-2008
Measured by	Anni Manninen

5.1. Test setup

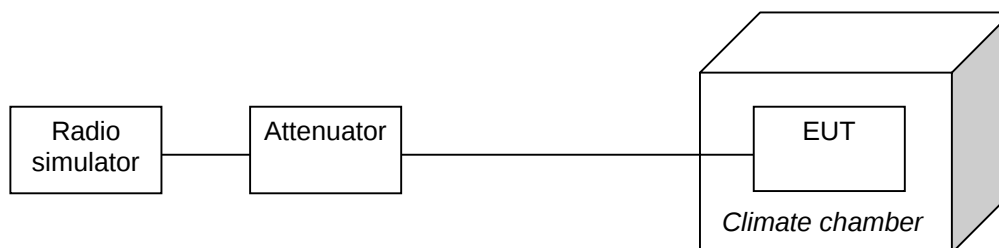

5.2. Test method and limit

The measurement is made according to FCC rules part 2 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.


Limits for frequency stability, temperature variation measurements

Frequency range [MHz]	Limit [dBm]
2587 - 2587.5 and 2598.5 - 2599	-13
2587.5 - 2598.5	33


5.3. WiMAX Test results

5.3.1 QPSK modulation


Temperature +50C

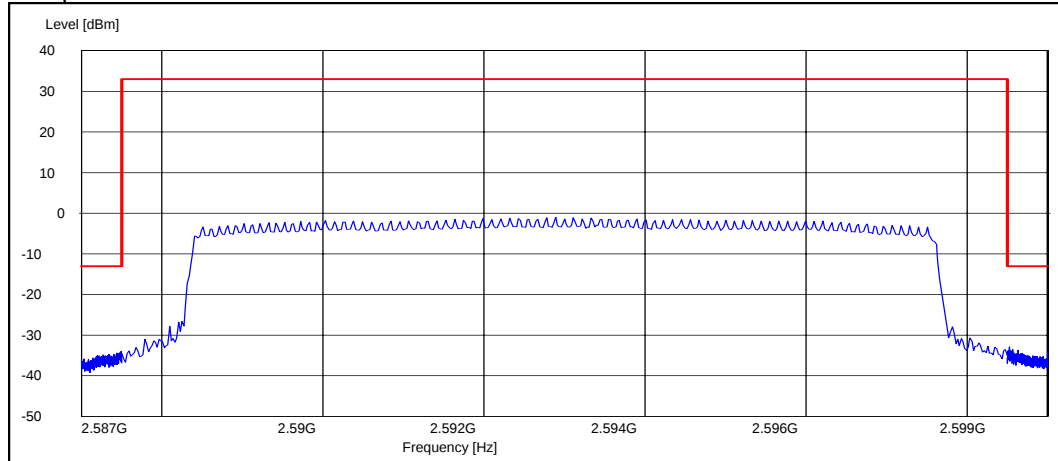


Temperature +40C

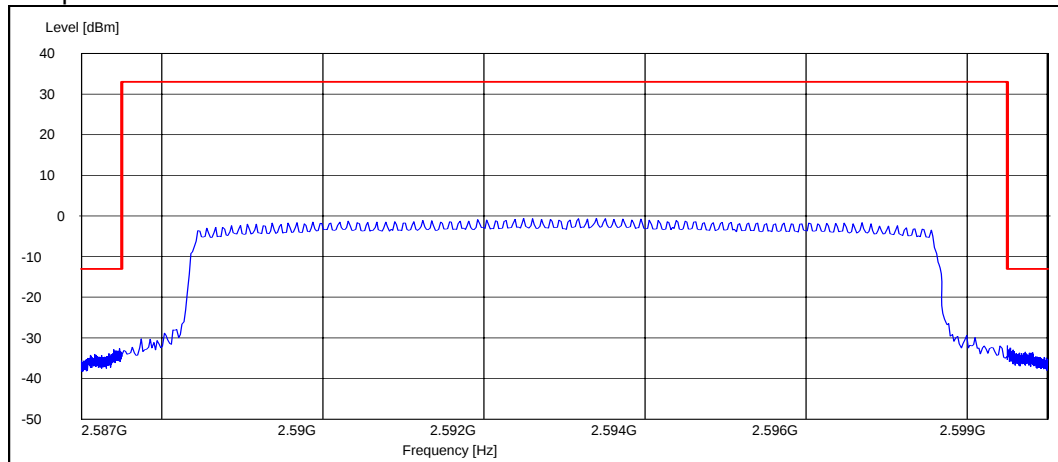


Temperature +30C

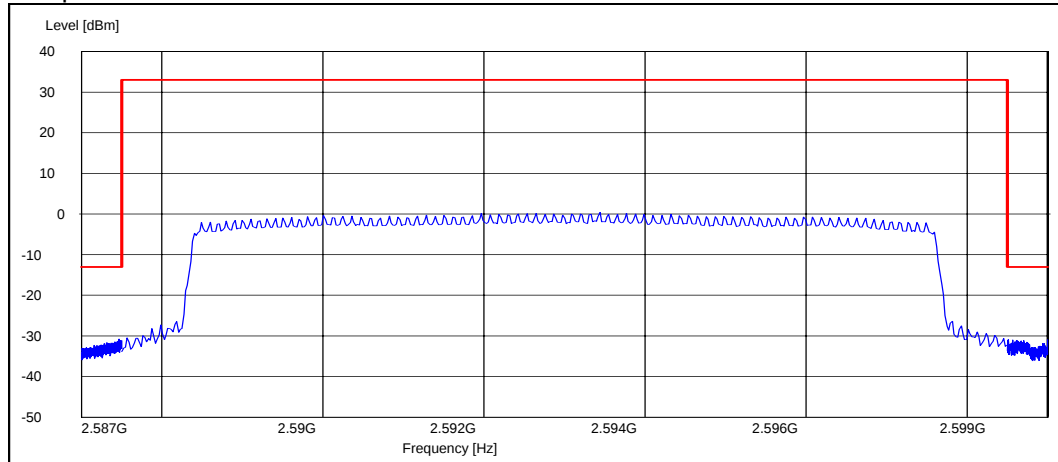


Temperature +20C

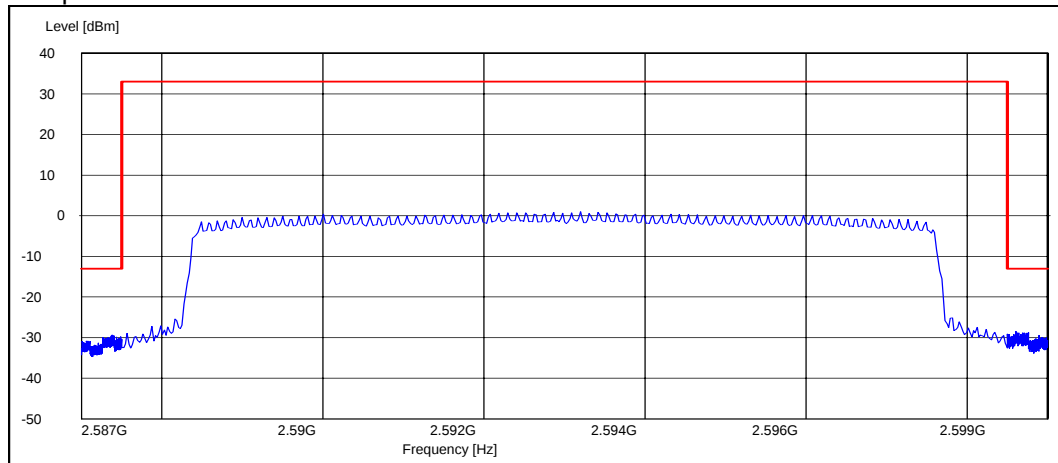


Temperature +10C

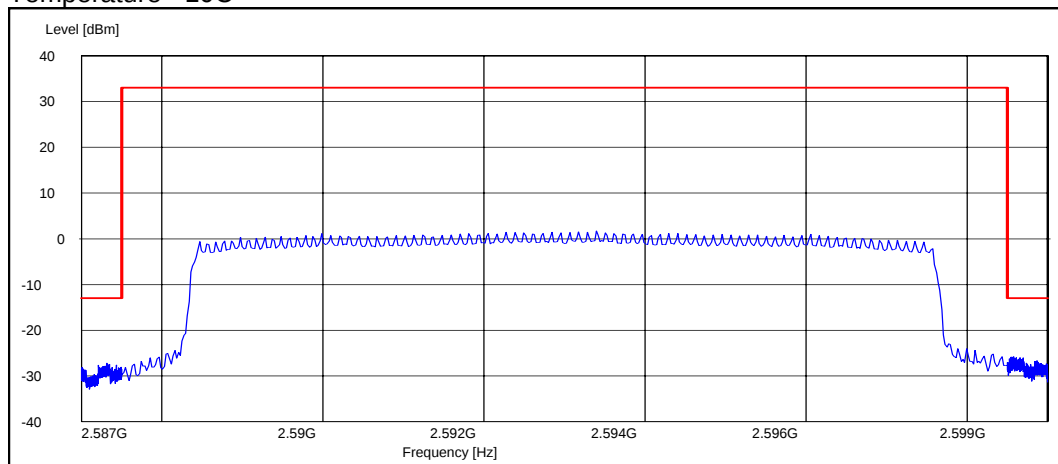


Temperature +0C

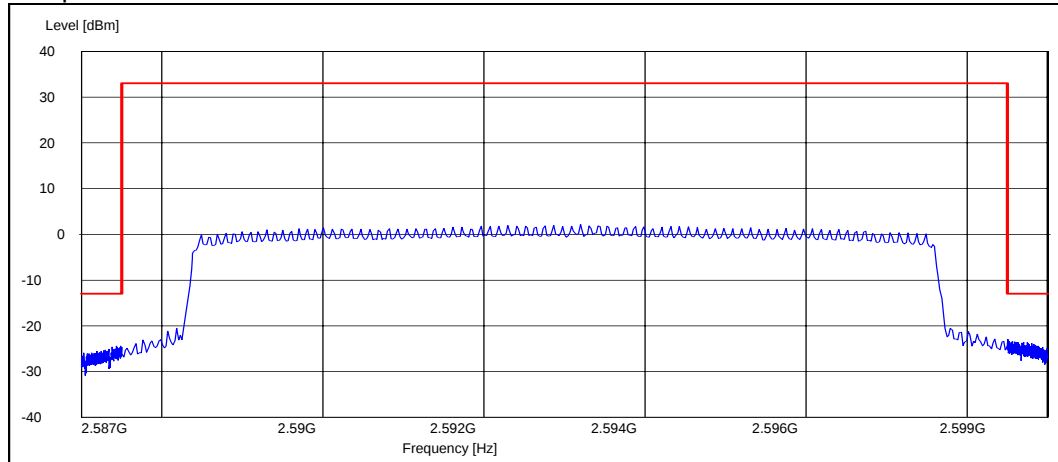


Temperature -10C

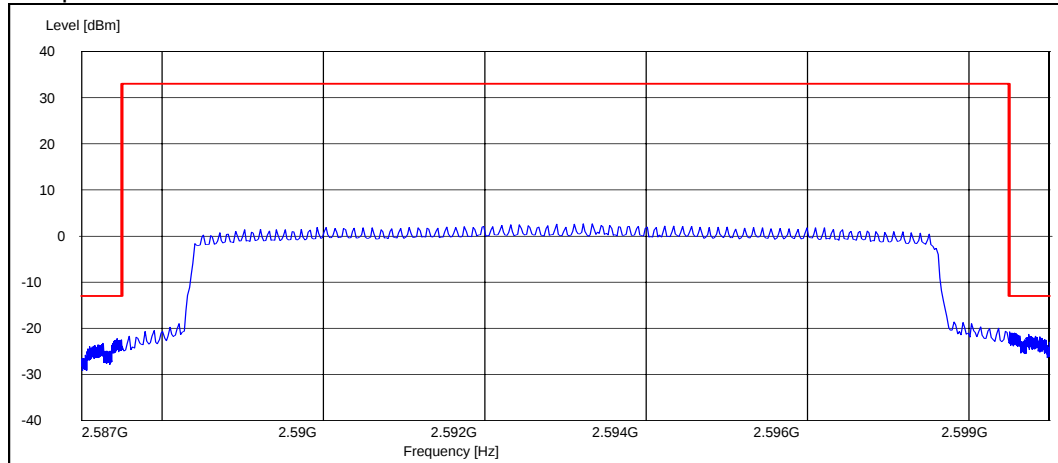

Temperature -20C

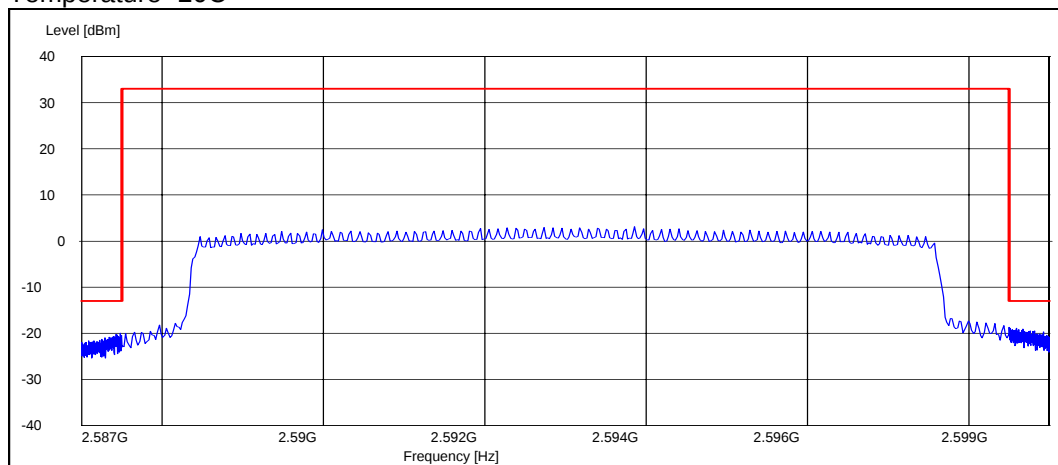


Temperature -30C

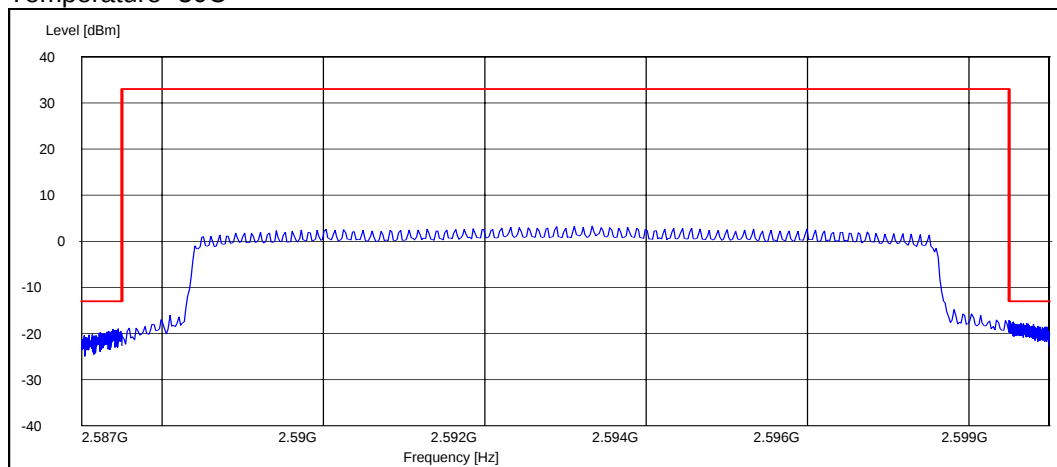


5.3.2 16QAM modulation


Temperature +50C

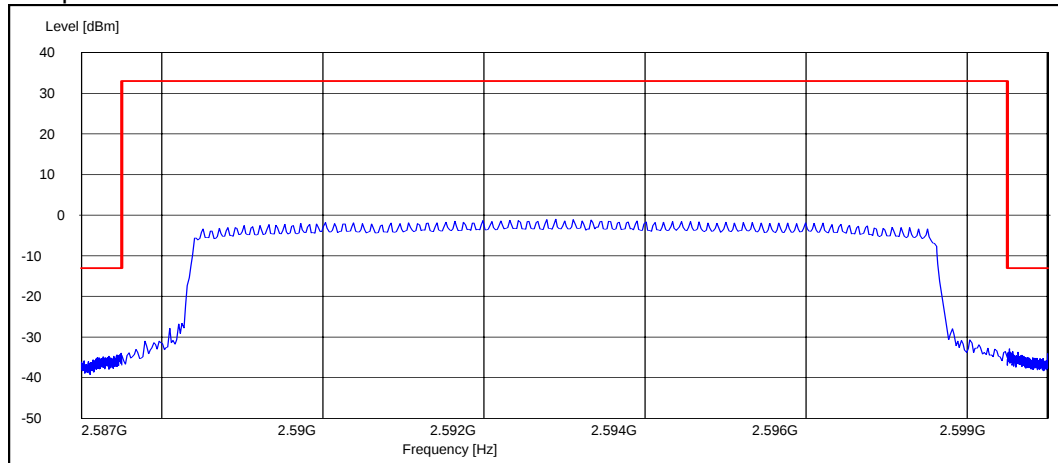


Temperature +40C

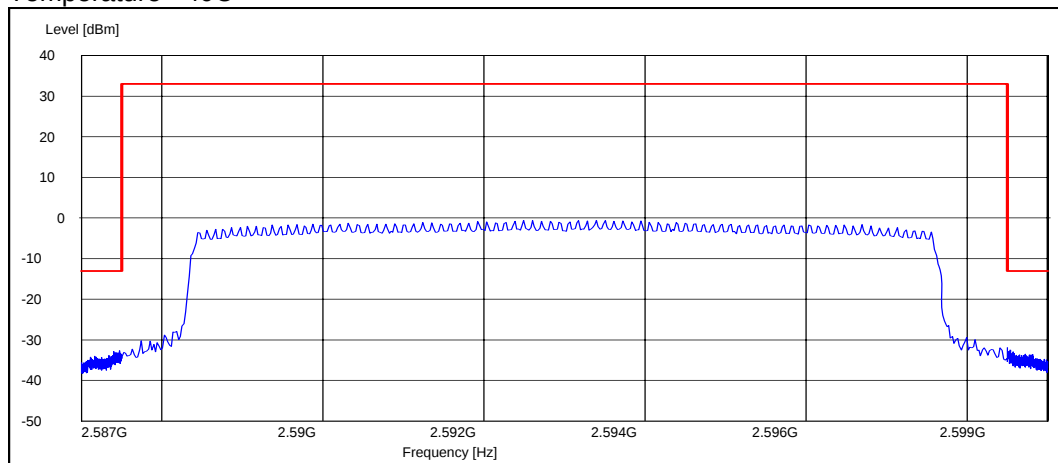


Temperature +30C

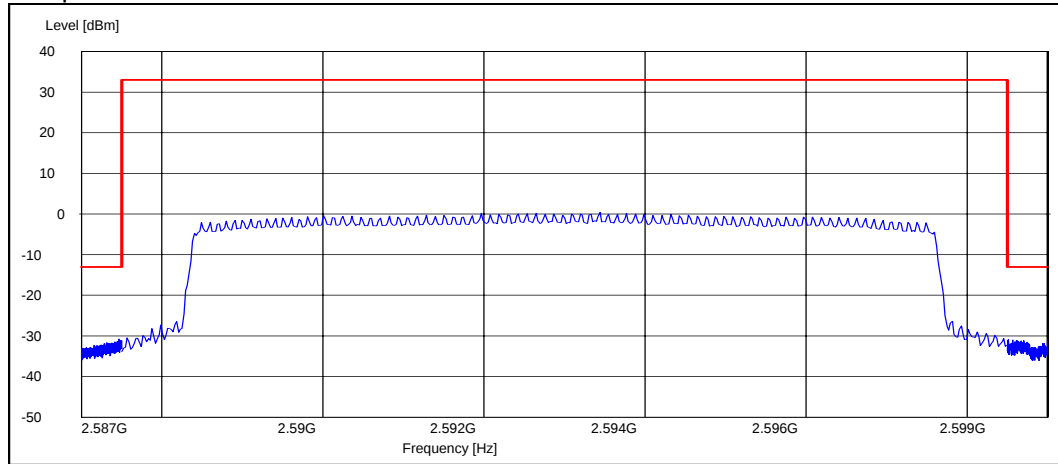


Temperature +20C

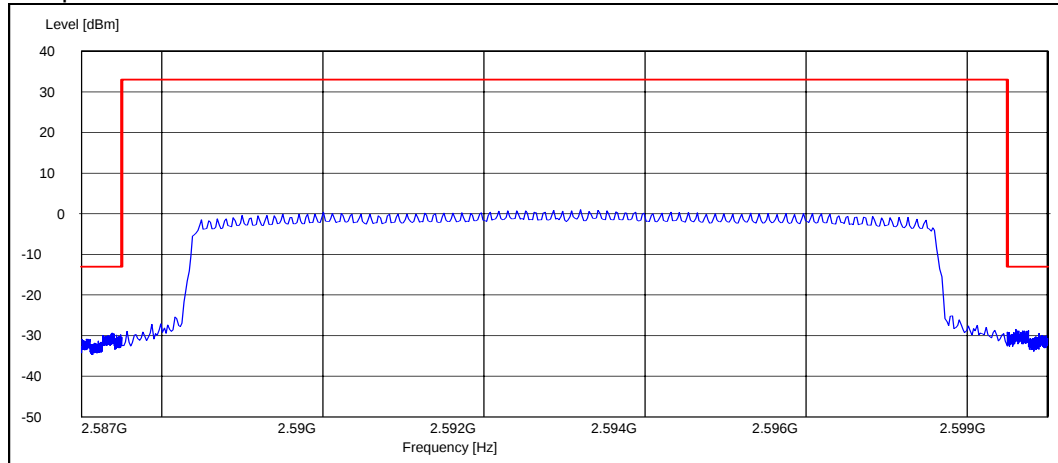


Temperature +10C

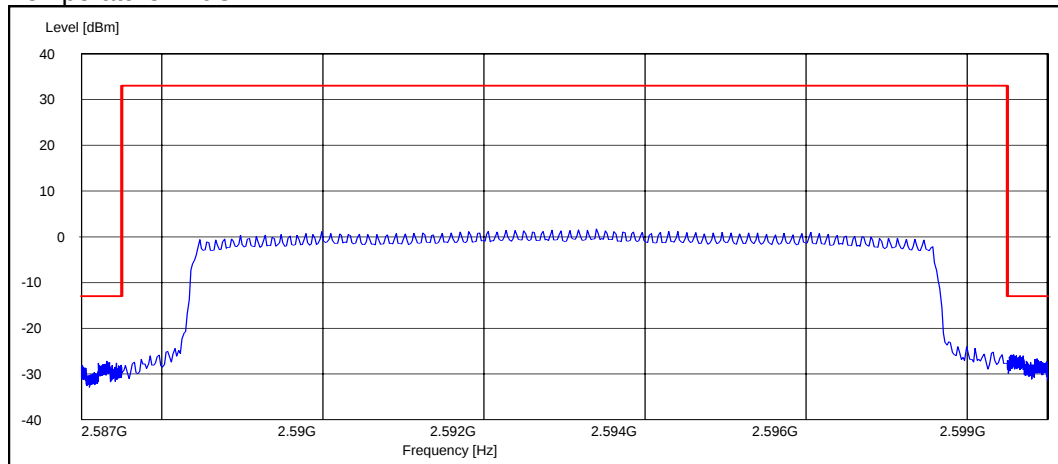


Temperature +0C

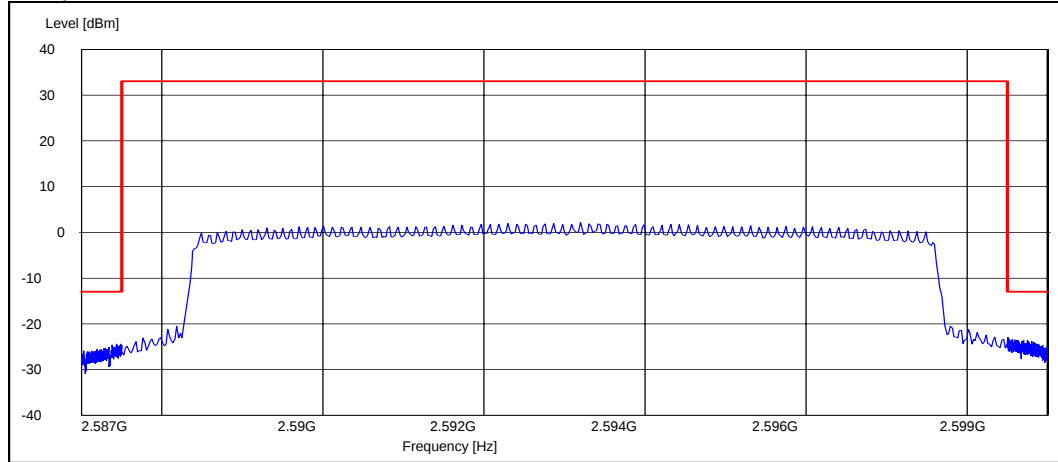


Temperature -10C

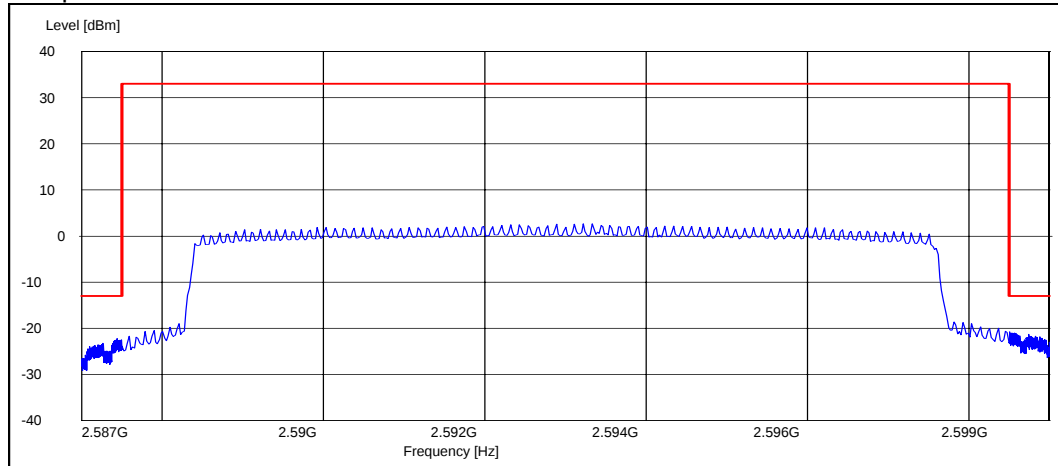

Temperature -20C

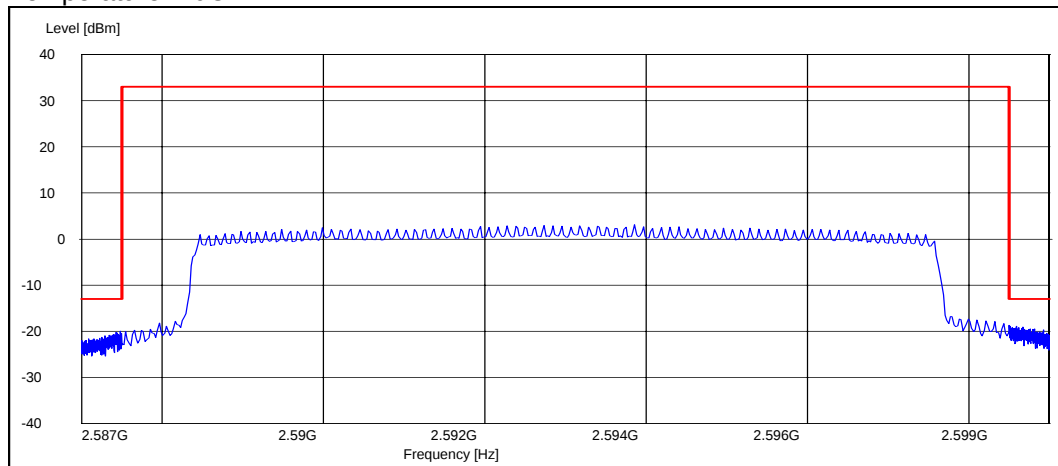

Temperature -30C

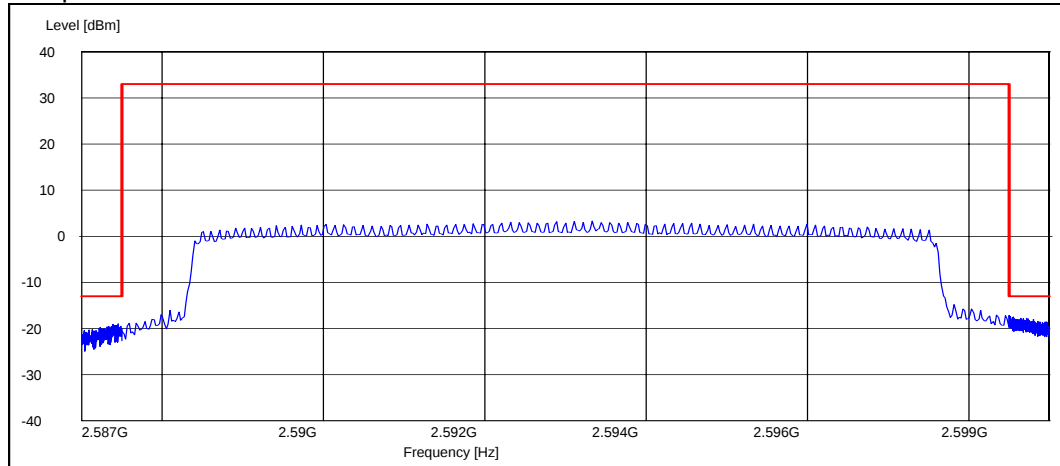

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B