

# RF MEASUREMENT REPORT

---

**FCC ID:** LNQ-WF810G-2  
**Applicant:** Actiontec Electronics Inc.  
**Product:** Wi-Fi 6E Mesh Extender  
**Model No.:** GE6E220C, WF-810G  
**FCC Classification:** Unlicensed National Information Infrastructure (NII)  
**FCC Rule Part(s):** Part 15 Subpart E (Section 15.407)  
**Result:** Complies  
**Received Date:** 2024-01-15  
**Test Date:** 2024-01-17 ~ 2024-02-18

**Reviewed By:**

\_\_\_\_\_  
Kevin Guo

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

**Revision History**

Report No.	Version	Description	Issue Date	Note
2401RSU026-U3	V01	Initial Report	2024-03-11	Valid

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>6</b>
1.1. Applicant .....	6
1.2. Manufacturer.....	6
1.3. Testing Facility .....	6
1.4. Product Information .....	7
1.5. Radio Specification under Test.....	7
1.6. Working Frequencies.....	9
1.7. Antenna Details .....	10
<b>2. Test Configuration .....</b>	<b>11</b>
2.1. Test Mode .....	11
2.2. Test System Connection Diagram .....	12
2.3. Test Software .....	12
2.4. Applied Standards .....	12
2.5. Test Environment Condition.....	13
<b>3. Antenna Requirements .....</b>	<b>14</b>
<b>4. Measuring Instrument .....</b>	<b>15</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>17</b>
5.1. Decision Rules.....	17
5.2. Measurement Uncertainty .....	17
<b>6. Test Result.....</b>	<b>18</b>
6.1. Summary .....	18
6.2. 26dB & 99% Bandwidth Measurement.....	19
6.2.1. Test Limit.....	19
6.2.2. Test Procedure .....	19
6.2.3. Test Setting .....	19
6.2.4. Test Setup.....	20
6.2.5. Test Result .....	20
6.3. 6dB Bandwidth Measurement .....	21
6.3.1. Test Limit.....	21
6.3.2. Test Procedure .....	21
6.3.3. Test Setting .....	21
6.3.4. Test Setup.....	21
6.3.5. Test Result .....	21
6.4. Output Power Measurement.....	22
6.4.1. Test Limit.....	22

6.4.2.	Test Procedure .....	22
6.4.3.	Test Setting .....	22
6.4.4.	Test Setup .....	22
6.4.5.	Test Result .....	22
6.5.	Transmit Power Control Measurement .....	23
6.5.1.	Test Limit .....	23
6.5.2.	Test Procedure .....	23
6.5.3.	Test Setting .....	23
6.5.4.	Test Setup .....	23
6.5.5.	Test Result .....	23
6.6.	Power Spectral Density Measurement .....	24
6.6.1.	Test Limit .....	24
6.6.2.	Test Procedure .....	24
6.6.3.	Test Setting .....	24
6.6.4.	Test Setup .....	25
6.6.5.	Test Result .....	25
6.7.	Frequency Stability Measurement .....	26
6.7.1.	Test Limit .....	26
6.7.2.	Test Procedure .....	26
6.7.3.	Test Setup .....	26
6.7.4.	Test Result .....	27
6.8.	Radiated Spurious Emission Measurement .....	28
6.8.1.	Test Limit .....	28
6.8.2.	Test Procedure .....	28
6.8.3.	Test Setting .....	28
6.8.4.	Test Setup .....	30
6.8.5.	Test Result .....	31
6.9.	Radiated Restricted Band Edge Measurement .....	32
6.9.1.	Test Limit .....	32
6.9.2.	Test Procedure .....	34
6.9.3.	Test Setting .....	34
6.9.4.	Test Setup .....	35
6.9.5.	Test Result .....	35
6.10.	AC Conducted Emissions Measurement .....	36
6.10.1.	Test Limit .....	36
6.10.2.	Test Setup .....	36
6.10.3.	Test Result .....	36
<b>Appendix A – Test Result .....</b>		<b>37</b>
A.1	Duty Cycle Test Result .....	37

A.2	26dB Bandwidth Test Result .....	39
A.3	6dB Bandwidth Test Result .....	56
A.4	Output Power Test Result .....	62
A.5	Power Spectral Density Test Result.....	65
A.6	Frequency Stability Test Result.....	96
A.7	Radiated Spurious Emission Test Result.....	97
A.8	Radiated Restricted Band Edge Test Result.....	174
A.9	AC Conducted Emissions Test Result .....	312
<b>Appendix B – Test Setup Photograph .....</b>		<b>314</b>
<b>Appendix C – EUT Photograph .....</b>		<b>315</b>



#### 1.4. Product Information

Product Name	Wi-Fi 6E Mesh Extender
Model No.	GE6E220C, WF-810G
EUT Identification No.	20240115Sample#04(Conducted Testing) 20240115Sample#02(Radiated Testing)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	V5.0 (Single mode, LE only)
Antenna Information	Refer to Section 1.5
Accessory	
Adapter #1	Model No.: ADT-38FKJ-PCU00F Input: 100-240V, 50/60Hz, Max. 1.0A Output: 5.0V=3.0A or 12.0V=3.0A
Adapter #2	Model No.: MS-V3000R150-038B0-US Input: 100-240V ~ 50-60Hz, 1.3A Output: 5.0V=3.0A or 9.0V=3.0A or 12.0V=3.0A or 15.0V=3.0A
Notes:	
<ol style="list-style-type: none"> <li>1. There is not any hardware or software differences between GE6E220C and WF-810G, only for different brand.</li> <li>2. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</li> <li>3. Adapter #1 was selected in this report.</li> </ol>	

#### 1.5. Radio Specification under Test

Frequency Range	For 802.11a/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz	
Type of Modulation	802.11a/ac: OFDM 802.11ax: OFDMA	
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11ac: up to 866.7Mbps 802.11ax: up to 2402Mbps	
Channel Puncturing Function	<input type="checkbox"/> Supported	<input checked="" type="checkbox"/> Unsupported

Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU
------------	---	-------------------------------------



## 1.6. Working Frequencies

### 802.11a/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

### 802.11ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

### 802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

### 802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

**1.7. Antenna Details**

Antenna Type	Frequency (MHz)	TX Paths	Antenna Gain (dBi)				Directional Gain (dBi)	
			Ant 0	Ant 1	Ant 2	Ant 3	Correlated	Uncorrelated
Wi-Fi Antenna								
PIFA	2412 ~ 2462	2	3.90	4.25	--	--	4.0	1.6
	5180 ~ 5825	2	5.42	4.47	--	--	6.3	3.6
	5925 ~ 7125	4	4.60	4.89	4.62	5.47	9.0	3.1
Remark: <ol style="list-style-type: none"> <li>The antenna gain and directional gain refer to manufacturer's antenna specification.</li> <li>The device supports CDD Mode and STBC mode, details refer to the table as below.</li> <li>CDD signals are correlated, the directional gain as follows,                              For power measurements: Array Gain = 0 dB for <math>N_{ANT} \leq 4</math>, the directional gain = max antenna gain + array gain                              For power spectral density (PSD) measurements: the max directional gain (each angle) = <math>10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]</math></li> <li>STBC signals are uncorrelated, the directional gain as follows,                              the max directional gain (each angle) = <math>10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]</math></li> </ol>								

Test Mode	T <sub>x</sub> Paths	CDD Mode	STBC Mode
Wi-Fi 2.4G			
802.11b/g	2	√	X
802.11n/ax	2	X	√
Wi-Fi 5G			
802.11a	2	√	X
802.11n/ac/ax	2	X	√
Wi-Fi 6G			
802.11a	4	√	X
802.11ax	4	X	√
Remark: "√" means "Support", "X" means "Not support".			


## 2. Test Configuration

### 2.1. Test Mode

CDD Mode
Mode 1: Transmit by 802.11a (6Mbps) _ Nss=1 (CDD Mode)
Mode 2: Transmit by 802.11ac-VHT20 (MCS0) _ Nss=2 (STBC Mode)
Mode 3: Transmit by 802.11ac-VHT40 (MCS0) _ Nss=2 (STBC Mode)
Mode 4: Transmit by 802.11ac-VHT80 (MCS0) _ Nss=2 (STBC Mode)
Mode 5: Transmit by 802.11ac-VHT160 (MCS0) _ Nss=2 (STBC Mode)
Mode 6: Transmit by 802.11ax-HE20 (MCS0) _ Nss=2 (STBC Mode)
Mode 7: Transmit by 802.11ax-HE40 (MCS0) _ Nss=2 (STBC Mode)
Mode 8: Transmit by 802.11ax-HE80 (MCS0) _ Nss=2 (STBC Mode)
Mode 9: Transmit by 802.11ax-HE160 (MCS0) _ Nss=2 (STBC Mode)
Notes:
<ol style="list-style-type: none"> <li>For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li> <li>802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report.</li> <li>For CDD mode, this device supports 2 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1.</li> <li>EUT supports one configuration only in 802.11ax full RU mode.</li> <li>As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.</li> </ol>

## 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

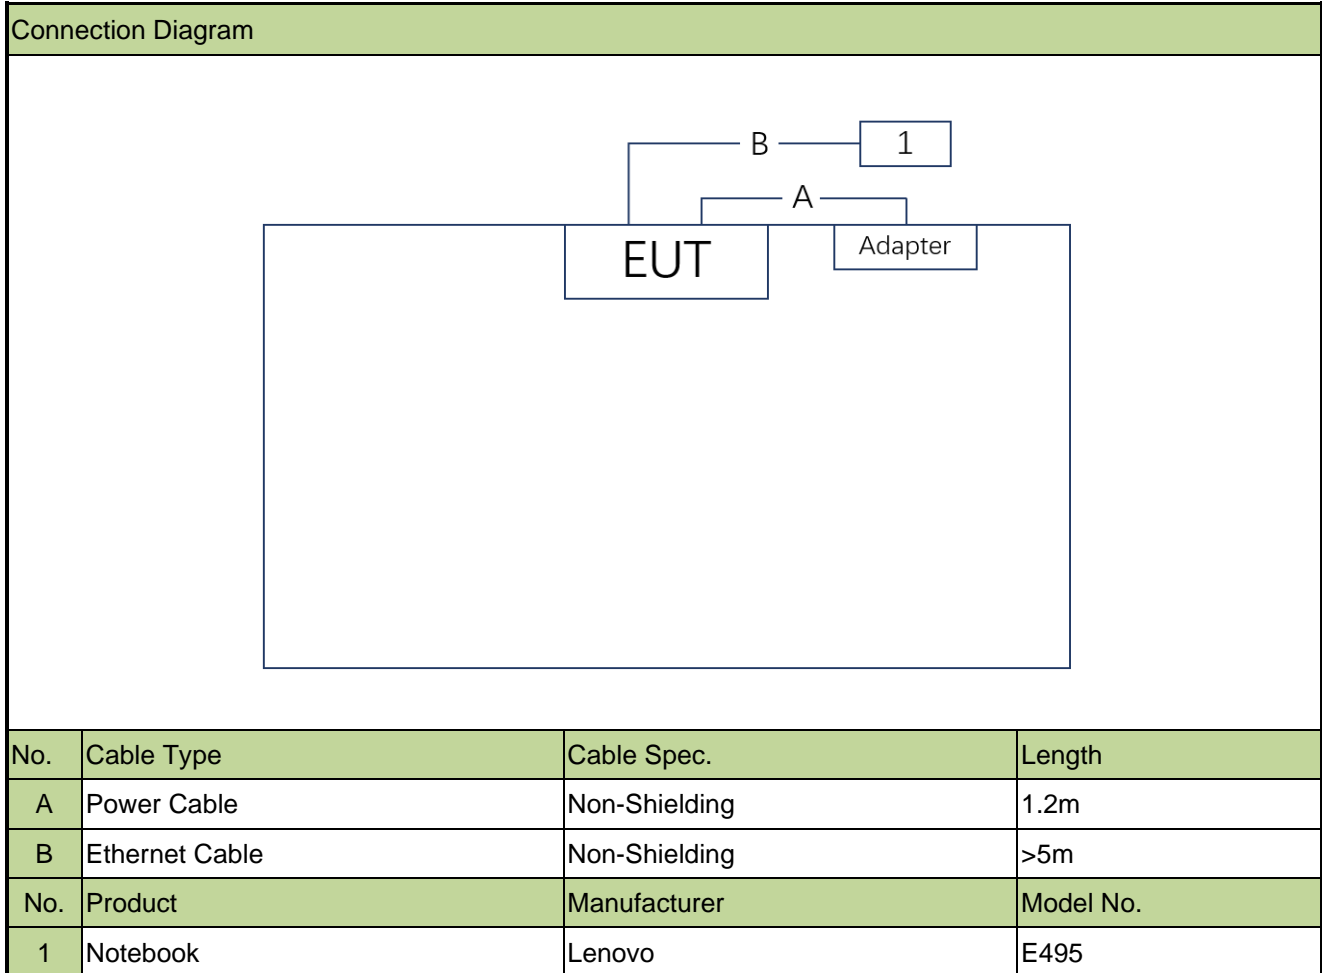

## 2.3. Test Software

The test utility software used during testing was “QRCT”, and the version was 3.0.268.0.

Note: Final power setting please refer to operational description

## 2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

**2.5. Test Environment Condition**

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

### 3. Antenna Requirements

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2024-06-17	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
Preamplifier	MRT	AMP-AC1	MRTSUE11265	1 year	2024-11-03	SIP-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2024-12-17	SIP-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2024-01-28	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2025-01-27	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2024-05-23	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2024-09-27	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2024-10-23	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2024-09-24	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2024-11-02	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2024-10-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2025-01-11	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2024-12-21	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2024-10-28	SIP-TR1
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2024-07-31	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2024-02-04	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2025-02-03	SIP-TR1
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2024-02-04	SIP-TR1
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2025-02-03	SIP-TR1
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2024-05-23	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2024-05-23	SIP-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06614	1 year	2024-10-23	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2024-11-03	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2024-10-23	SIP-SR2

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software



---

Controller_MF 7802BS	1.02	RE Antenna & Turntable
BenchVue Power Meter	2019	Power



## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
<b>Radiated Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.4dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.7%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(g)	Frequency Stability		Pass
15.407(a)(1)(ii), (2), (3)(i), (12)	Peak Power Spectral Density		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

#### Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

## 6.2. 26dB & 99% Bandwidth Measurement

### 6.2.1. Test Limit

N/A

### 6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

### 6.2.3. Test Setting


#### 26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

#### 6.2.4. Test Setup

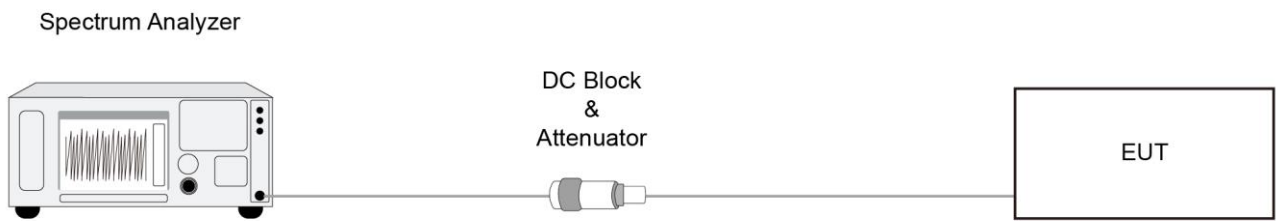

#### 6.2.5. Test Result

Refer to Appendix A.2.

### 6.3. 6dB Bandwidth Measurement

#### 6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


#### 6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

#### 6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 6.3.4. Test Setup

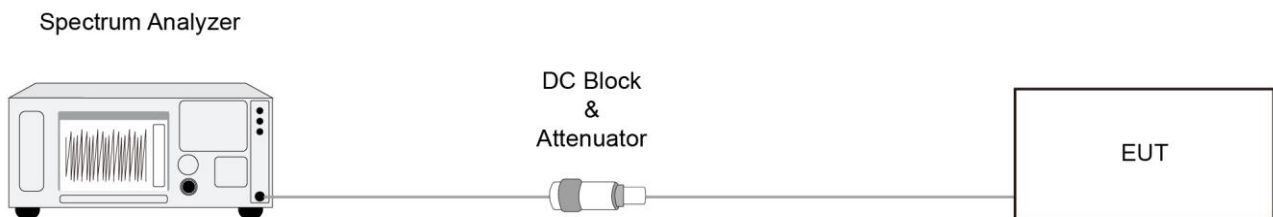

#### 6.3.5. Test Result

Refer to Appendix A.3.

## 6.4. Output Power Measurement

### 6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 6.4.2. Test Procedure


KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

### 6.4.3. Test Setting

#### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 6.4.4. Test Setup

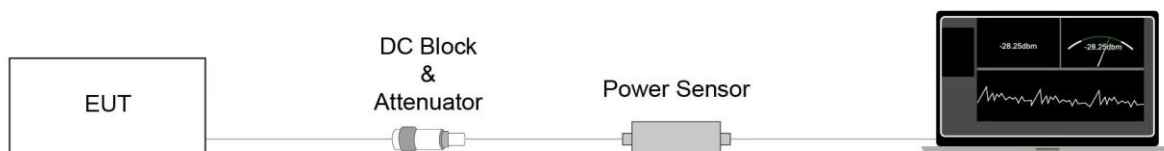

### 6.4.5. Test Result

Refer to Appendix A.4.

## 6.5. Transmit Power Control Measurement

### 6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


### 6.5.2. Test Procedure

KDB 789033 D02v02r01- Section II)E)3)b) Method PM-G

### 6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 6.5.4. Test Setup

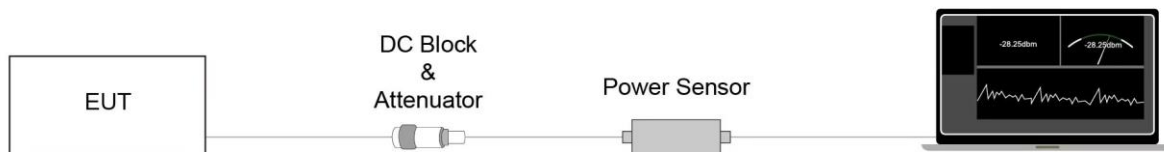

### 6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

## 6.6. Power Spectral Density Measurement

### 6.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 6.6.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)


### 6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = 3 × RBW
5. Number of sweep points  $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add  $10 \cdot \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \cdot \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.



#### 6.6.4. Test Setup

Spectrum Analyzer

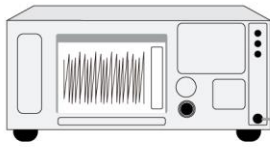

DC Block  
&  
Attenuator



#### 6.6.5. Test Result

Refer to Appendix A.5.

## 6.7. Frequency Stability Measurement

### 6.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 6.7.2. Test Procedure

#### Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

#### Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 6.7.3. Test Setup

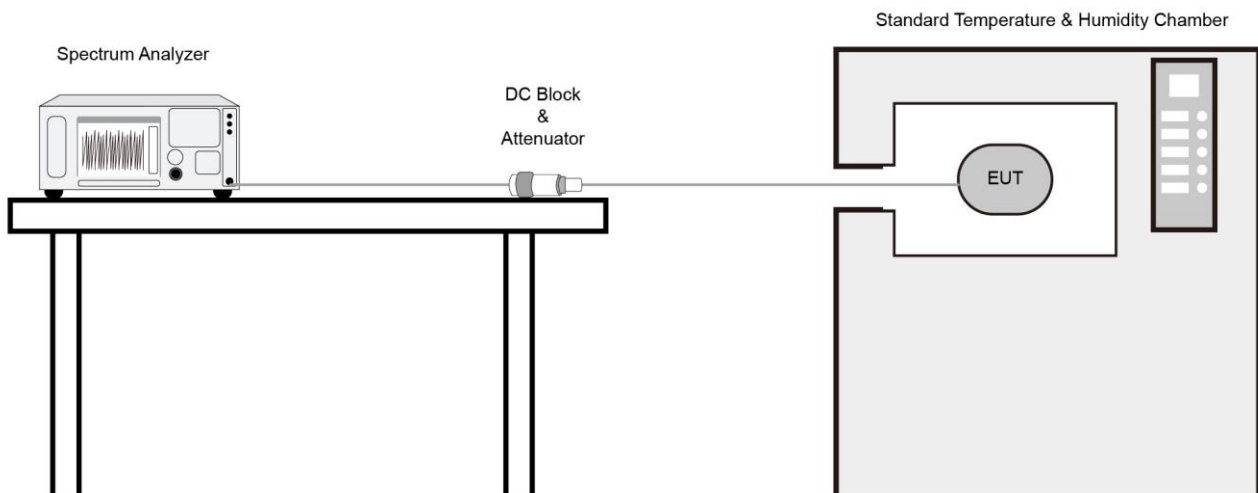

#### **6.7.4. Test Result**

Refer to Appendix A.6.

## 6.8. Radiated Spurious Emission Measurement

### 6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

### 6.8.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

### 6.8.4. Test Setup


Below 30MHz Test Setup:

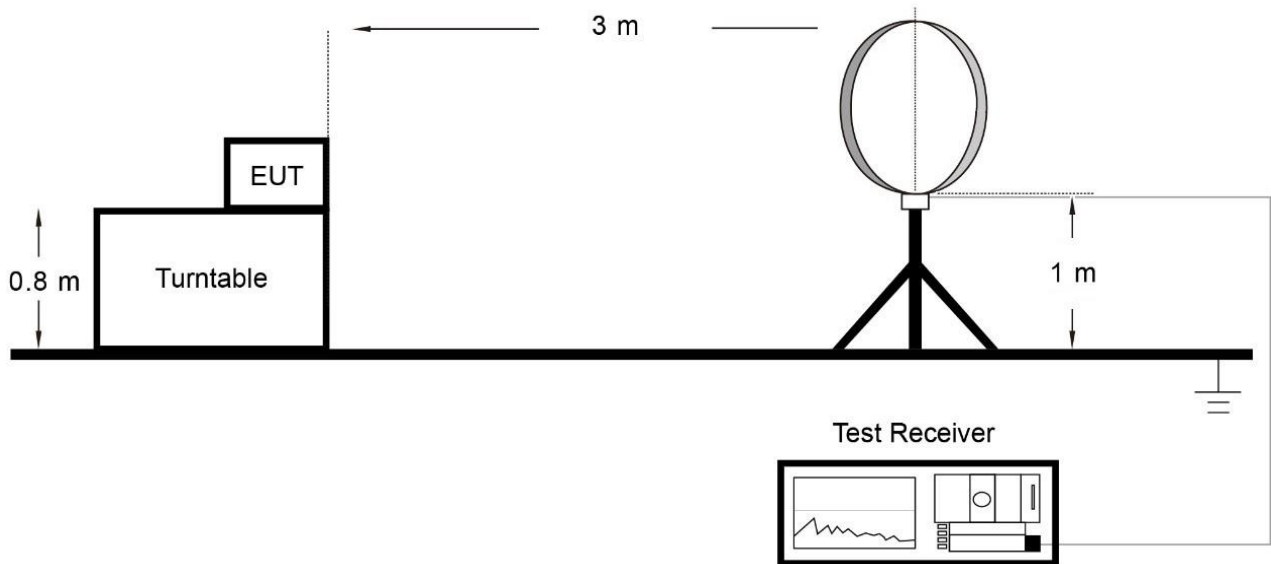

Below 1GHz Test Setup:

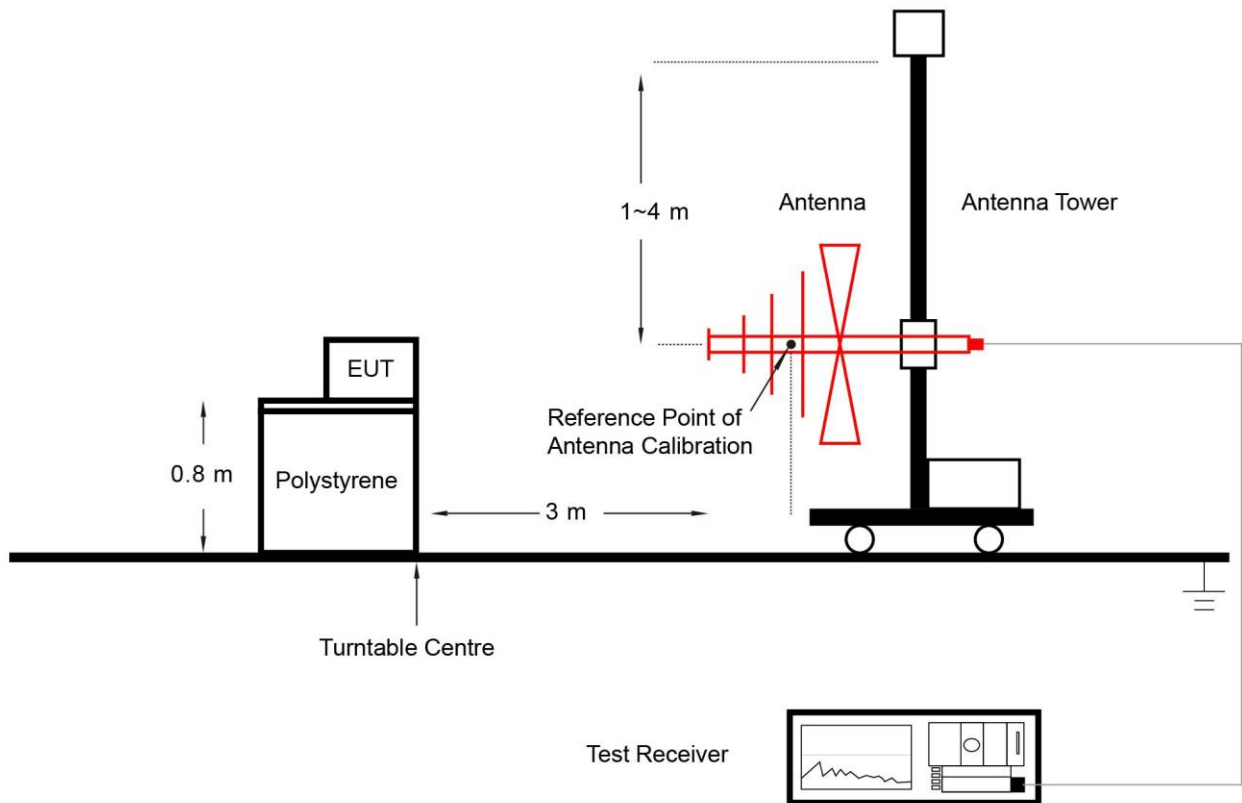

Above 1GHz Test Setup:

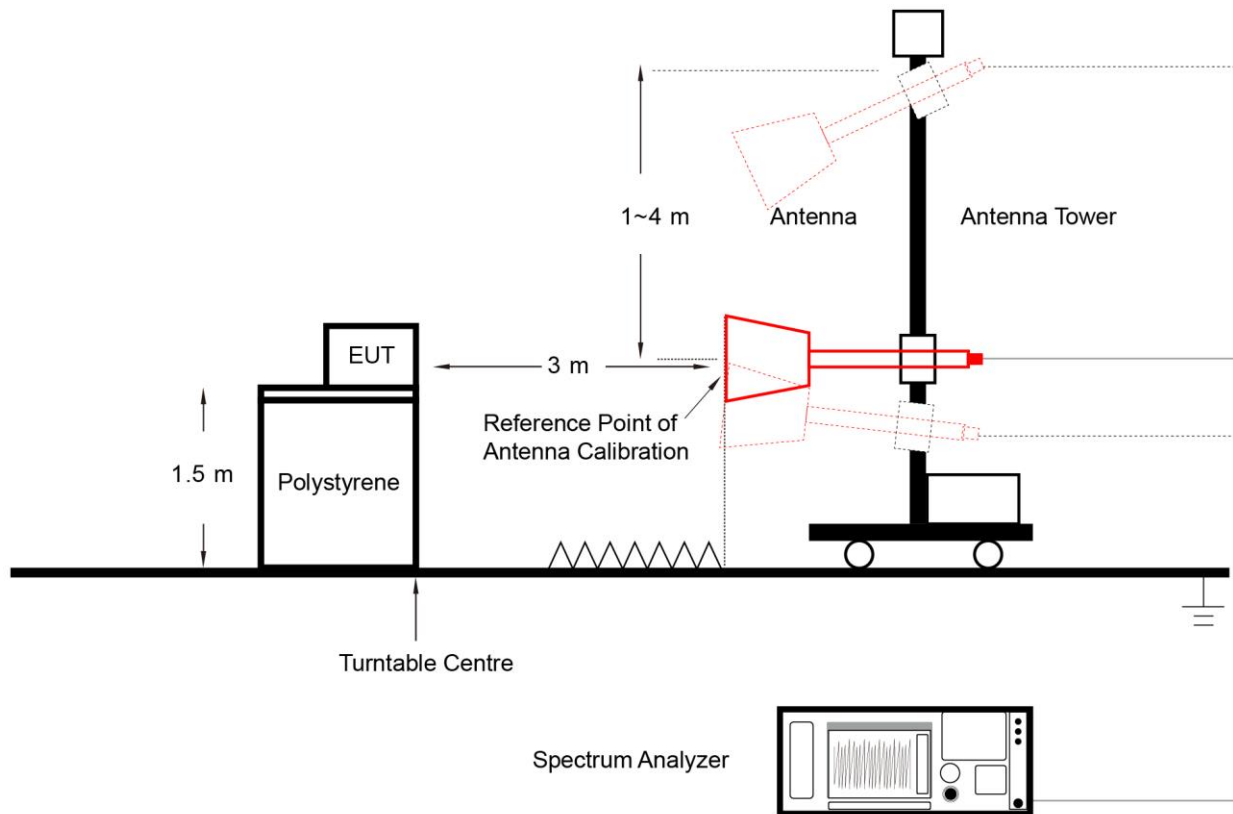

**6.8.5. Test Result**

Refer to Appendix A.7.

## 6.9. Radiated Restricted Band Edge Measurement

### 6.9.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--



**For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

### 6.9.3. Test Setting


#### **Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **Average Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

### 6.9.4. Test Setup

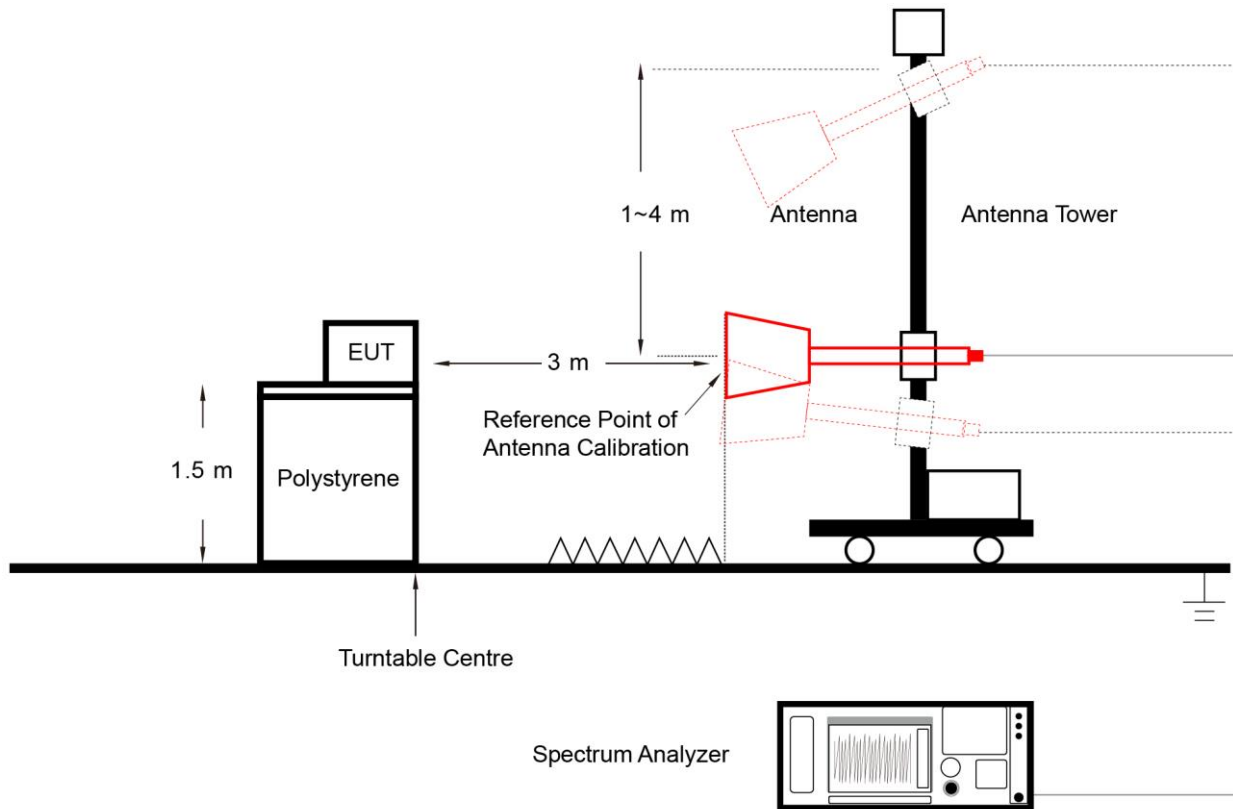

### 6.9.5. Test Result

Refer to Appendix A.8.

## 6.10. AC Conducted Emissions Measurement


### 6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.10.2. Test Setup

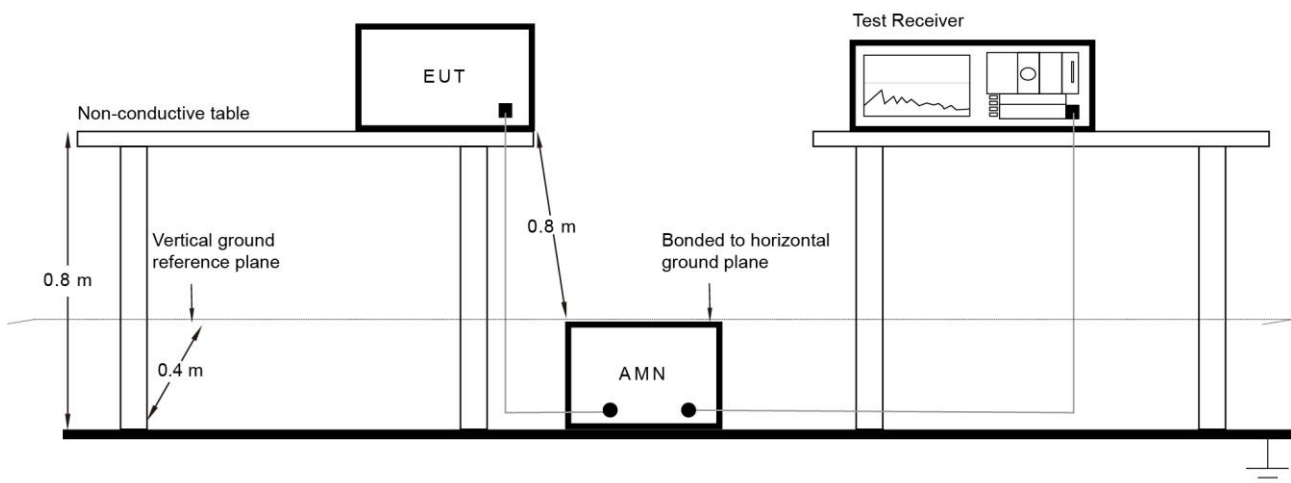

### 6.10.3. Test Result

Refer to Appendix A.9.


## Appendix A – Test Result

### A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-17 ~ 2024-01-18		


Test Mode	Duty Cycle
802.11a	98.84%
802.11ac-VHT20	96.06%
802.11ac-VHT40	96.33%
802.11ac-VHT80	94.19%
802.11ac-VHT160	93.77%
802.11ax-HE20	96.73%
802.11ax-HE40	96.73%
802.11ax-HE80	96.39%
802.11ax-HE160	91.50%

#### Duty Cycle (T = Transmission Duration)

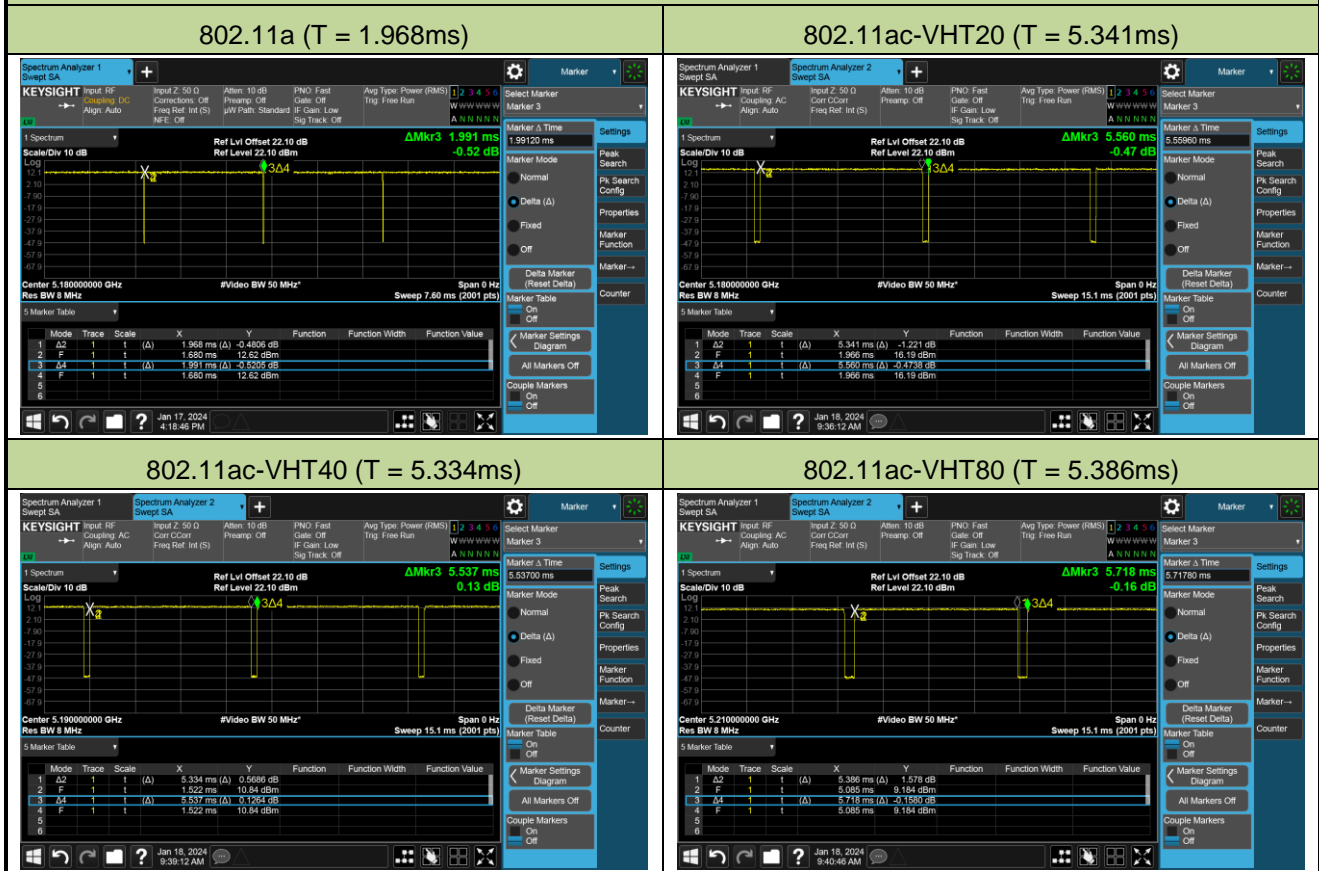


## Duty Cycle (T = Transmission Duration)


802.11ac-VHT160 (T = 2.740ms)

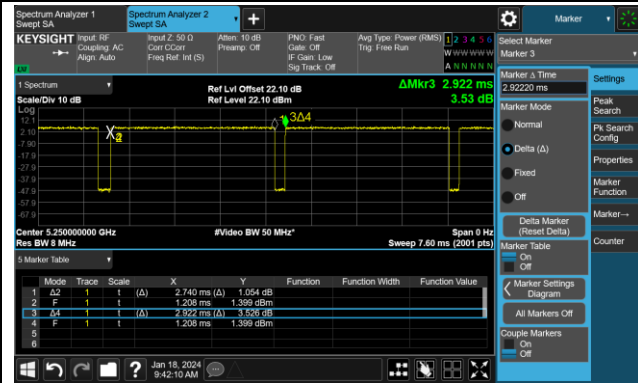


802.11ax-HE20 (T = 5.356ms)

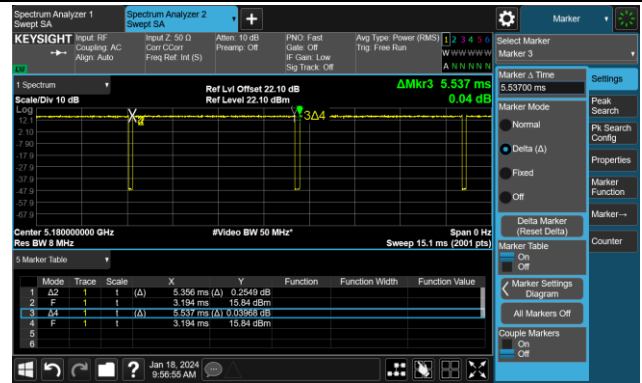


802.11ax-HE40 (T = 5.456ms)

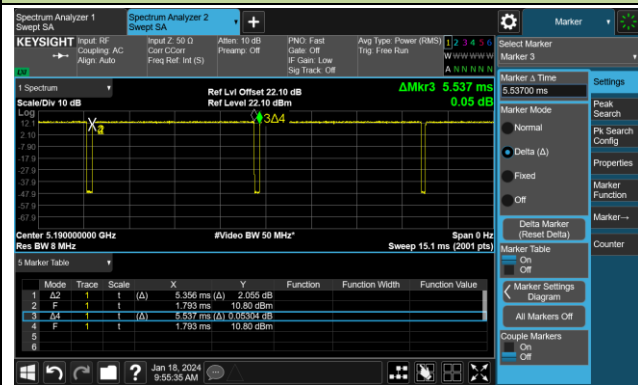

802.11ax-HE80 (T = 4.437ms)

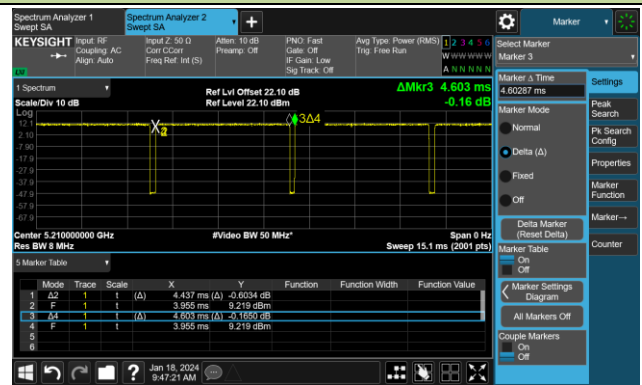

802.11ax-HE160 (T = 2.250ms)

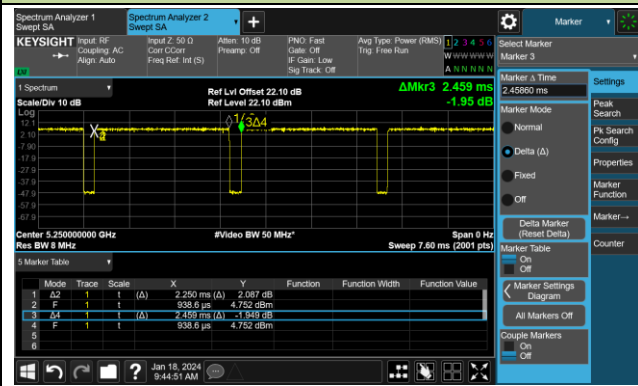

**A.2 26dB Bandwidth Test Result**

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-22 ~ 2024-01-25		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	18.84	16.288
11a	6Mbps	44	5220	29.82	17.250
11a	6Mbps	48	5240	25.54	16.660
11a	6Mbps	52	5260	18.92	16.309
11a	6Mbps	60	5300	19.17	16.288
11a	6Mbps	64	5320	18.89	16.293
11a	6Mbps	100	5500	19.20	16.291
11a	6Mbps	116	5580	19.08	16.294
11a	6Mbps	140	5700	18.81	16.284
11a	6Mbps	144	5720	19.25	16.286
11a	6Mbps	149	5745	30.52	17.684
11a	6Mbps	157	5785	28.98	17.210
11a	6Mbps	165	5825	31.55	17.922
11ac-VHT20	MCS0	36	5180	19.78	17.475
11ac-VHT20	MCS0	44	5220	30.67	18.738
11ac-VHT20	MCS0	48	5240	27.88	17.965
11ac-VHT20	MCS0	52	5260	20.34	17.507
11ac-VHT20	MCS0	60	5300	20.87	17.517
11ac-VHT20	MCS0	64	5320	20.23	17.520
11ac-VHT20	MCS0	100	5500	20.26	17.491
11ac-VHT20	MCS0	116	5580	20.03	17.491
11ac-VHT20	MCS0	140	5700	19.86	17.489
11ac-VHT20	MCS0	144	5720	20.34	17.504
11ac-VHT20	MCS0	149	5745	31.21	19.036
11ac-VHT20	MCS0	157	5785	31.80	18.934
11ac-VHT20	MCS0	165	5825	32.44	19.584

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT40	MCS0	38	5190	38.86	35.791
11ac-VHT40	MCS0	46	5230	72.25	37.121
11ac-VHT40	MCS0	54	5270	38.65	35.893
11ac-VHT40	MCS0	62	5310	39.19	35.771
11ac-VHT40	MCS0	102	5510	38.94	35.805
11ac-VHT40	MCS0	110	5550	39.16	35.853
11ac-VHT40	MCS0	134	5670	39.25	35.791
11ac-VHT40	MCS0	142	5710	38.98	35.786
11ac-VHT40	MCS0	151	5755	77.44	36.983
11ac-VHT40	MCS0	159	5795	74.64	37.006
11ac-VHT80	MCS0	42	5210	80.16	74.795
11ac-VHT80	MCS0	58	5290	80.32	74.762
11ac-VHT80	MCS0	106	5530	80.33	74.839
11ac-VHT80	MCS0	122	5610	82.23	75.145
11ac-VHT80	MCS0	138	5690	83.13	75.174
11ac-VHT80	MCS0	155	5775	94.69	75.390
11ac-VHT160	MCS0	50	5250	162.80	153.310
11ac-VHT160	MCS0	114	5570	162.30	153.180
11ax-HE20	MCS0	36	5180	20.95	18.838
11ax-HE20	MCS0	44	5220	32.93	19.441
11ax-HE20	MCS0	48	5240	31.59	19.252
11ax-HE20	MCS0	52	5260	20.87	18.846
11ax-HE20	MCS0	60	5300	20.53	18.860
11ax-HE20	MCS0	64	5320	20.91	18.858
11ax-HE20	MCS0	100	5500	20.71	18.884
11ax-HE20	MCS0	116	5580	20.69	18.847
11ax-HE20	MCS0	140	5700	20.87	18.863
11ax-HE20	MCS0	144	5720	21.01	18.824
11ax-HE20	MCS0	149	5745	35.40	19.814
11ax-HE20	MCS0	157	5785	32.23	19.557
11ax-HE20	MCS0	165	5825	30.27	19.324



Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	40.06	37.527
11ax-HE40	MCS0	46	5230	72.44	38.390
11ax-HE40	MCS0	54	5270	39.93	37.534
11ax-HE40	MCS0	62	5310	39.92	37.559
11ax-HE40	MCS0	102	5510	39.59	37.508
11ax-HE40	MCS0	110	5550	39.79	37.594
11ax-HE40	MCS0	134	5670	39.98	37.538
11ax-HE40	MCS0	142	5710	40.10	37.476
11ax-HE40	MCS0	151	5755	73.43	38.800
11ax-HE40	MCS0	159	5795	71.21	39.197
11ax-HE80	MCS0	42	5210	81.23	76.617
11ax-HE80	MCS0	58	5290	81.21	76.726
11ax-HE80	MCS0	106	5530	80.38	76.670
11ax-HE80	MCS0	122	5610	82.31	76.915
11ax-HE80	MCS0	138	5690	89.88	77.203
11ax-HE80	MCS0	155	5775	122.10	78.189
11ax-HE160	MCS0	50	5250	164.2	154.61
11ax-HE160	MCS0	114	5570	164.3	154.71


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F <sub>H</sub> (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.33	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.98	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.56	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.40	< 5250
802.11ax-HE20	MCS0	48	5240	5249.63	< 5250
802.11ax-HE40	MCS0	46	5230	5249.20	< 5250
802.11ax-HE80	MCS0	42	5210	5248.31	< 5250

Note:  $F_H = \text{Centre frequency} + 99\% \text{ OBW} / 2$ .


For example, 802.11a 5240MHz,  $F_H = 5240 \text{ MHz} + 16.660 \text{ MHz} / 2 = 5248.33 \text{ MHz}$ .

## 802.11a 26dB Bandwidth &amp; 99% Bandwidth


Channel 36 (5180MHz)

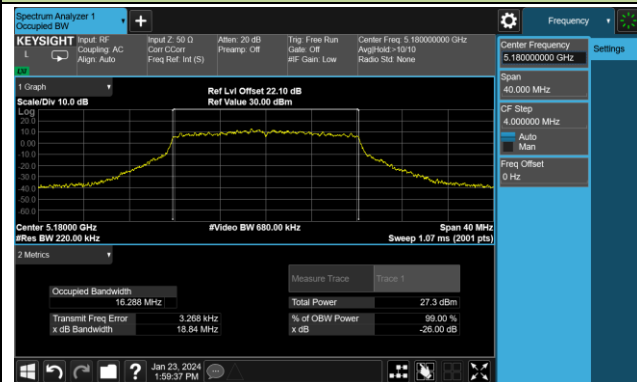


Channel 44 (5220MHz)

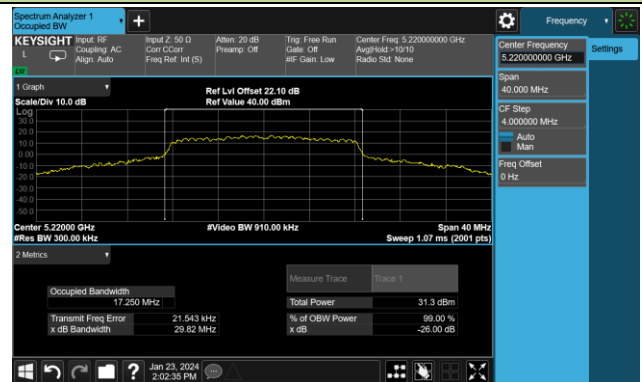


Channel 48 (5240MHz)

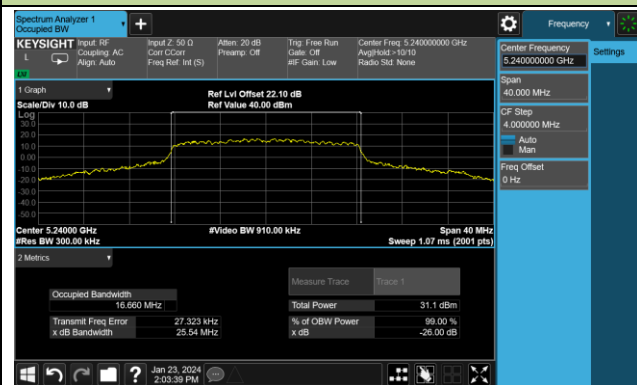


Channel 52 (5260MHz)

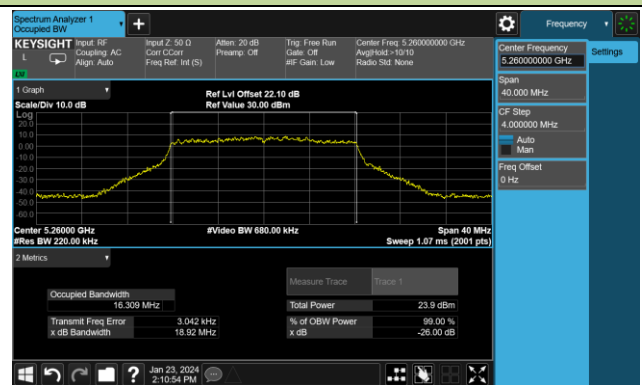


Channel 60 (5300MHz)

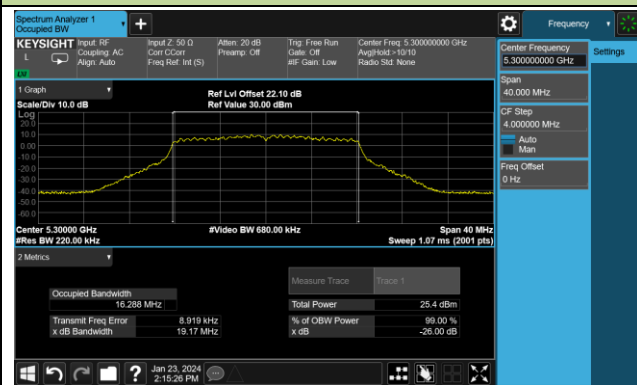


Channel 64 (5320MHz)

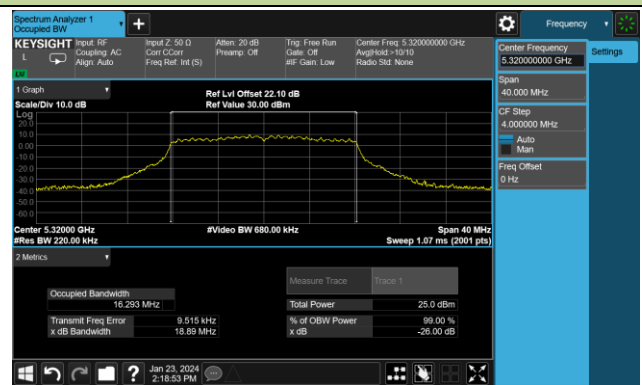

Channel 100 (5500MHz)

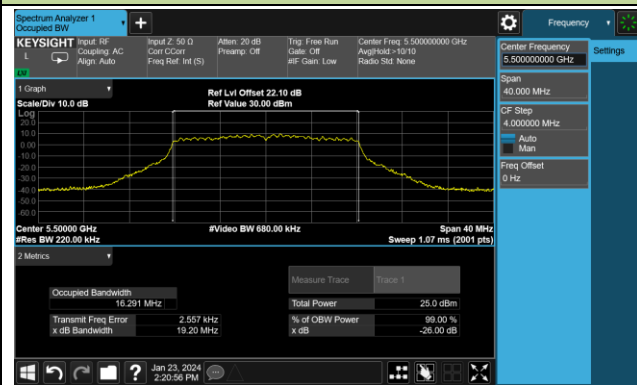


Channel 116 (5580MHz)

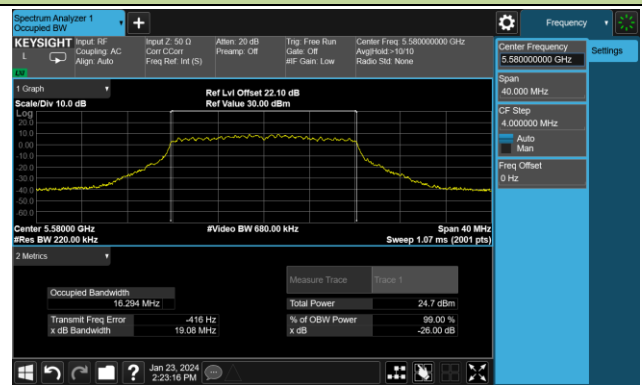


802.11a 26dB Bandwidth & 99% Bandwidth

Channel 140 (5700MHz)

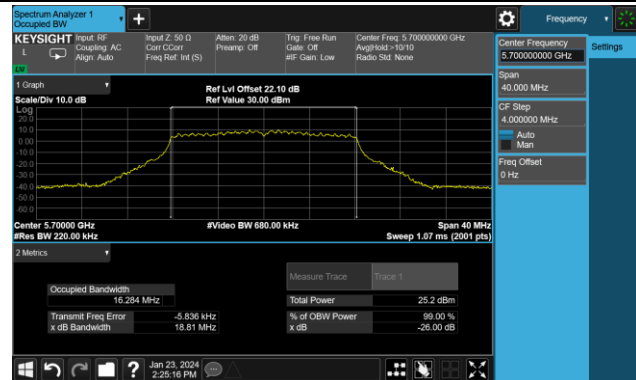


Channel 144(5720MHz)

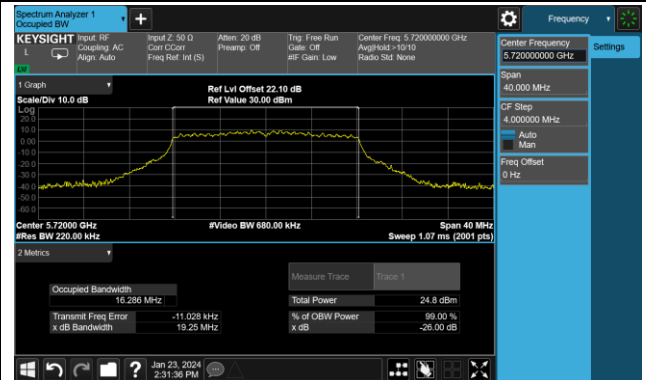

Channel 149 (5745MHz)



Channel 157 (5785MHz)

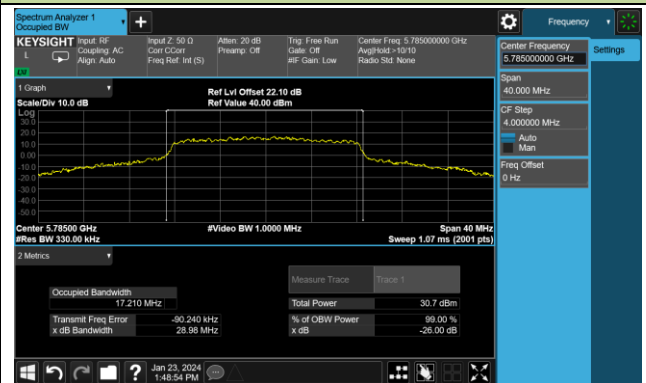

Channel 165 (5825MHz)



802.11ac-VHT20 26dB Bandwidth

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)




Channel 60 (5300MHz)

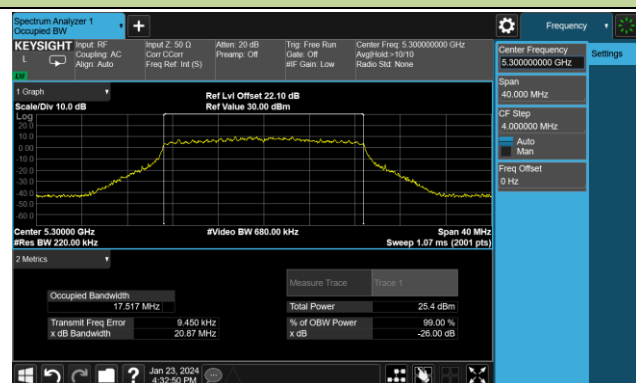


Channel 64 (5320MHz)



Channel 100 (5500MHz)

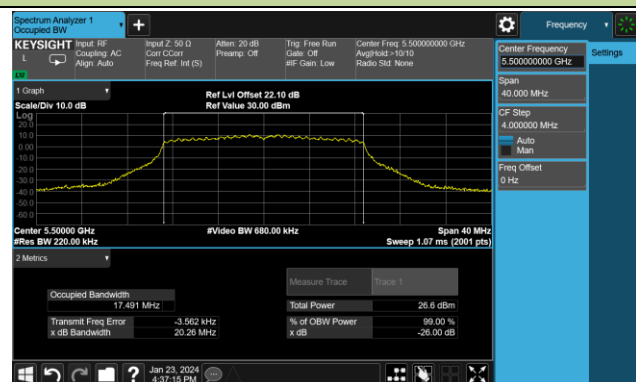


Channel 116 (5580MHz)

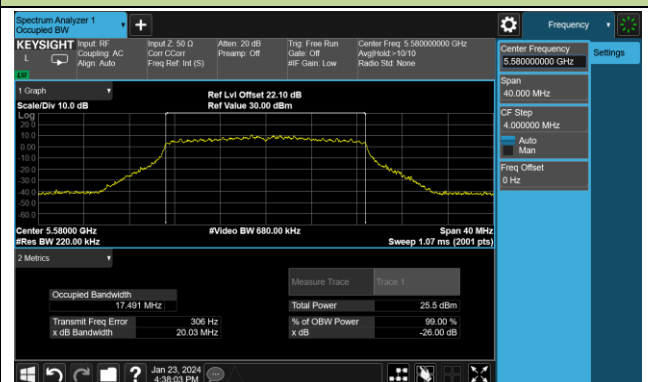


## 802.11ac-VHT20 26dB Bandwidth &amp; 99% Bandwidth

Channel 140 (5700MHz)

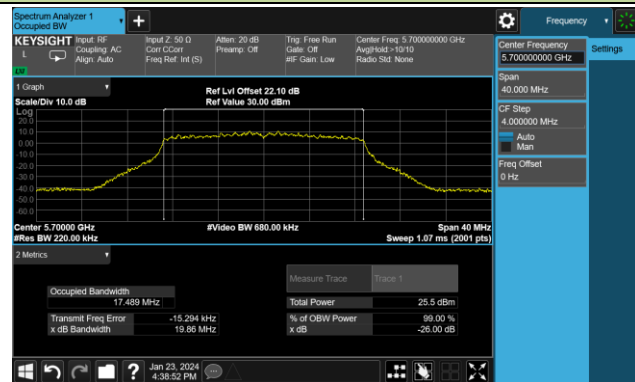


Channel 144(5720MHz)

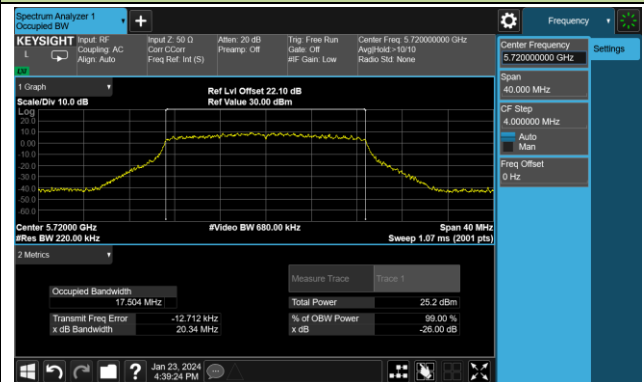


Channel 149 (5745MHz)



Channel 157 (5785MHz)

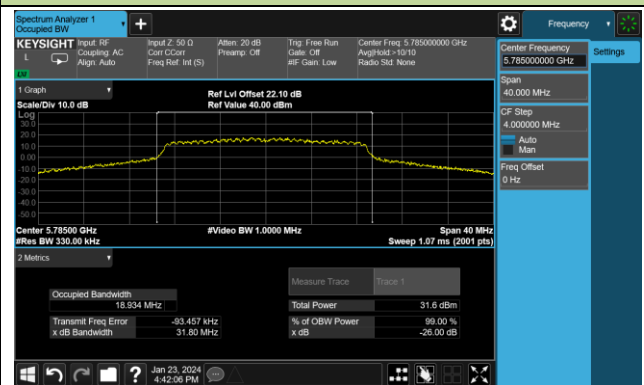


Channel 165 (5825MHz)

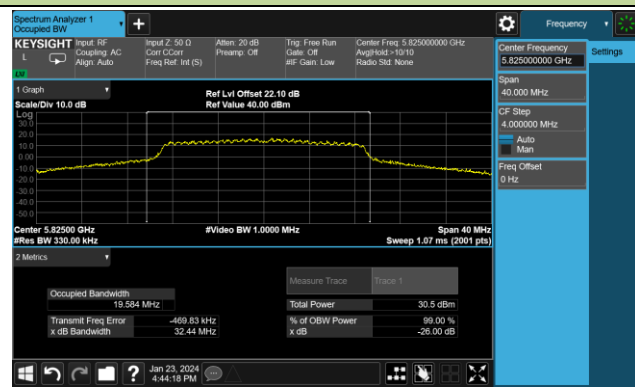


## 802.11ac-VHT40 26dB Bandwidth


Channel 38 (5190MHz)

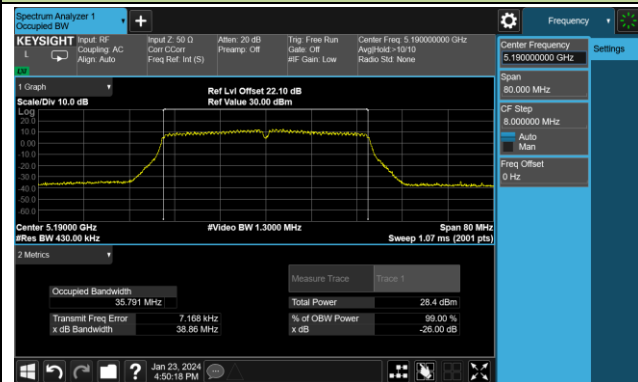


Channel 46 (5230MHz)

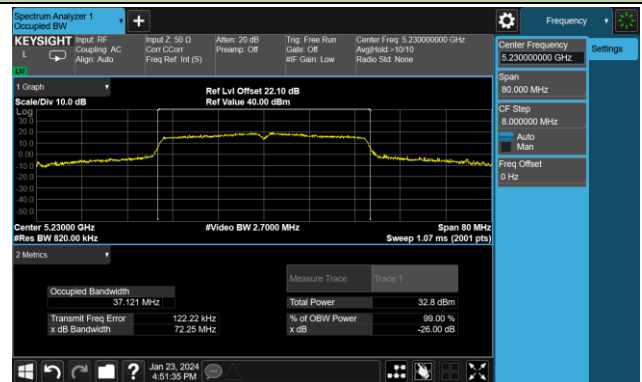


Channel 54 (5270MHz)

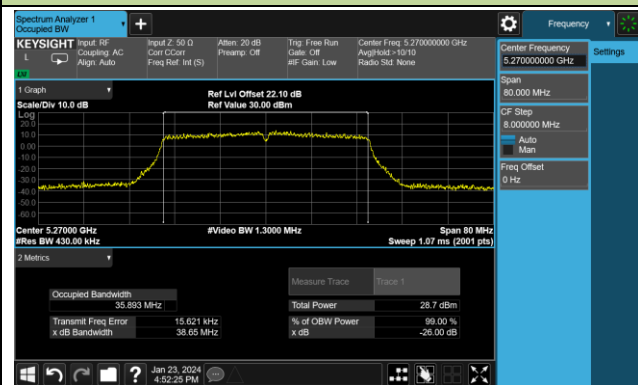


Channel 62 (5310MHz)

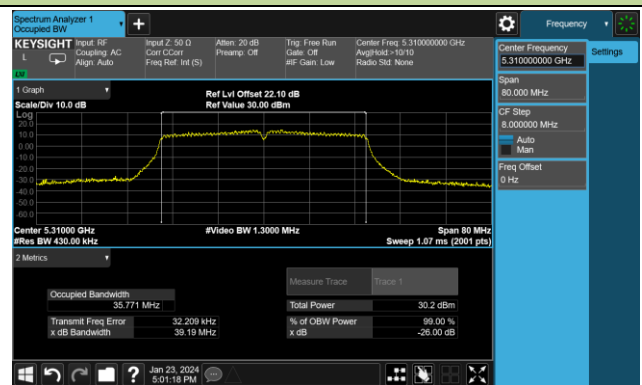


Channel 102 (5510MHz)

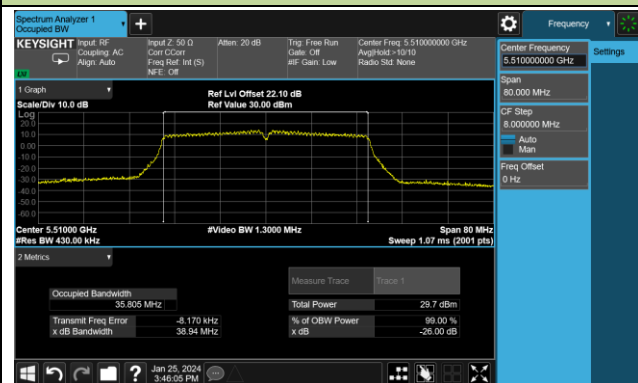


Channel 110 (5550MHz)

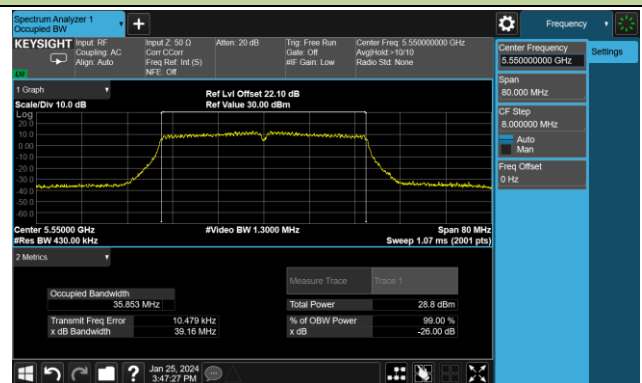


Channel 134 (5670MHz)

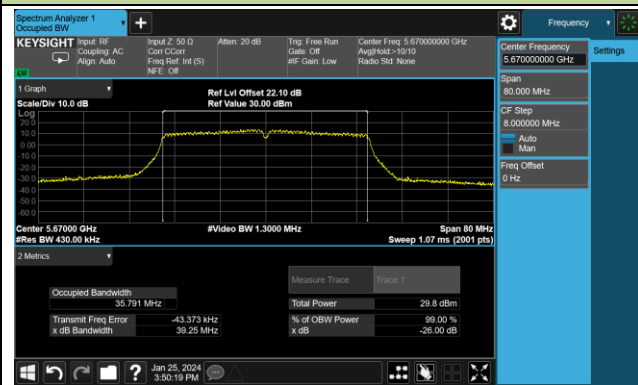


Channel 142(5710MHz)

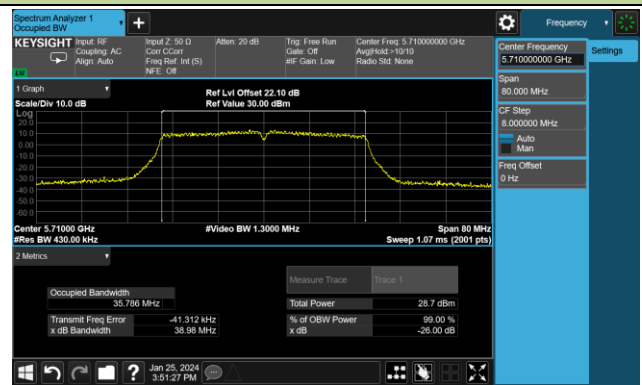


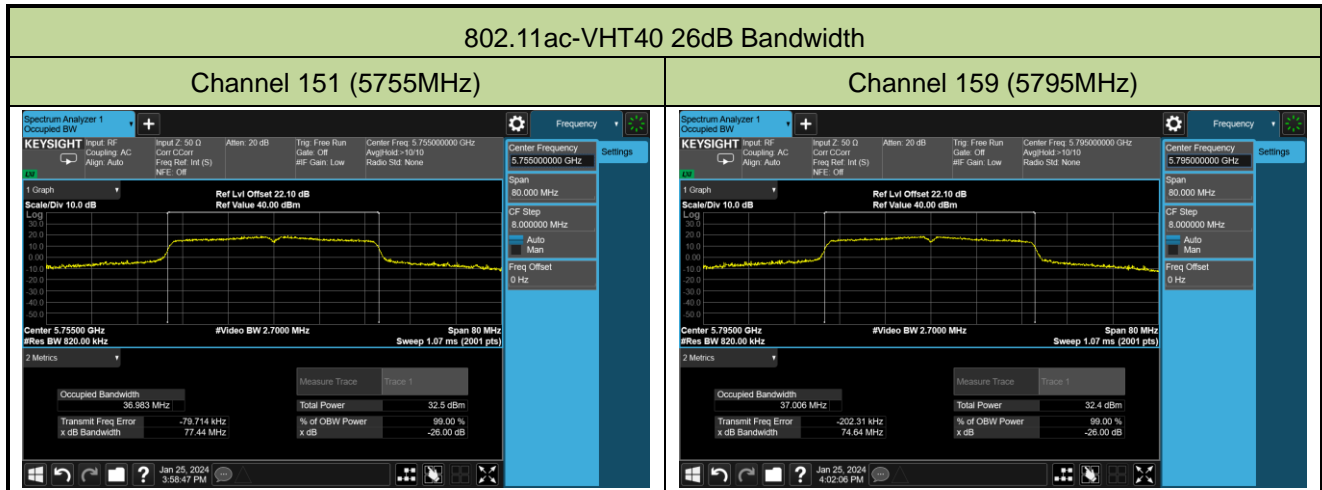

**802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth**

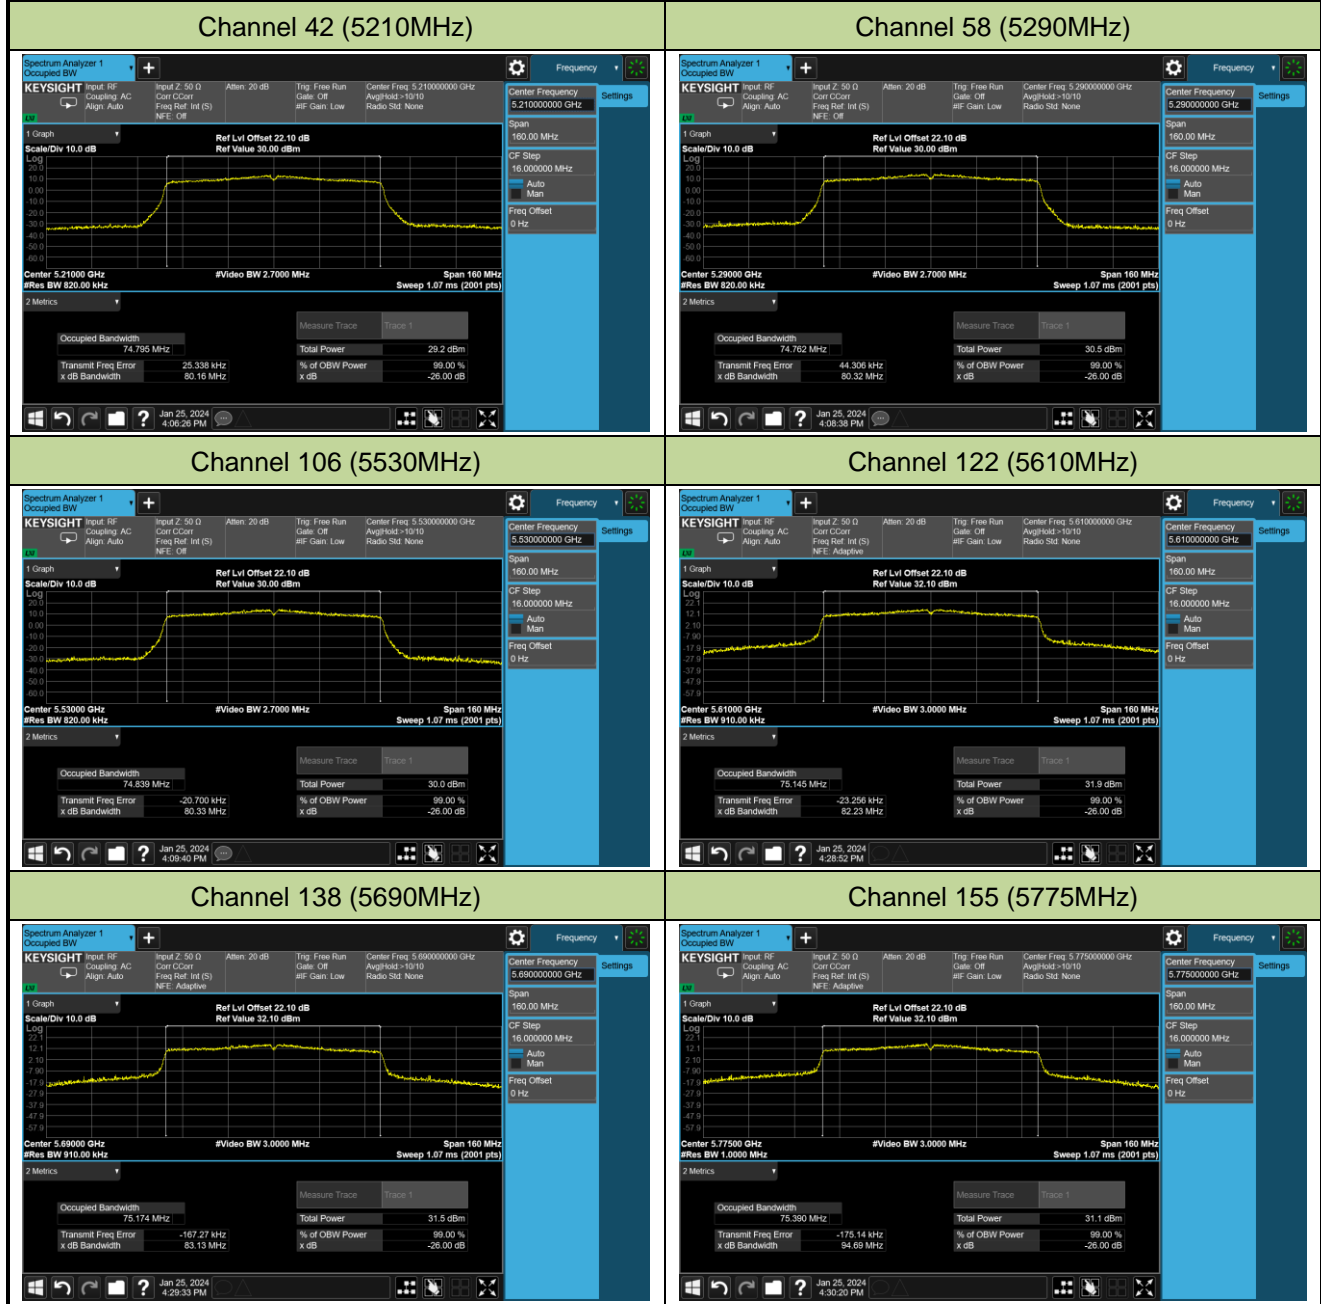




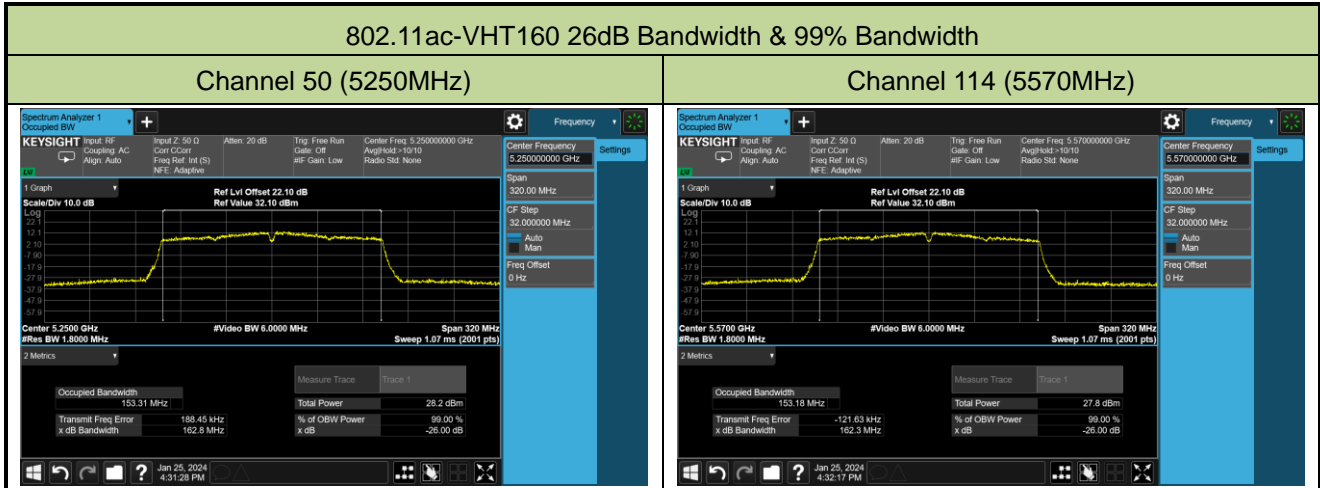


## 802.11ax-HE20 26dB Bandwidth


Channel 36 (5180MHz)

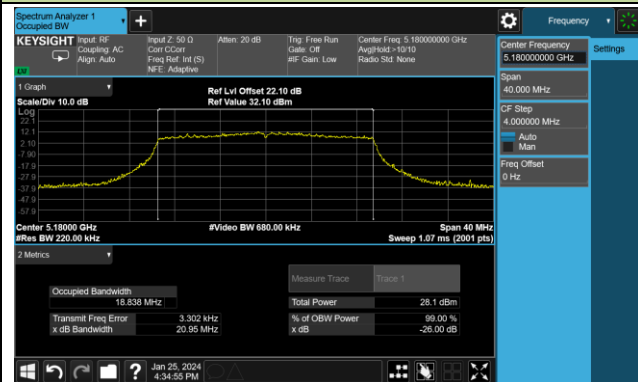


Channel 44 (5220MHz)

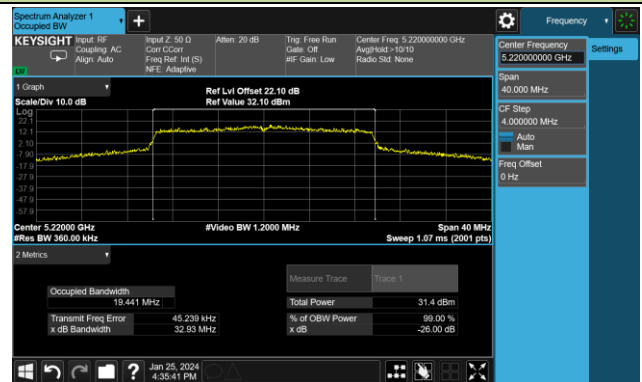


Channel 48 (5240MHz)

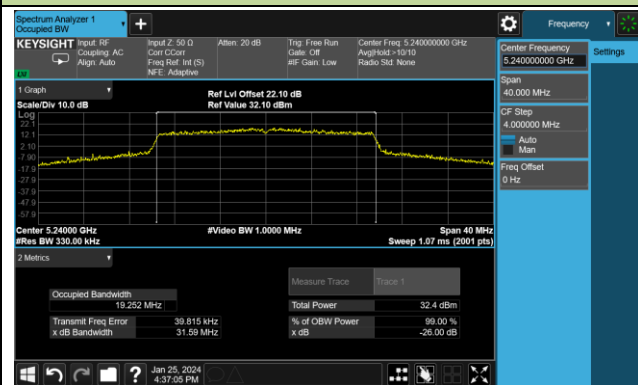

Channel 52 (5260MHz)

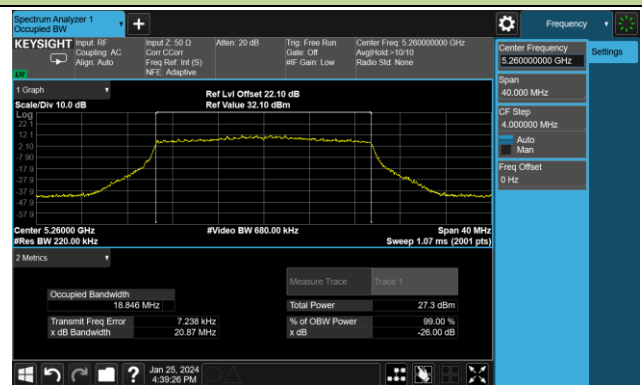


Channel 60 (5300MHz)

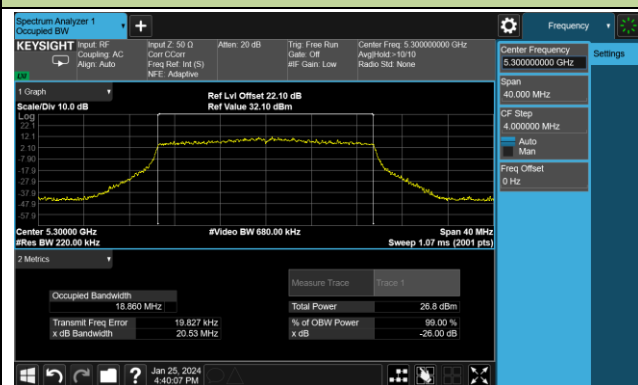


Channel 64 (5320MHz)



Channel 100 (5500MHz)

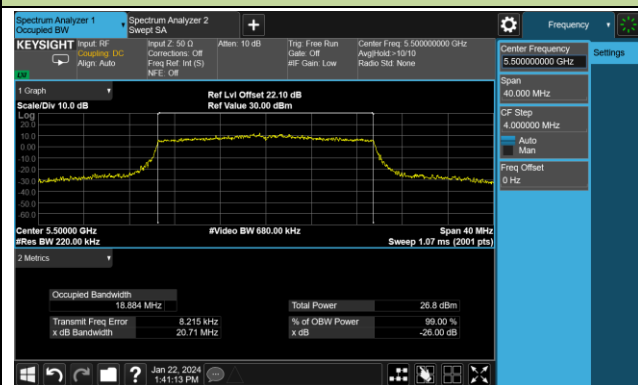


Channel 116 (5580MHz)

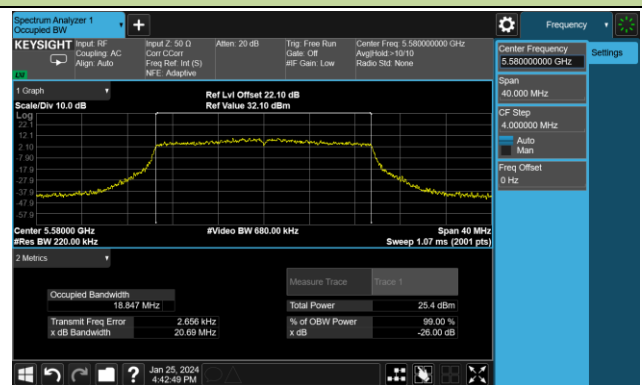


## 802.11ax-HE20 26dB Bandwidth


## Channel 140 (5700MHz)

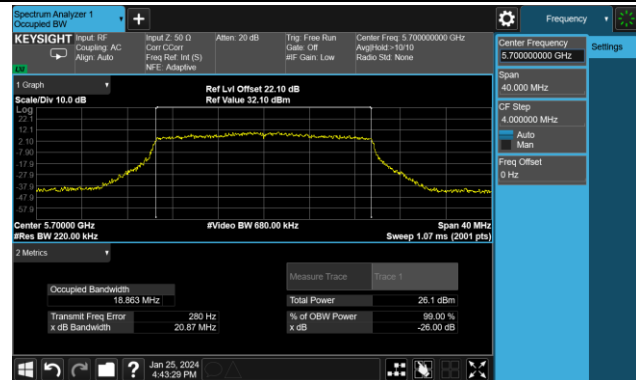


## Channel 144(5720MHz)

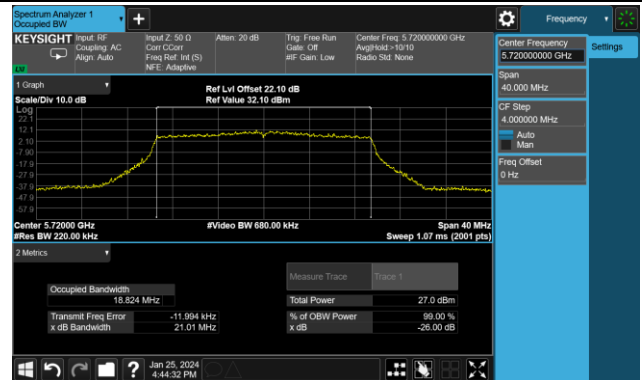

## Channel 149 (5745MHz)

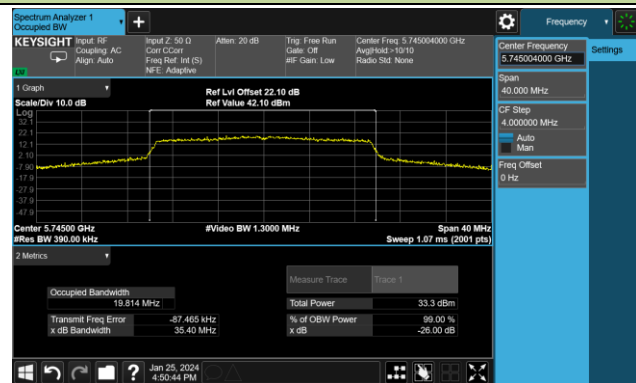

## Channel 157 (5785MHz)

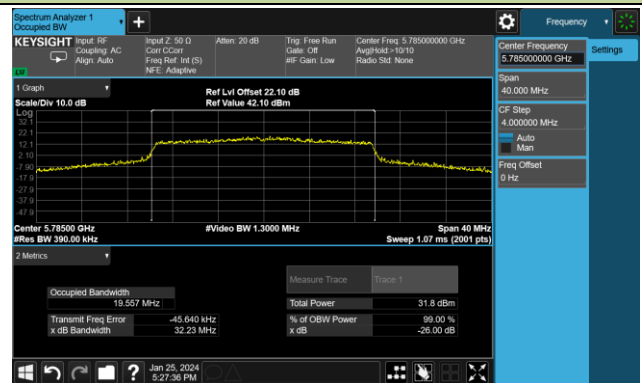


## Channel 165 (5825MHz)




802.11ax-HE40 26dB Bandwidth


Channel 38 (5190MHz)

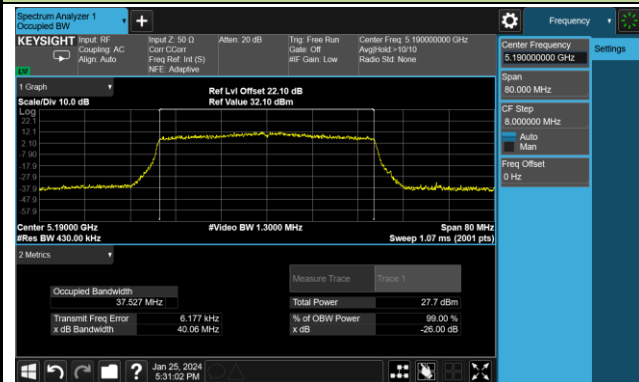


Channel 46 (5230MHz)

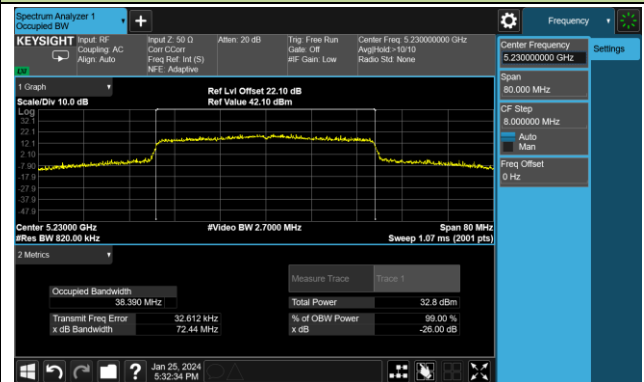


Channel 54 (5270MHz)

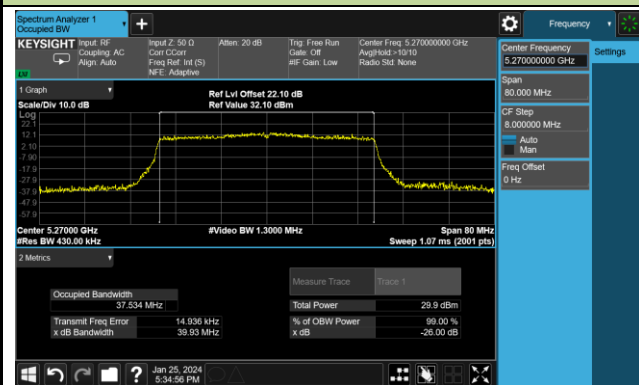


Channel 62 (5310MHz)

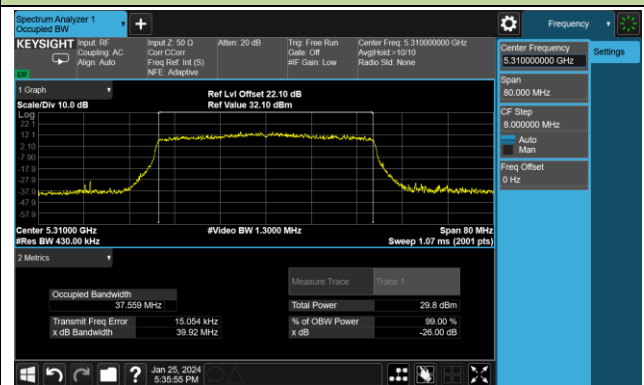


Channel 102 (5510MHz)

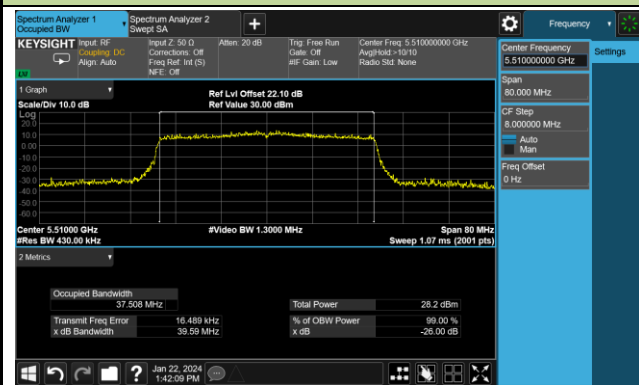

Channel 110 (5550MHz)

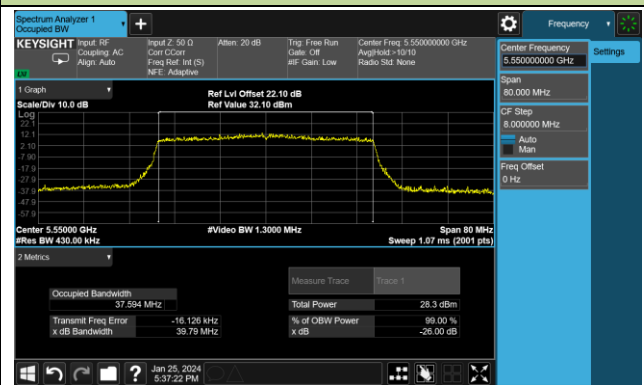

Channel 134 (5670MHz)

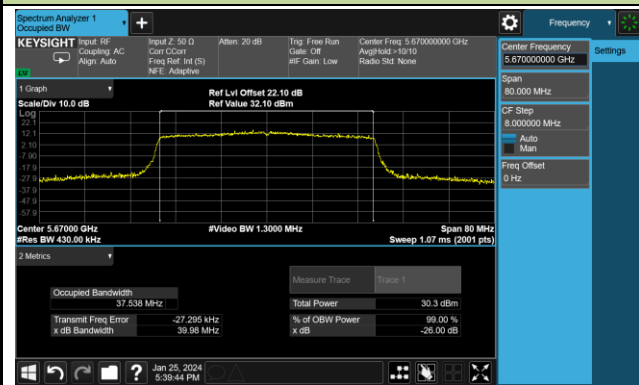

Channel 142(5710MHz)



